

CERTIFICATION TEST REPORT

Report Number. : S-4791706309-E4V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-L325U, SM-L325F

FCC ID : A3LSML325

EUT Description : WCDMA/LTE Smart Wearable + BT/BLE, DTS/UNII a/b/g/n

Test Standard(s) : FCC 47 CFR PART 27 SUBPART F, H, L, M, N

Date Of Issue:
2025-05-05

Prepared by:
UL KOREA LTD.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2025-04-28	Initial issue	Yeonhee Lim
V2	2025-05-05	Updated to address TCB's question	Yeonhee Lim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
4.4. DECISION RULE	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. WORST-CASE ORIENTATION.....	10
5.5. DESCRIPTION OF TEST SETUP.....	12
6. TEST AND MEASUREMENT EQUIPMENT	14
7. SUMMARY TABLE	15
8. CONDUCTED RESULTS	16
8.1. CONDUCTED OUTPUT POWER	16
8.1.1. CONDUCTED AVERAGE OUTPUT POWER	17
8.2. PEAK TO AVERAGE RATIO.....	24
8.2.1. CONDUCTED PEAK TO AVERAGE RESULT	25
8.3. OCCUPIED BANDWIDTH.....	32
8.3.1. OCCUPIED BANDWIDTH RESULT	35
8.4. BAND EDGE EMISSIONS	42
8.4.1. BAND EDGE RESULT	45
8.4.2. EMISSION MASK RESULT	64
8.5. CONDUCTED SPURIOUS EMISSIONS	73
8.5.1. OUT OF BAND EMISSIONS RESULT	75
8.6. FREQUENCY STABILITY	81
8.6.1. FREQUENCY STABILITY RESULT	82
9. RADIATED RESULTS.....	85
9.1. RADIATED POWER (ERP & EIRP)	85
9.1.1. ERP/EIRP RESULT	87
9.2. RADIATED SPURIOUS EMISSION	90
9.2.1. SPURIOUS RADIATION RESULT	92

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: WCDMA/LTE Smart Wearable + BT/BLE, DTS/UNII a/b/g/n.

MODEL NUMBER: SM-L325U, SM-L325F

SERIAL NUMBER: R3AY1008Z3Z (CONDUCTED);
R3AY3003C9X, R3AY3003CBP, R3AY30039HE, R3AY30039JN
(RADIATED);

DATE TESTED: 2025-03-21 – 2025-04-28;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 27F,H,L,M,N	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and Modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Yeonhee Lim
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 27.
3. ANSI TIA-603-E, 2016
4. ANSI C63.26, 2015
5. KDB 971168 D01 Power Meas License Digital Systems v03r01
6. KDB 971168 D02 Misc Rev Approv License Devices v02r02
7. KDB 412172 D01 Determining ERP and EIRP v01r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1(3m semi-anechoic chamber)
☒	Chamber 2(3m semi-anechoic chamber)
☐	Chamber 3(3m semi-anechoic chamber)
☒	Chamber 4(3m Full-anechoic chamber)
☐	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{SG reading with EUT worst orientation (dBm)} - \text{cable loss(between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{SG reading with EUT worst orientation (dBm)} - \text{cable loss(between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBd)}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	1.84 dB
Radiated Disturbance, 9 kHz to 30 MHz	2.41 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.69 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.18 dB
Radiated Disturbance, Above 18 GHz	5.07 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Clause 4.3.3 in IEC Guide 115:2023.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a WCDMA/LTE Smart Wearable + BT/BLE, DTS/UNII a/b/g/n.
This test report addresses the WWAN operational mode.

Representative model	Difference	Derivative model
		SM-L325F
SM-L325U	Hardware	Same
	Software	The UI has changed according to Service Provider

The model SM-L325U was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average radiated ERP / EIRP output powers as follows:

WCDMA

FCC Part 27						
Band	Frequency Range [MHz]	Modulation	Conducted		Radiated	
			Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 4	1712.40 ~ 1752.60	Rel. 99	23.36	216.77	14.98	31.48
		HSDPA	23.36	216.77	13.74	23.66

LTE Band 7

FCC Part 27							
Band	Frequency Range [MHz]	Bandwidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 7	2510.00 ~ 2560.00	20	QPSK	22.82	191.43	13.02	20.04
			16QAM	21.91	155.24	12.37	17.26
	2507.50 ~ 2562.50	15	QPSK	22.81	190.99	12.89	19.45
			16QAM	21.95	156.68	12.27	16.87
	2505.00 ~ 2565.00	10	QPSK	22.73	187.50	12.75	18.84
			16QAM	21.86	153.46	11.72	14.86
	2502.50 ~ 2567.50	5	QPSK	22.57	180.72	12.67	18.49
			16QAM	21.66	146.55	11.77	15.03

LTE Band 12

FCC Part 27							
Band	Frequency Range	BandWidth	Modulation	Conducted		Radiated	
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 12	704.00 ~ 711.00	10	QPSK	23.73	236.05	8.85	7.67
			16QAM	22.86	193.20	6.67	4.65
	701.50 ~ 713.50	5	QPSK	23.61	229.61	8.78	7.55
			16QAM	22.68	185.35	6.55	4.52
	700.50 ~ 714.50	3	QPSK	23.64	231.21	8.82	7.62
			16QAM	22.79	190.11	6.66	4.63
	699.70 ~ 715.30	1.4	QPSK	23.57	227.51	8.77	7.53
			16QAM	22.68	185.35	6.57	4.54

LTE Band 13

FCC Part 27							
Band	Frequency Range	BandWidth	Modulation	Conducted		Radiated	
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 13	782.00	10	QPSK	23.83	241.55	12.58	18.11
			16QAM	22.59	181.55	11.75	14.96
	779.50 ~ 784.50	5	QPSK	23.79	239.33	13.71	23.50
			16QAM	22.82	191.43	12.60	18.20

LTE Band 66

FCC Part 27							
Band	Frequency Range	BandWidth	Modulation	Conducted		Radiated	
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 66	1720.00 ~ 1770.00	20	QPSK	23.73	236.05	16.46	44.26
			16QAM	22.91	195.43	15.70	37.15
	1717.50 ~ 1772.50	15	QPSK	23.62	230.14	16.37	43.35
			16QAM	22.71	186.64	15.52	35.65
	1715.00 ~ 1775.00	10	QPSK	23.49	223.36	16.25	42.17
			16QAM	22.49	177.42	15.37	34.43
	1712.50 ~ 1777.50	5	QPSK	23.49	223.36	16.12	40.93
			16QAM	22.28	169.04	15.20	33.11
	1711.50 ~ 1778.50	3	QPSK	23.32	214.78	16.12	40.93
			16QAM	22.35	171.79	15.28	33.73
	1710.70 ~ 1779.30	1.4	QPSK	23.31	214.29	16.02	39.99
			16QAM	22.40	173.78	15.00	31.62

LTE Band 71

FCC Part 27							
Band	Frequency Range	BandWidth	Modulation	Conducted		Radiated	
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 71	673.00 ~ 688.00	20	QPSK	23.17	207.49	6.85	4.84
			16QAM	22.35	171.79	4.79	3.01
	670.50 ~ 690.50	15	QPSK	23.14	206.06	6.68	4.66
			16QAM	22.34	171.40	4.31	2.70
	668.00 ~ 693.00	10	QPSK	23.09	203.70	6.62	4.59
			16QAM	22.21	166.34	4.30	2.69
	665.50 ~ 695.50	5	QPSK	23.02	200.45	6.64	4.61
			16QAM	22.03	159.59	4.33	2.71

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a internal antenna for the supported bands with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
LTE Band 7 2500 - 2570 MHz	-13.9
LTE Band 12 699 - 716 MHz	-14.5
LTE Band 13 777-787 MHz	-14.5
WCDMA B4 / LTE Band 66 1710 - 1780 MHz	-11.5
LTE Band 71 668 - 698 MHz	-15.3

5.4. WORST-CASE ORIENTATION

Following Modes should be considered as worst-case scenario for all other measurements.

- UMTS REL 99/HSDPA
The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on REL 99 and HSDPA modulations. It was found REL 99 results were worst case.
- LTE Bands
The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM modulations.
- Conducted Spurious Emission

Highest conducted output power setting for each bands					
LTE Band	Frequency (MHz)	Bandwidth (MHz)	Modulation	RB size	RB offset
7	2510.00	20	QPSK	1	0
	2535.00			1	0
	2560.00			1	0
12	704.00	10	QPSK	1	0
	707.50			1	0
	711.00			1	0
13	782.00	10	QPSK	1	0
66	1720.00	20	QPSK	1	0
	1745.00			1	0
	1770.00			1	0
71	673.00	20	QPSK	1	0
	680.50			1	0
	688.00			1	0

● Radiated Spurious Emission

Highest ERP/ EIRP setting for each bands					
LTE Band	Frequency (MHz)	Bandwidth (MHz)	Modulation	RB size	RB offset
7	2510.00	20	QPSK	1	0
	2535.00			1	0
	2560.00			1	0
12	704.00	10	QPSK	1	0
	707.50			1	0
	711.00			1	0
13	779.50	5	QPSK	1	0
	782.00			1	0
	784.50			1	0
66	1720.00	20	QPSK	1	0
	1745.00			1	0
	1770.00			1	0
71	673.00	20	QPSK	1	0
	680.50			1	0
	688.00			1	0

The fundamental and radiated spurious emission were investigated in three orthogonal orientations X, Y and Z, it was determined that below orientation was worst-case orientation for each band.

Band	Strap	ERP/EIRP			RSE		
		X	Y	Z	X	Y	Z
WCDMA B4	With Strap	-	-	-	-	-	-
	Without Strap	-	-	O	-	O	-
LTE B7	With Strap	-	-	-	O	-	-
	Without Strap	-	-	O	-	-	-
LTE B12	With Strap	-	-	-	-	-	-
	Without Strap	-	O	-	-	O	-
LTE B13	With Strap	-	-	-	-	-	-
	Without Strap	-	-	O	O	-	-
LTE B66	With Strap	-	-	-	-	O	-
	Without Strap	-	-	O	-	-	-
LTE B71	With Strap	-	-	-	-	-	-
	Without Strap	-	O	-	-	-	O

Note1 : For the radiated spurious testing, the EUT attached with travel adapter for the worst case condition. The EUT is continuously communicated with the call box during the tests.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacture	Model	Serial Number	FCC ID
Adapter	SAMSUNG	EP-TA800	R37XBMJF8FBDKA	N/A
Wireless Charger	SAMSUNG	EP-OL300	-	-


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	0.8 m	N/A


TEST SETUP

The EUT is continuously communicated with the call box during the tests.


SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

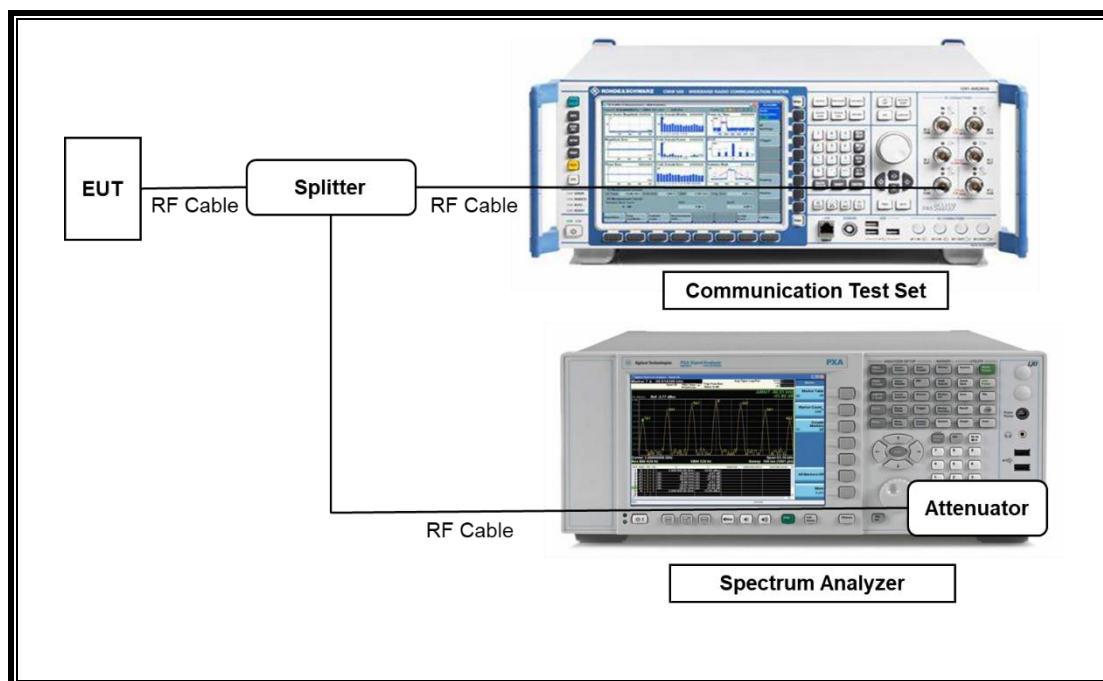

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP) Above 1G

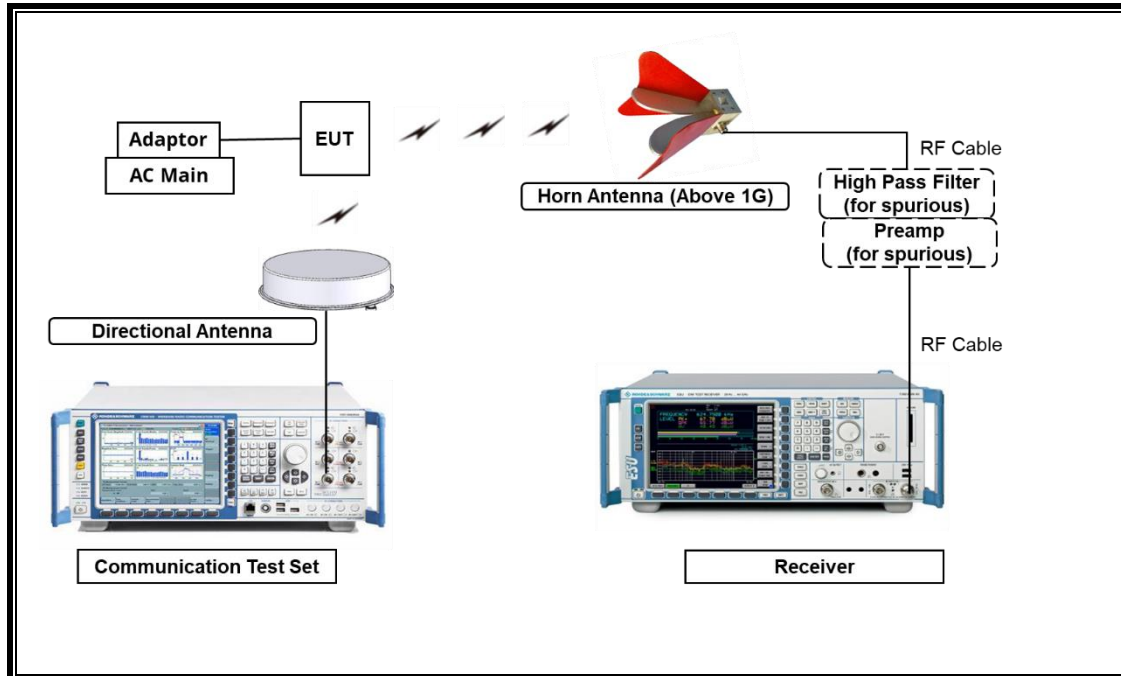

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP) Below 1G

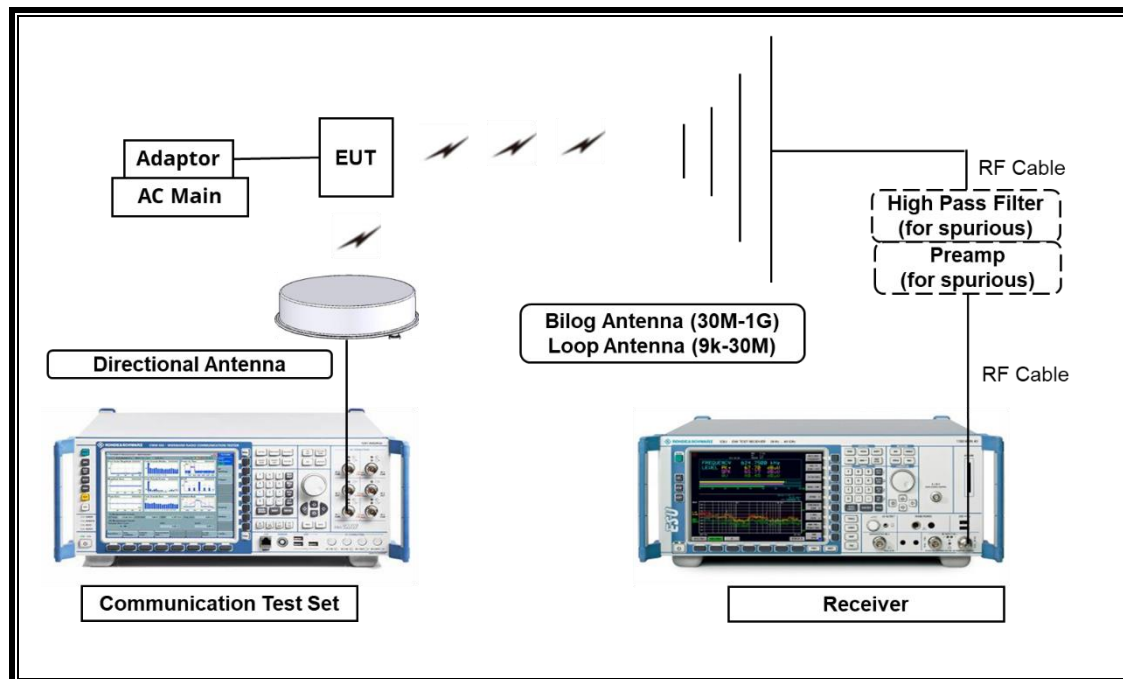

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB-4	00164753	2027-01-08
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2026-07-23
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2025-10-06
Preamplifier	ETS	3116C-PA	00168841	2025-07-25
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	750	2026-07-30
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	845	2026-07-30
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	749	2026-08-12
Antenna, Horn, 18 GHz	ETS	3115	00167211	2026-07-17
Antenna, Horn, 18 GHz	ETS	3115	00161451	2026-07-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	2026-07-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	2026-07-17
Communications Test Set	R&S	CMW500	169797	2025-07-23
DC Power Supply	Agilent / HP	E3640A	MY54226395	2025-07-24
Preamplifier, 1000 MHz	Sonoma	310N	341282	2025-07-22
Preamplifier, 1000 MHz	Sonoma	310N	370599	2025-07-22
Preamplifier, 1000 MHz	Sonoma	310N	351741	2025-07-22
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2025-07-23
Preamplifier, 18 GHz	B&Z Technologies, LLC	BZR-01001800-231040-182020	28451	2025-07-22
Preamplifier, 18 GHz	B&Z Technologies, LLC	BZR-01001800-231040-181515	23576	2025-07-25
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2025-07-24
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2026-01-02
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY57143717	2025-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2025-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2025-07-22
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G005	2025-07-23
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G006	2025-07-23
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	010	2025-07-23
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	011	2025-07-23
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G001	2025-07-23
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G002	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A009	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A001	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A008	2025-07-23
Attenuator	PASTERNAK	PE7004-10	2	2025-07-23
Attenuator	PASTERNAK	PE7395-10	A011	2025-07-25
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-07
Temperature Chamber	ESPEC	SH-642	93001109	2025-07-23
Power Splitter	MINI-CIRCUITS	WA1534	UL003	2026-01-03
Power Splitter	MINI-CIRCUITS	WA1534	UL004	2026-01-03
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	MY57510655	2026-01-03
Notch Filter	MICRO-TRONICS	BRC50705-02	G024	2025-07-24
Notch Filter	MICRO-TRONICS	BRM50702-02	G036	2025-07-23
Notch Filter	MICRO-TRONICS	BRM50707-02	G002	2025-07-23
Notch Filter	MICRO-TRONICS	BRM50709-02	G001	2025-07-23
Notch Filter	MICRO-TRONICS	BRM50713-02	G001	2025-07-24
Notch Filter	MICRO-TRONICS	BRM50716-2	006	2025-07-23
UL Software				
Description	Manufacturer	Model	Version	
Antenna port test software	UL	CLT	Ver 3.4	
Radiated software	UL	UL EMC	Ver 9.5	
Antenna port test software (5G NR FR1)	UL	UL iM	Ver 1.06	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Results
2.1046	Conducted Output Power	N/A	Conducted	Complies
2.1049	Occupied Bandwidth (99%)	N/A		Complies
27.53(c) 27.53(g), 27.53(h)	Conducted Band Edge / Conducted Spurious Emission	-13 dBm		Complies
27.53(m)		-25 dBm		Complies
27.53(m)	Emission Mask	Section 8.4.2		Complies
27.54	Frequency Stability	2.5 ppm		Complies
27.50(c)(10) 27.50(b)(10)	Effective Radiated Power	34.77 dBm	Radiated	Complies
27.50(h)(2)	Effective Isotropic Radiated Power	33 dBm		Complies
27.50(d)(4)		30 dBm		Complies
27.53(g) 27.53(h)	Radiated Spurious Emission	-13 dBm		Complies
27.53(m),		-25 dBm		Complies

8. CONDUCTED RESULTS

8.1. CONDUCTED OUTPUT POWER

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to CMW500 Test Set and configured to operate at maximum power.

RESULTS

See the following pages.

8.1.1. CONDUCTED AVERAGE OUTPUT POWER

WCDMA B4

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	23.36	N/A	24.0
		1413	1732.6	23.29		
		1513	1752.6	23.20		
HSDPA	Subtest 1	1312	1712.4	23.34	0	24.0
		1413	1732.6	23.29		
		1513	1752.6	23.19		
	Subtest 2	1312	1712.4	23.36	0	24.0
		1413	1732.6	23.30		
		1513	1752.6	23.20		
	Subtest 3	1312	1712.4	22.33	0.5	23.5
		1413	1732.6	22.33		
		1513	1752.6	22.18		
	Subtest 4	1312	1712.4	22.32	0.5	23.5
		1413	1732.6	22.30		
		1513	1752.6	22.18		
HSUPA	Subtest 1	1312	1712.4	22.41	0	24.0
		1413	1732.6	22.23		
		1513	1752.6	22.16		
	Subtest 2	1312	1712.4	19.83	2	22.0
		1413	1732.6	19.78		
		1513	1752.6	19.67		
	Subtest 3	1312	1712.4	21.92	1	23.0
		1413	1732.6	21.76		
		1513	1752.6	21.66		
	Subtest 4	1312	1712.4	19.84	2	22.0
		1413	1732.6	19.78		
		1513	1752.6	19.72		
	Subtest 5	1312	1712.4	23.30	0	24.0
		1413	1732.6	23.21		
		1513	1752.6	23.14		
DC-HSDPA	Subtest 1	1312	1712.4	21.94	0	23.0
		1413	1732.6	22.16		
		1513	1752.6	21.65		
	Subtest 2	1312	1712.4	21.87	0	23.0
		1413	1732.6	21.87		
		1513	1752.6	21.51		
	Subtest 3	1312	1712.4	20.85	0.5	22.5
		1413	1732.6	20.78		
		1513	1752.6	20.38		
	Subtest 4	1312	1712.4	20.83	0.5	22.5
		1413	1732.6	20.80		
		1513	1752.6	20.40		

LTE Band 7

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				20850	21100	21350		
				2510.00 MHz	2535.00 MHz	2560.00 MHz		
20 MHz	QPSK	1	0	22.73	22.54	22.82	0.0	23.0
		1	49	22.27	22.09	22.40	0.0	23.0
		1	99	22.19	22.02	22.34	0.0	23.0
		50	0	21.53	21.31	21.63	1.0	22.0
		50	24	21.36	21.13	21.45	1.0	22.0
		50	50	21.27	21.04	21.37	1.0	22.0
		100	0	21.38	21.17	21.50	1.0	22.0
	16QAM	1	0	21.91	21.63	21.74	1.0	22.0
		1	49	21.46	21.18	21.61	1.0	22.0
		1	99	21.37	21.13	21.55	1.0	22.0
		50	0	20.49	20.30	20.62	2.0	21.0
		50	24	20.33	20.11	20.45	2.0	21.0
		50	50	20.22	20.01	20.36	2.0	21.0
		100	0	20.36	20.16	20.48	2.0	21.0
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20825	21100	21375		
				2507.50 MHz	2535.00 MHz	2562.50 MHz		
15 MHz	QPSK	1	0	22.67	22.41	22.81	0.0	23.0
		1	37	22.34	22.09	22.51	0.0	23.0
		1	74	22.26	22.02	22.46	0.0	23.0
		36	0	21.53	21.27	21.62	1.0	22.0
		36	20	21.38	21.16	21.48	1.0	22.0
		36	39	21.32	21.08	21.41	1.0	22.0
	16QAM	75	0	21.40	21.17	21.51	1.0	22.0
		1	0	21.87	21.13	21.95	1.0	22.0
		1	37	21.54	20.81	21.66	1.0	22.0
		1	74	21.44	20.74	21.59	1.0	22.0
		36	0	20.45	20.27	20.65	2.0	21.0
		36	20	20.31	20.12	20.51	2.0	21.0
		36	39	20.24	20.04	20.44	2.0	21.0
		75	0	20.38	20.15	20.51	2.0	21.0
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20800	21100	21400		
				2505.00 MHz	2535.00 MHz	2565.00 MHz		
10 MHz	QPSK	1	0	22.54	22.27	22.73	0.0	23.0
		1	25	22.34	22.10	22.55	0.0	23.0
		1	49	22.26	22.04	22.50	0.0	23.0
		25	0	21.46	21.21	21.58	1.0	22.0
		25	12	21.39	21.13	21.50	1.0	22.0
		25	25	21.33	21.06	21.45	1.0	22.0
	16QAM	50	0	21.38	21.14	21.51	1.0	22.0
		1	0	21.33	21.01	21.86	1.0	22.0
		1	25	21.12	20.81	21.69	1.0	22.0
		1	49	21.02	20.73	21.62	1.0	22.0
		25	0	20.53	20.20	20.60	2.0	21.0
		25	12	20.43	20.11	20.52	2.0	21.0
		25	25	20.38	20.06	20.47	2.0	21.0
		50	0	20.41	20.12	20.48	2.0	21.0
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20775	21100	21425		
				2502.50 MHz	2535.00 MHz	2567.50 MHz		
5 MHz	QPSK	1	0	22.44	22.24	22.57	0.0	23.0
		1	12	22.35	22.17	22.49	0.0	23.0
		1	24	22.33	22.13	22.49	0.0	23.0
		12	0	21.37	21.13	21.55	1.0	22.0
		12	7	21.34	21.09	21.51	1.0	22.0
		12	13	21.31	21.07	21.49	1.0	22.0
	16QAM	25	0	21.33	21.10	21.52	1.0	22.0
		1	0	21.36	21.02	21.66	1.0	22.0
		1	12	21.27	20.93	21.59	1.0	22.0
		1	24	21.23	20.92	21.56	1.0	22.0
		12	0	20.39	20.13	20.64	2.0	21.0
		12	7	20.33	20.09	20.63	2.0	21.0
		12	13	20.30	20.06	20.59	2.0	21.0
		25	0	20.32	20.10	20.54	2.0	21.0

LTE Band 12

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				23060	23095	23130		
				704.00 MHz	707.50 MHz	711.00 MHz		
10 MHz	QPSK	1	0	23.43	23.54	23.73	0.0	24.5
		1	25	23.35	23.43	23.60	0.0	24.5
		1	49	23.32	23.42	23.55	0.0	24.5
		25	0	22.42	22.50	22.60	1.0	23.5
		25	12	22.39	22.46	22.53	1.0	23.5
		25	25	22.38	22.44	22.50	1.0	23.5
		50	0	22.41	22.48	22.53	1.0	23.5
	16QAM	1	0	22.22	22.30	22.86	1.0	23.5
		1	25	22.11	22.15	22.74	1.0	23.5
		1	49	22.08	22.15	22.70	1.0	23.5
		25	0	21.48	21.50	21.62	2.0	22.5
		25	12	21.44	21.47	21.57	2.0	22.5
		25	25	21.42	21.43	21.53	2.0	22.5
		50	0	21.43	21.45	21.54	2.0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23035	23095	23155		
				701.50 MHz	707.50 MHz	713.50 MHz		
5 MHz	QPSK	1	0	23.47	23.61	23.60	0.0	24.5
		1	12	23.44	23.55	23.53	0.0	24.5
		1	24	23.44	23.51	23.52	0.0	24.5
		12	0	22.40	22.49	22.56	1.0	23.5
		12	7	22.39	22.46	22.53	1.0	23.5
		12	13	22.38	22.44	22.51	1.0	23.5
		25	0	22.38	22.45	22.53	1.0	23.5
	16QAM	1	0	22.37	22.36	22.68	1.0	23.5
		1	12	22.34	22.30	22.65	1.0	23.5
		1	24	22.34	22.31	22.62	1.0	23.5
		12	0	21.40	21.48	21.67	2.0	22.5
		12	7	21.38	21.45	21.64	2.0	22.5
		12	13	21.36	21.45	21.63	2.0	22.5
		25	0	21.38	21.46	21.58	2.0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23025	23095	23165		
				700.50 MHz	707.50 MHz	714.50 MHz		
3 MHz	QPSK	1	0	23.37	23.45	23.64	0.0	24.5
		1	8	23.33	23.42	23.62	0.0	24.5
		1	14	23.34	23.43	23.61	0.0	24.5
		8	0	22.36	22.46	22.56	1.0	23.5
		8	4	22.36	22.44	22.55	1.0	23.5
		8	7	22.35	22.45	22.54	1.0	23.5
		15	0	22.38	22.46	22.55	1.0	23.5
	16QAM	1	0	22.17	22.22	22.79	1.0	23.5
		1	8	22.13	22.18	22.76	1.0	23.5
		1	14	22.13	22.16	22.78	1.0	23.5
		8	0	21.38	21.53	21.58	2.0	22.5
		8	4	21.37	21.51	21.55	2.0	22.5
		8	7	21.36	21.51	21.55	2.0	22.5
		15	0	21.33	21.48	21.56	2.0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23017	23095	23173		
				699.70 MHz	707.50 MHz	715.30 MHz		
1.4 MHz	QPSK	1	0	23.37	23.50	23.55	0.0	24.5
		1	3	23.33	23.47	23.54	0.0	24.5
		1	5	23.37	23.50	23.57	0.0	24.5
		3	0	23.30	23.47	23.55	0.0	24.5
		3	1	23.32	23.47	23.56	0.0	24.5
		3	3	23.33	23.46	23.56	0.0	24.5
		6	0	22.35	22.45	22.57	1.0	23.5
	16QAM	1	0	22.35	22.67	22.32	1.0	23.5
		1	3	22.31	22.63	22.28	1.0	23.5
		1	5	22.34	22.64	22.35	1.0	23.5
		3	0	22.35	22.42	22.68	1.0	23.5
		3	1	22.34	22.39	22.68	1.0	23.5
		3	3	22.35	22.37	22.66	1.0	23.5
		6	0	21.43	21.25	21.70	2.0	22.5

LTE Band 13

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
					23230			
					782.00 MHz			
10 MHz	QPSK	1	0		23.83		0.0	24.5
		1	25		23.62		0.0	24.5
		1	49		23.57		0.0	24.5
		25	0		22.72		1.0	23.5
		25	12		22.63		1.0	23.5
		25	25		22.59		1.0	23.5
	16QAM	50	0		22.63		1.0	23.5
		1	0		22.59		1.0	23.5
		1	25		22.35		1.0	23.5
		1	49		22.29		1.0	23.5
		25	0		21.71		2.0	22.5
		25	12		21.63		2.0	22.5
		25	25		21.56		2.0	22.5
		50	0		21.62		2.0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23205	23230	23255		
				779.50 MHz	782.00 MHz	784.50 MHz		
5 MHz	QPSK	1	0	23.79	23.71	23.69	0.0	24.5
		1	12	23.68	23.63	23.62	0.0	24.5
		1	24	23.61	23.60	23.58	0.0	24.5
		12	0	22.64	22.69	22.61	1.0	23.5
		12	7	22.60	22.64	22.58	1.0	23.5
		12	13	22.57	22.61	22.56	1.0	23.5
	16QAM	25	0	22.60	22.65	22.56	1.0	23.5
		1	0	22.59	22.82	22.60	1.0	23.5
		1	12	22.48	22.73	22.51	1.0	23.5
		1	24	22.42	22.68	22.49	1.0	23.5
		12	0	21.64	21.78	21.59	2.0	22.5
		12	7	21.59	21.74	21.56	2.0	22.5
		12	13	21.56	21.71	21.53	2.0	22.5
		25	0	21.59	21.68	21.57	2.0	22.5

LTE Band 66

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				132072	132322	132572		
				1720.00 MHz	1745.00 MHz	1770.00 MHz		
20 MHz	QPSK	1	0	23.45	23.73	23.67	0.0	24.0
		1	49	22.99	23.30	23.21	0.0	24.0
		1	99	22.92	23.19	23.10	0.0	24.0
		50	0	22.24	22.50	22.45	1.0	23.0
		50	24	22.08	22.33	22.27	1.0	23.0
		50	50	22.01	22.25	22.17	1.0	23.0
	16QAM	100	0	22.11	22.37	22.29	1.0	23.0
		1	0	22.63	22.85	22.91	1.0	23.0
		1	49	22.20	22.40	22.41	1.0	23.0
		1	99	22.11	22.28	22.31	1.0	23.0
		50	0	21.23	21.50	21.44	2.0	22.0
		50	24	21.06	21.31	21.26	2.0	22.0
15 MHz	QPSK	50	50	20.97	21.23	21.16	2.0	22.0
		100	0	21.09	21.40	21.27	2.0	22.0
	16QAM	1	0	23.29	23.62	23.56	0.0	24.0
		1	37	22.98	23.29	23.23	0.0	24.0
		1	74	22.91	23.17	23.12	0.0	24.0
		36	0	22.16	22.47	22.33	1.0	23.0
10 MHz	QPSK	36	20	22.04	22.34	22.19	1.0	23.0
		36	39	21.97	22.25	22.11	1.0	23.0
		75	0	22.04	22.35	22.21	1.0	23.0
	16QAM	1	0	22.54	22.34	22.71	1.0	23.0
		1	37	22.24	22.00	22.38	1.0	23.0
		1	74	22.12	21.91	22.26	1.0	23.0
10 MHz	QPSK	36	0	21.10	21.45	21.39	2.0	22.0
		36	20	20.96	21.31	21.25	2.0	22.0
		36	39	20.90	21.23	21.14	2.0	22.0
		75	0	21.03	21.33	21.23	2.0	22.0
	16QAM	1	0	21.94	22.24	22.49	1.0	23.0
		1	25	21.74	22.03	22.30	1.0	23.0
10 MHz	QPSK	1	49	21.65	21.91	22.20	1.0	23.0
		25	0	21.16	21.38	21.24	2.0	22.0
		25	12	21.06	21.31	21.13	2.0	22.0
		25	25	21.02	21.25	21.08	2.0	22.0
		50	0	21.05	21.32	21.11	2.0	22.0
		50	0	21.05	21.32	21.11	2.0	22.0

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131997	132322	132647		
				1712.50 MHz	1745.00 MHz	1777.50 MHz		
5 MHz	QPSK	1	0	23.14	23.49	23.20	0.0	24.0
		1	12	23.06	23.41	23.12	0.0	24.0
		1	24	23.01	23.35	23.07	0.0	24.0
		12	0	22.04	22.36	22.17	1.0	23.0
		12	7	22.01	22.31	22.12	1.0	23.0
		12	13	22.00	22.31	22.09	1.0	23.0
	16QAM	25	0	21.99	22.32	22.11	1.0	23.0
		1	0	22.00	22.25	22.28	1.0	23.0
		1	12	21.91	22.17	22.18	1.0	23.0
		1	24	21.88	22.12	22.13	1.0	23.0
		12	0	21.02	21.35	21.25	2.0	22.0
		12	7	20.98	21.30	21.21	2.0	22.0
		12	13	20.95	21.29	21.18	2.0	22.0
		25	0	20.98	21.31	21.16	2.0	22.0
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131987	132322	132657		
				1711.50 MHz	1745.00 MHz	1778.50 MHz		
3 MHz	QPSK	1	0	23.04	23.32	23.19	0.0	24.0
		1	8	22.96	23.28	23.15	0.0	24.0
		1	14	22.94	23.27	23.11	0.0	24.0
		8	0	22.01	22.31	22.11	1.0	23.0
		8	4	22.03	22.30	22.10	1.0	23.0
		8	7	22.01	22.30	22.08	1.0	23.0
	16QAM	15	0	22.02	22.31	22.10	1.0	23.0
		1	0	21.84	22.11	22.35	1.0	23.0
		1	8	21.76	22.03	22.31	1.0	23.0
		1	14	21.72	22.00	22.29	1.0	23.0
		8	0	21.03	21.39	21.15	2.0	22.0
		8	4	21.02	21.37	21.12	2.0	22.0
		8	7	21.01	21.36	21.11	2.0	22.0
		15	0	20.97	21.34	21.10	2.0	22.0
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				131979	132322	132665		
				1710.70 MHz	1745.00 MHz	1779.30 MHz		
1.4 MHz	QPSK	1	0	23.09	23.31	23.08	0.0	24.0
		1	3	23.04	23.29	23.02	0.0	24.0
		1	5	23.05	23.31	23.04	0.0	24.0
		3	0	23.03	23.29	23.00	0.0	24.0
		3	1	23.03	23.31	23.01	0.0	24.0
		3	3	23.03	23.31	23.04	0.0	24.0
	16QAM	6	0	22.04	22.31	22.06	1.0	23.0
		1	0	22.25	22.07	22.04	1.0	23.0
		1	3	22.19	22.03	22.01	1.0	23.0
		1	5	22.20	22.07	22.04	1.0	23.0
		3	0	22.00	22.40	22.06	1.0	23.0
		3	1	21.97	22.40	22.04	1.0	23.0
		3	3	21.95	22.40	22.04	1.0	23.0
		6	0	20.84	21.45	21.12	2.0	22.0

LTE Band 71

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				133222	133297	133372		
				673.00 MHz	680.50 MHz	688.00 MHz		
20 MHz	QPSK	1	0	23.16	23.17	23.04	0.0	24.5
		1	49	22.78	22.84	22.81	0.0	24.5
		1	99	22.70	22.75	22.69	0.0	24.5
		50	0	22.01	22.03	21.95	1.0	23.5
		50	24	21.88	21.86	21.85	1.0	23.5
		50	50	21.79	21.82	21.79	1.0	23.5
		100	0	21.90	21.87	21.86	1.0	23.5
	16QAM	1	0	22.35	22.17	22.28	1.0	23.5
		1	49	22.00	21.94	22.02	1.0	23.5
		1	99	21.90	21.83	21.92	1.0	23.5
		50	0	20.99	20.96	20.96	2.0	22.5
		50	24	20.84	20.85	20.85	2.0	22.5
		50	50	20.78	20.78	20.77	2.0	22.5
		100	0	20.91	20.89	20.86	2.0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				133197	133297	133397		
				670.50 MHz	680.50 MHz	690.50 MHz		
15 MHz	QPSK	1	0	23.14	22.99	23.13	0.0	24.5
		1	37	22.85	22.79	22.95	0.0	24.5
		1	74	22.76	22.74	22.86	0.0	24.5
		36	0	22.01	21.92	21.99	1.0	23.5
		36	20	21.90	21.85	21.93	1.0	23.5
		36	39	21.83	21.81	21.84	1.0	23.5
	16QAM	75	0	21.91	21.85	21.92	1.0	23.5
		1	0	22.34	21.69	22.26	1.0	23.5
		1	37	22.07	21.50	22.07	1.0	23.5
		1	74	21.99	21.47	21.98	1.0	23.5
		36	0	20.94	20.91	21.01	2.0	22.5
		36	20	20.83	20.83	20.91	2.0	22.5
		36	39	20.78	20.79	20.86	2.0	22.5
		75	0	20.91	20.85	20.91	2.0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				133172	133297	133422		
				668.00 MHz	680.50 MHz	693.00 MHz		
10 MHz	QPSK	1	0	23.01	22.94	23.09	0.0	24.5
		1	25	22.81	22.84	22.97	0.0	24.5
		1	49	22.73	22.81	22.89	0.0	24.5
		25	0	21.94	21.93	21.97	1.0	23.5
		25	12	21.85	21.88	21.90	1.0	23.5
		25	25	21.79	21.85	21.87	1.0	23.5
	16QAM	50	0	21.87	21.87	21.91	1.0	23.5
		1	0	21.79	21.68	22.21	1.0	23.5
		1	25	21.59	21.56	22.10	1.0	23.5
		1	49	21.47	21.52	22.01	1.0	23.5
		25	0	21.00	20.92	20.98	2.0	22.5
		25	12	20.92	20.88	20.93	2.0	22.5
		25	25	20.86	20.84	20.89	2.0	22.5
		50	0	20.91	20.89	20.90	2.0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				133147	133297	133447		
				665.50 MHz	680.50 MHz	695.50 MHz		
5 MHz	QPSK	1	0	23.02	22.96	22.95	0.0	24.5
		1	12	22.91	22.93	22.87	0.0	24.5
		1	24	22.86	22.89	22.87	0.0	24.5
		12	0	21.91	21.85	21.92	1.0	23.5
		12	7	21.87	21.82	21.88	1.0	23.5
		12	13	21.84	21.80	21.86	1.0	23.5
	16QAM	25	0	21.85	21.82	21.89	1.0	23.5
		1	0	21.89	21.71	22.03	1.0	23.5
		1	12	21.80	21.66	21.95	1.0	23.5
		1	24	21.75	21.67	21.92	1.0	23.5
		12	0	20.90	20.87	21.02	2.0	22.5
		12	7	20.87	20.84	20.99	2.0	22.5
		12	13	20.84	20.82	20.95	2.0	22.5
		25	0	20.85	20.81	20.92	2.0	22.5

8.2. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.

Test Spec


In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

RESULTS


See the following pages.

8.2.1. CONDUCTED PEAK TO AVERAGE RESULT


WCDMA

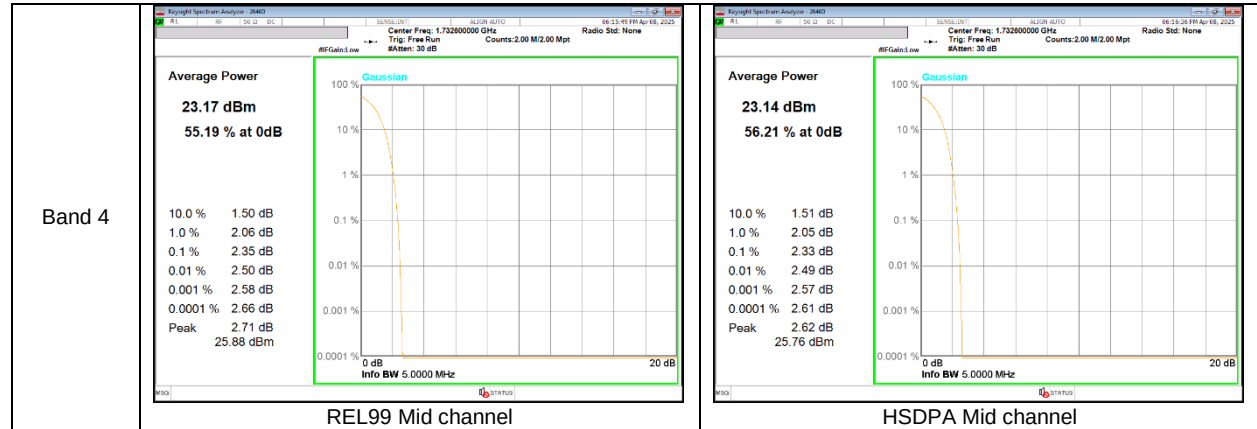


LTE Band 7

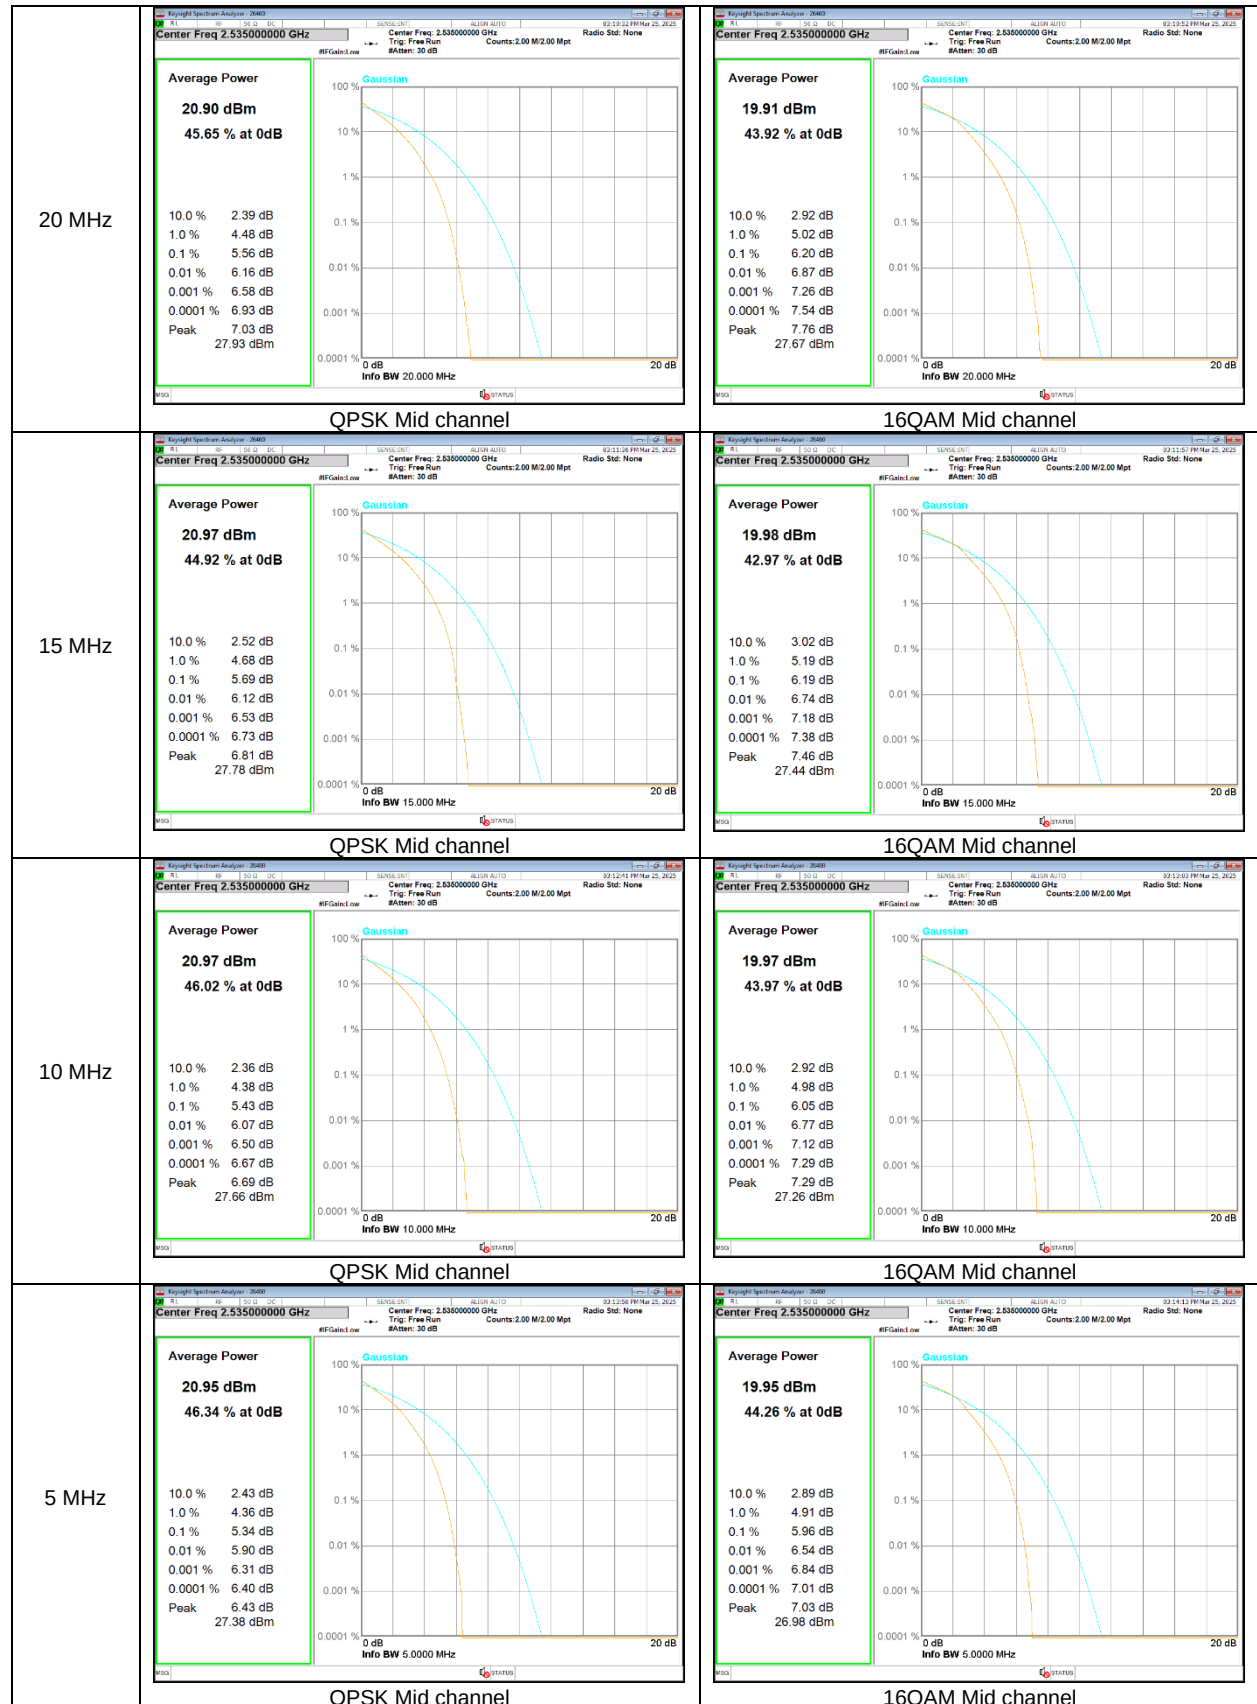


LTE Band 12

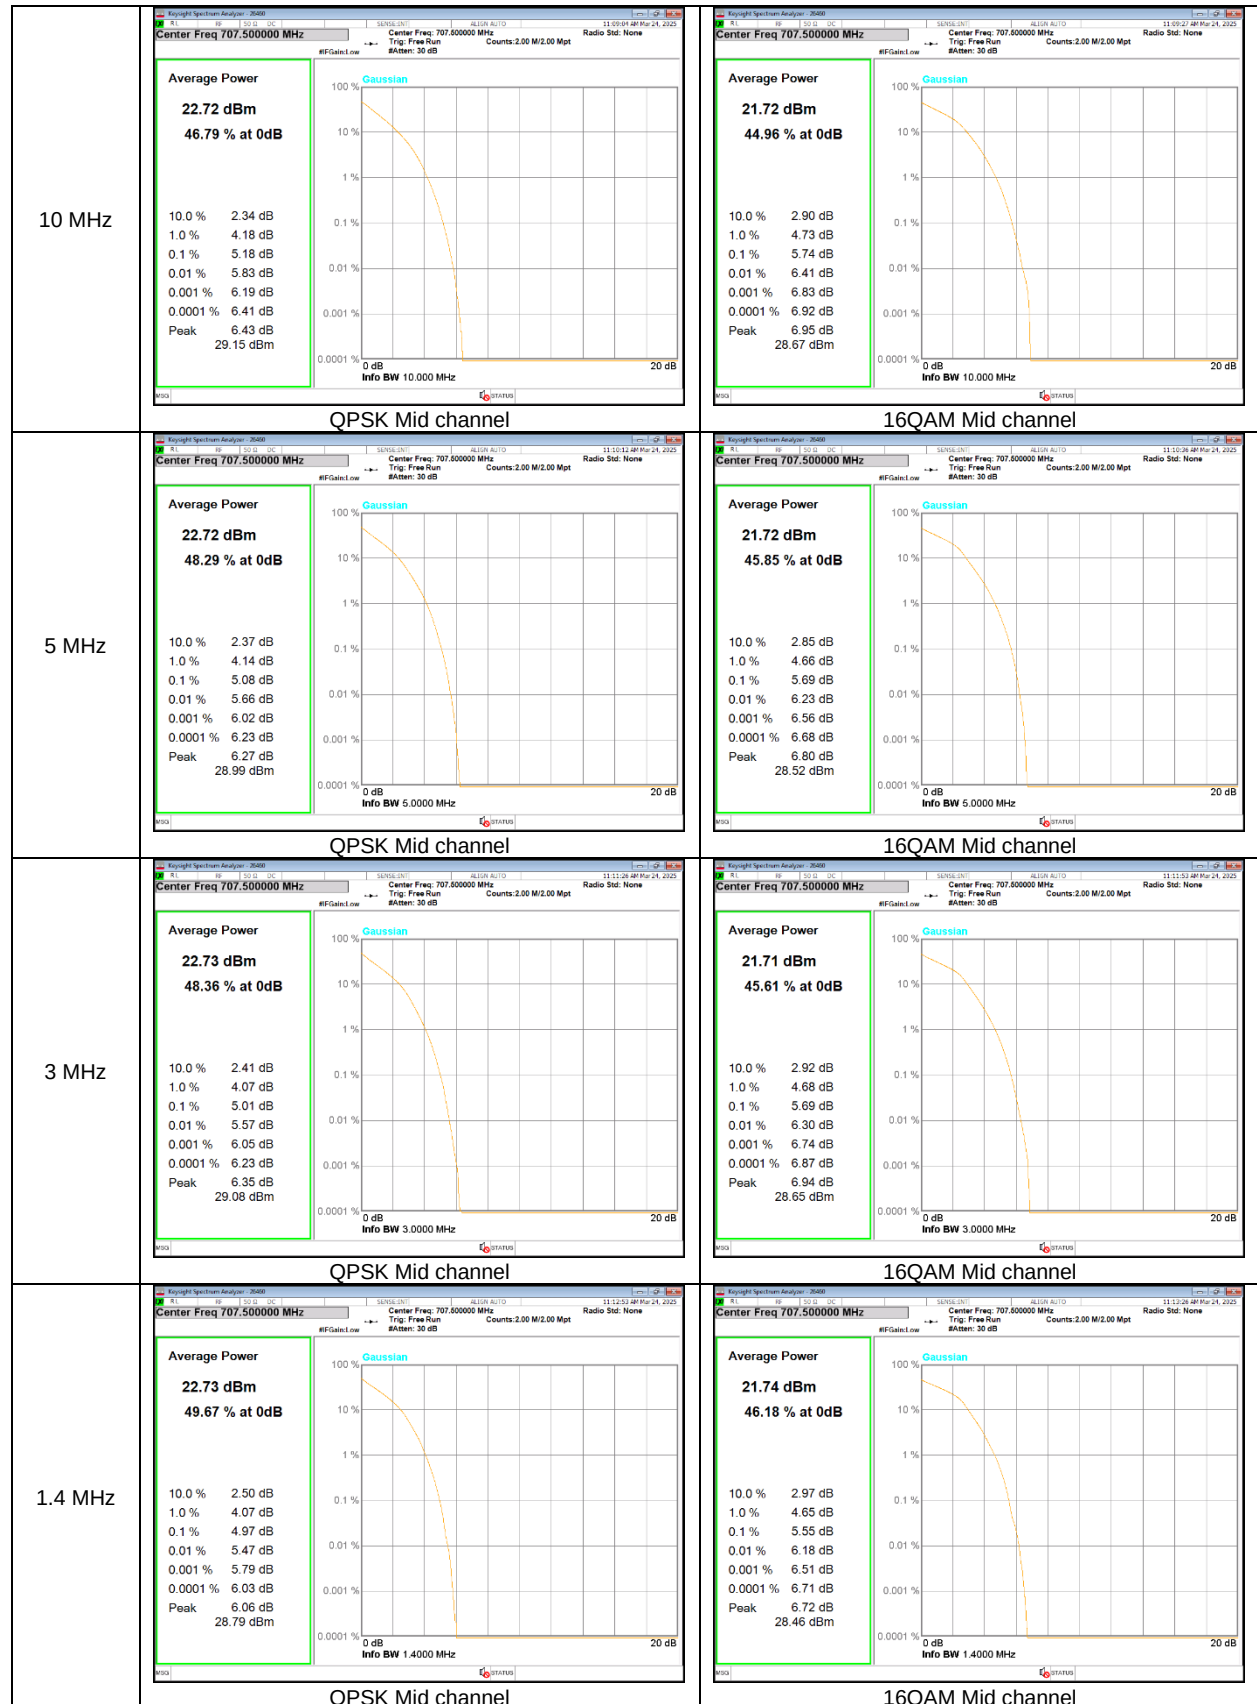


LTE Band 13

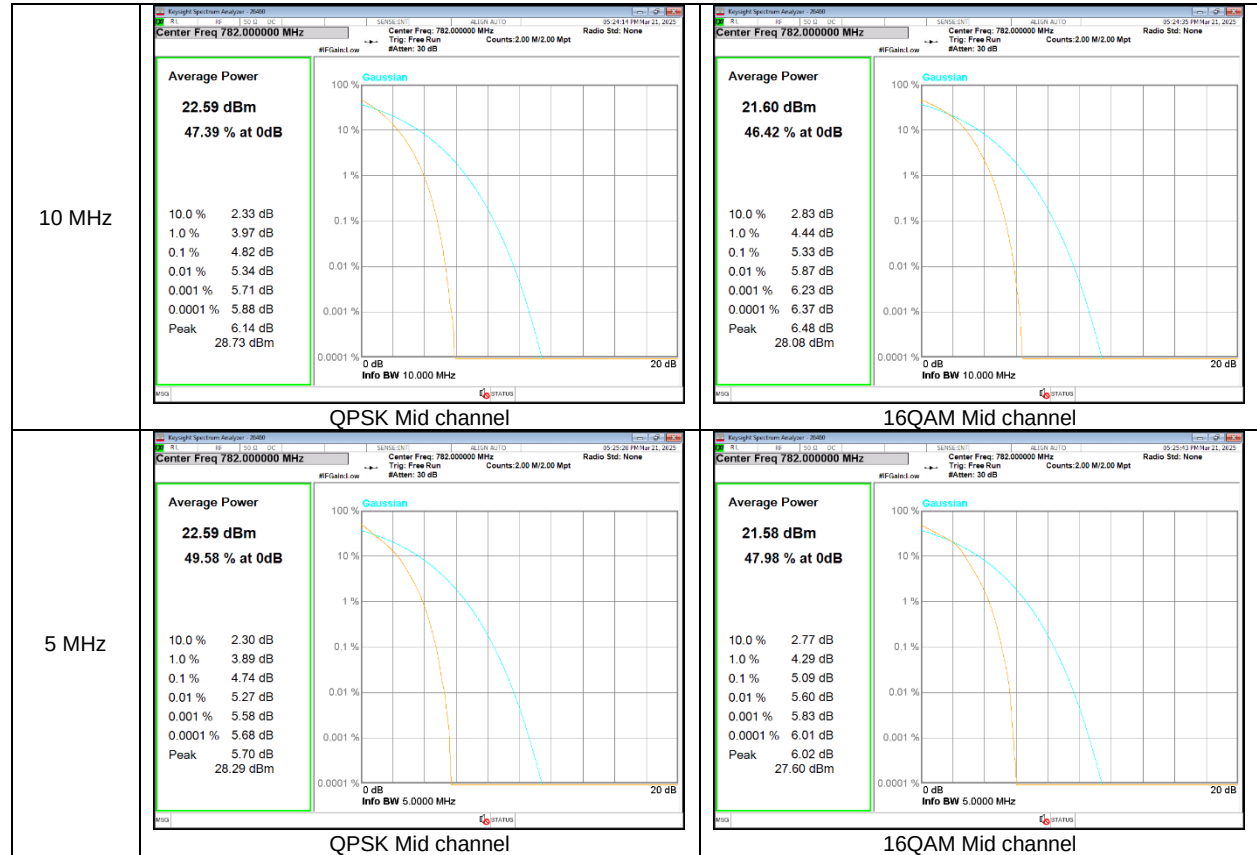

LTE Band 66

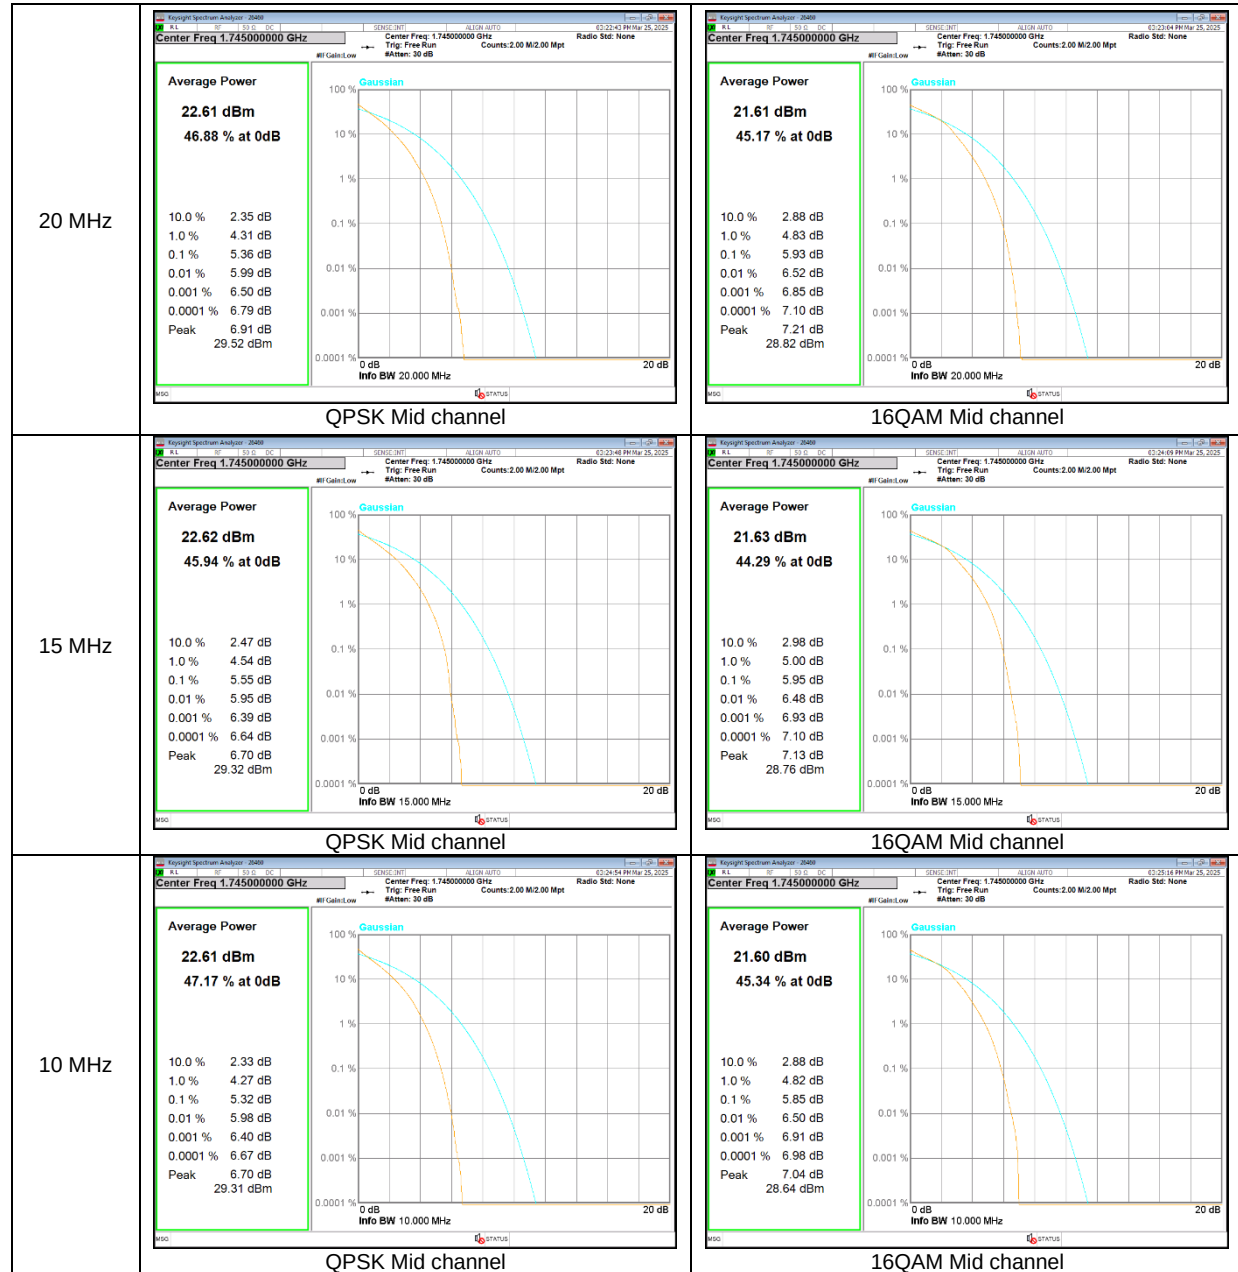

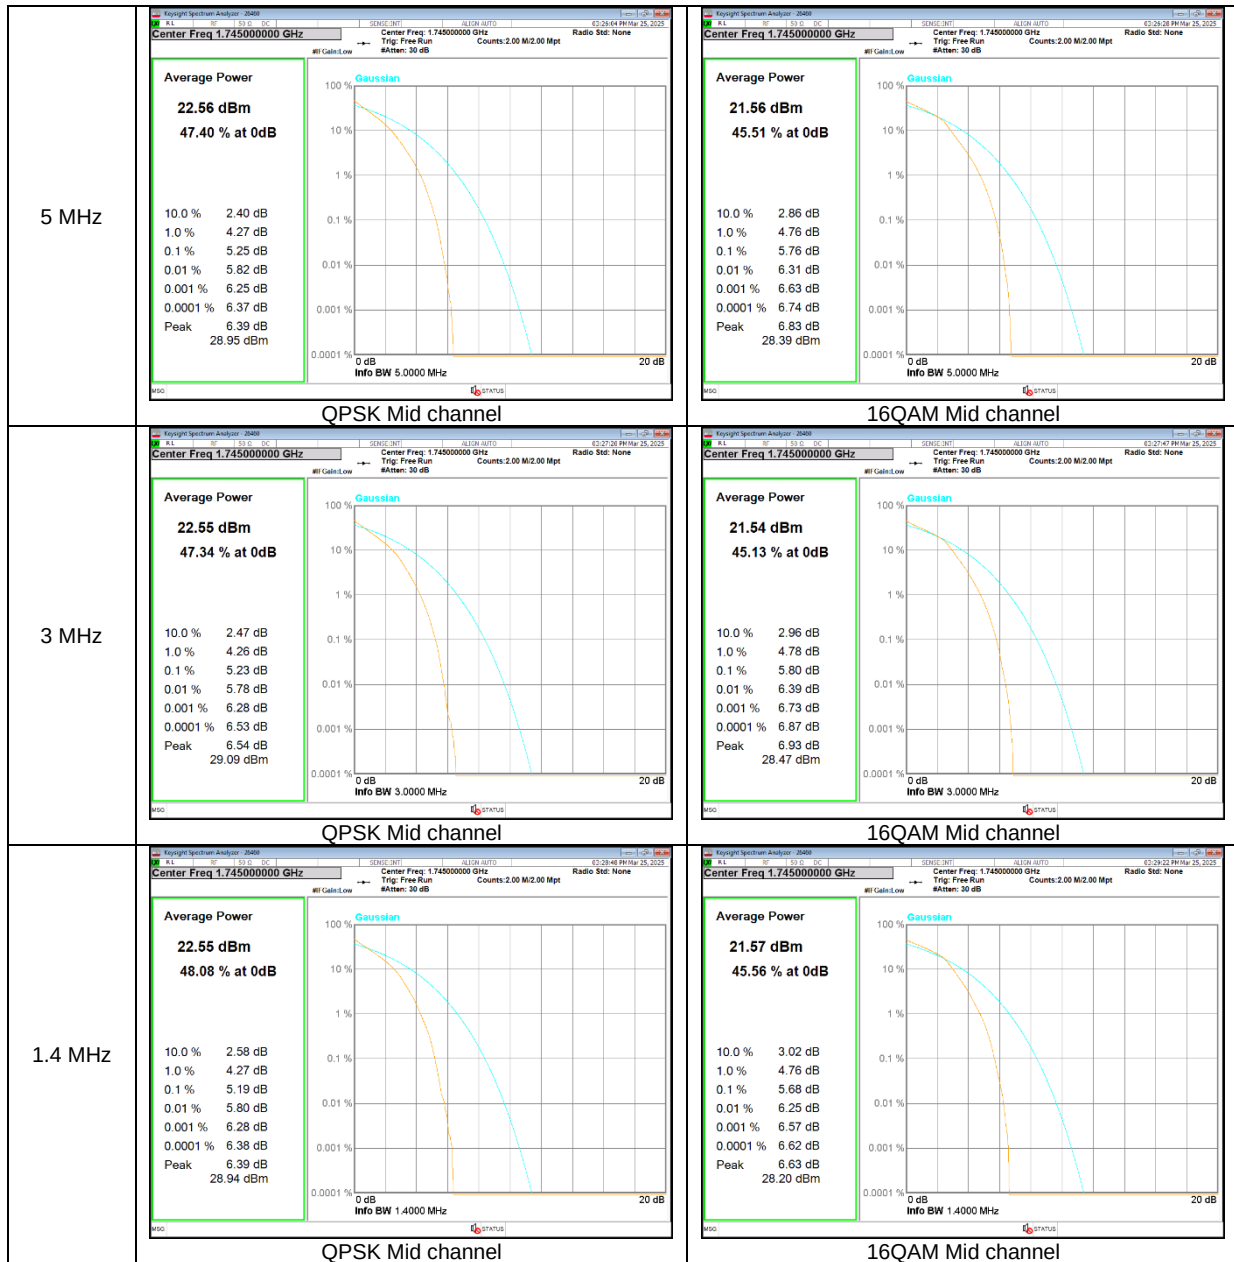

LTE Band 71



8.3. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at middle channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v03r01)

RESULTS

See the following pages.

- WCDMA

Band	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
B4	Rel.99	1732.60	4.178	4.761
	HSDPA		4.187	4.756

- LTE Band 7

Band	BW	Modulation	Frequency [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B7	20M	QPSK	2535.00	17.852	19.400
		16QAM		17.886	19.640
	15M	QPSK		13.455	15.110
		16QAM		13.460	14.750
	10M	QPSK		9.001	10.100
		16QAM		8.971	10.160
	5M	QPSK		4.489	5.221
		16QAM		4.485	5.147

- LTE Band 12

Band	BW	Modulation	Frequency [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B12	10M	QPSK	707.50	8.999	10.130
		16QAM		8.988	9.999
	5M	QPSK		4.493	5.431
		16QAM		4.506	5.201
	3M	QPSK		2.698	3.067
		16QAM		2.692	3.104
	1.4M	QPSK		1.089	1.295
		16QAM		1.087	1.316

- LTE Band 13

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B13	10M	QPSK	782.00	8.970	9.980
		16QAM		8.973	9.923
	5M	QPSK		4.496	5.187
		16QAM		4.493	5.263

- LTE Band 66


Band	BW	Modulation	Frequency [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B66	20M	QPSK	1745.00	17.874	19.460
		16QAM		17.883	19.470
	15M	QPSK		13.436	15.080
		16QAM		13.429	14.930
	10M	QPSK		8.974	10.000
		16QAM		8.985	9.920
	5M	QPSK		4.528	5.208
		16QAM		4.495	5.153
	3M	QPSK		2.684	3.052
		16QAM		2.700	3.060
	1.4M	QPSK		1.083	1.277
		16QAM		1.094	1.288

- LTE Band 71

Band	BW	Modulation	Frequency [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B71	20M	QPSK	680.50	17.900	19.530
		16QAM		17.872	19.410
	15M	QPSK		13.420	15.070
		16QAM		13.440	14.730
	10M	QPSK		8.974	10.190
		16QAM		8.974	10.170
	5M	QPSK		4.504	5.183
		16QAM		4.486	5.178

8.3.1. OCCUPIED BANDWIDTH RESULT

WCDMA Band 4

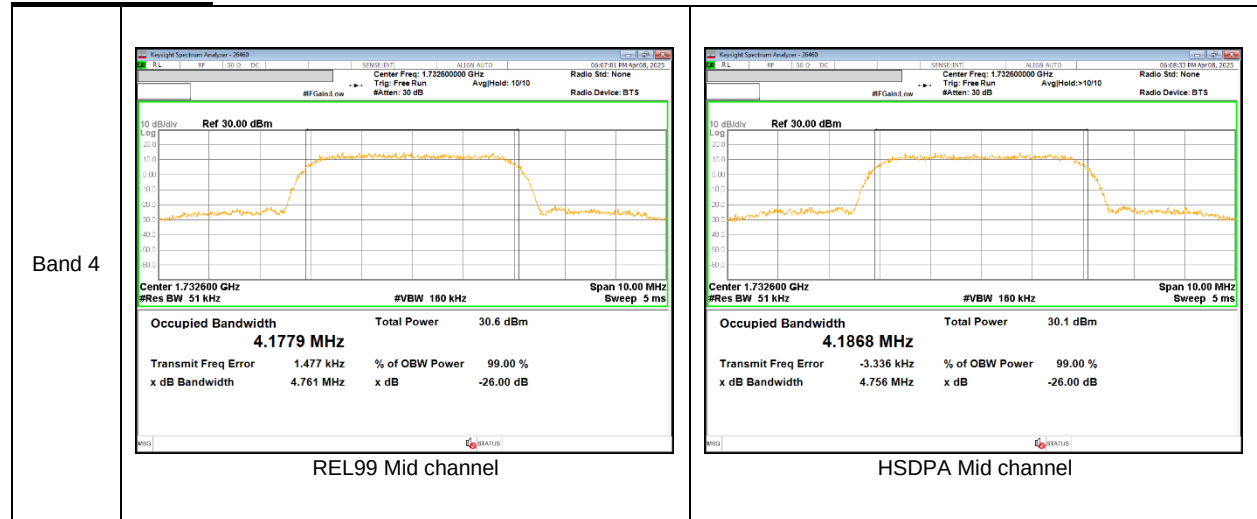


LTE Band 7




LTE Band 12




LTE Band 13

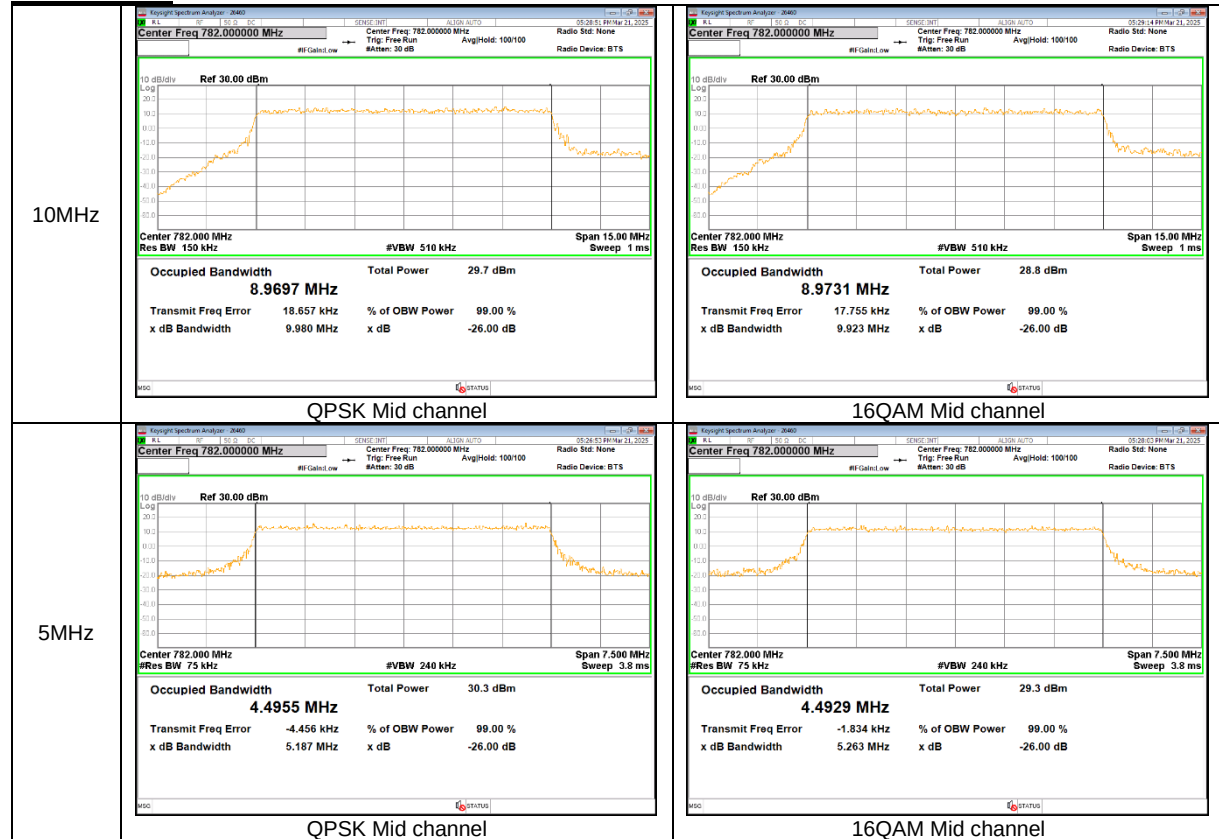

LTE Band 66

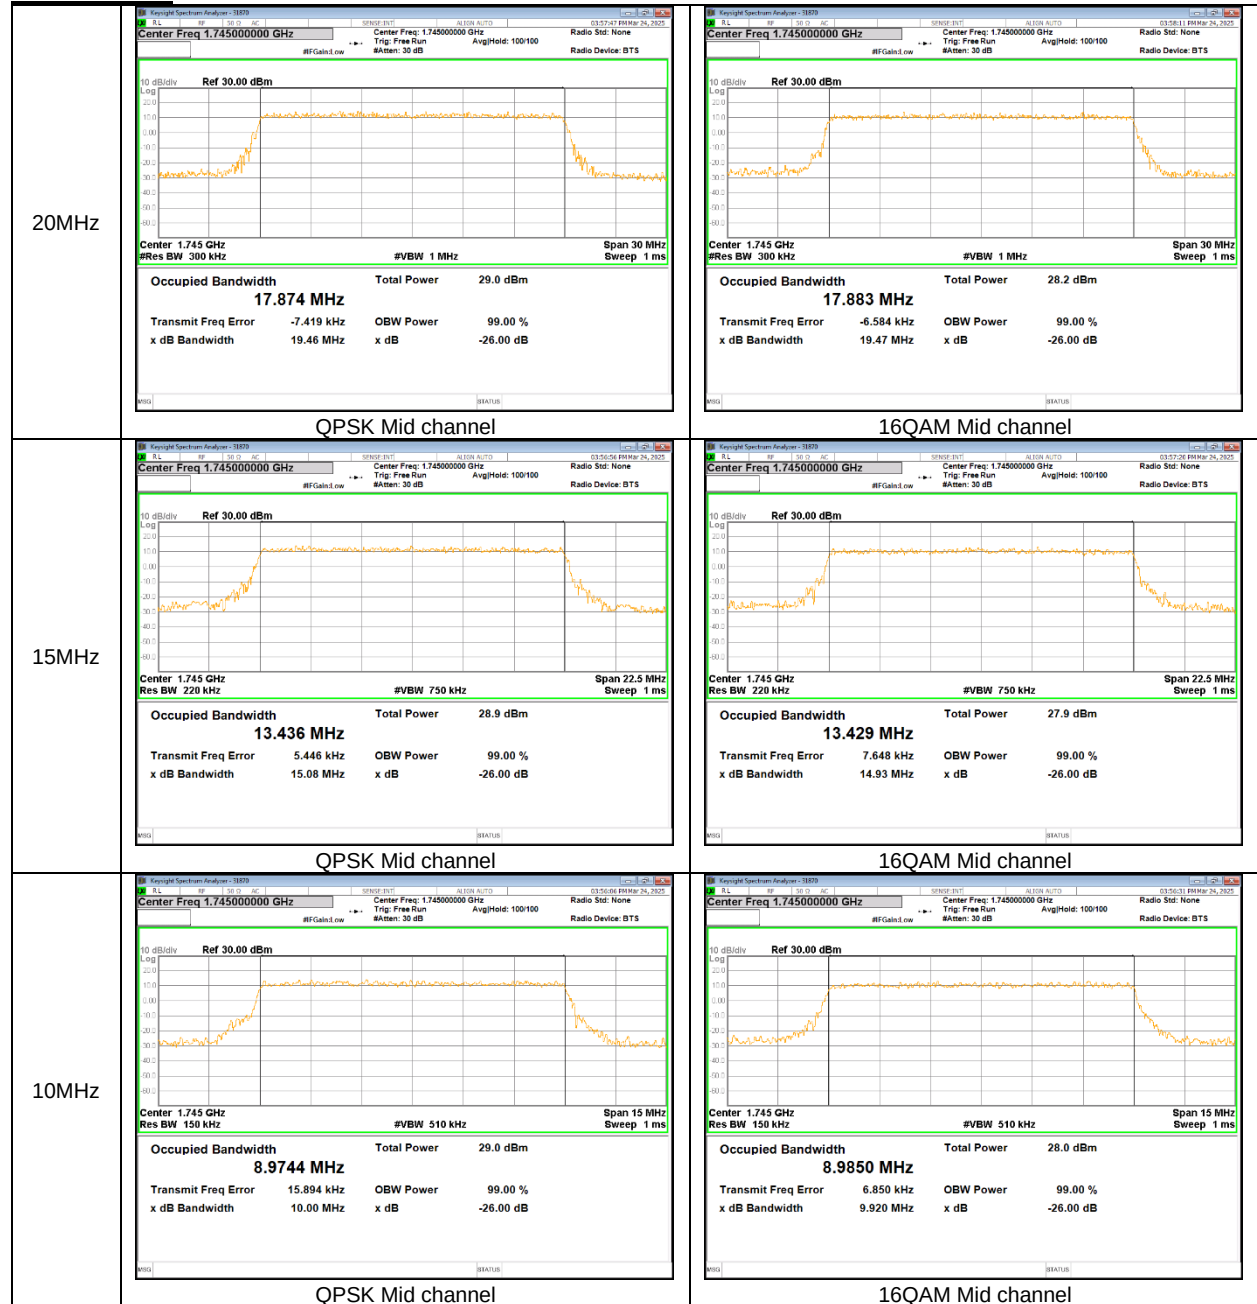

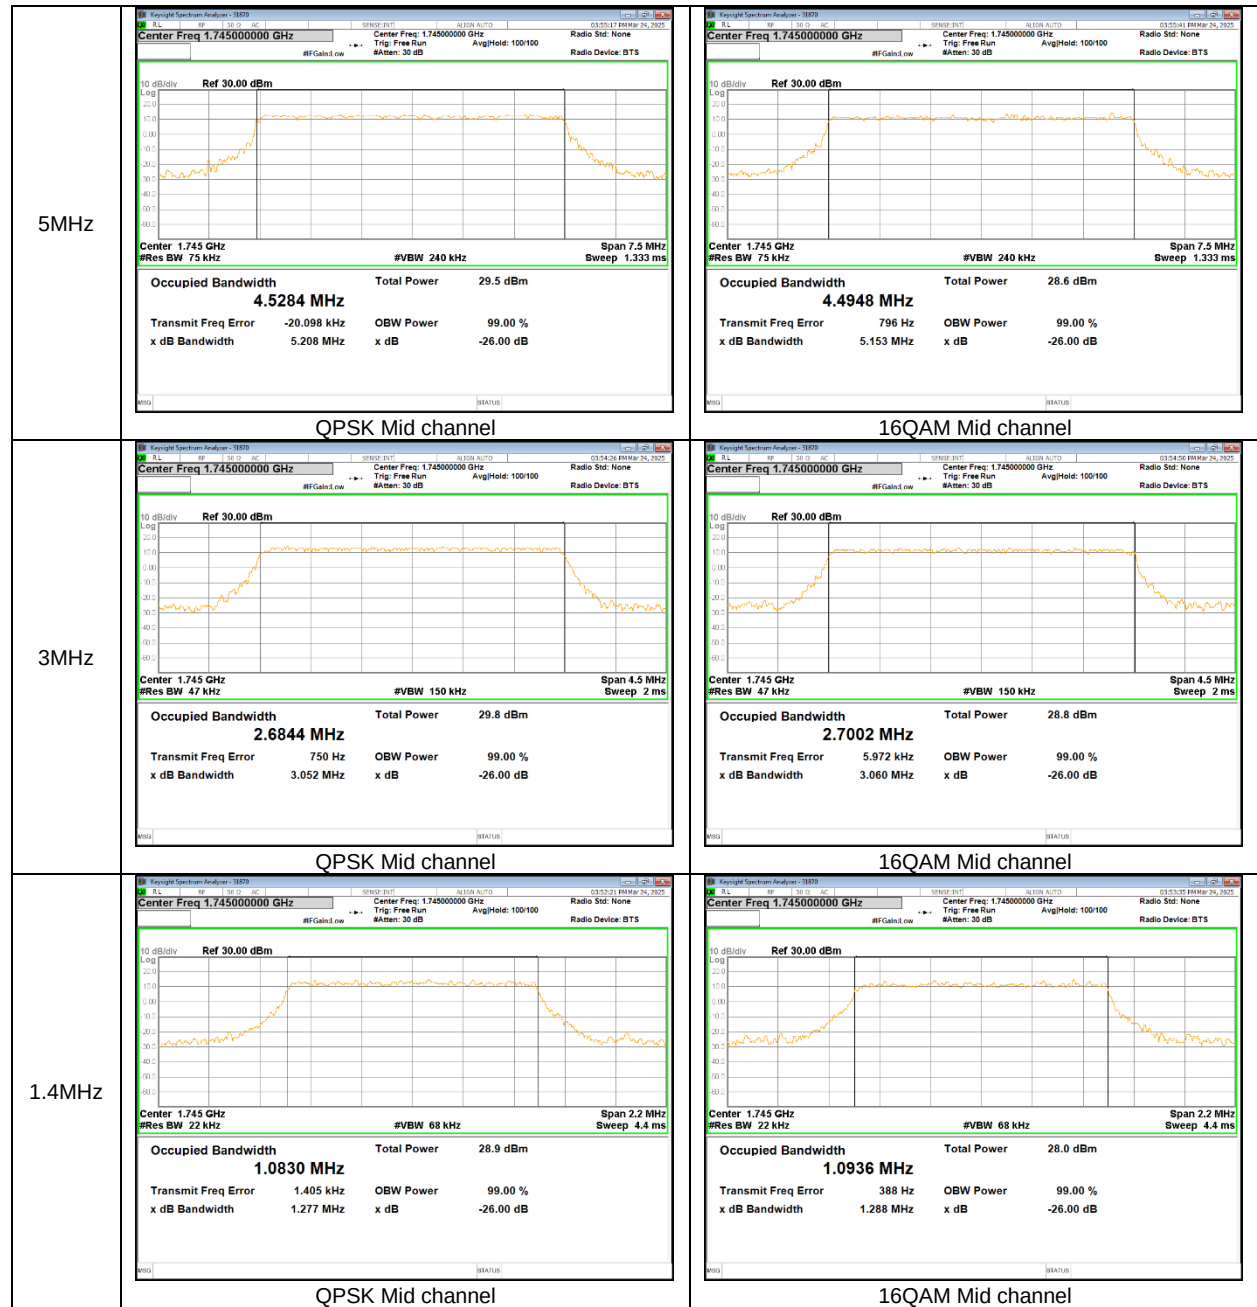

LTE Band 71



8.4. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §27.53

LIMITS

§27.53:

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-806 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m) (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

The transmitter output was connected to CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

WCDMA/LTE

- a) Set the RBW = 1 - 1.5 % of OBW(Typically limited to a minimum RBW of 1% of the OBW) within 100 kHz from the edge of the authorized frequency block/band.
Set the RBW = 100 kHz (Below 1GHz Bands: 100 kHz from the edge of the authorized frequency block/band)
Set the RBW = 1 - 1.5 % of OBW(Typically limited to a minimum RBW of 1% of the OBW) within 1 MHz from the edge of the authorized frequency block/band.
Set the RBW = 1 MHz (Above 1GHz Bands: 1 MHz from the edge of the authorized frequency block/band)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = Auto;
- e) Detector = RMS;
- f) Ensure that the number of measurement points $\geq 2 \times$ span/RBW;
- g) Trace Mode = Average (100);

NOTE1

For frequency range of 763-775 MHz and 793-806 MHz, 769-775 MHz and 799-805 MHz.(LTE Band 13)

- a) Set the RBW = 6.25 kHz (The minimum RBW setting value for the Spectrum analyzer is 6.8 kHz)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Sweep time = 1 second ;
- d) Detector = RMS;
- e) Ensure that the number of measurement points $\geq 2 \times$ span/RBW;
- f) Trace Mode = Average;

NOTE2

Note that the spurious emissions outside of the channel include narrowband signals. These signals are all below the -13dBm / -25dBm limits. Although the measurement bandwidth is less than the reference bandwidth of 1MHz no addental correction is applied as ANSI C63.26 section 4.2.3 only requires the correction to be applied when the OBW of the emission being measured is wider than the measurement bandwidth (Where the OBW of the signal under measurement is less than the RBW of the measuring instrument, no bandwidth correction or integration will be required.) Plots for low and high channels show the level of the emission measured with the reduced bandwidth and the level of the same emission measured using the integration method over the 1MHz reference bandwidth are very close, indicating the emissions are narrowband.

NOTE3


Emission Mask: All 1RB Positions (Edge RB, Outer RB, Inner RB) and modulations (QPSK, 16QAM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

RESULTS

See the following pages.

8.4.1. BAND EDGE RESULT

WCDMA

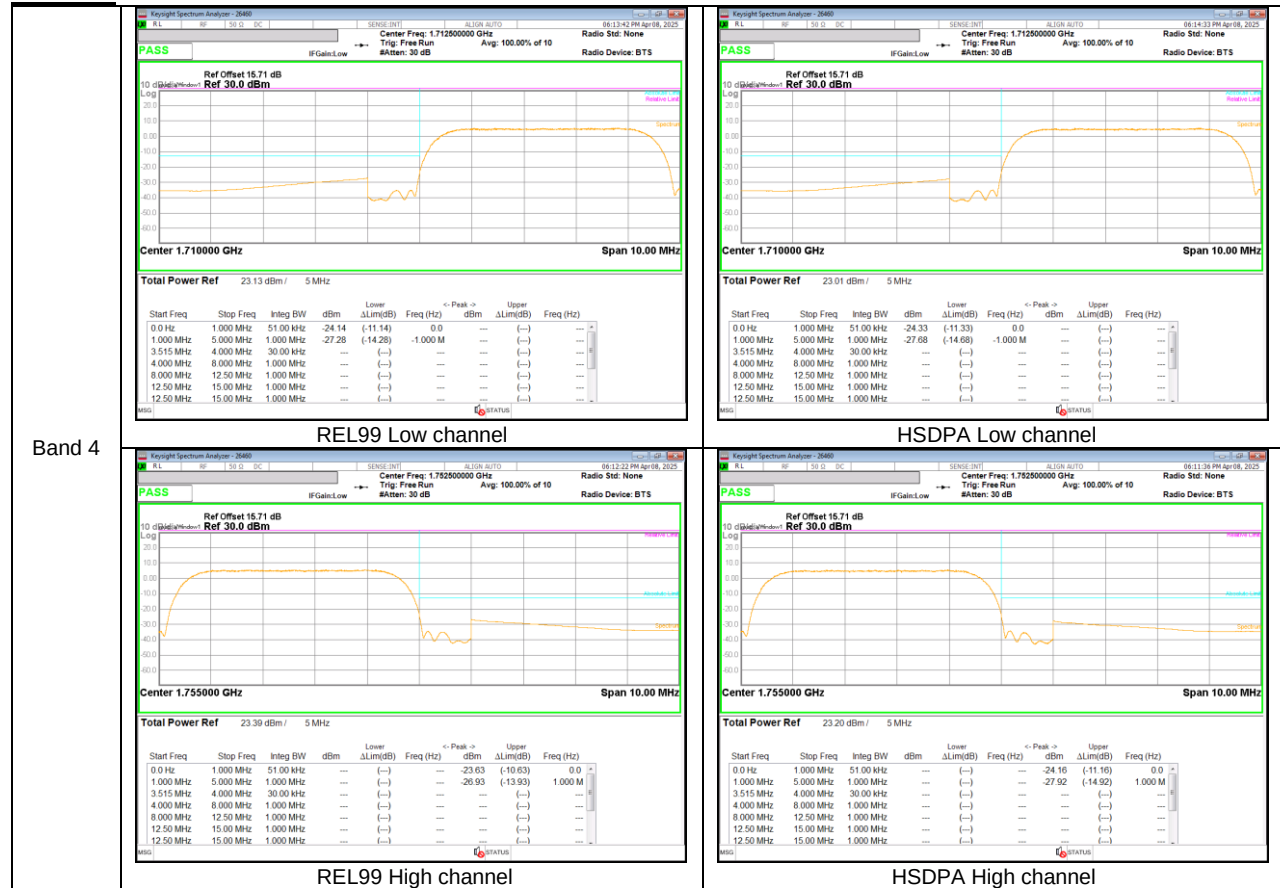

LTE Band 12

