

Report No.: RF190514E01

FCC ID: KA2AP2720A1

Test Model: DAP-2720

Received Date: May 14, 2019

Test Date: June 25 to July 08, 2019

Issued Date: Dec. 25, 2019

Applicant: D-Link Corporation

Address: No.289, Xinhua 3rd Rd., Neihu District, Taipei City 11494, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures.....	20
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Conditions.....	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures.....	38
4.2.4 Deviation from Test Standard	38
4.2.5 Test Setup.....	38
4.2.6 EUT Operating Conditions.....	38
4.2.7 Test Results	39
4.3 6dB Bandwidth Measurement	41
4.3.1 Limits of 6dB Bandwidth Measurement	41
4.3.2 Test Setup.....	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions.....	41
4.3.7 Test Result.....	42
4.4 Occupied Bandwidth Measurement	44
4.4.1 Test Setup.....	44
4.4.2 Test Instruments	44
4.4.3 Test Procedure	44
4.4.4 Deviation from Test Standard	44
4.4.5 EUT Operating Conditions.....	44
4.4.6 Test Results	45
4.5 Conducted Output Power Measurement.....	47
4.5.1 Limits of Conducted Output Power Measurement	47
4.5.2 Test Setup.....	47
4.5.3 Test Instruments	47
4.5.4 Test Procedures.....	47
4.5.5 Deviation from Test Standard	47
4.5.6 EUT Operating Conditions.....	47
4.5.7 Test Results	48

4.6	Power Spectral Density Measurement.....	50
4.6.1	Limits of Power Spectral Density Measurement	50
4.6.2	Test Setup.....	50
4.6.3	Test Instruments	50
4.6.4	Test Procedure	50
4.6.5	Deviation from Test Standard	50
4.6.6	EUT Operating Condition	50
4.6.7	Test Results	51
4.7	Conducted Out of Band Emission Measurement.....	54
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	54
4.7.2	Test Setup.....	54
4.7.3	Test Instruments	54
4.7.4	Test Procedure	54
4.7.5	Deviation from Test Standard	54
4.7.6	EUT Operating Condition	54
4.7.7	Test Results	54
5	Pictures of Test Arrangements.....	63
	Appendix – Information of the Testing Laboratories	64

Release Control Record

Issue No.	Description	Date Issued
RF190514E01	Original release.	Dec. 25, 2019

1 Certificate of Conformity

Product: Nuclias Connect AC2200 Wave2 Tri Band Access Point

Brand: D-Link

Test Model: DAP-2720

Sample Status: ENGINEERING SAMPLE

Applicant: D-Link Corporation

Test Date: June 25 to July 08, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Joyce Kuo , **Date:** Dec. 25, 2019
Joyce Kuo / Specialist

Approved by : Clark Lin , **Date:** Dec. 25, 2019
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.08dB at 0.38438 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(mhf) not a standard connector.
-	Occupied Bandwidth Measurement	-	Reference only

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.9 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	4.9 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Nuclias Connect AC2200 Wave2 Tri Band Access Point
Brand	D-Link
Test Model	DAP-2720
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter or 48~56Vdc from PoE
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412GHz ~ 2.462GHz 5GHz: 5.18GHz ~ 5.24GHz, 5.745GHz ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11 (VHT20): 9 802.11n (HT40), 802.11 (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode: 552.262mW Beamforming Mode: 505.318mW 5GHz: CDD Mode: 5.18 ~ 5.24GHz: 861.054mW 5.745 ~ 5.825GHz: 791.834mW Beamforming Mode 5.18 ~ 5.24GHz: 850.38mW 5.745 ~ 5.825GHz: 791.834 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz (low band)	WLAN 5GHz (high band)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT power needs to be supplied from one power adapter or PoE, the information is as below table:

Adapter :		
Brand	Model No.	Spec.
Asian Power Devices Inc	WA-30P12R	Input: 100-240Vac, 50-60Hz, 0.9A Max Output: 12V, 2.5A DC output cable (1.2m, Unshielded)
PoE : (Only for test not for sale)		
Brand	Model No.	Spec.
PHIHONG SWITCHING POWER SUPPLY	POE29U-56D	Input: 100-240Vac, 50-60Hz, 0.8A Output: 56V, 0.536A

3. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Power from PoE
Mode B	Power from adapter
Note: From the above modes, the AC power conducted emissions worst case was found in Mode A , the radiated emissions worst case was found in Mode B . Therefore only the test data of the mode was recorded in this report.	

4. The antennas provided to the EUT, please refer to the following table:

Ant. No.	Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type
2.4G-1	Chain 1	Donggun RF Electronic Technology Co.,Ltd	RF11C02064S	2.91	2.4~2.4835	PIFA	i-pex(MHF)
2.4G-2	Chain 0	Donggun RF Electronic Technology Co.,Ltd	RF11C02064S	2.75	2.4~2.4835	PIFA	i-pex(MHF)
5G-1	Chain 1	Donggun RF Electronic Technology Co.,Ltd	RF11C02064S	2.96	5.15~5.35	PIFA	i-pex(MHF)
5G-2	Chain 0	Donggun RF Electronic Technology Co.,Ltd	RF11C02064S	2.96	5.15~5.35	PIFA	i-pex(MHF)
5G-3	Chain 1	Donggun RF Electronic Technology Co.,Ltd	RF11C02064S	2.78	5.47~5.85	PIFA	i-pex(MHF)
5G-4	Chain 0	Donggun RF Electronic Technology Co.,Ltd	RF11C02064S	2.85	5.47~5.85	PIFA	i-pex(MHF)

5. The EUT incorporates a MIMO function

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20:

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate (Mbps)
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	21deg. C, 64%RH	120Vac, 60Hz	Robert Cheng
RE<1G	22deg. C, 69%RH	120Vac, 60Hz	Andy Ho
PLC	24deg. C, 76%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

If duty cycle of test signal is $< 98\%$, duty factor shall be considered.


802.11b: Duty cycle = $12.25 \text{ ms} / 12.35 \text{ ms} = 0.992$

802.11g: Duty cycle = $2.022 \text{ ms} / 2.118 \text{ ms} = 0.955$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.2$


VHT20: Duty cycle = $4.962 \text{ ms} / 5.06 \text{ ms} = 0.981$

VHT40: Duty cycle = $2.402 \text{ ms} / 2.487 \text{ ms} = 0.966$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.15$


802.11b

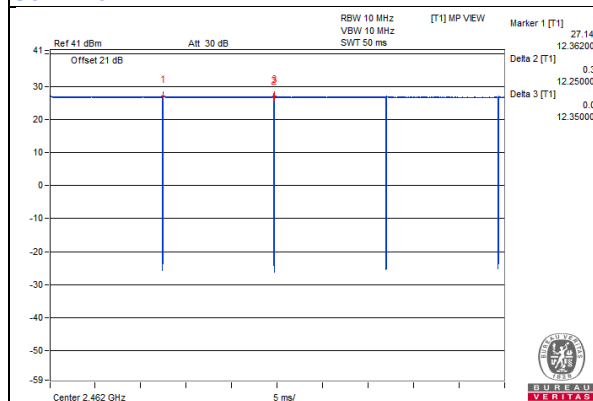


802.11g

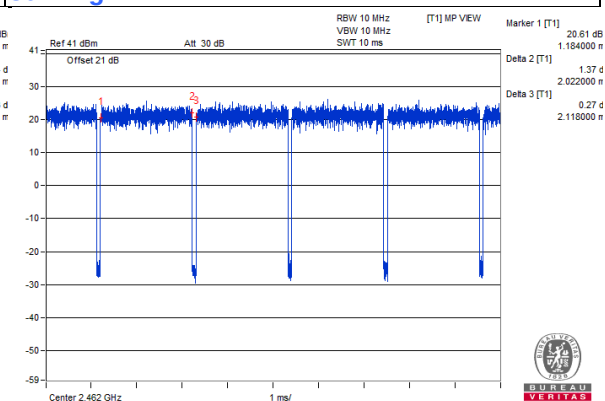

VHT20

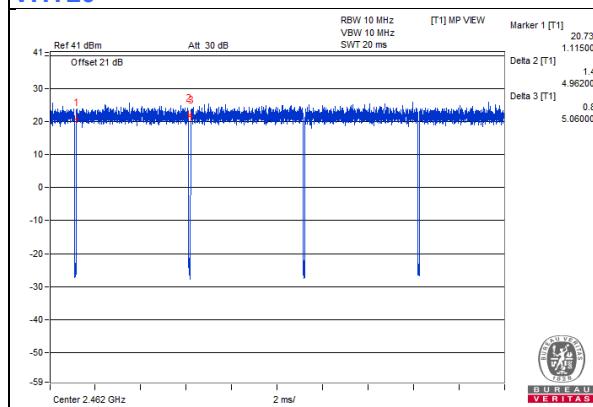

VHT40

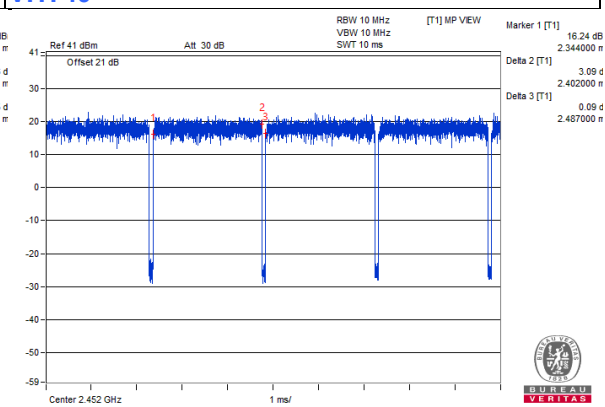

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	PoE Adapter	PHIHONG	POE29U-56D	NA	NA	Supplied by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	DC Cable	1	1.2	No	0	Supplied by client
3.	RJ-45 Cable	1	3	No	0	Provided by Lab

3.4.1 Configuration of System under Test

For Conducted emission:

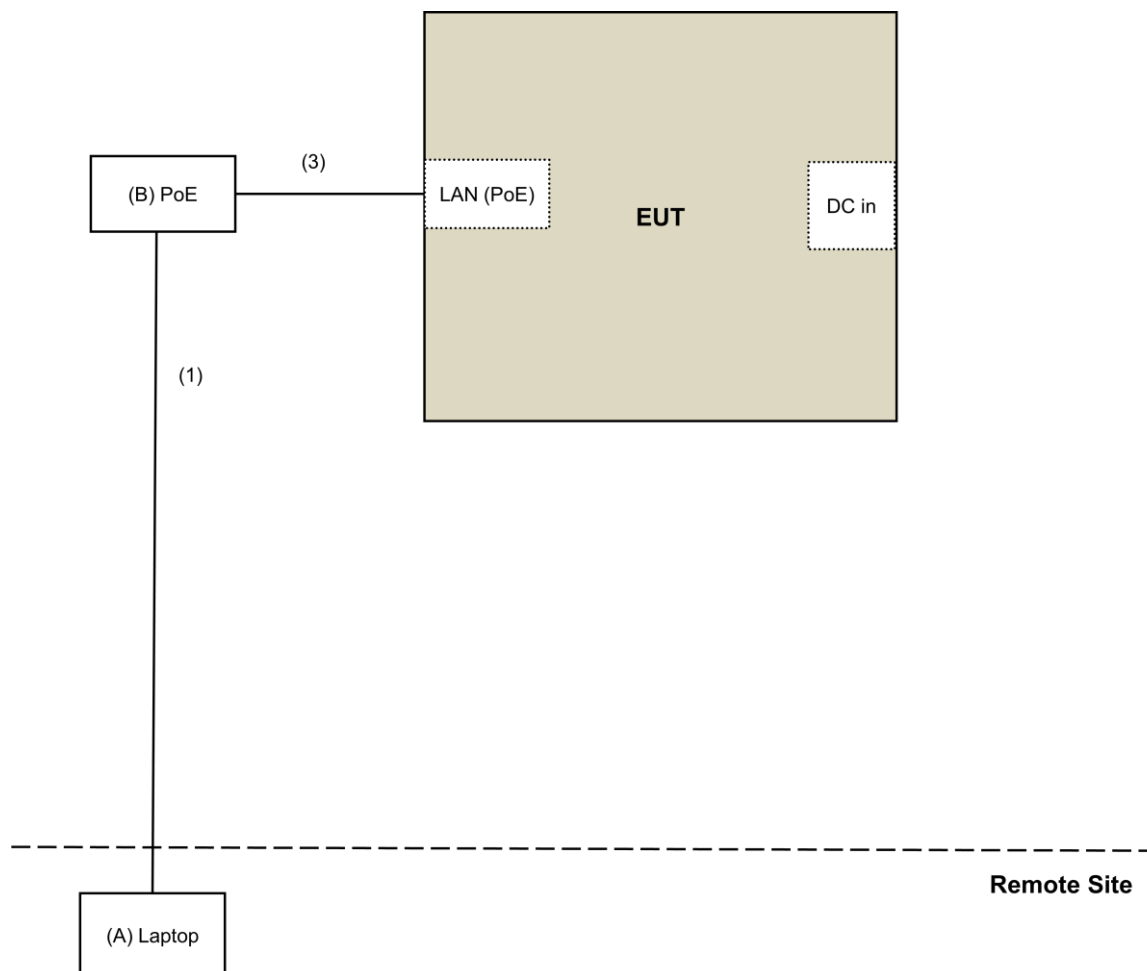

For other test:

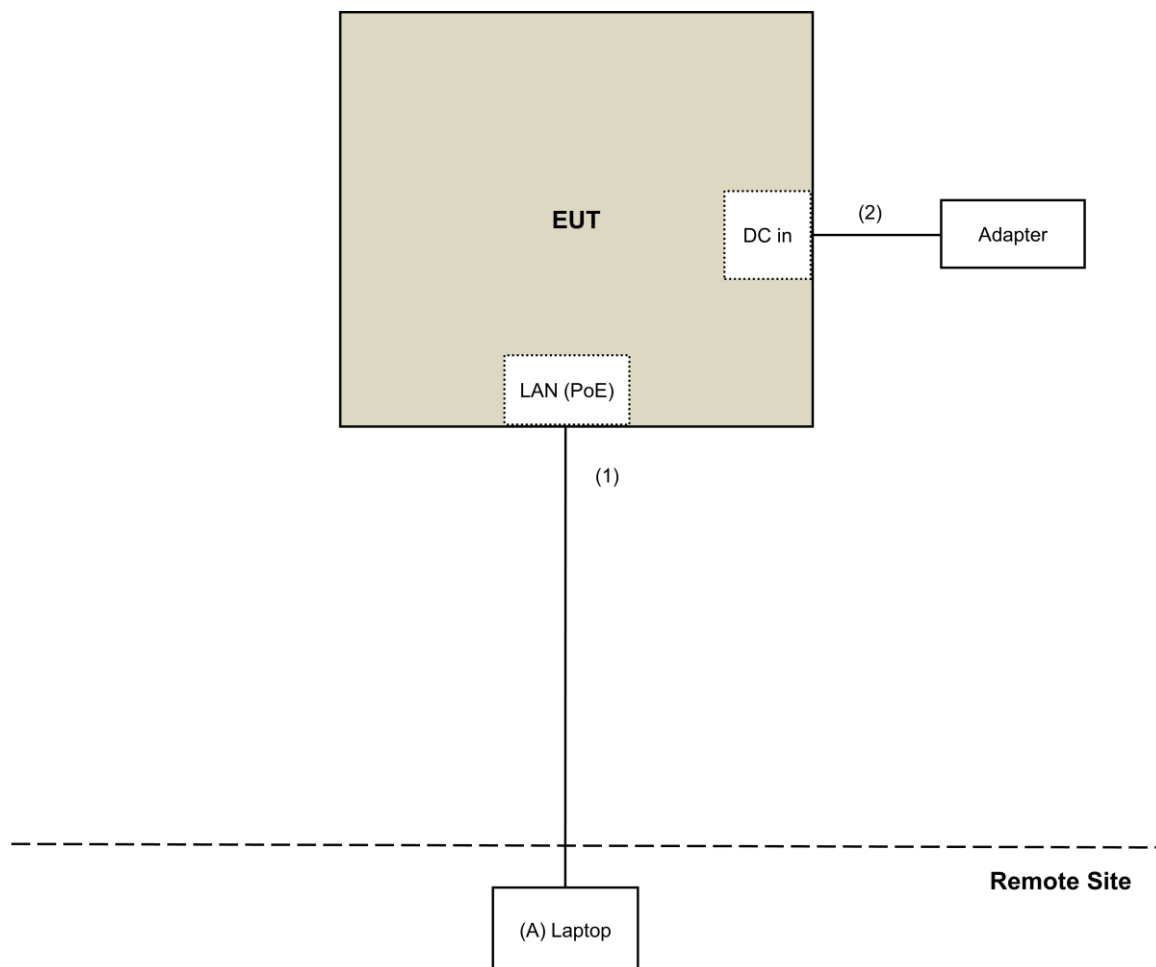

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments
For Radiated Emission Test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Pre-Amplifier EMCI	EMC001340	980142	Jan. 25, 2019	Jan. 24, 2020
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-2	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-3	Mar. 19, 2019	Mar. 18, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 16, 2018	Aug. 15, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 03, 2019	May 02, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: June 25, 2019

For Other Test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
Power meter Anritsu	ML2495A	1014008	May 13, 2019	May 12, 2020
Power sensor Anritsu	MA2411B	0917122	May 13, 2019	May 12, 2020

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 08, 2019

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

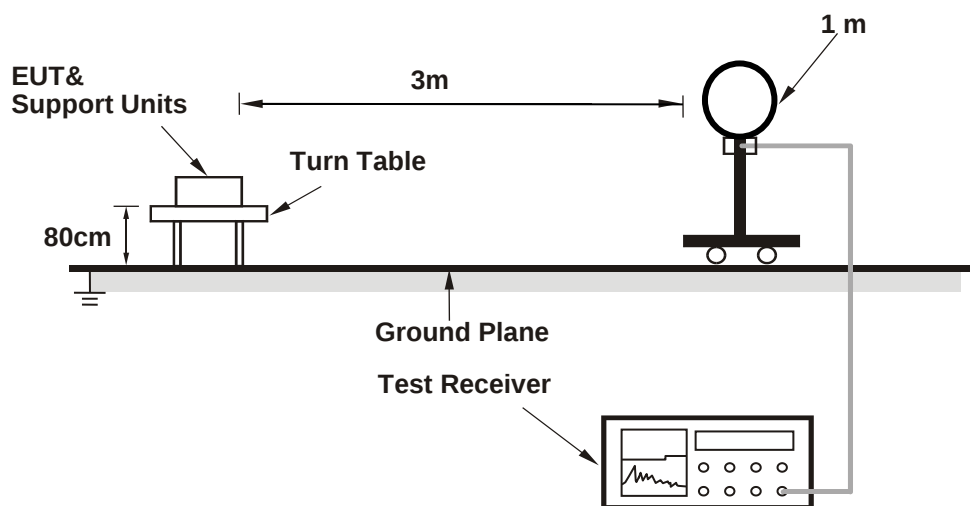

For Radiated emission 30MHz to 1GHz

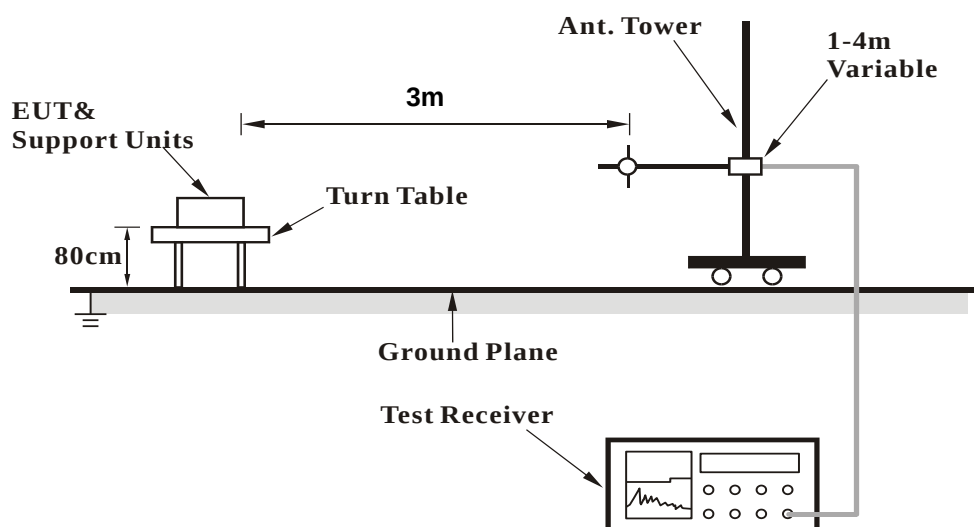

For Radiated emission above 1GHz

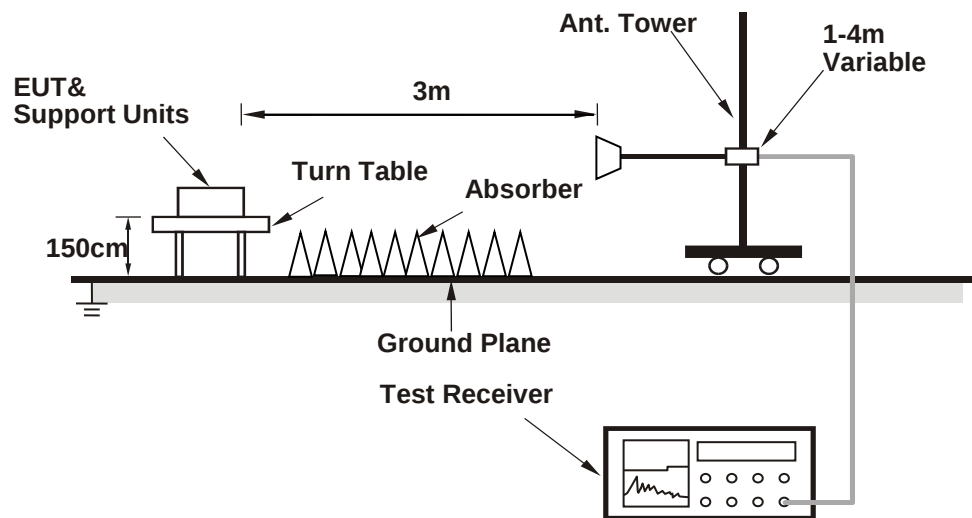

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (QDART-Connectivity 1.0.44) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	1.21 H	226	60.8	-1.6
2	2390.00	51.2 AV	54.0	-2.8	1.21 H	226	52.8	-1.6
3	*2412.00	115.0 PK			1.21 H	226	116.7	-1.7
4	*2412.00	112.8 AV			1.21 H	226	114.5	-1.7
5	4824.00	47.0 PK	74.0	-27.0	3.38 H	10	44.7	2.3
6	4824.00	44.6 AV	54.0	-9.4	3.38 H	10	42.3	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	2.21 V	33	62.9	-1.6
2	2390.00	53.8 AV	54.0	-0.2	2.21 V	33	55.4	-1.6
3	*2412.00	117.7 PK			2.21 V	33	119.4	-1.7
4	*2412.00	115.5 AV			2.21 V	33	117.2	-1.7
5	4824.00	45.9 PK	74.0	-28.1	1.36 V	142	43.6	2.3
6	4824.00	43.1 AV	54.0	-10.9	1.36 V	142	40.8	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.1 PK			1.24 H	217	116.9	-1.8
2	*2437.00	113.1 AV			1.24 H	217	114.9	-1.8
3	4874.00	47.2 PK	74.0	-26.8	3.33 H	22	44.8	2.4
4	4874.00	44.7 AV	54.0	-9.3	3.33 H	22	42.3	2.4
5	7311.00	47.0 PK	74.0	-27.0	2.05 H	168	37.8	9.2
6	7311.00	40.8 AV	54.0	-13.2	2.05 H	168	31.6	9.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	118.2 PK			3.23 V	320	120.0	-1.8
2	*2437.00	115.7 AV			3.23 V	320	117.5	-1.8
3	4874.00	48.9 PK	74.0	-25.1	1.28 V	129	46.5	2.4
4	4874.00	47.0 AV	54.0	-7.0	1.28 V	129	44.6	2.4
5	7311.00	48.3 PK	74.0	-25.7	1.05 V	223	39.1	9.2
6	7311.00	42.7 AV	54.0	-11.3	1.05 V	223	33.5	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.0 PK			2.73 H	62	117.8	-1.8
2	*2462.00	113.8 AV			2.73 H	62	115.6	-1.8
3	2483.50	59.2 PK	74.0	-14.8	2.73 H	62	60.9	-1.7
4	2483.50	51.2 AV	54.0	-2.8	2.73 H	62	52.9	-1.7
5	4924.00	47.0 PK	74.0	-27.0	3.32 H	19	44.5	2.5
6	4924.00	44.4 AV	54.0	-9.6	3.32 H	19	41.9	2.5
7	7386.00	46.8 PK	74.0	-27.2	2.05 H	180	37.4	9.4
8	7386.00	40.8 AV	54.0	-13.2	2.05 H	180	31.4	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.0 PK			2.71 V	48	120.8	-1.8
2	*2462.00	116.7 AV			2.71 V	48	118.5	-1.8
3	2483.50	61.3 PK	74.0	-12.7	2.71 V	48	63.0	-1.7
4	2483.50	53.6 AV	54.0	-0.4	2.71 V	48	55.3	-1.7
5	4924.00	47.4 PK	74.0	-26.6	1.04 V	132	44.9	2.5
6	4924.00	44.9 AV	54.0	-9.1	1.04 V	132	42.4	2.5
7	7386.00	50.4 PK	74.0	-23.6	1.28 V	222	41.0	9.4
8	7386.00	44.3 AV	54.0	-9.7	1.28 V	222	34.9	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	1.32 H	57	67.9	-1.6
2	2390.00	50.1 AV	54.0	-3.9	1.32 H	57	51.7	-1.6
3	*2412.00	113.0 PK			1.32 H	57	114.7	-1.7
4	*2412.00	102.2 AV			1.32 H	57	103.9	-1.7
5	4824.00	49.0 PK	74.0	-25.0	1.09 H	289	46.7	2.3
6	4824.00	35.7 AV	54.0	-18.3	1.09 H	289	33.4	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.8 PK	74.0	-4.2	3.25 V	40	71.4	-1.6
2	2390.00	53.6 AV	54.0	-0.4	3.25 V	40	55.2	-1.6
3	*2412.00	115.2 PK			3.25 V	40	116.9	-1.7
4	*2412.00	105.0 AV			3.25 V	40	106.7	-1.7
5	4824.00	48.3 PK	74.0	-25.7	1.29 V	133	46.0	2.3
6	4824.00	35.2 AV	54.0	-18.8	1.29 V	133	32.9	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.9 PK	74.0	-14.1	1.31 H	58	61.5	-1.6
2	2390.00	44.5 AV	54.0	-9.5	1.31 H	58	46.1	-1.6
3	*2437.00	116.3 PK			1.31 H	58	118.1	-1.8
4	*2437.00	106.6 AV			1.31 H	58	108.4	-1.8
5	2483.50	63.8 PK	74.0	-10.2	1.31 H	58	65.5	-1.7
6	2483.50	46.7 AV	54.0	-7.3	1.31 H	58	48.4	-1.7
7	4874.00	48.7 PK	74.0	-25.3	1.07 H	305	46.3	2.4
8	4874.00	35.3 AV	54.0	-18.7	1.07 H	305	32.9	2.4
9	7311.00	49.3 PK	74.0	-24.7	1.00 H	141	40.1	9.2
10	7311.00	36.3 AV	54.0	-17.7	1.00 H	141	27.1	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	2.74 V	48	70.1	-1.6
2	2390.00	50.1 AV	54.0	-3.9	2.74 V	48	51.7	-1.6
3	*2437.00	118.9 PK			2.74 V	48	120.7	-1.8
4	*2437.00	109.2 AV			2.74 V	48	111.0	-1.8
5	2483.50	69.5 PK	74.0	-4.5	2.74 V	48	71.2	-1.7
6	2483.50	51.2 AV	54.0	-2.8	2.74 V	48	52.9	-1.7
7	4874.00	52.0 PK	74.0	-22.0	1.30 V	132	49.6	2.4
8	4874.00	38.6 AV	54.0	-15.4	1.30 V	132	36.2	2.4
9	7311.00	54.4 PK	74.0	-19.6	1.23 V	262	45.2	9.2
10	7311.00	41.3 AV	54.0	-12.7	1.23 V	262	32.1	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.4 PK			1.34 H	43	115.2	-1.8
2	*2462.00	102.3 AV			1.34 H	43	104.1	-1.8
3	2483.50	66.4 PK	74.0	-7.6	1.34 H	43	68.1	-1.7
4	2483.50	50.2 AV	54.0	-3.8	1.34 H	43	51.9	-1.7
5	4924.00	48.7 PK	74.0	-25.3	1.09 H	315	46.2	2.5
6	4924.00	35.4 AV	54.0	-18.6	1.09 H	315	32.9	2.5
7	7386.00	49.3 PK	74.0	-24.7	1.06 H	129	39.9	9.4
8	7386.00	36.1 AV	54.0	-17.9	1.06 H	129	26.7	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.7 PK			2.71 V	32	117.5	-1.8
2	*2462.00	105.3 AV			2.71 V	32	107.1	-1.8
3	2483.50	70.5 PK	74.0	-3.5	2.71 V	32	72.2	-1.7
4	2483.50	53.5 AV	54.0	-0.5	2.71 V	32	55.2	-1.7
5	4924.00	48.5 PK	74.0	-25.5	1.26 V	131	46.0	2.5
6	4924.00	34.8 AV	54.0	-19.2	1.26 V	131	32.3	2.5
7	7386.00	49.1 PK	74.0	-24.9	1.22 V	252	39.7	9.4
8	7386.00	36.1 AV	54.0	-17.9	1.22 V	252	26.7	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

VHT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.40 H	38	68.4	-1.6
2	2390.00	50.4 AV	54.0	-3.6	1.40 H	38	52.0	-1.6
3	*2412.00	111.8 PK			1.40 H	38	113.5	-1.7
4	*2412.00	100.2 AV			1.40 H	38	101.9	-1.7
5	4824.00	48.2 PK	74.0	-25.8	1.10 H	301	45.9	2.3
6	4824.00	34.9 AV	54.0	-19.1	1.10 H	301	32.6	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	2.84 V	46	73.3	-1.6
2	2390.00	53.9 AV	54.0	-0.1	2.84 V	46	55.5	-1.6
3	*2412.00	114.4 PK			2.84 V	46	116.1	-1.7
4	*2412.00	103.0 AV			2.84 V	46	104.7	-1.7
5	4824.00	48.6 PK	74.0	-25.4	1.27 V	135	46.3	2.3
6	4824.00	35.1 AV	54.0	-18.9	1.27 V	135	32.8	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.2 PK	74.0	-13.8	1.36 H	47	61.8	-1.6
2	2390.00	44.6 AV	54.0	-9.4	1.36 H	47	46.2	-1.6
3	*2437.00	116.6 PK			1.36 H	47	118.4	-1.8
4	*2437.00	105.7 AV			1.36 H	47	107.5	-1.8
5	2483.50	63.1 PK	74.0	-10.9	1.36 H	47	64.8	-1.7
6	2483.50	46.3 AV	54.0	-7.7	1.36 H	47	48.0	-1.7
7	4874.00	48.4 PK	74.0	-25.6	1.11 H	303	46.0	2.4
8	4874.00	35.2 AV	54.0	-18.8	1.11 H	303	32.8	2.4
9	7311.00	49.1 PK	74.0	-24.9	1.00 H	135	39.9	9.2
10	7311.00	36.3 AV	54.0	-17.7	1.00 H	135	27.1	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	3.08 V	44	68.3	-1.6
2	2390.00	50.4 AV	54.0	-3.6	3.08 V	44	52.0	-1.6
3	*2437.00	119.2 PK			3.08 V	44	121.0	-1.8
4	*2437.00	108.3 AV			3.08 V	44	110.1	-1.8
5	2483.50	68.8 PK	74.0	-5.2	3.08 V	44	70.5	-1.7
6	2483.50	51.9 AV	54.0	-2.1	3.08 V	44	53.6	-1.7
7	4874.00	48.4 PK	74.0	-25.6	1.31 V	146	46.0	2.4
8	4874.00	35.1 AV	54.0	-18.9	1.31 V	146	32.7	2.4
9	7311.00	49.1 PK	74.0	-24.9	1.25 V	255	39.9	9.2
10	7311.00	35.9 AV	54.0	-18.1	1.25 V	255	26.7	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.8 PK			1.39 H	29	114.6	-1.8
2	*2462.00	101.3 AV			1.39 H	29	103.1	-1.8
3	2483.50	66.1 PK	74.0	-7.9	1.39 H	29	67.8	-1.7
4	2483.50	49.8 AV	54.0	-4.2	1.39 H	29	51.5	-1.7
5	4924.00	48.2 PK	74.0	-25.8	1.02 H	310	45.7	2.5
6	4924.00	34.9 AV	54.0	-19.1	1.02 H	310	32.4	2.5
7	7386.00	49.5 PK	74.0	-24.5	1.00 H	151	40.1	9.4
8	7386.00	36.4 AV	54.0	-17.6	1.00 H	151	27.0	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.8 PK			3.06 V	41	117.6	-1.8
2	*2462.00	104.0 AV			3.06 V	41	105.8	-1.8
3	2483.50	70.0 PK	74.0	-4.0	3.06 V	41	71.7	-1.7
4	2483.50	53.5 AV	54.0	-0.5	3.06 V	41	55.2	-1.7
5	4924.00	48.7 PK	74.0	-25.3	1.21 V	141	46.2	2.5
6	4924.00	35.4 AV	54.0	-18.6	1.21 V	141	32.9	2.5
7	7386.00	48.5 PK	74.0	-25.5	1.17 V	253	39.1	9.4
8	7386.00	35.8 AV	54.0	-18.2	1.17 V	253	26.4	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

VHT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	1.29 H	41	68.5	-1.6
2	2390.00	50.5 AV	54.0	-3.5	1.29 H	41	52.1	-1.6
3	*2422.00	108.3 PK			1.29 H	41	110.0	-1.7
4	*2422.00	98.4 AV			1.29 H	41	100.1	-1.7
5	4844.00	48.5 PK	74.0	-25.5	1.01 H	309	46.3	2.2
6	4844.00	35.1 AV	54.0	-18.9	1.01 H	309	32.9	2.2
7	7266.00	48.9 PK	74.0	-25.1	1.06 H	146	39.9	9.0
8	7266.00	36.1 AV	54.0	-17.9	1.06 H	146	27.1	9.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	2.94 V	36	71.7	-1.6
2	2390.00	53.8 AV	54.0	-0.2	2.94 V	36	55.4	-1.6
3	*2422.00	110.9 PK			2.94 V	36	112.6	-1.7
4	*2422.00	101.0 AV			2.94 V	36	102.7	-1.7
5	4844.00	48.5 PK	74.0	-25.5	1.29 V	121	46.3	2.2
6	4844.00	35.2 AV	54.0	-18.8	1.29 V	121	33.0	2.2
7	7266.00	49.7 PK	74.0	-24.3	1.22 V	257	40.7	9.0
8	7266.00	36.8 AV	54.0	-17.2	1.22 V	257	27.8	9.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	1.37 H	37	68.2	-1.6
2	2390.00	50.4 AV	54.0	-3.6	1.37 H	37	52.0	-1.6
3	*2437.00	110.1 PK			1.37 H	37	111.9	-1.8
4	*2437.00	100.4 AV			1.37 H	37	102.2	-1.8
5	2483.50	62.3 PK	74.0	-11.7	1.37 H	37	64.0	-1.7
6	2483.50	45.1 AV	54.0	-8.9	1.37 H	37	46.8	-1.7
7	4874.00	48.5 PK	74.0	-25.5	1.06 H	308	46.1	2.4
8	4874.00	35.0 AV	54.0	-19.0	1.06 H	308	32.6	2.4
9	7311.00	49.1 PK	74.0	-24.9	1.00 H	149	39.9	9.2
10	7311.00	36.0 AV	54.0	-18.0	1.00 H	149	26.8	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	2.88 V	35	69.2	-1.6
2	2390.00	53.8 AV	54.0	-0.2	2.88 V	35	55.4	-1.6
3	*2437.00	112.6 PK			2.88 V	35	114.4	-1.8
4	*2437.00	102.9 AV			2.88 V	35	104.7	-1.8
5	2483.50	65.0 PK	74.0	-9.0	2.88 V	35	66.7	-1.7
6	2483.50	48.7 AV	54.0	-5.3	2.88 V	35	50.4	-1.7
7	4874.00	48.4 PK	74.0	-25.6	1.25 V	145	46.0	2.4
8	4874.00	34.9 AV	54.0	-19.1	1.25 V	145	32.5	2.4
9	7311.00	49.4 PK	74.0	-24.6	1.20 V	240	40.2	9.2
10	7311.00	36.2 AV	54.0	-17.8	1.20 V	240	27.0	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.7 PK			1.30 H	41	110.5	-1.8
2	*2452.00	99.0 AV			1.30 H	41	100.8	-1.8
3	2483.50	66.7 PK	74.0	-7.3	1.30 H	41	68.4	-1.7
4	2483.50	50.4 AV	54.0	-3.6	1.30 H	41	52.1	-1.7
5	4904.00	48.5 PK	74.0	-25.5	1.05 H	314	46.0	2.5
6	4904.00	34.9 AV	54.0	-19.1	1.05 H	314	32.4	2.5
7	7356.00	48.9 PK	74.0	-25.1	1.03 H	152	39.7	9.2
8	7356.00	35.8 AV	54.0	-18.2	1.03 H	152	26.6	9.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	111.2 PK			3.44 V	35	113.0	-1.8
2	*2452.00	101.6 AV			3.44 V	35	103.4	-1.8
3	2483.50	68.7 PK	74.0	-5.3	3.44 V	35	70.4	-1.7
4	2483.50	53.9 AV	54.0	-0.1	3.44 V	35	55.6	-1.7
5	4904.00	48.6 PK	74.0	-25.4	1.21 V	116	46.1	2.5
6	4904.00	35.5 AV	54.0	-18.5	1.21 V	116	33.0	2.5
7	7356.00	48.9 PK	74.0	-25.1	1.21 V	238	39.7	9.2
8	7356.00	36.2 AV	54.0	-17.8	1.21 V	238	27.0	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


802.11g

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.02	29.2 QP	40.0	-10.8	1.00 H	113	38.9	-9.7
2	69.07	29.2 QP	40.0	-10.8	1.00 H	240	39.5	-10.3
3	125.04	32.5 QP	43.5	-11.0	3.00 H	66	41.9	-9.4
4	250.00	41.2 QP	46.0	-4.8	1.00 H	286	49.8	-8.6
5	323.96	33.8 QP	46.0	-12.2	1.00 H	360	40.0	-6.2
6	874.99	37.5 QP	46.0	-8.5	2.00 H	360	31.9	5.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

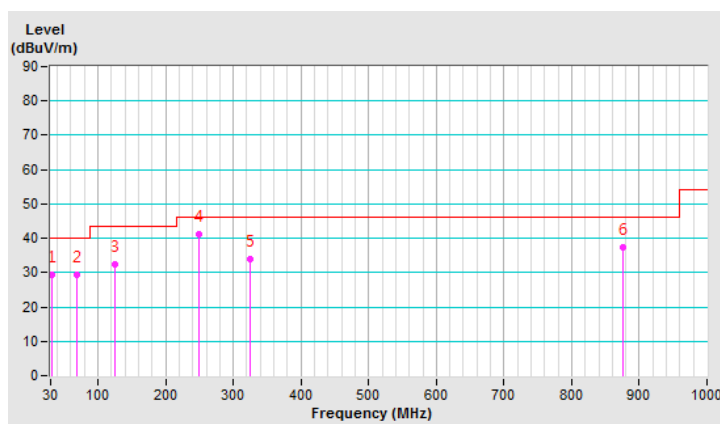


CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.90	34.0 QP	40.0	-6.0	1.00 V	135	42.3	-8.3
2	69.41	36.2 QP	40.0	-3.8	1.00 V	298	46.5	-10.3
3	125.01	37.6 QP	43.5	-5.9	1.00 V	353	47.0	-9.4
4	250.02	37.4 QP	46.0	-8.6	1.50 V	360	46.1	-8.7
5	331.96	28.8 QP	46.0	-17.2	1.00 V	360	34.8	-6.0
6	499.99	29.3 QP	46.0	-16.7	1.00 V	360	31.1	-1.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

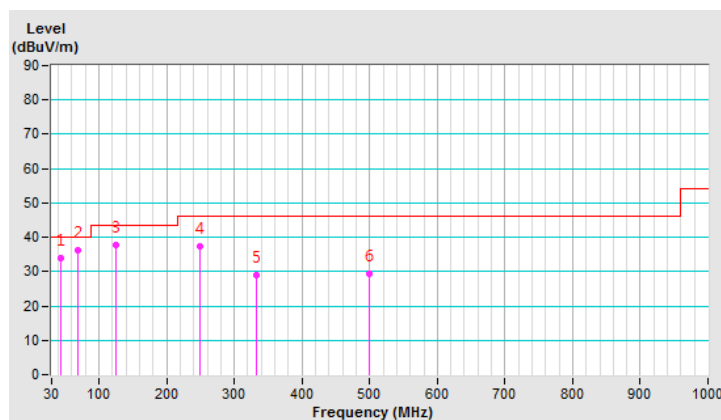

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: June 26, 2019

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

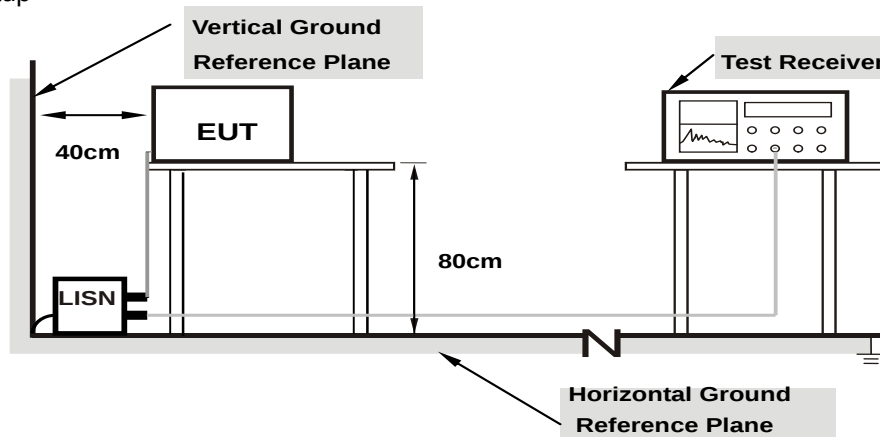

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.02	44.93	29.89	54.95	39.91	66.00	56.00	-11.05	-16.09
2	0.15781	10.02	43.97	27.44	53.99	37.46	65.58	55.58	-11.59	-18.12
3	0.20078	10.04	36.27	21.18	46.31	31.22	63.58	53.58	-17.27	-22.36
4	0.38438	10.07	35.33	32.03	45.40	42.10	58.18	48.18	-12.78	-6.08
5	6.72266	10.38	20.55	16.20	30.93	26.58	60.00	50.00	-29.07	-23.42
6	27.78125	11.19	21.80	18.44	32.99	29.63	60.00	50.00	-27.01	-20.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

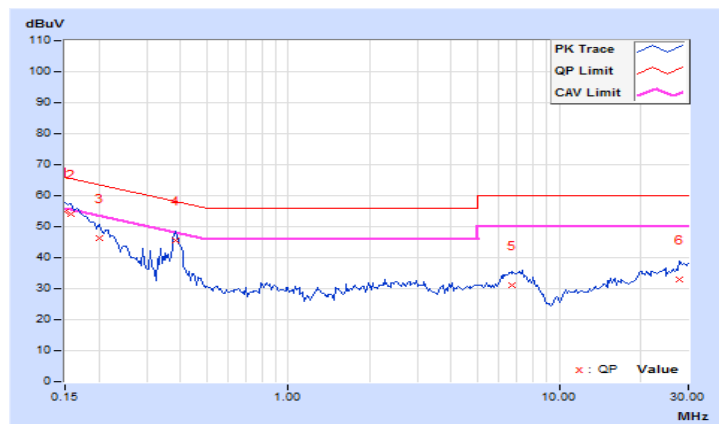


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.93	45.23	30.47	55.16	40.40	66.00	56.00	-10.84	-15.60
2	0.15781	9.93	44.45	28.40	54.38	38.33	65.58	55.58	-11.20	-17.25
3	0.18125	9.94	40.06	24.64	50.00	34.58	64.43	54.43	-14.43	-19.85
4	0.38828	9.96	32.13	23.98	42.09	33.94	58.10	48.10	-16.01	-14.16
5	6.64063	10.23	20.32	15.91	30.55	26.14	60.00	50.00	-29.45	-23.86
6	30.00000	10.98	20.99	16.05	31.97	27.03	60.00	50.00	-28.03	-22.97

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

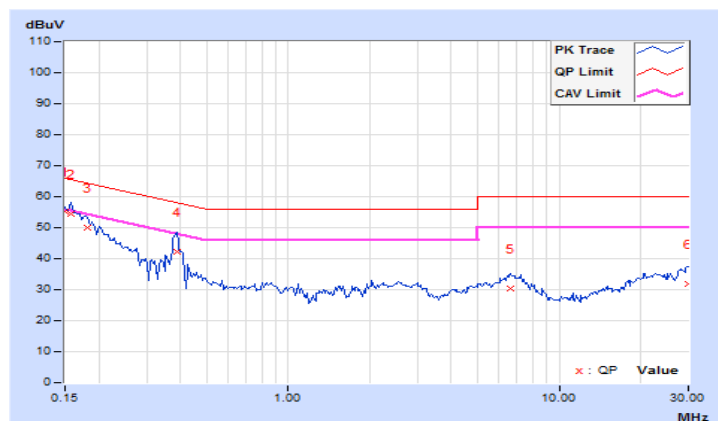


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.08	8.57	0.5	Pass
6	2437	7.63	8.13	0.5	Pass
11	2462	8.54	8.56	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.20	16.43	0.5	Pass
6	2437	15.64	16.39	0.5	Pass
11	2462	16.36	16.40	0.5	Pass

VHT20


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.12	17.67	0.5	Pass
6	2437	17.00	17.65	0.5	Pass
11	2462	16.99	17.66	0.5	Pass

VHT40


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.23	35.27	0.5	Pass
6	2437	35.28	35.35	0.5	Pass
9	2452	35.31	35.25	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH6

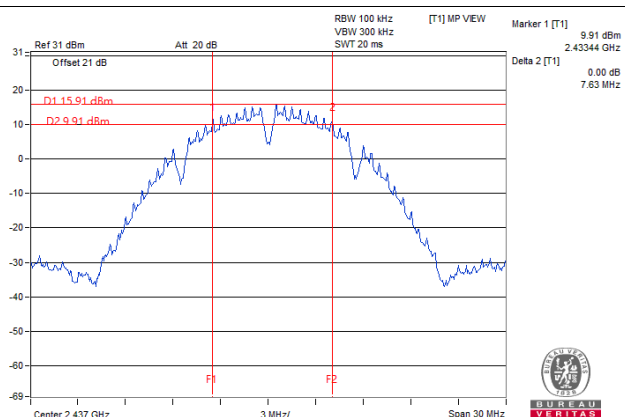


802.11g / Chain 0 : CH1

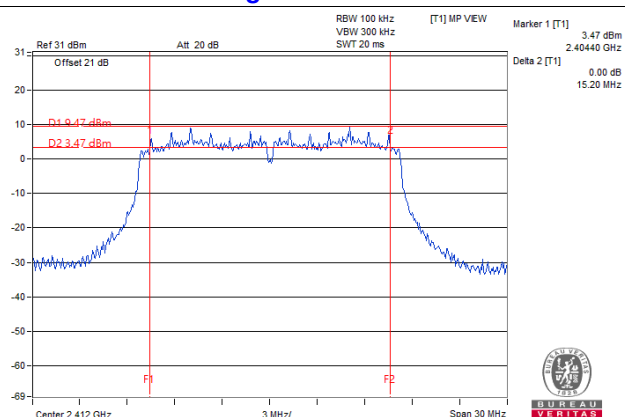

VHT20 / Chain0 : CH1

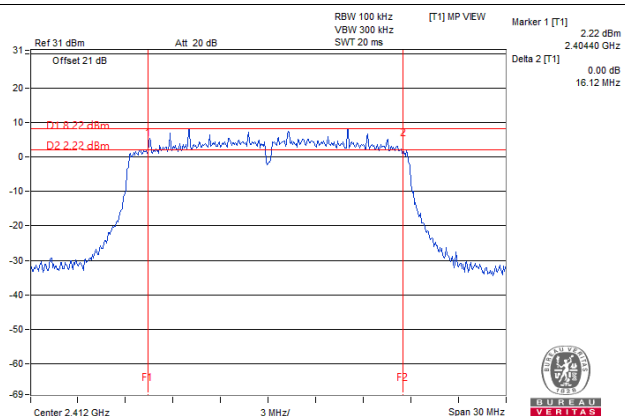


VHT40 / Chain 0 : CH3

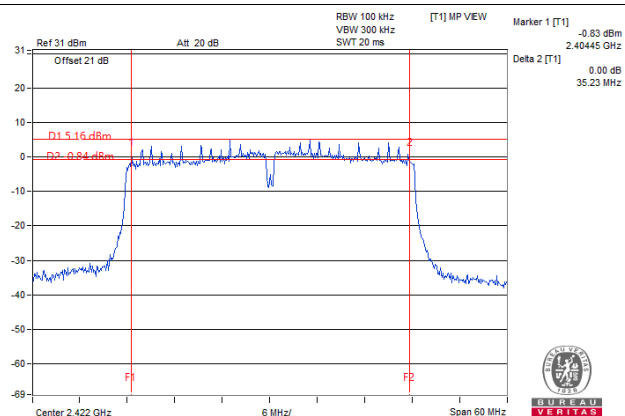

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

Same as Item 4.3.6.

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	12.84	13.20
6	2437	12.72	13.20
11	2462	12.96	13.20

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	16.32	16.56
6	2437	16.80	16.68
11	2462	16.56	16.56

VHT20


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	17.64	17.76
6	2437	18.12	17.76
11	2462	17.76	17.76

VHT40


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
3	2422	36.48	36.00
6	2437	36.24	36.24
9	2452	36.24	36.24

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH1

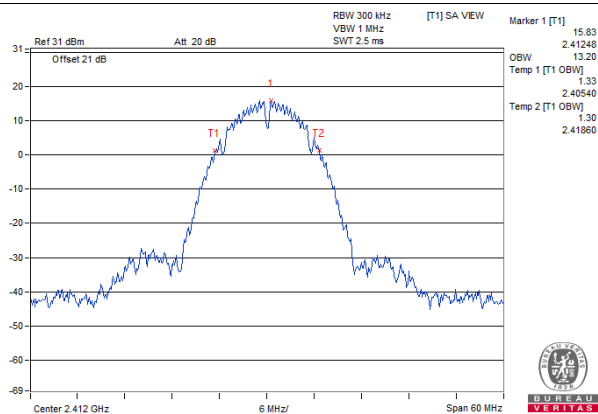


802.11g / Chain 0 : CH6

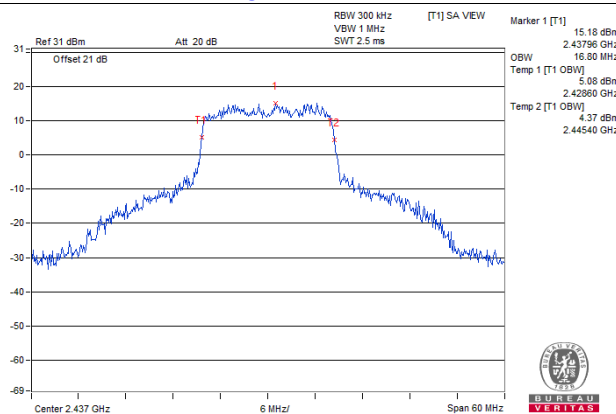

VHT20 / Chain0 : CH6

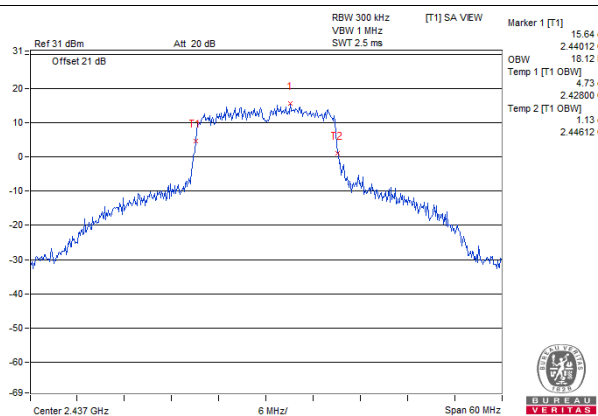

VHT40 / Chain0 : CH3

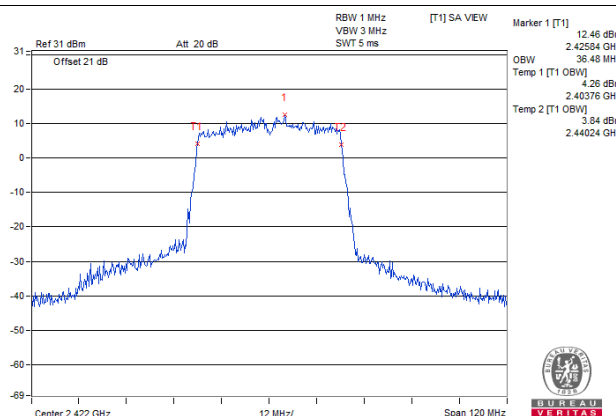

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

CDD Mode

802.11b

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	24.49	24.28	549.107	27.40	30.00	Pass
6	2437	24.39	24.26	541.475	27.34	30.00	Pass
11	2462	24.51	24.31	552.262	27.42	30.00	Pass

802.11g

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.11	19.05	161.823	22.09	30.00	Pass
6	2437	24.11	24.03	510.562	27.08	30.00	Pass
11	2462	19.65	19.67	184.94	22.67	30.00	Pass

VHT20

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.46	18.67	143.767	21.58	30.00	Pass
6	2437	24.08	23.97	505.318	27.04	30.00	Pass
11	2462	19.11	19.26	165.803	22.20	30.00	Pass

VHT40

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.72	17.61	116.833	20.68	30.00	Pass
6	2437	19.71	19.64	185.586	22.69	30.00	Pass
9	2452	18.81	18.63	148.979	21.73	30.00	Pass

Beamforming Mode

VHT20

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.46	18.67	143.767	21.58	30.00	Pass
6	2437	24.08	23.97	505.318	27.04	30.00	Pass
11	2462	19.11	19.26	165.803	22.20	30.00	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

VHT40

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.72	17.61	116.833	20.68	30.00	Pass
6	2437	19.71	19.64	185.586	22.69	30.00	Pass
9	2452	18.81	18.63	148.979	21.73	30.00	Pass


Note: 2. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

802.11b, VHT20

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

802.11g, VHT40

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-6.21	3.01	-3.20	8.00	Pass
	6	2437	-6.49	3.01	-3.48	8.00	Pass
	11	2462	-6.11	3.01	-3.10	8.00	Pass
1	1	2412	-7.24	3.01	-4.23	8.00	Pass
	6	2437	-6.43	3.01	-3.42	8.00	Pass
	11	2462	-6.43	3.01	-3.42	8.00	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-12.59	3.01	0.2	-9.38	8	Pass
	6	2437	-8.98	3.01	0.2	-5.77	8	Pass
	11	2462	-13.05	3.01	0.2	-9.84	8	Pass
1	1	2412	-14.27	3.01	0.2	-11.06	8	Pass
	6	2437	-9.25	3.01	0.2	-6.04	8	Pass
	11	2462	-13.41	3.01	0.2	-10.20	8	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.
2. Refer to section 3.3 for duty cycle spectrum plot.

VHT20

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-13.84	3.01	-10.83	8.00	Pass
	6	2437	-8.12	3.01	-5.11	8.00	Pass
	11	2462	-13.11	3.01	-10.10	8.00	Pass
1	1	2412	-14.63	3.01	-11.62	8.00	Pass
	6	2437	-8.39	3.01	-5.38	8.00	Pass
	11	2462	-13.57	3.01	-10.56	8.00	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.


VHT40

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-14.25	3.01	0.15	-11.09	8	Pass
	6	2437	-13.73	3.01	0.15	-10.57	8	Pass
	9	2452	-16.05	3.01	0.15	-12.89	8	Pass
1	3	2422	-17.31	3.01	0.15	-14.15	8	Pass
	6	2437	-15.27	3.01	0.15	-12.11	8	Pass
	9	2452	-16.56	3.01	0.15	-13.40	8	Pass


Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.84\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.
 2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 0: CH11

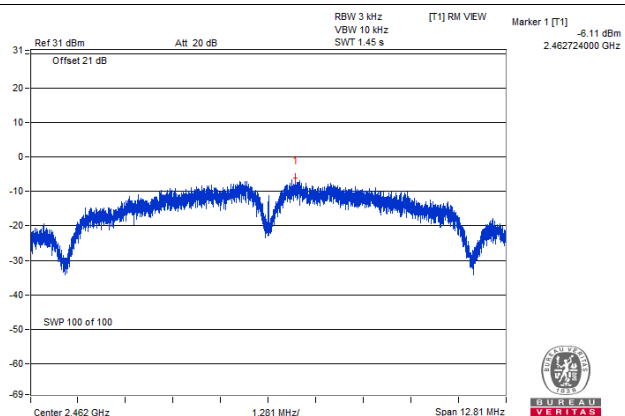


802.11g / Chain 0 : CH6

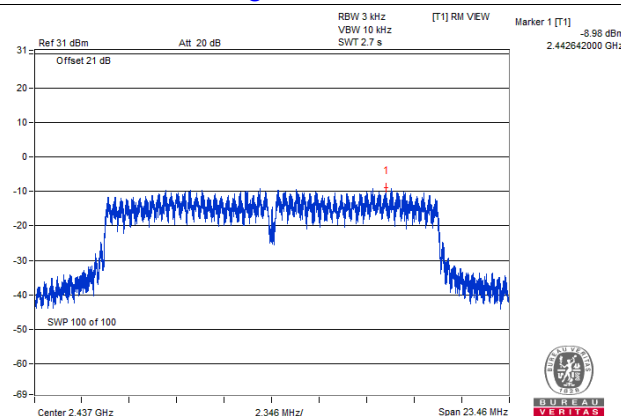

VHT20 / Chain 0: CH6

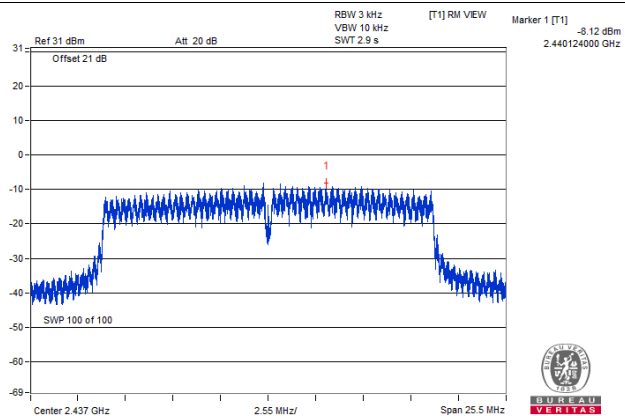

VHT40 / Chain 0: CH6

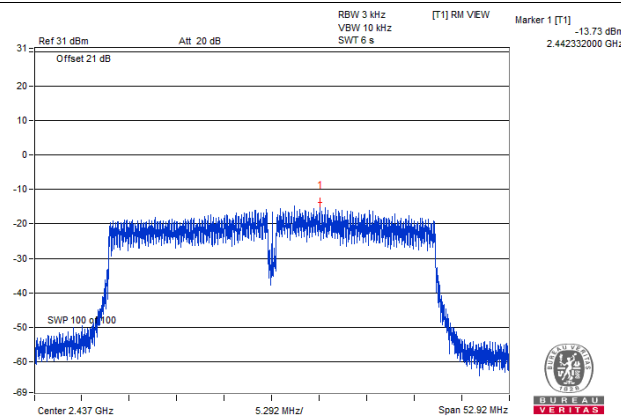


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition


Same as Item 4.3.6

4.7.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

Maximum REF

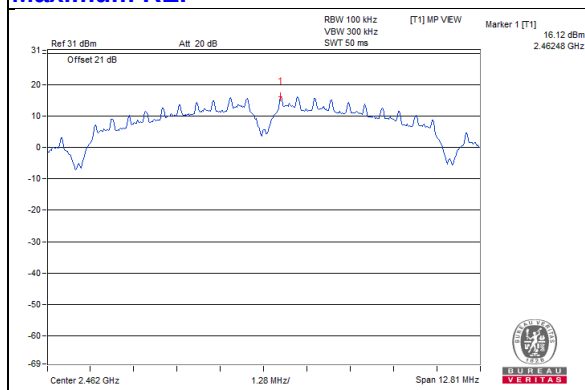


Chain 0


CH 1

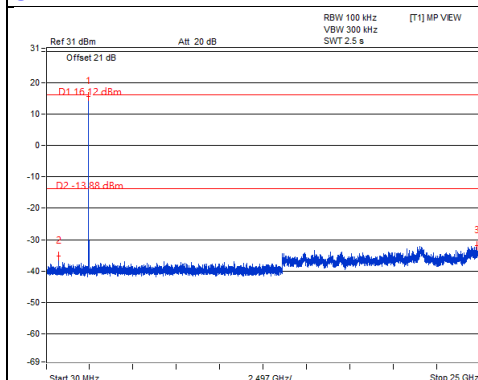


CH 6

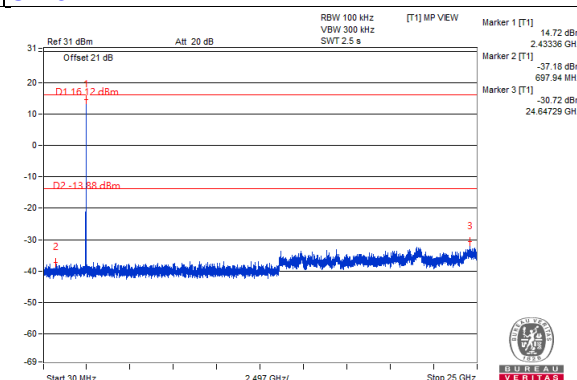


CH 11

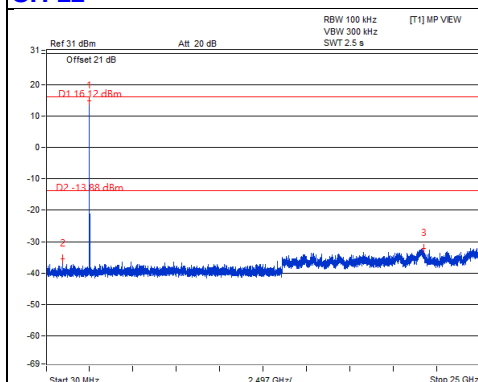

CH 1 Band edge

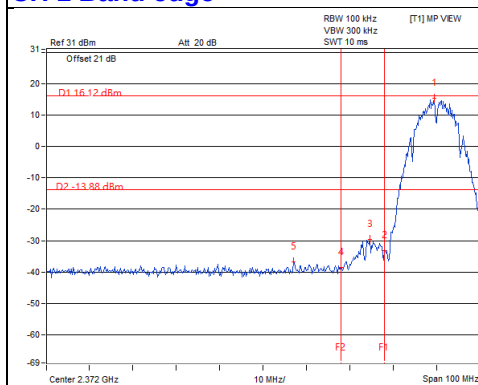


CH 11 Band edge

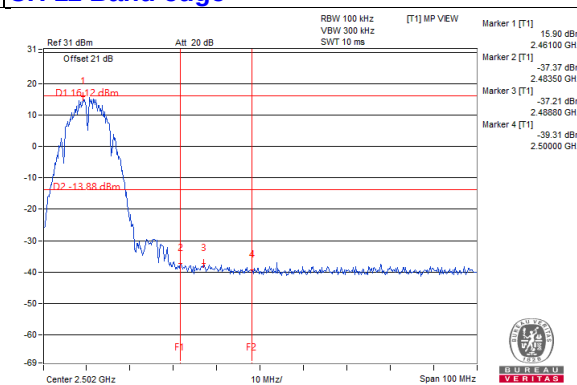


Chain 1


CH 1

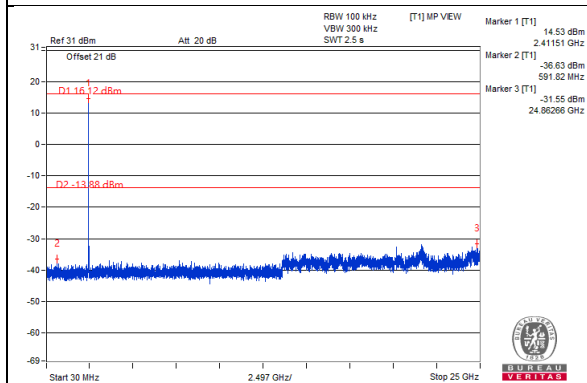

CH 6

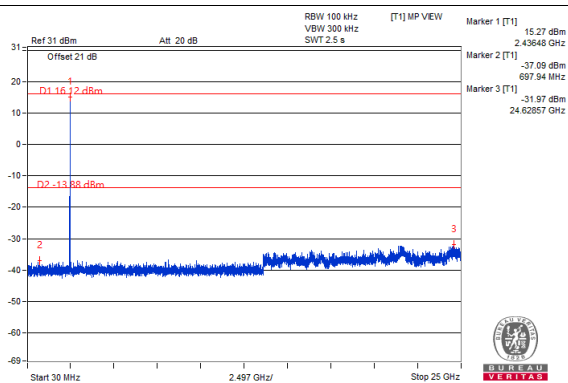


CH 11

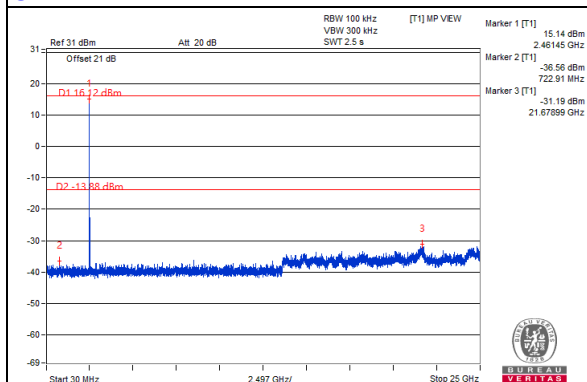


CH 11 Band edge


CH 1 Band edge

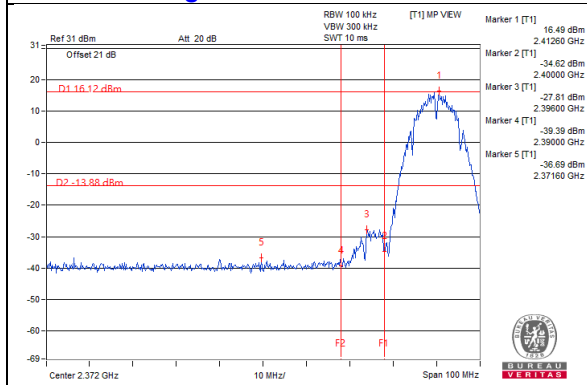

CH 11 Band edge

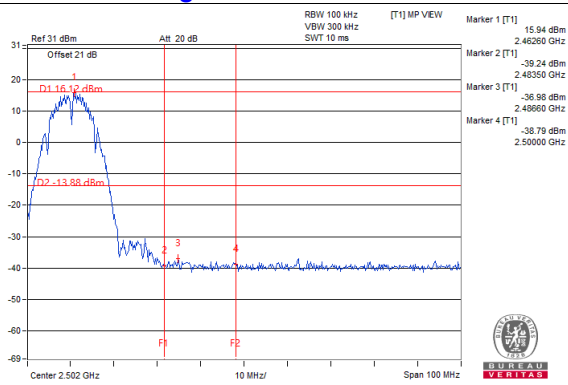


802.11g

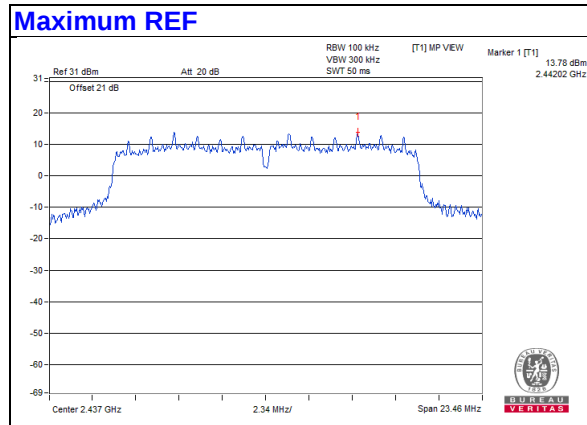


Chain 0


CH 1

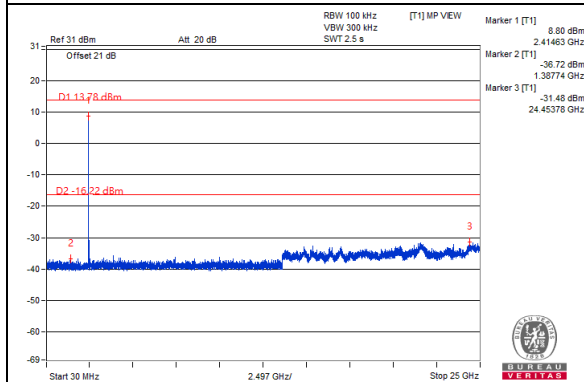


CH 6

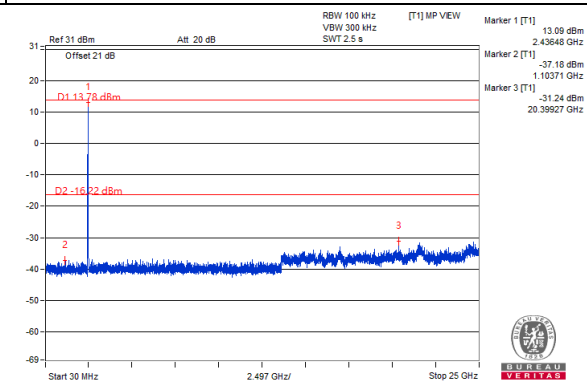


CH 11

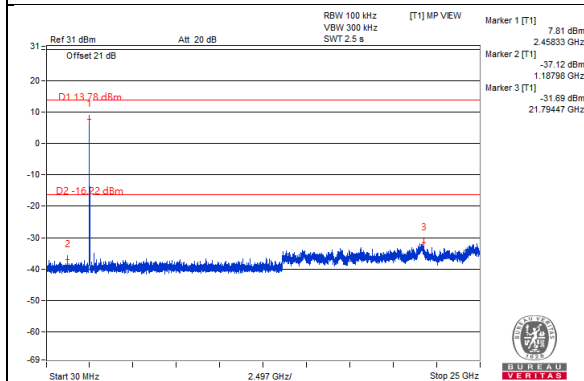

CH 1 Band edge

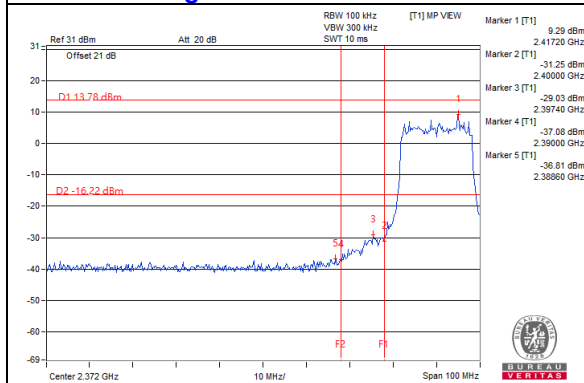


CH 11 Band edge

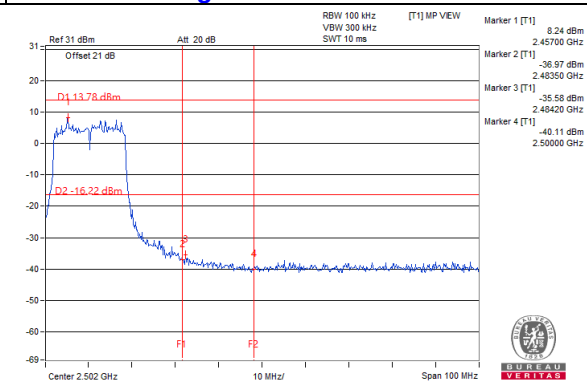


Chain 1


CH 1

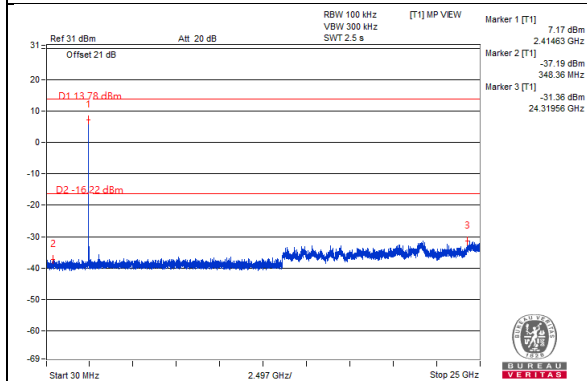


CH 6

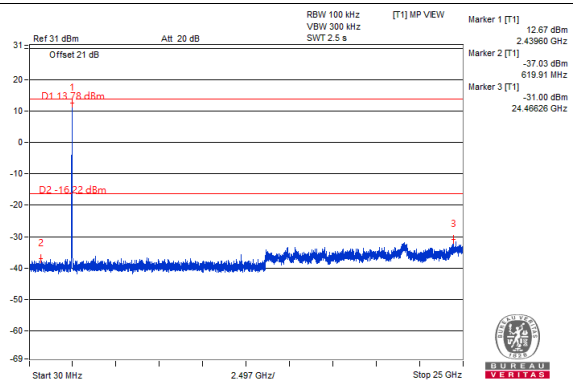


CH 11

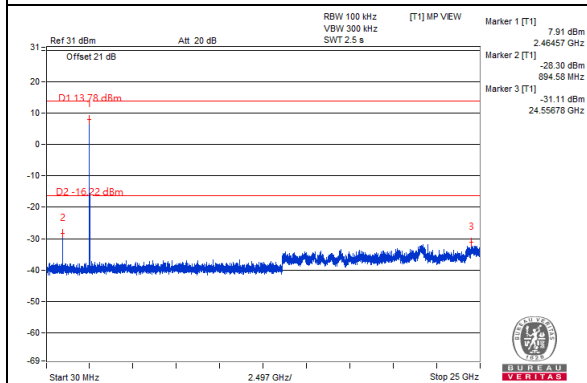

CH 1 Band edge

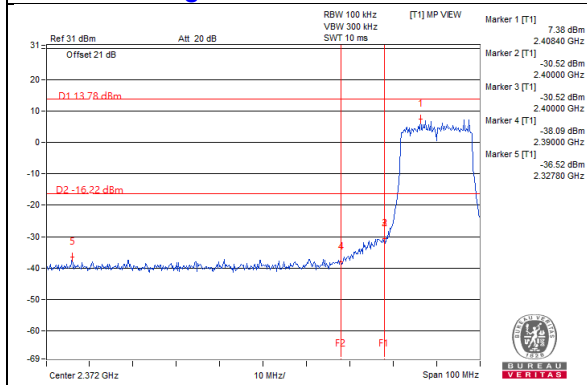


CH 11 Band edge

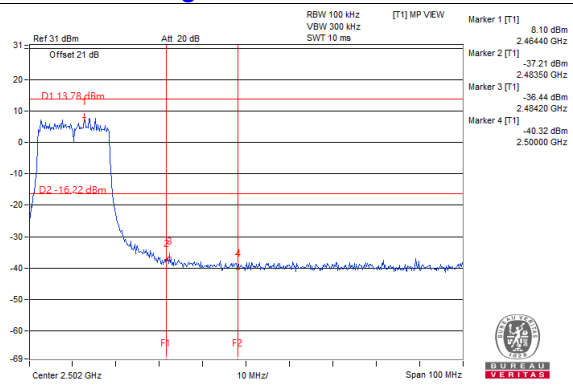


VHT20

Maximum REF

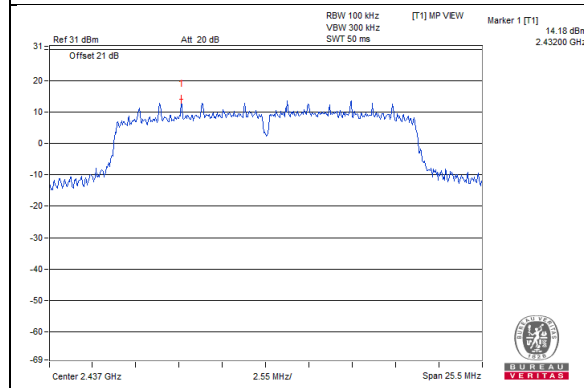


Chain 0


CH 1

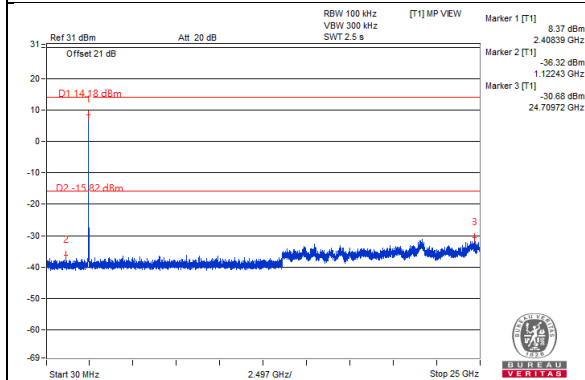


CH 6

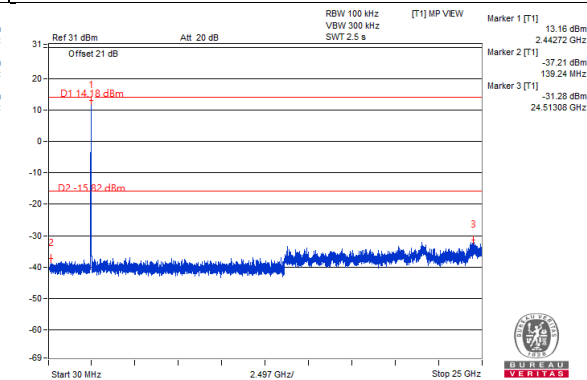


CH 11

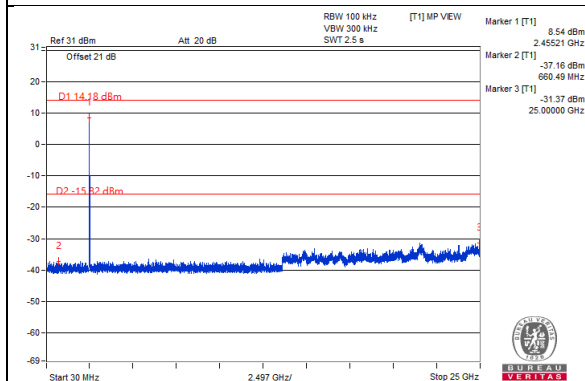

CH 1 Band edge

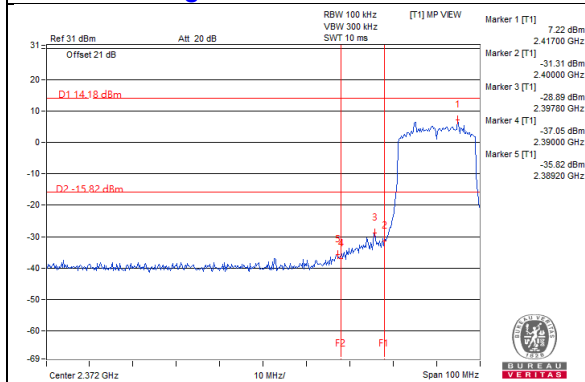


CH 11 Band edge

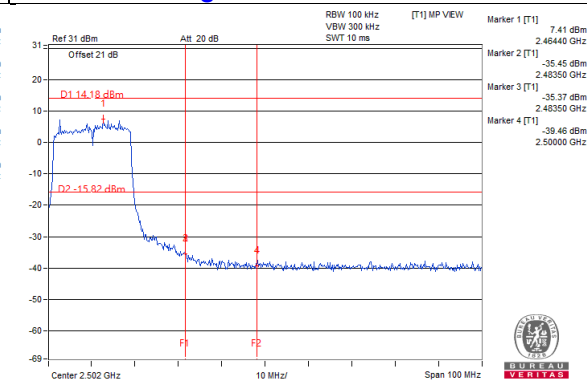


Chain 1


CH 1

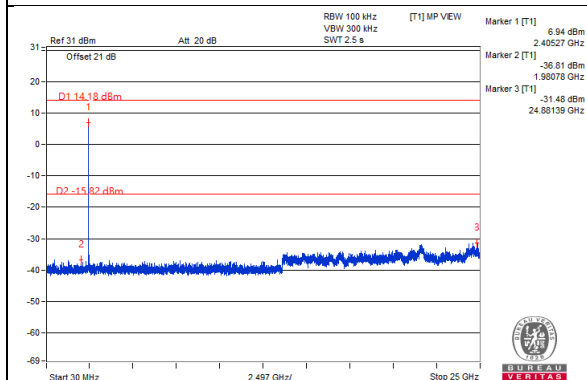

CH 6

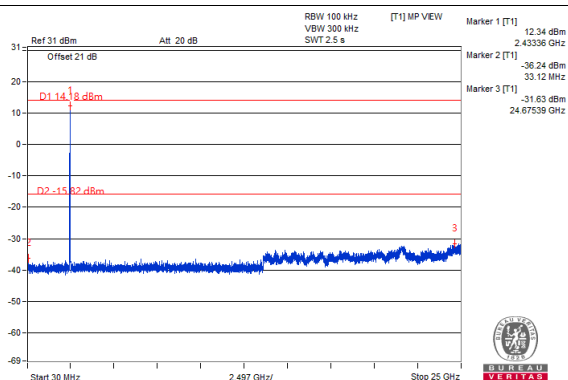


CH11

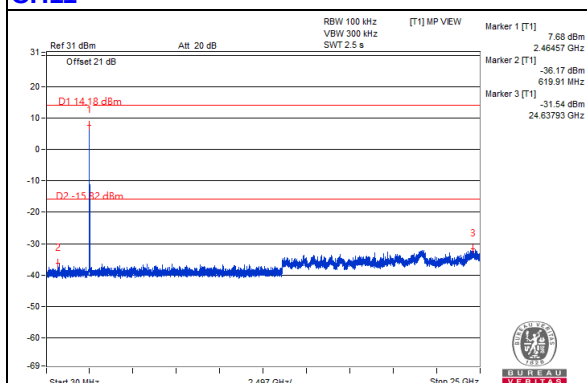


CH 11 Band edge

CH 1 Band edge

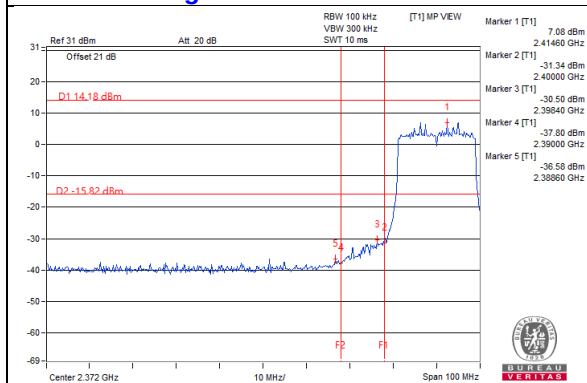


CH 11 Band edge

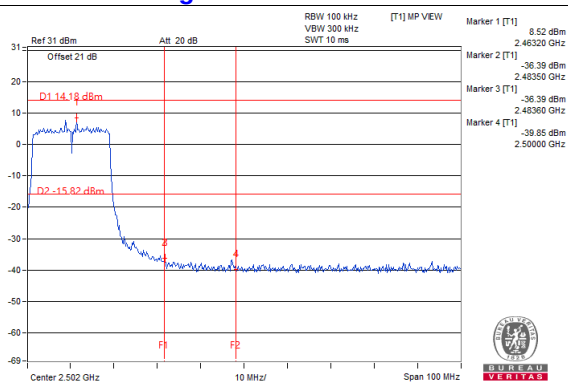


VHT40

Maximum REF

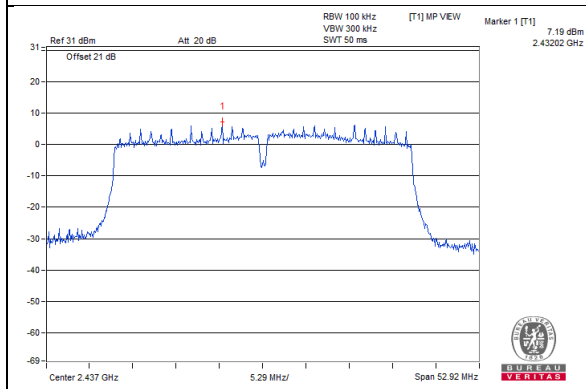


Chain 0


CH 3

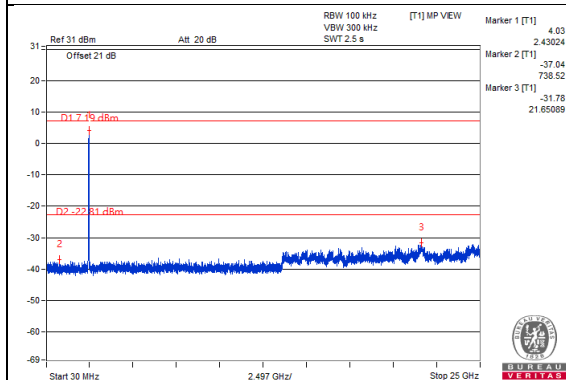


CH 6

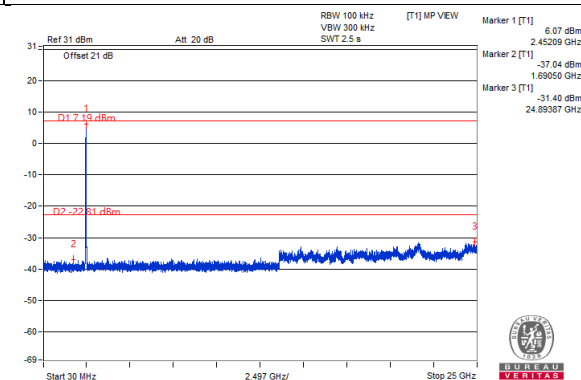


CH 9

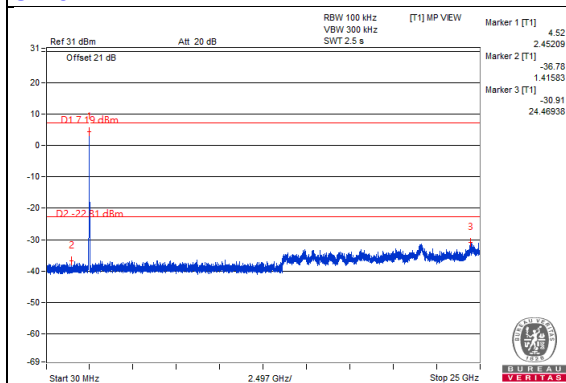

CH 3 Band edge

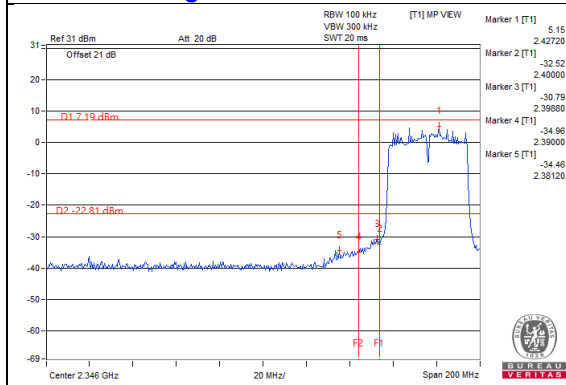


CH 9 Band edge

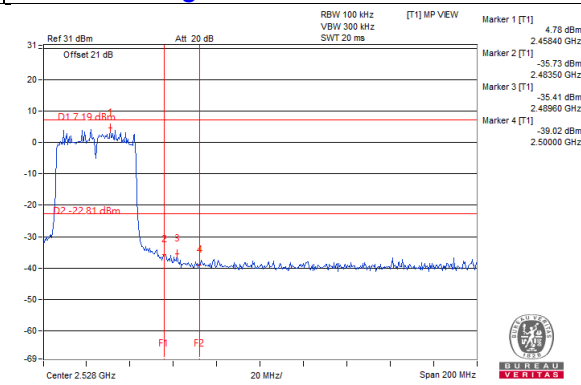


Chain 1


CH 3

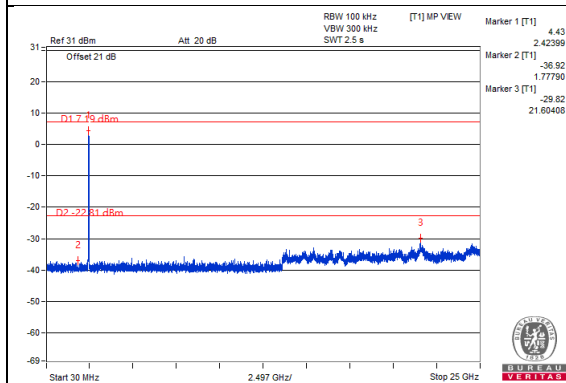


CH 6

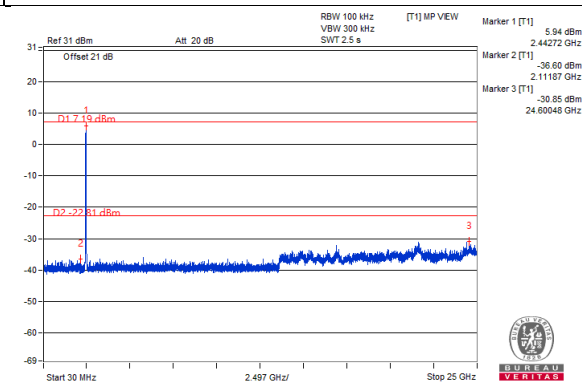


CH 9

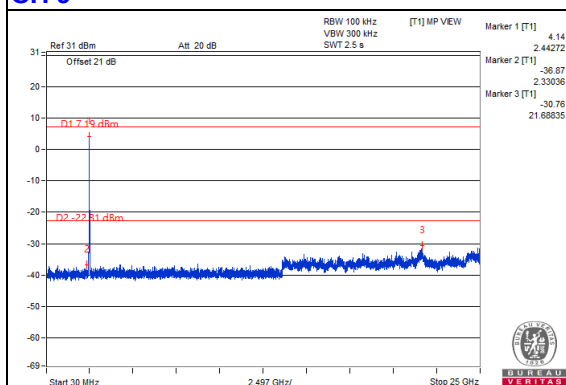

CH 3 Band edge

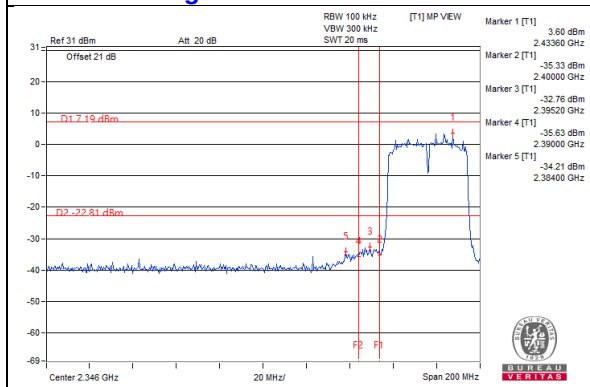

CH 9 Band edge

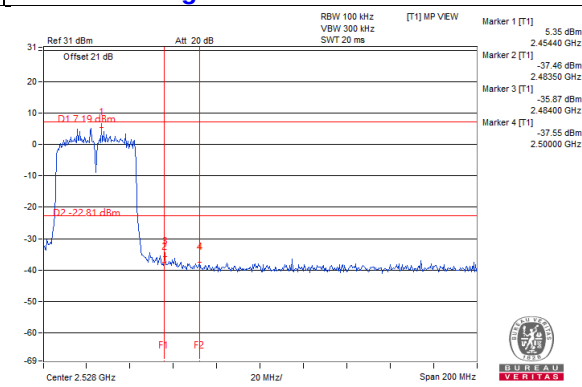

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---