

FCC ID: 2AKZA-QCA9377
Report No.: T180627D11-RP2

Page: 1 / 56
Rev.: 02

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C


Test Standard	FCC Part 15.247
Product name	WiFi+Bluetooth 4.1(HS) System on Module
Brand Name	TechNexion
Model No.	PIXI-9377
Test Result	Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:

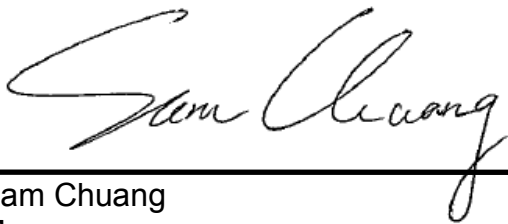

Sam Chuang
Manager

Tested by:



Jerry Chuang
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T180627D11-RP2

Page: 2 / 56
Rev.: 02

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 28, 2018	Initial Issue	ALL	May Lin
01	September 20, 2018	1. Revised antenna information. 2. Update KDB 937606 to KDB 414788.	P.5, P29-30	May Lin
02	September 27, 2018	1. Revised the worst mode of measurement.	P.12	May Lin



Report No.: T180627D11-RP2

Page: 3 / 56
Rev.: 02

Table of contents

1.	GENERAL INFORMATION	4
1.1	EUT INFORMATION	4
1.2	EUT CHANNEL INFORMATION	5
1.3	ANTENNA INFORMATION	5
1.4	MEASUREMENT UNCERTAINTY	6
1.5	FACILITIES AND TEST LOCATION	7
1.6	INSTRUMENT CALIBRATION	8
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT	9
2.	TEST SUMMERY	10
3.	DESCRIPTION OF TEST MODES.....	11
3.1	THE WORST MODE OF OPERATING CONDITION	11
3.2	THE WORST MODE OF MEASUREMENT	12
3.3	EUT DUTY CYCLE	14
4.	TEST RESULT	15
4.1	AC POWER LINE CONDUCTED EMISSION	15
4.2	6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....	18
4.3	OUTPUT POWER MEASUREMENT	21
4.4	POWER SPECTRAL DENSITY	23
4.5	CONDUCTED BAND EDGE AND SPURIOUS EMISSION	25
4.6	RADIATION BANDEDGE AND SPURIOUS EMISSION	29
APPENDIX 1 - PHOTOGRAPHS OF EUT		



Report No.: T180627D11-RP2

Page: 4 / 56
Rev.: 02

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	TechNexion Ltd. 16f-5, No.736, Zhongzheng Road, Zhonghe Dist., New Taipei City, 23511 Taiwan ROC
Manufacturer	TechNexion Ltd. 16f-5, No.736, Zhongzheng Road, Zhonghe Dist., New Taipei City, 23511 Taiwan ROC
Equipment	WiFi+Bluetooth 4.1(HS) System on Module
Model No.	PIXI-9377
Model Discrepancy	N/A
Trade Name	TechNexion
Received Date	June 27, 2018
Date of Test	July 16 ~30, 2018
Output Power (W)	BLE: 0.0042
Power Operation	Power by host system
H/W Version	A1
F/W Version	A1



Report No.: T180627D11-RP2

Page: 5 / 56
Rev.: 02

1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	GFSK for BLE-1Mbps
Number of channel	40 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	☒ PIFA ☐ PCB ☒ Dipole ☐ Coils					
Antenna Gain		Brand	P/N	Type	Peak Gain	Worst Mode
	Antenna 1	TechNexion	VM2450-25523-OOX-180	PIFA	2.5dBi	X
	Antenna 2	TechNexion	VM2450-ASSY1005	Dipole	4dBi	O



Report No.: T180627D11-RP2

Page: 6 / 56
Rev.: 02

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.



Report No.: T180627D11-RP2

Page: 7 / 56
Rev.: 02

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Jerry Chuang	-
RF Conducted	Jerry Chuang	-

Remark: *The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.*

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	06/29/2018	06/28/2019
Power Meter	Anritsu	ML2495A	1012009	09/18/2017	09/17/2018
Power Sensor	Anritsu	MA2411B	1126148	02/06/2018	02/05/2019
Signal Analyzer	R&S	FSV 40	101073	10/02/2017	10/01/2018

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	05/14/2018	05/13/2019
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	07/31/2017	07/30/2018
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	02/08/2018	02/07/2019
Double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/25/2017	08/24/2018
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019
Pre-Amplifier	EMEC	EM330	060609	06/29/2018	06/28/2019
Pre-Amplifier	HP	8449B	3008A00965	06/29/2018	06/28/2019
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
LISN	R&S	ENV216	101054	02/06/2018	02/05/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	02/09/2018	02/08/2019
EMI Test Receiver	R&S	ESCI	101203	11/02/2017	11/01/2018
CABLE	EMCI	CFD300-NL	CERF	07/03/2018	07/02/2019

Remark: Each piece of equipment is scheduled for calibration once a year.



Report No.: T180627D11-RP2

Page: 9 / 56
Rev.: 02

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(K)	Toshiba	voyager	ZD 154034s	N/A
2	NB	Lenovo	TP00056A	R33B65	PD97260HU

1.8 Test methodology and applied standards

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01



Report No.: T180627D11-RP2

Page: 10 / 56
Rev.: 02

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(2)	4.2	6 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)	4.3	Output Power Measurement	Pass
15.247(e)	4.4	Power Spectral Density	Pass
15.247(d)	4.5	Conducted Band Edge	Pass
15.247(d)	4.5	Conducted Emission	Pass
15.247(d)	4.6	Radiation Band Edge	Pass
15.247(d)	4.6	Radiation Spurious Emission	Pass



Report No.: T180627D11-RP2

Page: 11 / 56
Rev.: 02

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	BT4.1 Mode (1Mbps)
Test Channel Frequencies	1.Lowest Channel : 2402MHz 2.Middle Channel : 2440MHz 3.Highest Channel : 2480MHz

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

.

3.2 THE WORST MODE OF MEASUREMENT

For PIFA Antenna

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☒ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	☒ Horizontal ☐ Vertical

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis, X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (X-Plane and Horizontal) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

For Dipole Antenna

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☒ Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	☐ Horizontal ☒ Vertical


Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis, X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (Z-Plane and Vertical) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

3.3 EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
BLE	0.4400	0.6200	70.97%	-1.49

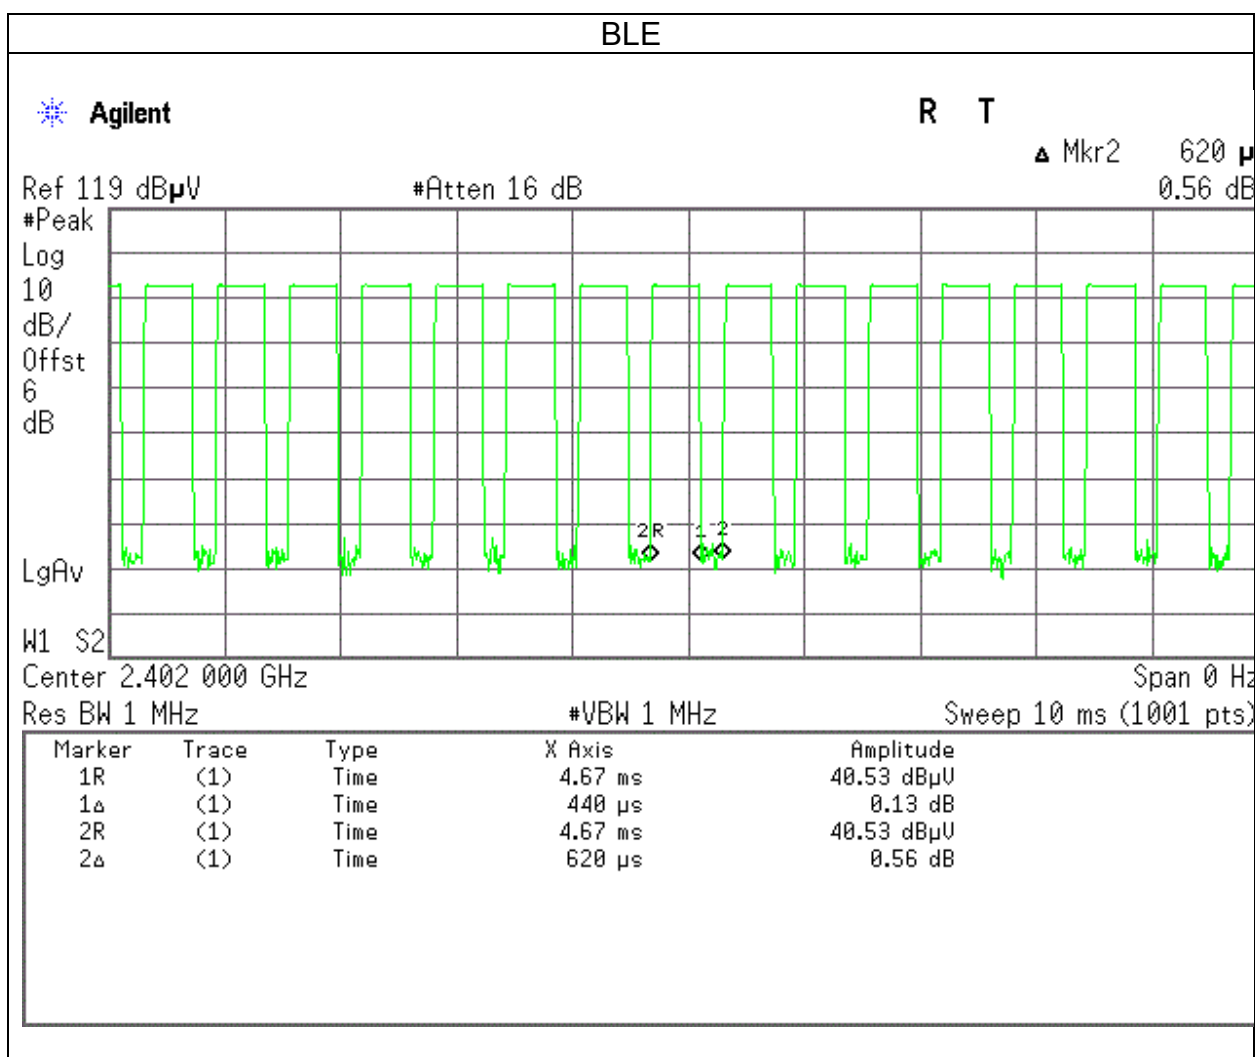

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a)

Frequency Range (MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

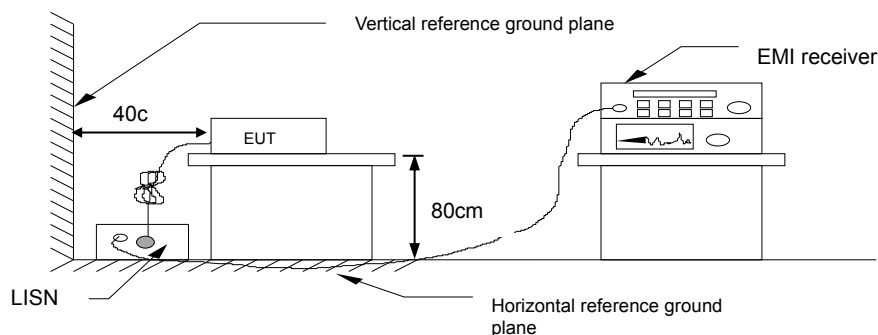


4.1.4 Test Result

Pass


Test Data

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Line	Test Date	July 19, 2018
Test Voltage:	120Vac	Test Engineer	Dally Hong

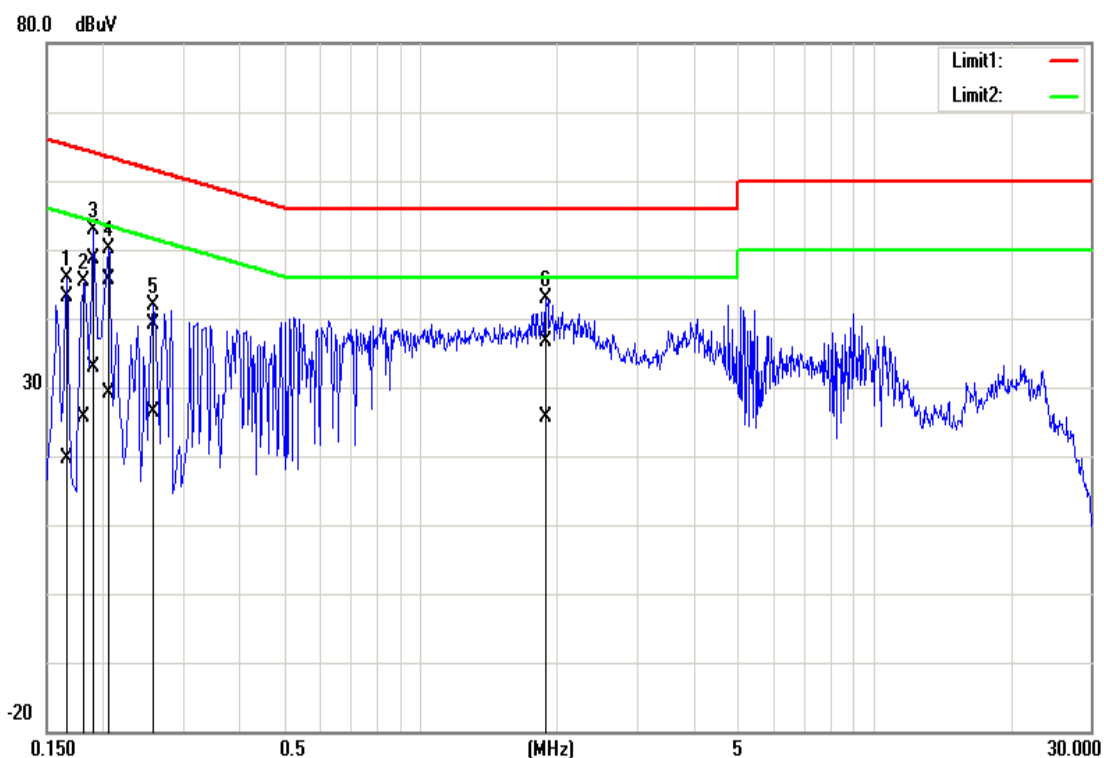

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1660	43.06	19.41	0.11	43.17	19.52	65.16	55.16	-21.99	-35.64	Pass
0.1820	45.33	25.48	0.11	45.44	25.59	64.39	54.39	-18.95	-28.80	Pass
0.1900	48.46	32.72	0.11	48.57	32.83	64.04	54.04	-15.47	-21.21	Pass
0.2060	45.57	28.98	0.11	45.68	29.09	63.37	53.37	-17.69	-24.28	Pass
0.2580	39.04	26.23	0.11	39.15	26.34	61.50	51.50	-22.35	-25.16	Pass
1.8940	36.51	25.54	0.15	36.66	25.69	56.00	46.00	-19.34	-20.31	Pass

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Neutral	Test Date	July 19, 2018
Test Voltage:	120Vac	Test Engineer	Dally Hong

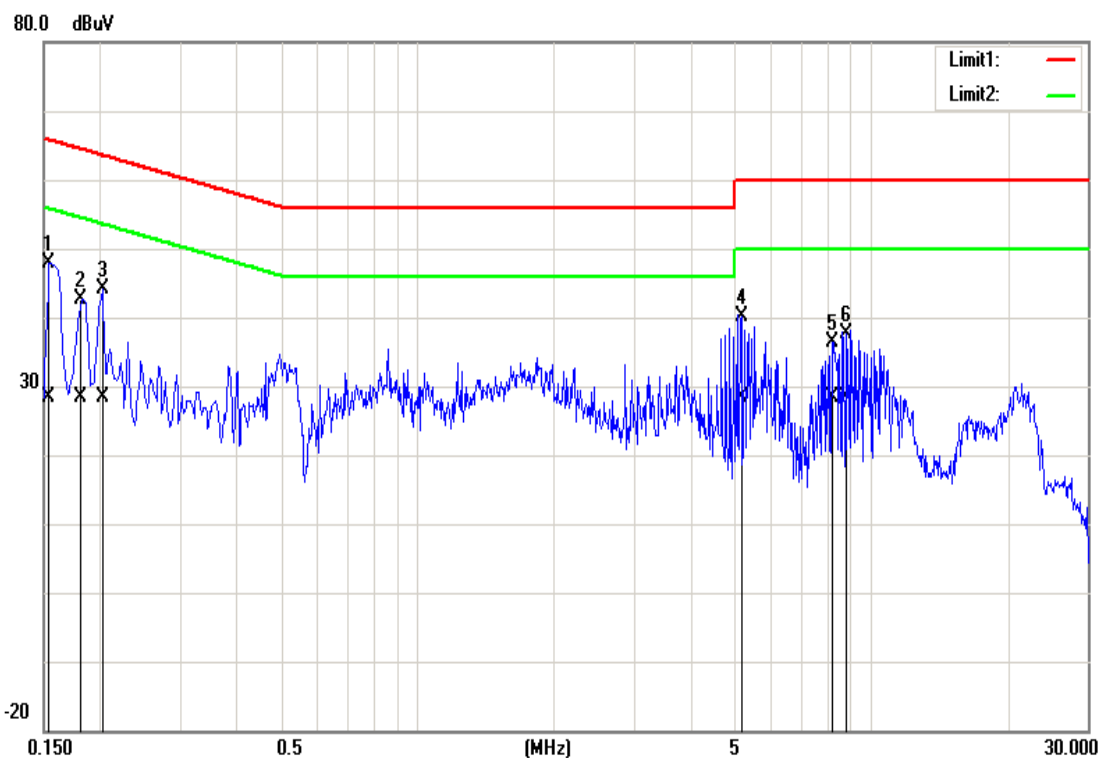

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBu)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
1.8940	31.03	22.97	0.16	31.19	23.13	56.00	46.00	-24.81	-22.87	Pass
0.1825	40.91	28.44	0.13	41.04	28.57	64.37	54.37	-23.33	-25.80	Pass
0.2007	40.02	26.02	0.13	40.15	26.15	63.58	53.58	-23.43	-27.43	Pass
5.1660	39.14	35.87	0.22	39.36	36.09	60.00	50.00	-20.64	-13.91	Pass
8.2300	34.97	30.49	0.27	35.24	30.76	60.00	50.00	-24.76	-19.24	Pass
8.7020	35.42	26.13	0.28	35.70	26.41	60.00	50.00	-24.30	-23.59	Pass

4.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

4.2.1 Test Limit

According to §15.247(a)(2), RSS-247 section 5.2(a)

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as KDB 558074 D01, section 8.1 and ANSI 63.10:2013 clause 6.9.2 & 6.9.3.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup



4.2.4 Test Result

Test mode: BLE mode / 2402-2480 MHz				
Channel	Frequency (MHz)	OBW(99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2402	1.0549	0.6860	>500
Mid	2440	1.0549	0.6686	
High	2480	1.0593	0.6686	




Report No.: T180627D11-RP2


Page: 19 / 56
Rev.: 02

Test Data

6dB BANDWIDTH

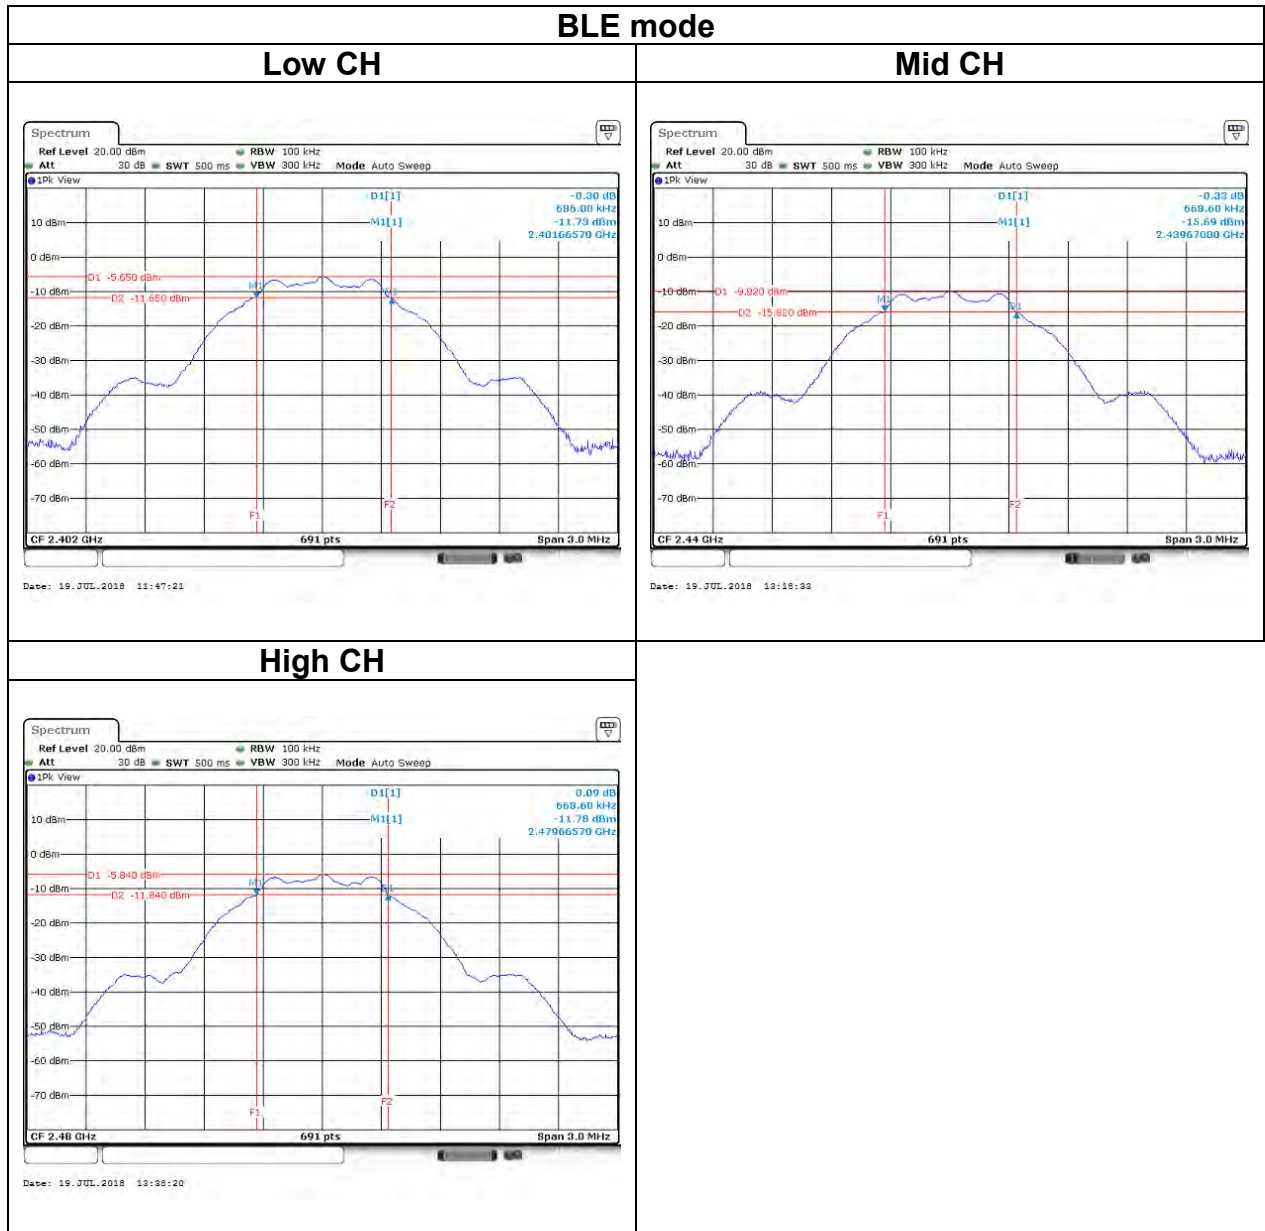

BANDWIDTH(99%)

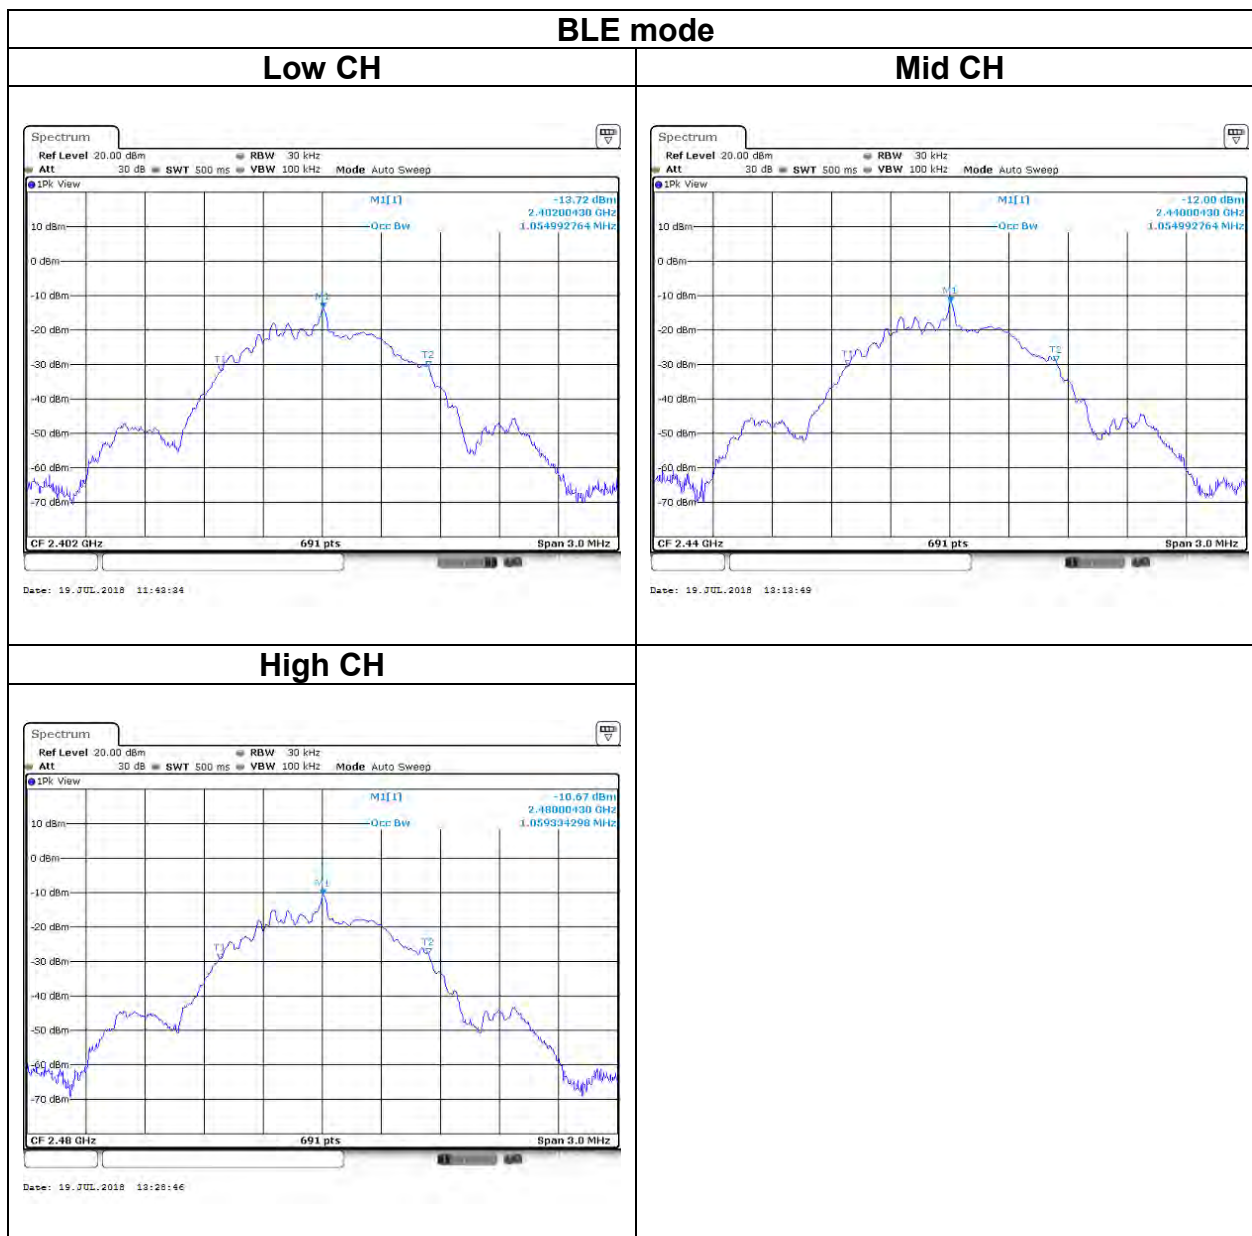

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)

Peak output power :

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	☒ Antenna not exceed 6 dBi : 30dBm ☐ Antenna with DG greater than 6 dBi [Limit = 30 – (DG – 6)] ☐ Point-to-point operation
-------	---


Average output power : For reporting purposes only.

4.3.2 Test Procedure

Test method Refer as KDB 558074 D01, section 9.1.2.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup



4.3.4 Test Result

Peak output power :

BLE Mode					
Config.	CH	Freq. (MHz)	PK Power (dBm)	PK Power (W)	FCC Limit (dBm)
BLE Data rate: 1Mbps	0	2402	4.97	0.0031	30
	19	2440	5.79	0.0038	
	39	2480	6.26	0.0042	

Average output power :

BLE Mode			
Config.	CH	Freq. (MHz)	AV Power (dBm)
BLE Data rate: 1Mbps	0	2402	4.82
	19	2440	5.65
	39	2480	5.99

4.4 POWER SPECTRAL DENSITY

4.4.1 Test Limit

According to §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	☒ Antenna not exceed 6 dBi : 8dBm ☐ Antenna with DG greater than 6 dBi [Limit = 8 – (DG – 6)] ☐ Point-to-point operation :
-------	---

4.4.2 Test Procedure

Test method Refer as KDB 558074 D01, Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

4.4.3 Test Setup

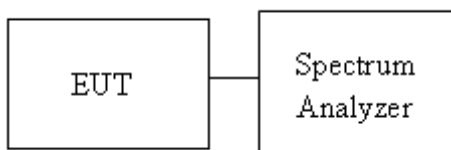

4.4.4 Test Result


Test mode: BLE mode / 2402-2480 MHz			
Channel	Frequency (MHz)	PSD (dBm)	IC/FCC limit (dBm)
Low	2402	-9.84	8
Mid	2440	-10.13	
High	2480	-9.19	



Report No.: T180627D11-RP2

Page: 24 / 56
Rev.: 02

Test Data

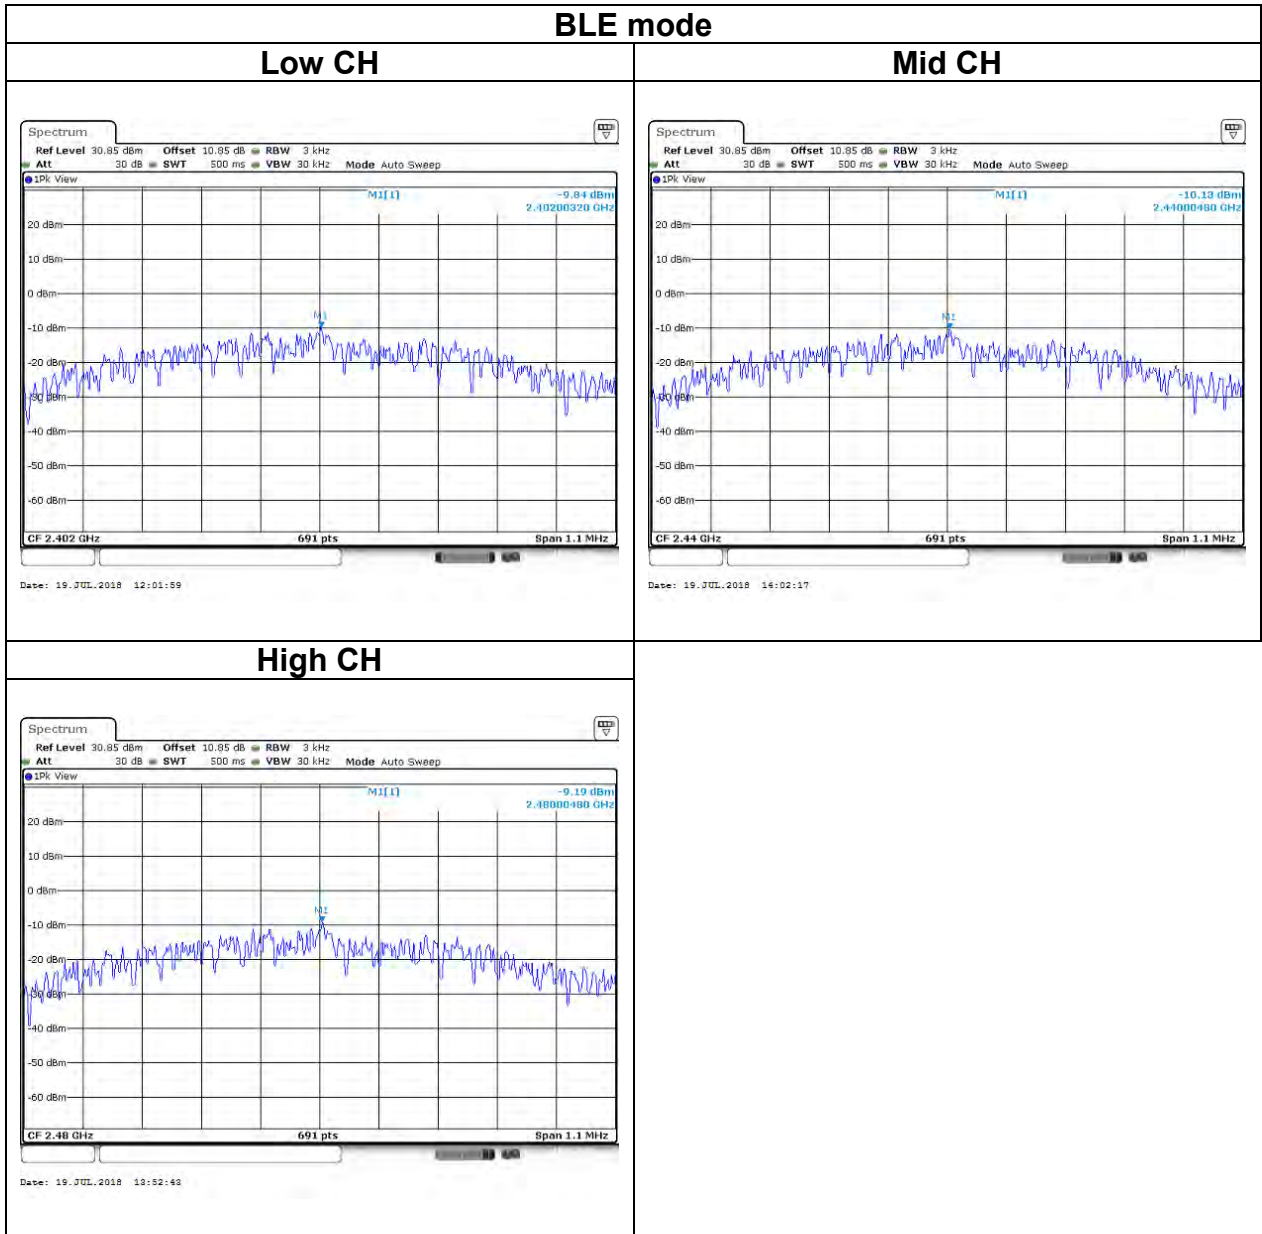

4.5 CONDUCTED BAND EDGE AND SPURIOUS EMISSION

4.5.1 Test Limit

According to §15.247(d)

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

4.5.2 Test Procedure

Test method Refer as KDB 558074 D01, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

4.5.3 Test Setup






Report No.: T180627D11-RP2

Page: 26 / 56
Rev.: 02

4.5.4 Test Result


Test Data

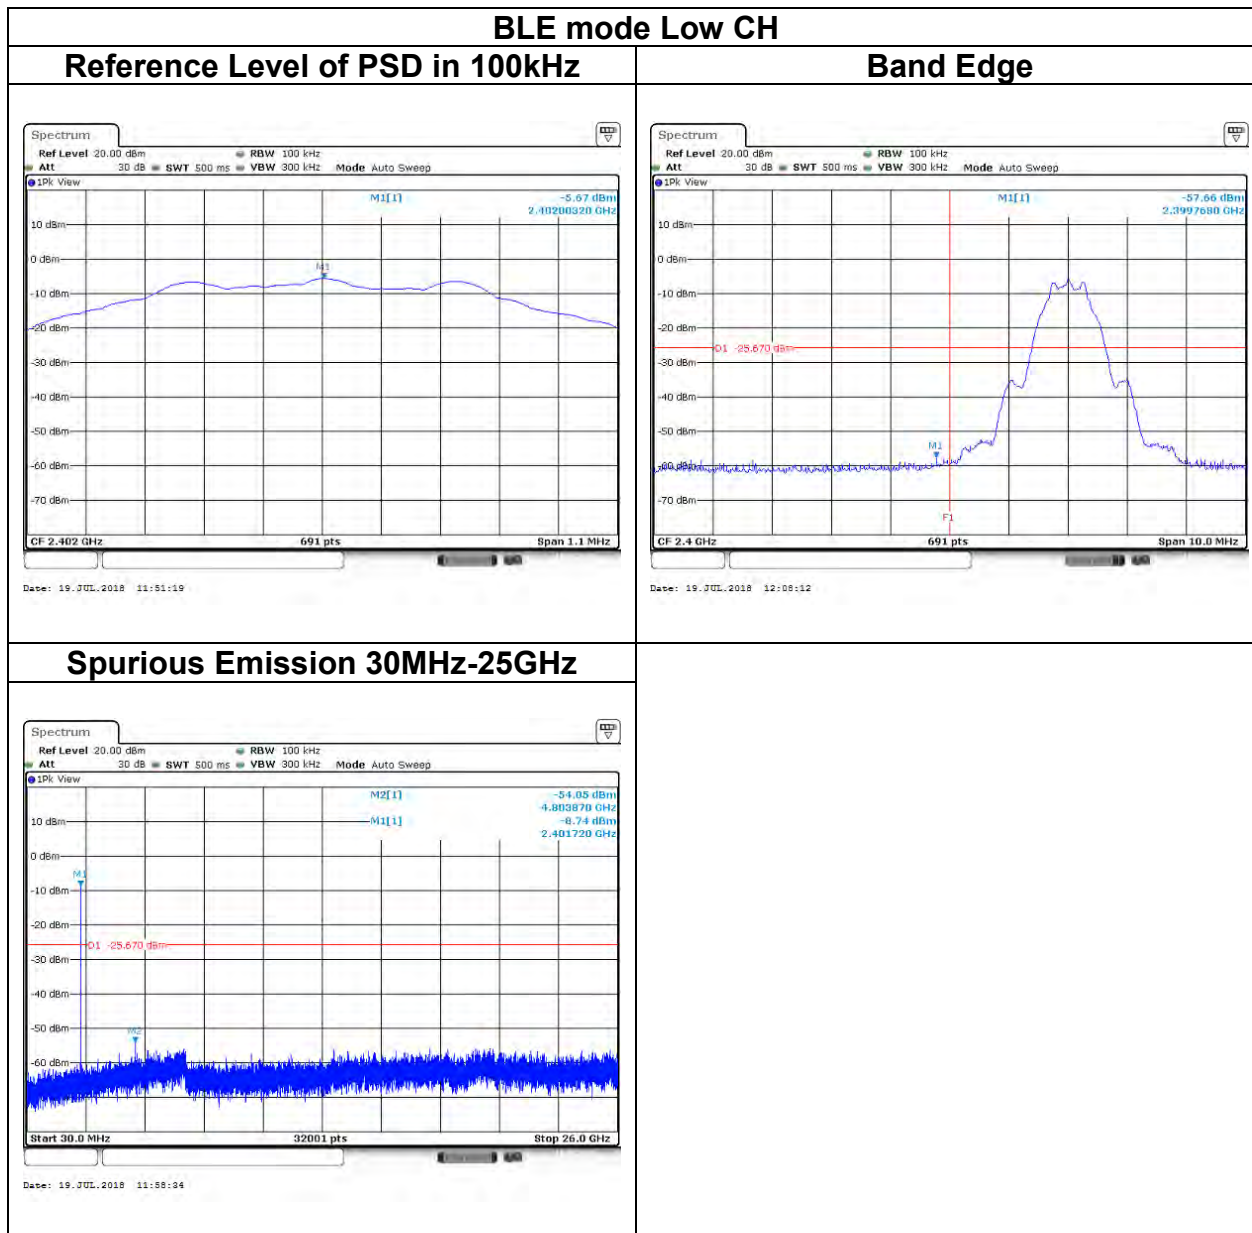



Report No.: T180627D11-RP2


Page: 27 / 56
Rev.: 02

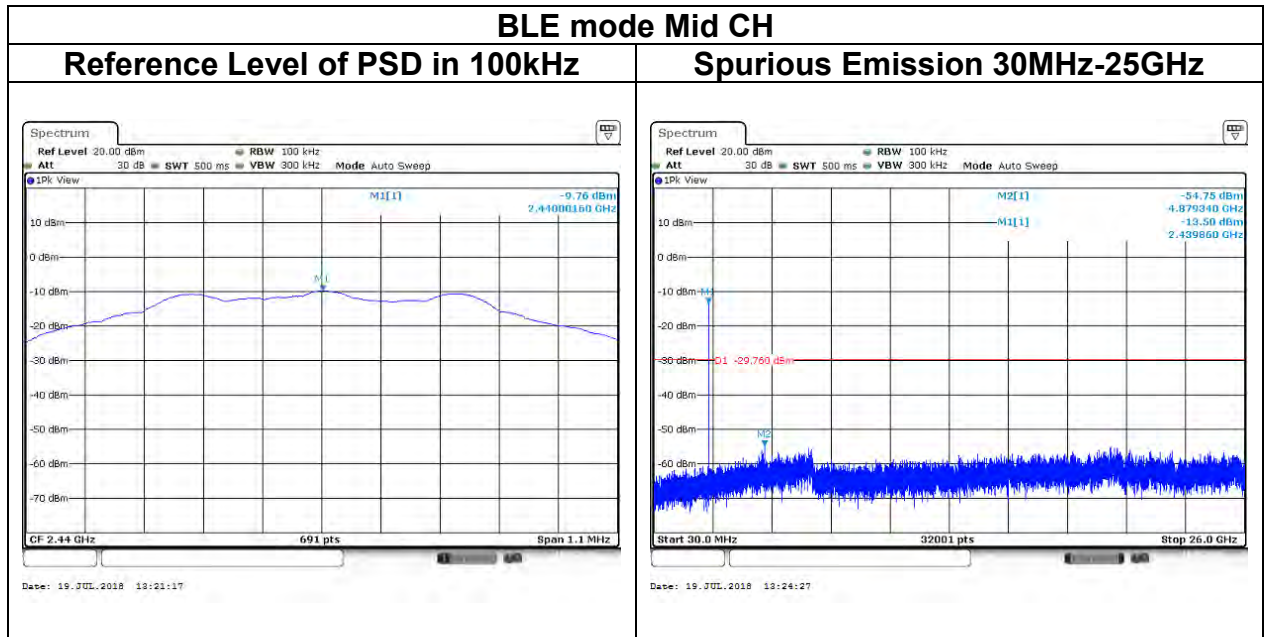



Report No.: T180627D11-RP2

Page: 28 / 56
Rev.: 02

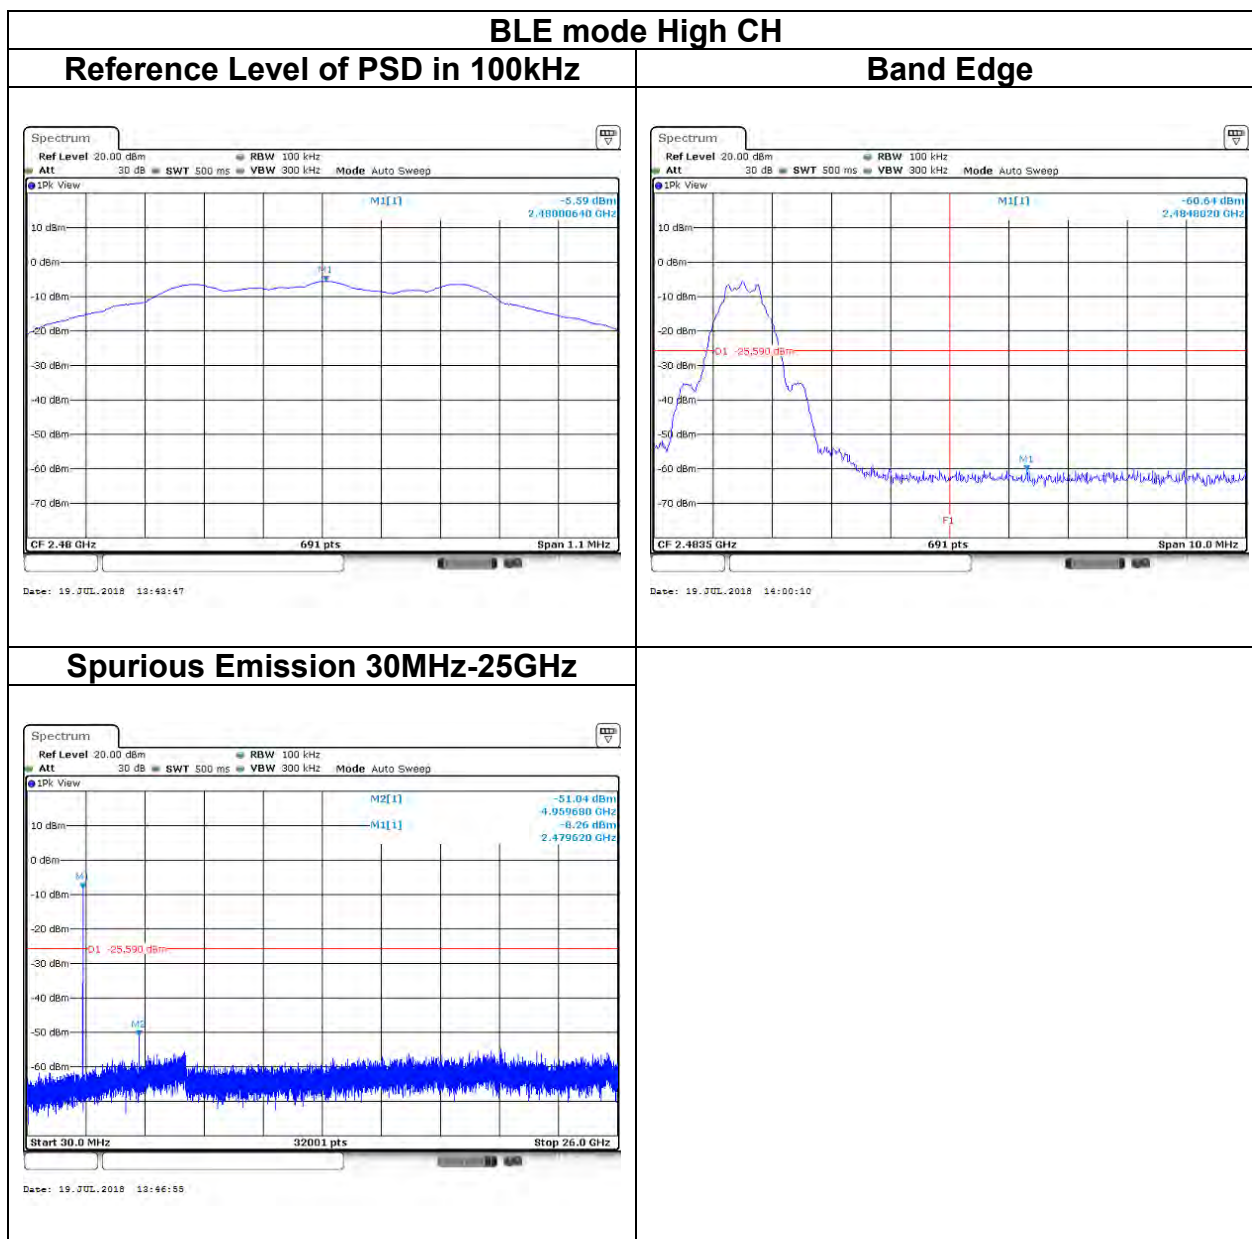

4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.



Report No.: T180627D11-RP2

Page: 30 / 56
Rev.: 02

4.6.2 Test Procedure

Test method Refer as KDB 558074 D01, Section 12.1.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9KHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Remark:

1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).


4. The SA setting following :

- (1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - If Duty Cycle $\geq$ 98%, VBW=10Hz.
 - If Duty Cycle < 98%, VBW=1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW Setting
BLE	70.97%	0.4400	2.273	2.4K

4.6.3 Test Setup

9kHz ~ 30MHz

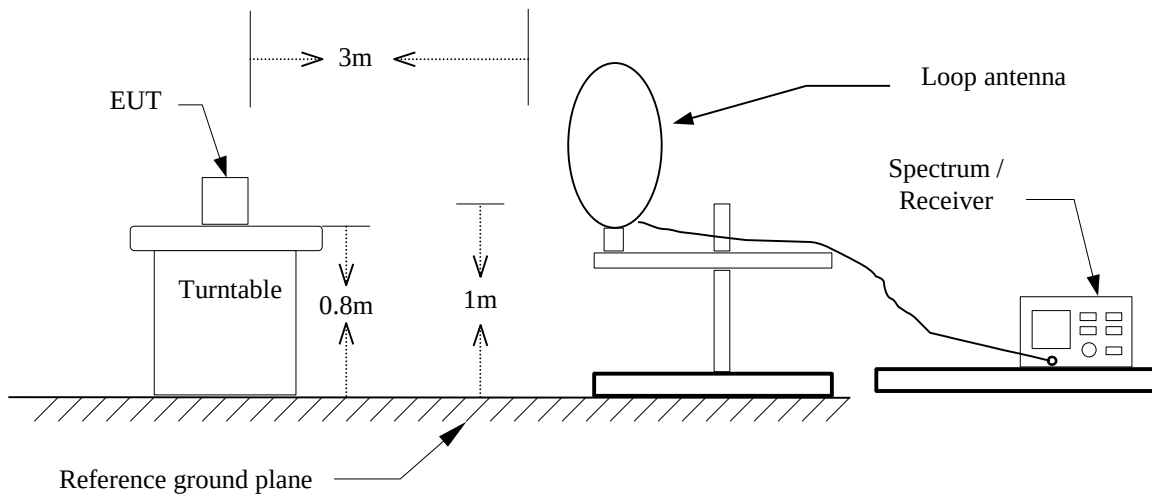


30MHz ~ 1GHz

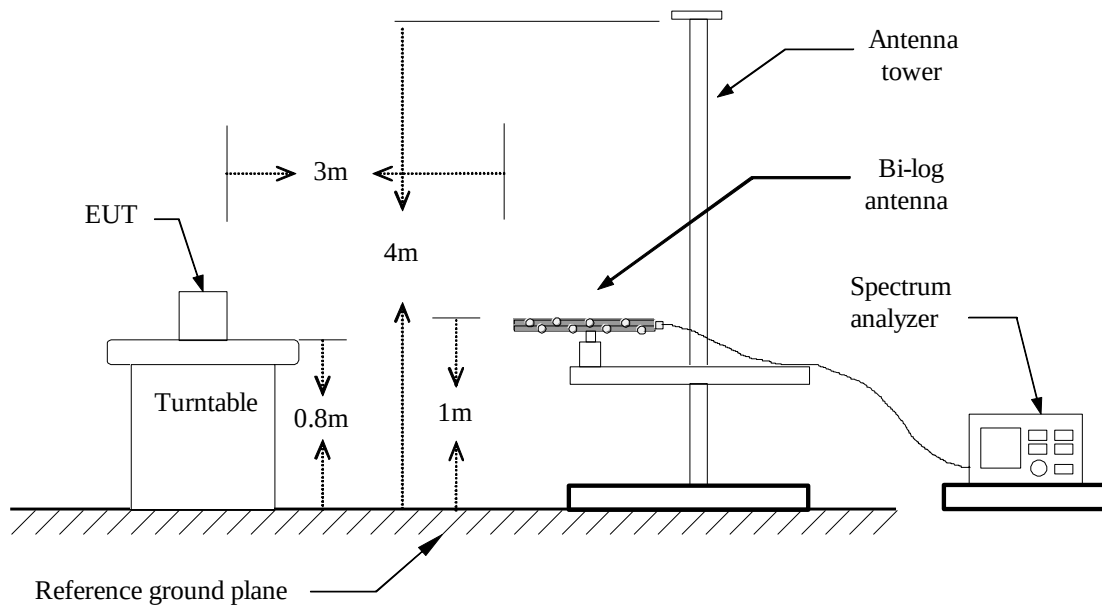

Report No.: T180627D11-RP2

Page: 32 / 56
Rev.: 02

Above 1 GHz

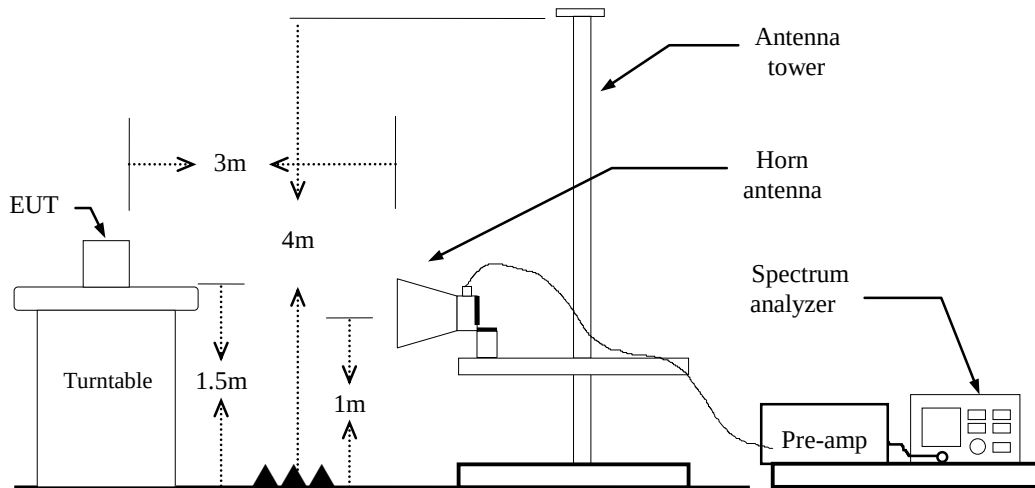


4.6.4 Test Result

Band Edge Test Data

For PIFA Antenna

Test Mode:	BLE Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

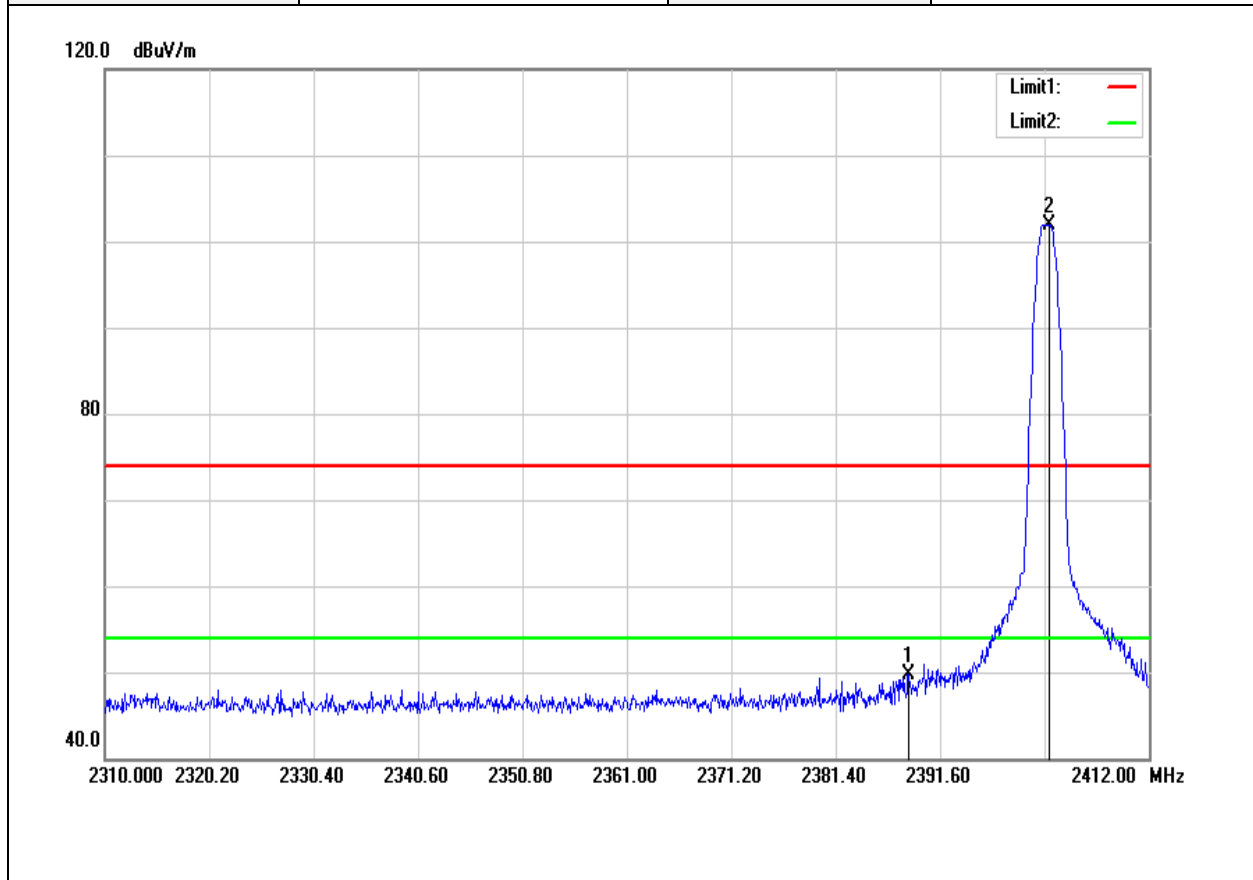


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	52.78	-2.98	49.80	74.00	-24.20	peak
2	2402.208	104.95	-2.95	102.00	-	-	peak



Report No.: T180627D11-RP2

Page: 34 / 56
Rev.: 02

Test Mode:	BLE Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

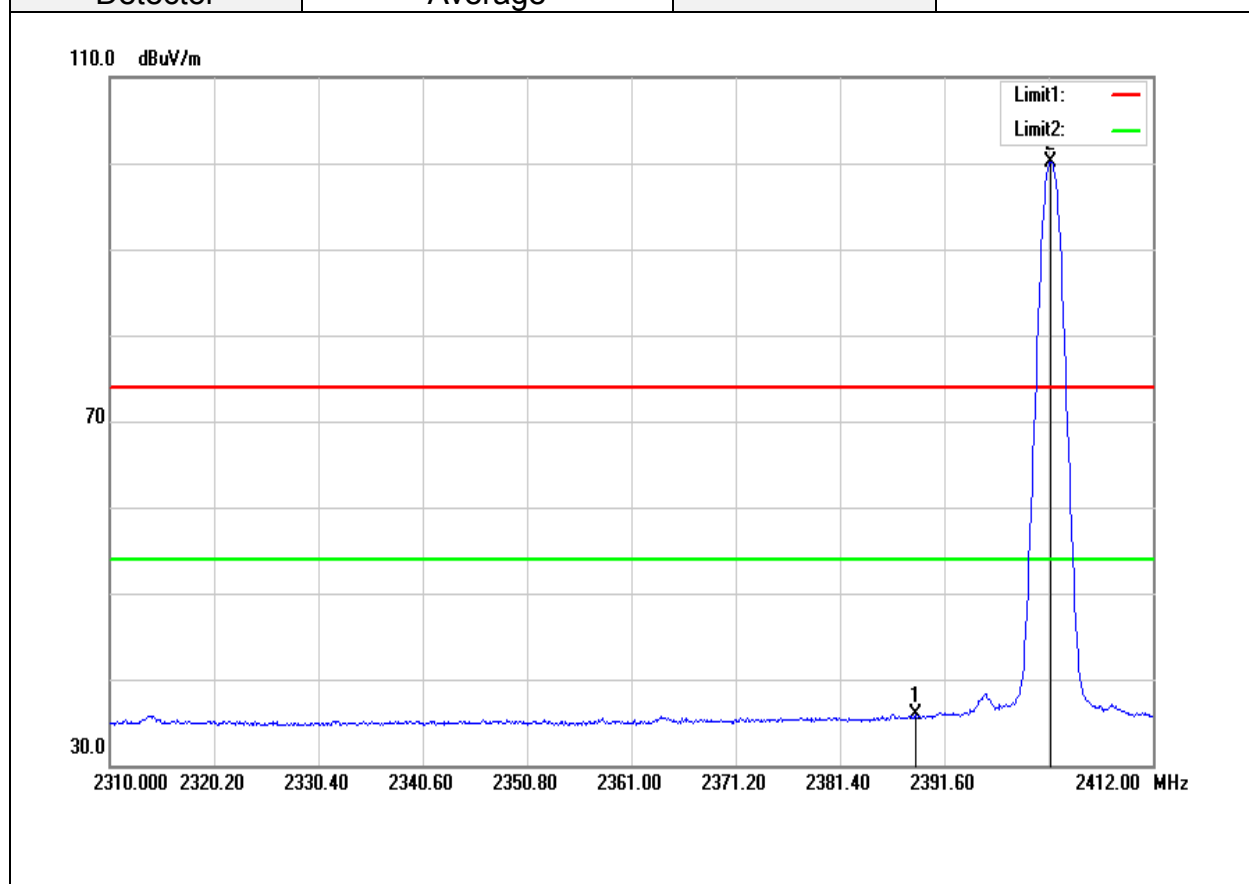


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.744	38.80	-2.98	35.82	54.00	-18.18	AVG
2	2402.004	103.14	-2.95	100.19	-	-	AVG



Report No.: T180627D11-RP2

Page: 35 / 56
Rev.: 02

Test Mode:	BLE High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

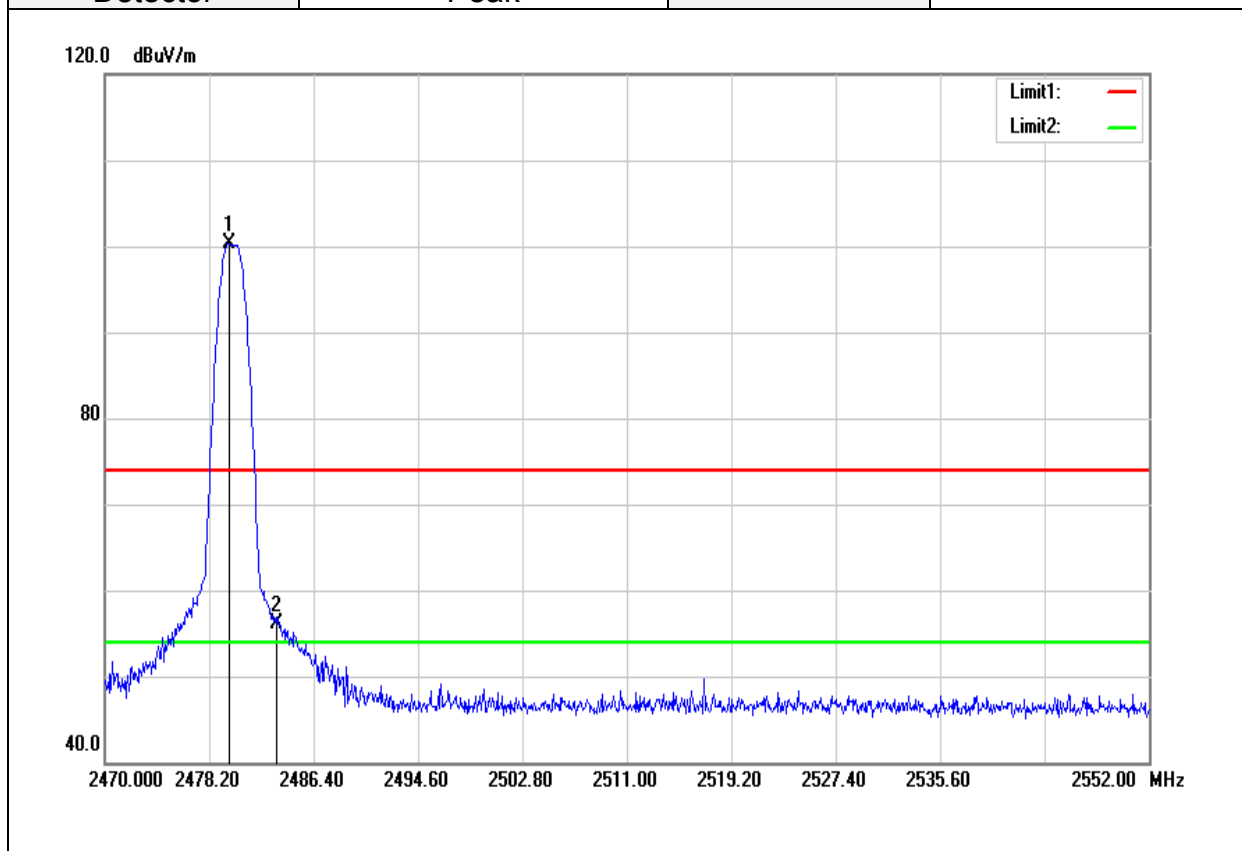


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.758	102.92	-2.70	100.22	-	-	peak
2	2483.500	58.78	-2.69	56.09	74.00	-17.91	peak



Report No.: T180627D11-RP2

Page: 36 / 56
Rev.: 02

Test Mode:	BLE High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

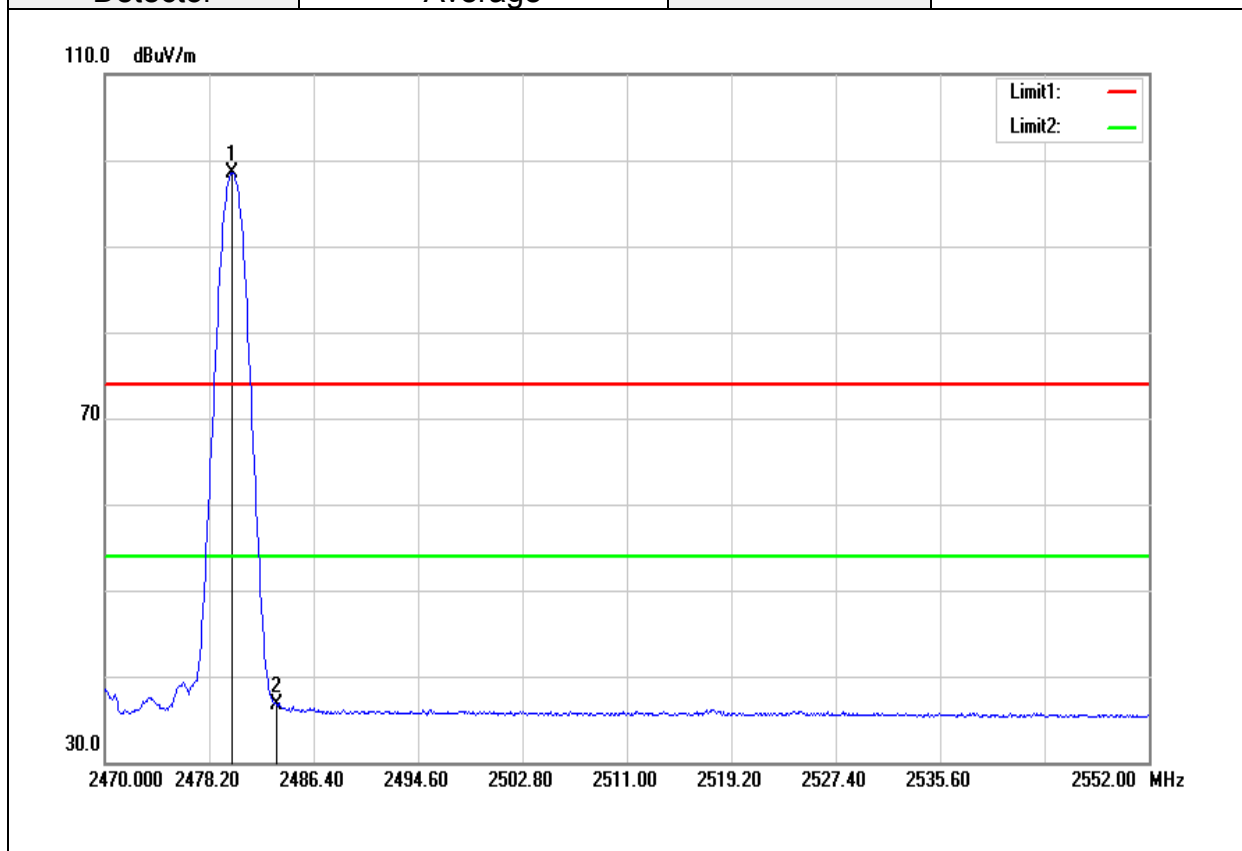

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	101.16	-2.70	98.46	-	-	AVG
2	2483.500	39.39	-2.69	36.70	54.00	-17.30	AVG




Report No.: T180627D11-RP2

Page: 37 / 56
Rev.: 02

Band Edge Test Data

For Dipole Antenna

Test Mode:	BLE Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

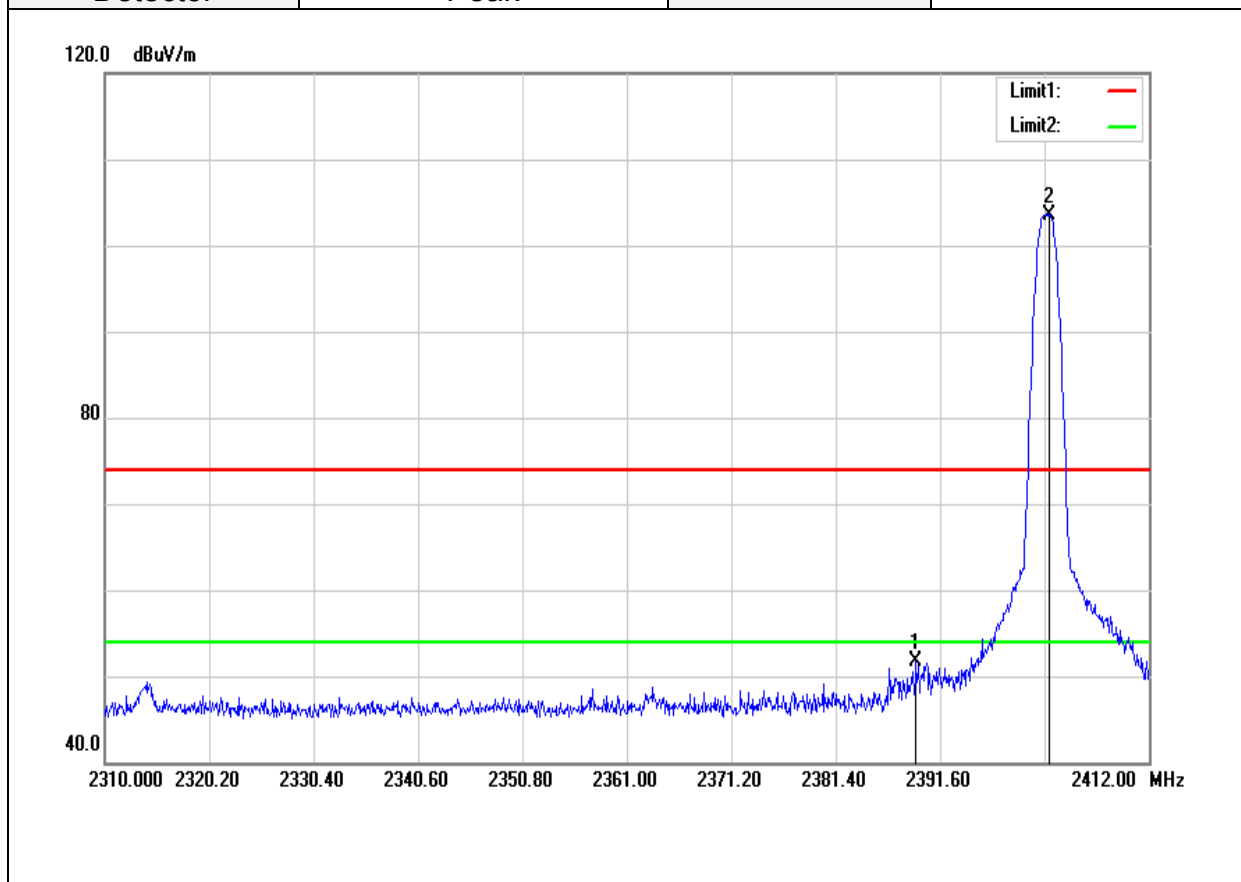


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.254	54.68	-2.98	51.70	74.00	-22.30	peak
2	2402.208	106.55	-2.95	103.60	-	-	peak



Report No.: T180627D11-RP2

Page: 38 / 56
Rev.: 02

Test Mode:	BLE Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

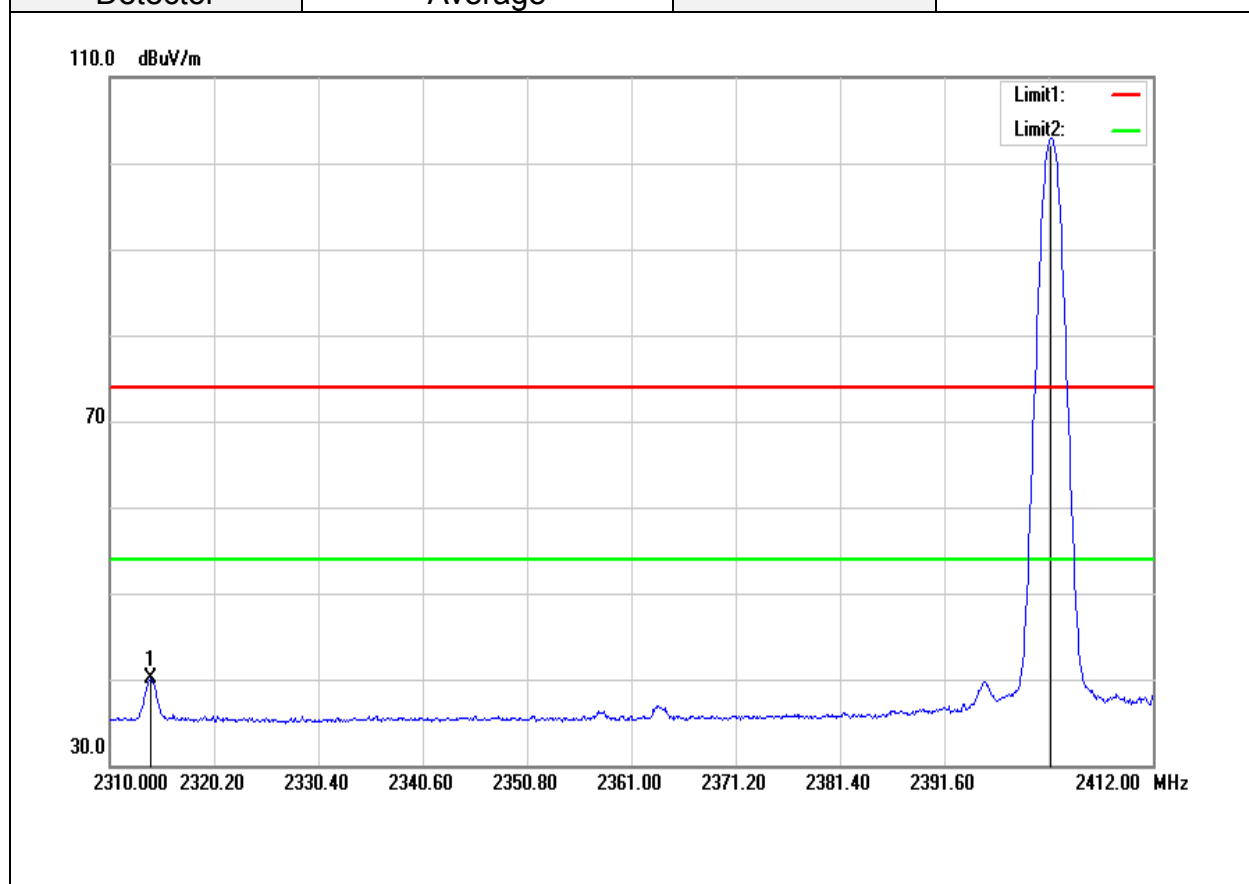


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2313.978	43.25	-3.22	40.03	54.00	-13.97	AVG
2	2402.004	105.85	-2.95	102.90	-	-	AVG



Report No.: T180627D11-RP2

Page: 39 / 56
Rev.: 02

Test Mode:	BLE High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

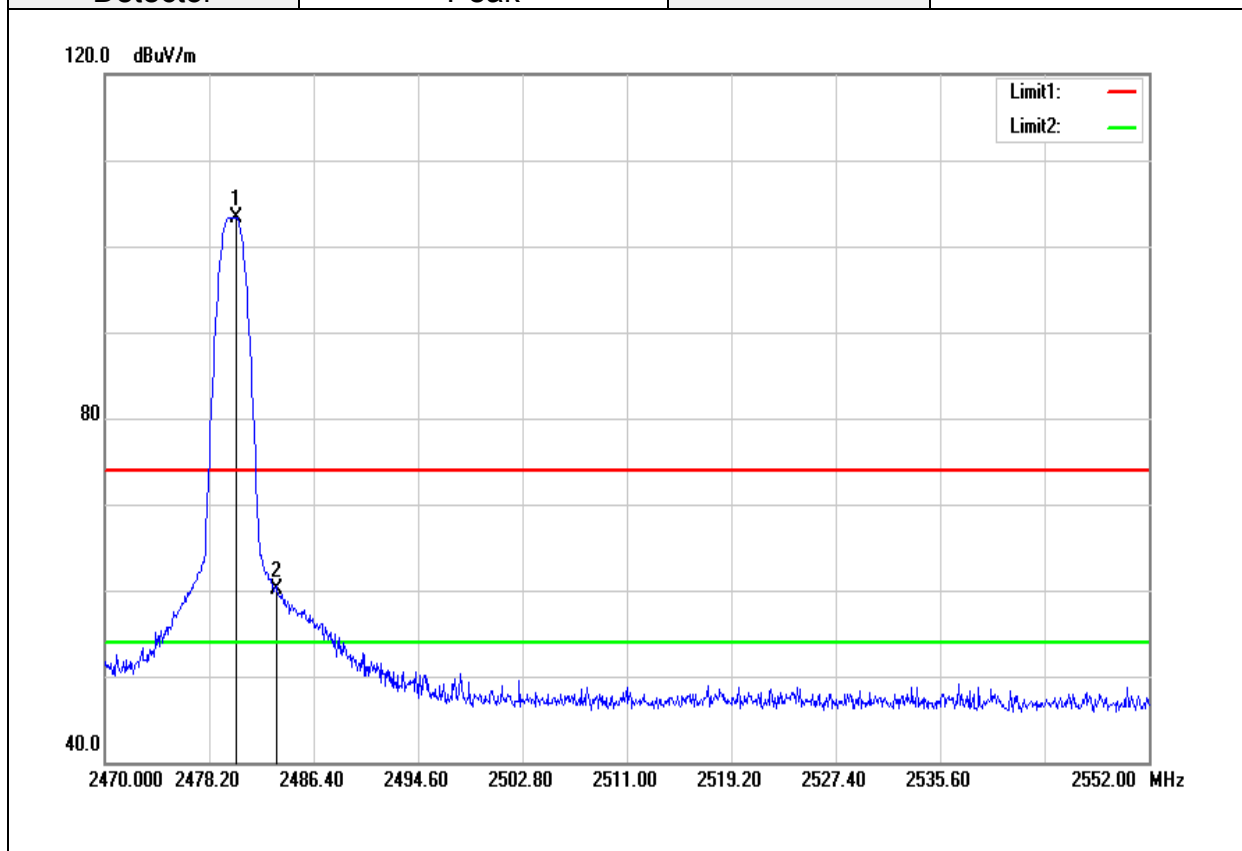


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.332	106.06	-2.70	103.36	-	-	peak
2	2483.500	62.81	-2.69	60.12	74.00	-13.88	peak



Report No.: T180627D11-RP2

Page: 40 / 56
Rev.: 02


Test Mode:	BLE High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

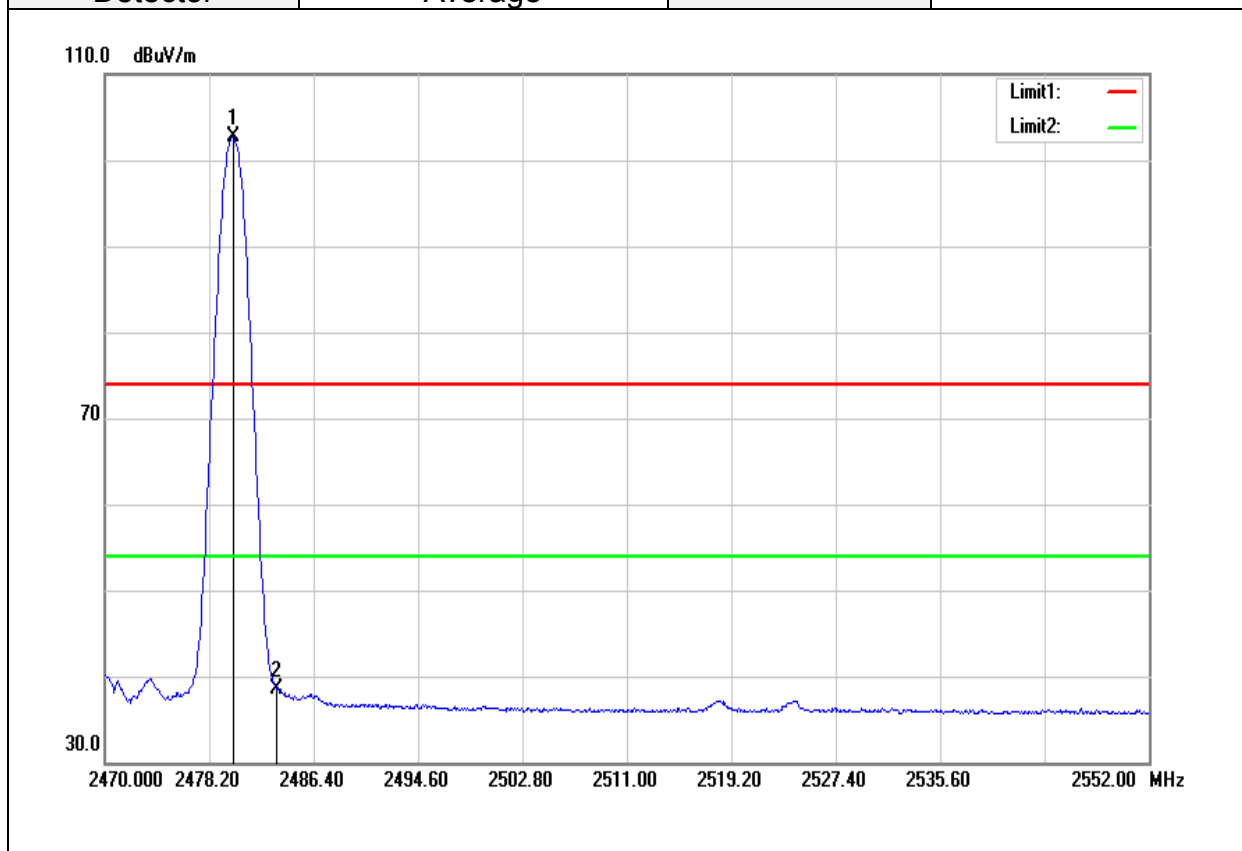

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.086	105.33	-2.70	102.63	-	-	peak
2	2483.500	41.18	-2.69	38.49	54.00	-15.51	peak

Above 1G Test Data
For PIFA Antenna

Test Mode:	BLE Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

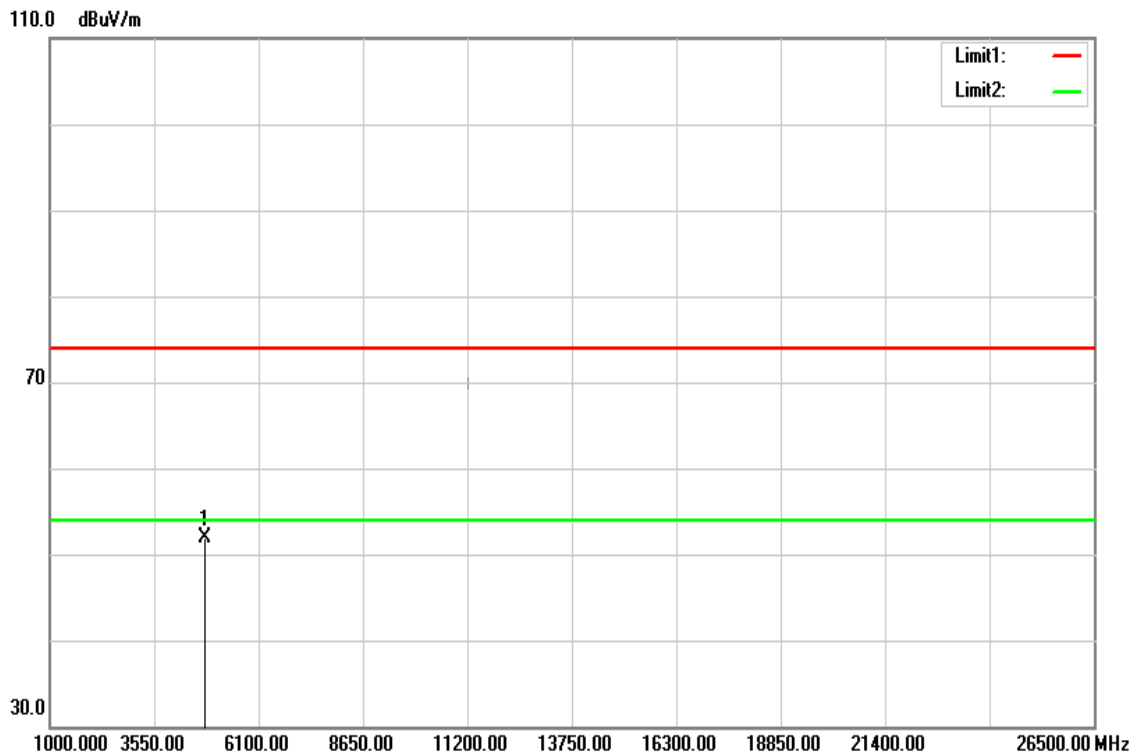


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4806.000	47.51	4.35	51.86	74.00	-22.14	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	BLE Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

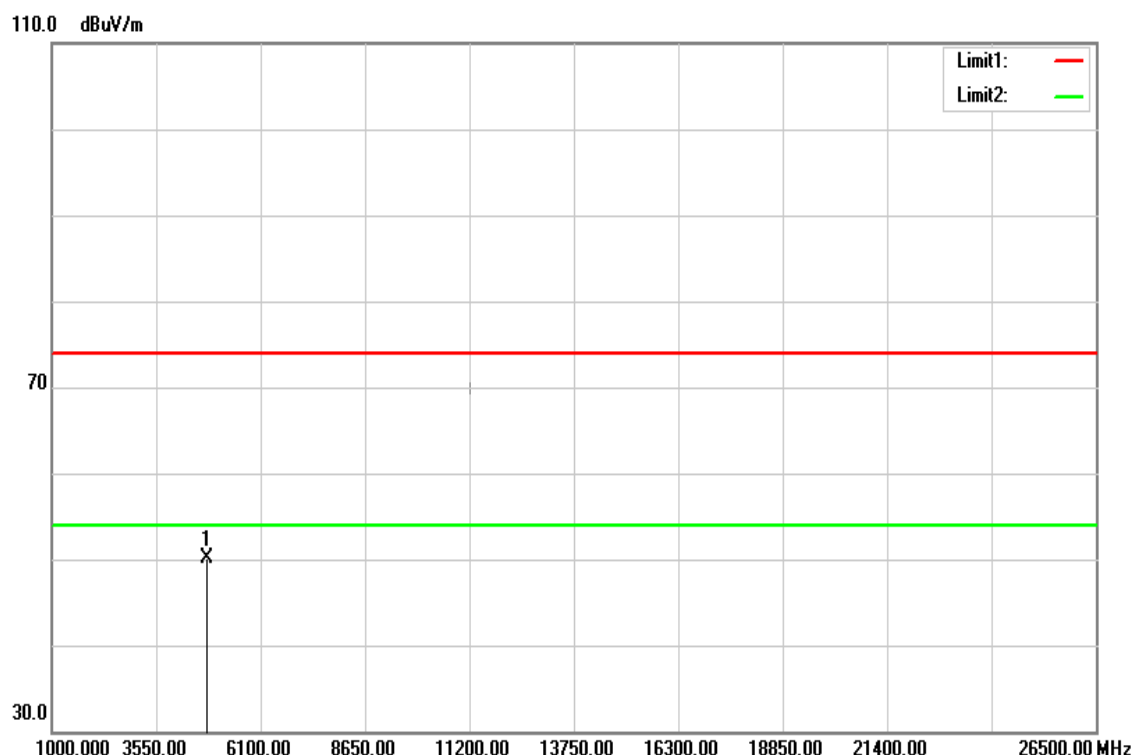

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP2

Page: 43 / 56
Rev.: 02

Test Mode:	BLE Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

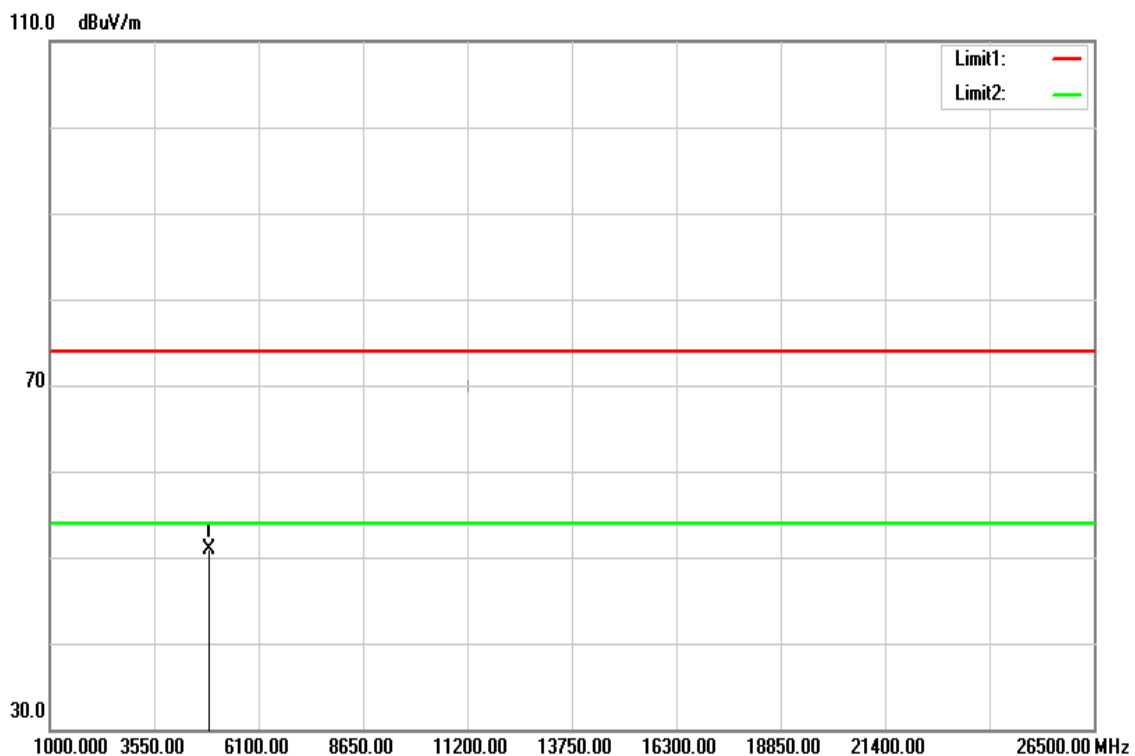

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	46.45	4.49	50.94	74.00	-23.06	peak
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP2

Page: 44 / 56
Rev.: 02

Test Mode:	BLE Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

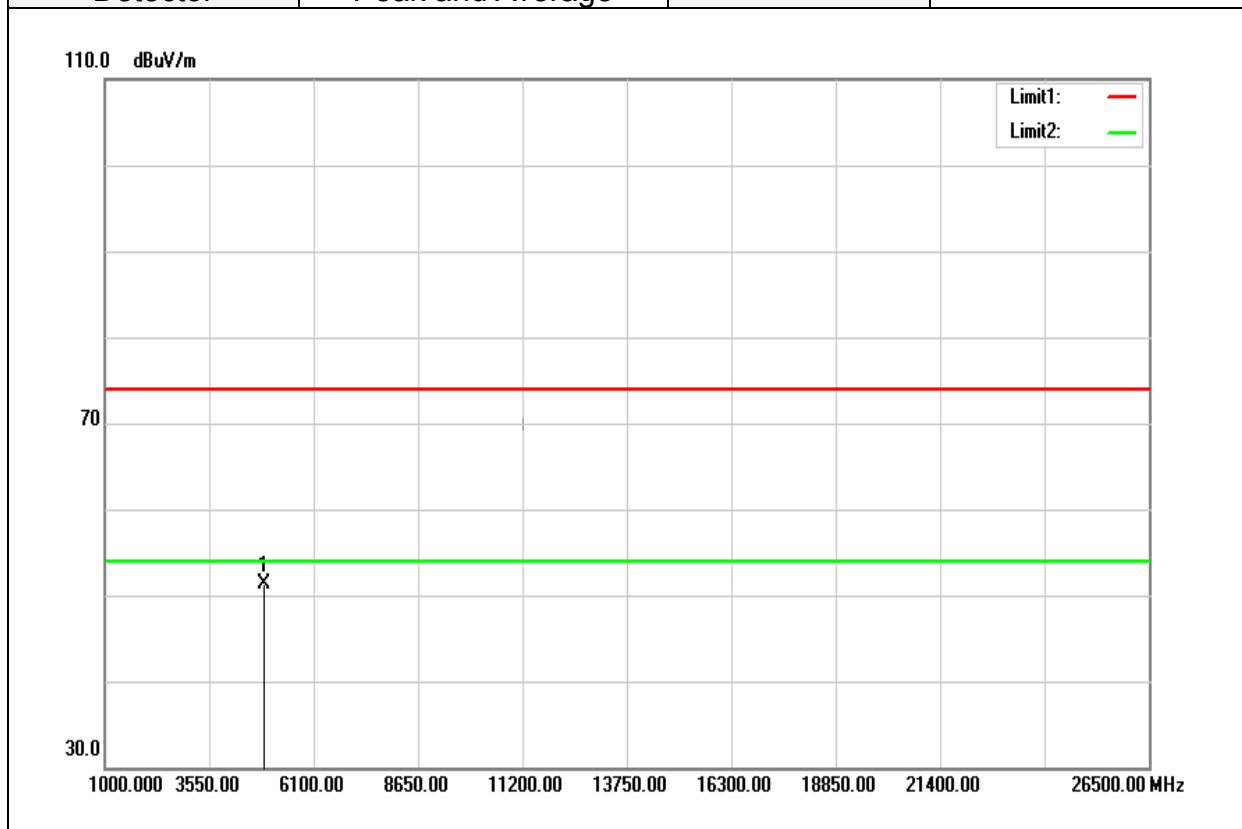

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	46.86	4.49	51.35	74.00	-22.65	peak
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP2

Page: 45 / 56
Rev.: 02

Test Mode:	BLE High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

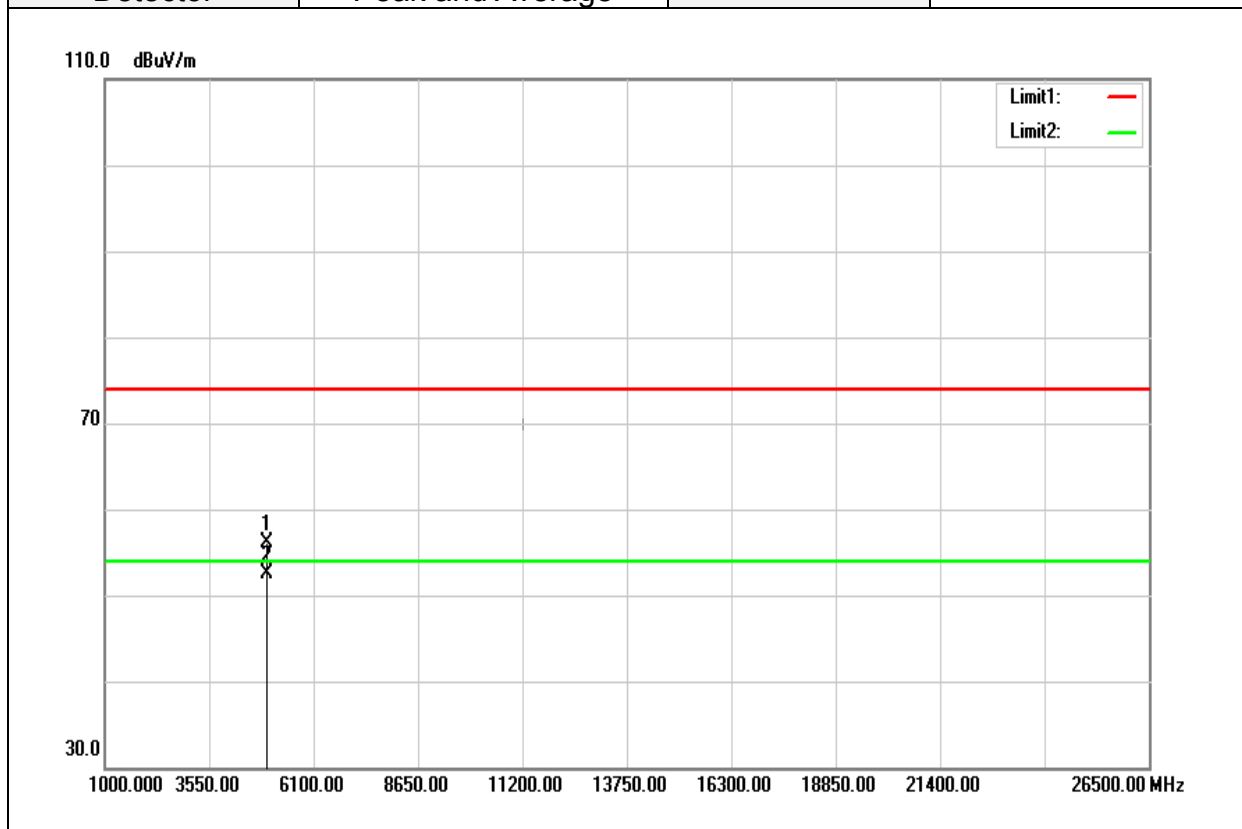


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	51.48	4.61	56.09	74.00	-17.91	peak
4960.000	47.80	4.61	52.41	54.00	-1.59	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	BLE High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

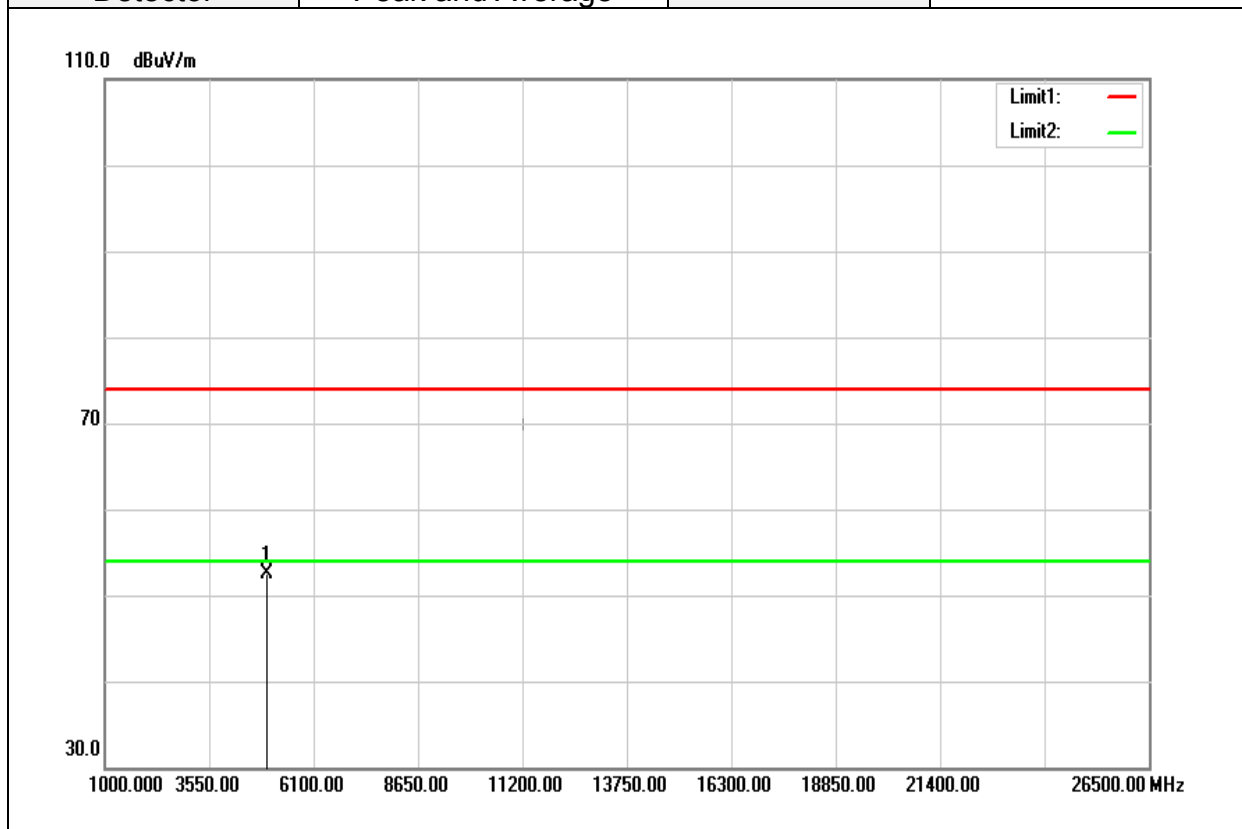


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	47.93	4.61	52.54	74.00	-21.46	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit


Below 1G Test Data

Test Mode:	BT Mode	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-peak		

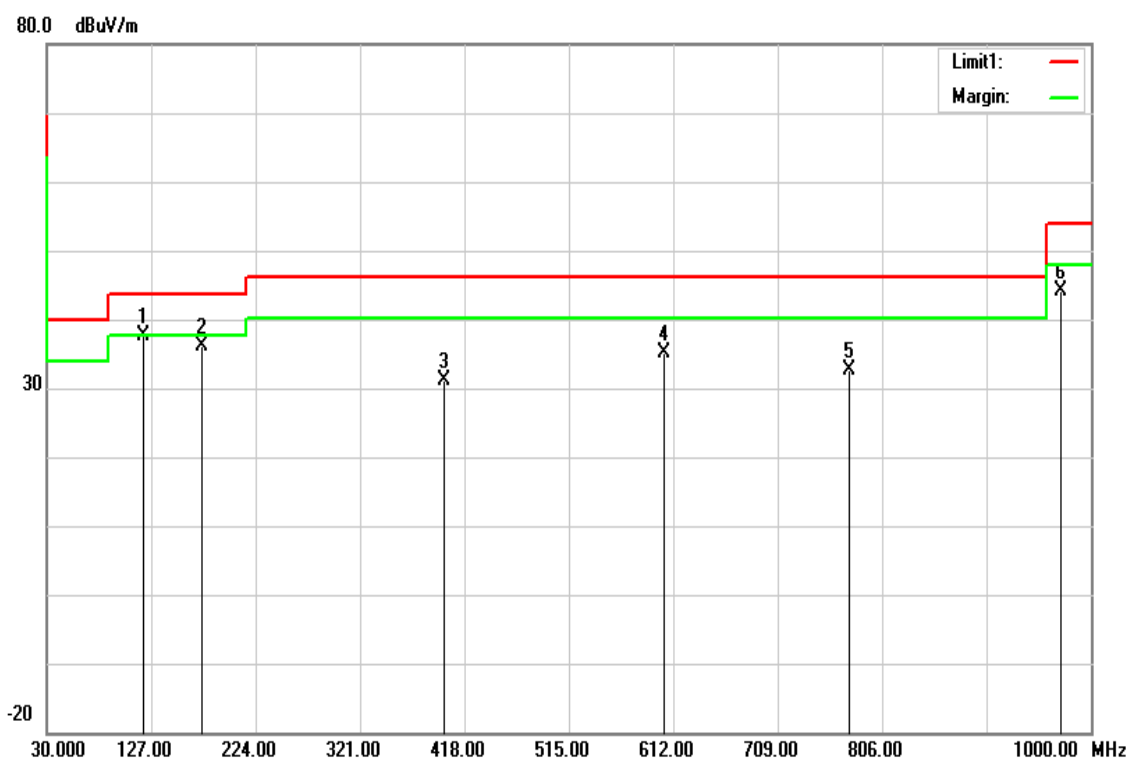

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
119.2400	46.66	-9.05	37.61	43.52	-5.91	peak
174.5300	46.82	-10.78	36.04	43.52	-7.48	peak
399.5700	36.35	-5.30	31.05	46.02	-14.97	peak
603.2700	36.11	-1.03	35.08	46.02	-10.94	peak
774.9600	30.54	2.21	32.75	46.02	-13.27	peak
971.8700	38.67	5.50	44.17	54.00	-9.83	peak


Test Mode:	BT Mode	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-peak		

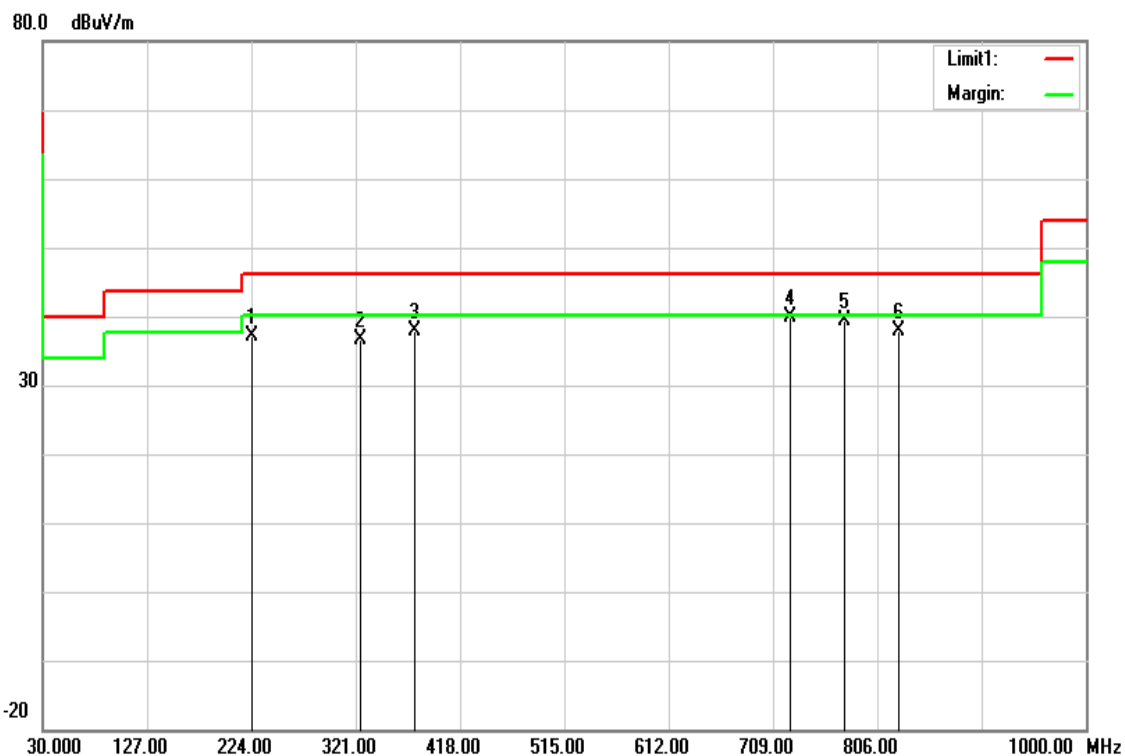

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
224.9700	48.20	-10.97	37.23	46.02	-8.79	peak
324.8800	44.02	-7.38	36.64	46.02	-9.38	peak
375.3200	43.98	-6.02	37.96	46.02	-8.06	peak
724.5200	38.59	1.35	39.94	46.02	-6.08	peak
774.9600	37.05	2.21	39.26	46.02	-6.76	QP
825.4000	34.76	3.04	37.80	46.02	-8.22	peak

Above 1G Test Data**For Dipole Antenna**

Test Mode:	BLE Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

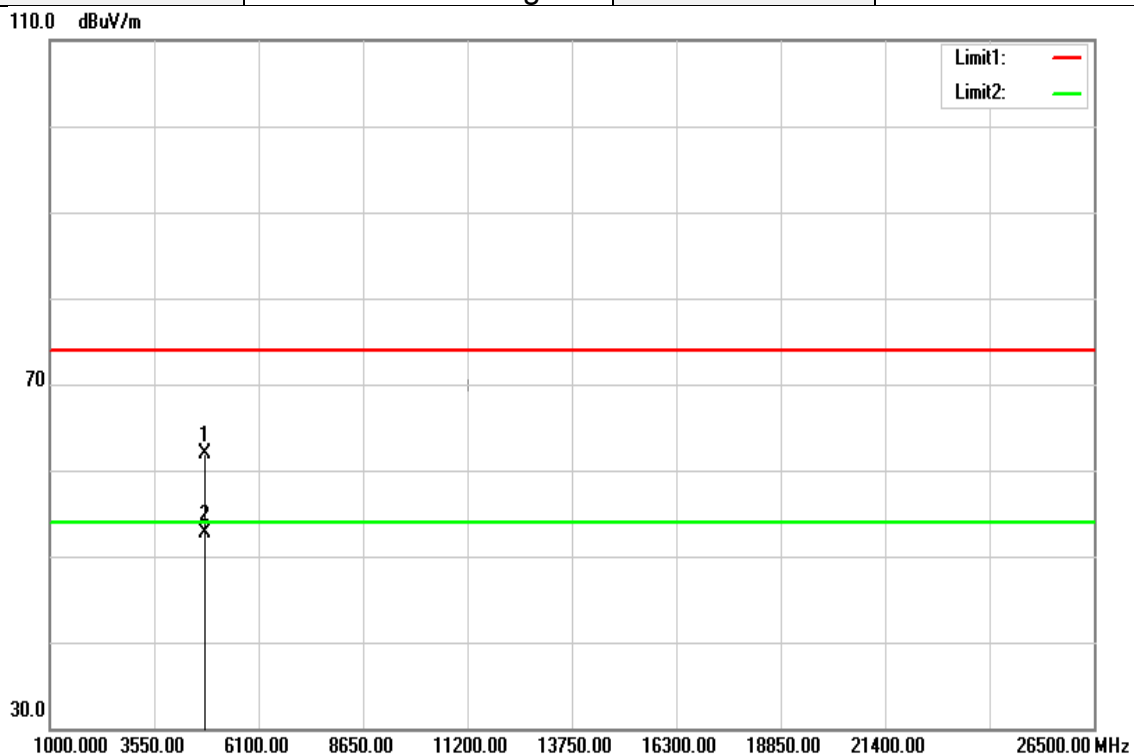

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4806.000	57.48	4.35	61.83	74.00	-12.17	peak
4806.000	48.44	4.35	52.79	54.00	-1.21	AVG
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP2

Page: 50 / 56
Rev.: 02

Test Mode:	BLE Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

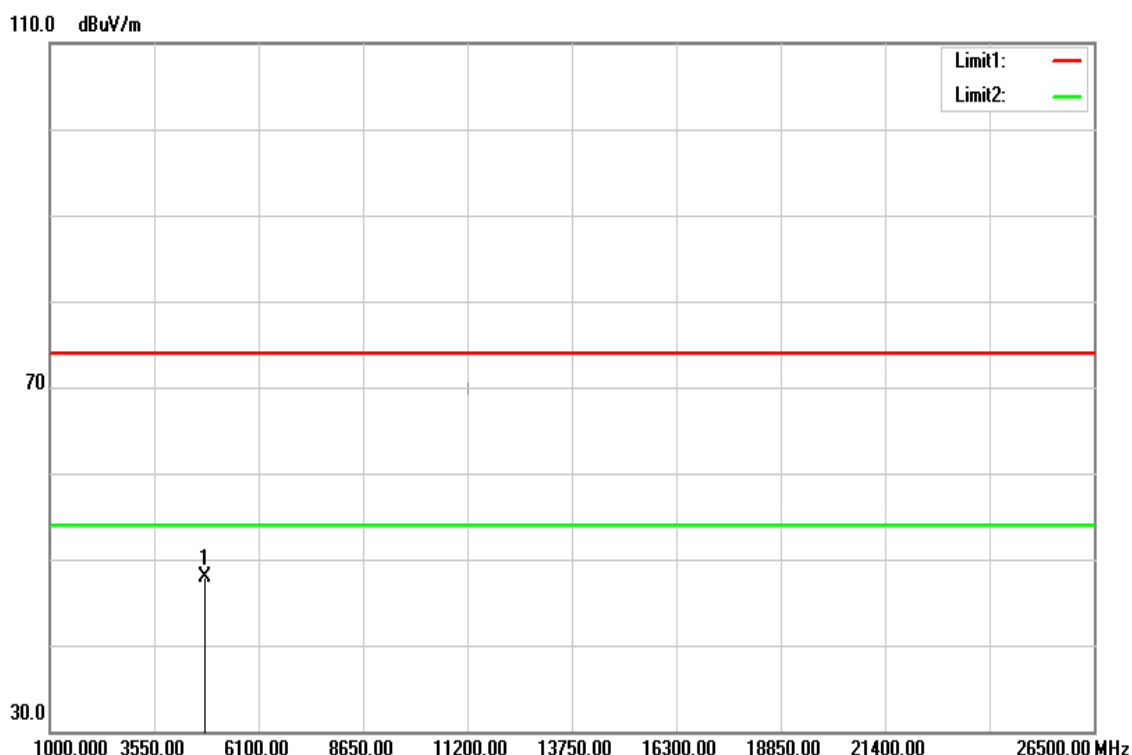


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4806.000	43.49	4.35	47.84	74.00	-26.16	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	BLE Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

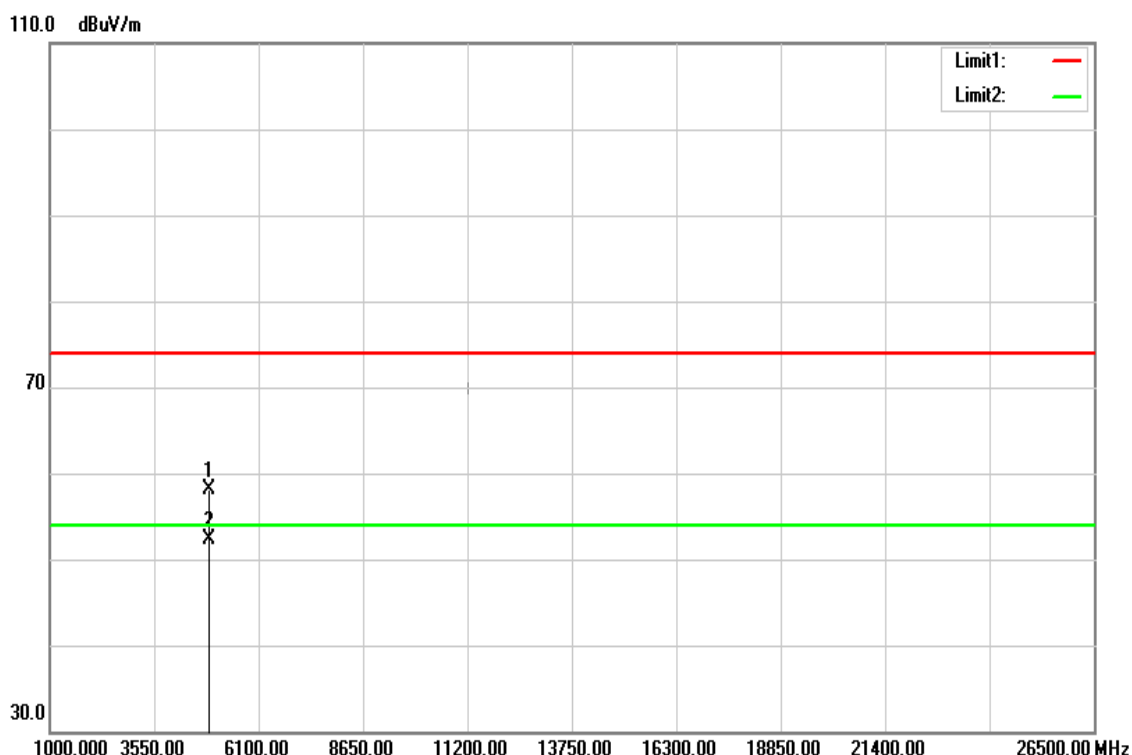


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	53.67	4.49	58.16	74.00	-15.84	peak
4883.000	47.80	4.49	52.29	54.00	-1.71	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	BLE Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

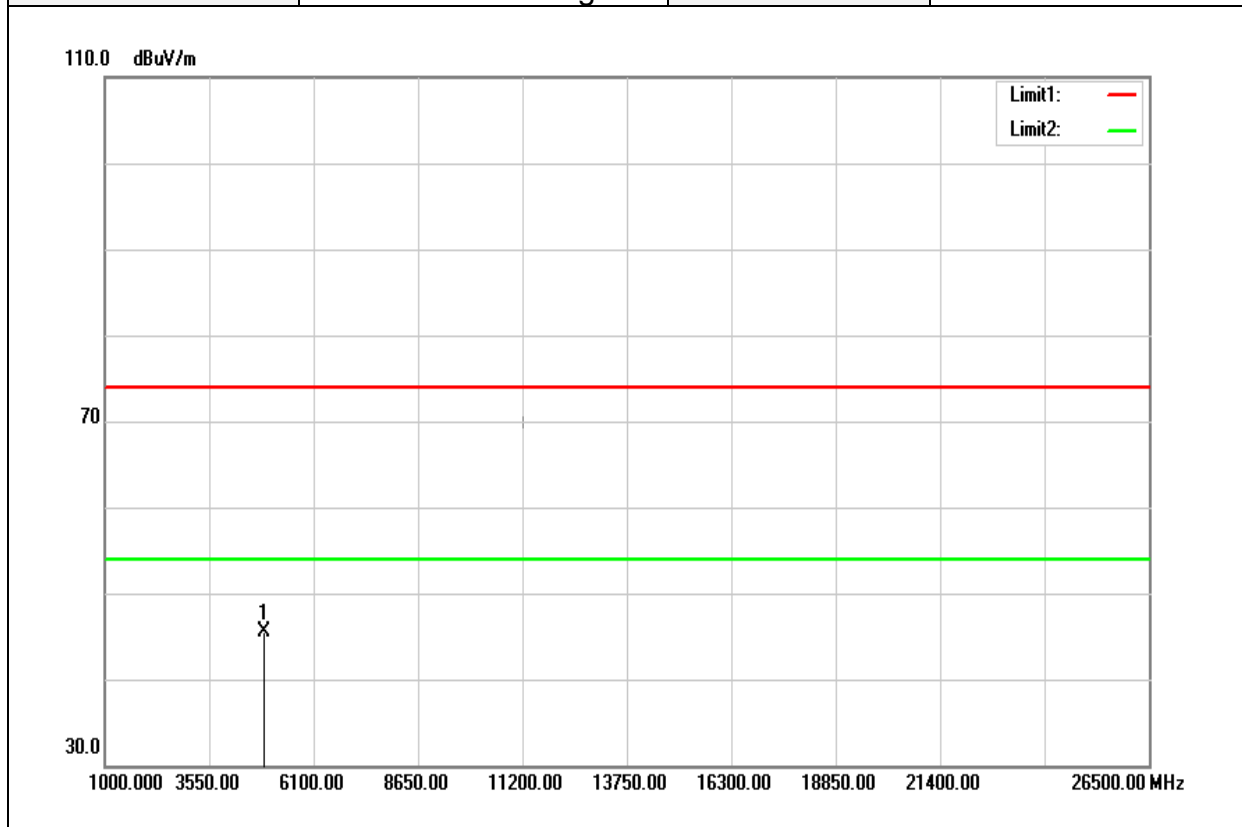

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	40.92	4.49	45.41	74.00	-28.59	peak
N/A						

Remark:


- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP2

Page: 53 / 56
Rev.: 02

Test Mode:	BLE High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

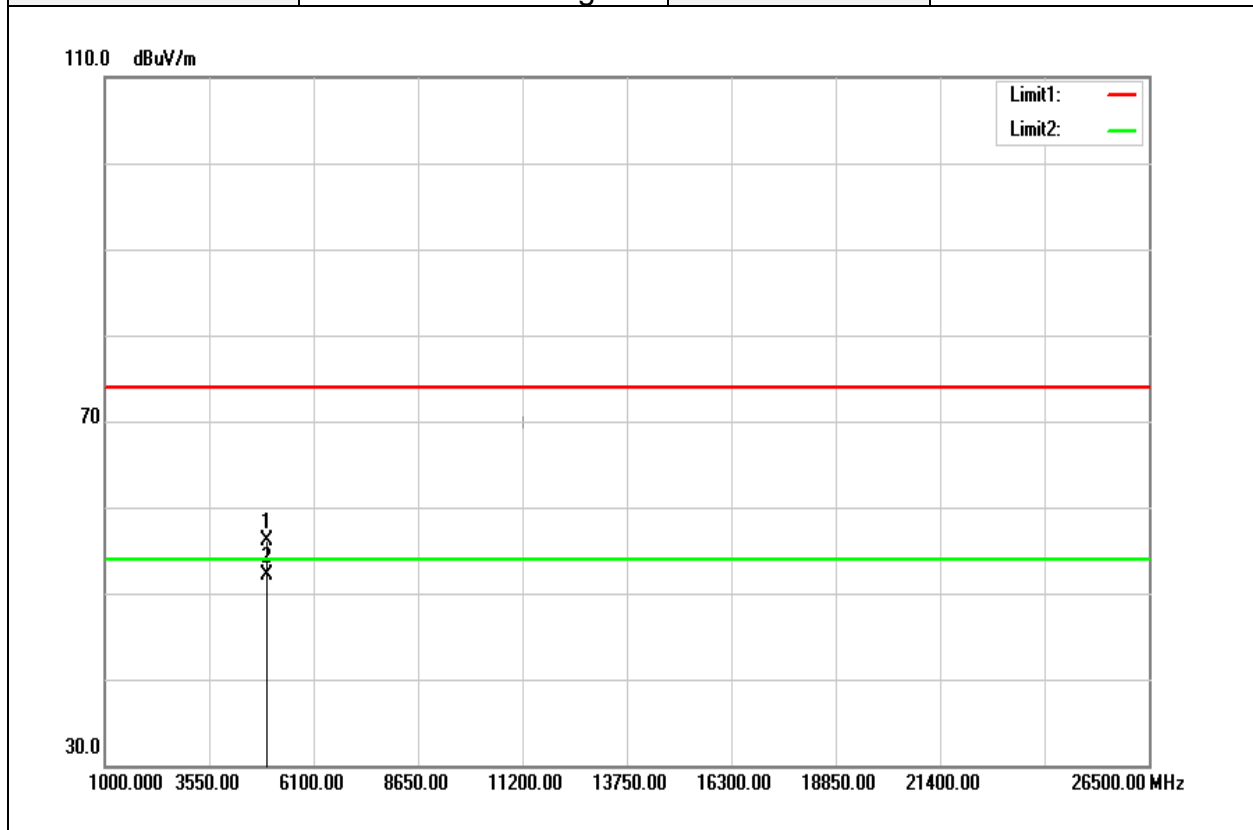

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	51.56	4.61	56.17	74.00	-17.83	peak
4960.000	47.44	4.61	52.05	54.00	-1.95	AVG
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP2

Page: 54 / 56
Rev.: 02

Test Mode:	BLE High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

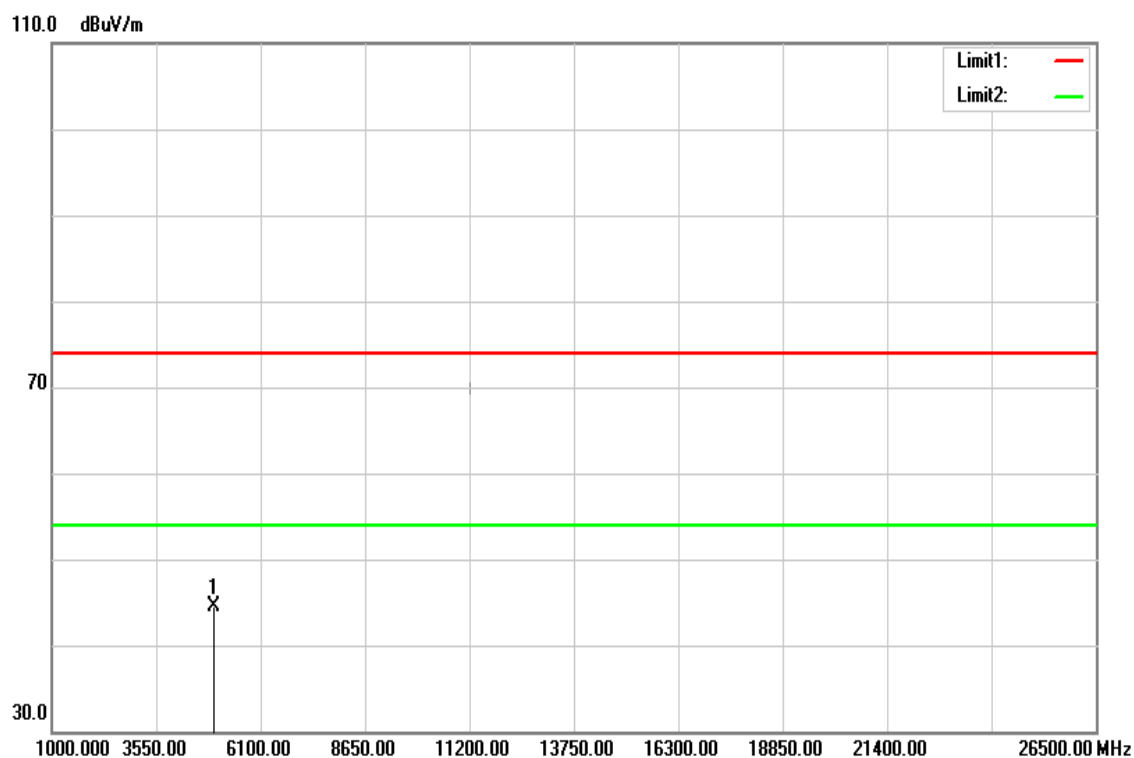


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	39.97	4.61	44.58	74.00	-29.42	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Below 1G Test Data

Test Mode:	BT Mode	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-peak		

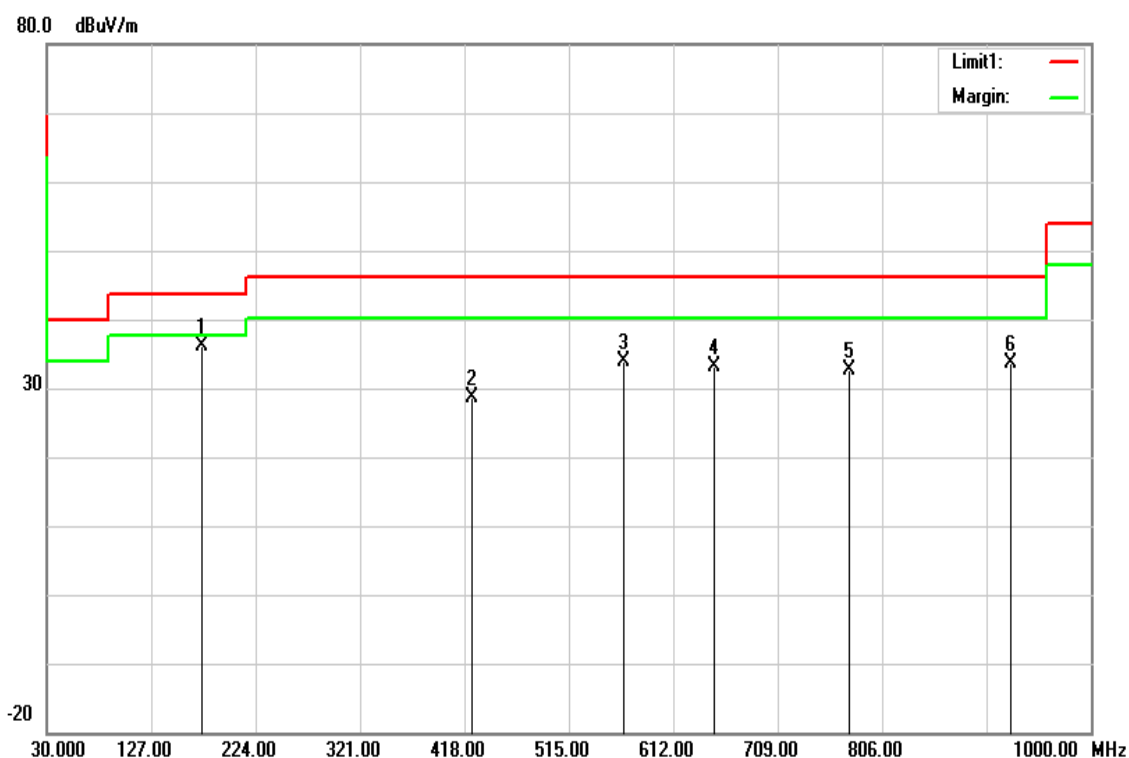


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
174.5300	47.00	-10.78	36.22	43.52	-7.30	peak
424.7900	33.21	-4.51	28.70	46.02	-17.32	peak
565.4400	35.37	-1.56	33.81	46.02	-12.21	peak
649.8300	32.89	0.35	33.24	46.02	-12.78	peak
774.9600	30.38	2.21	32.59	46.02	-13.43	peak
925.3100	28.83	4.76	33.59	46.02	-12.43	peak



Report No.: T180627D11-RP2

Page: 56 / 56
Rev.: 02

Test Mode:	BT Mode	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-peak		

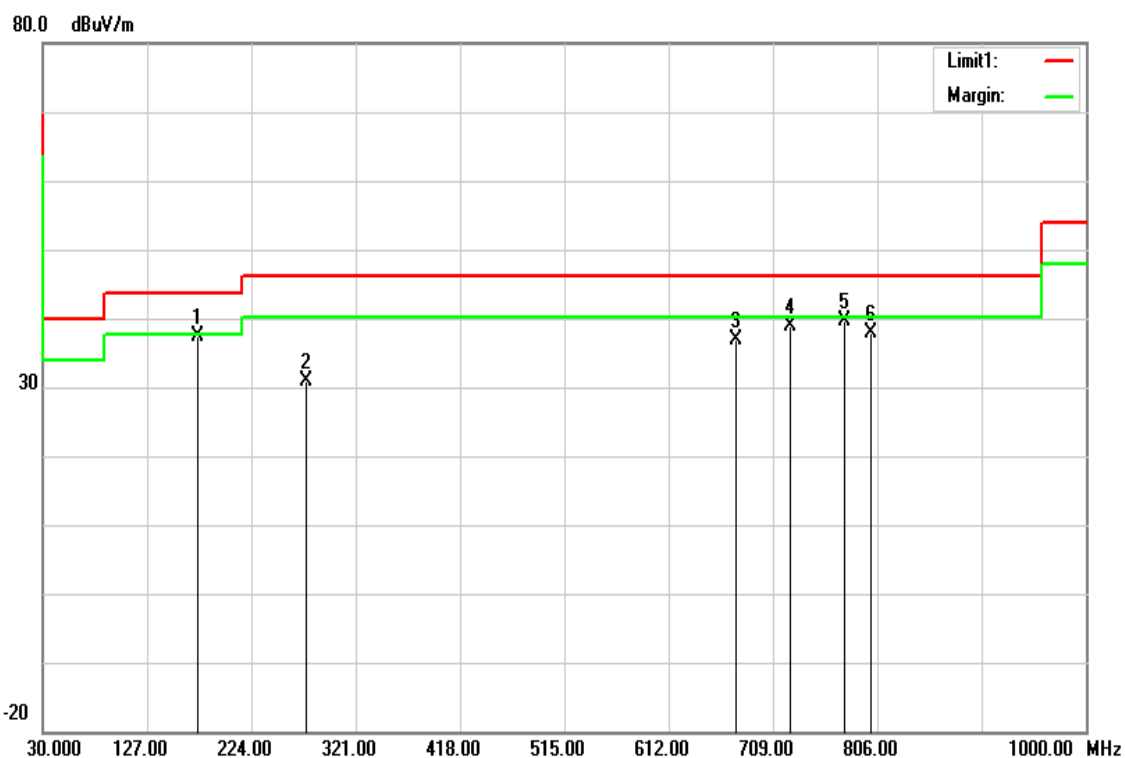

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
174.5300	48.18	-10.78	37.40	43.52	-6.12	peak
275.4100	39.35	-8.49	30.86	46.02	-15.16	peak
675.0500	36.32	0.68	37.00	46.02	-9.02	peak
724.5200	37.57	1.35	38.92	46.02	-7.10	peak
774.9600	37.50	2.21	39.71	46.02	-6.31	peak
800.1800	35.09	2.72	37.81	46.02	-8.21	peak

--End of Report--