

Features

- ✦ Frequency Range: 902~928MHz
- ✦ Quite good VSWR
- ✦ Max Gain: 2.3dBi
- ✦ High efficiency
- ✦ Vertically polari


Specifications

Model		KRAKBJ2701C01A
Electrical Specifications	Frequency Range	902MHz~928MHz
	Peak Gain	2.3 dBi
	VSWR	≤ 1.5
	Efficiency	>80%
	Feed Impedance	50 Ohms
	Polarization	Vertical

Mechanical Specifications	Cover material(color)	Plastic(White)
	Interface	RPSMA
	Dimensions (mm)	Φ13.0mm x 198.0mm
	Operation Temp (°C)	-30°C ~ +75°C
	Humidity range	5%~95%

S11&VSWR





Frequency(MHz)	S11	VSWR
902MHz	-18.3	1.28
928MHz	-14.6	1.46

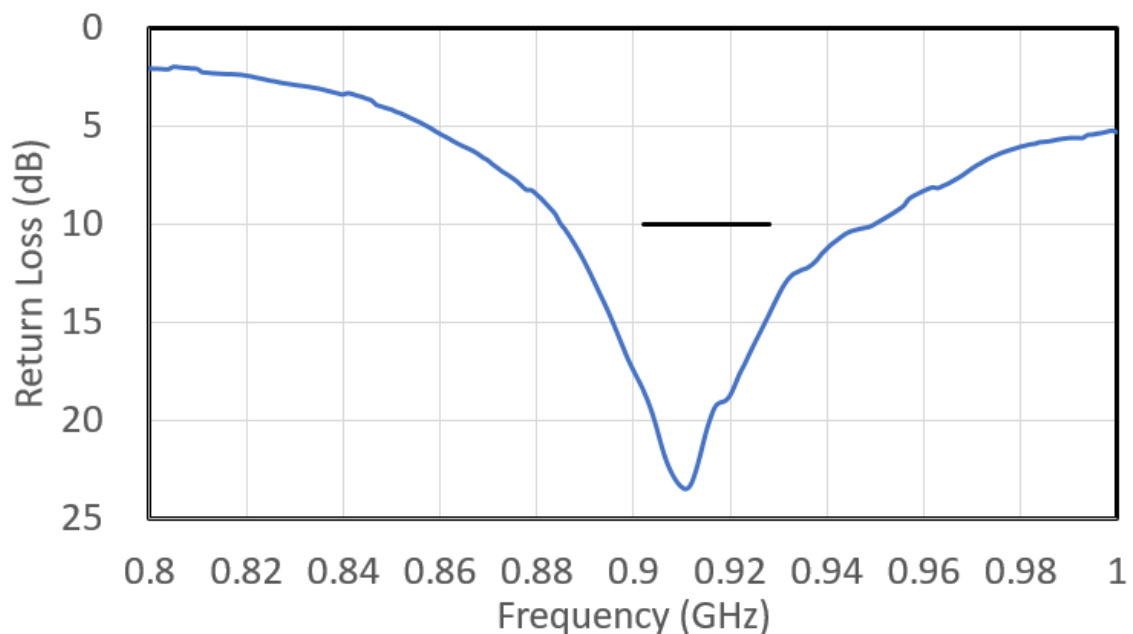

Peak Gain & Efficiency

Frequency(MHz)	Peak Gain (dBi)	Efficiency (%)
902	2.3	82.6
904	2.2	82.3
906	2.2	82.7
908	2.3	84.0
910	2.3	85.0
912	2.3	85.7
914	2.3	86.0
916	2.2	86.1
918	2.2	85.9
920	2.2	86.0
922	2.2	86.4
924	1.9	85.9
926	1.9	85.1
928	2.1	85.5
Average	-	84.9

Radiation Patterns

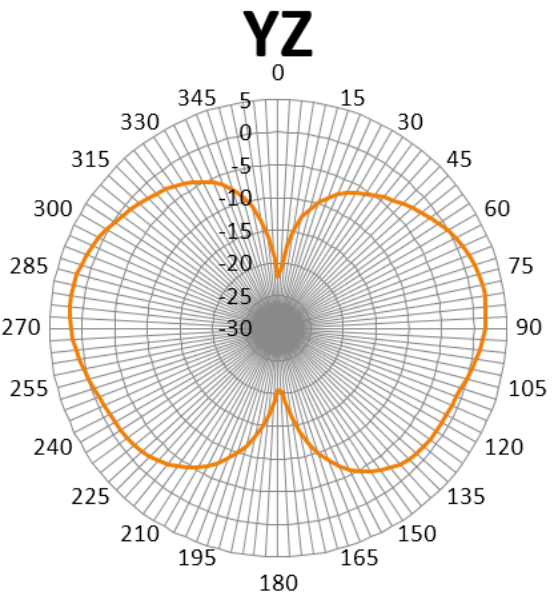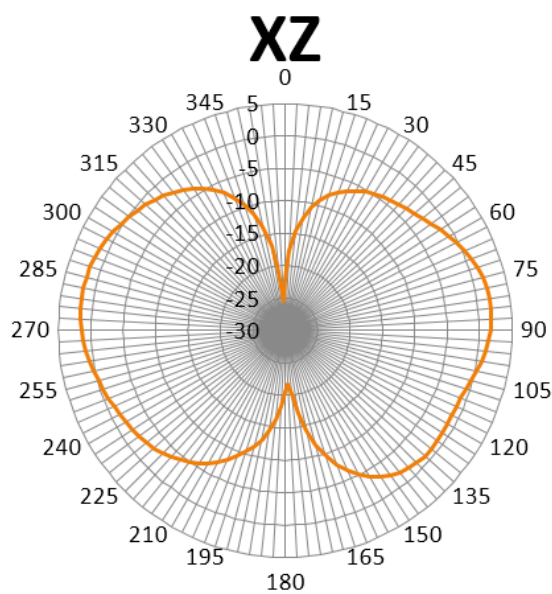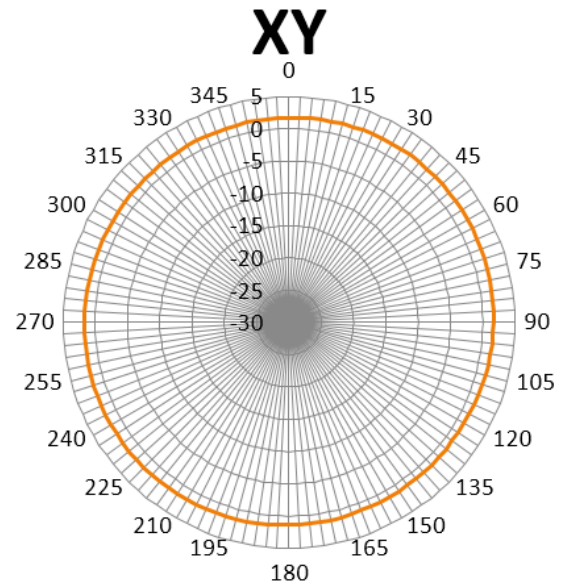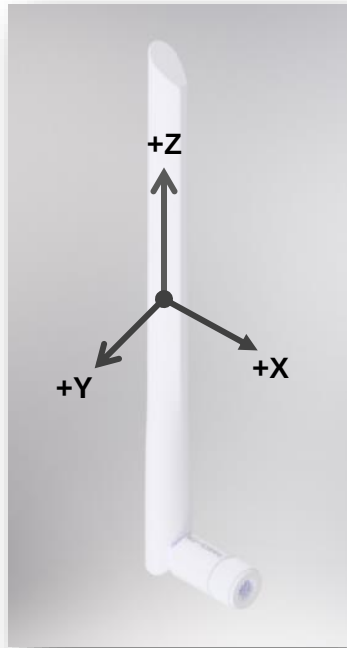

Mechanical Specifications