

Date : 2017-03-31 Page 1 of 76 No. : DM126786

Applicant: Whalen LLC dba Whalen Furniture Manufacturing

1578 Air Wing Road, San Diego, CA 92154

Supplier / Manufacturer : Whalen LLC dba Whalen Furniture Manufacturing

1578 Air Wing Road, San Diego, CA 92154

Description of Sample(s): Submitted sample(s) said to be

Product: Bluetooth Speaker

Brand Name: N/A Model No.: BL-03

FCC ID: 2AAHD-BL03

Date Samples Received: 2017-03-08

Date Tested : 2017-03-10 to 2017-03-31

Investigation Requested : Perform ElectroMagnetic Interference measurement in accordance

with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and

ANSI C63.10:2013 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of Federal

Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described

above and on Section 2.2 in this Test Report.

Remarks : Bluetooth FHSS (GFSK/ π /4-DQPSK)



ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited



Date No.	: 2017-03-31 : DM126786	Page 2 of 76
CONT	TENT:	
	Cover Content	Page 1 of 76 Page 2 of 76
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 3 of 76
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 76
1.3	Date of Order	Page 3 of 76
1.4	Submitted Sample(s)	Page 3 of 76
1.5	Test Duration	Page 3 of 76
1.6	Country of Origin	Page 3 of 76
1.7	RF Module Details	Page 4 of 76
1.8	Antenna Details	Page 4 of 76
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 76
2.2	Test Standards and Results Summary	Page 5 of 76
2.3	Table for Test Modes	Page 6 of 76
<u>3.0</u>	Test Results	
3.1	Emission	Page 7-72 of 76
Appen List of	Idix A Measurement Equipment	Page 73 of 76
Appen Photog	raph(s) of Product	Page 74-76 of 76



Date : 2017-03-31 Page 3 of 76

No. : DM126786

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited

EMC Laboratory

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product: Bluetooth Speaker

Manufacturer: Whalen LLC dba Whalen Furniture Manufacturing

1578 Air Wing Road, San Diego, CA 92154

Brand Name: N/A Model Number: BL-03

Rating: Input: 100-240Va.c. 50/60Hz 0.8A;

Output: 12Vd.c. 2A.

The AC/DC adaptor was provided by the applicant with following details:

Brand name: N/A; Model no.: RS-AB02J00

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Bluetooth Speaker. The transmission signal is digital modulated with channel frequency range 2402-2480MHz. The R.F. signal was modulated by IC; the type of modulation used was frequency hopping spread spectrum Modulation.

1.3 Date of Order

2017-03-08

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2017-03-10 to 2017-03-31

1.6 Country of Origin

China



Date : 2017-03-31 Page 4 of 76

No. : DM126786

1.7 RF Module Details

Module Model Number: AC4602 Module FCC ID: N/A

Module Transmission Type: Bluetooth V2.1+EDR

Modulation: FHSS (GFSK / π /4-DQPSK)

Data Rates: 1MBps: GFSK

2 MBps: $\pi/4$ -DQPSK

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: Meander line antenna

Antenna Gain: 3.3dB



Date : 2017-03-31 Page 5 of 76

No. : DM126786

<u>2.0</u> Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10:2013 for FCC Certification. According FCC KDB 558074 DTS Measurement Guidance, Duty cycle \geq 98%. The device was realized by test software.

2.2 Test Standards and Results Summary Tables

EMISSION								
Results Summary								
Test Condition	ndition Test Requirement Test Method Class / Test Result							
			Severity	Pass	Failed	N/A		
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	ANSI C63.10: 2013	N/A					
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A					
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A	\boxtimes				
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	ANSI C63.10: 2013	N/A	\boxtimes				
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	ANSI C63.10: 2013	N/A	\boxtimes				
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	ANSI C63.10: 2013	N/A	\boxtimes				
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	ANSI C63.10: 2013	N/A					
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A					
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	ANSI C63.10: 2013	N/A					
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	\boxtimes				

Note: N/A - Not Applicable



Date: 2017-03-31 Page 6 of 76

No. : DM126786

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK	1MBps / 2MBps	
Hopping Channel Separation	GFSK / π/4-DQPSK	1MBps / 2MBps	
Number of Hopping Frequency	GFSK / π/4-DQPSK	1MBps / 2MBps	
Time of Occupancy(Dwell Time)	π/4-DQPSK (DH1 / DH3 / DH5)	2MBps	
Radiated Spurious Emissions	GFSK / π/4-DQPSK	1MBps / 2MBps	
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK	1MBps / 2MBps	



Date : 2017-03-31 Page 7 of 76

No. : DM126786

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b) (1)
Test Method: ANSI C63.10: 2013

Test Date: 2017-03-13 Mode of Operation: Tx mode


Test Method:

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span: Approximately five times the 20 dB bandwidth Detector = Peak, Trace = Max. hold

Test Setup:

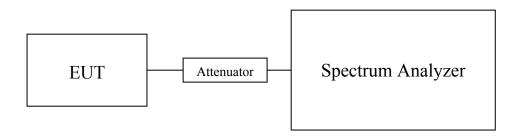

Note: a temporary antenna connector was soldered to the RF output.



Date : 2017-03-31 Page 8 of 76

No. : DM126786

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits: For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Tresums of Braveson Communication mode (Cr 512) (1 and amend 1 0 // 41). 1 and					
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)				
2402	0.001472				

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)		
2441	0.001429		

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)		
2480	0.001012		

The maximum peak output power shall not exceeded the following limits: For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts Results of Bluetooth Communication mode ($\pi/4$ -DQPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000873

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)		
2441	0.000881		

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)		
2480	0.000627		

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB 1GHz to 18GHz 1.7dB

Remark:

- 1. All test data for each data rate were verified, but only the worst case was reported.
- 2. The EUT is programmed to transmit signals continuously for all testing.




Date : 2017-03-31 Page 9 of 76

No. : DM126786

Test plot of Maximum Peak Conducted Output Power:


Bluetooth Communication mode (GFSK, 2402MHz)

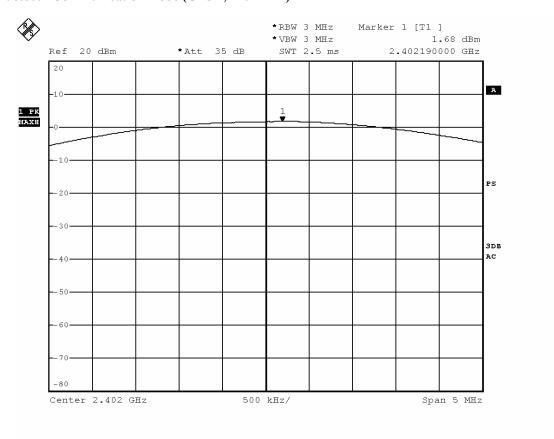



Date : 2017-03-31 Page 10 of 76 No. : DM126786


Bluetooth Communication mode (GFSK, 2441MHz)

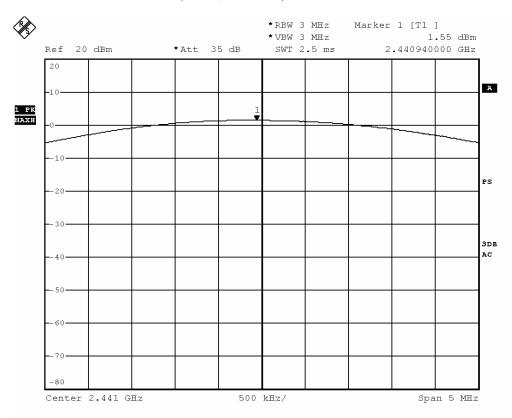



Date : 2017-03-31 Page 11 of 76 No. : DM126786


Bluetooth Communication mode (GFSK, 2480MHz)

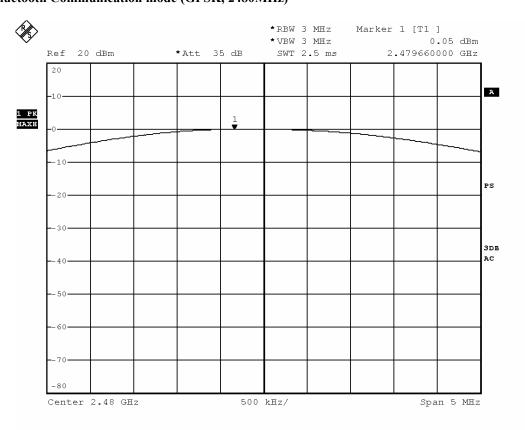



Date : 2017-03-31 Page 12 of 76 No. : DM126786

Bluetooth Communication mode (π/4 DQPSK, 2402MHz)

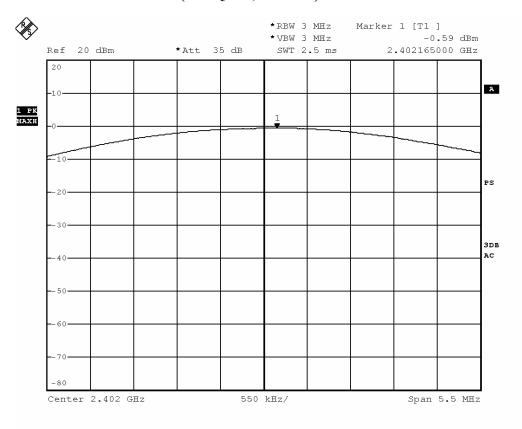




Date: 2017-03-31 Page 13 of 76

No. : DM126786

Bluetooth Communication mode ($\pi/4$ DQPSK, 2441MHz)

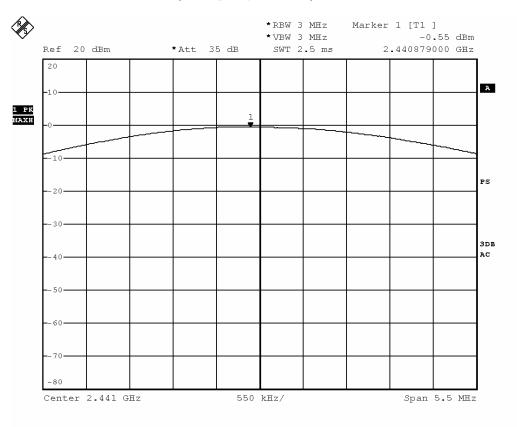




Date : 2017-03-31 Page 14 of 76

No. : DM126786

Bluetooth Communication mode (π/4 DQPSK, 2480MHz)

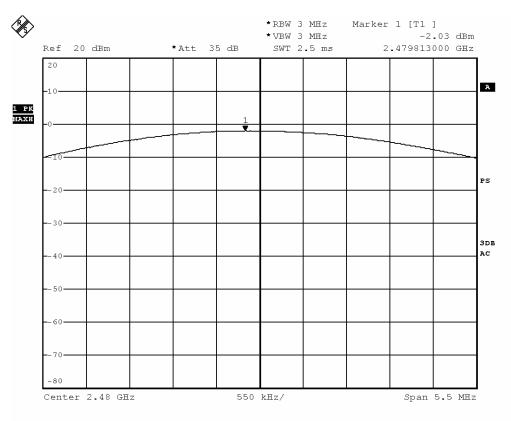



Date : 2017-03-31 Page 15 of 76

No. : DM126786

3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.10:2013

Test Date: 2017-03-10

Mode of Operation: Tx mode / Bluetooth Communication mode (GFSK)

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date : 2017-03-31 Page 16 of 76 No. : DM126786

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz - 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Pk & Av) RBW: 1MHz

VBW: 1MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Test Setup:

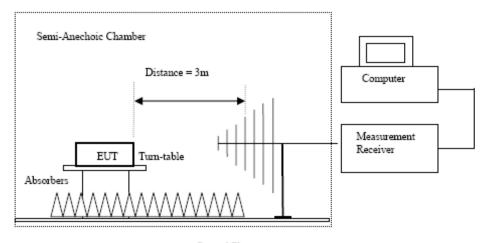

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz hom antennas are used, 9kHz to 30MHz loop antennas are used.



Date : 2017-03-31 Page 17 of 76

No. : DM126786

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Frequency Measured Correction Field Field Limit E-Field							
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	_		
Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m			
4804.0	17.4	41.5	58.9	74.0	15.1	Vertical		
4804.0	15.5	42.4	57.9	74.0	16.1	Horizontal		
7206.0	12.9	45.1	58.0	74.0	16.0	Vertical		
7206.0	11.5	46.2	57.7	74.0	16.3	Horizontal		
9608.0	7.4	48.0	55.4	74.0	18.6	Vertical		
9608.0	6.9	48.8	55.7	74.0	18.3	Horizontal		
12010.0	4.3	51.8	56.1	74.0	17.9	Vertical		
12010.0	3.6	52.4	56.0	74.0	18.0	Horizontal		



Date : 2017-03-31 Page 18 of 76 No. : DM126786

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	2.4	41.5	43.9	54.0	10.1	Vertical				
4804.0	0.5	42.4	42.9	54.0	11.1	Horizontal				
7206.0	-2.3	45.1	42.8	54.0	11.2	Vertical				
7206.0	-3.7	46.2	42.5	54.0	11.5	Horizontal				
9608.0	-8.2	48.0	39.8	54.0	14.2	Vertical				
9608.0	-8.6	48.8	40.2	54.0	13.8	Horizontal				
12010.0	-12.3	51.8	39.5	54.0	14.5	Vertical				
12010.0	-12.4	52.4	40.0	54.0	14.0	Horizontal				

Result of Tx mode (2441.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	16.9	41.6	58.5	74.0	15.5	Vertical			
4882.0	15.4	42.5	57.9	74.0	16.1	Horizontal			
7323.0	4.5	53.2	57.7	74.0	16.3	Vertical			
7323.0	10.9	46.3	57.2	74.0	16.8	Horizontal			
9764.0	7.3	48.1	55.4	74.0	18.6	Vertical			
9764.0	6.9	48.9	55.8	74.0	18.2	Horizontal			
12205.0	4.5	51.6	56.1	74.0	17.9	Vertical			
12205.0	3.6	52.5	56.1	74.0	17.9	Horizontal			



Date : 2017-03-31 Page 19 of 76 No. : DM126786

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m	_	Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	2.3	41.6	43.9	54.0	10.1	Vertical			
4882.0	0.4	42.5	42.9	54.0	11.1	Horizontal			
7323.0	-3.0	45.2	42.2	54.0	11.8	Vertical			
7323.0	-3.7	46.3	42.6	54.0	11.4	Horizontal			
9764.0	-8.9	48.1	39.2	54.0	14.8	Vertical			
9764.0	-9.5	48.9	39.4	54.0	14.6	Horizontal			
12205.0	-11.3	51.6	40.3	54.0	13.7	Vertical			
12205.0	-12.4	52.5	40.1	54.0	13.9	Horizontal			

Result of Tx mode (2480.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
	Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	17.5	41.4	58.9	74.0	15.1	Vertical				
4960.0	16.0	42.7	58.7	74.0	15.3	Horizontal				
7440.0	12.0	45.6	57.6	74.0	16.4	Vertical				
7440.0	10.8	46.5	57.3	74.0	16.7	Horizontal				
9920.0	6.8	48.6	55.4	74.0	18.6	Vertical				
9920.0	5.6	49.7	55.3	74.0	18.7	Horizontal				
12400.0	4.5	51.7	56.2	74.0	17.8	Vertical				
12400.0	3.4	52.7	56.1	74.0	17.9	Horizontal				



Date : 2017-03-31 Page 20 of 76 No. : DM126786

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	2.5	41.4	43.9	54.0	10.1	Vertical				
4960.0	0.6	42.7	43.3	54.0	10.7	Horizontal				
7440.0	-2.9	45.6	42.7	54.0	11.3	Vertical				
7440.0	-4.1	46.5	42.4	54.0	11.6	Horizontal				
9920.0	-9.5	48.6	39.1	54.0	14.9	Vertical				
9920.0	-10.6	49.7	39.1	54.0	14.9	Horizontal				
12400.0	-11.9	51.7	39.8	54.0	14.2	Vertical				
12400.0	-12.7	52.7	40.0	54.0	14.0	Horizontal				

Result of Tx mode (2402.0 MHz) (π /4-DOPSK) (9kHz – 30MHz): Pass

Result of 1x mode (2402.0 MHZ) (W4-DQ1 SIX) (XHZ SUMHZ): 1 ass								
Field Strength of Spurious Emissions								
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2402.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	$dB\mu V$	dB/m	dBμV/m	$dB\mu V/m$	dBμV/m					
4804.0	16.7	41.5	58.2	74.0	15.8	Vertical				
4804.0	15.7	42.4	58.1	74.0	15.9	Horizontal				
7206.0	11.9	45.1	57.0	74.0	17.0	Vertical				
7206.0	10.8	46.2	57.0	74.0	17.0	Horizontal				
9608.0	7.6	48.0	55.6	74.0	18.4	Vertical				
9608.0	6.4	48.8	55.2	74.0	18.8	Horizontal				
12010.0	4.2	51.8	56.0	74.0	18.0	Vertical				
12010.0	3.8	52.4	56.2	74.0	17.8	Horizontal				



Date : 2017-03-31 Page 21 of 76 No. : DM126786

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	1.4	41.5	42.9	54.0	11.1	Vertical				
4804.0	0.4	42.4	42.8	54.0	11.2	Horizontal				
7206.0	-3.0	45.1	42.1	54.0	11.9	Vertical				
7206.0	-4.0	46.2	42.2	54.0	11.8	Horizontal				
9608.0	-8.8	48.0	39.2	54.0	14.8	Vertical				
9608.0	-9.7	48.8	39.1	54.0	14.9	Horizontal				
12010.0	-12.2	51.8	39.6	54.0	14.4	Vertical				
12010.0	-12.4	52.4	40.0	54.0	14.0	Horizontal				

Result of Tx mode (2441.0 MHz) (π /4-DQPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
	Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2441.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	16.5	41.6	58.1	74.0	15.9	Vertical			
4882.0	15.5	42.5	58.0	74.0	16.0	Horizontal			
7323.0	4.5	53.2	57.7	74.0	16.3	Vertical			
7323.0	11.2	46.3	57.5	74.0	16.5	Horizontal			
9764.0	7.2	48.1	55.3	74.0	18.7	Vertical			
9764.0	6.4	48.9	55.3	74.0	18.7	Horizontal			
12205.0	4.5	51.6	56.1	74.0	17.9	Vertical			
12205.0	2.6	52.5	55.1	74.0	18.9	Horizontal			



Date : 2017-03-31 Page 22 of 76 No. : DM126786

Field Strength of Spurious Emissions Average Value Frequency Measured Correction Field Limit Margin E-Field Level @3m Factor Strength @3m Polarity dBuVMHz dB/mdBuV/m dBuV/m dBuV/m 4882.0 1.8 41.6 43.4 54.0 10.6 Vertical 4882.0 0.6 42.5 43.1 54.0 10.9 Horizontal 7323.0 -2.1 45.2 43.1 54.0 10.9 Vertical 7323.0 46.3 42.7 54.0 11.3 Horizontal -3.6

39.2

40.1

39.7

39.8

54.0

54.0

54.0

54.0

14.8

13.9

14.3

14.2

Vertical

Horizontal

Vertical

Horizontal

Result of Tx mode (2480.0 MHz) (π /4-DQPSK) (9kHz – 30MHz): Pass

48.1

48.9

51.6

52.5

-8.9

-8.8

-11.9

-12.7

9764.0

9764.0

12205.0

12205.0

	Field Strength of Spurious Emissions					
			Peak Value			
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m					
	Emissions detected are more than 20 dB below the FCC Limits					

Result of Tx mode (2480.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions					
			Peak Value			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	
4960.0	17.4	41.4	58.8	74.0	15.2	Vertical
4960.0	15.7	42.7	58.4	74.0	15.6	Horizontal
7440.0	11.8	45.6	57.4	74.0	16.6	Vertical
7440.0	10.8	46.5	57.3	74.0	16.7	Horizontal
9920.0	6.5	48.6	55.1	74.0	18.9	Vertical
9920.0	5.6	49.7	55.3	74.0	18.7	Horizontal
12400.0	4.3	51.7	56.0	74.0	18.0	Vertical
12400.0	3.4	52.7	56.1	74.0	17.9	Horizontal



Date: 2017-03-31 Page 23 of 76

No. : DM126786

	Field Strength of Spurious Emissions Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	
4960.0	1.5	41.4	42.9	54.0	11.1	Vertical
4960.0	0.1	42.7	42.8	54.0	11.2	Horizontal
7440.0	-3.2	45.6	42.4	54.0	11.6	Vertical
7440.0	-3.8	46.5	42.7	54.0	11.3	Horizontal
9920.0	-9.4	48.6	39.2	54.0	14.8	Vertical
9920.0	-10.6	49.7	39.1	54.0	14.9	Horizontal
12400.0	12.6	51.7	64.3	54.0	-10.3	Vertical
12400.0	-13.3	52.7	39.4	54.0	14.6	Horizontal

Note: Above 13GHz Emissions detected are more than 20 dB below the FCC Limits.

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 9kHz-30MHz 3.3dB

30MHz -1GHz 4.6dB 1GHz -26GHz 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2017-03-31 Page 24 of 76

No. : DM126786

Radiated Emissions Measurement:

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: RF Radiated Emissions (Lowest)-GFSK

Field Strength of Band-edge Compliance						
	Peak Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ $dB\mu V/m$ $dB\mu V/m$					
2390.0	15.3	36.8	52.1	74.0	21.9	Vertical

	Field Strength of Band-edge Compliance					
	Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2390.0	3.2	36.8	40.0	54.0	14.0	Vertical

Result: RF Radiated Emissions (Highest) -GFSK

11004111 111	The final state of the state of					
Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2483.5	21.6	36.8	58.4	74.0	15.6	Vertical

Field Strength of Band-edge Compliance						
	Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m	
2483.5	4.7	36.8	41.5	54.0	12.5	Vertical



Date : 2017-03-31 Page 25 of 76

No. : DM126786

Radiated Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: RF Radiated Emissions (Lowest)- π/4-DQPSK

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2390.0	16.9	36.8	53.7	74.0	20.3	Vertical

	Field Strength of Band-edge Compliance					
		<i>P</i> .	verage Valu	e		
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	$dB\mu V/m$	
2390.0	4.8	36.8	41.6	54.0	12.4	Vertical

Result: RF Radiated Emissions (Highest) -π/4-DOPSK

result. Iti iti	tesure. The radiated Emissions (mighest) with better					
	Field Strength of Band-edge Compliance					
	Peak Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ $dB\mu V/m$ $dB\mu V/m$					
2483.5	23.5	36.8	60.3	74.0	13.7	Vertical

Field Strength of Band-edge Compliance						
	Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2483.5	7.3	36.8	44.1	54.0	9.9	Vertical



Date : 2017-03-31 Page 26 of 76 No. : DM126786

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:


Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Bluetooth Communication mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Horizontal

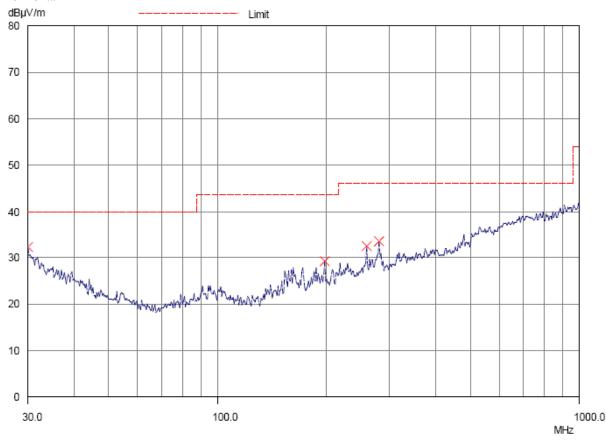



Date : 2017-03-31 Page 27 of 76 No. : DM126786

Result of Bluetooth Communication mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak					
Frequency	Polarity	@3m	@3m	@3m	@3m
MHz		dBμV/m	dBμV/m	μV/m	μV/m
30.0	Horizontal	32.4	40.0	41.7	100
196.8	Horizontal	29.2	43.5	28.8	200
257.8	Horizontal	32.6	46.0	42.7	200
277.7	Horizontal	33.5	46.0	47.3	200



Date : 2017-03-31 Page 28 of 76

No. : DM126786

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Bluetooth Communication mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)



Date : 2017-03-31 Page 29 of 76 No. : DM126786

Result of Bluetooth Communication mode (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass

Radiated Emissions					
Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit
Frequency	Polarity	@3m	@3m	@3m	@3m
MHz		dBμV/m	dBμV/m	μV/m	μV/m
30.3	Vertical	34.5	40.0	53.1	100
41.0	Vertical	36.0	40.0	63.1	100
50.7	Vertical	36.2	40.0	64.6	100
57.9	Vertical	35.0	40.0	56.2	100
76.4	Vertical	27.3	40.0	23.2	100

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2017-03-31 Page 30 of 76

No. : DM126786

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.10:2013

Test Date: 2017-03-29

Mode of Operation: Bluetooth Communication mode

Test Voltage: 120Va.c. 60Hz


Test Method:

The test was performed in accordance with ANSI ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Receiver Setting:

Bandw. = 9 kHz, Meas. Time= 10.0 ms, Step Width = 5.0kHz Detector = MaxPeak and CISPR AV

Test Setup:

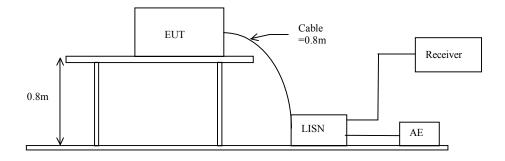



Date : 2017-03-31 Page 31 of 76

No. : DM126786

Limits for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average	
[MHz]	[dBµV]	[dBµV]	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5.0	56	46	
5.0-30.0	60	50	

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication mode (L): PASS

Please refer to the following diagram for individual results.

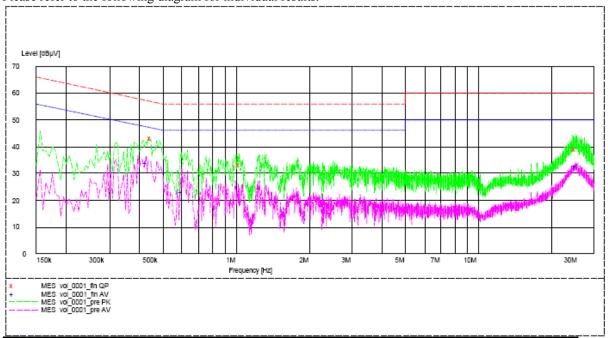

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	0.445	43.2	57.0	_*_	_*_
Live	1.035	33.2	56.0	_*_	_*_
Live	25.150	39.1	60.0	_*_	_*_
Live	0.425	_*_	_*_	34.0	47.0
Live	0.600	_*_	_*_	22.9	46.0
Live	25.185	_*_	_*_	32.9	50.0



Date : 2017-03-31 Page 32 of 76

No. : DM126786


Frequency Range	Quasi-Peak Limits	Average	
[MHz]	[dBµV]	[dBµV]	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5.0	56	46	
5.0-30.0	60	50	

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication mode (N): PASS

Please refer to the following diagram for individual results.

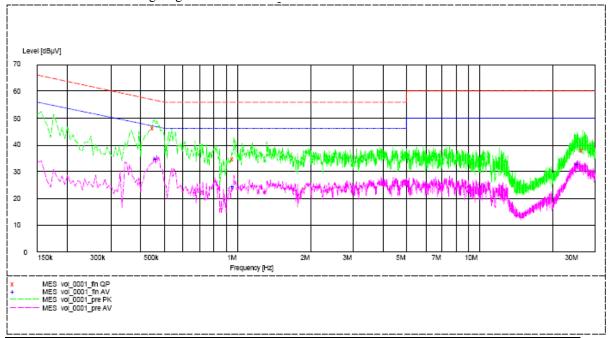

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Neutral	0.455	46.3	57.0	_*_	_*_
Neutral	0.970	34.9	56.0	_*_	_*_
Neutral	26.785	38.0	60.0	_*_	_*_
Neutral	0.465	_*_	_*_	34.9	47.0
Neutral	0.970	_*_	_*_	24.4	46.0
Neutral	25.550	_*_	_*_	32.8	50.0

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

^{-*-} Emission(s) that is far below the corresponding limit line.



Date : 2017-03-31 Page 33 of 76 No. : DM126786

3.1.4 Number of Hopping Frequency

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:


RBW = 300kHz, VBW \geq RBW, Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Measurement Data:

GFSK: 79 of 79 Channel

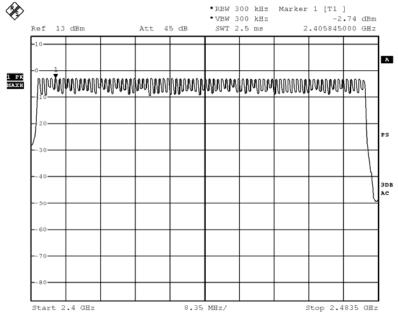




Date : 2017-03-31 Page 34 of 76

No. : DM126786

π/4-DQPSK: 79 of 79 Channel

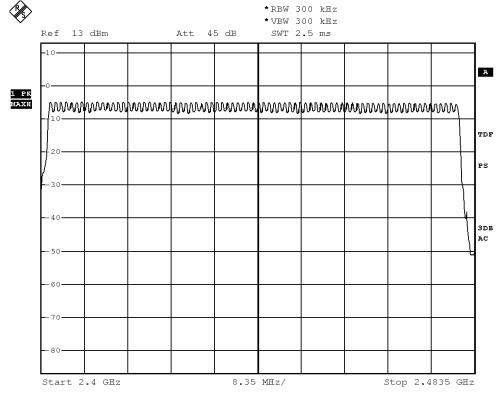



Date : 2017-03-31 Page 35 of 76

No. : DM126786

3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.10:2013

Test Date: 2017-03-10 Mode of Operation: Tx mode

Remark

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Spectrum Analyzer Setting:

RBW = 30kHz, VBW \geq RBW, Sweep = Auto, Span = two times and five times the OBW Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Date : 2017-03-31 Page 36 of 76

No. : DM126786

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2402	840.0	Within 2400-2483.5



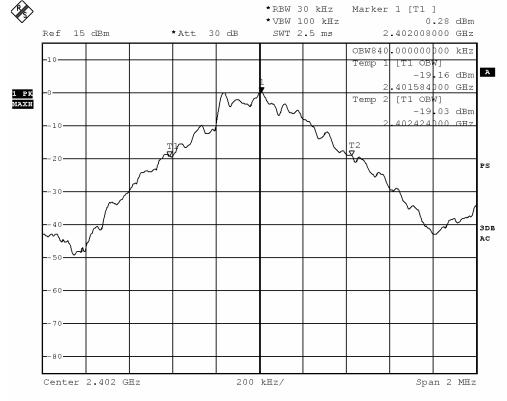




Date : 2017-03-31 Page 37 of 76 No. : DM126786

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2441	836.0	Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

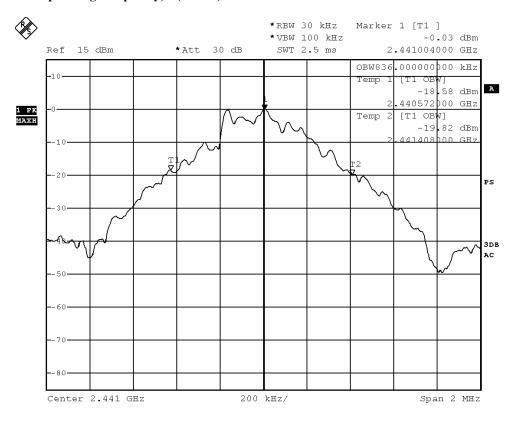




Date : 2017-03-31 Page 38 of 76 No. : DM126786

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2480	836.0	Within 2400-2483.5

(Highest Operating Frequency) - (GFSK)

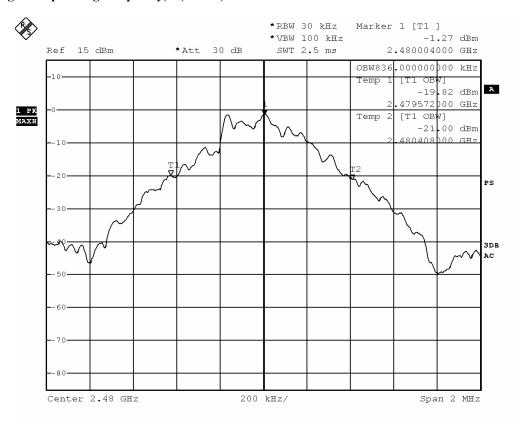




Date : 2017-03-31 Page 39 of 76 No. : DM126786

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1 160	Within 2400-2483 5

(Lowest Operating Frequency) - $(\pi/4 \text{ DQPSK})$

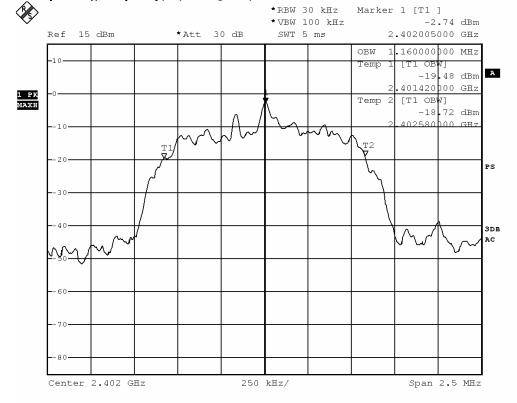




Date : 2017-03-31 Page 40 of 76

No. : DM126786

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.160	Within 2400-2483.5

(Middle Operating Frequency) - $(\pi/4 \text{ DQPSK})$

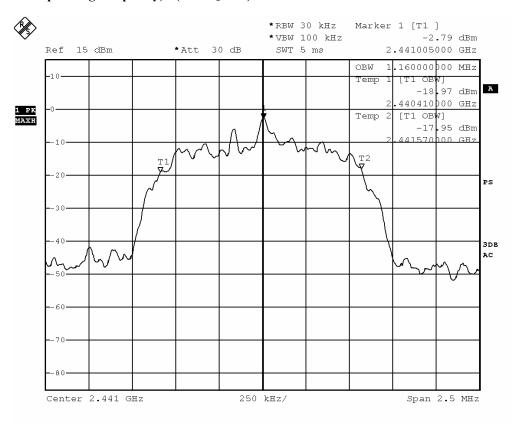




Date : 2017-03-31 Page 41 of 76

No. : DM126786

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2480	1.160	Within 2400-2483.5

(Highest Operating Frequency) - $(\pi/4 \text{ DQPSK})$

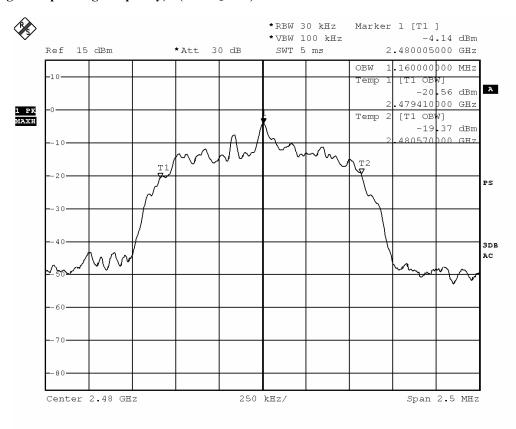



Date : 2017-03-31 Page 42 of 76 No. : DM126786

3.1.6 Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Analyzer Setting:

RBW = 300kHz, VBW ≥ RBW, Sweep = Auto, Span = Wide enough to captur the peaks of two adjacent channels Detector = Peak, Trace = Max. hold

Limit:


The measured maximum bandwidth* 2/3 = 840kHz (GFSK)

The measured maximum bandwidth * 2/3 = 1.16MHz * 2/3 = 773.3kHz ($\pi/4$ DQPSK)



Date : 2017-03-31 Page 43 of 76 No. : DM126786


Channel separation = 1MHz (>840kHz) (Lowest) (GFSK)

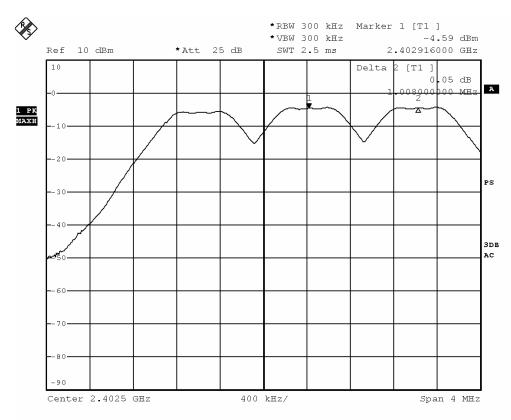



Date : 2017-03-31 Page 44 of 76 No. : DM126786


Channel separation = 1MHz (>840kHz) (Mid) (GFSK)

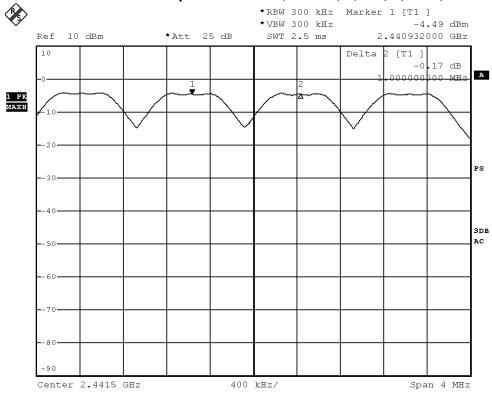



Date : 2017-03-31 Page 45 of 76 No. : DM126786


Channel separation = 1MHz (>840kHz) (Highest) (GFSK)

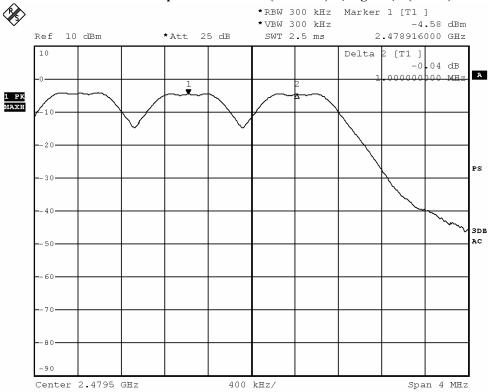



Date : 2017-03-31 Page 46 of 76 No. : DM126786


Channel separation = 1MHz (>773.3kHz) (Lowest) ($\pi/4$ DQPSK)

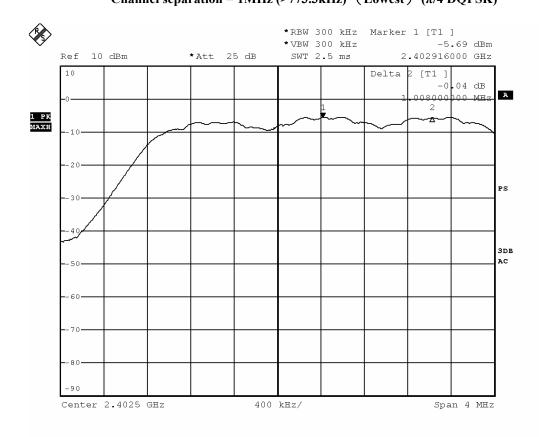



Date : 2017-03-31 Page 47 of 76 No. : DM126786


Channel separation = 1MHz (>773.3kHz) (Mid) ($\pi/4$ DQPSK)

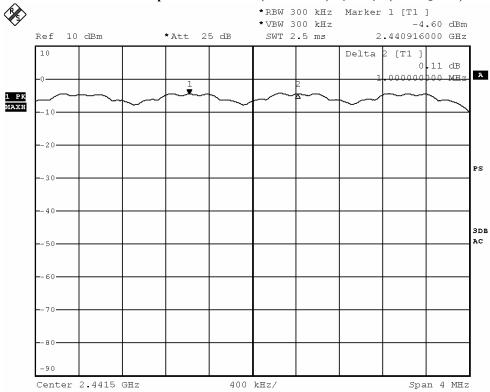



Date : 2017-03-31 Page 48 of 76 No. : DM126786

Channel separation = 1MHz (>773.3kHz) (Highest) $(\pi/4 \text{ DQPSK})$

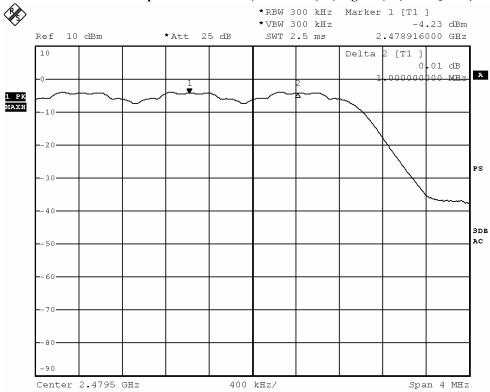



Date : 2017-03-31 Page 49 of 76

No. : DM126786

3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

According to the test method DA 00-705.

Spectrum Analyzer Setting:

RBW = 100kHz, VBW= 300kHz, Sweep = Coupled,

Span = Wide enough to captur the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Detector = Peak, Trace = Max. hold

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report




Date : 2017-03-31 Page 50 of 76 No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	33.74

Band-edge Compliance of RF Emissions - Lowest (GFSK) (Hopping on)

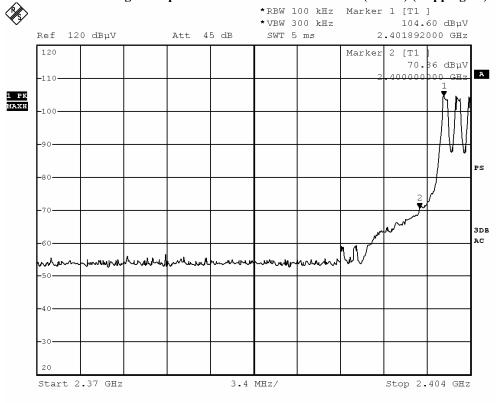




Date : 2017-03-31 Page 51 of 76 No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	32.90

Band-edge Compliance of RF Emissions - Lowest (GFSK) (Hopping off)

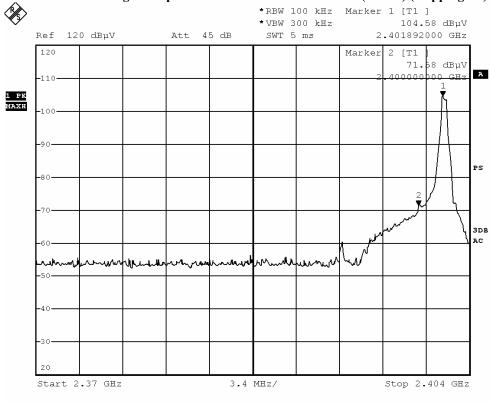




Date : 2017-03-31 Page 52 of 76

No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	50.49

Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping on)

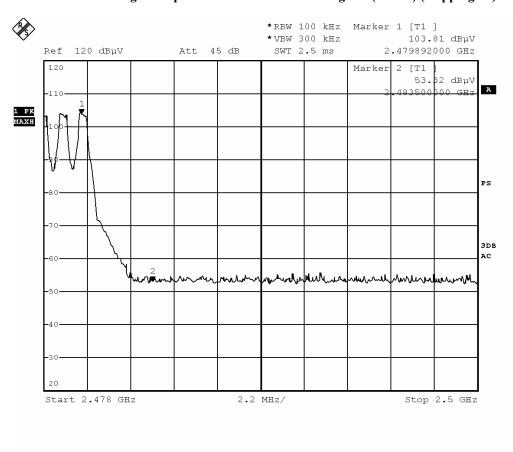




Date : 2017-03-31 Page 53 of 76 No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	51.24

Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping off)

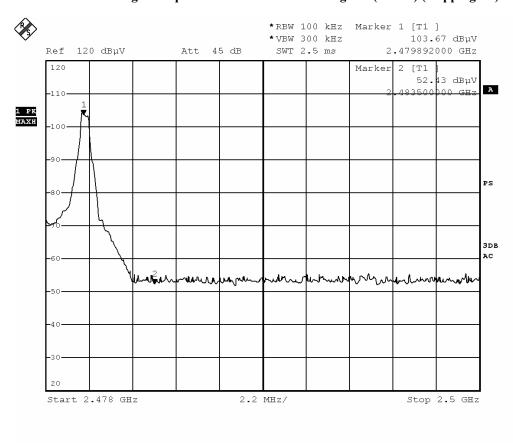




Date : 2017-03-31 Page 54 of 76 No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	31.82

Band-edge Compliance of RF Emissions – Lowest (π/4 DQPSK) (Hopping on)

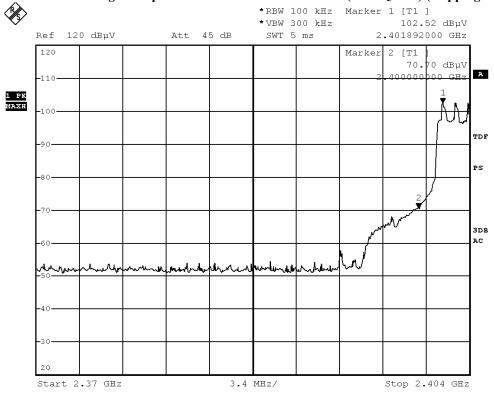




Date : 2017-03-31 Page 55 of 76 No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	31.70

Band-edge Compliance of RF Emissions – Lowest (π/4 DQPSK) (Hopping off)

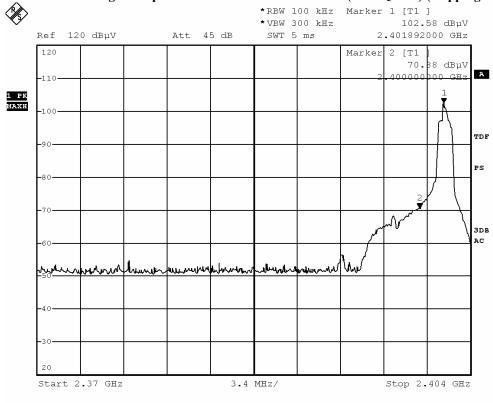




Date : 2017-03-31 Page 56 of 76

No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	49.53

Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping on)

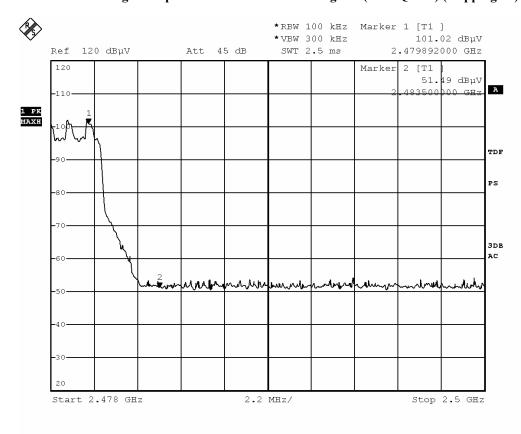




Date : 2017-03-31 Page 57 of 76 No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	49.03

Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping off)

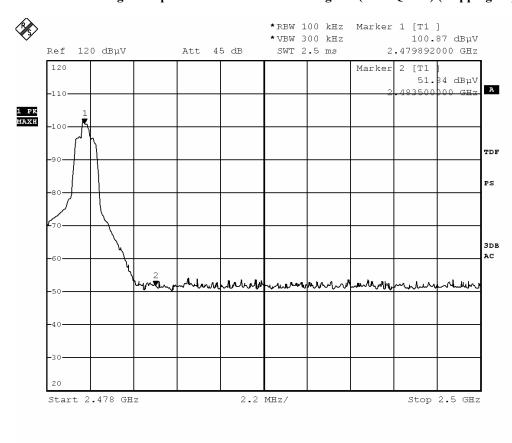




Date : 2017-03-31 Page 58 of 76 No. : DM126786

Band-edge Compliance of RF Conducted Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.


Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

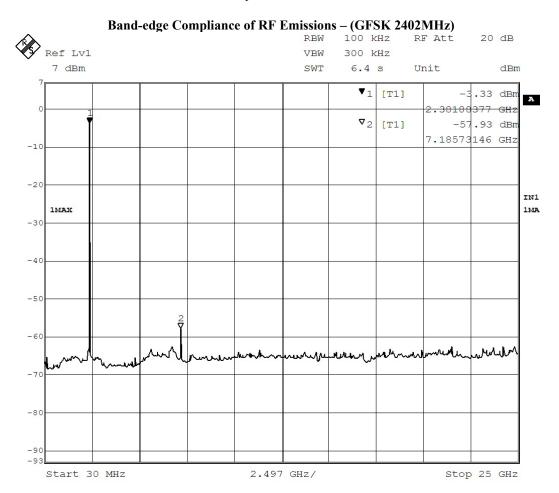



Date : 2017-03-31 Page 59 of 76 No. : DM126786

Band-edge Compliance of RF Emissions – (π/4-DQPSK 2402MHz)

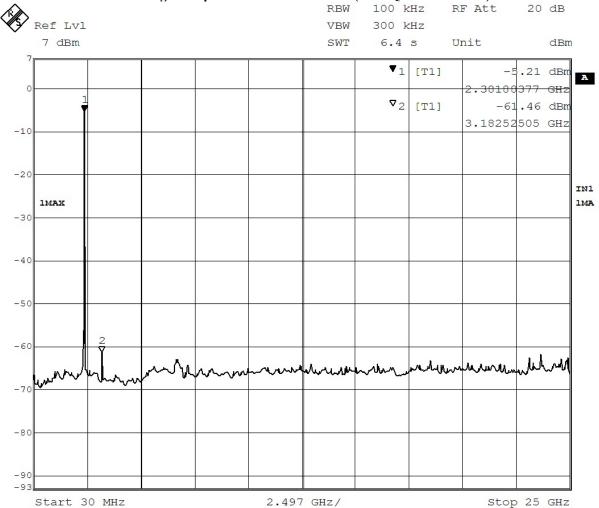



Date : 2017-03-31 Page 60 of 76 No. : DM126786

3.1.8 Time of Occupancy (Dwell Time)

Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.

No requirements for Digital Transmission System.

Spectrum Analyzer Setting:

 $RBW = 300kHz, VBW \ge RBW,$

Sweep = A longer sweep time to show two successive hops on a channel,


Span = Zero, Detector = Peak, Trace = Max. hold

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: $0.4s \times 79 = 31.6s$

Measurement Data:

Channel Occupied in $\pi/4$ -DQPSK: 79 of 79 Channel

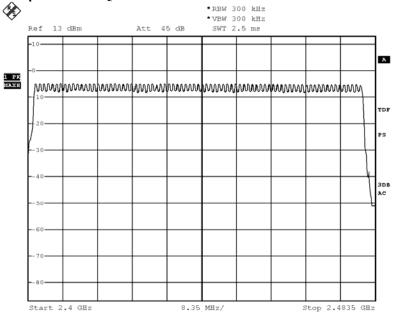




Date : 2017-03-31 Page 61 of 76 No. : DM126786

DH5 Packet:

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds


Fig. A [Pulse duration of Lowest Channel]

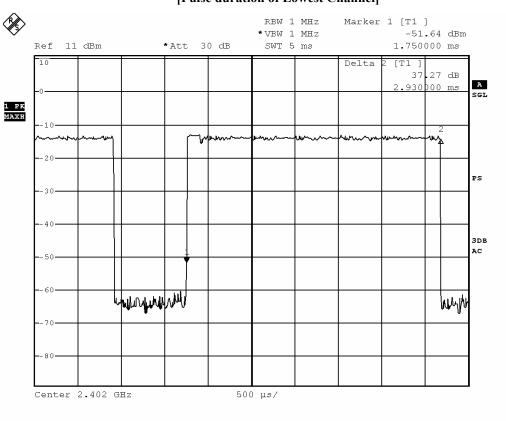



Date : 2017-03-31 Page 62 of 76 No. : DM126786


Fig. B [Pulse duration of Middle Channel]

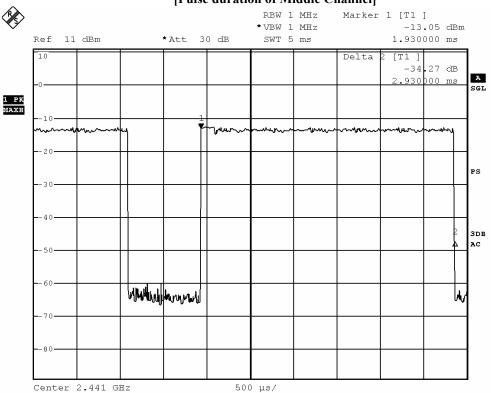



Date : 2017-03-31 Page 63 of 76 No. : DM126786

Fig. C
[Pulse duration of Highest Channel]

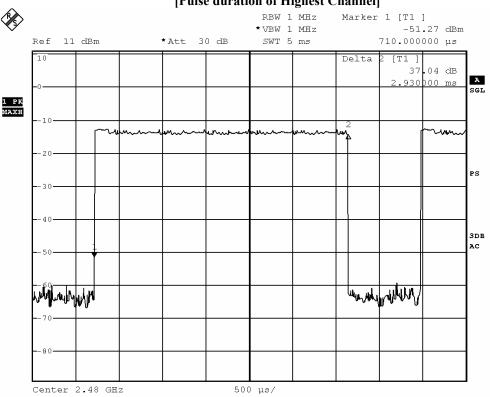




Date : 2017-03-31 Page 64 of 76 No. : DM126786

DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds


Fig. D
[Pulse duration of Lowest Channel]

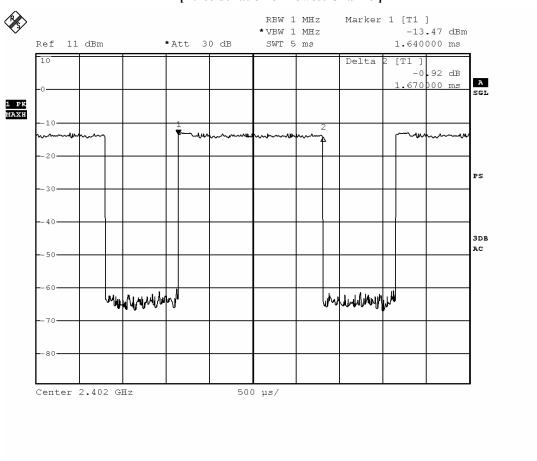



Date : 2017-03-31 Page 65 of 76 No. : DM126786


Fig. E [Pulse duration of Middle Channel]

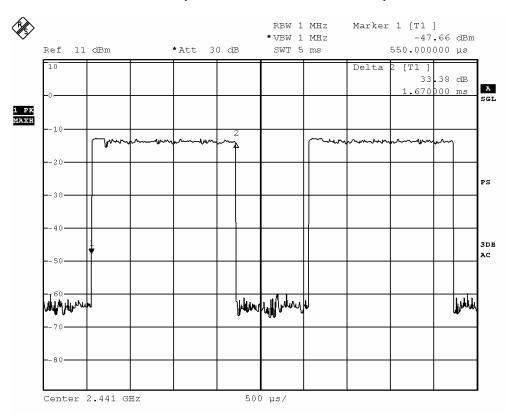



Date : 2017-03-31 Page 66 of 76 No. : DM126786

Fig. F
[Pulse duration of Highest Channel]

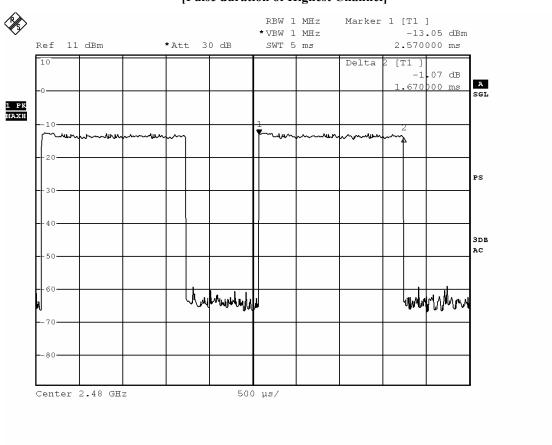




Date : 2017-03-31 Page 67 of 76 No. : DM126786

DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds


Fig. G
[Pulse duration of Lowest Channel]

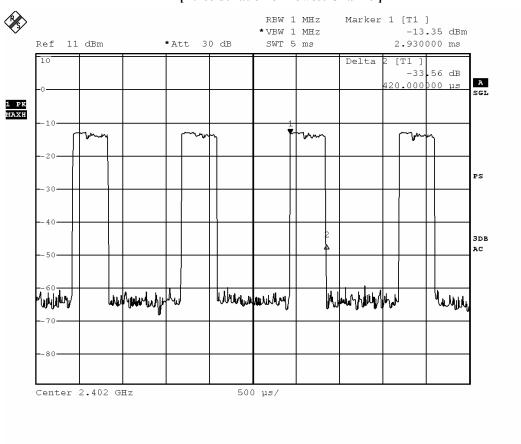



Date : 2017-03-31 Page 68 of 76 No. : DM126786


Fig. H
[Pulse duration of Middle Channel]

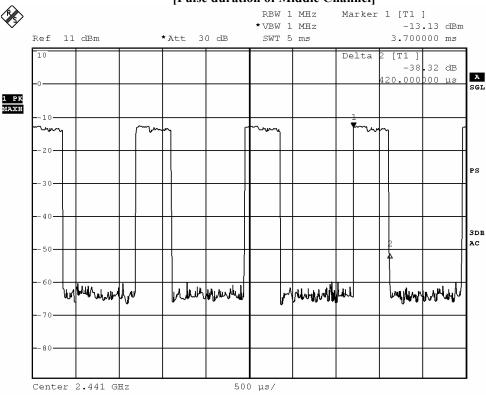



Date : 2017-03-31 Page 69 of 76 No. : DM126786

Fig. I [Pulse duration of Highest Channel]

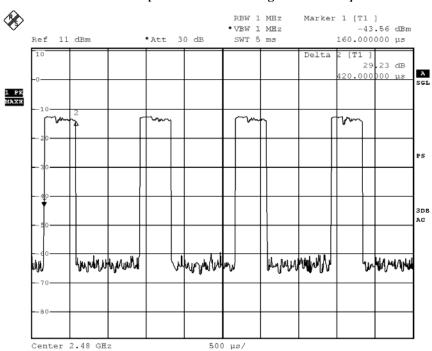

Time of occupancy (Dwell Time):

Time of occupancy (Dwen Time).								
Data Packet	Frequency	Pulse	Dwell Time	Limits	Test Results			
	(MHz)	Duration (ms)	(s)	(s)				
DH5	2402	2.930	0.313	0.400	Complies			
DH5	2441	2.930	0.313	0.400	Complies			
DH5	2480	2.930	0.313	0.400	Complies			
DH3	2402	1.680	0.269	0.400	Complies			
DH3	2441	1.680	0.269	0.400	Complies			
DH3	2480	1.680	0.269	0.400	Complies			
DH1	2402	0.420	0.134	0.400	Complies			
DH1	2441	0.420	0.134	0.400	Complies			
DH1	2480	0.420	0.134	0.400	Complies			



Date : 2017-03-31 Page 70 of 76 No. : DM126786

3.1.9 Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 1 to 79) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 1,...,79 (Channel separation = 1MHz)



Date : 2017-03-31 Page 71 of 76 No. : DM126786

3.1.10 Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.



Date : 2017-03-31 Page 72 of 76 No. : DM126786

3.1.11 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is Meander line antenna. There is no external antenna, the antenna gain = 3.3dB. User is unable to remove or changed the Antenna.



Date : 2017-03-31 Page 73 of 76 No. : DM126786

Appendix A

List of Measurement Equipment

EMD004 LISN ROHDE & SCHWARZ ESH3-Z5 100102 2016.3.29 2018.3.29 EMD022 EMI Test Receiver ROHDE & SCHWARZ ESCS30 100314 2016.3.29 2018.3.29 EMD035 EMI Test Receiver ROHDE & SCHWARZ ESCI 100441 2016.3.29 2018.3.29 EMD036 EMI Test Receiver ROHDE & SCHWARZ ESIB 26 100388 2016.3.29 2018.3.29 EMD041 TWO-LINE V-NETWORK ROHDE & SCHWARZ ENV216 100261 2016.12.30 2018.3.29 EMD061 Biconilog Antenna ETS.LINDGREN 3142C 00060439 2016.12.30 2018.12.30 EMD062 Double-Ridged Waveguide (1GHz - 18GHz) ETS.LINDGREN 3117 00075933 2014.11.15 2017.11.15 EMD084 MULTI-DVICE CONTROLLER ETS.LINDGREN 2090 00060107 N/A N/A EMD089 Video Contol Unit ETS.LINDGREN Y21953A 2601073 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS	EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD035 EMI Test Receiver ROHDE & SCHWARZ ESCI 100441 2016.3.29 2018.3.29 EMD036 EMI Test Receiver ROHDE & SCHWARZ ESIB 26 100388 2016.3.29 2018.3.29 EMD041 TWO-LINE V-NETWORK ROHDE & SCHWARZ ENV216 100261 2016.3.29 2018.3.29 EMD061 Biconilog Antenna ETS.LINDGREN 3142C 00060439 2016.12.30 2018.12.30 EMD062 Double-Ridged Waveguide (1GHz – 18GHz) ETS.LINDGREN 3117 00075933 2014.11.15 2017.11.15 EMD084 MULTI-DVICE CONTROLLER ETS.LINDGREN 2090 00060107 N/A N/A EMD088 Video Contol Unit ETS.LINDGREN Y21953A 2601073 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707454 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707455 N/A N/A EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-	EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2016.3.29	2018.3.29
EMD036 EMI Test Receiver ROHDE & SCHWARZ ESIB 26 100388 2016.3.29 2018.3.29 EMD041 TWO-LINE V-NETWORK ROHDE & SCHWARZ ENV216 100261 2016.3.29 2018.3.29 EMD061 Biconilog Antenna ETS.LINDGREN 3142C 00060439 2016.12.30 2018.12.30 EMD062 Double-Ridged Waveguide (1GHz – 18GHz) ETS.LINDGREN 3117 00075933 2014.11.15 2017.11.15 EMD084 MULTI-DVICE CONTROLLER ETS.LINDGREN 2090 00060107 N/A N/A EMD088 Video Contol Unit ETS.LINDGREN Y21953A 2601073 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707454 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707455 N/A N/A EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-3 3803 N/A N/A EMD106 Shielding Room #1 ETS.LINDGREN RFD-100	EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2016.3.29	2018.3.29
EMD041 TWO-LINE V-NETWORK ROHDE & SCHWARZ ENV216 100261 2016.3.29 2018.3.29 EMD061 Biconilog Antenna ETS.LINDGREN 3142C 00060439 2016.12.30 2018.12.30 EMD062 Double-Ridged Waveguide (IGHz – 18GHz) ETS.LINDGREN 3117 00075933 2014.11.15 2017.11.15 EMD084 MULTI-DVICE CONTROLLER ETS.LINDGREN 2090 00060107 N/A N/A EMD088 Video Contol Unit ETS.LINDGREN Y21953A 2601073 N/A N/A EMD102 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707454 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707455 N/A N/A EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-3 3803 N/A N/A EMD110 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 </td <td>EMD035</td> <td>EMI Test Receiver</td> <td>ROHDE & SCHWARZ</td> <td>ESCI</td> <td>100441</td> <td>2016.3.29</td> <td>2018.3.29</td>	EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2016.3.29	2018.3.29
NETWORK	EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2016.3.29	2018.3.29
EMD062 Double-Ridged Waveguide (1GHz – 18GHz) ETS.LINDGREN 3117 00075933 2014.11.15 2017.11.15 EMD084 MULTI-DVICE CONTROLLER ETS.LINDGREN 2090 00060107 N/A N/A EMD088 Video Contol Unit ETS.LINDGREN Y21953A 2601073 N/A N/A EMD093 Monitor ViewSonic VA9036 Q8X064201876 N/A N/A EMD102 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707454 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707455 N/A N/A EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-3 3803 N/A N/A EMD106 Shielding Room #1 ETS.LINDGREN FFACT-3 3802 N/A N/A EMD111 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.05.23	EMD041		ROHDE & SCHWARZ	ENV216	100261	2016.3.29	2018.3.29
Waveguide (1GHz – 18GHz) Waveguide (1GHz) Waveguide (2GHz) W	EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2016.12.30	2018.12.30
EMD088 Video Contol Unit ETS.LINDGREN Y21953A 2601073 N/A N/A EMD093 Monitor ViewSonic VA9036 Q8X064201876 N/A N/A EMD102 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707454 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707455 N/A N/A EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-3 3803 N/A N/A EMD106 Shielding Room #1 ETS.LINDGREN RFD-100 3802 N/A N/A EMD111 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.3.29 2018.3.29 EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42-15-C-KF J2021100721001	EMD062	Waveguide (1GHz –	ETS.LINDGREN	3117	00075933	2014.11.15	2017.11.15
EMD093 Monitor ViewSonic VA9036 Q8X064201876 N/A N/A EMD102 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707454 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707455 N/A N/A EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-3 3803 N/A N/A EMD106 Shielding Room #1 ETS.LINDGREN RFD-100 3802 N/A N/A EMD111 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.3.29 2018.3.29 EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42- 15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 201	EMD084		ETS.LINDGREN	2090	00060107	N/A	N/A
EMD102 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707454 N/A N/A EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707455 N/A N/A EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-3 3803 N/A N/A EMD106 Shielding Room #1 ETS.LINDGREN RFD-100 3802 N/A N/A EMD111 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.3.29 2018.3.29 EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42- 15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27	EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD103 Intelligent Frequency Ainuo Instrument Co., Ltd AN97005SS 79707455 N/A N/A EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-3 3803 N/A N/A EMD106 Shielding Room #1 ETS.LINDGREN RFD-100 3802 N/A N/A EMD111 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 I00V Insertion Unit ROHDE & SCHWARZ URV5-Z4 100464 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.3.29 2018.3.29 EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42- 15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27	EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD105 FACT-3 EMC Chamber ETS.LINDGREN FACT-3 3803 N/A N/A EMD106 Shielding Room #1 ETS.LINDGREN RFD-100 3802 N/A N/A EMD111 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 100V Insertion Unit ROHDE & SCHWARZ URV5-Z4 100464 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.3.29 2018.3.29 EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42-15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27	EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD106 Shielding Room #1 ETS.LINDGREN RFD-100 3802 N/A N/A EMD111 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 I 00V Insertion Unit ROHDE & SCHWARZ URV5-Z4 100464 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.3.29 2018.3.29 EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42-15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27	EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD111 Power meter ROHDE & SCHWARZ NRVD 102051 2016.3.29 2018.3.29 100V Insertion Unit ROHDE & SCHWARZ URV5-Z4 100464 2016.3.29 2018.3.29 EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.3.29 2018.3.29 EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42- 15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27	EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
Tool Tool	EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD113 Pre-Amplifier ROHDE & SCHWARZ N/A 1129588 2016.3.29 2018.3.29 EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42- 15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27	EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2016.3.29	2018.3.29
EMD124 Loop Antenna ETS-Lindgren 6502 00104905 2016.05.23 2018.05.23 EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42- 15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27		100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2016.3.29	2018.3.29
EMD131 Standard Gain Horn Antenna (18GHz – 26.5GHz) Chengdu AINFO Inc. JXTXLB-42- 15-C-KF J2021100721001 2015.04.09 2017.04.09 RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27	EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2016.3.29	2018.3.29
Antenna (18GHz – 26.5GHz) 15-C-KF	EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2016.05.23	2018.05.23
	EMD131	Antenna (18GHz –	Chengdu AINFO lnc.		J2021100721001	2015.04.09	2017.04.09
RE02 RF cable N/A N/A N/A 2016-9-28 2018-9-27	RE01	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27
	RE02	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27

Remarks:-

N/A Not Applicable or Not Available



Date : 2017-03-31 Page 74 of 76 No. : DM126786

Appendix B

Photographs of EUT

Front View of the product



Inside View of the product



Inner Circuit Bottom View



Rear View of the product




Inner Circuit Top View






Date : 2017-03-31 Page 75 of 76 No. : DM126786

Photographs of EUT

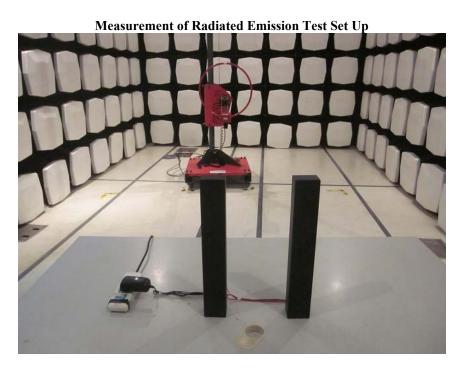

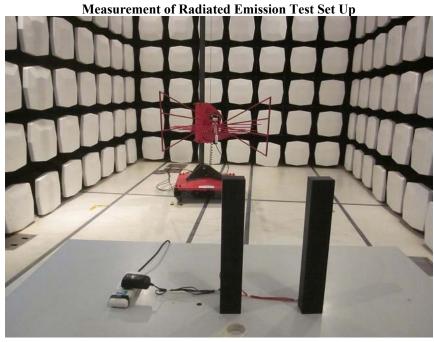



Date : 2017-03-31 Page 76 of 76 No. : DM126786

Photographs of EUT







***** End of Test Report *****

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by The STC (Dongguan) Company Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders
- 4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 10. Issuance records of the Report are available on the internet at dgstc@dgstc.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.