


## C2000 (Body)

SAM I Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz:  $s = 0.98$   
 $\rho/m \epsilon_r = 53.9$   $r = 1.00$  g/cm<sup>3</sup>  
Cube 5x5x7; SAR (1g): 0.160 mW/g, SAR (10g): 0.112 mW/g  
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0  
Powerdrift: -0.11 dB  
Comment:  
MODEL: C2000  
Company : UTStarcom Inc.  
Test Position: Body / Antenna: out  
Mode: CDMA / Channel: 777 (848.31MHz)  
Conducted Power : 25.0 dBm  
Liquid Temperature: 21.4°C  
Date Tested : February 17, 2005

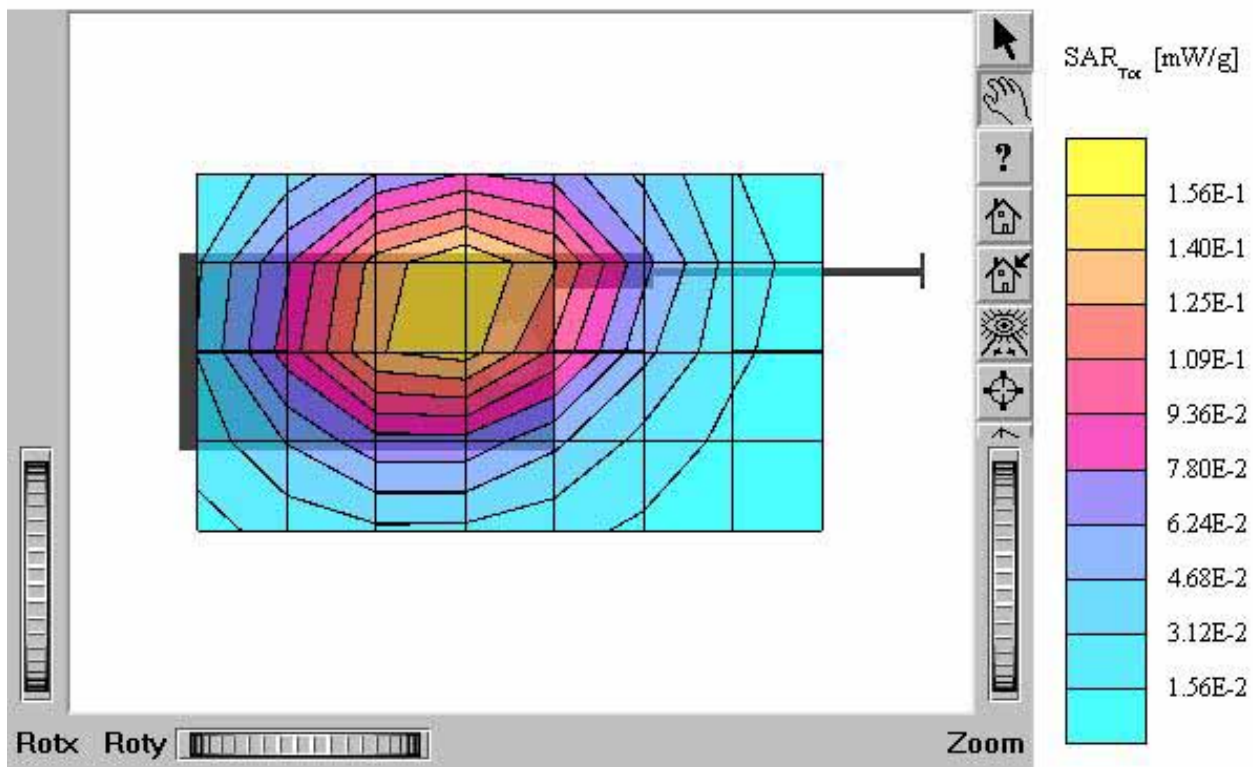

## C2000 (Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $s = 1.58$  $\rho = 50.9 \text{ g/cm}^3$ ,  $r = 1.00 \text{ g/cm}^3$ 

Cube 5x5x7; SAR (1g): 0.310 mW/g, SAR (10g): 0.187 mW/g

Coarse:  $D_x = 20.0$ ,  $D_y = 20.0$ ,  $D_z = 10.0$ 

Powerdrift: -0.22 dB

Comment:

MODEL: C2000

Company : UTStarcom Inc.


Test Position : Body / Antenna: in

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power : 25.0 dBm


Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

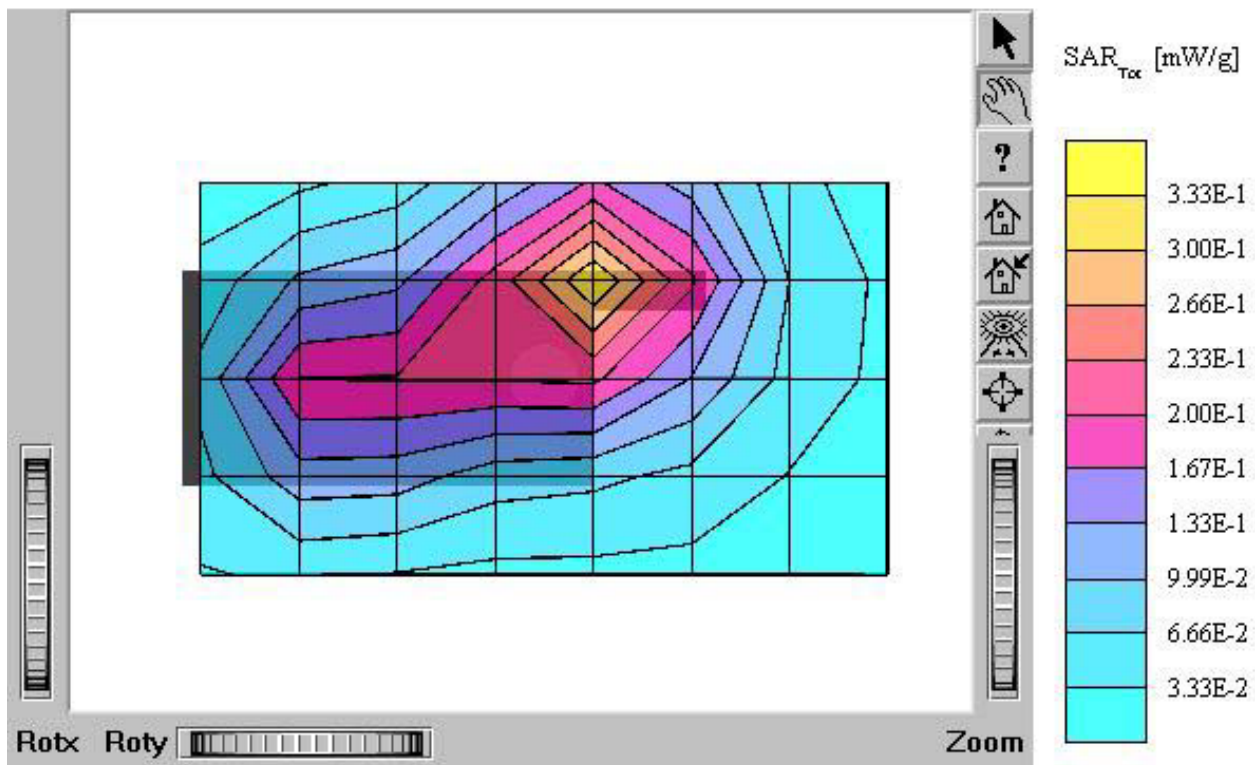


## C2000 (Body)

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz  
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $s = 1.58$   
 $\rho_{\text{ho/m e}} = 50.9$   $r = 1.00$  g/cm<sup>3</sup>  
Cube 5x5x7: SAR (1g): 0.268 mW/g, SAR (10g): 0.164 mW/g  
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0  
Powerdrift: -0.11 dB  
Comment:  
MODEL: C2000  
Company : UTStarcom Inc.  
Mode: PCS CDMA / Channel: 25 (1851.25MHz)  
Conducted Power : 25.0 dBm  
Liquid Temperature: 21.4°C  
Date Tested : February 17, 2005

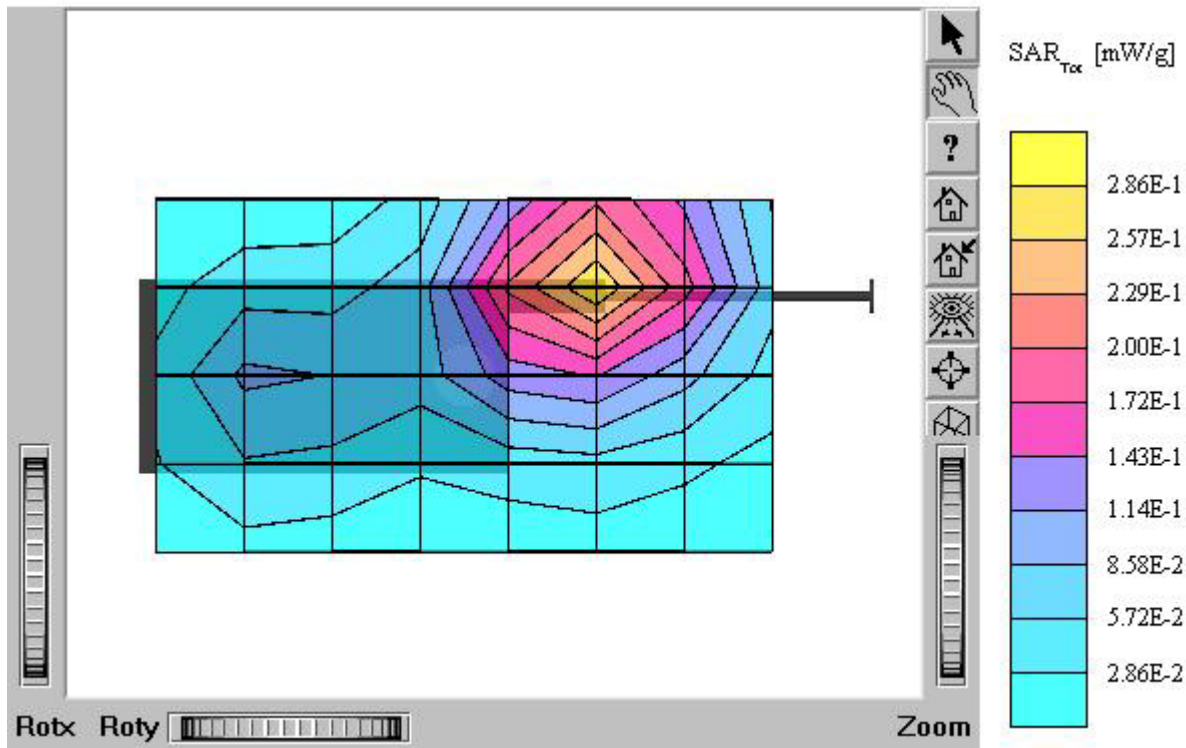


## C2000 (Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz  
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $s = 1.58$   
 $\text{mho/m}$   $\epsilon_r = 50.9$   $r = 1.00$   $\text{g/cm}^3$   
Cube 5x5x7; SAR (1g): 0.283 mW/g, SAR (10g): 0.165 mW/g  
Coarse:  $D_x = 20.0$ ,  $D_y = 20.0$ ,  $D_z = 10.0$   
Powerdrift: 0.06 dB  
Comment:  
MODEL: C2000  
Company : UTStarcom Inc.  
Test Position : Body / Antenna: in  
Mode: PCS CDMA / Channel: 600 (1880.00MHz)  
Conducted Power : 25.0 dBm  
Liquid Temperature: 21.4°C  
Date Tested : February 17, 2005

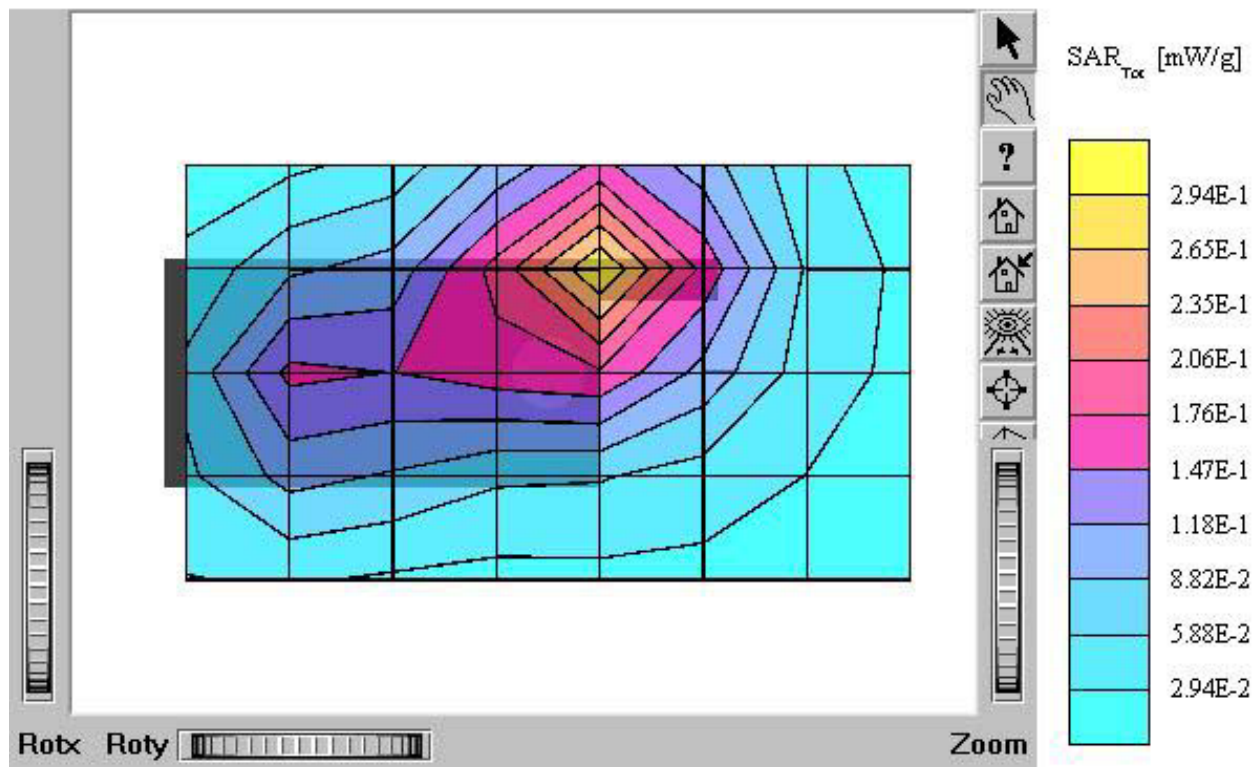


**C2000 (Body)**

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz  
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $s = 1.58$   
 $\text{mho/m}$   $\epsilon_r = 50.9$   $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7: SAR (1g): 0.317 mW/g, SAR (10g): 0.193 mW/g  
Coarse:  $D_x = 20.0$ ,  $D_y = 20.0$ ,  $D_z = 10.0$   
Powerdrift: -0.07 dB  
Comment:  
MODEL: C2000  
Company : UTStarcom Inc.  
Test Position : Body / Antenna: out  
Mode: PCS CDMA / Channel: 600 (1880.00MHz)  
Conducted Power : 25.0 dBm  
Liquid Temperature: 21.4°C  
Date Tested : February 17, 2005

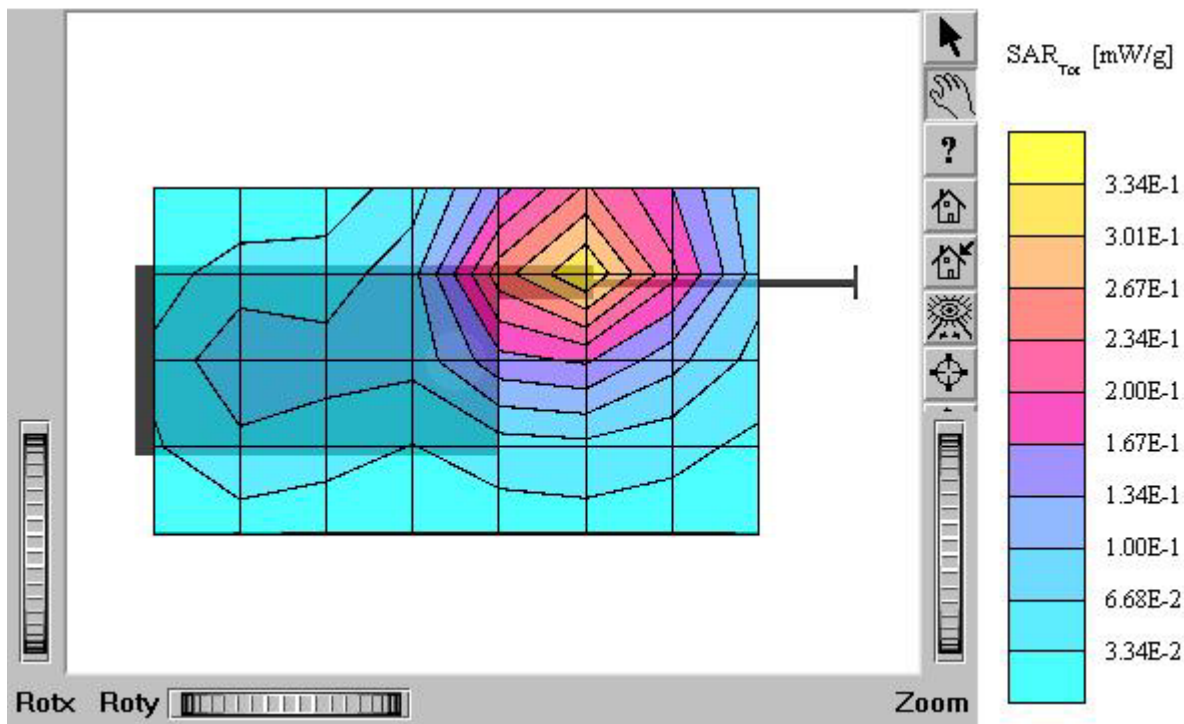


## C2000 (Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz  
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $s = 1.58$   
 $\text{mho/m}$   $\epsilon_r = 50.9$   $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7; SAR (1g): 0.213 mW/g, SAR (10g): 0.129 mW/g  
Coarse:  $D_x = 20.0$ ,  $D_y = 20.0$ ,  $D_z = 10.0$   
Powerdrift: -0.04 dB  
Comment:  
MODEL: C2000  
Company : UTStarcom Inc.  
Test Position : Body / Antenna: in  
Mode: PCS CDMA / Channel: 1175 (1908.75MHz)  
Conducted Power : 25.0 dBm  
Liquid Temperature: 21.4°C  
Date Tested : February 17, 2005

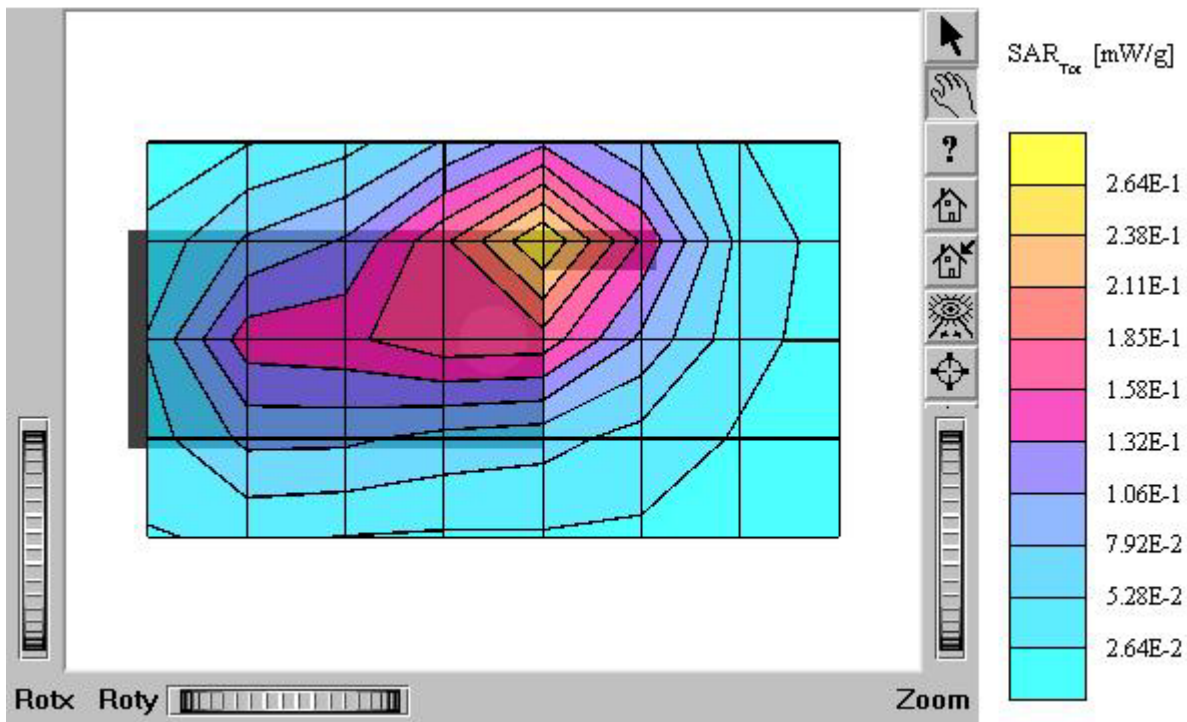

## C2000 (Body)

SAM II Phantom: Flat Section; Position: (90°,90°); Frequency: 1900 MHz  
Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $s = 1.58$   
 $\rho_{\text{ho/m}} e_r = 50.9$   $r = 1.00$  g/cm<sup>3</sup>  
Cube 5x5x7: SAR (1g): 0.344 mW/g, SAR (10g): 0.205 mW/g  
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0  
Powerdrift: -0.29 dB  
Comment:  
MODEL: C2000  
Company : UTStarcom Inc.  
Test Position : Body / Antenna: out  
Mode: PCS CDMA / Channel: 1175 (1908.75MHz)  
Conducted Power : 25.0 dBm  
Liquid Temperature: 21.4°C  
Date Tested : February 17, 2005

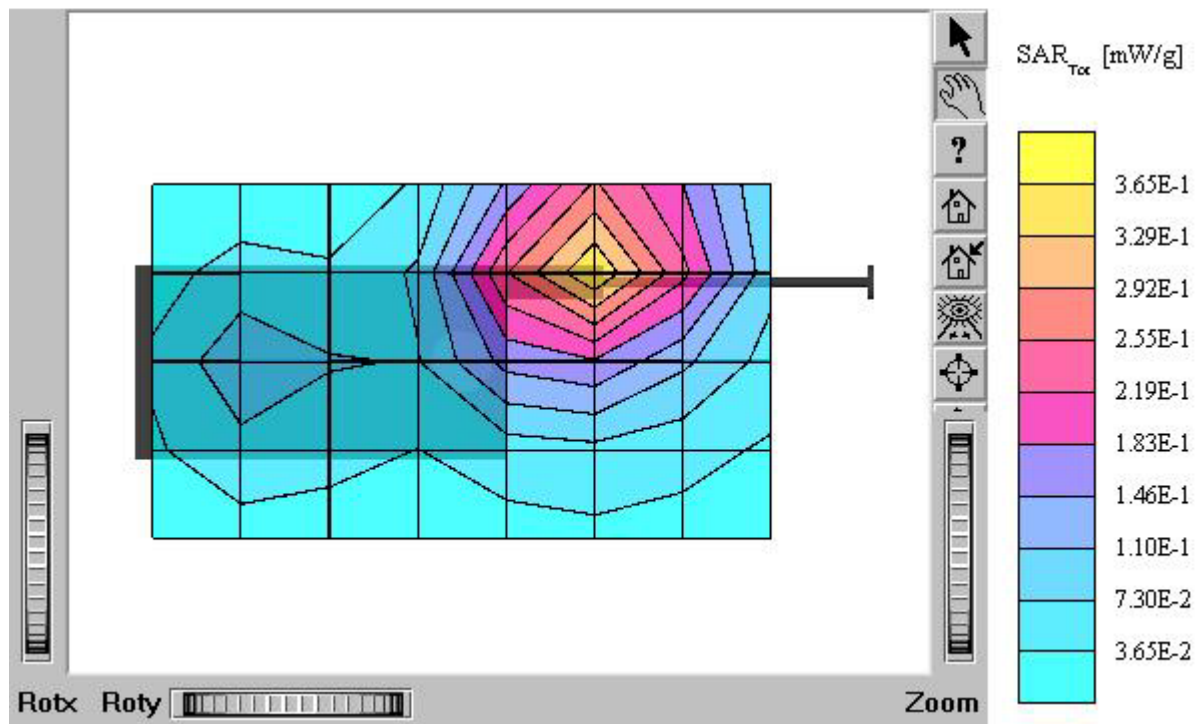

## C2000 (Body)

SAM I Phantom: Section: Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz:  $s = 0.98$   
 $\rho = 53.9 \text{ g/cm}^3$   $r = 1.00$ 

:

Z-Axis:  $D_x = 0.0$ ,  $D_y = 0.0$ ,  $D_z = 5.0$ 

Comment:

MODEL: C2000

Company : UTStarcom Inc.


Test Position: Body / Antenna: in

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

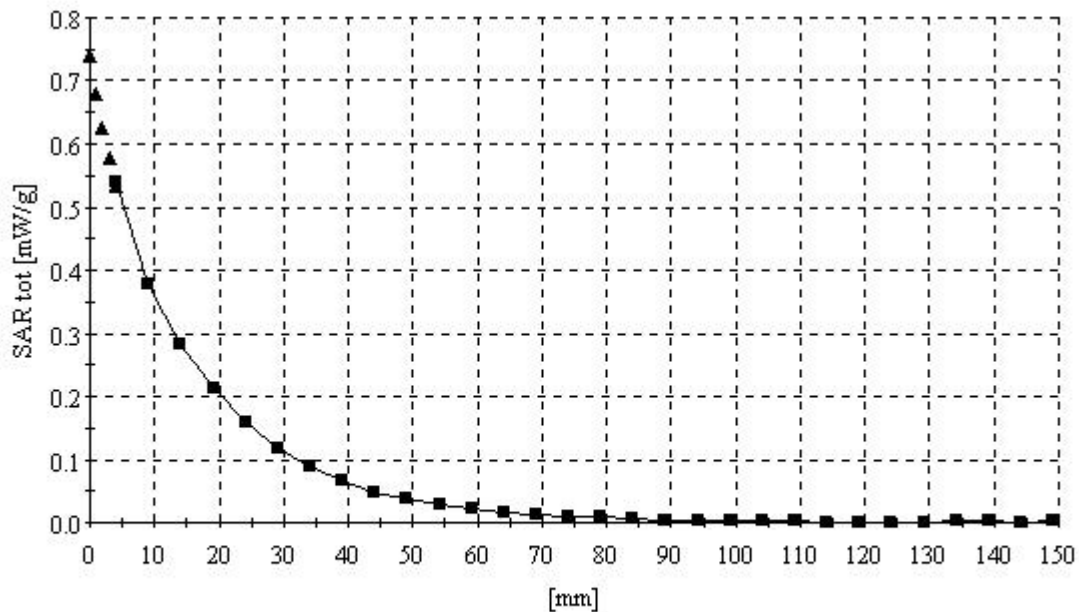

## C2000 (Body)

SAM I Phantom; Section; Position; ; Frequency: 835 MHz

Probe: ET3DV6 - SN1609; ConvF(6.47,6.47,6.47); Crest factor: 1.0; Body 835 MHz:  $s = 0.98$   
 $\rho = 53.9$  g/cm<sup>3</sup>  $r = 1.00$  g/cm<sup>3</sup>

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

MODEL: C2000

Company : UTStarcom Inc.


Test Position: Body / Antenna: in

Mode: CDMA / Channel: 363 (835.89MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

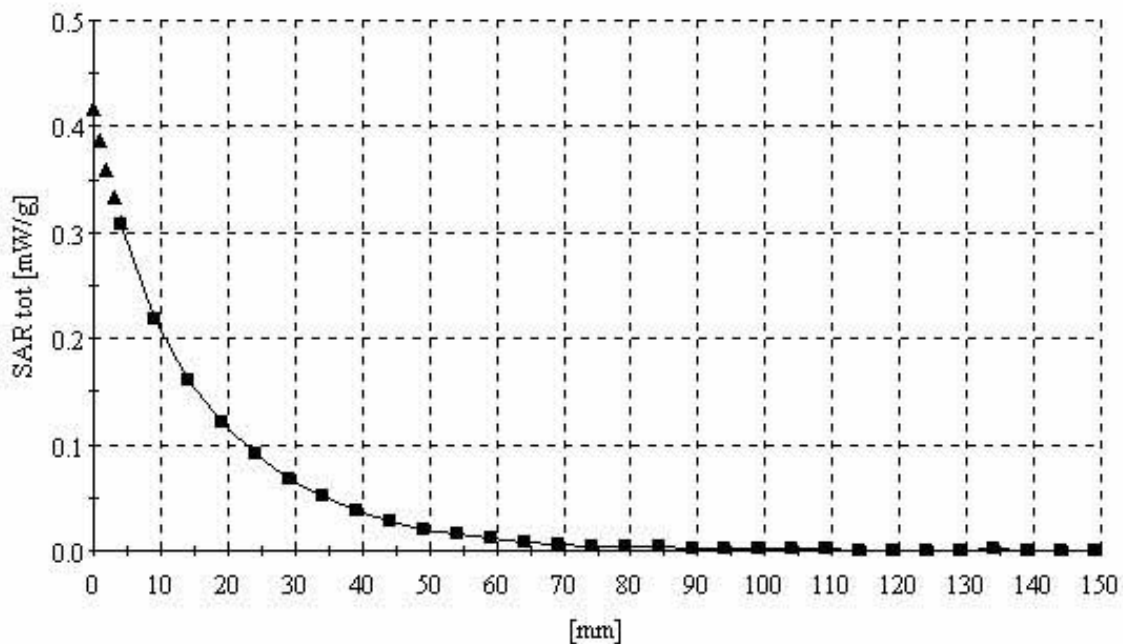

## C2000 (Body)

SAM II Phantom: Section: Position: ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.60,4.60,4.60); Crest factor: 1.0; Body 1900 MHz:  $s = 1.58$   
 $\rho_{ho}/m$   $e_r = 50.9$   $r = 1.00$   $g/cm^3$ 

:

Z-Axis:  $D_x = 0.0$ ,  $D_y = 0.0$ ,  $D_z = 5.0$ 

Comment:

MODEL: C2000

Company : UTStarcom Inc.

Test Position : Body / Antenna: out

Mode: PCS CDMA / Channel: 1175 (1908.75MHz)

Conducted Power : 25.0 dBm

Liquid Temperature: 21.4°C

Date Tested : February 17, 2005

