



SPOT CHECK REPORT

FCC ID: XMR2022EM060KGL
Applicant: Quectel Wireless Solutions Co., Ltd
Product: LTE-A Cat 6 M.2 Module
Model No.: EM060K-GL
Brand Name: Quectel
FCC Rule(s): Part 2, 22 (H), 24 (E), 27
Result: Complies
Received Date: 2023-09-22
Test Date: 2023-09-29 ~ 2023-10-09

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2309RSU052-U6	V01	Initial Report	2023-10-26	Valid

Note: This report is prepared for FCC Class II permissive supplement to FCC ID: XMR2022EM060KGL adding a new antenna & modify the tune up power and related data.

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology	7
2. Test Configuration	8
2.1. Test System Connnection Diagram	8
2.2. Test Environment Condition	8
3. Measuring Instrument	9
4. Decision Rules and Measurement Uncertainty.....	10
4.1. Decision Rules	10
4.2. Measurement Uncertainty	10
5. Test Result	11
5.1. Summary.....	11
5.2. Equivalent Isotropically Radiated Power Measurement	12
5.2.1. Test Limit	12
5.2.2. Test Procedure	12
5.2.3. Test Setting	12
5.2.4. Test Setup	13
5.2.5. Test Result	13
5.3. Radiated Spurious Emissions Measurement.....	14
5.3.1. Test Limit	14
5.3.2. Test Procedure	14
5.3.3. Test Setting	14
5.3.4. Test Setup	15
5.3.5. Test Result	15
Appendix A - Test Result	16
A.1 Equivalent Isotropically Radiated Power Test Result.....	16
A.2 Radiated Spurious Emissions Test Result	19
Appendix B - Test Setup Photograph	22

Appendix C - EUT Photograph	23
--	-----------

1. General Information

1.1. Applicant

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.2. Manufacturer

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	LTE-A Cat 6 M.2 Module
Model No.	EM060K-GL
Brand Name	Quectel
IMEI	Conducted sample: 867228050091049 Radiated sample: 857228050091213
3GPP Specification	WCDMA Band II/IV/V LTE FDD Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 66, 71 LTE TDD Band 38, 41, 42, 43, 46, 48
GNSS Specification	GPS, GLONASS, Bei Dou, Galileo
Temperature Operating Range	-25 ~ 75 °C
Power Supply Rating	3.135 ~ 4.4Vdc, typical 3.7Vdc
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

UMTS Specification	
TX Frequency Range:	WCDMA Band II: 1850 ~ 1910MHz, WCDMA Band IV: 1710 ~ 1755MHz WCDMA Band V: 824 ~ 849MHz
RX Frequency Range:	WCDMA Band II: 1930 ~ 1990MHz, WCDMA Band IV: 2110 ~ 2155MHz WCDMA Band V: 869 ~ 894MHz
Modulation	UL up to 16QAM, DL up to 64QAM
Power Class	3
Category	HSDPA: 24; HSUPA: 6

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
WCDMA Band II	1850 ~ 1910	Dipole PIFA	0.25
WCDMA Band IV	1710 ~ 1755		1.47
WCDMA Band V	824 ~ 849		1.10

Note 1: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

Note 2: The typical antennas used to calculate the ERP (EIRP).


1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 22, Part 24, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

2. Test Configuration

2.1. Test System Connection Diagram

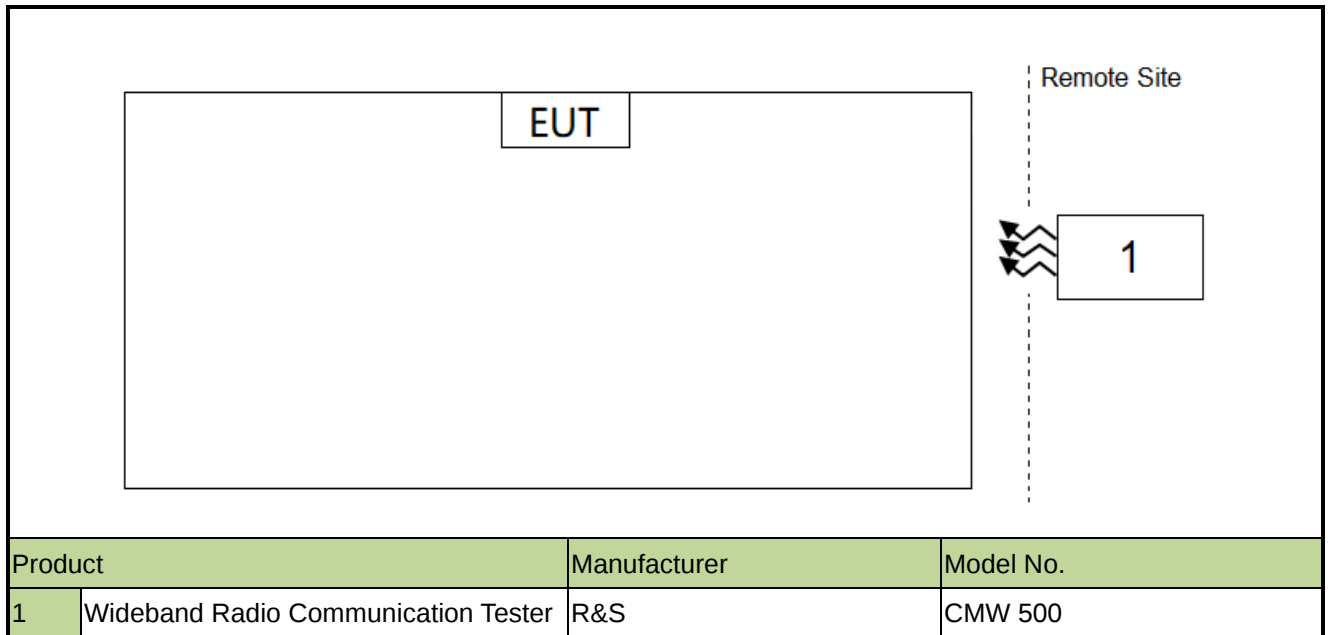

2.2. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2024-05-15	WZ-AC2
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2024-09-17	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2024-05-23	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Horn Antenna	ETS	3117	MRTSUE06257	1 year	2024-09-23	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2023-11-05	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2024-01-12	WZ-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2024-09-07	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2024-09-27	SIP-SR1
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2023-10-08	SIP-SR1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2024-01-03	SIP-SR1
Communication Tester	R&S	CMW500	MRTSUE06881	1 year	2024-05-23	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06905	N/A	N/A	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06906	N/A	N/A	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2023-12-28	SIP-SR1
Temperature Chamber	BAOYT	BYG-80CL	MRTSUE06932	1 year	2024-02-12	SIP-SR1
Shielding Room	MIX-BEP	SIP-SR1	MRTSUE06948	N/A	N/A	SIP-SR1

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9kHz~30MHz: 2.59dB
Coplanar:	9kHz~30MHz: 2.60dB
Horizontal:	30MHz~200MHz: 3.85dB
	200MHz~1GHz: 4.36dB
	1GHz~40GHz: 4.98dB
Vertical:	30MHz~200MHz: 4.06dB
	200MHz~1GHz: 5.28dB
	1GHz~40GHz: 4.91dB
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
1.5dB	

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
22.913(a)(5), 24.232(c) 27.50(d)(4)	Equivalent Radiated Power / Equivalent Isotropic Radiated Power	Conducted	Pass
2.1053, 22.917(a) 24.238(a), 27.53(h)	Spurious Emissions	Radiated	Pass

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

5.2. Equivalent Isotropically Radiated Power Measurement

5.2.1. Test Limit

Band 2:

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

Band 4:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Band 5:

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

5.2.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

5.2.4. Test Setup

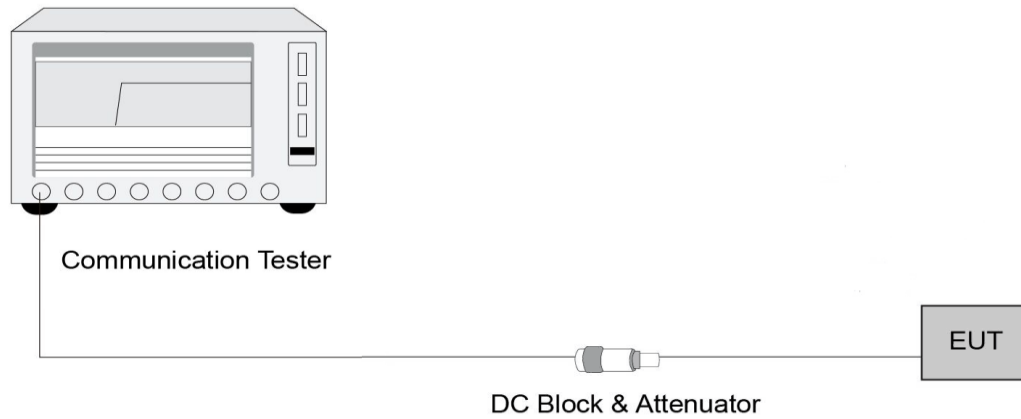

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Radiated Spurious Emissions Measurement

5.3.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

E (dB μ V/m) = EIRP (dBm) - $20 \log D$ + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m.

5.3.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.3.3. Test Setting


1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.3.4. Test Setup

Below 1GHz Test Setup:

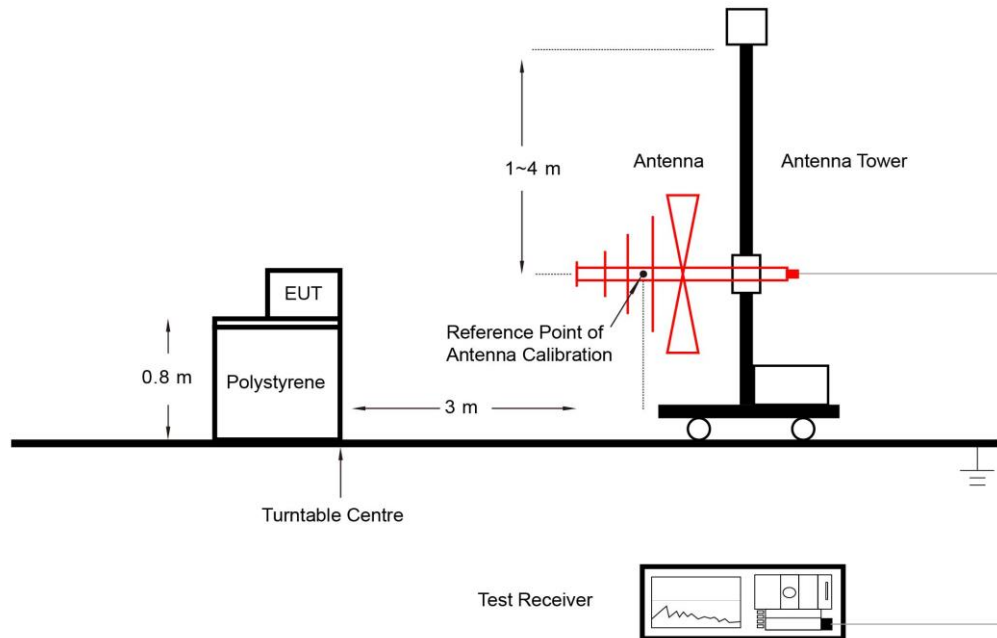

Above 1GHz Test Setup:

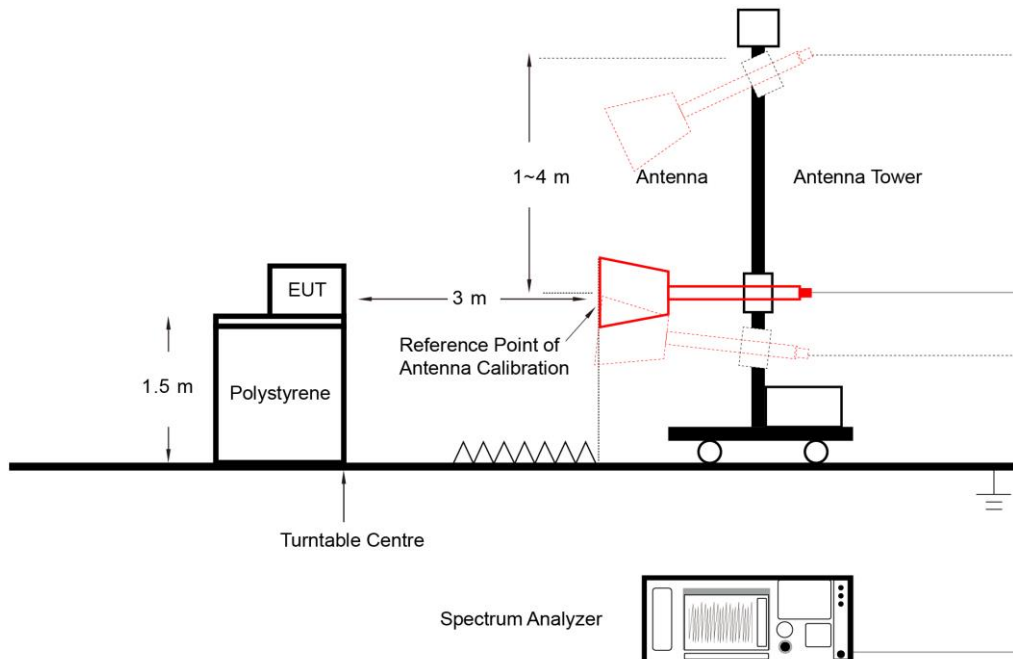

5.3.5. Test Result

Refer to Appendix A.2.

Appendix A - Test Result

A.1 Equivalent Isotropically Radiated Power Test Result

Test Site	SIP-SR1	Test Engineer	Yoniter Yang
Test Date	2023-10-08 ~ 2023-10-09	Test Band	WCDMA Band II

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Channel				Channel		
		Low	Middle	High		Low	Middle	High
WCDMA R99	1	23.55	23.60	23.67	0.25	23.80	23.85	23.92
HSDPA	1	22.54	22.65	22.72	0.25	22.79	22.90	22.97
	2	22.40	22.55	22.61	0.25	22.65	22.80	22.86
	3	21.93	22.08	22.14	0.25	22.18	22.33	22.39
	4	21.90	22.01	22.16	0.25	22.15	22.26	22.41
HSUPA	1	22.50	22.50	22.69	0.25	22.75	22.75	22.94
	2	20.39	20.40	20.47	0.25	20.64	20.65	20.72
	3	21.40	21.43	21.66	0.25	21.65	21.68	21.91
	4	20.38	20.52	20.59	0.25	20.63	20.77	20.84
	5	22.50	22.54	22.55	0.25	22.75	22.79	22.80
Limit	33.01dBm							

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Test Site	SIP-SR1	Test Engineer	Yoniter Yang
Test Date	2023-10-08 ~ 2023-10-09	Test Band	WCDMA Band IV

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Channel				Channel		
		Low	Middle	High		Low	Middle	High
WCDMA R99	1	23.53	23.59	23.51	1.47	25.00	25.06	24.98
HSDPA	1	22.49	22.61	22.52	1.47	23.96	24.08	23.99
	2	22.49	22.57	22.44	1.47	23.96	24.04	23.91
	3	21.98	22.10	21.98	1.47	23.45	23.57	23.45
	4	21.89	22.03	22.00	1.47	23.36	23.50	23.47
HSUPA	1	22.52	22.72	22.51	1.47	23.99	24.19	23.98
	2	20.46	20.56	20.38	1.47	21.93	22.03	21.85
	3	21.35	21.44	21.44	1.47	22.82	22.91	22.91
	4	20.53	20.54	20.48	1.47	22.00	22.01	21.95
	5	22.40	22.55	22.34	1.47	23.87	24.02	23.81
Limit	30.00dBm							

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Test Site	SIP-SR1	Test Engineer	Yoniter Yang
Test Date	2023-10-08 ~ 2023-10-09	Test Band	WCDMA Band V

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	ERP (dBm)		
		Channel				Channel		
		Low	Middle	High		Low	Middle	High
WCDMA R99	1	23.61	23.54	23.48	1.1	22.56	22.49	22.43
HSDPA	1	22.62	22.58	22.51	1.1	21.57	21.53	21.46
	2	22.62	22.56	22.48	1.1	21.57	21.51	21.43
	3	22.10	22.02	22.02	1.1	21.05	20.97	20.97
	4	22.09	22.08	22.01	1.1	21.04	21.03	20.96
HSUPA	1	22.55	22.52	22.50	1.1	21.50	21.47	21.45
	2	20.65	20.65	20.54	1.1	19.60	19.60	19.49
	3	21.64	21.46	21.34	1.1	20.59	20.41	20.29
	4	20.64	20.55	20.54	1.1	19.59	19.50	19.49
	5	22.50	22.48	22.44	1.1	21.45	21.43	21.39
Limit	38.45dBm							

Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) – 2.15

A.2 Radiated Spurious Emissions Test Result

Test Site	WZ-AC2	Test Engineer	Carl Jiang
Test Date	2023-09-29 ~ 2023-09-30	Test Band	WCDMA Band II

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Middle Channel							
10928.000	32.0	16.9	48.9	82.3	-33.4	Peak	Horizontal
14515.000	32.5	18.6	51.1	82.3	-31.2	Peak	Horizontal
11480.500	31.6	17.5	49.1	82.3	-33.2	Peak	Vertical
14940.000	32.2	19.7	51.9	82.3	-30.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Test Site	WZ-AC2	Test Engineer	Carl Jiang
Test Date	2023-09-29 ~ 2023-09-30	Test Band	WCDMA Band IV

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Middle Channel							
3482.000	46.4	-1.3	45.1	82.3	-37.2	Peak	Horizontal
13478.000	31.5	19.5	51.0	82.3	-31.3	Peak	Horizontal
10919.500	31.8	16.8	48.6	82.3	-33.7	Peak	Vertical
14923.000	31.8	19.6	51.4	82.3	-30.9	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)							
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).							

Test Site	WZ-AC2	Test Engineer	Carl Jiang
Test Date	2023-09-29 ~ 2023-09-30	Test Band	WCDMA Band V

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Middle Channel							
5080.000	34.8	3.5	38.3	82.3	-44.0	Peak	Horizontal
13478.000	31.1	19.5	50.6	82.3	-31.7	Peak	Horizontal
7638.500	33.2	11.5	44.7	82.3	-37.6	Peak	Vertical
15016.500	32.5	19.5	52.0	82.3	-30.3	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)							
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).							

Appendix B - Test Setup Photograph

Refer to “2309RSU052-UT” file.

Appendix C - EUT Photograph

Refer to “2309RSU052-UE” file.