



# RF TEST REPORT

**Applicant**      Espressif Systems (Shanghai)Co.,Ltd.  
**FCC ID**          2AC7Z-ESPC3WROOM  
**Product**        Wi-Fi & Bluetooth Internet of Things Module  
**Brand**           ESPRESSIF  
**Model**           ESP32-C3-WROOM-02  
**Report No.**     R2106A0492-R1  
**Issue Date**     April 24, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## ABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location .....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards .....	6
4. Test Configuration .....	7
5. Test Case Results .....	8
5.1. Maximum output power .....	8
5.2. 99% Bandwidth and 6dB Bandwidth .....	11
5.3. Band Edge .....	26
5.4. Power Spectral Density .....	36
5.5. Spurious RF Conducted Emissions.....	46
5.6. Unwanted Emission .....	59
5.7. Conducted Emission .....	127
6. Main Test Instruments.....	130
ANNEX A: The EUT Appearance .....	131
ANNEX B: Test Setup Photos .....	132

## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: April 11, 2022 ~ April 24, 2022			
Date of Sample Received: June 11, 2021			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Espressif Systems (Shanghai) Co.,Ltd.
Applicant address	Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China
Manufacturer	Espressif Systems (Shanghai) Co.,Ltd.
Manufacturer address	Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

### 2.2. General information

EUT Description	
Model	ESP32-C3-WROOM-02
Lab internal SN	R2106A0492/S01
Hardware Version	V1.6
Software Version	V1.1.3.0
Power Supply	External power supply
Antenna Type	PCB Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	3.26dBi
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz Bluetooth LE V5.0: 2402 ~2480 MHz
Modulation Type	802.11b: DSSS 802.11g/n(HT20/HT40): OFDM Bluetooth LE: GFSK
Max. Conducted Power	Wi-Fi 2.4G: 17.56dBm Bluetooth LE: 8.52dBm
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.	



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2021) Radio Frequency Devices**

**ANSI C63.10 (2013)**

**Reference standard:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth(Low Energy)	1Mbps 2Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

## 5. Test Case Results

### 5.1. Maximum output power


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.



## Test Results

Power Index					
Channel	802.11b	802.11g	802.11n HT20	Channel	802.11n HT40
CH1	4	16	20	CH3	24
CH2	/	8	4	CH4	8
CH3	/	0	0	CH5	8
CH4	/	/	/	CH6	0
CH6	4	0	0	CH7	12
CH8	/	0	0	CH8	20
CH9	/	4	0	CH9	20
CH10	/	8	8	/	/
CH11	4	24	24	/	/

Test Mode	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	1.00	1.00	1.00	0.00
802.11g	1.00	1.00	1.00	0.00
802.11n HT20	1.00	1.00	1.00	0.00
802.11n HT40	2.46	2.50	0.98	0.00
Bluetooth LE (1M)	2.10	2.51	0.837	0.775
Bluetooth LE (2M)	1.06	1.88	0.564	2.489

Note: when Duty cycle≥0.98, Duty cycle correction Factor not required.

Test Mode	Carrier frequency (MHz) )/ Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412/CH 1	17.09	17.09	30	PASS
	2437/CH 6	17.21	17.21	30	PASS
	2462/CH11	17.56	17.56	30	PASS
802.11g	2412/CH 1	13.35	13.35	30	PASS
	2417/CH 2	15.40	15.40	30	PASS
	2422/CH 3	17.09	17.09	30	PASS
	2437/CH 6	17.36	17.36	30	PASS
	2447/CH 8	17.56	17.56	30	PASS
	2452/CH 9	16.82	16.82	30	PASS



	2457/CH 10	16.01	16.01	30	PASS
	2462/CH11	11.82	11.82	30	PASS
802.11n HT20	2412/CH 1	11.45	11.45	30	PASS
	2417/CH 2	15.49	15.49	30	PASS
	2422/CH 3	16.57	16.57	30	PASS
	2437/CH 6	16.45	16.45	30	PASS
	2447/CH 8	16.64	16.64	30	PASS
	2452/CH 9	17.02	17.02	30	PASS
	2457/CH 10	15.14	15.14	30	PASS
	2462/CH11	11.02	11.02	30	PASS
802.11n HT40	2422/CH3	8.60	8.60	30	PASS
	2427/CH4	13.73	13.73	30	PASS
	2432/CH5	13.87	13.87	30	PASS
	2437/CH6	15.66	15.66	30	PASS
	2442/CH7	12.72	12.72	30	PASS
	2447/CH8	10.78	10.78	30	PASS
	2452/CH9	11.07	11.07	30	PASS
Bluetooth (Low Energy) (1M)	2402/CH0	7.27	8.04	30	PASS
	2440/CH19	7.74	8.51	30	PASS
	2480/CH39	6.90	7.67	30	PASS
Bluetooth (Low Energy) (2M)	2402/CH0	5.72	8.21	30	PASS
	2440/CH19	5.94	8.43	30	PASS
	2480/CH39	6.03	8.52	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

## 5.2. 99% Bandwidth and 6dB Bandwidth

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.  
Detector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:**

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	12.942	7.52	500	PASS
	2437	12.954	9.47	500	PASS
	2462	12.930	9.28	500	PASS
802.11g	2412	16.688	16.36	500	PASS
	2417	16.720	16.53	500	PASS
	2422	16.851	16.38	500	PASS
	2437	16.804	16.36	500	PASS
	2447	16.854	16.41	500	PASS
	2452	16.771	16.36	500	PASS
	2457	16.734	16.34	500	PASS
	2462	16.700	16.36	500	PASS
802.11n HT20	2412	17.853	17.60	500	PASS
	2417	17.874	17.59	500	PASS
	2422	17.916	17.66	500	PASS
	2437	17.902	17.80	500	PASS
	2447	17.895	17.57	500	PASS
	2452	17.909	17.60	500	PASS
	2457	17.877	17.61	500	PASS
	2462	17.892	17.61	500	PASS
802.11n HT40	2422	34.337	32.50	500	PASS
	2427	34.284	30.60	500	PASS
	2432	34.217	30.62	500	PASS
	2437	34.292	32.21	500	PASS
	2442	34.240	32.49	500	PASS
	2447	34.205	30.66	500	PASS
	2452	34.386	31.54	500	PASS




Bluetooth (Low Energy) (1M)	2402	1.030	0.65	500	PASS
	2440	1.033	0.63	500	PASS
	2480	1.030	0.64	500	PASS
Bluetooth (Low Energy) (2M)	2402	2.045	1.12	500	PASS
	2440	2.049	1.25	500	PASS
	2480	2.044	1.07	500	PASS




## 99%bandwidth

802.11b, Carrier frequency (MHz): 2412

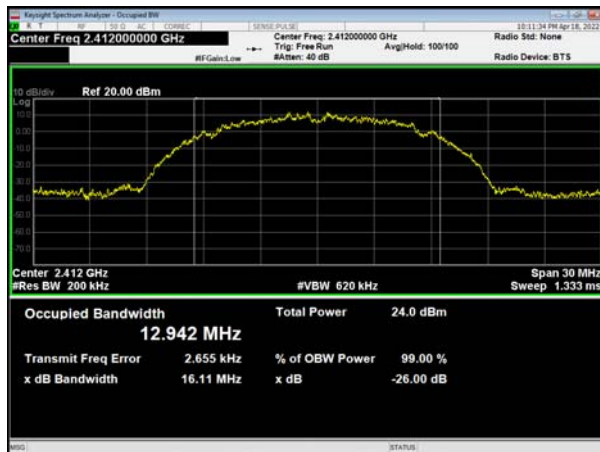

802.11g, Carrier frequency (MHz): 2412

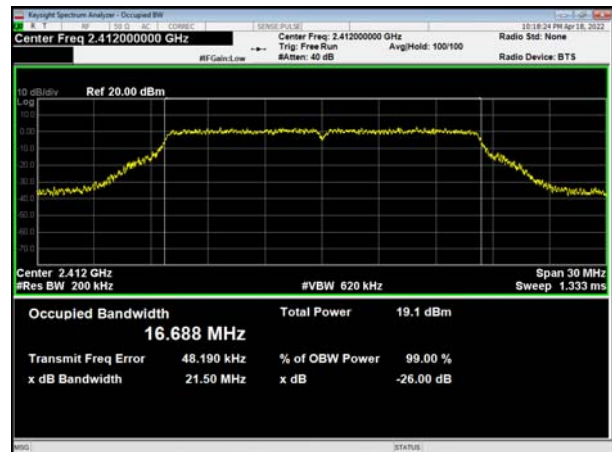


802.11b, Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2417




802.11b, Carrier frequency (MHz): 2462

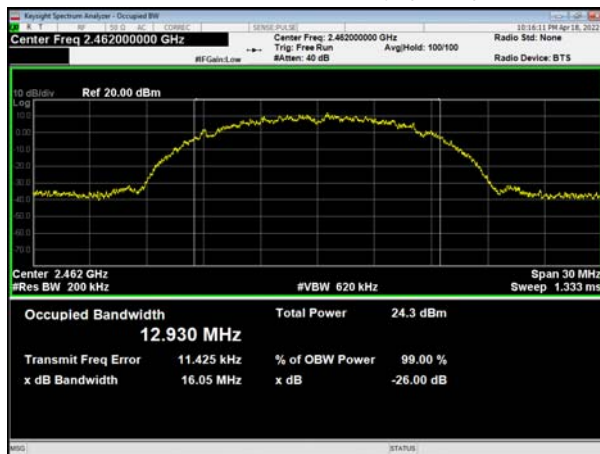


802.11g, Carrier frequency (MHz): 2422



## 802.11g, Carrier frequency (MHz): 2437

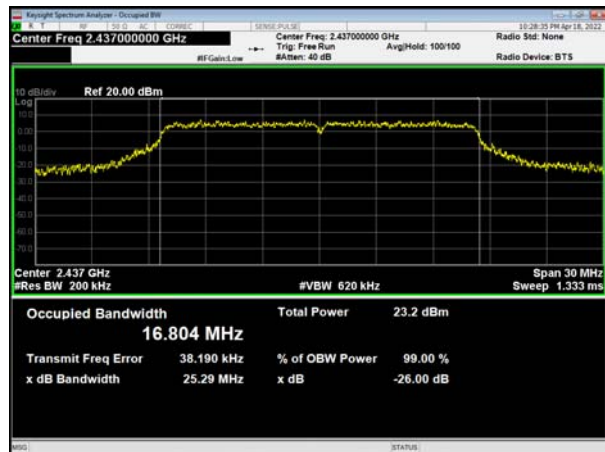

## 802.11g, Carrier frequency (MHz): 2452

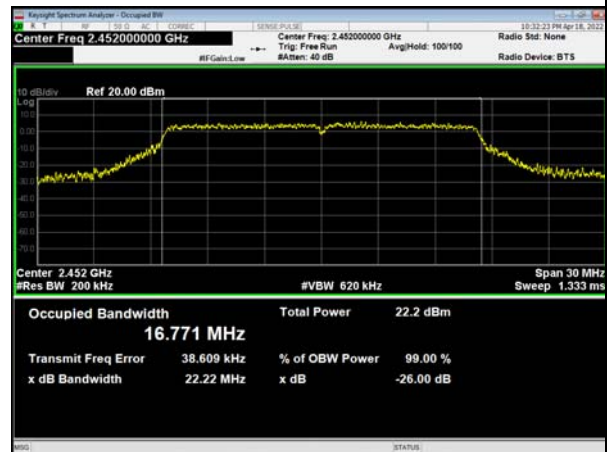


## 802.11g, Carrier frequency (MHz):2447



## 802.11g, Carrier frequency (MHz): 2457




## 802.11g, Carrier frequency (MHz):2462

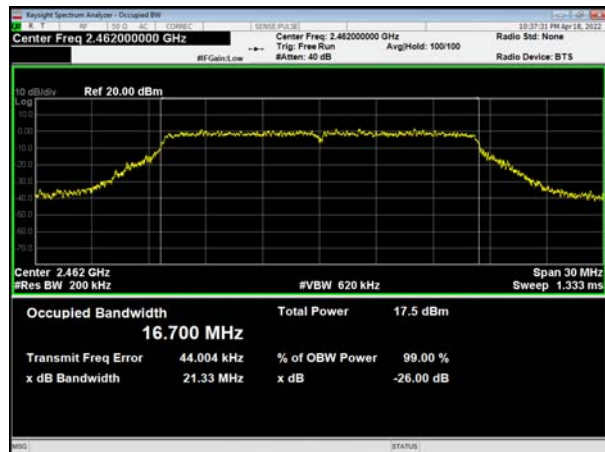







## 802.11n(HT20), Carrier frequency (MHz): 2412

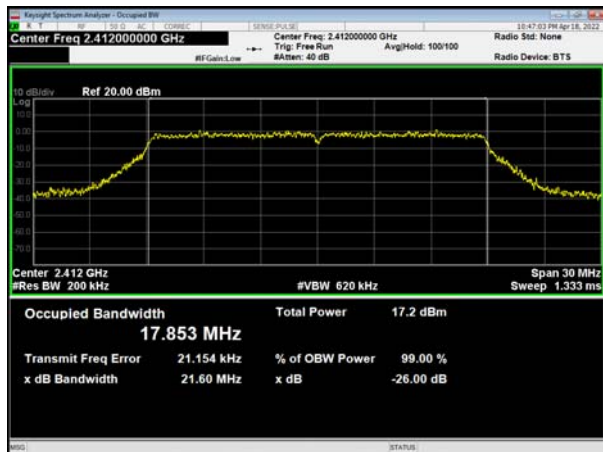


## 802.11n(HT20), Carrier frequency (MHz): 2437

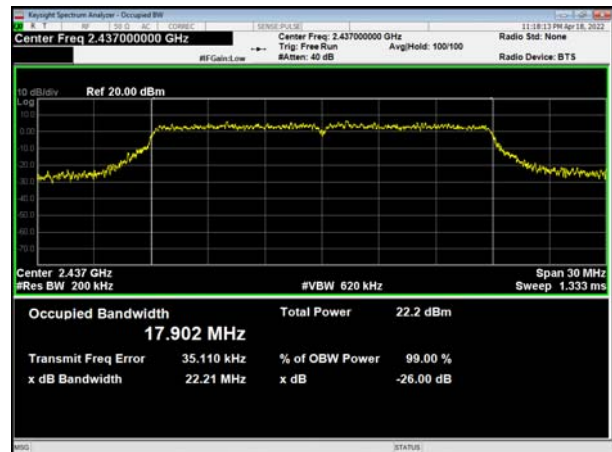


## 802.11n(HT20), Carrier frequency (MHz): 2417

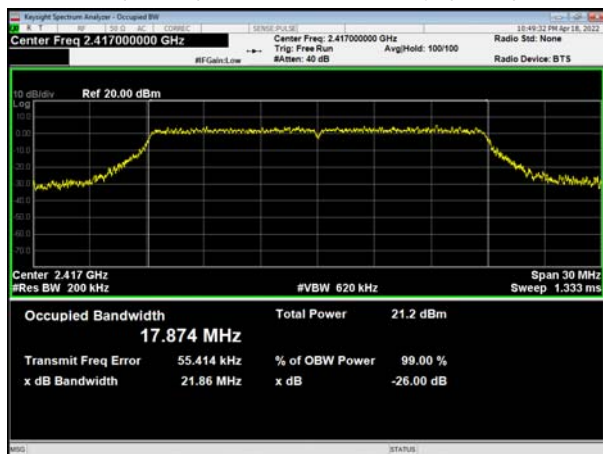


## 802.11n(HT20), Carrier frequency (MHz): 2447

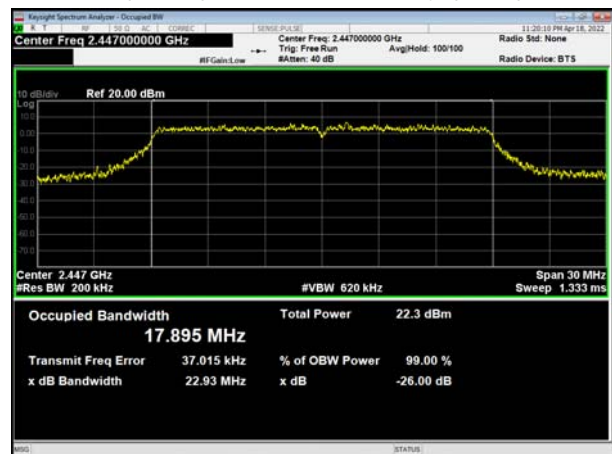

## 802.11n(HT20), Carrier frequency (MHz): 2422

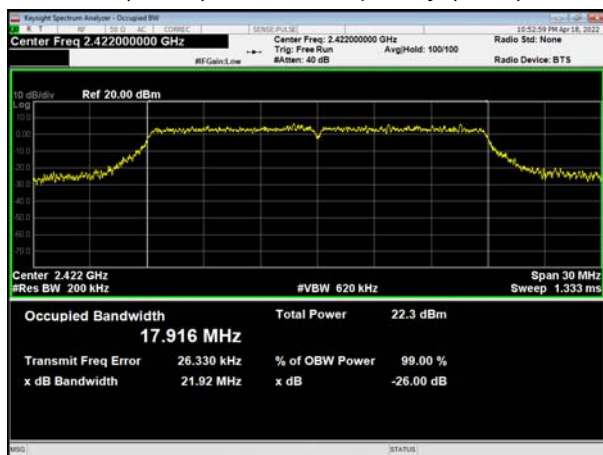


## 802.11n(HT20), Carrier frequency (MHz): 2452

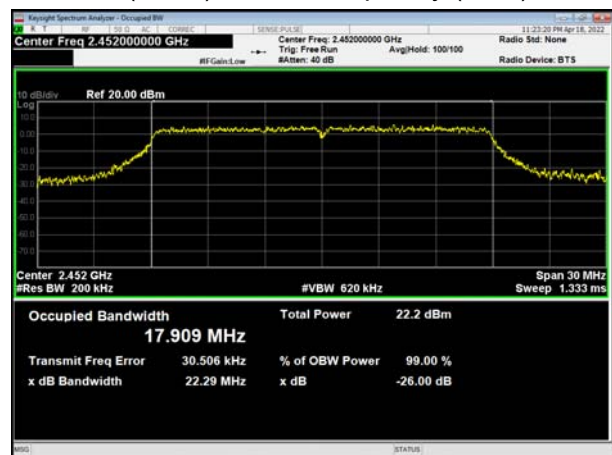




802.11n(HT20), Carrier frequency (MHz): 2457

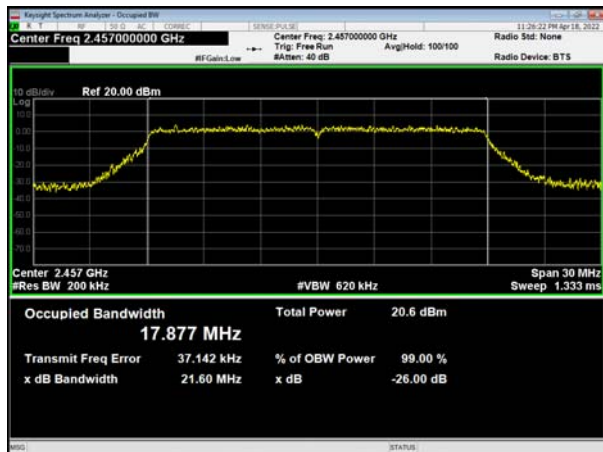


802.11n(HT40), Carrier frequency (MHz): 2427

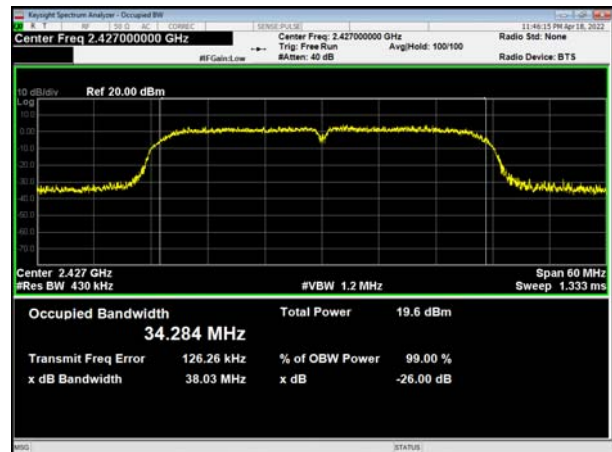


802.11n(HT20), Carrier frequency (MHz): 2462




802.11n(HT40), Carrier frequency (MHz): 2432

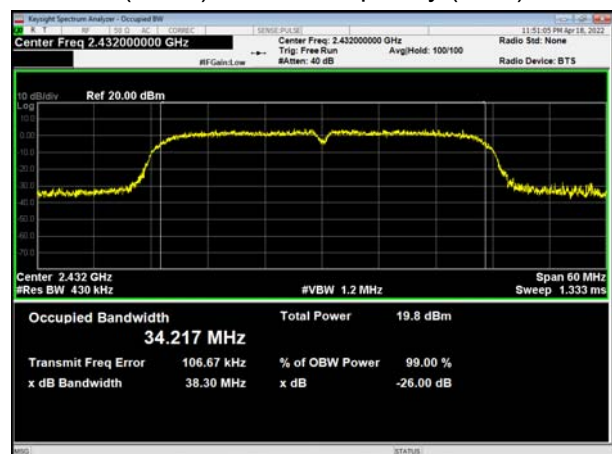


802.11n(HT40), Carrier frequency (MHz): 2422

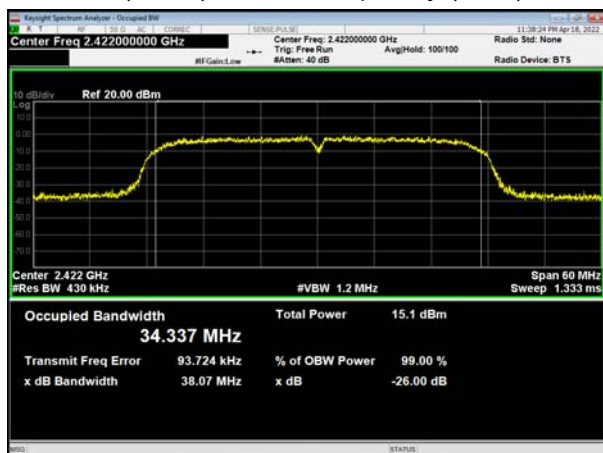


802.11n(HT40), Carrier frequency (MHz): 2437

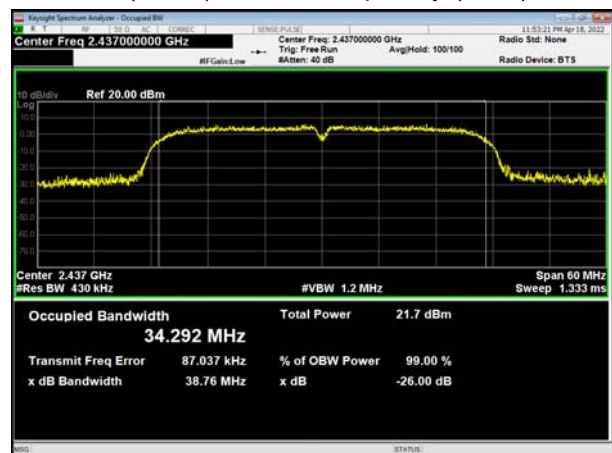


## 802.11n(HT40), Carrier frequency (MHz): 2442

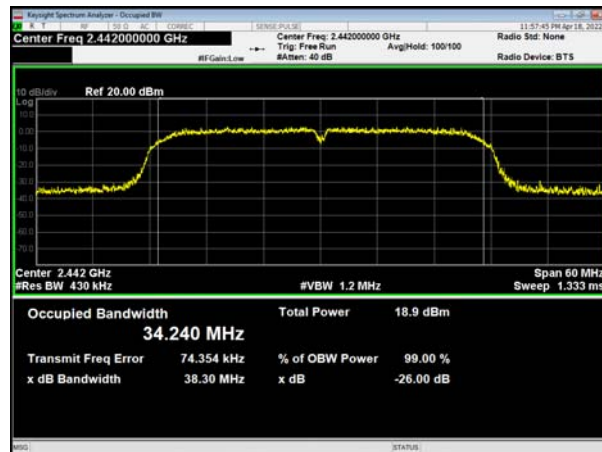

## 802.11n(HT40), Carrier frequency (MHz): 2447

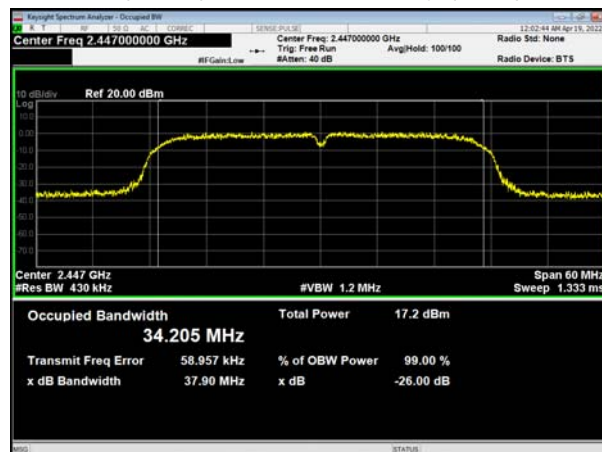

## 802.11n(HT40), Carrier frequency (MHz): 2452

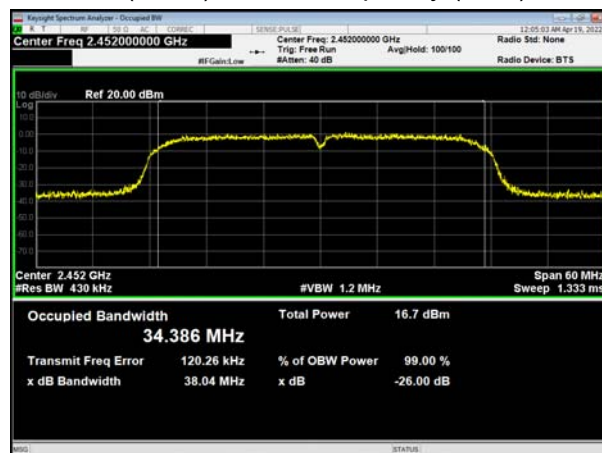

### Bluetooth LE (1M) Carrier frequency (MHz): 2402




### Bluetooth LE (2M) Carrier frequency (MHz): 2402




### Bluetooth LE (1M) Carrier frequency (MHz): 2440



### Bluetooth LE (2M) Carrier frequency (MHz): 2440

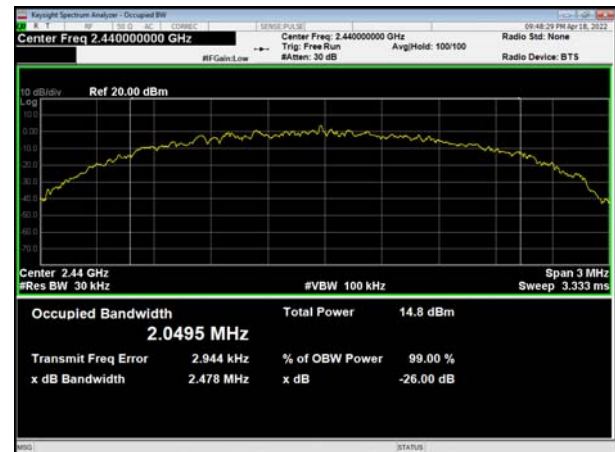

### Bluetooth LE (1M) Carrier frequency (MHz): 2480

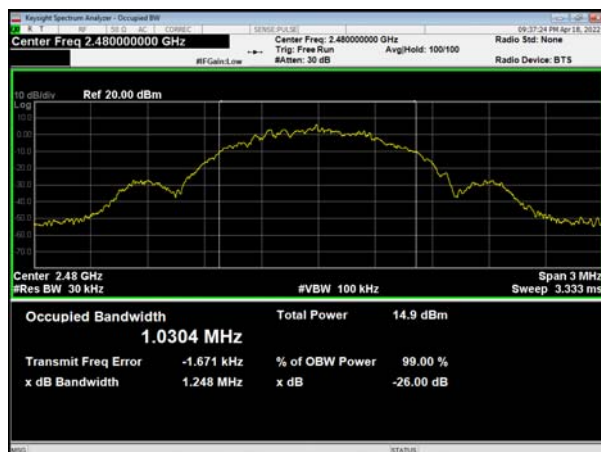

### Bluetooth LE (2M) Carrier frequency (MHz): 2480






## 6 dB bandwidth


802.11b, Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2412

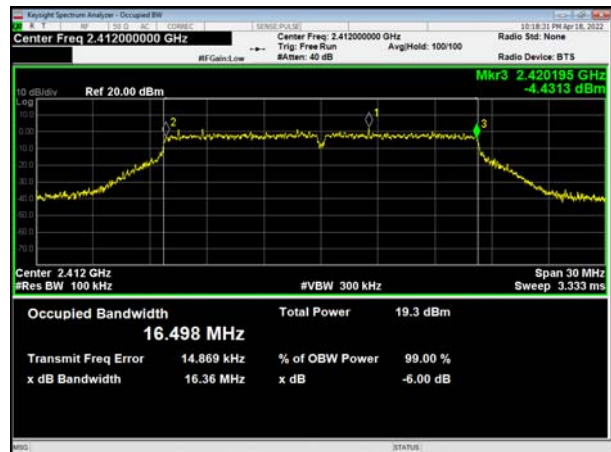

802.11b, Carrier frequency (MHz): 2437

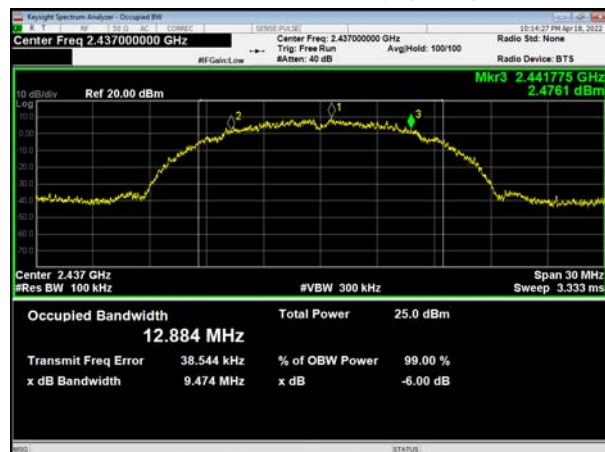

802.11g, Carrier frequency (MHz): 2417



802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2422






802.11g, Carrier frequency (MHz): 2437

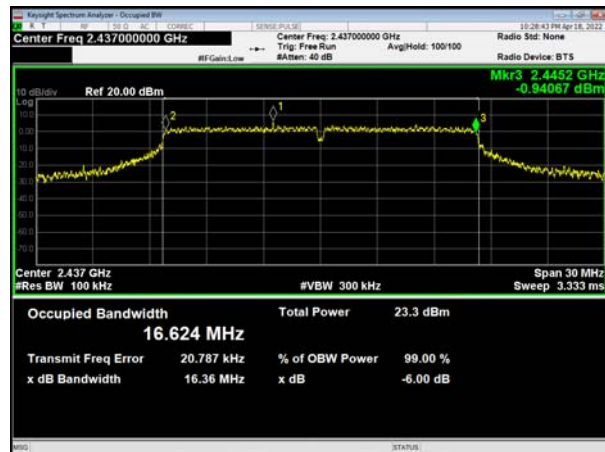

802.11g, Carrier frequency (MHz): 2452

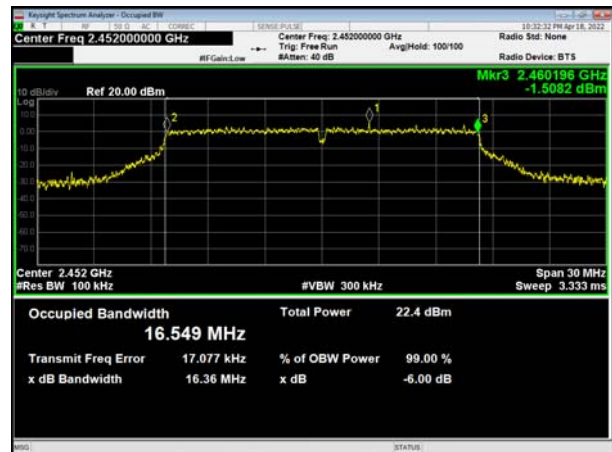

802.11g, Carrier frequency (MHz):2447



802.11g, Carrier frequency (MHz): 2457



802.11g, Carrier frequency (MHz):2462



802.11n(HT20), Carrier frequency (MHz): 2412




802.11n(HT20), Carrier frequency (MHz): 2437




802.11n(HT20), Carrier frequency (MHz): 2417




802.11n(HT20), Carrier frequency (MHz): 2447

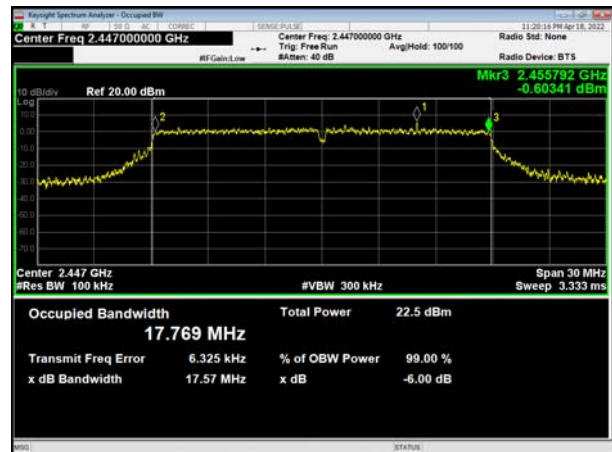

802.11n(HT20), Carrier frequency (MHz): 2422

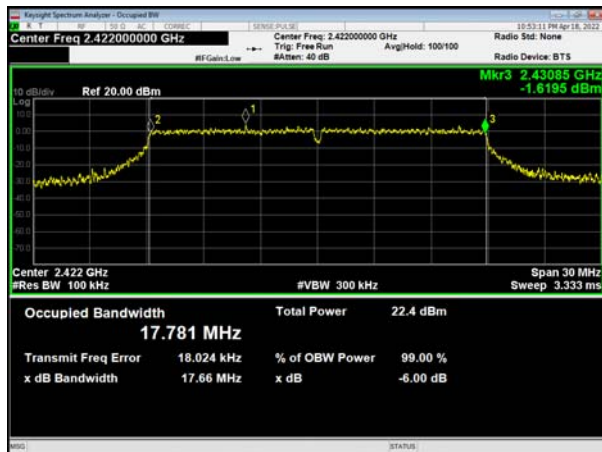


802.11n(HT20), Carrier frequency (MHz): 2452

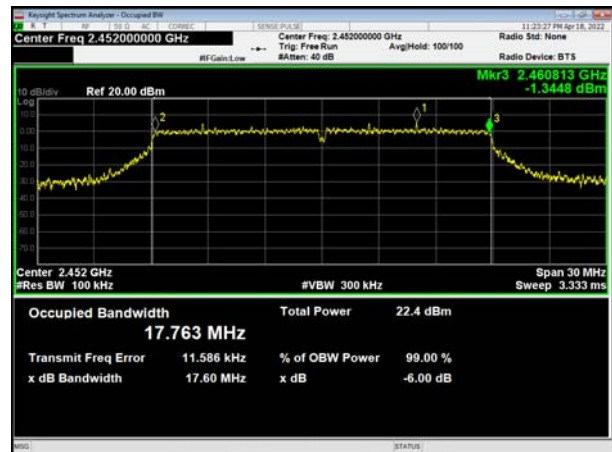


802.11n(HT20), Carrier frequency (MHz): 2457




802.11n(HT40), Carrier frequency (MHz): 2427

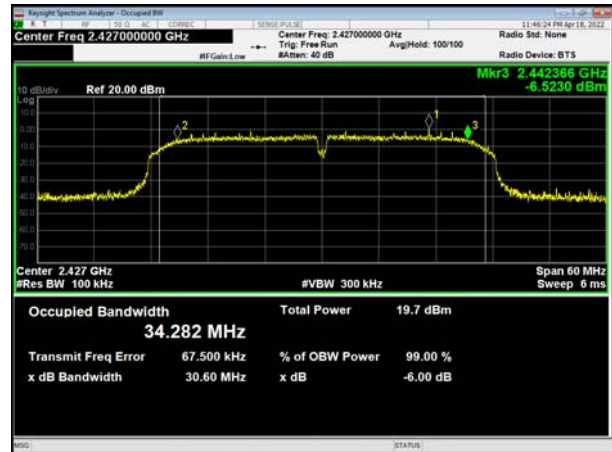


802.11n(HT20), Carrier frequency (MHz): 2462

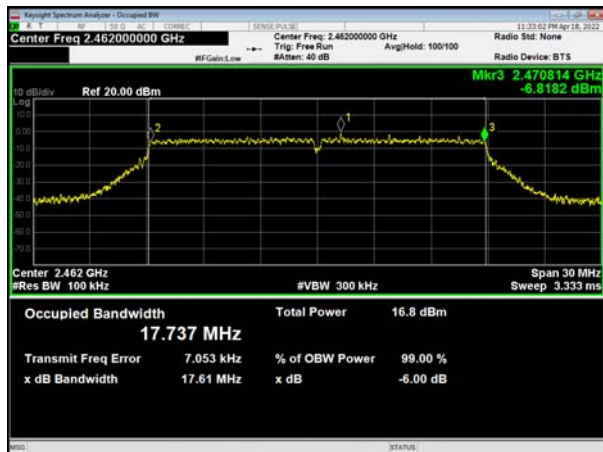


802.11n(HT40), Carrier frequency (MHz): 2432

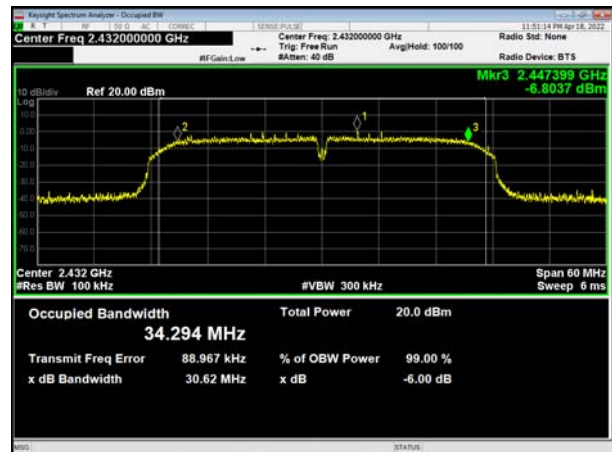

802.11n(HT40), Carrier frequency (MHz): 2422

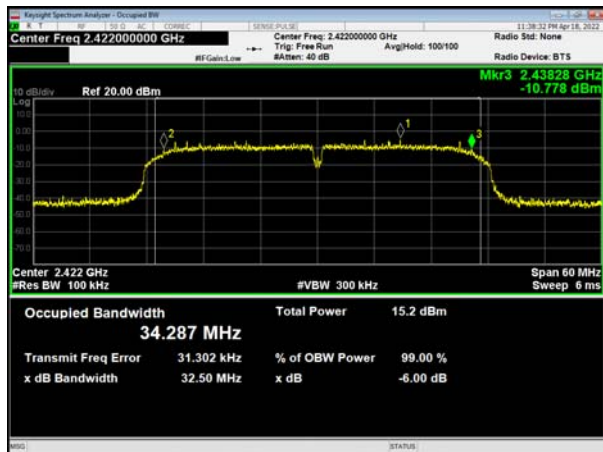


802.11n(HT40), Carrier frequency (MHz): 2437

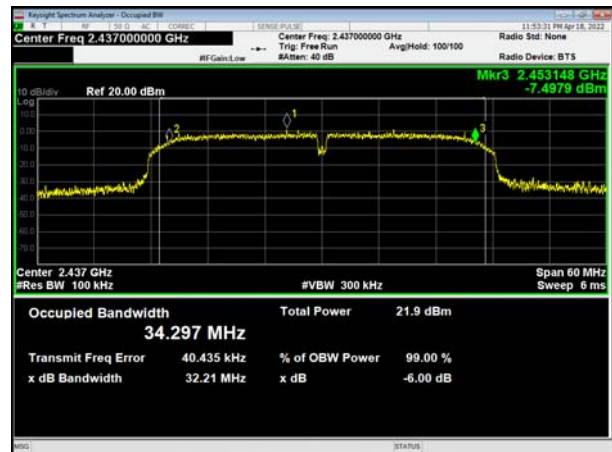


## 802.11n(HT40), Carrier frequency (MHz): 2442



## 802.11n(HT40), Carrier frequency (MHz): 2447

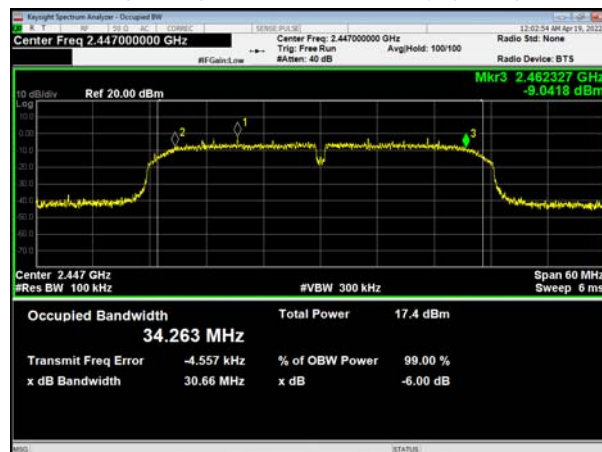


## 802.11n(HT40), Carrier frequency (MHz): 2452

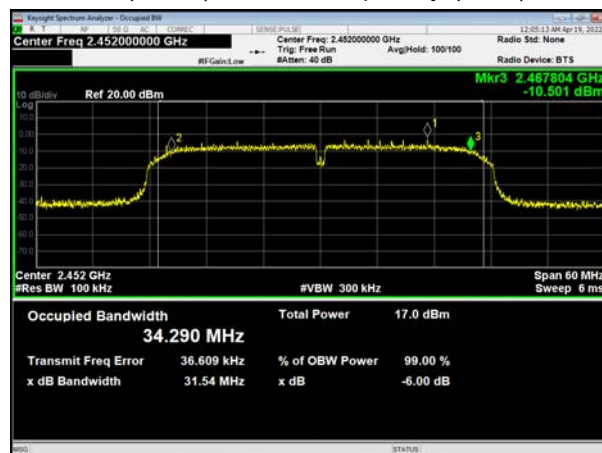




### Bluetooth LE (1M) Carrier frequency (MHz): 2402

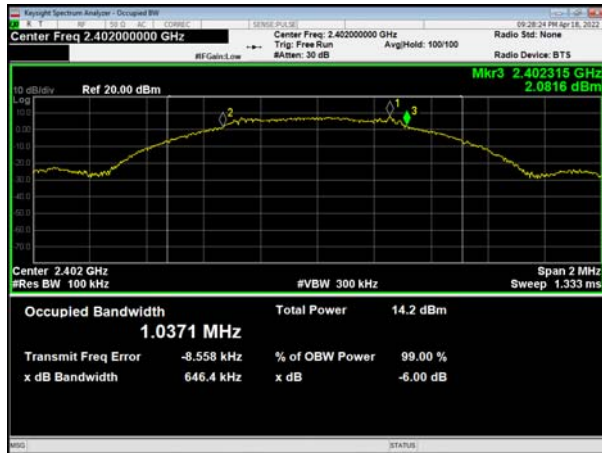

### Bluetooth LE (2M) Carrier frequency (MHz): 2402

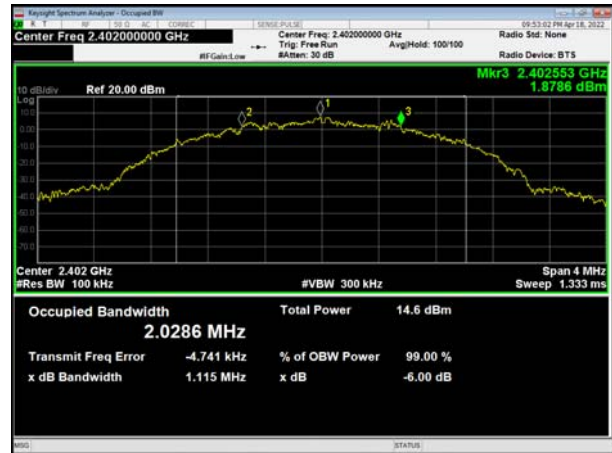

### Bluetooth LE (1M) Carrier frequency (MHz): 2440



### Bluetooth LE (2M) Carrier frequency (MHz): 2440



### Bluetooth LE (1M) Carrier frequency (MHz): 2480



### Bluetooth LE (2M) Carrier frequency (MHz): 2480



### 5.3. Band Edge


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup



#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

#### Measurement Uncertainty



The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
2GHz-3GHz	1.407 dB




## Test Results: PASS


## 802.11b, Channel No.: 1

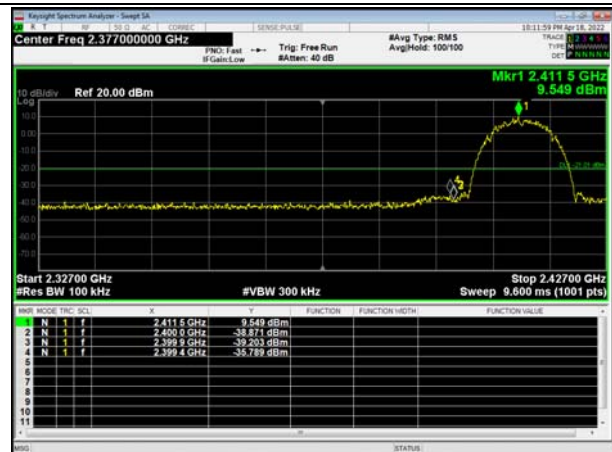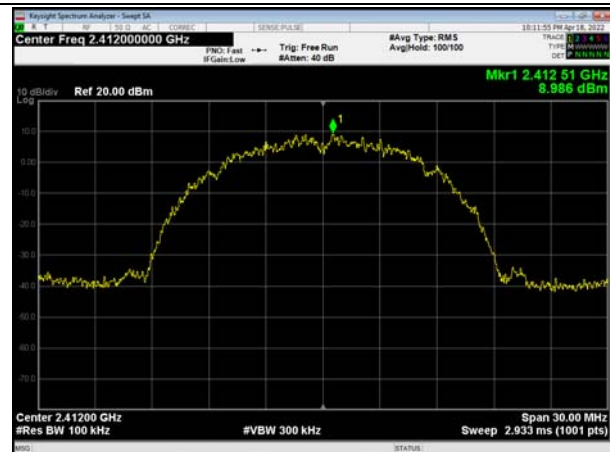

## 802.11b, Channel No.: 11

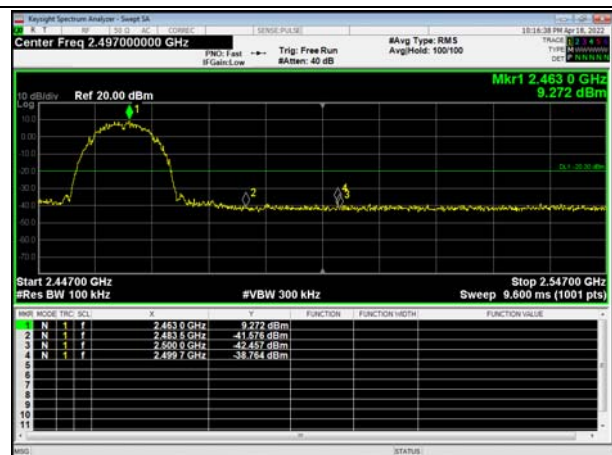


## 802.11g, Channel No.: 1

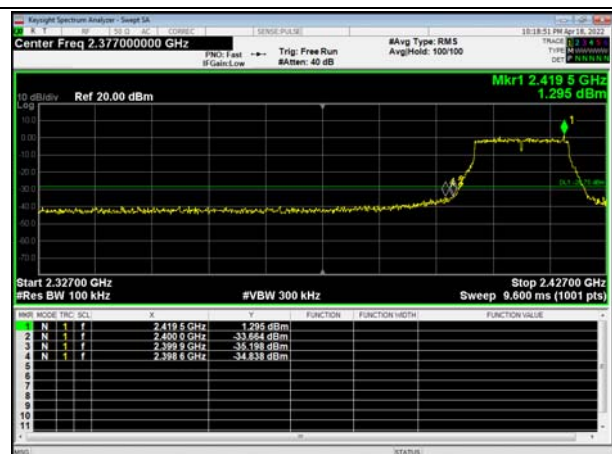



## 802.11g, Channel No.: 2

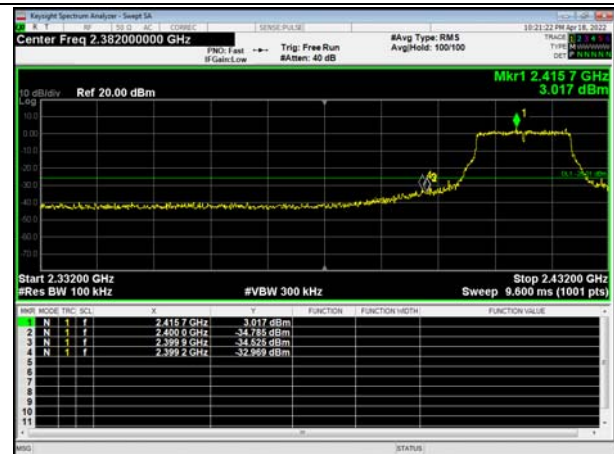

## 802.11g, Channel No.: 3





## 802.11g, Channel No.: 8



## 802.11g, Channel No.: 9





## 802.11g, Channel No.: 10







## 802.11g, Channel No.: 11

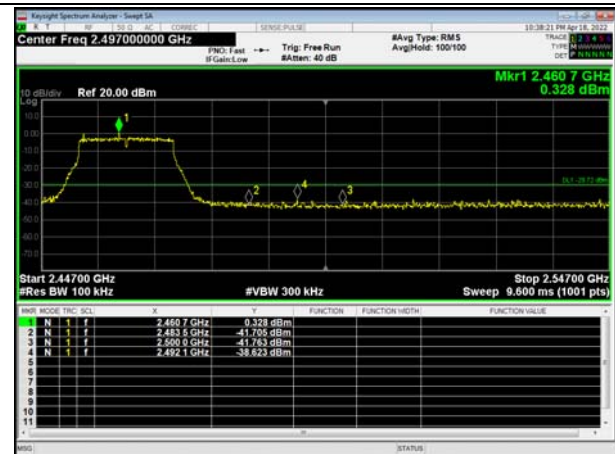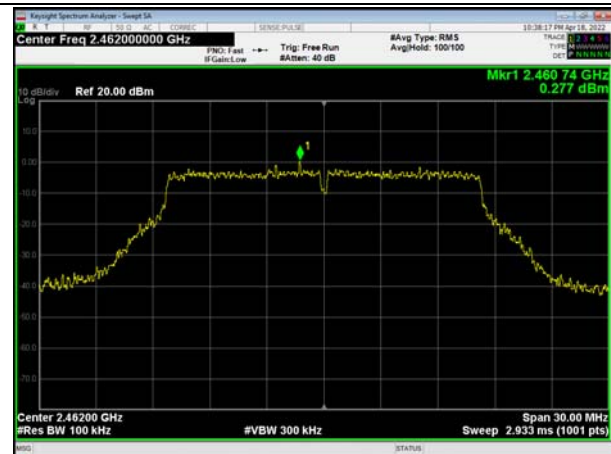

## 802.11n(HT20), Channel No. 1


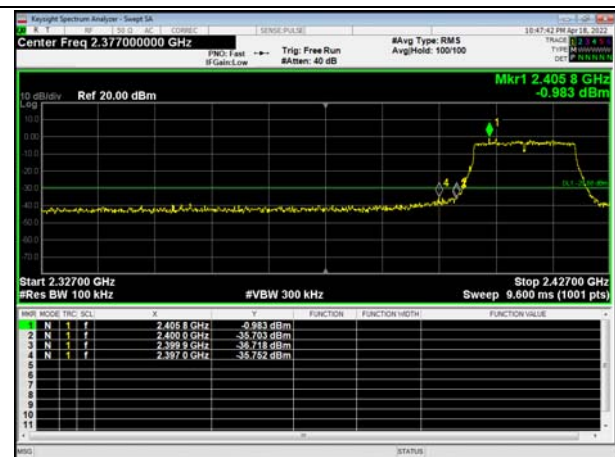


## 802.11n(HT20), Channel No. 2

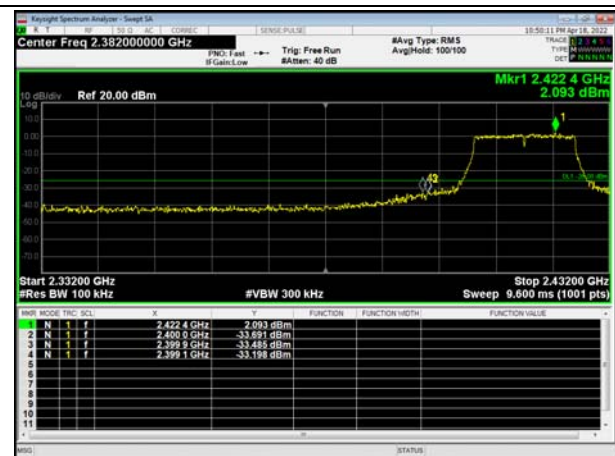





## 802.11n(HT20), Channel No. 3

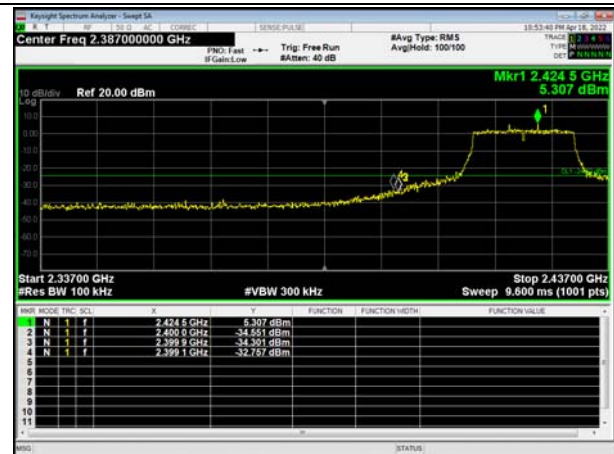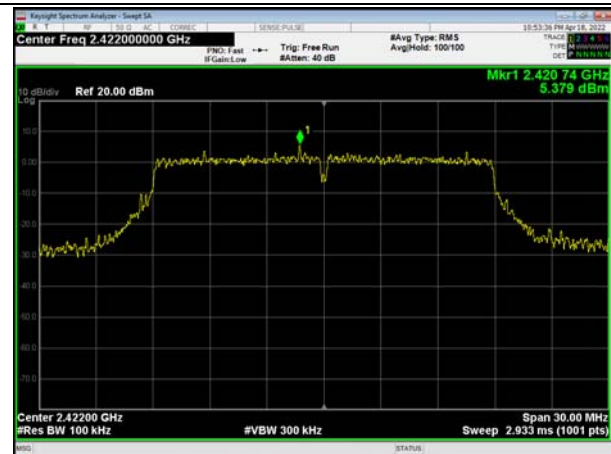

## 802.11n(HT20), Channel No. 8

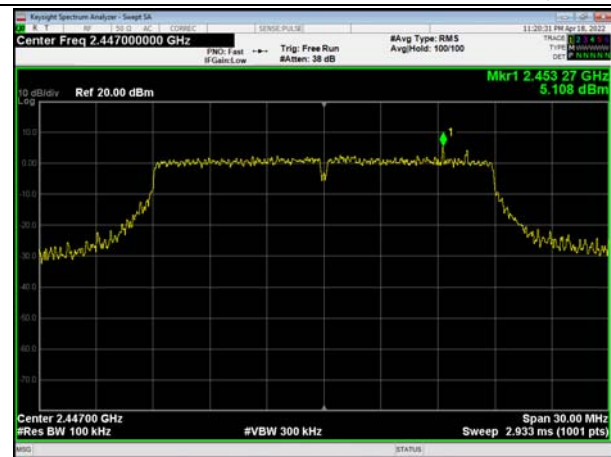

## 802.11n(HT20), Channel No. 9


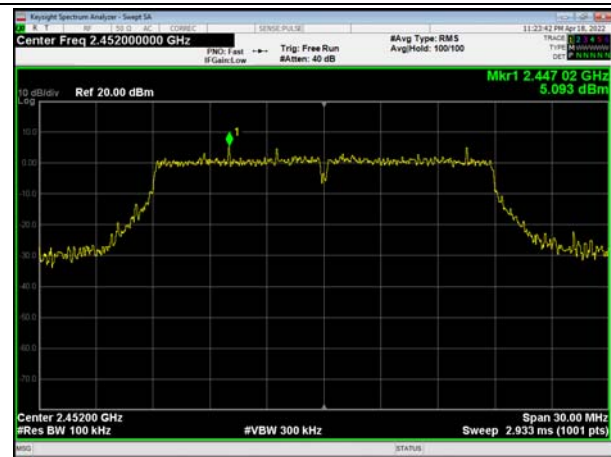





## 802.11n(HT20), Channel No. 10



## 802.11n(HT20), Channel No. 11

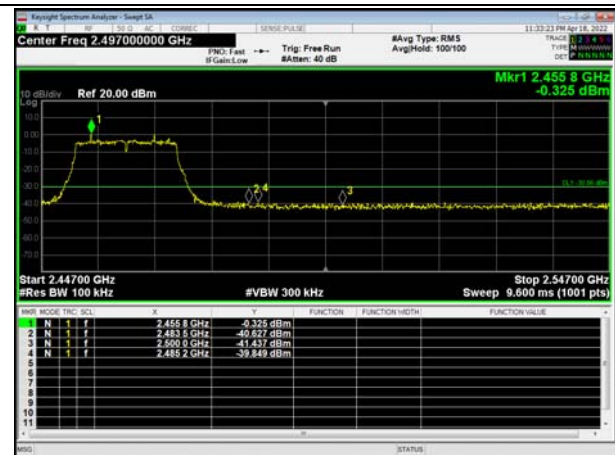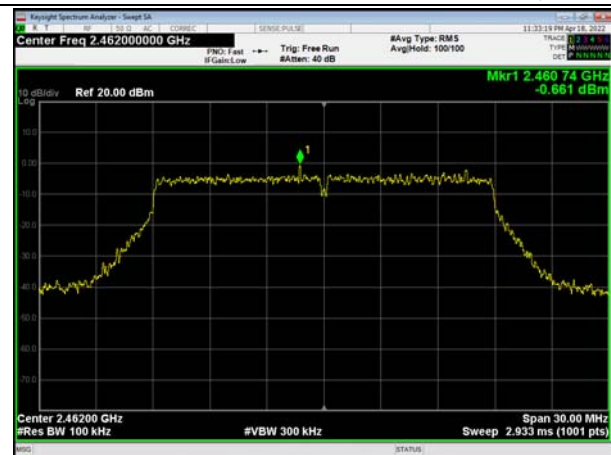


## 802.11n(HT40), Channel No. 3

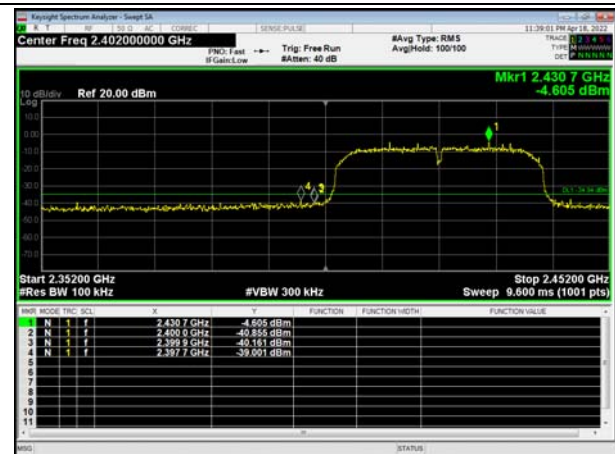







## 802.11n(HT40), Channel No. 4

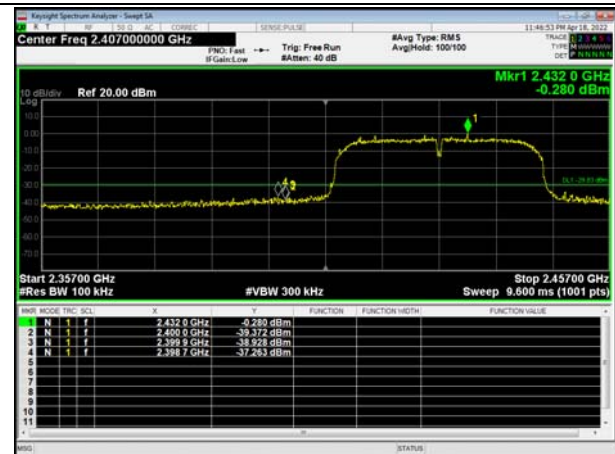


## 802.11n(HT40), Channel No. 5

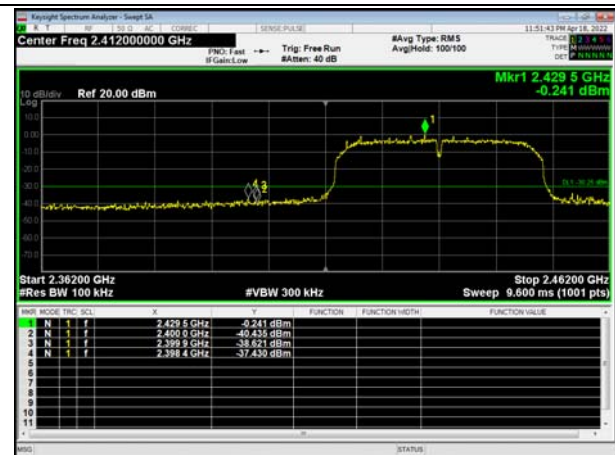


## 802.11n(HT40), Channel No. 7

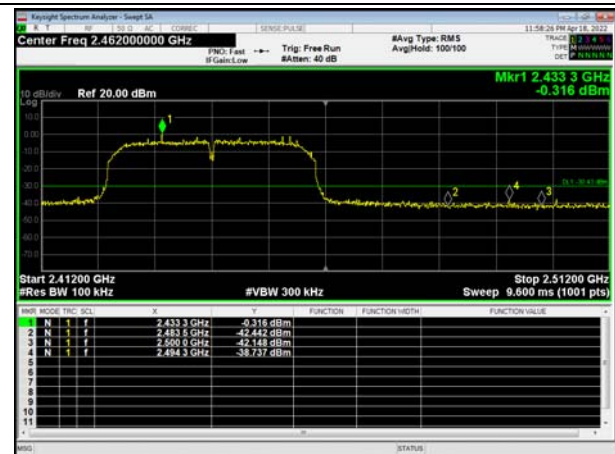



## 802.11n(HT40), Channel No. 8

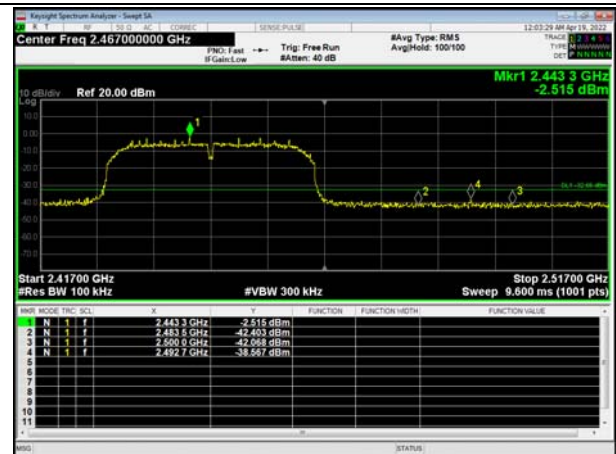

## 802.11n(HT40), Channel No. 9

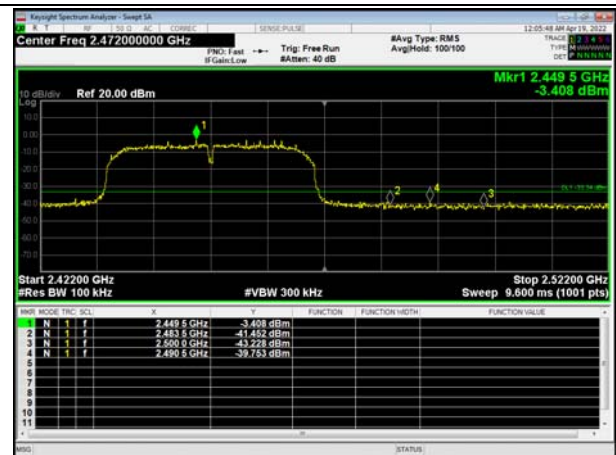


## Bluetooth LE (1M), Channel No.: 0

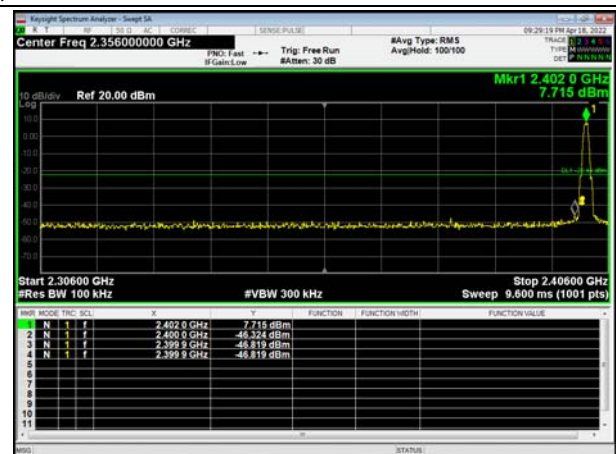
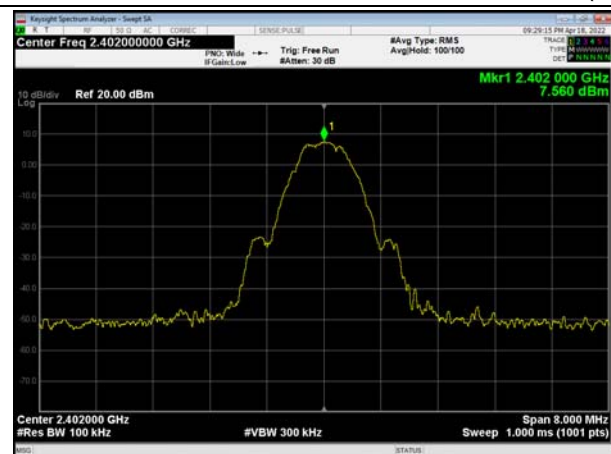





## Bluetooth LE (1M), Channel No.: 39

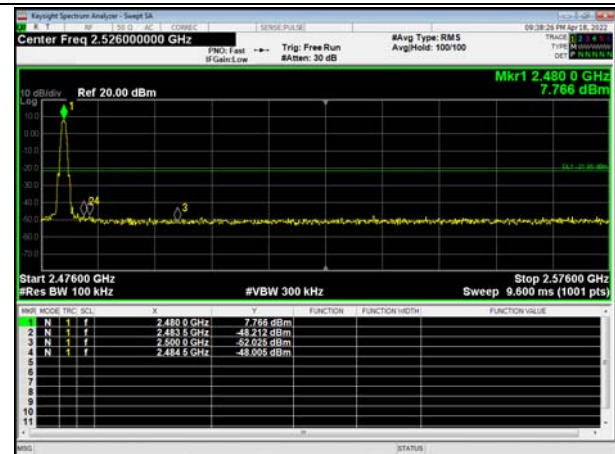

## Bluetooth LE (2M), Channel No.: 0

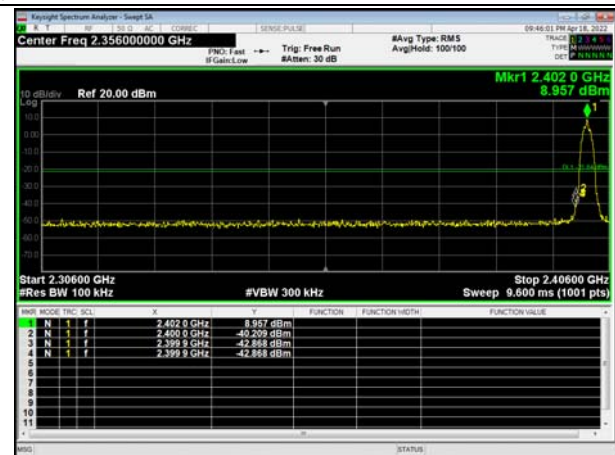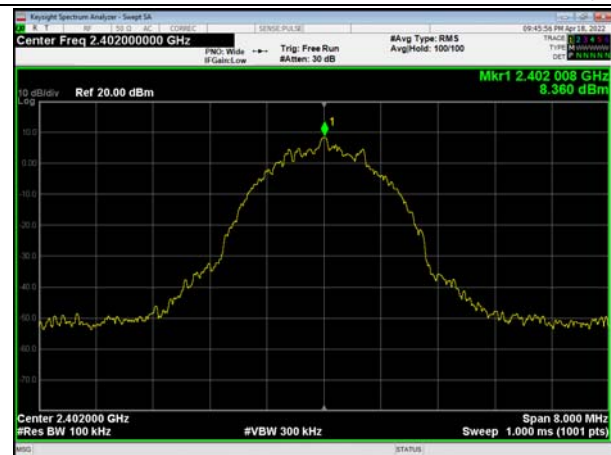

## Bluetooth LE (2M), Channel No.: 39

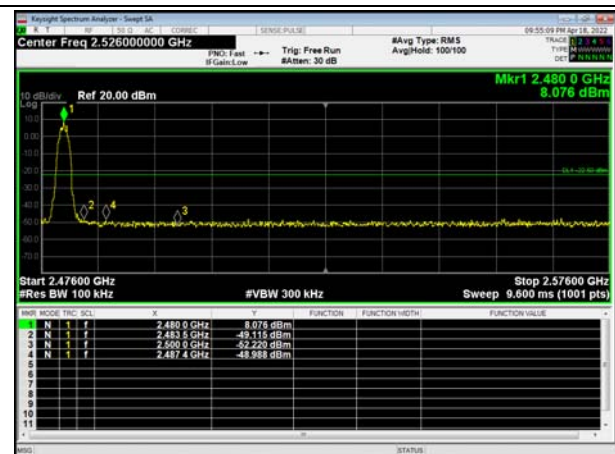

## 5.4. Power Spectral Density

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss.

The EUT is max power transmission with proper modulation.

Method AVGPSD-1 was used for this test.

- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW  $\geq [3 \times \text{RBW}]$
- Detector=power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep  $2[2 \times \text{span}/\text{RBW}]$
- Sweep time auto couple
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)


Method AVGPSD-2 was used for this test.

- Measure the duty cycle (D) of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{Kh}$
- Set VBW  $\geq [3 \times \text{RBW}]$
- Detector= power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep  $2[2 \times \text{span}/\text{RBW}]$
- Sweep time =auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level

l) Add  $[10 \log(1/D)]$ , where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time

m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

### Test setup



### Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .



**Test Results:**


Test Mode	Channel Number	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-4.94	-14.94	8	PASS
	6	-4.22	-14.22	8	PASS
	11	-4.52	-14.52	8	PASS
802.11g	1	-10.66	-20.66	8	PASS
	2	-8.54	-18.54	8	PASS
	3	-6.70	-16.70	8	PASS
	6	-5.88	-15.88	8	PASS
	8	-6.69	-16.69	8	PASS
	9	-7.46	-17.46	8	PASS
	10	-8.31	-18.31	8	PASS
	11	-12.26	-22.26	8	PASS
802.11n HT20	1	-12.86	-22.86	8	PASS
	2	-9.00	-19.00	8	PASS
	3	-7.36	-17.36	8	PASS
	6	-7.93	-17.93	8	PASS
	8	-7.88	-17.88	8	PASS
	9	-7.62	-17.62	8	PASS
	10	-9.43	-19.43	8	PASS
	11	-13.73	-23.73	8	PASS
802.11n HT40	3	-17.19	-27.19	8	PASS
	4	-12.43	-22.43	8	PASS
	5	-12.29	-22.29	8	PASS
	6	-10.60	-20.60	8	PASS
	7	-13.51	-23.51	8	PASS
	8	-15.10	-25.10	8	PASS
	9	-15.10	-25.10	8	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor+10*log10(3/30)					



Test Mode	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
Bluetooth (Low Energy) (1M)	0	-13.22	-12.45	8	PASS
	19	-13.03	-12.26	8	PASS
	39	-13.38	-12.61	8	PASS
Bluetooth (Low Energy) (2M)	0	-15.56	-13.07	8	PASS
	19	-15.78	-13.29	8	PASS
	39	-15.23	-12.74	8	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					



802.11b, Channel No.: 1

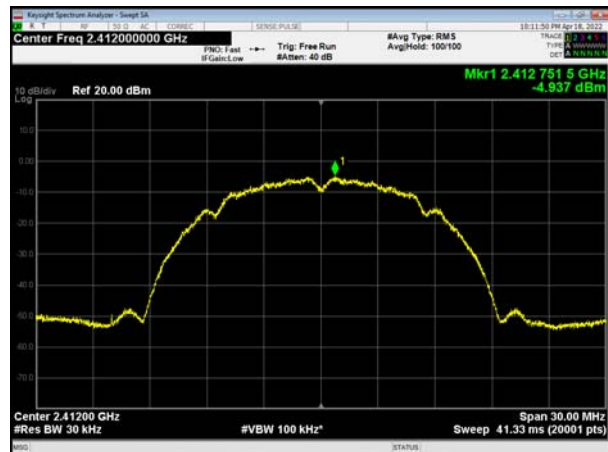

802.11g, Channel No.: 1



802.11b, Channel No.: 6




802.11g, Channel No.: 2



802.11b, Channel No.: 11




802.11g, Channel No.: 3

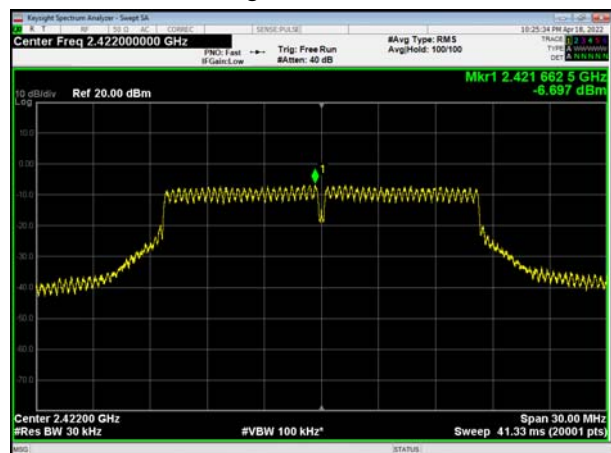





802.11g, Channel No.: 6

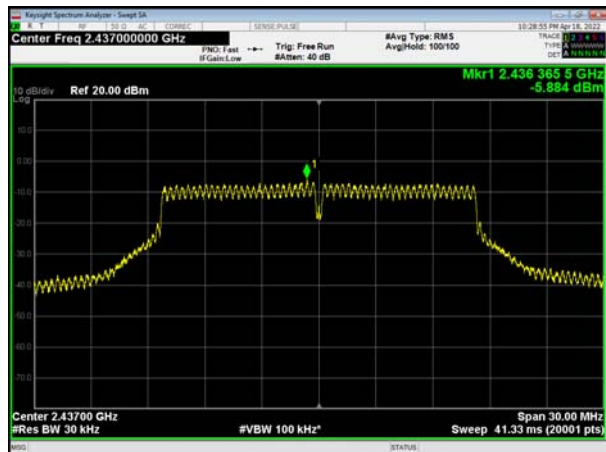


802.11g, Channel No.: 10

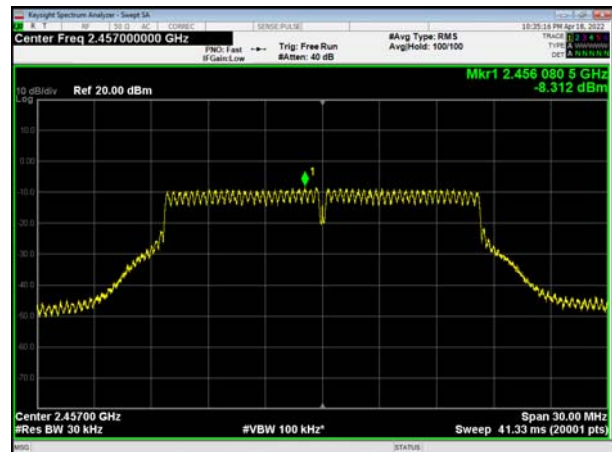

802.11g, Channel No.: 8

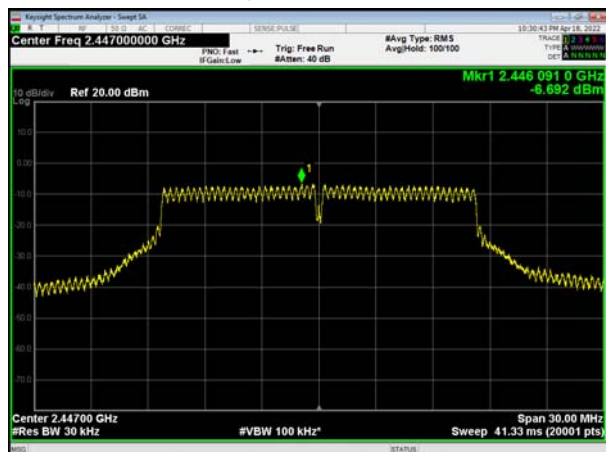

802.11g, Channel No.: 11

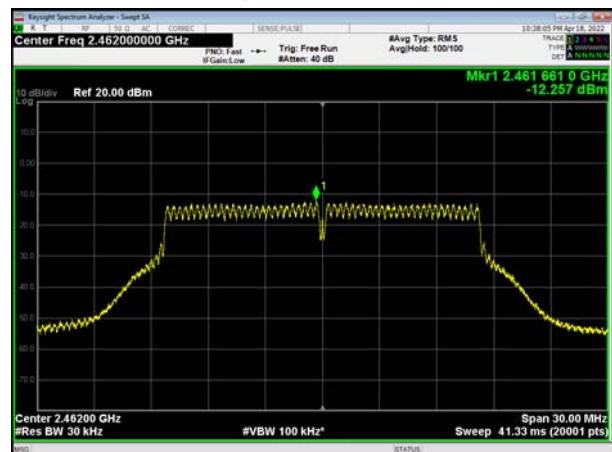


802.11g, Channel No.: 9







802.11n(HT20), Channel No. 1

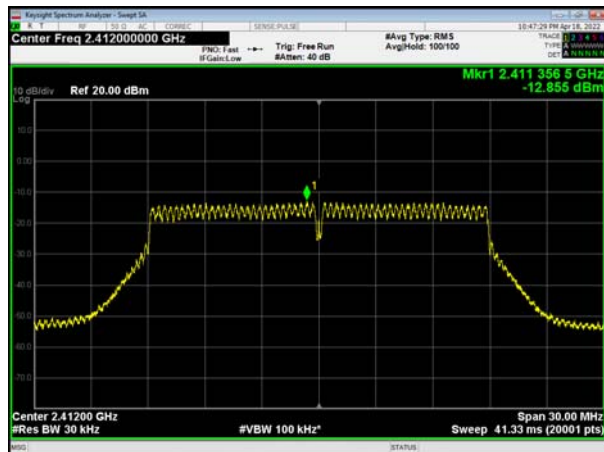


802.11n(HT20), Channel No. 6

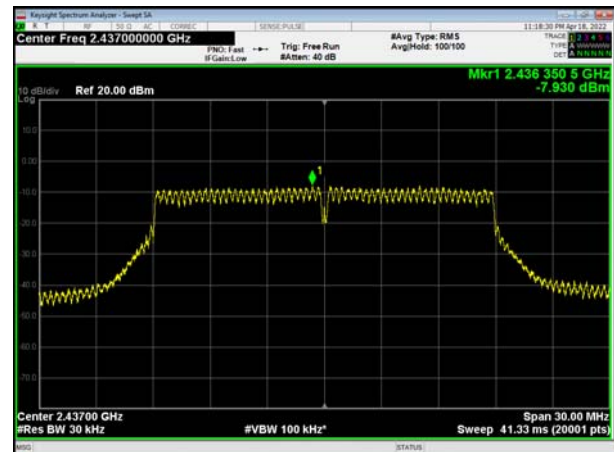


802.11n(HT20), Channel No. 2

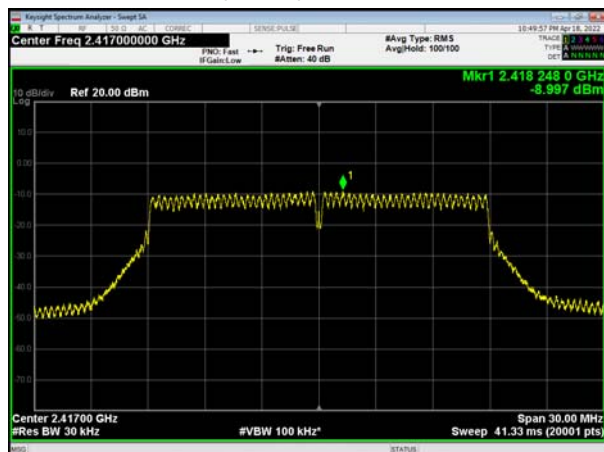


802.11n(HT20), Channel No. 8

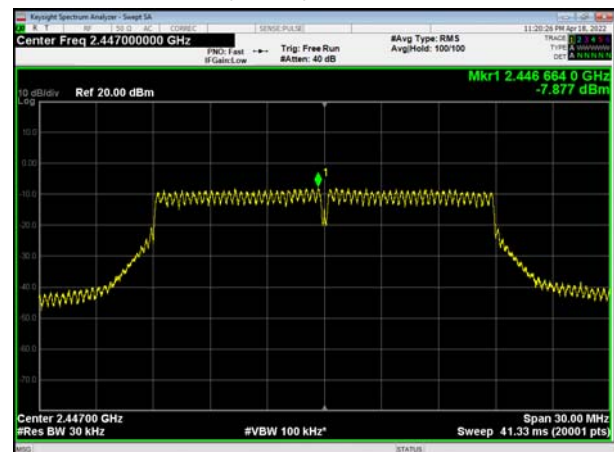

802.11n(HT20), Channel No. 3

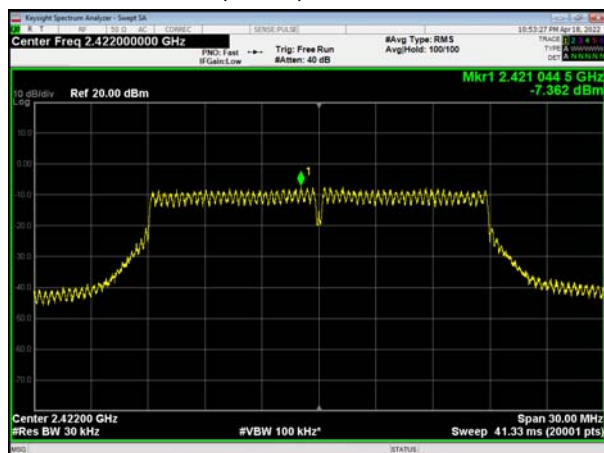


802.11n(HT20), Channel No. 9

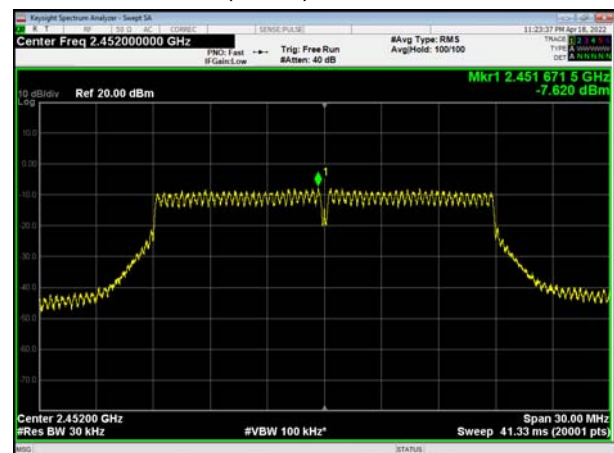







802.11n(HT20), Channel No. 10

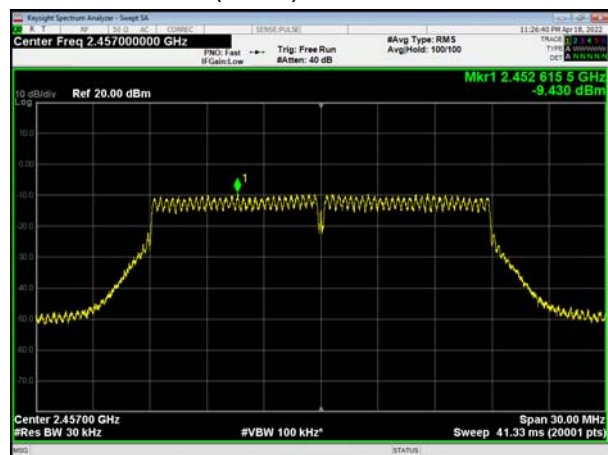


802.11n(HT40), Channel No. 4

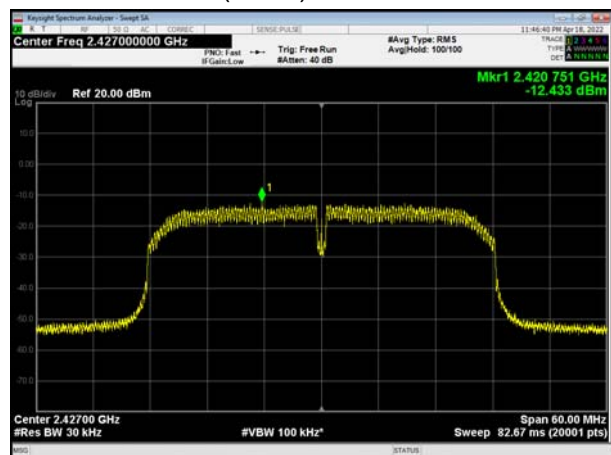


802.11n(HT20), Channel No. 11

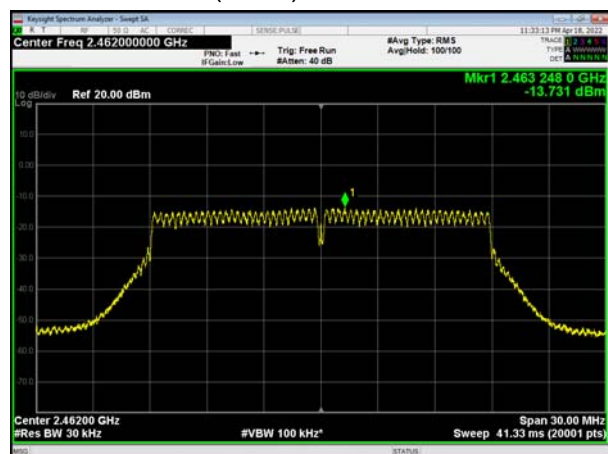

802.11n(HT40), Channel No. 5

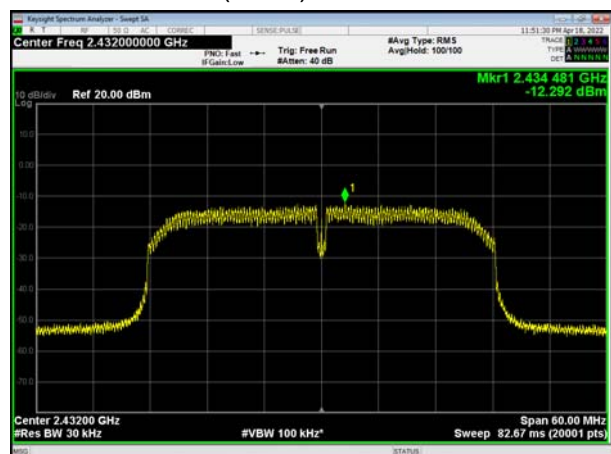


802.11n(HT40), Channel No. 3

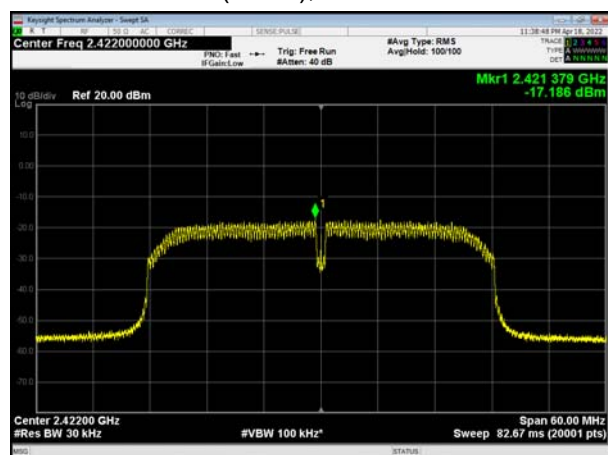


802.11n(HT40), Channel No. 6




802.11n(HT40), Channel No. 7

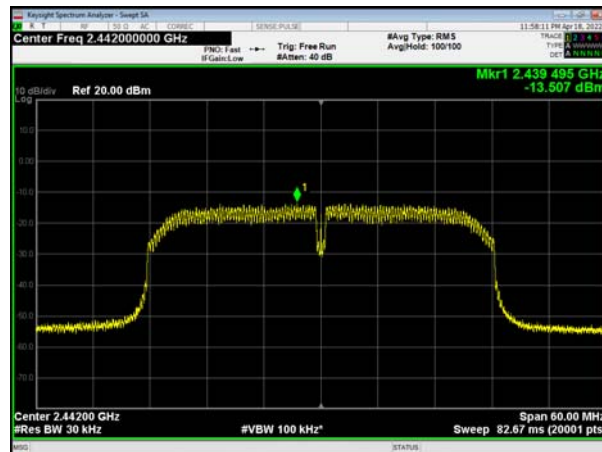

802.11n(HT40), Channel No. 8

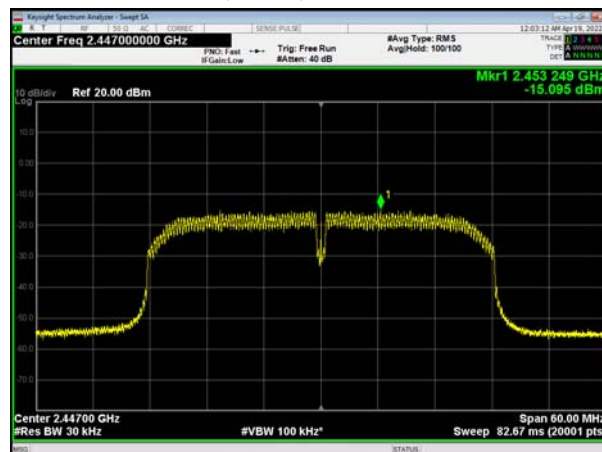


802.11n(HT40), Channel No. 9

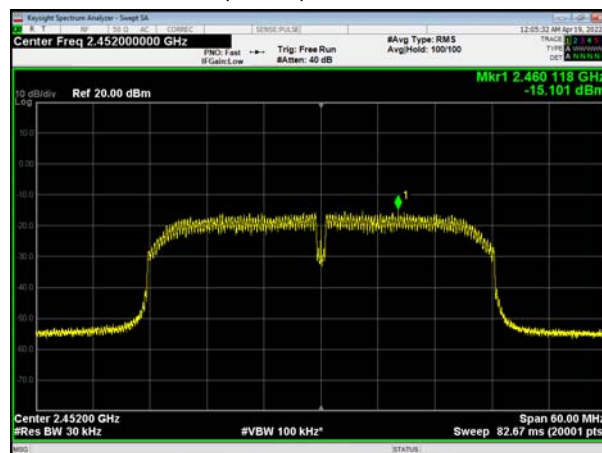




Bluetooth LE (1M), Channel No.: 0

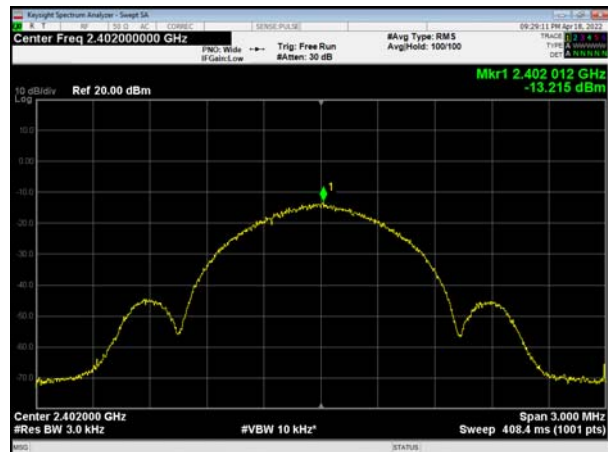

Bluetooth LE (2M), Channel No.: 0



Bluetooth LE (1M), Channel No.: 19

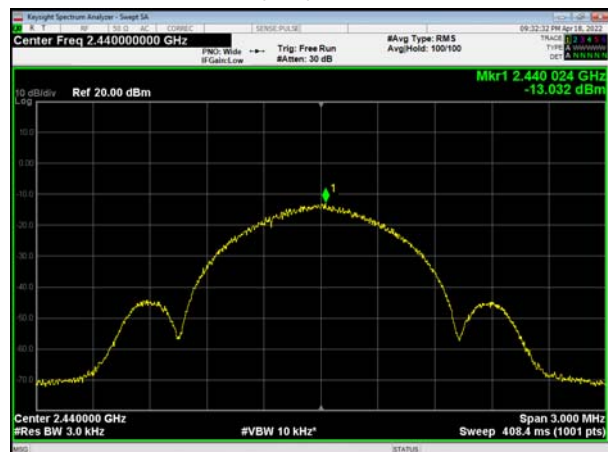

Bluetooth LE (2M), Channel No.: 19



Bluetooth LE (1M), Channel No.: 39



Bluetooth LE (2M), Channel No.: 39



## 5.5. Spurious RF Conducted Emissions

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

### Test setup



### Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	8.12	-21.88
	2437	9.20	-20.80
	2462	8.57	-21.43
802.11g	2412	1.40	-28.60
	2417	4.15	-25.85
	2422	4.93	-25.07
	2427	4.38	-25.62
	2437	4.83	-25.17
	2447	5.67	-24.33
	2452	2.64	-27.36
	2457	-1.38	-31.38
	2462	8.12	-21.88

802.11n HT20	2412	0.08	-29.92
	2417	3.85	-26.15
	2422	6.04	-23.96
	2437	2.57	-27.43
	2447	5.54	-24.46
	2452	5.59	-24.41
	2457	3.53	-26.47
	2462	-0.52	-30.52
802.11n HT40	2422	-4.43	-34.43
	2427	-0.51	-30.51
	2432	-0.55	-30.55
	2437	2.03	-27.97
	2442	-0.41	-30.41
	2447	-2.68	-32.68
	2452	-2.98	-32.98
Bluetooth (Low Energy) (1M)	2402	7.97	-22.03
	2440	8.78	-21.22
	2480	8.23	-21.77
Bluetooth (Low Energy) (2M)	2402	8.91	-21.09
	2440	8.11	-21.89
	2480	8.91	-21.09

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB






## Test Results:


## 802.11b, Channel No.: 1

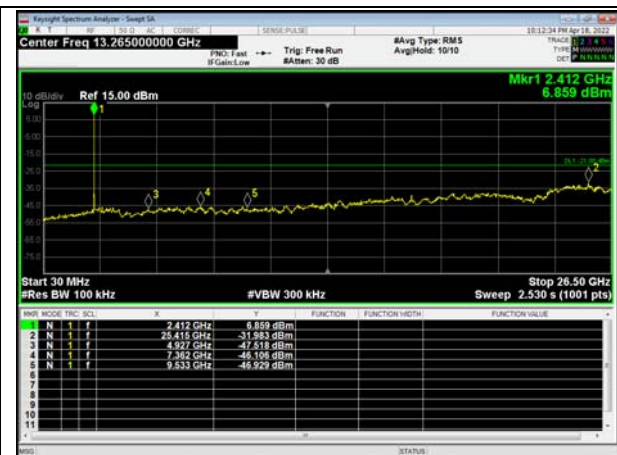

## 802.11b, Channel No.: 6

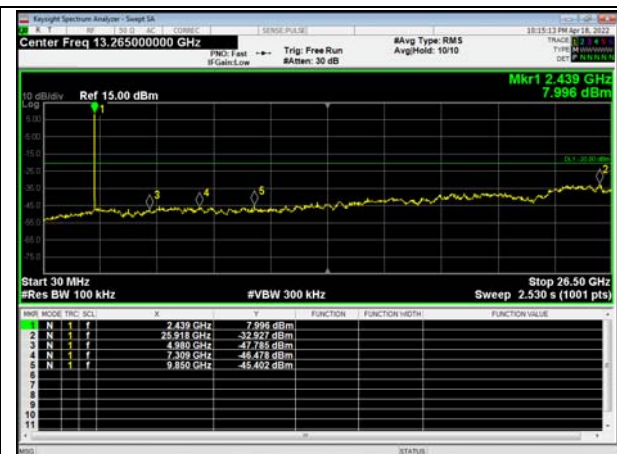


## 802.11b, Channel No.: 11

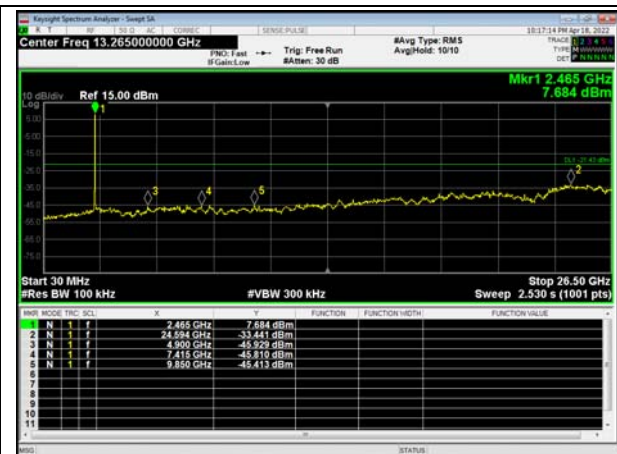





## 802.11g, Channel No.: 1

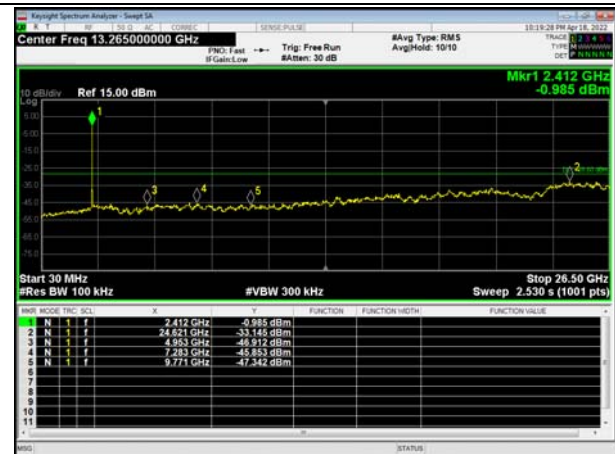

## 802.11g, Channel No.: 2

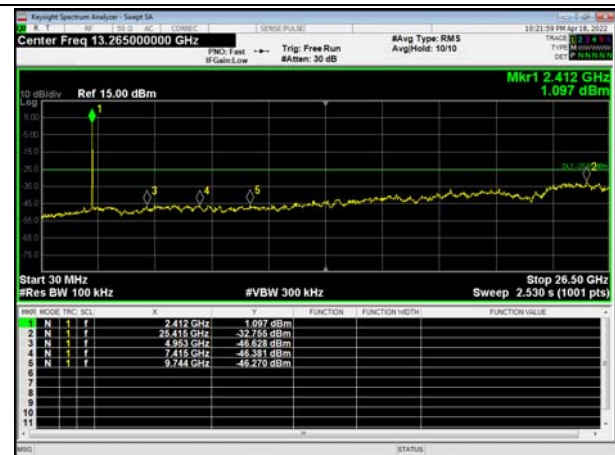


## 802.11g, Channel No.: 3

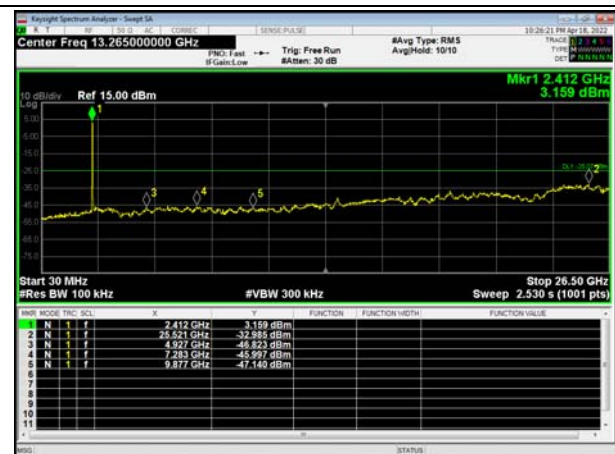




## 802.11g, Channel No.: 6

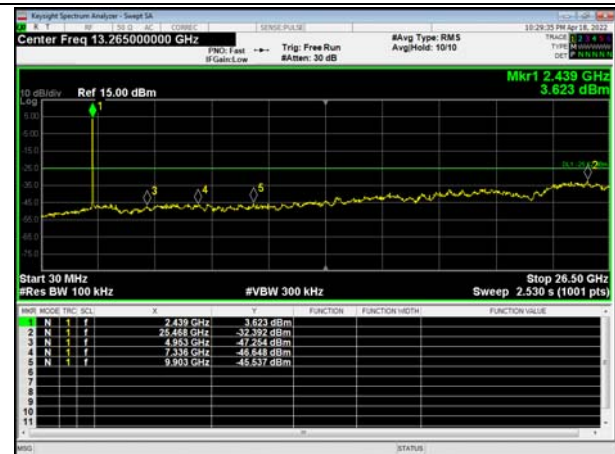

## 802.11g, Channel No.: 8

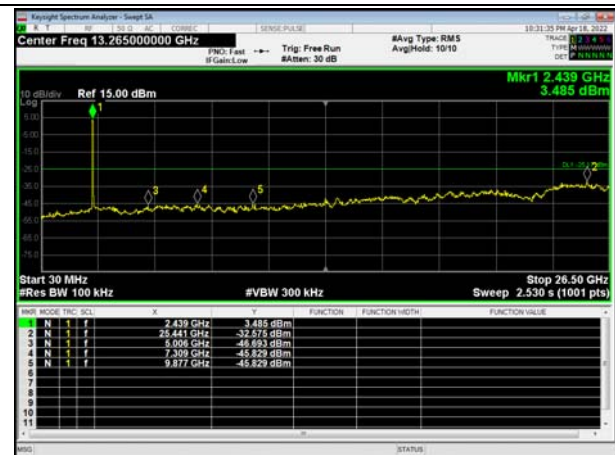

## 802.11g, Channel No.: 9

