

**GSM850\_GPRS10\_Left Cheek\_128****DUT: EUT**

Communication System: GPRS 850-2solt; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: H835 Medium parameters used :  $f = 824.2$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.339 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.49 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.620 W/kg

**SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.239 mW/g**

Maximum value of SAR (measured) = 0.472 mW/g

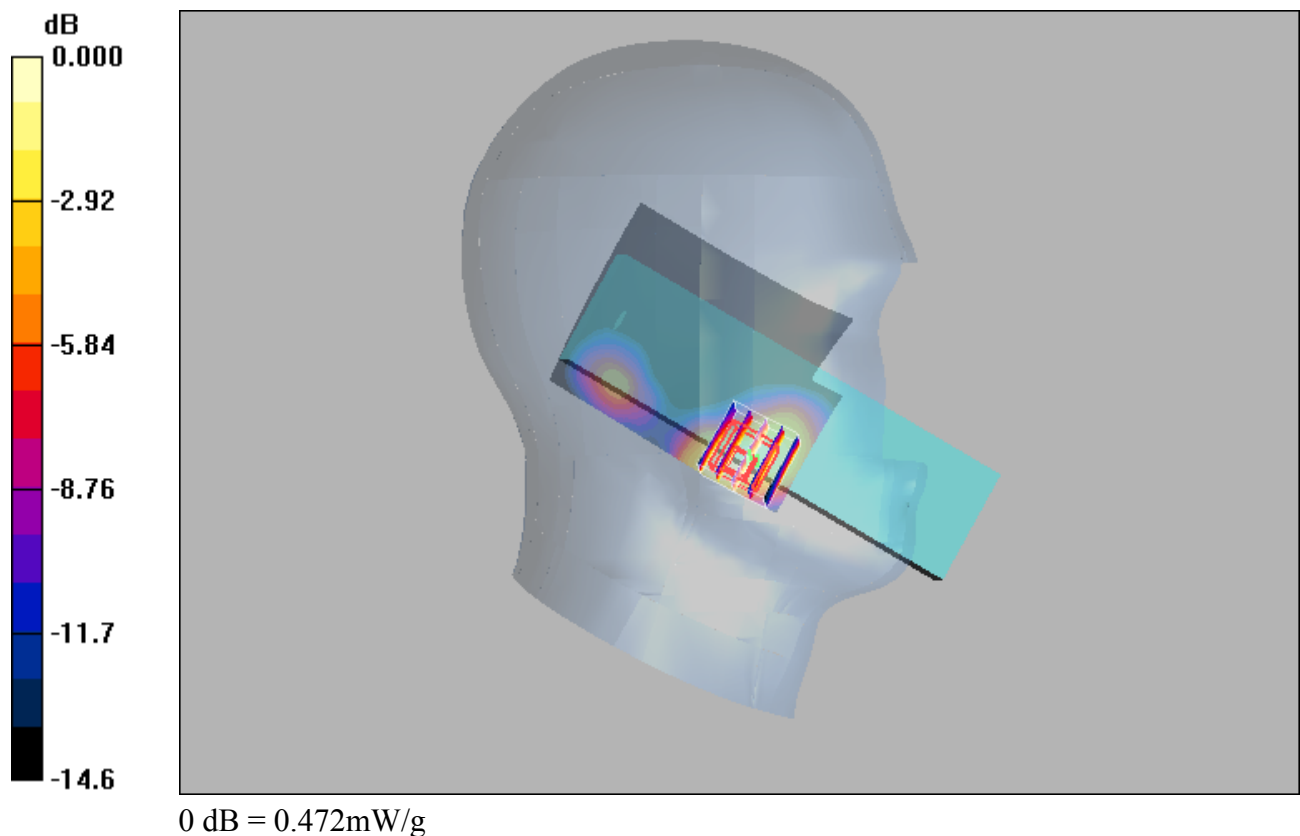

**GSM1900\_GPRS10\_Left Cheek\_512****DUT: EUT**

Communication System: GPRS1900-2slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4  
Medium: H1900 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.857 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.23 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.698 mW/g; SAR(10 g) = 0.363 mW/g**

Maximum value of SAR (measured) = 0.852 mW/g

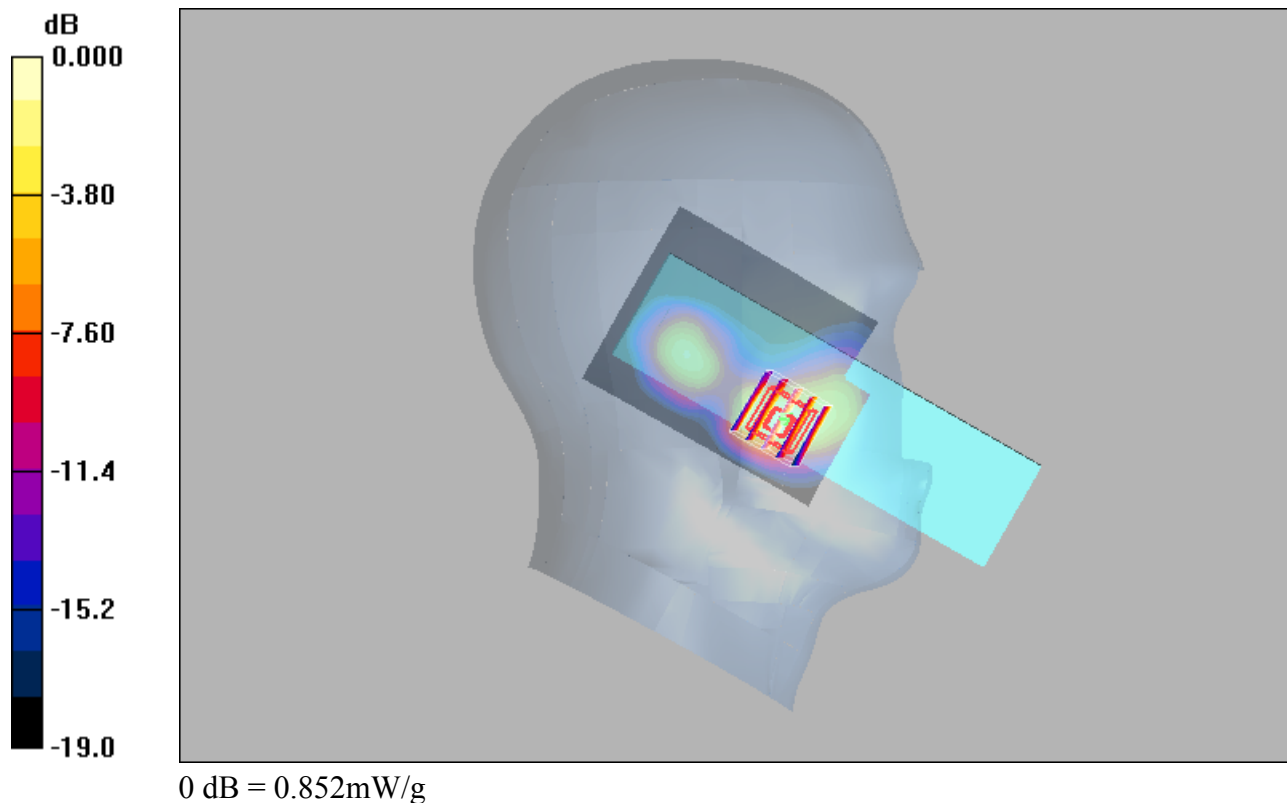

**WCDMA II\_RMC12.2K\_Left Cheek\_9262****DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: H1900 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.474 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.37 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 0.623 W/kg

**SAR(1 g) = 0.386 mW/g; SAR(10 g) = 0.219 mW/g**

Maximum value of SAR (measured) = 0.448 mW/g

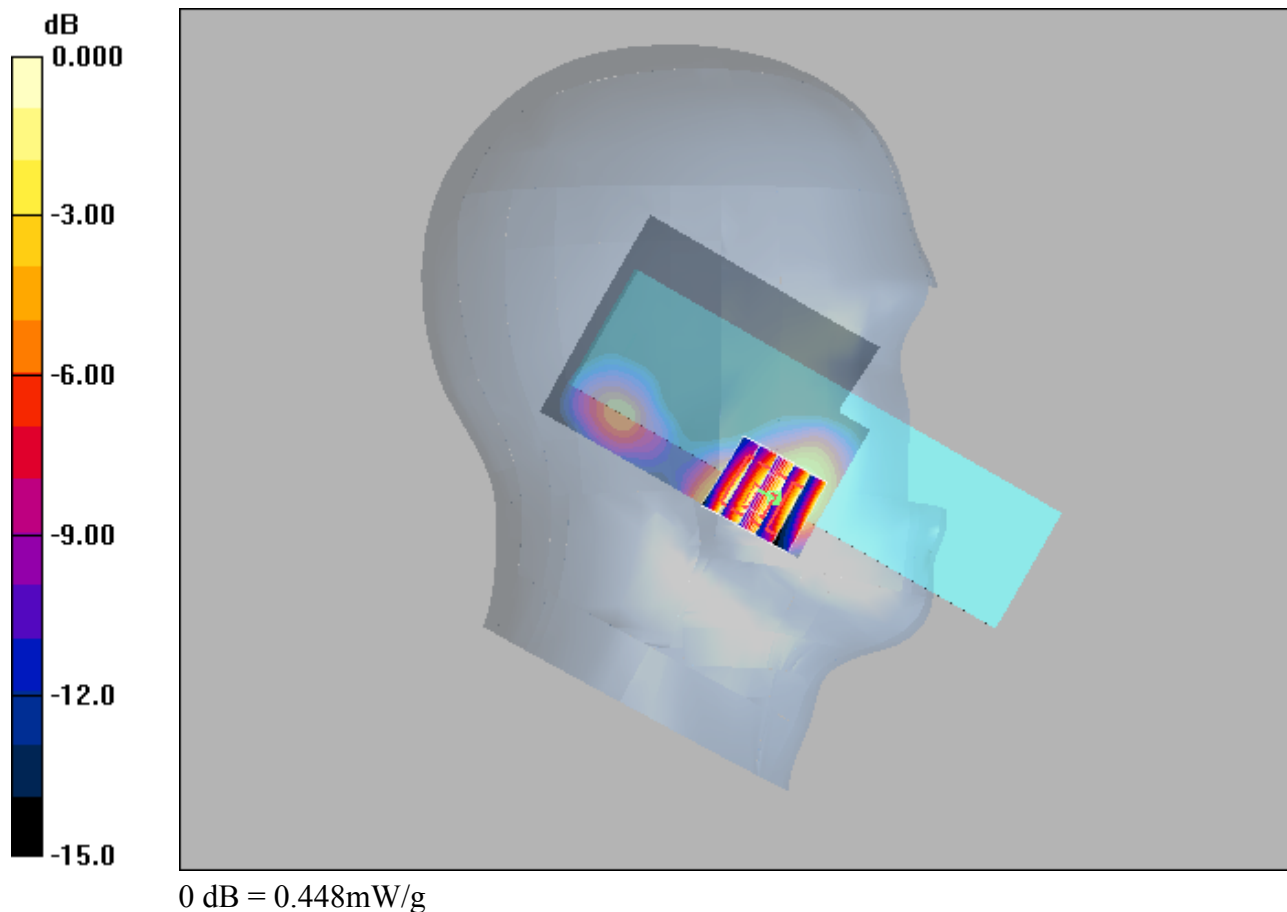

**WCDMA V\_RMC12.2K\_Left Cheek\_4233****DUT: EUT**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.897$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.338 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.28 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.566 W/kg

**SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.224 mW/g**

Maximum value of SAR (measured) = 0.430 mW/g

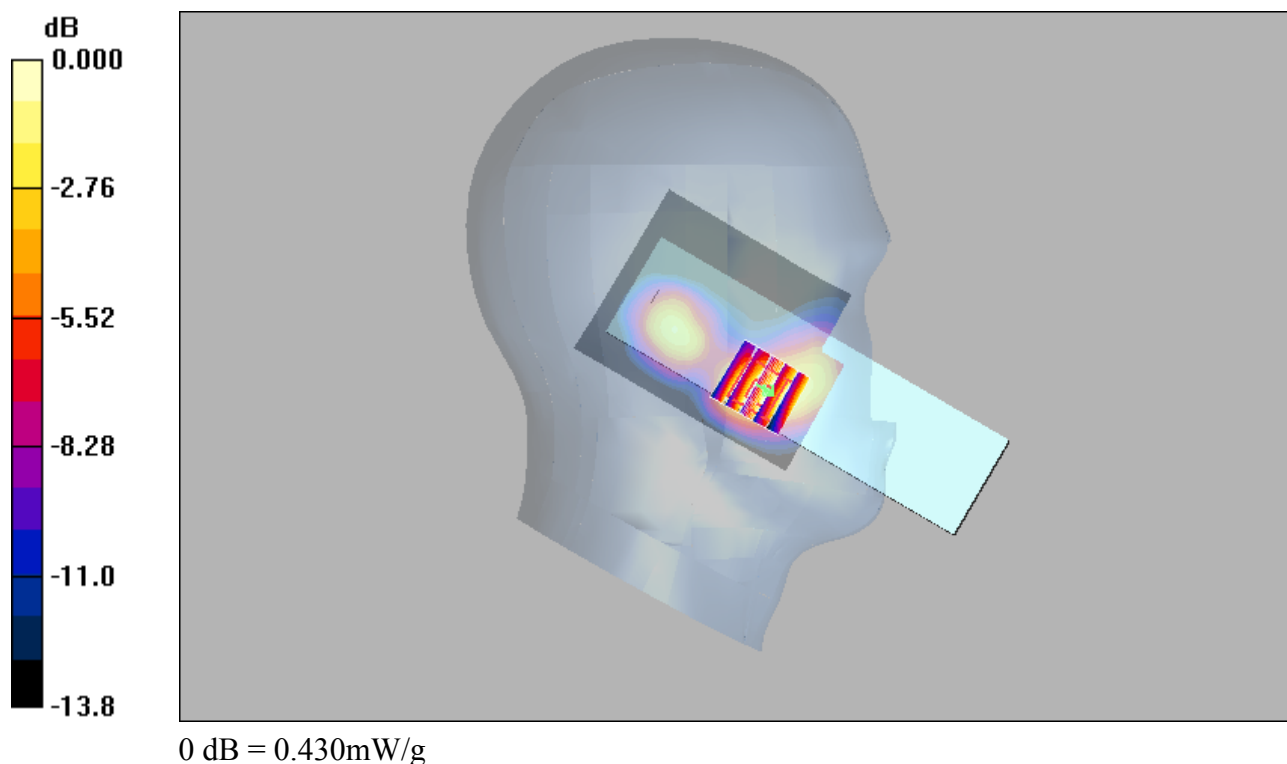

**LTE 2\_QPSK20M\_50\_25\_Left Cheek\_19100****DUT: EUT**

Communication System: LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.43 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.10 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.539 mW/g**

Maximum value of SAR (measured) = 1.36 mW/g

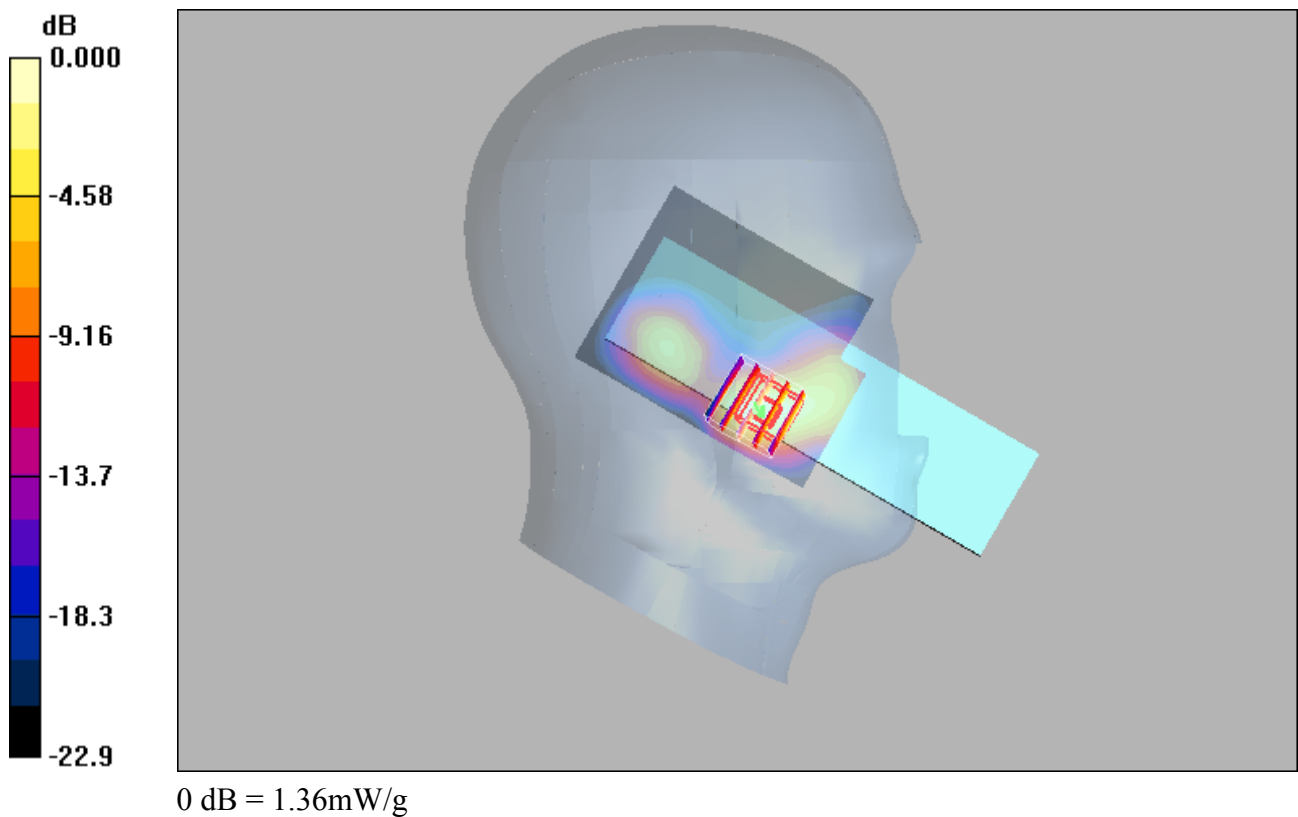

**LTE 4\_QPSK20M\_1\_0\_Left Cheek\_20300****DUT: EUT**

Communication System: LTE Band 4&20M; Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: H1750 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(5.4, 5.4, 5.4); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.52 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 2.58 W/kg

**SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.604 mW/g**

Maximum value of SAR (measured) = 1.63 mW/g

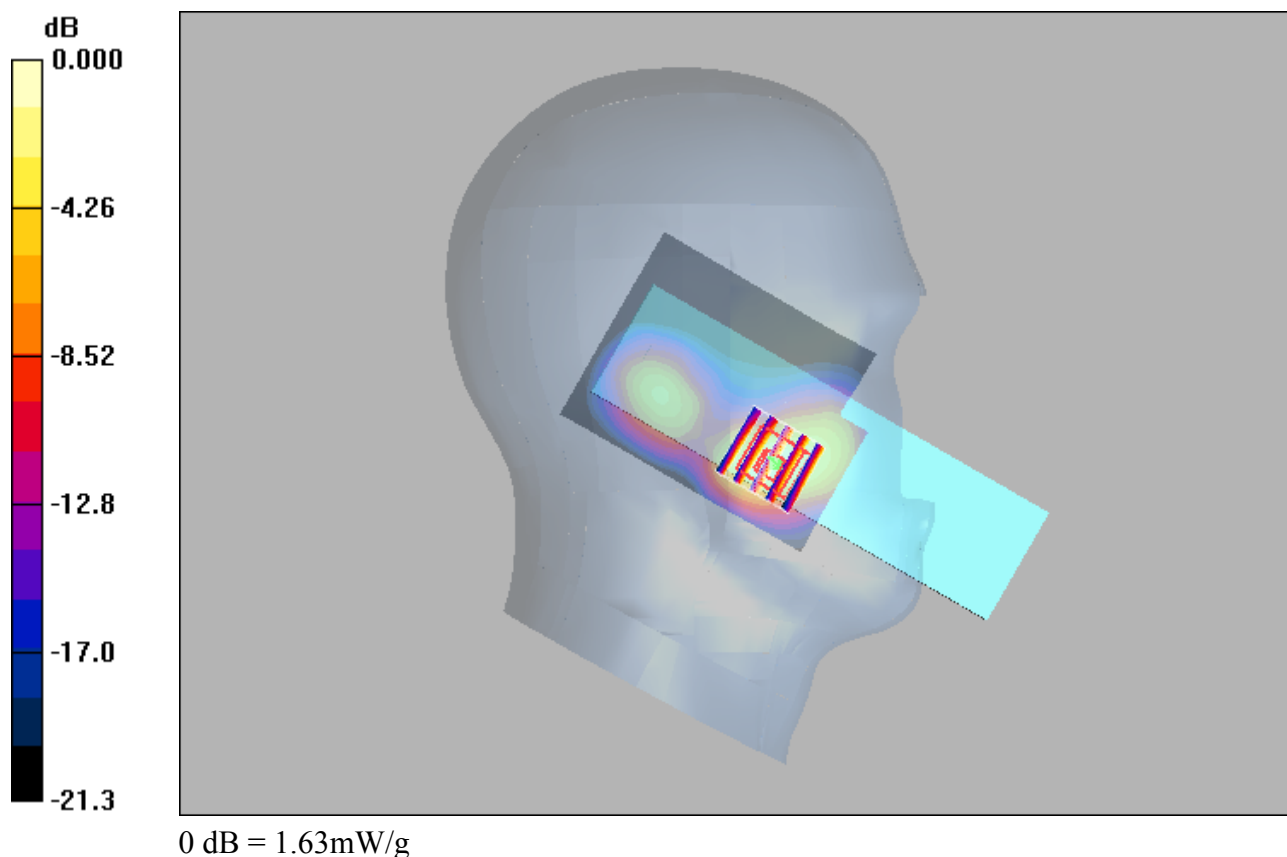

**LTE 5\_QPSK10M\_1\_49\_Left Cheek\_20600****DUT: EUT**

Communication System: LTE Band5; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used:  $f = 844$  MHz;  $\sigma = 0.894$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.564 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.73 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.752 W/kg

**SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.304 mW/g**

Maximum value of SAR (measured) = 0.557 mW/g

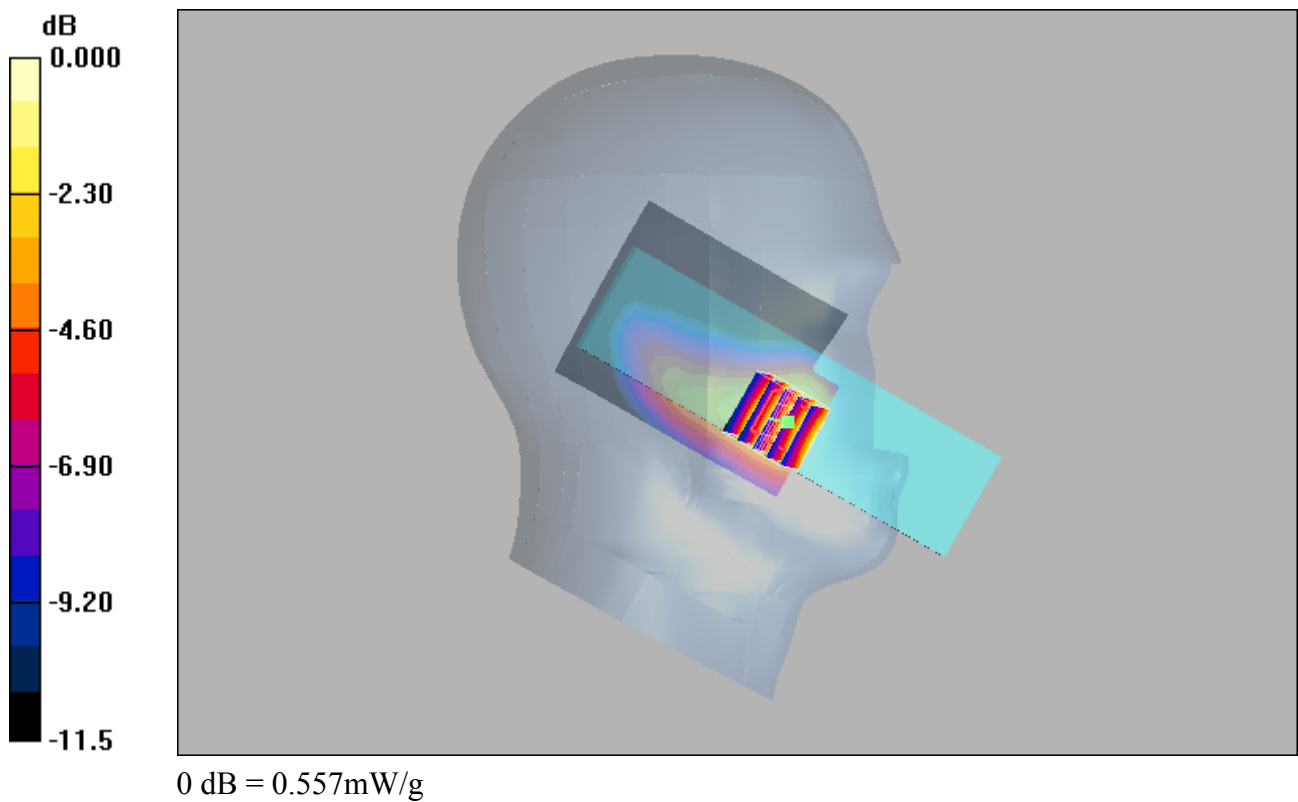

**LTE 7\_QPSK20M\_50\_50\_Left Cheek\_21100****DUT: EUT**

Communication System: LTE Band 7&20M; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (71x91x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.697 mW/g



**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.96 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.983 W/kg

**SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.285 mW/g**

Maximum value of SAR (measured) = 0.685 mW/g

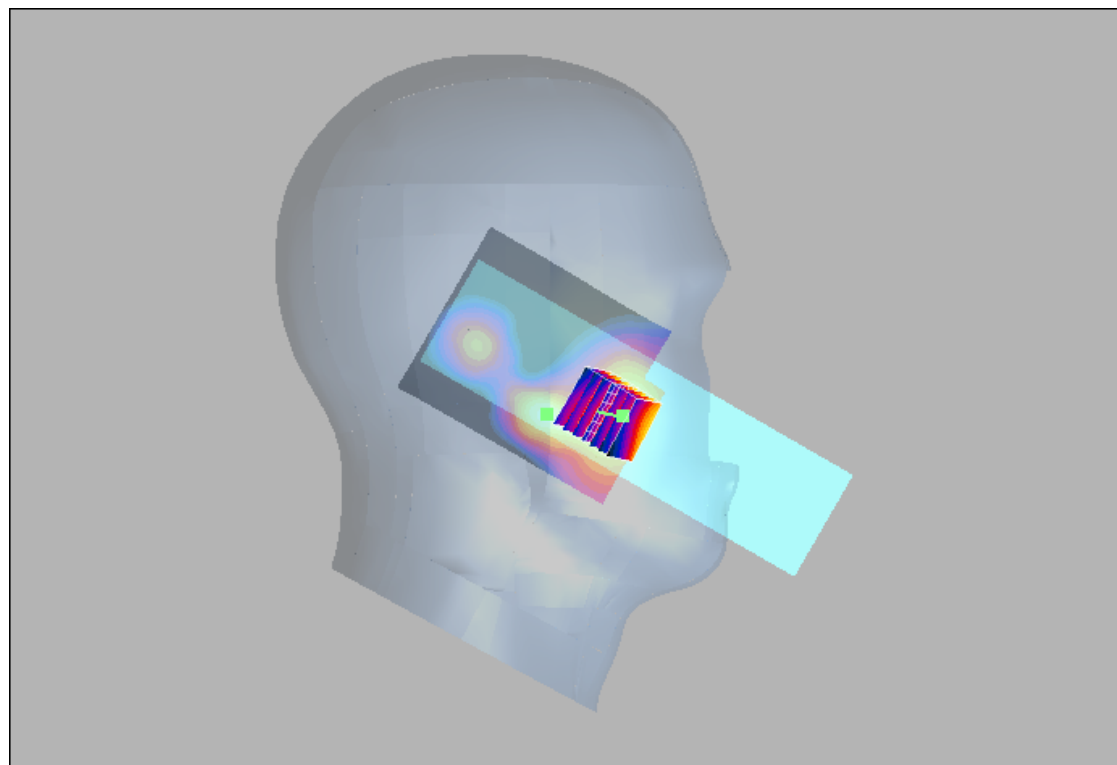

0 dB = 0.685mW/g

**EDR\_DH5\_Right Cheek\_39****DUT: EUT**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1


Medium: H2450 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.83$  mho/m;  $\epsilon_r = 38.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (71x81x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.013 mW/g

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.25 V/m; Power Drift = 0.023 dB  
Peak SAR (extrapolated) = 0.033 W/kg  
**SAR(1 g) = 0.0121 mW/g; SAR(10 g) = 0.00548 mW/g**  
Maximum value of SAR (measured) = 0.017 mW/g

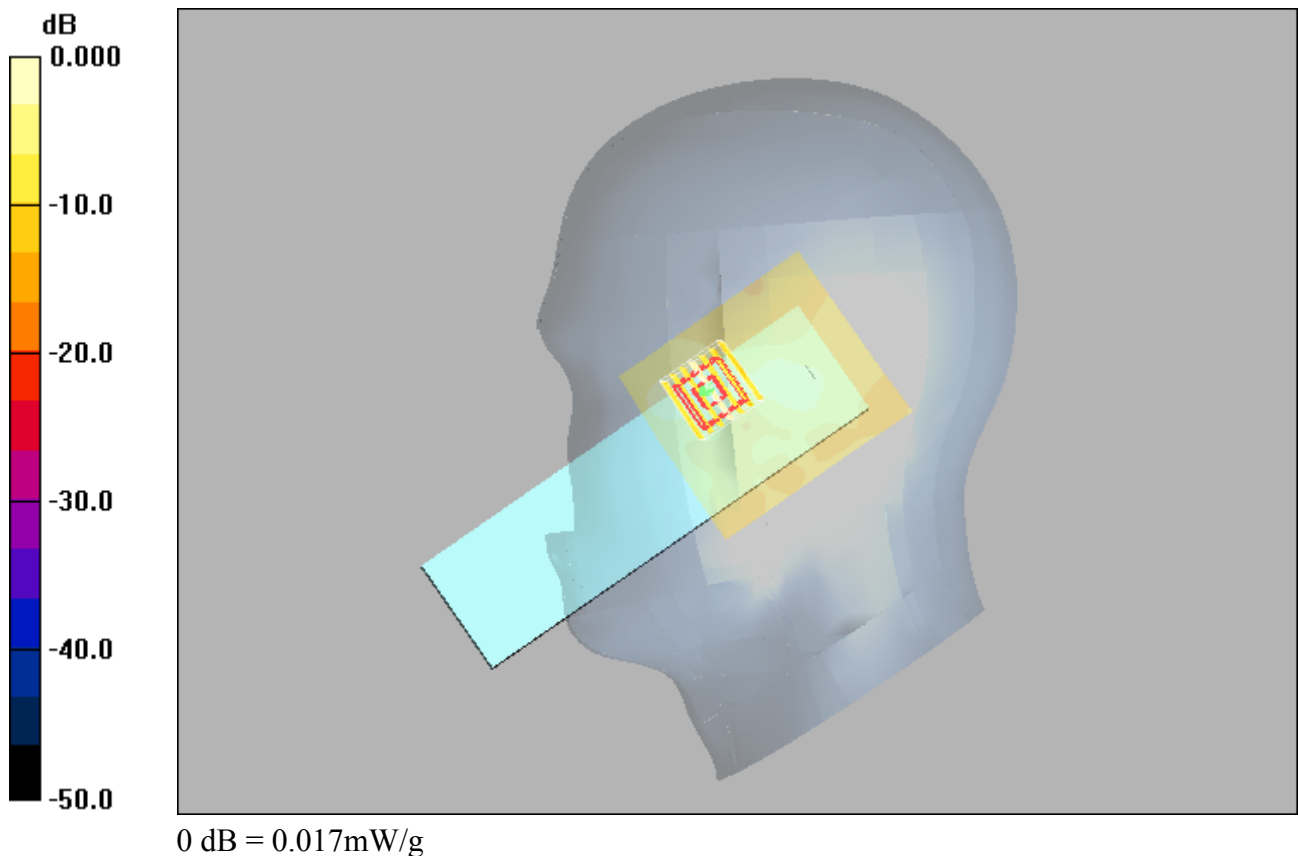

**GSM850\_GPRS10\_Rear Face\_10MM\_128****DUT: EUT**

Communication System: GPRS 850-2solt; Frequency: 824.2 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 42.1$ ;

$\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.806 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.3 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.985 W/kg

**SAR(1 g) = 0.707 mW/g; SAR(10 g) = 0.486 mW/g**

Maximum value of SAR (measured) = 0.807 mW/g

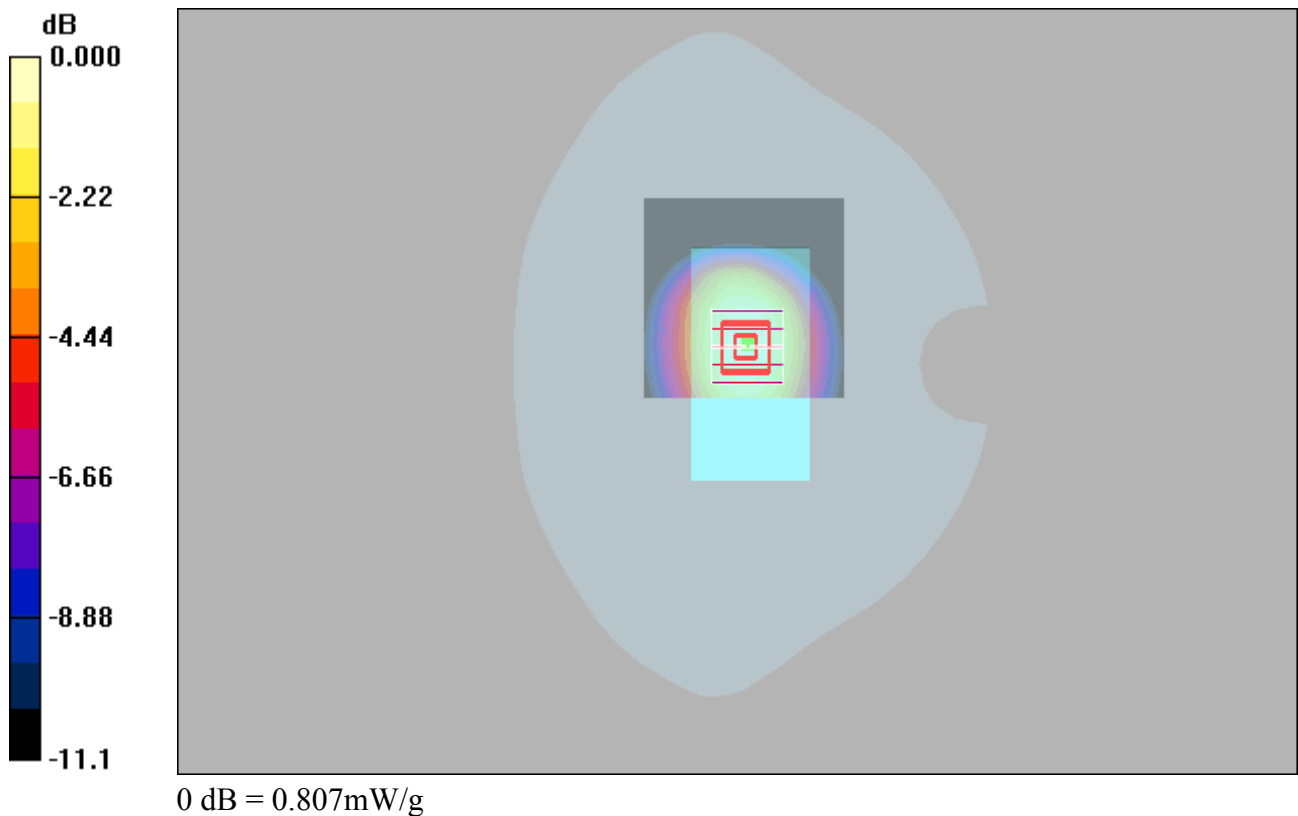

**GSM1900\_GPRS10\_Rear Face\_10MM\_512****DUT: EUT**

Communication System: GPRS1900-2slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4  
Medium: H1900 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.543 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.53 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.718 W/kg

**SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.219 mW/g**

Maximum value of SAR (measured) = 0.503 mW/g

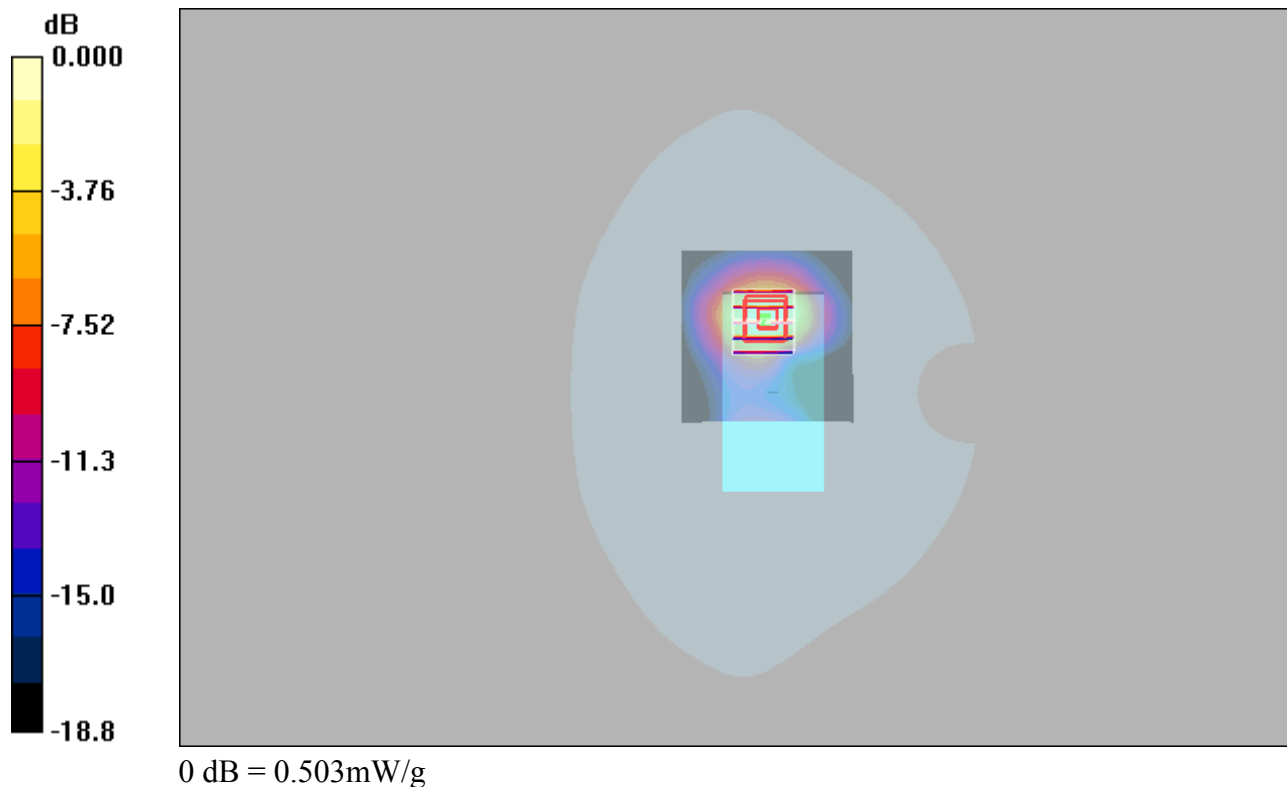

**WCDMA II\_RMC12.2K\_Rear Face\_10MM\_9262****DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: H1900 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.282 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.47 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.107 mW/g**

Maximum value of SAR (measured) = 0.241 mW/g

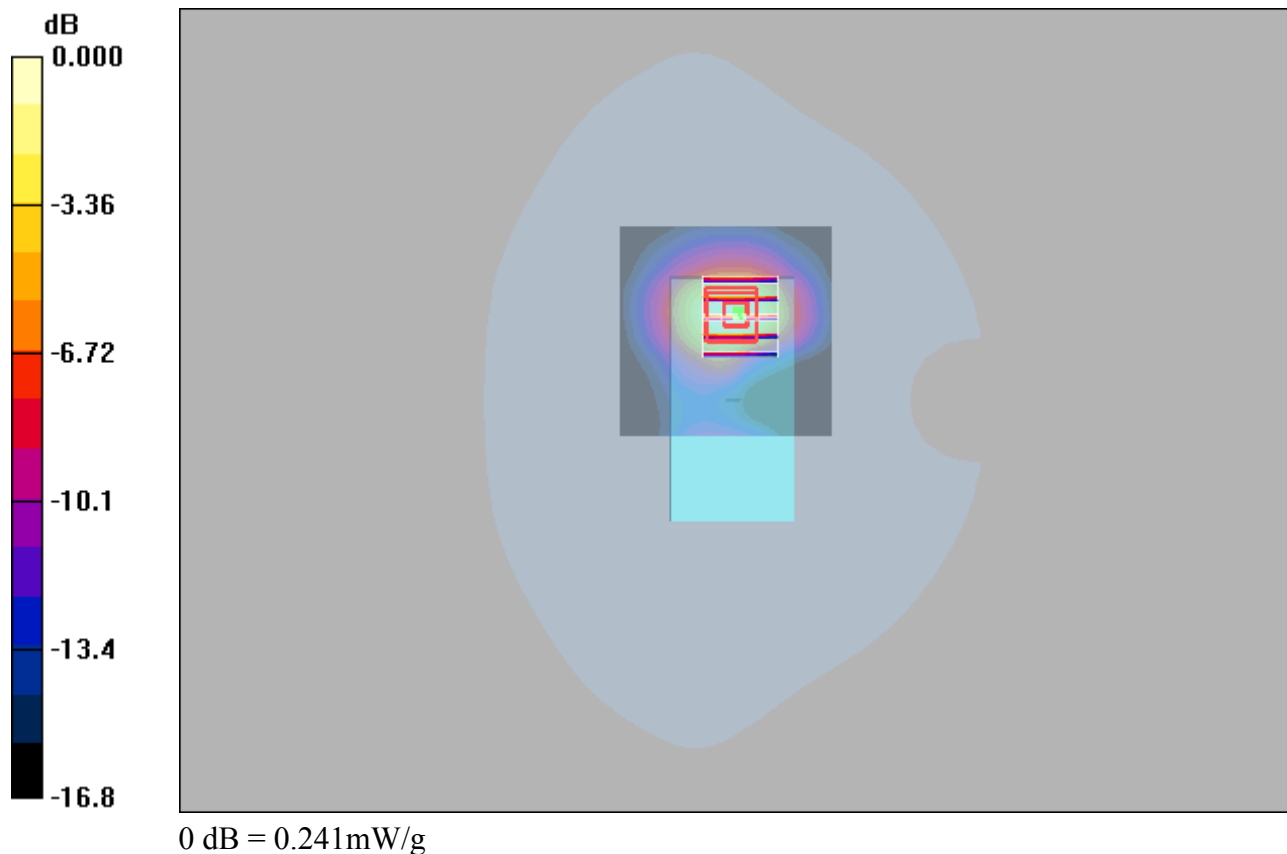

**WCDMA V\_RMC12.2K\_Rear Face\_10MM\_4233****DUT: EUT**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.897$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.370 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.463 W/kg

**SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.229 mW/g**

Maximum value of SAR (measured) = 0.374 mW/g

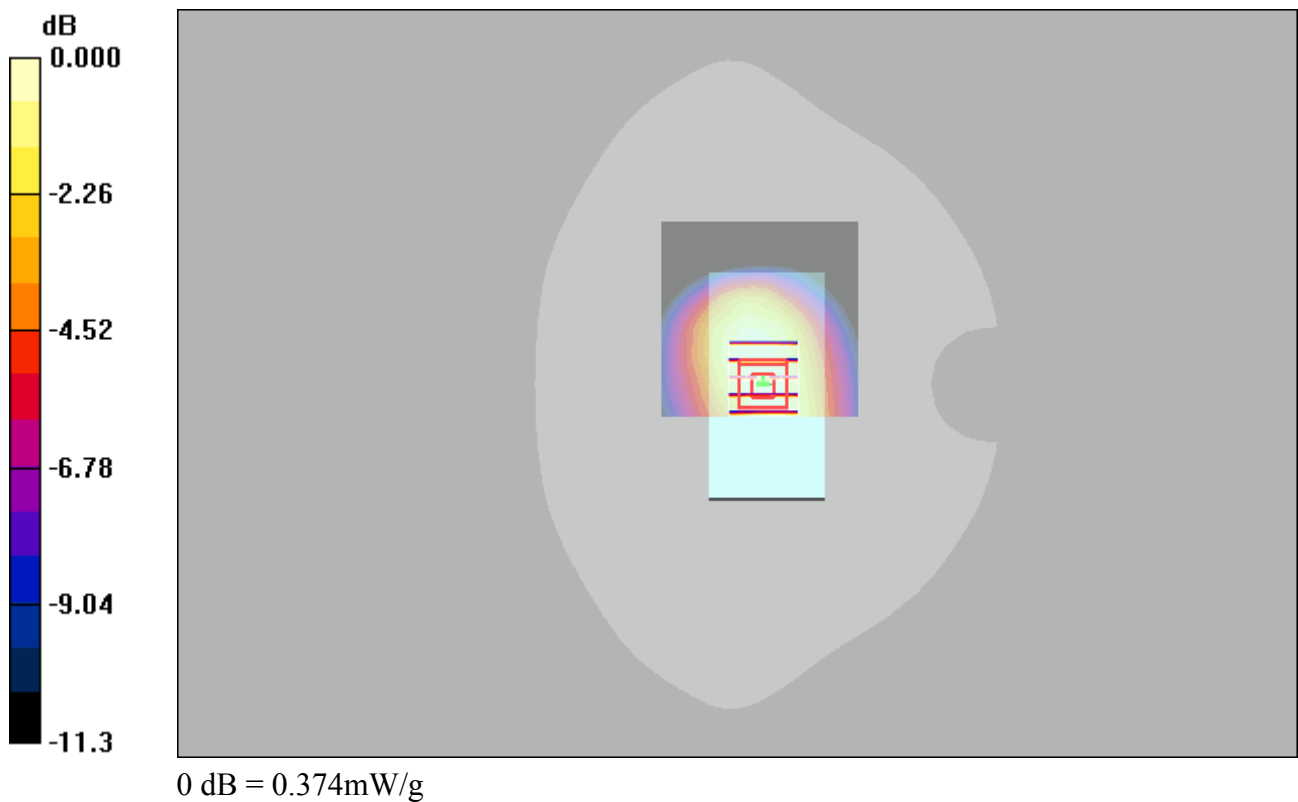

**LTE 2\_QPSK20M\_50\_25\_Rear Face\_10MM\_19100****DUT: EUT**

Communication System: LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 40$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.479 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.26 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.600 W/kg

**SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.211 mW/g**

Maximum value of SAR (measured) = 0.441 mW/g

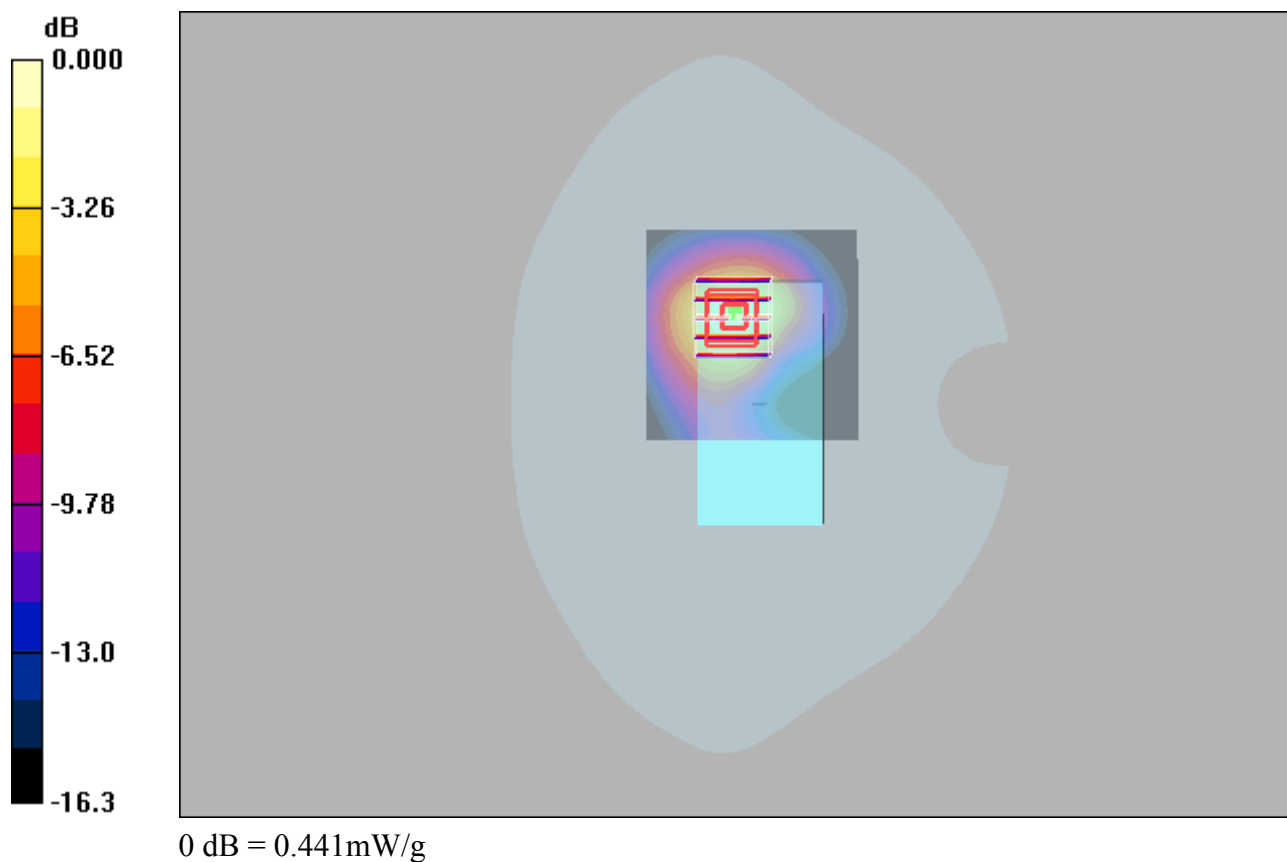

**LTE 4\_QPSK20M\_1\_0\_Rear Face\_10MM\_20300****DUT: EUT**

Communication System: LTE Band 4&20M; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(5.4, 5.4, 5.4); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.76 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.90 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 2.33 W/kg

**SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.543 mW/g**

Maximum value of SAR (measured) = 1.47 mW/g

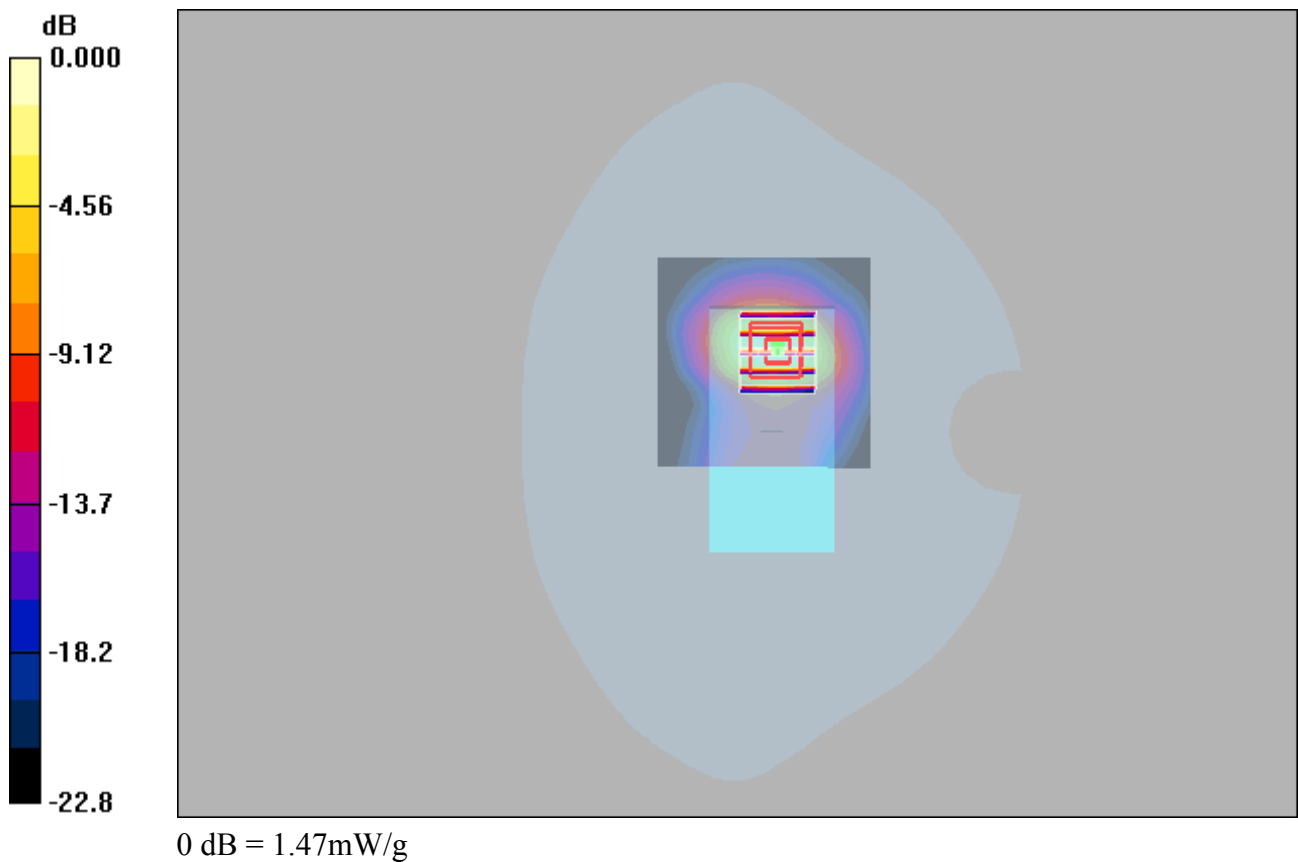

**LTE 5\_QPSK10M\_1\_49\_Rear Face\_10MM\_20600****DUT: EUT**

Communication System: LTE Band5; Frequency: 844 MHz;Duty Cycle: 1:1

Medium: H835 Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 0.894 \text{ mho/m}$ ;  $\epsilon_r = 41.9$ ;  $\rho = 1000 \text{ kg/m}^3$

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.528 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $24.2 \text{ V/m}$ ; Power Drift =  $0.024 \text{ dB}$

Peak SAR (extrapolated) =  $0.638 \text{ W/kg}$

**SAR(1 g) =  $0.461 \text{ mW/g}$ ; SAR(10 g) =  $0.321 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.522 \text{ mW/g}$

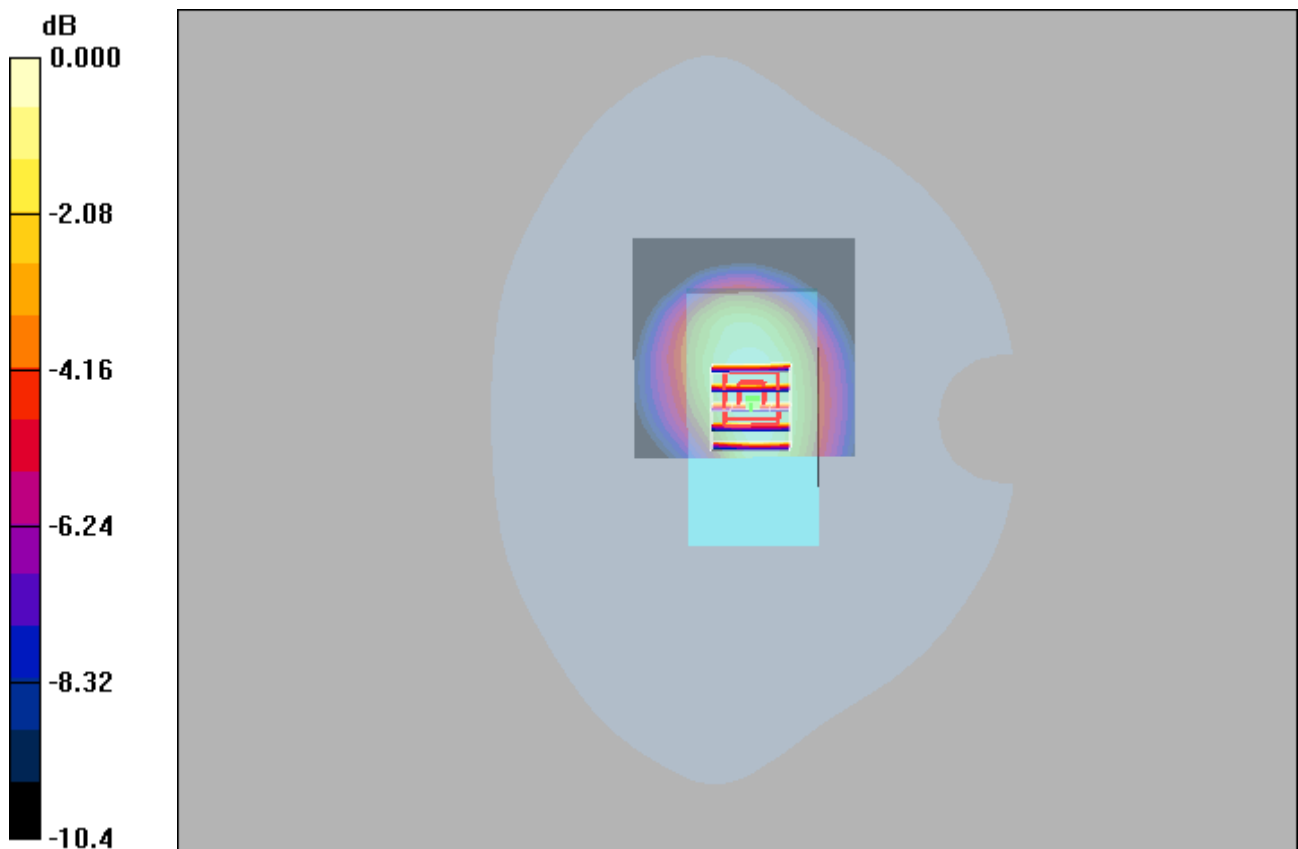

0 dB =  $0.522\text{mW/g}$

**LTE 7\_QPSK20M\_50\_50\_Rear Face\_10MM\_21100****DUT: EUT**

Communication System: LTE Band 7&20M; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: H2600 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 38.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (71x71x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 1.11 mW/g

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.31 V/m; Power Drift = 0.082 dB  
Peak SAR (extrapolated) = 1.71 W/kg  
**SAR(1 g) = 0.881 mW/g; SAR(10 g) = 0.436 mW/g**  
Maximum value of SAR (measured) = 1.10 mW/g



**EDR\_DH5\_Rear Face\_10MM\_39****DUT: EUT**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.83$  mho/m;  $\epsilon_r = 38.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x81x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.028 mW/g



**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.35 V/m; Power Drift = 0.092 dB

Peak SAR (extrapolated) = 0.048 W/kg

**SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.015 mW/g**

Maximum value of SAR (measured) = 0.031 mW/g

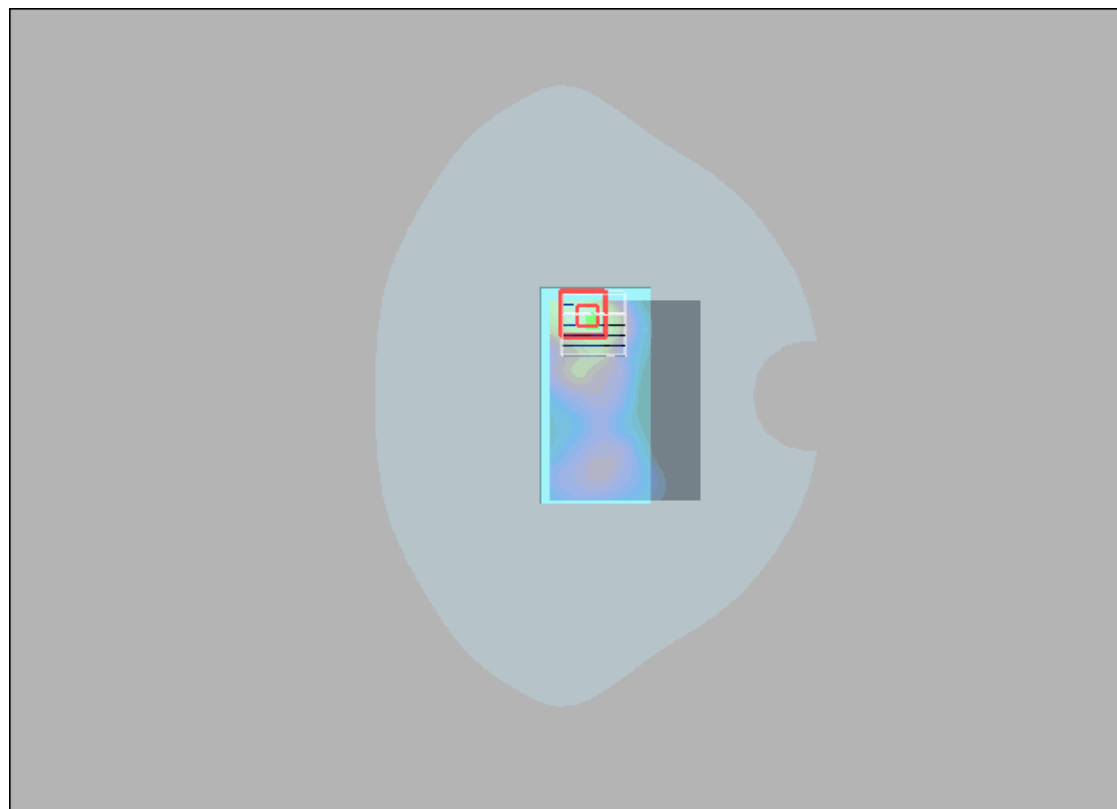

0 dB = 0.031mW/g