



ANTENNA SPECIFICATIONS

Item		Specifications
Antenna	Frequency Range	2400~2483.5MHz
	Polarization	Linear
	Peak Gain	3.34dBi
	V.S.W.R	<2.0
	Impedance	50Ω
	Return Loss	-10dB
	Connector	Microstrip line connection
	Efficiency	35%
Environmental	Operating Temperature	-10℃~+60℃
Manufacturer	Sichuan Hongrui Electric Co., Ltd Mianyan Export Processing Zone, Mianyan, Sichuan, China	

ANTENNA PATTERN

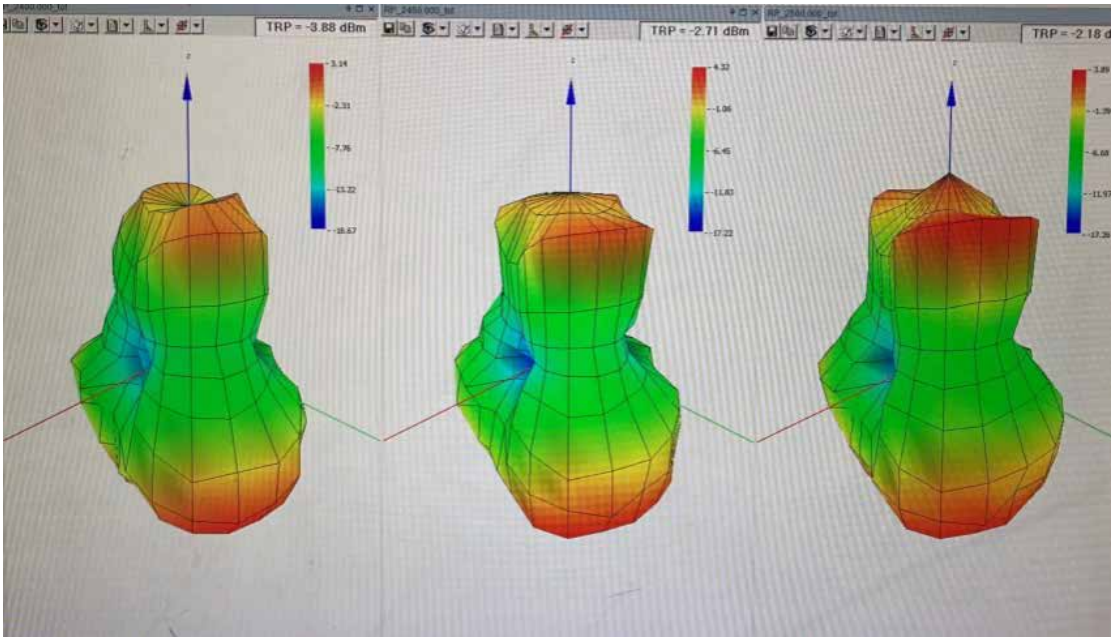

Frequency (MHz)	Gain (dBi)
2400	2.34
2410	2.35
2420	2.31
2430	2.44
2440	2.67
2450	2.99
2460	3.26
2470	3.34
2480	3.12
2490	2.88

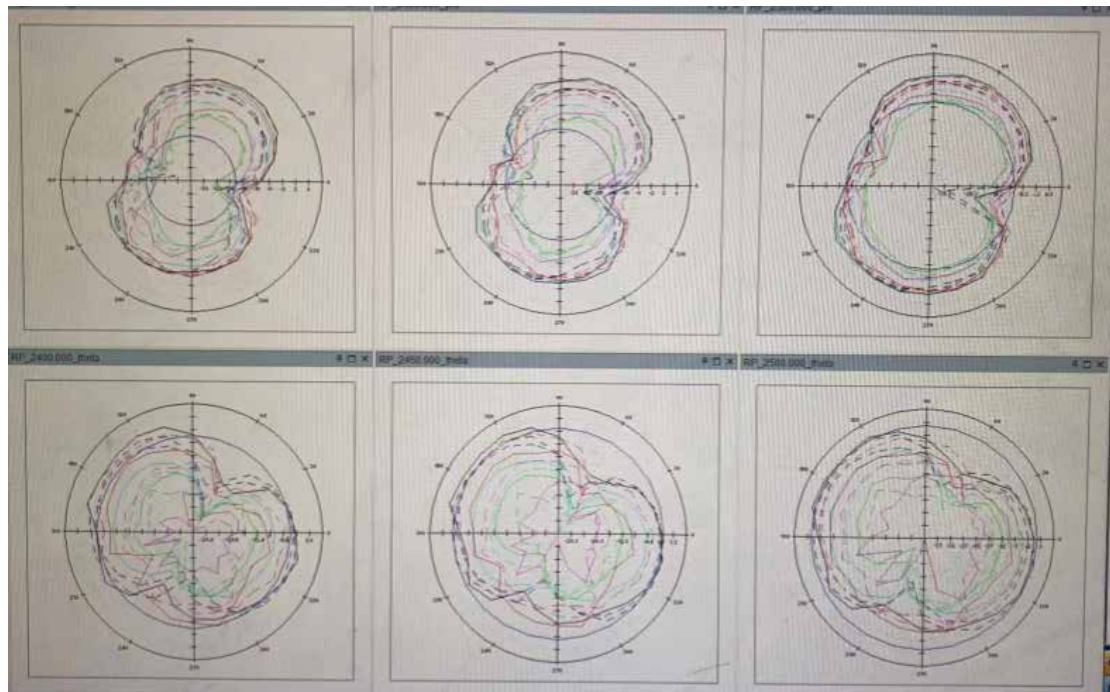

Antenna Picture:

