



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Qualcomm Atheros, Inc
Applicant Address	1700 Technology Dr, San Jose, CA 95110
FCC ID	PPD-AR5BHB116
Manufacturer's company	Qualcomm Atheros, Inc
Manufacturer Address	1700 Technology Dr, San Jose, CA 95110

Product Name	AR5BHB116 2x2 802.11n PCIe module
Brand Name	Atheros
Model No.	AR5BHB116
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350 MHz / 5470 ~ 5725 MHz / 5725 ~ 5850 MHz
Received Date	Aug. 06, 2010
Final Test Date	Mar. 29, 2016
Submission Type	Class II Change

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r01, KDB662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Class II Change	8
3.8. Table for Supporting Units	8
3.9. Table for Parameters of Test Software Setting	9
3.10. EUT Operation during Test	9
3.11. Duty Cycle	9
3.12. Test Configurations	10
4. TEST RESULT	11
4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	11
4.2. 6dB Spectrum Bandwidth Measurement	18
4.3. Maximum Conducted Output Power Measurement.....	23
4.4. Power Spectral Density Measurement	26
4.5. Radiated Emissions Measurement	31
4.6. Band Edge Emissions Measurement	61
4.7. Frequency Stability Measurement	73
4.8. Antenna Requirements	77
5. LIST OF MEASURING EQUIPMENTS	78
6. MEASUREMENT UNCERTAINTY.....	79
APPENDIX A. TEST PHOTOS	A1 ~ A3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5D1608	Rev. 01	Initial issue of report	Apr. 08, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : AR5BHB116 2x2 802.11n PCIe module
Brand Name : Atheros
Model No. : AR5BHB116
Applicant : Qualcomm Atheros, Inc
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 06, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

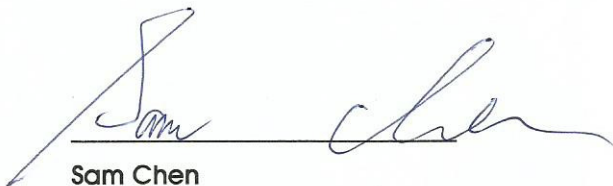

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.2	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	9.38 dB
4.4	15.407(a)	Power Spectral Density	Complies	25.77 dB
4.5	15.407(b)	Radiated Emissions	Complies	1.86 dB
4.6	15.407(b)	Band Edge Emissions	Complies	1.53 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11a: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	5150 ~ 5350 MHz / 5470 ~ 5725 MHz / 5725 ~ 5850 MHz
Channel Number	24 for 20MHz bandwidth ; 11 for 40MHz bandwidth
Channel Band Width (99%)	IEEE 802.11a: 22.40 MHz IEEE 802.11n MCS0 (HT20): 22.84 MHz IEEE 802.11n MCS0 (HT40): 40.23 MHz
Maximum Conducted Output Power	IEEE 802.11a: 18.54 dBm IEEE 802.11n MCS0 (HT20): 18.85 dBm IEEE 802.11n MCS0 (HT40): 15.27 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	☒ IP Based (Load Based) ☐ Frame Based
TPC Function	☒ With TPC ☐ Without TPC
Weather Band (5600~5650MHz)	☒ With 5600~5650MHz ☐ Without 5600~5650MHz
Beamforming Function	☒ With beamforming ☐ Without beamforming
Operate Condition	☒ Indoor ☐ Outdoor

Note: The product has beamforming function for 802.11abgn.

Antenna and Band width

Antenna	Two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11a	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS0-15
802.11n (HT40)	2	MCS0-15

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Brand / Model Name	Frequency Range (MHz)	Antenna Type	Connector	Antenna Gain (dBi)	Composite Gain (dBi)
Winstron Neweb Corporation / EBJ Main + EBJ Aux.	2400~2500	PIFA Antenna	I-PEX	3.0/3.62	6.33
Winstron Neweb Corporation / EBJ Aux. + EBJ Aux.	5150~5350	PIFA Antenna	I-PEX	3.08	6.08
Winstron Neweb Corporation / EBJ Main + EBJ Main	5470~5725	PIFA Antenna	I-PEX	4.76	7.77
Winstron Neweb Corporation / EBJ Main + EBJ Main	5725~5850	PIFA Antenna	I-PEX	4.76	7.7


Note:

For 5GHz function:

For IEEE 802.11a/n mode (2TX/2RX)

Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

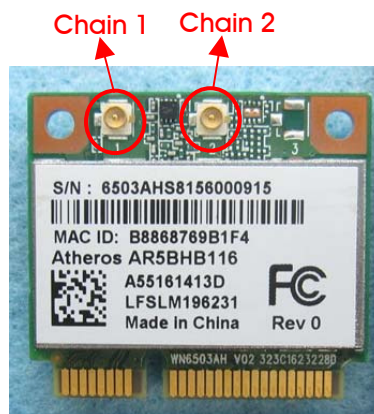

3.4. Table for Carrier Frequencies

The EUT has two bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 118, 126, 134, 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	120	5600 MHz
	102	5510 MHz	124	5620 MHz
	104	5520 MHz	126	5630 MHz
	108	5540 MHz	128	5640 MHz
	110	5550 MHz	132	5660 MHz
	112	5560 MHz	134	5670 MHz
	116	5580 MHz	136	5680 MHz
	118	5590 MHz	140	5700 MHz
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
Max. Conducted Output Power	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
Power Spectral Density	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
Radiated Emission Above 1GHz	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
Band Edge Emission	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
Frequency Stability	20 MHz	Band 4	-	157	1
	40 MHz	Band 4	-	151	1

Note: There are two modes of EUT, one is beamforming mode and the other is non-beamforming mode. After evaluating, beamforming mode had been evaluated to be the worst case, so it was selected to record in this test report.

The following test modes were performed for all tests:

For Radiated Emission test (Above 1GHz):

Mode 1: CTX - EUT

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: 080603

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Updating 5GHz Band 1 to "New Rules" from "Old Rules".	The output power remains the same, so it's no need to re-test.
Updating 5GHz Band 2~3 to "New Rules" from "Old Rules".	After evaluating, it's no need to re-test.
Updating 5GHz Band 4 to "New Rules" from "Old Rules".	26dB Bandwidth and 99% Occupied Bandwidth 6dB Spectrum Bandwidth - Maximum Conducted Output Power - Power Spectral Density - Radiated Emission Above 1GHz - Band Edge Emissions - Frequency Stability

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Test fixture	Liteon	TB003	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	ART2-GUI		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5745 MHz	5785 MHz	5825 MHz
802.11a	7.5	17	12
802.11n MCS0 HT20	7	17	11
Mode	NCB: 40MHz		
802.11n MCS0 HT40	5755 MHz	5795 MHz	
	4.5	12	

3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.341	1.406	95.36%	0.21	0.75
802.11n MCS0 HT20	1.254	1.319	95.06%	0.22	0.80
802.11n MCS0 HT40	0.610	0.665	91.72%	0.38	1.64

3.12. Test Configurations

3.12.1. Radiation Emissions Test Configuration

Test Configuration: above 1GHz

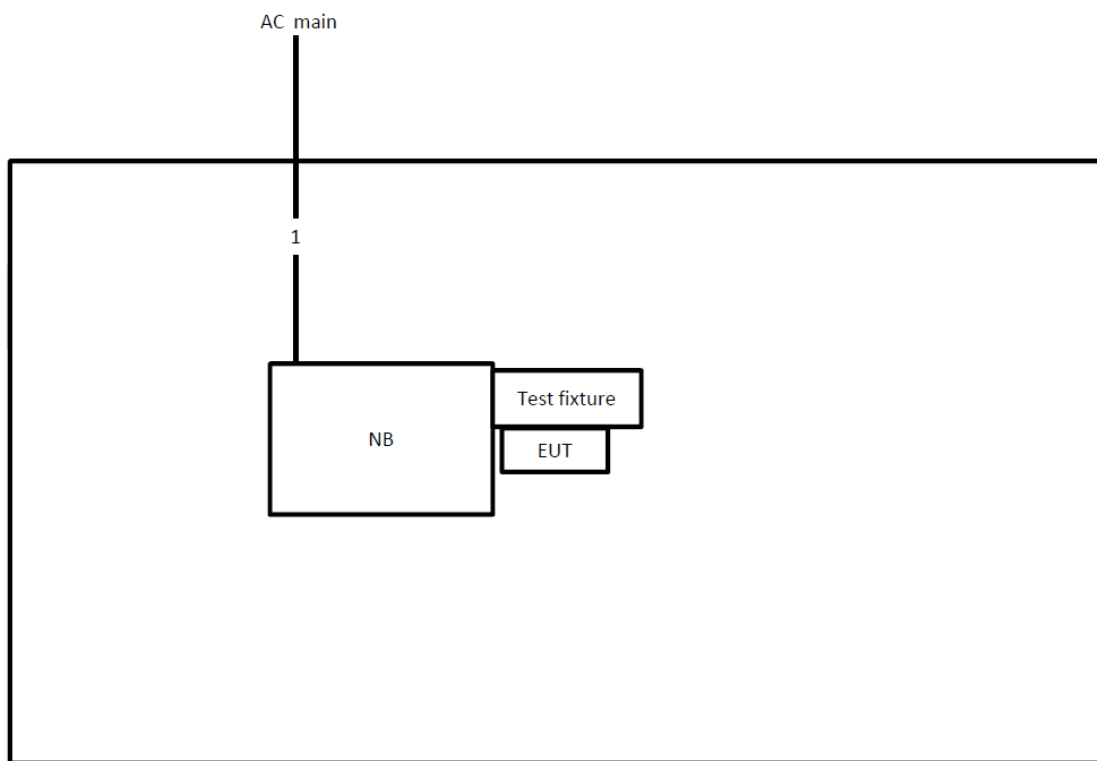

Item	Connection	Shielded	Length
1	Power cable	No	1.5m

4. TEST RESULT

4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.1.1. Limit

No restriction limits.

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.1.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.1.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.1.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	45%
Test Engineer	Wen Chao		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745 MHz	23.22	17.02
	5785 MHz	41.04	22.40
	5825 MHz	28.17	17.54
802.11n MCS0 HT20	5745 MHz	25.22	18.32
	5785 MHz	42.17	22.84
	5825 MHz	27.91	18.67
802.11n MCS0 HT40	5755 MHz	52.90	38.64
	5795 MHz	74.20	40.23

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5745 MHz

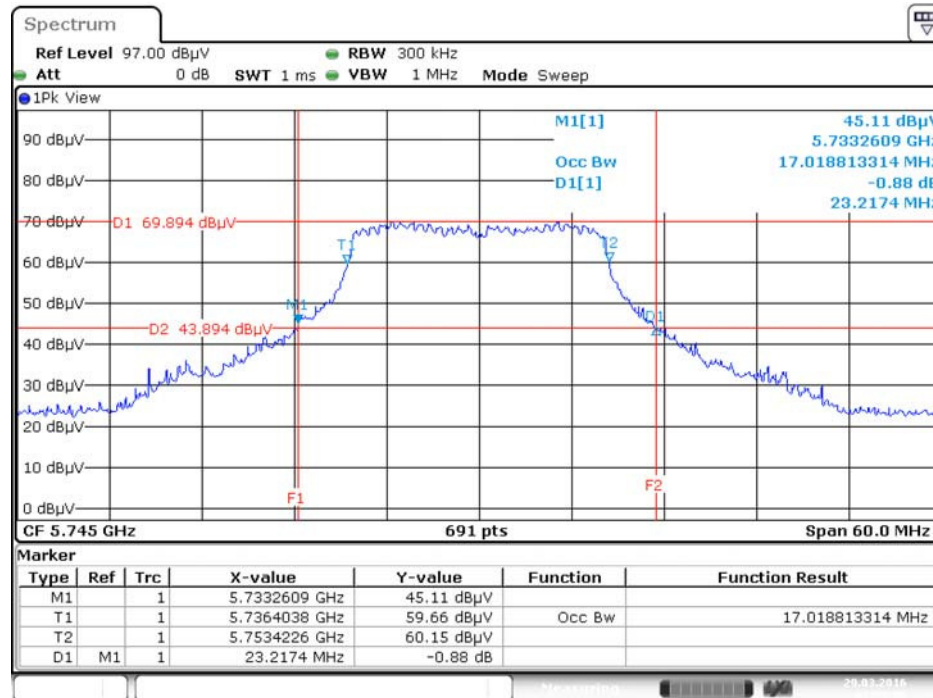


Date: 29.MAR.2016 02:55:36

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

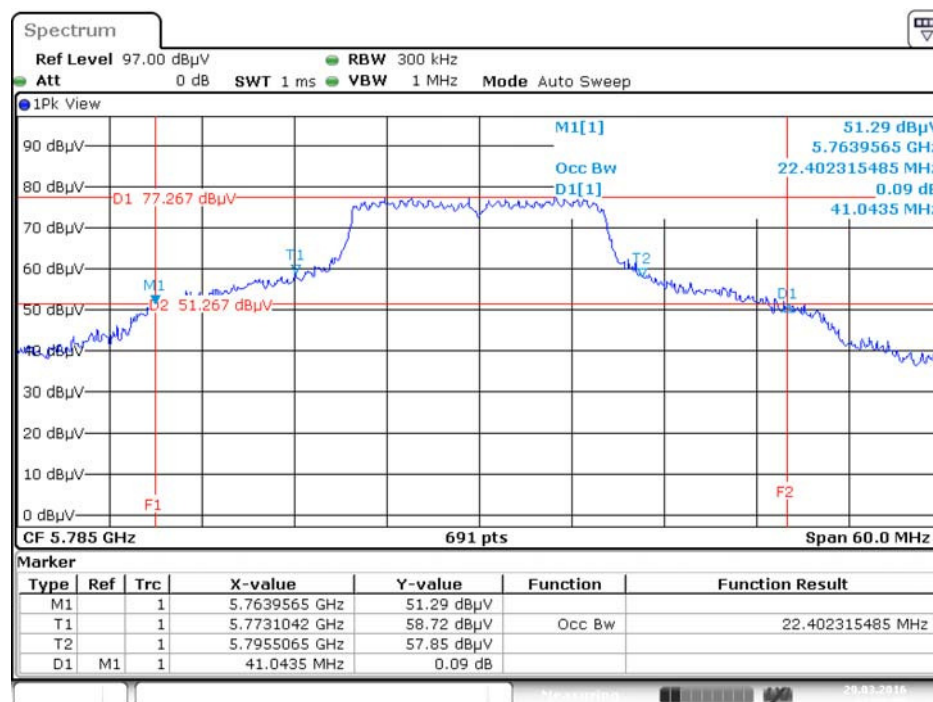


Date: 29.MAR.2016 02:58:59

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5825 MHz

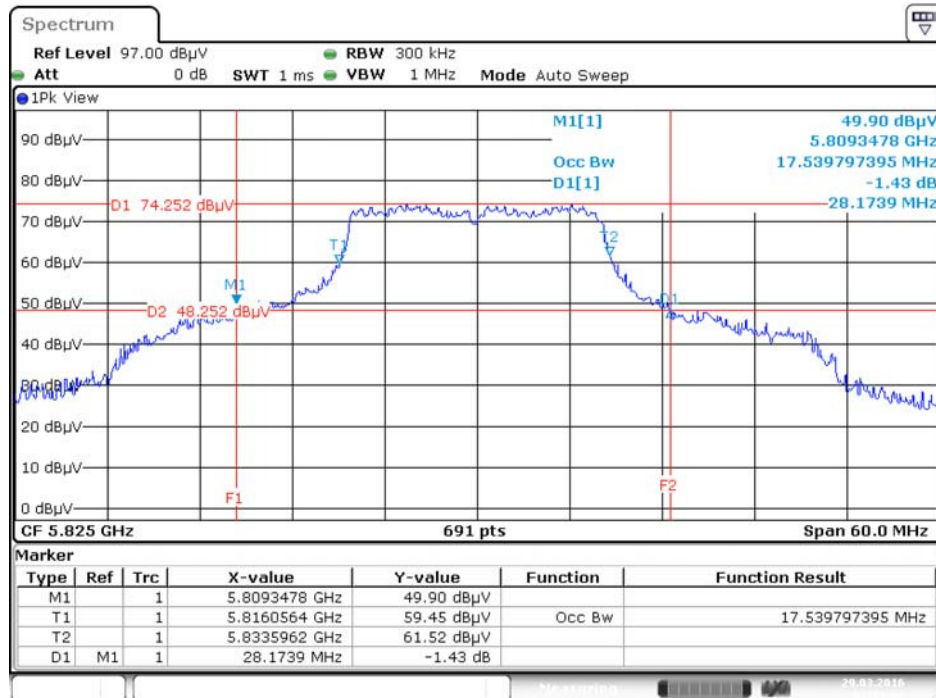


Date: 29.MAR.2016 02:59:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5745 MHz

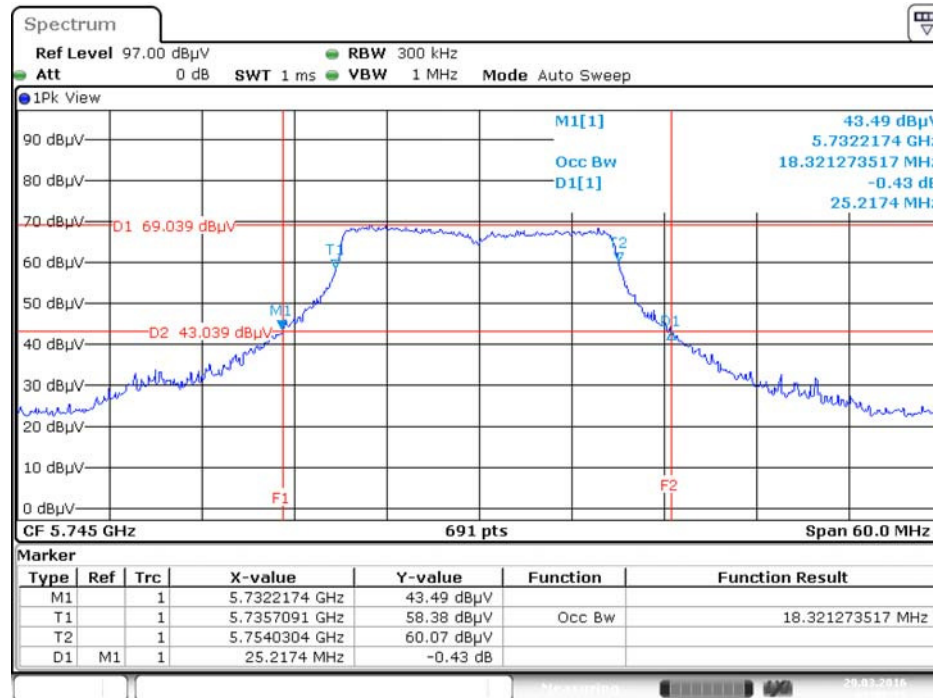


Date: 29.MAR.2016 03:02:32

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5785 MHz

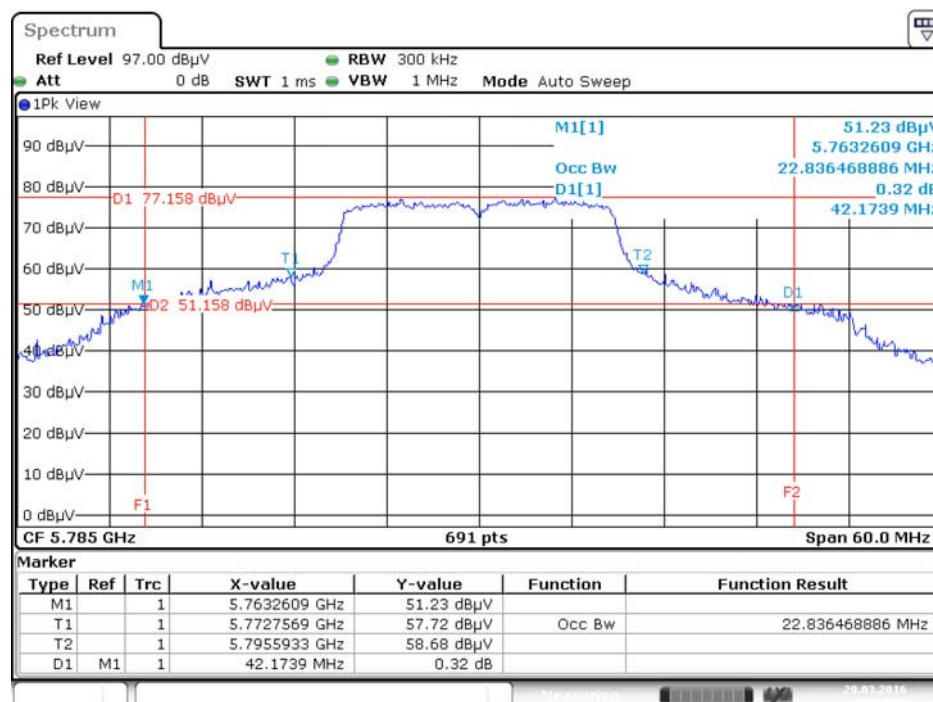


Date: 29.MAR.2016 03:03:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5825 MHz

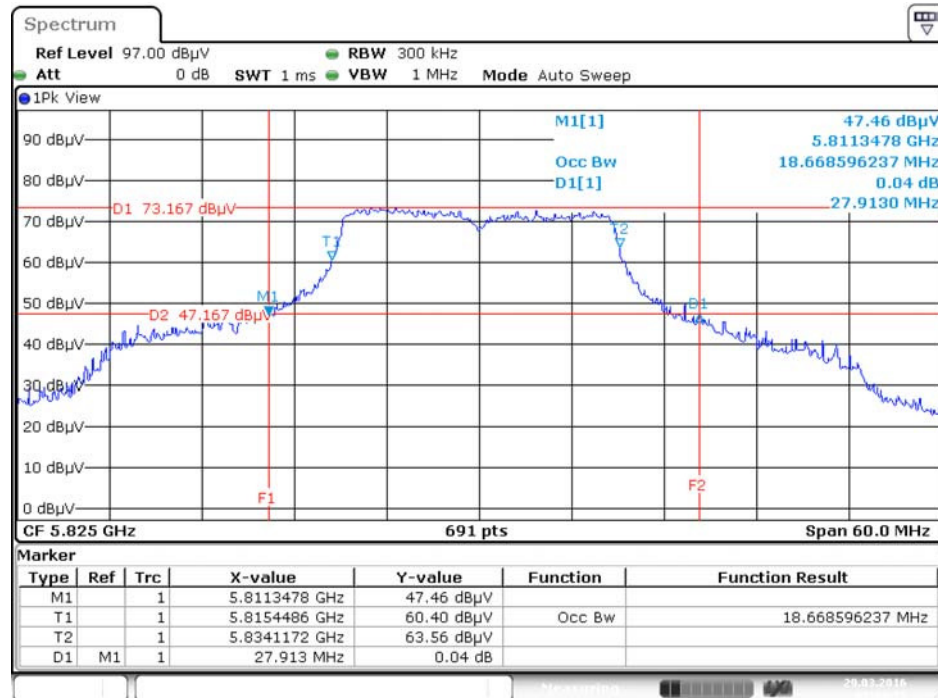


Date: 29.MAR.2016 03:04:51

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 / 5755 MHz

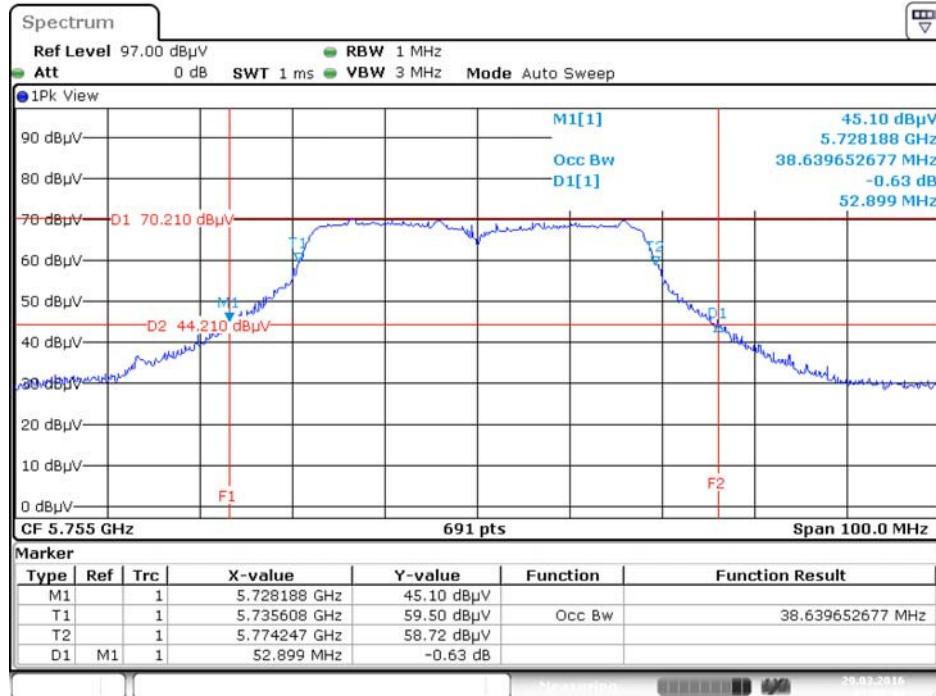

Date: 29.MAR.2016 03:05:49

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 / 5795 MHz

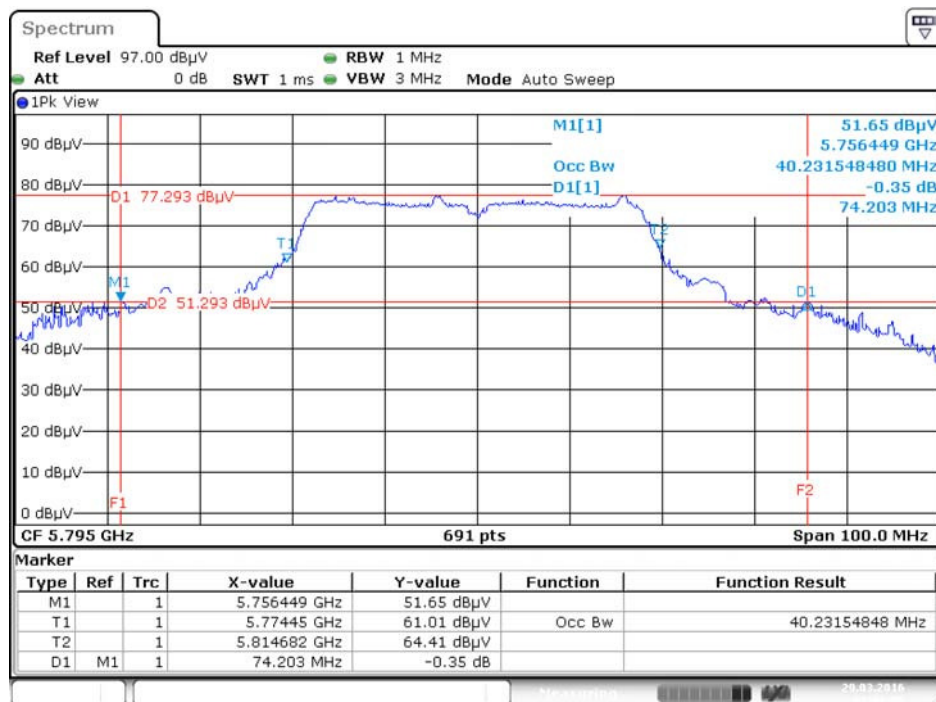

Date: 29.MAR.2016 03:06:36

4.2. 6dB Spectrum Bandwidth Measurement

4.2.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.2.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 6dB Spectrum Bandwidth


Temperature	26°C	Humidity	45%
Test Engineer	Wen Chao		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	16.41	500	Complies
	5785 MHz	16.29	500	Complies
	5825 MHz	16.29	500	Complies
802.11n MCS0 HT20	5745 MHz	17.57	500	Complies
	5785 MHz	15.71	500	Complies
	5825 MHz	17.33	500	Complies
802.11n MCS0 HT40	5755 MHz	36.06	500	Complies
	5795 MHz	36.06	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

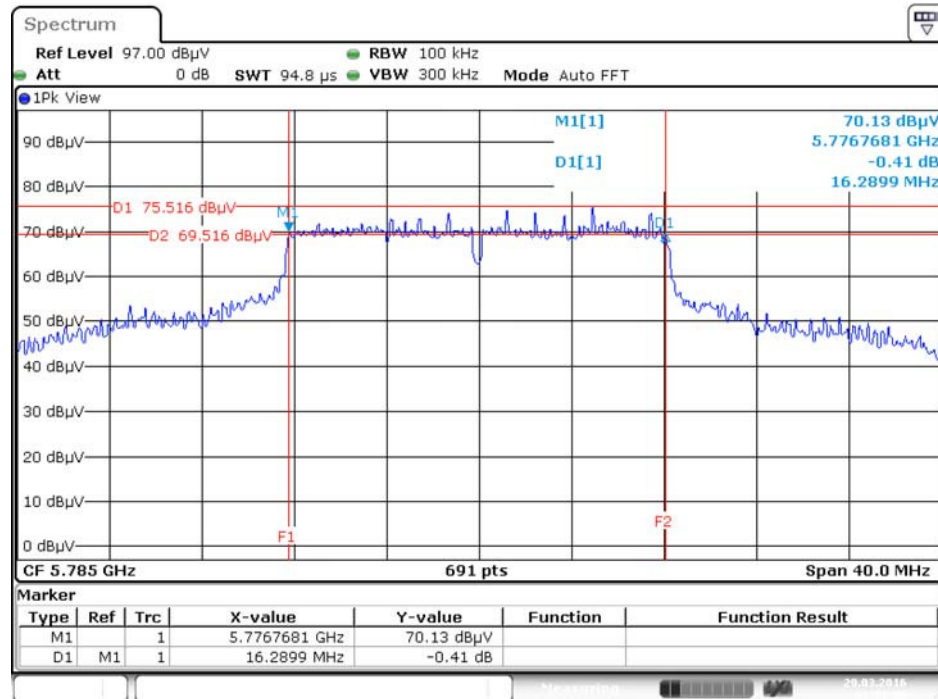


Date: 29.MAR.2016 03:52:01

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5785 MHz

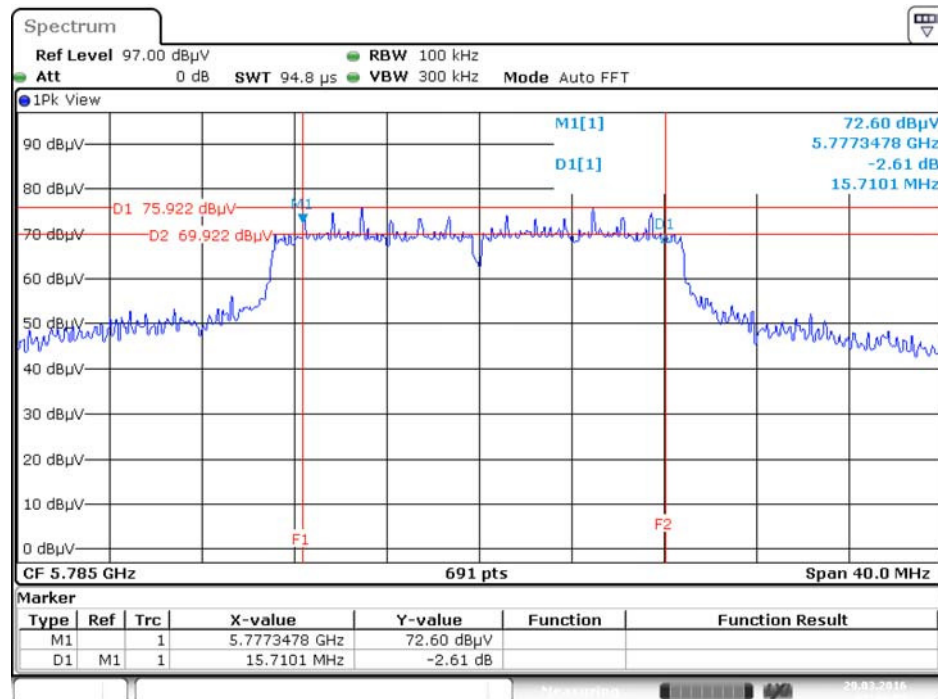

Date: 29.MAR.2016 03:49:03

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 / 5755MHz

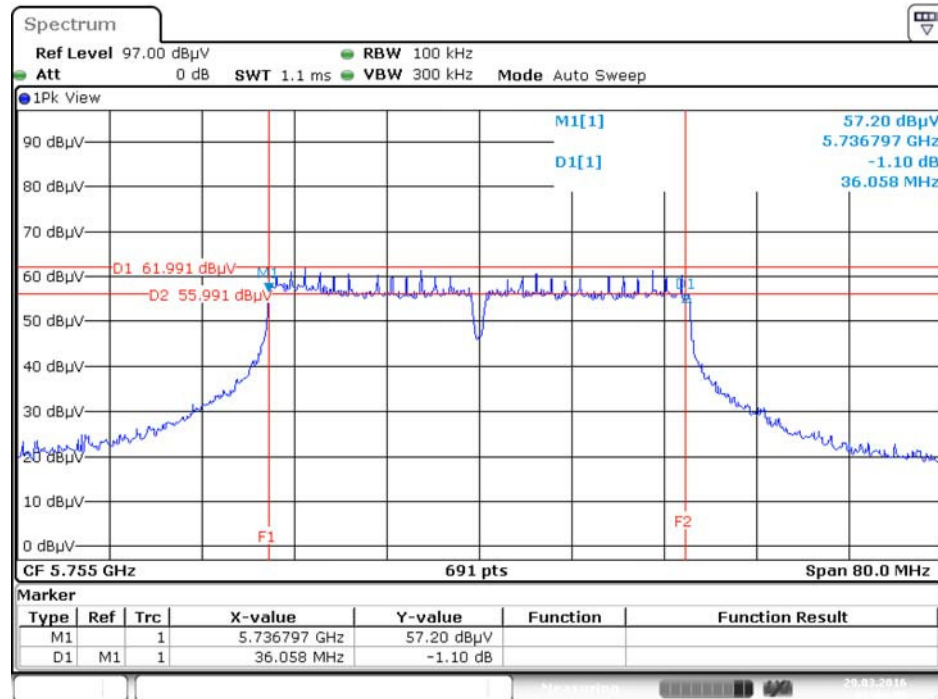

Date: 29.MAR.2016 03:09:20

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

	Frequency Band	Limit
☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	45%
Test Engineer	Wen Chao	Test Date	Jan. 05, 2016 ~ Mar. 29, 2016

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
802.11a	5745 MHz	9.44	7.66	11.65	28.23	Complies
	5785 MHz	15.92	15.09	18.54	28.23	Complies
	5825 MHz	13.37	11.87	15.69	28.23	Complies
802.11n MCS0 HT20	5745 MHz	8.96	6.77	11.01	28.23	Complies
	5785 MHz	16.28	15.35	18.85	28.23	Complies
	5825 MHz	12.59	11.07	14.91	28.23	Complies
802.11n MCS0 HT40	5755 MHz	6.06	4.44	8.34	28.23	Complies
	5795 MHz	12.80	11.65	15.27	28.23	Complies

Note: Directional gain=7.77dBi>6dBi, so limit=30(7.77-6)=28.23

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
☒	5.725~5.85 GHz	30 dBm/500kHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should $\leq 30 \text{ dBm}$.

4.4.4. Test Setup Layout

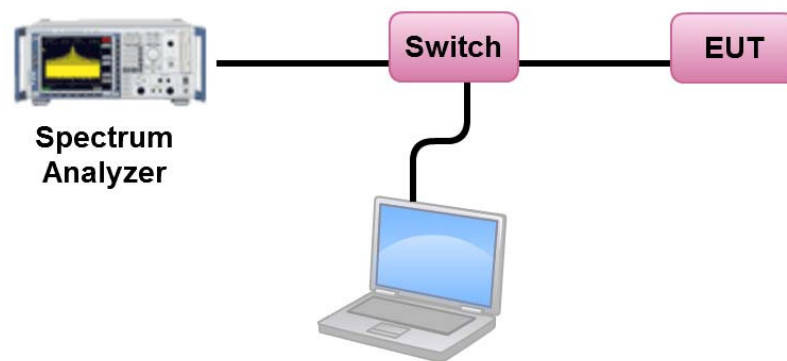

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	45%
Test Engineer	Wen Chao	Test Date	Jan. 05, 2016 ~ Mar. 29, 2016

Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	-1.62	-3.01	-4.63	28.23	Complies
157	5785 MHz	5.19	-3.01	2.18	28.23	Complies
165	5825 MHz	2.32	-3.01	-0.69	28.23	Complies

Note: Directional gain=7.77dBi>6dBi, so limit=30(7.77-6)=28.23

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	-2.50	-3.01	-5.51	28.23	Complies
157	5785 MHz	5.47	-3.01	2.46	28.23	Complies
165	5825 MHz	1.42	-3.01	-1.59	28.23	Complies

Note: Directional gain=7.77dBi>6dBi, so limit=30(7.77-6)=28.23

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	-8.17	-3.01	-11.18	28.23	Complies
159	5795 MHz	-0.83	-3.01	-3.84	28.23	Complies

Note: Directional gain=7.77dBi>6dBi, so limit=30(7.77-6)=28.23


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

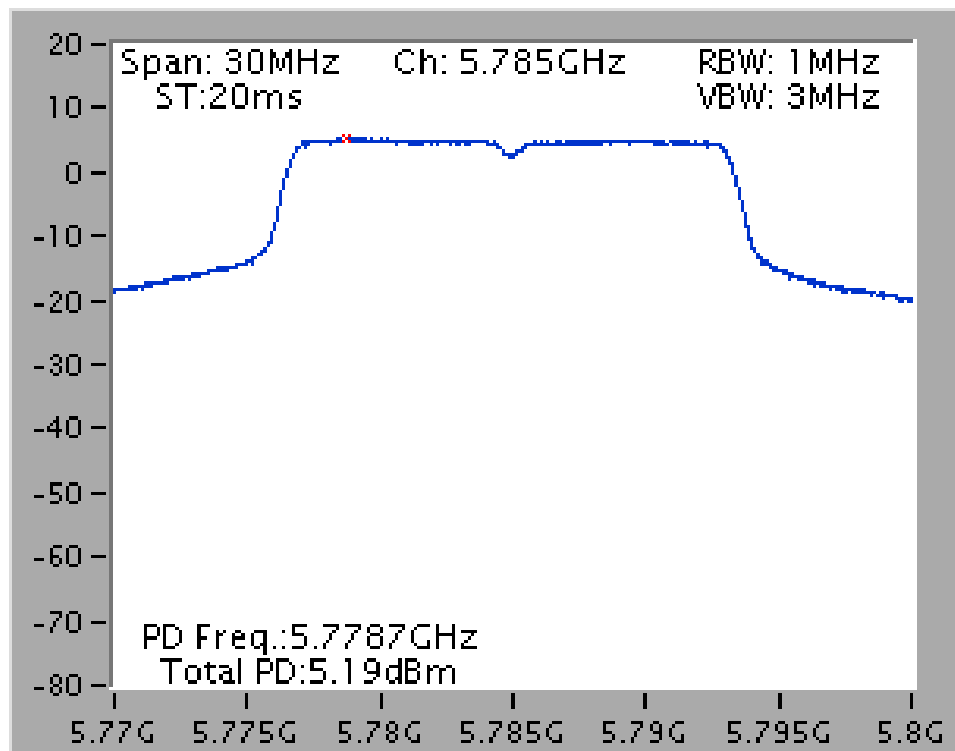

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5785 MHz

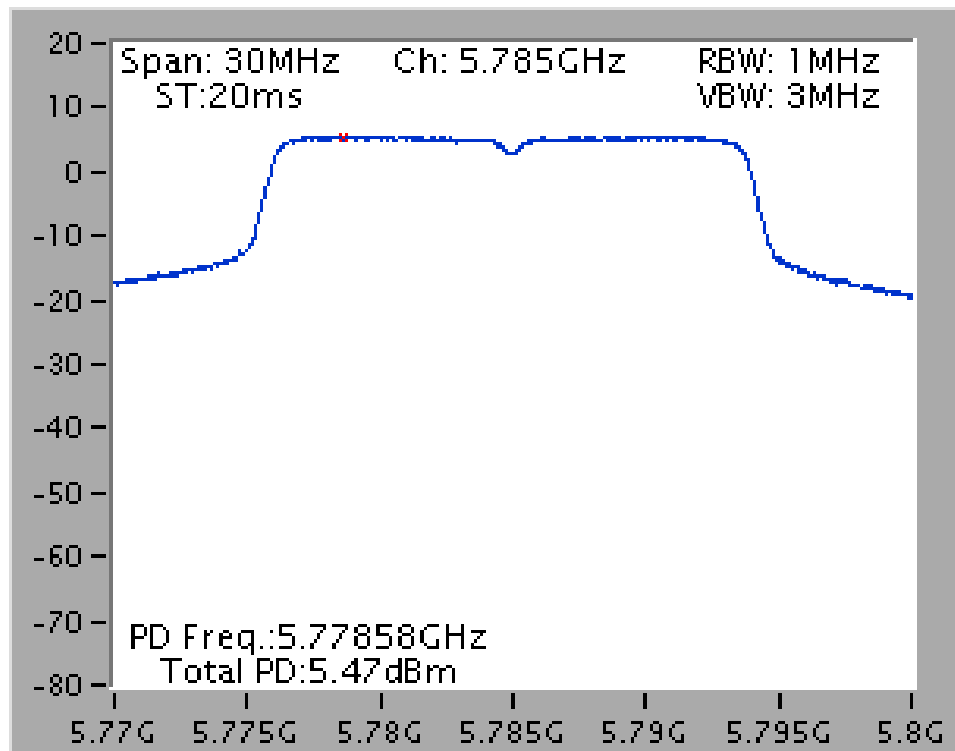

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 / 5795 MHz

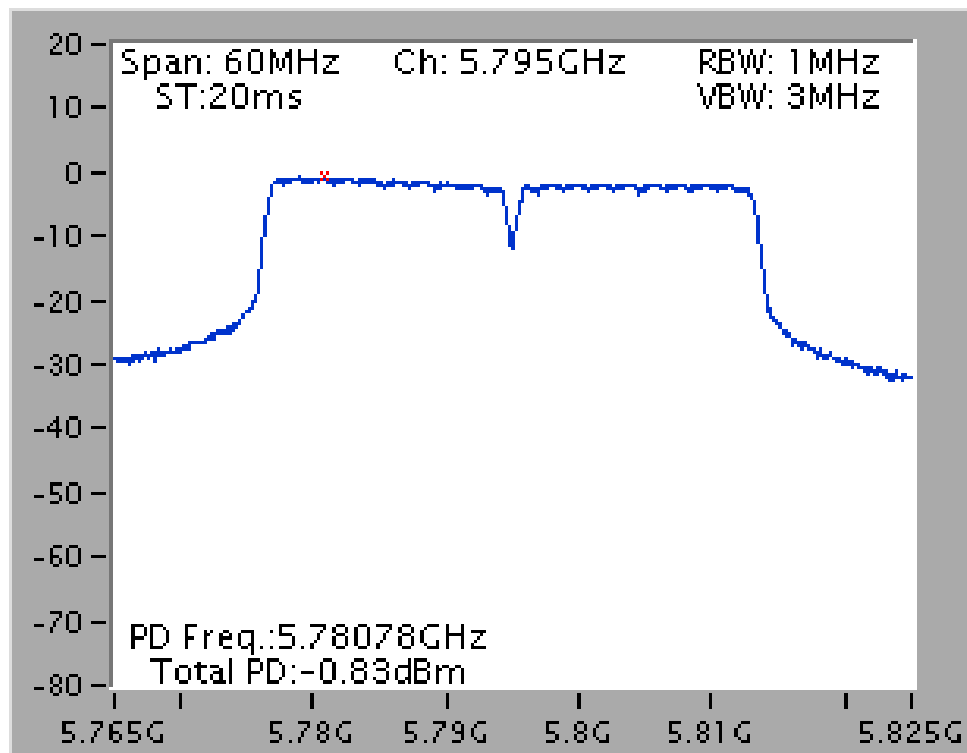

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures

Radiated:


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

Conducted:

The Conducted test procedure is the same as section 4.4.3.

4.5.4. Test Setup Layout

Radiated:

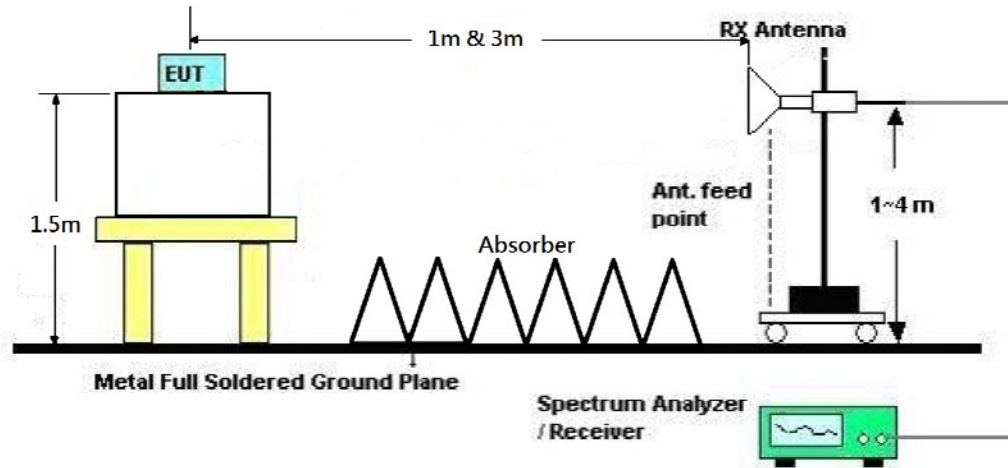

Conducted:

The Conducted test procedure is the same as section 4.4.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results for Radiated Emissions (1GHz~40GHz)

Radiated measurement:

Temperature	22°C	Humidity	66%
Test Engineer	Lucke Hhieh	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2
Test Date	Jan. 05, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11485.86	47.53	54.00	-6.47	27.46	14.24	39.20	33.37	169	161	Average	HORIZONTAL
2	11489.82	60.36	74.00	-13.64	40.29	14.24	39.20	33.37	169	161	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11494.64	60.67	74.00	-13.33	40.60	14.24	39.20	33.37	155	62	Peak	VERTICAL
2	11498.88	48.42	54.00	-5.58	28.35	14.24	39.20	33.37	155	62	Average	VERTICAL

Temperature	22°C	Humidity	66%
Test Engineer	Lucke Hhieh	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2
Test Date	Jan. 05, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11575.44	61.22	74.00	-12.78	41.06	14.35	39.20	33.39	100	233	Peak	HORIZONTAL
2	11575.64	49.45	54.00	-4.55	29.29	14.35	39.20	33.39	100	233	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11569.76	50.82	54.00	-3.18	30.66	14.35	39.20	33.39	108	143	Average	VERTICAL
2	11575.52	63.29	74.00	-10.71	43.13	14.35	39.20	33.39	108	143	Peak	VERTICAL

Temperature	22°C	Humidity	66%
Test Engineer	Lucke Hhieh	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2
Test Date	Jan. 05, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11644.96	63.57	74.00	-10.43	43.33	14.45	39.20	33.41	123	133	Peak	HORIZONTAL
2	11650.72	50.95	54.00	-3.05	30.71	14.45	39.20	33.41	123	133	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11645.36	63.72	74.00	-10.28	43.48	14.45	39.20	33.41	125	69	Peak	VERTICAL
2	11650.44	50.56	54.00	-3.44	30.32	14.45	39.20	33.41	125	69	Average	VERTICAL

Temperature	22°C	Humidity	66%
Test Engineer	Lucke Hhieh	Configurations	IEEE 802.11n MCS0 HT20 CH 149 / Chain 1 + Chain 2
Test Date	Jan. 05, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11496.84	60.94	74.00	-13.06	40.87	14.24	39.20	33.37	131	294 Peak	HORIZONTAL
2	11498.04	47.31	54.00	-6.69	27.24	14.24	39.20	33.37	131	294 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11488.04	60.36	74.00	-13.64	40.29	14.24	39.20	33.37	141	103 Peak	VERTICAL
2	11498.36	48.00	54.00	-6.00	27.93	14.24	39.20	33.37	141	103 Average	VERTICAL

Temperature	22°C	Humidity	66%
Test Engineer	Lucke Hhieh	Configurations	IEEE 802.11n MCS0 HT20 CH 157 / Chain 1 + Chain 2
Test Date	Jan. 05, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11574.60	49.03	54.00	-4.97	28.87	14.35	39.20	33.39	146	166 Average	HORIZONTAL
2	11594.30	61.12	74.00	-12.88	40.92	14.40	39.20	33.40	146	166 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11568.70	63.19	74.00	-10.81	43.03	14.35	39.20	33.39	100	23 Peak	VERTICAL
2	11572.30	50.61	54.00	-3.39	30.45	14.35	39.20	33.39	100	23 Average	VERTICAL

Temperature	22°C	Humidity	66%
Test Engineer	Lucke Hhieh	Configurations	IEEE 802.11n MCS0 HT20 CH 165 / Chain 1 + Chain 2
Test Date	Jan. 05, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11652.10	49.57	54.00	-4.43	29.27	14.51	39.20	33.41	156	117	Average	HORIZONTAL
2	11654.10	61.58	74.00	-12.42	41.28	14.51	39.20	33.41	156	117	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11646.40	61.32	74.00	-12.68	41.08	14.45	39.20	33.41	173	282	Peak	VERTICAL
2	11654.00	49.01	54.00	-4.99	28.71	14.51	39.20	33.41	173	282	Average	VERTICAL

Temperature	22°C	Humidity	66%
Test Engineer	Lucke Hhieh	Configurations	IEEE 802.11n MCS0 HT40 CH 151 / Chain 1 + Chain 2
Test Date	Jan. 05, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11524.60	48.12	54.00	-5.88	28.01	14.29	39.20	33.38	159	271	Average	HORIZONTAL
2	11526.80	60.67	74.00	-13.33	40.56	14.29	39.20	33.38	159	271	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11522.70	60.45	74.00	-13.55	40.34	14.29	39.20	33.38	100	35	Peak	VERTICAL
2	11529.70	48.25	54.00	-5.75	28.14	14.29	39.20	33.38	100	35	Average	VERTICAL

Temperature	22°C	Humidity	66%
Test Engineer	Lucke Hhieh	Configurations	IEEE 802.11n MCS0 HT40 CH 159 / Chain 1 + Chain 2
Test Date	Jan. 05, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11591.10	50.02	54.00	-3.98	29.82	14.40	39.20	33.40	107	42	Average	HORIZONTAL
2	11613.10	62.25	74.00	-11.75	42.05	14.40	39.20	33.40	107	42	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11593.30	49.52	54.00	-4.48	29.32	14.40	39.20	33.40	255	324	Average	VERTICAL
2	11604.00	61.57	74.00	-12.43	41.37	14.40	39.20	33.40	255	324	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Conducted measurement:

Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a / Average / Chain 1 + Chain 2

Frequency(MHz)	Chain 1 (TX1) Spurious Level (dBm)	Chain 2 (TX2) Spurious Level (dBm)	Total Spurious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-59.81	-59.97	-49.11	-41.20	7.91
5785	-54.64	-53.17	-43.06	-41.20	1.86
5825	-54.61	-54.35	-43.70	-41.20	2.50

Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a / Peak / Chain 1 + Chain 2

Frequency(MHz)	Chain 1 (TX1) Spurious Level (dBm)	Chain 2 (TX2) Spurious Level (dBm)	Total Spurious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-45.95	-46.36	-35.37	-21.20	14.17
5785	-40.83	-38.33	-28.62	-21.20	7.42
5825	-39.91	-40.32	-29.33	-21.20	8.13

Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT20 / Average / Chain 1 + Chain 2

Frequency(MHz)	Chain 1 (TX1) Spruiious Level (dBm)	Chain 2 (TX2) Spruiious Level (dBm)	Total Spruiious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-63.13	-62.62	-52.09	-41.20	10.89
5785	-54.02	-53.74	-43.10	-41.20	1.90
5825	-56.47	-58.87	-46.73	-41.20	5.53

Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT20 / Peak / Chain 1 + Chain 2

Frequency(MHz)	Chain 1 (TX1) Spruiious Level (dBm)	Chain 2 (TX2) Spruiious Level (dBm)	Total Spruiious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-47.90	-47.64	-36.99	-21.20	15.79
5785	-41.35	-40.79	-30.28	-21.20	9.08
5825	-42.33	-44.37	-32.45	-21.20	11.25


Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT40 / Average / Chain 1 + Chain 2

Frequency(MHz)	Chain 1 (TX1) Spruious Level (dBm)	Chain 2 (TX2) Spruious Level (dBm)	Total Spruious Level (dBm)	Limit (dBm)	Margin (dB)
5755	-69.32	-69.32	-58.54	-41.20	17.34
5795	-59.81	-57.11	-47.47	-41.20	6.27

Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT40 / Peak / Chain 1 + Chain 2


Frequency(MHz)	Chain 1 (TX1) Spruious Level (dBm)	Chain 2 (TX2) Spruious Level (dBm)	Total Spruious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-54.47	-55.90	-44.35	-21.20	23.15
5785	-45.54	-43.48	-33.61	-21.20	12.41

Plot on Configuration IEEE 802.11a / 5745MHz / Average / Chain 1 (TX1)

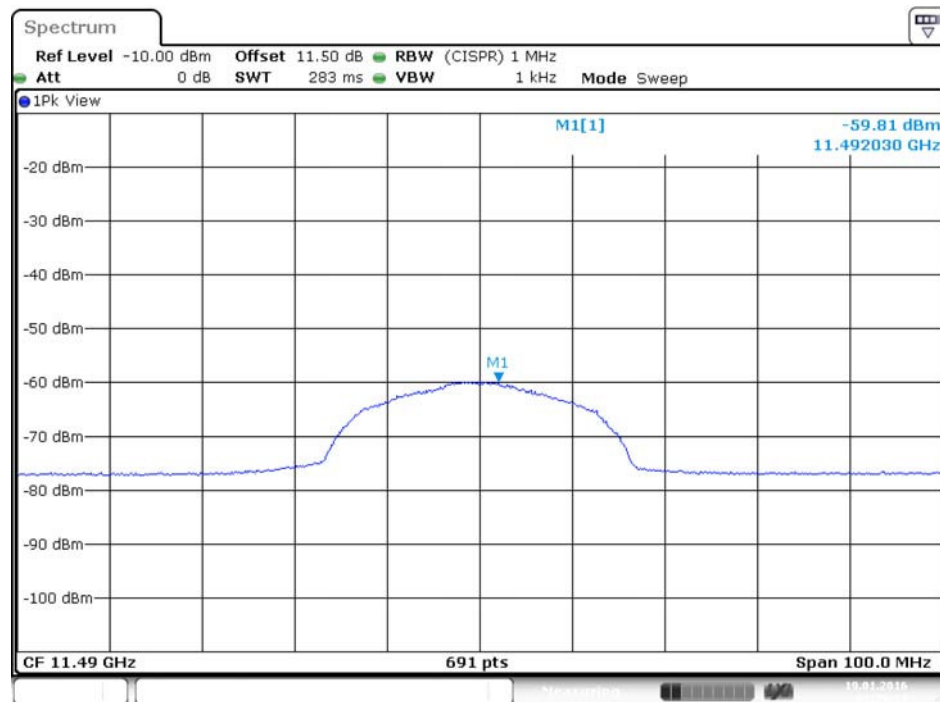

Date: 19.JAN.2016 01:29:19

Plot on Configuration IEEE 802.11a / 5745MHz / Average / Chain 2 (TX2)

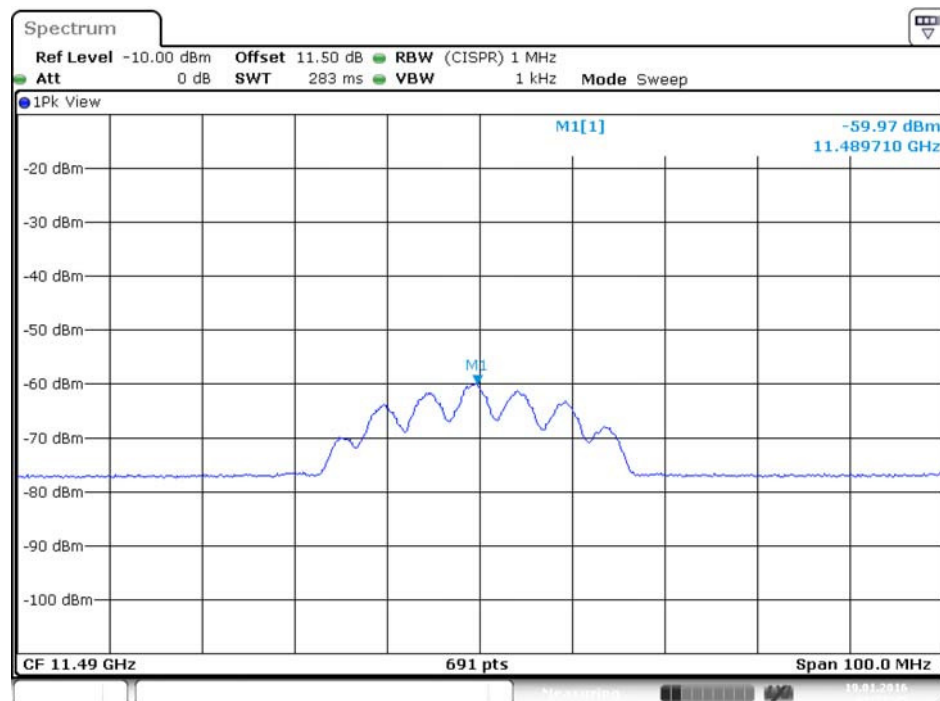


Date: 19.JAN.2016 01:27:44

Plot on Configuration IEEE 802.11a / 5785MHz / Average / Chain 1 (TX1)




Date: 28. MAR. 2016 22:34:55

Plot on Configuration IEEE 802.11a / 5785MHz / Average / Chain 2 (TX2)

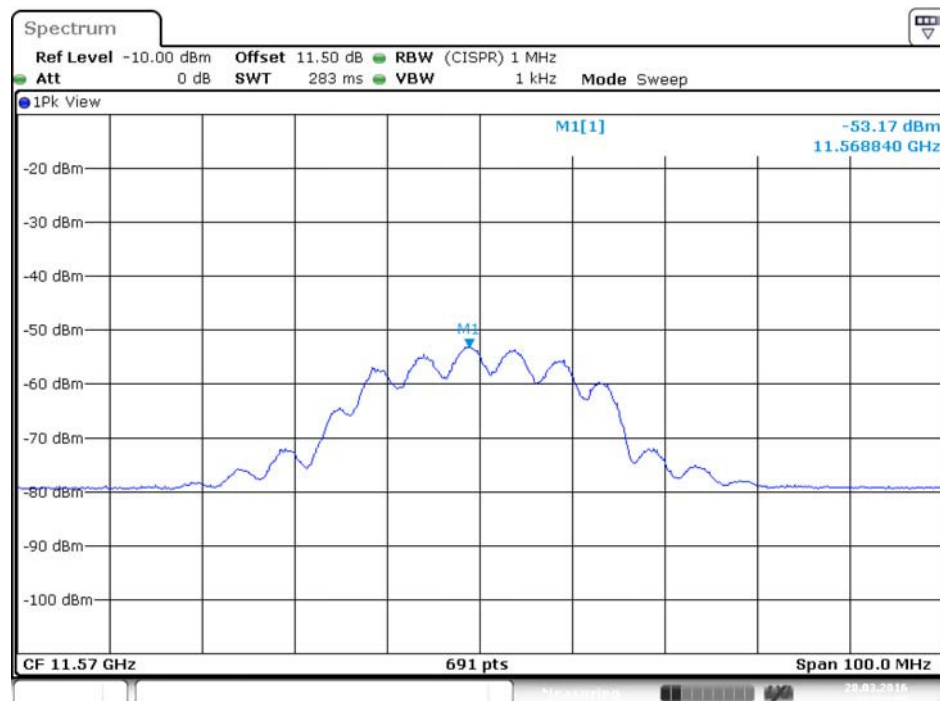

Date: 28. MAR. 2016 22:35:55

Plot on Configuration IEEE 802.11a / 5825MHz / Average / Chain 1 (TX1)

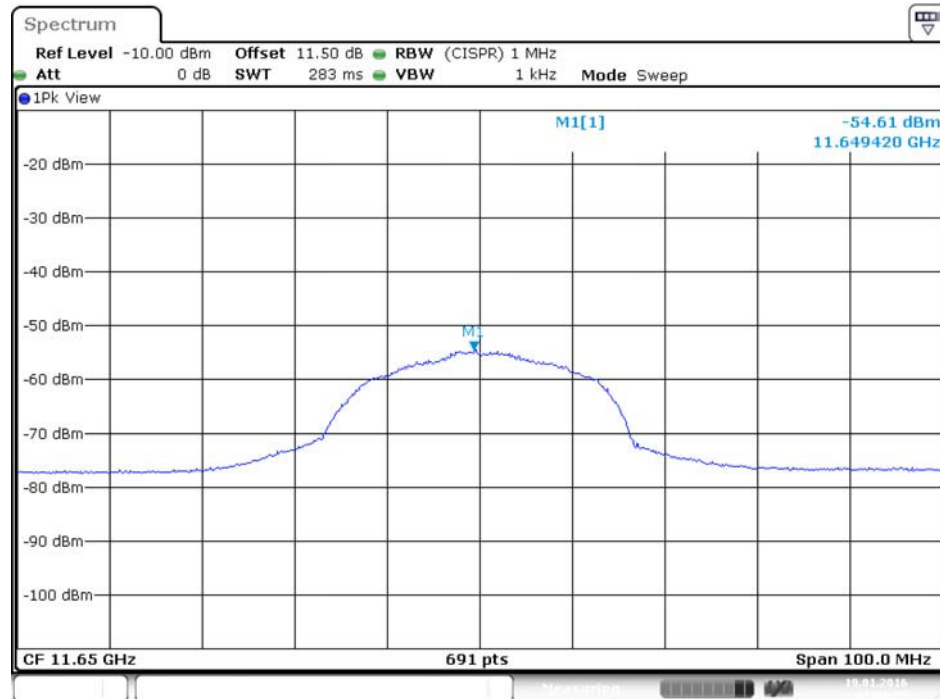


Date: 19.JAN.2016 01:44:29

Plot on Configuration IEEE 802.11a / 5825MHz / Average / Chain 2 (TX2)




Date: 19.JAN.2016 01:46:27

Plot on Configuration IEEE 802.11a / 5745MHz / Peak / Chain 1 (TX1)

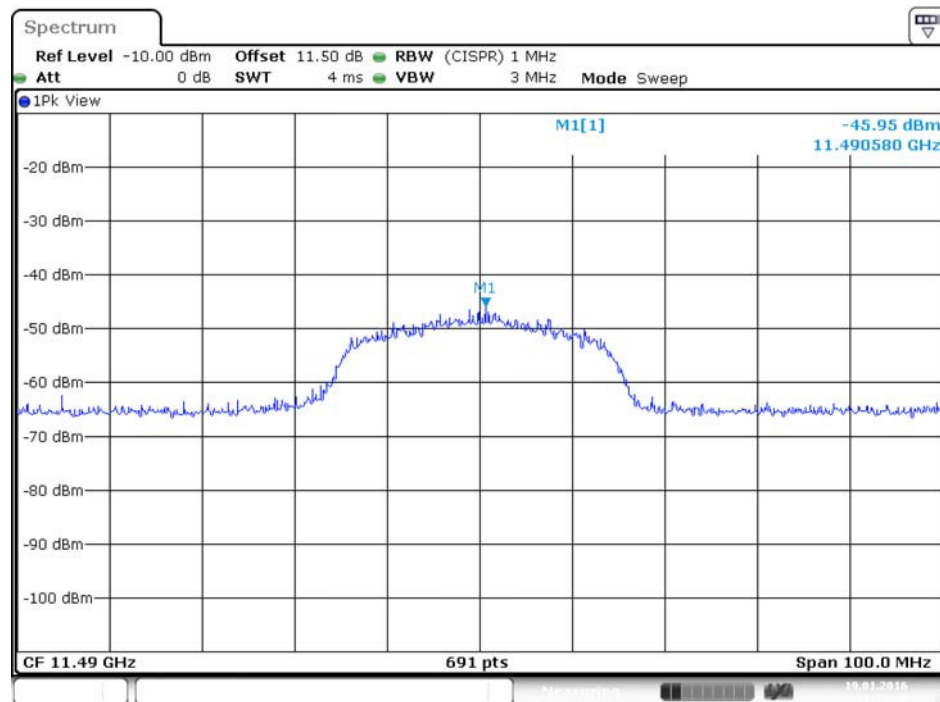


Date: 19.JAN.2016 01:24:49

Plot on Configuration IEEE 802.11a / 5745MHz / Peak / Chain 2 (TX2)

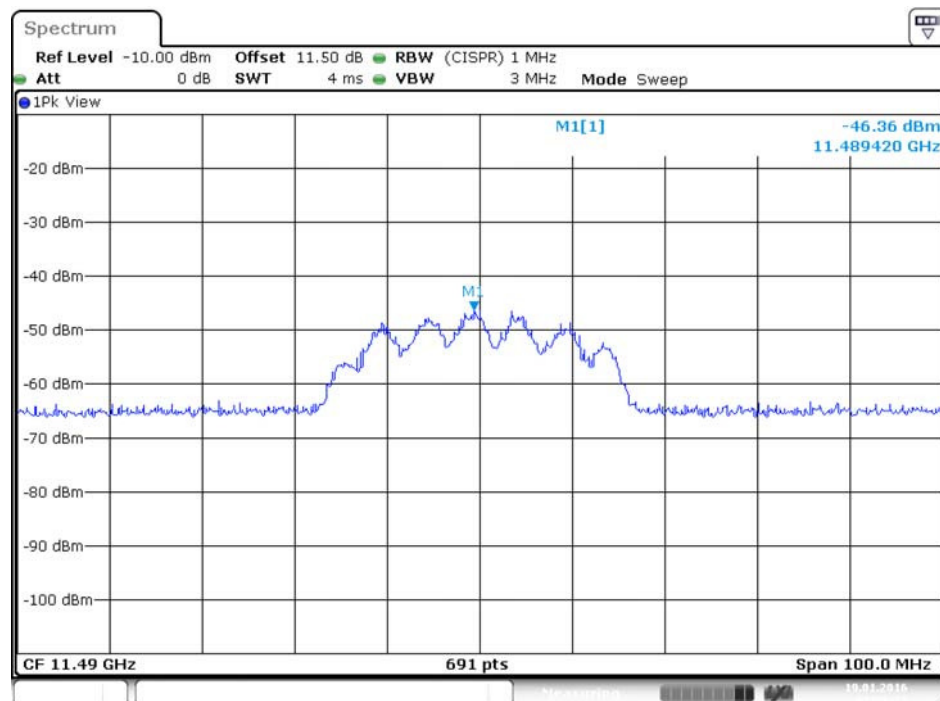


Date: 19.JAN.2016 01:26:37

Plot on Configuration IEEE 802.11a / 5785MHz / Peak / Chain 1 (TX1)

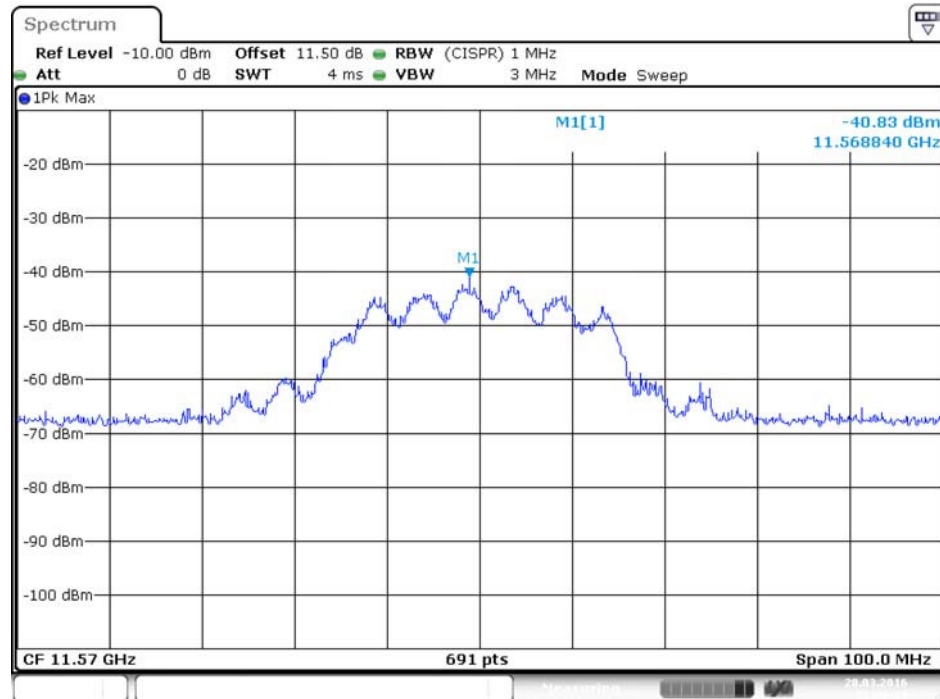


Date: 28.MAR.2016 22:36:18

Plot on Configuration IEEE 802.11a / 5785MHz / Peak / Chain 2 (TX2)

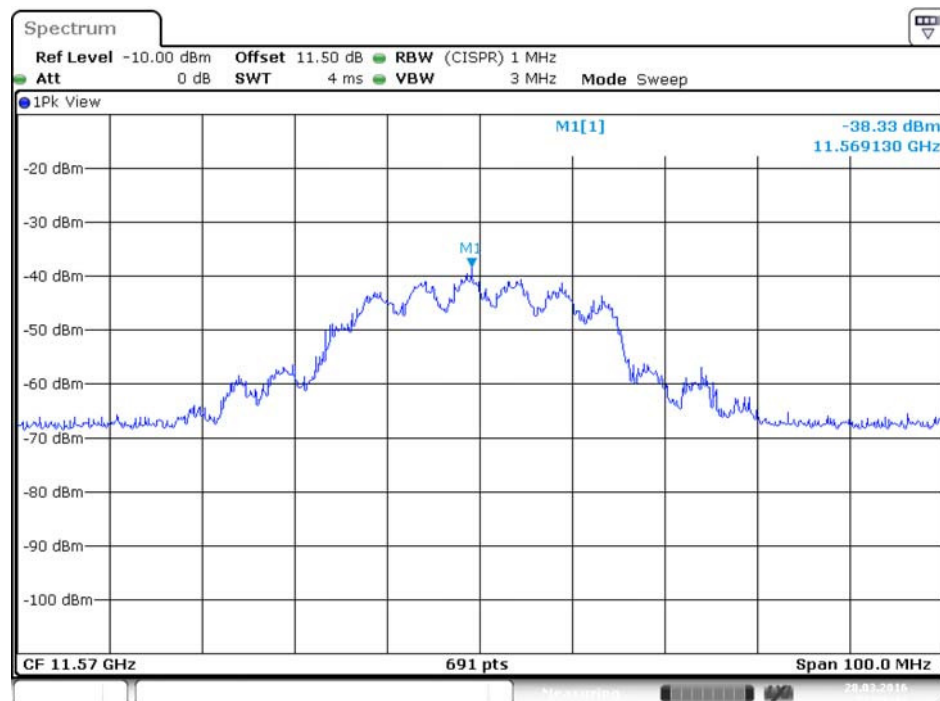


Date: 28.MAR.2016 22:36:41

Plot on Configuration IEEE 802.11a / 5825MHz / Peak / Chain 1 (TX1)

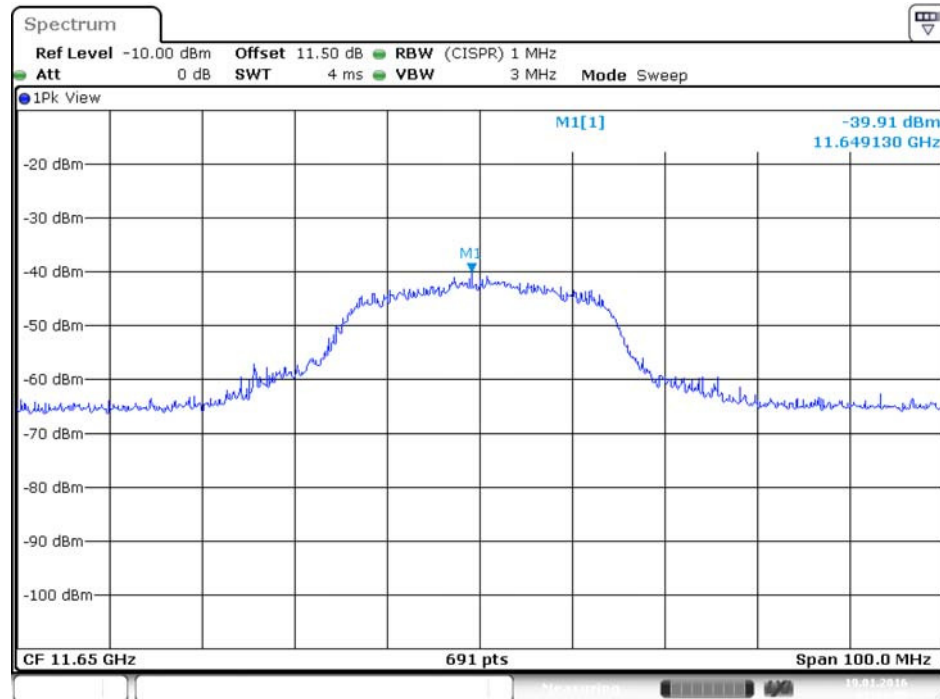


Date: 19.JAN.2016 01:45:00

Plot on Configuration IEEE 802.11a / 5825MHz / Peak / Chain 2 (TX2)

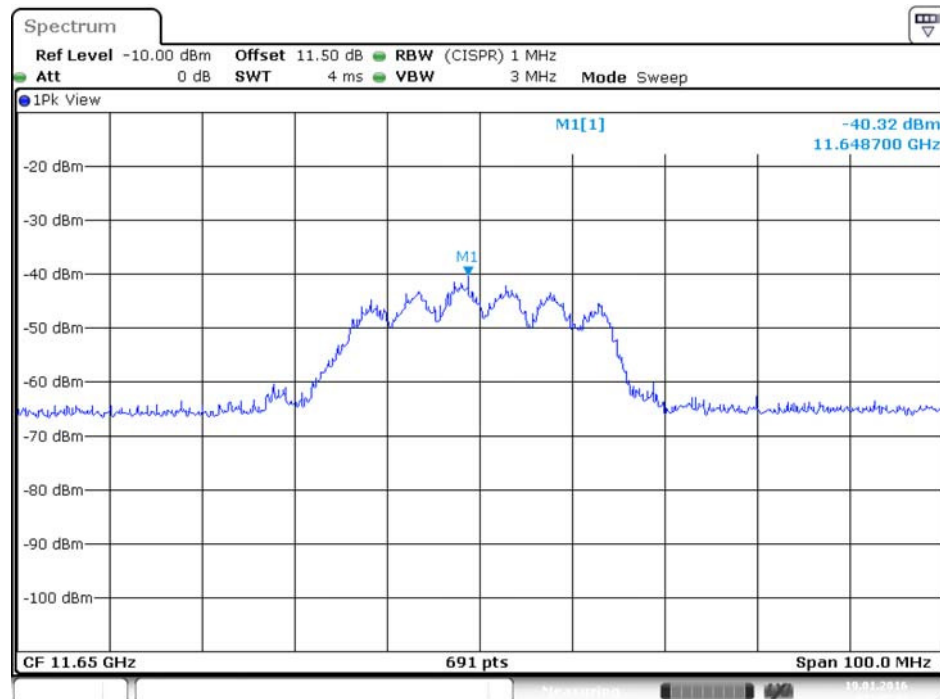


Date: 19.JAN.2016 01:45:41

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5745MHz / Average / Chain 1 (TX1)

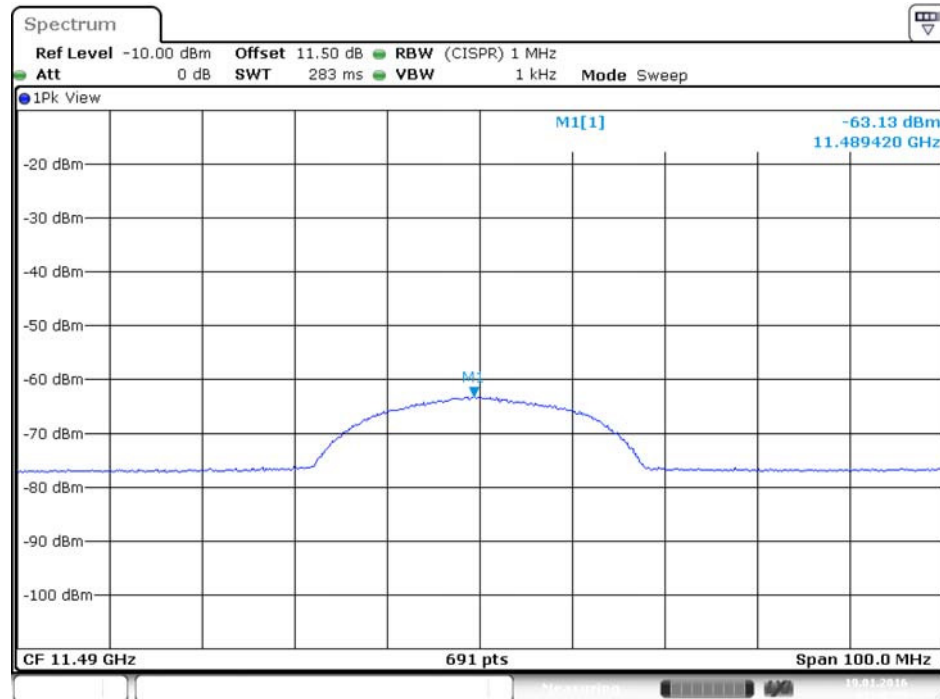


Date: 19.JAN.2016 01:48:29

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5745MHz / Average / Chain 2 (TX2)

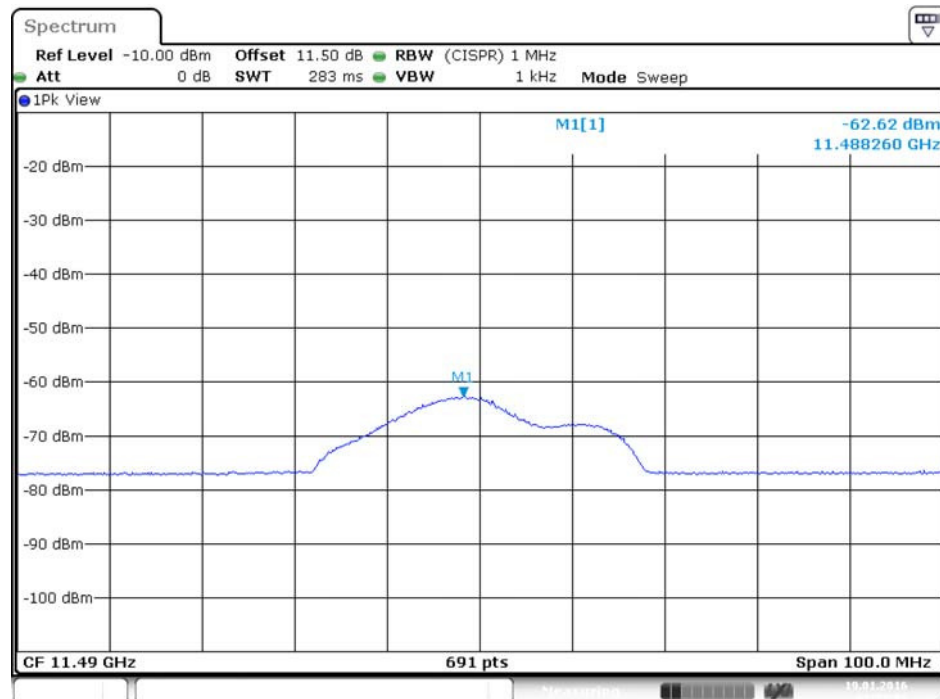

Date: 19.JAN.2016 01:53:01



Spectrum

Ref Level -10.00 dBm Offset 11.50 dB RBW (CISPR) 1 MHz
 Att 0 dB SWT 283 ms VBW 1 kHz Mode Sweep

1Pk View

M1[1] -54.02 dBm
 11.565950 GHz

CF 11.57 GHz 691 pts Span 100.0 MHz

28.01.2016

Spectrum

Ref Level -10.00 dBm Offset 11.50 dB RBW (CISPR) 1 MHz
Att 0 dB SWT 283 ms VBW 1 kHz Mode Sweep

1Pk View

M1[1] -53.74 dBm
11.566820 GHz


M1

CF 11.57 GHz 691 pts Span 100.0 MHz

The image shows a spectrum analyzer display. At the top, the title 'Spectrum' is in a box. Below it, measurement parameters are listed: 'Ref Level -10.00 dBm', 'Offset 11.50 dB', 'RBW (CISPR) 1 MHz', 'Att 0 dB', 'SWT 283 ms', 'VBW 1 kHz', and 'Mode Sweep'. A green dot is next to 'RBW' and 'VBW'. Below the parameters, a blue circle icon is followed by '1Pk View'. The main plot area shows a spectrum with a grid. A blue line represents the signal, with a peak labeled 'M1' at -53.74 dBm and 11.566820 GHz. The y-axis is labeled from -100 dBm to -20 dBm in 10 dB increments. The x-axis is labeled 'CF 11.57 GHz', '691 pts', and 'Span 100.0 MHz'. At the bottom, there is a status bar with 'Measurement' and a date '28.01.2016'.

Issued Date : Apr. 08, 2016

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5825MHz / Average / Chain 1 (TX1)

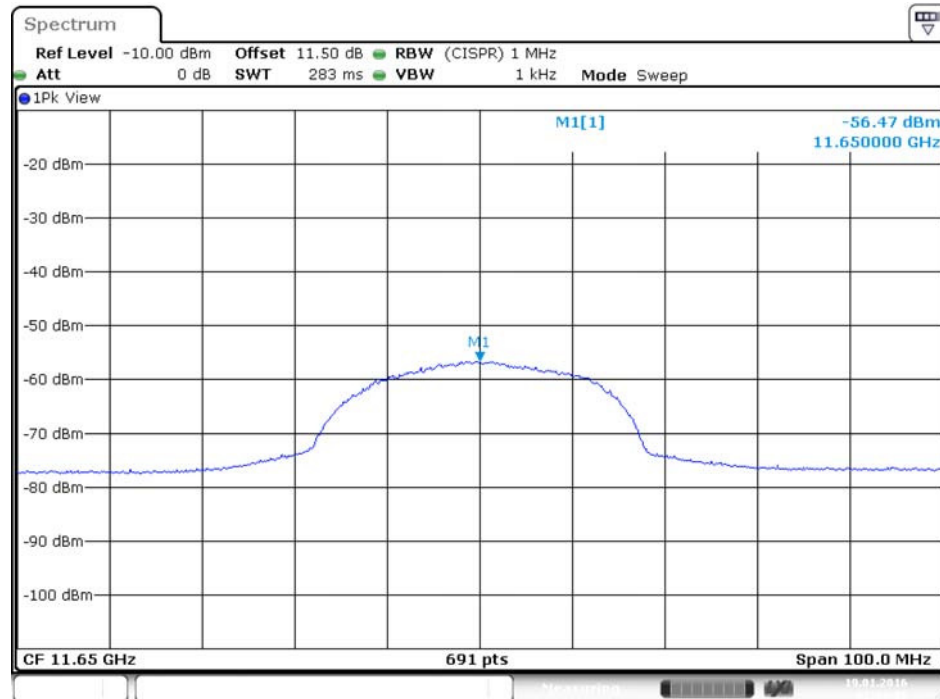


Date: 19.JAN.2016 02:04:17

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5825MHz / Average / Chain 2 (TX2)




Date: 19.JAN.2016 02:07:30

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5745MHz / Peak / Chain 1 (TX1)

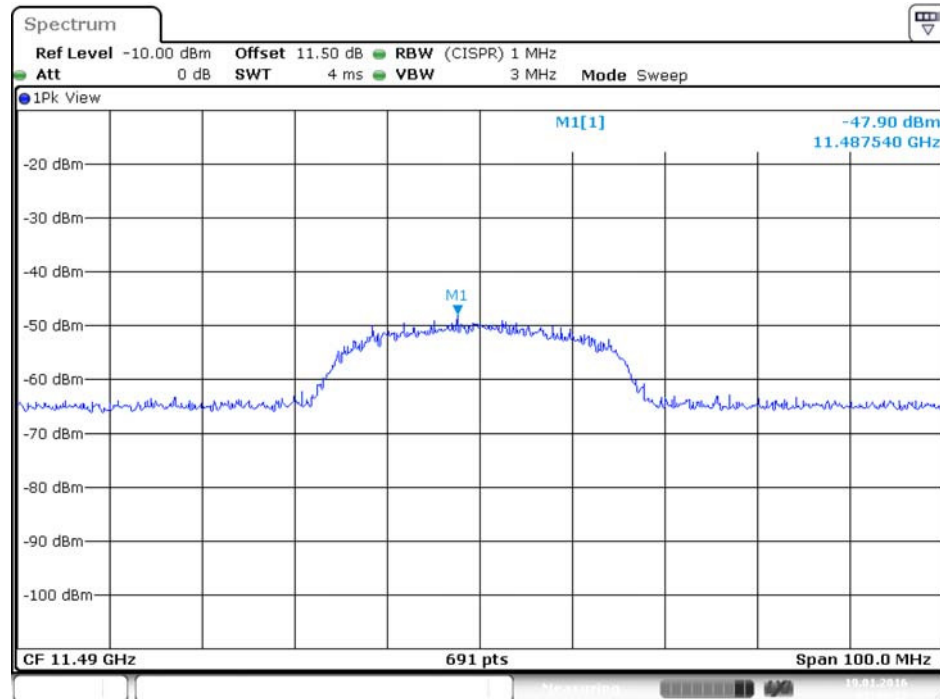


Date: 19.JAN.2016 01:49:17

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5745MHz / Peak / Chain 2 (TX2)

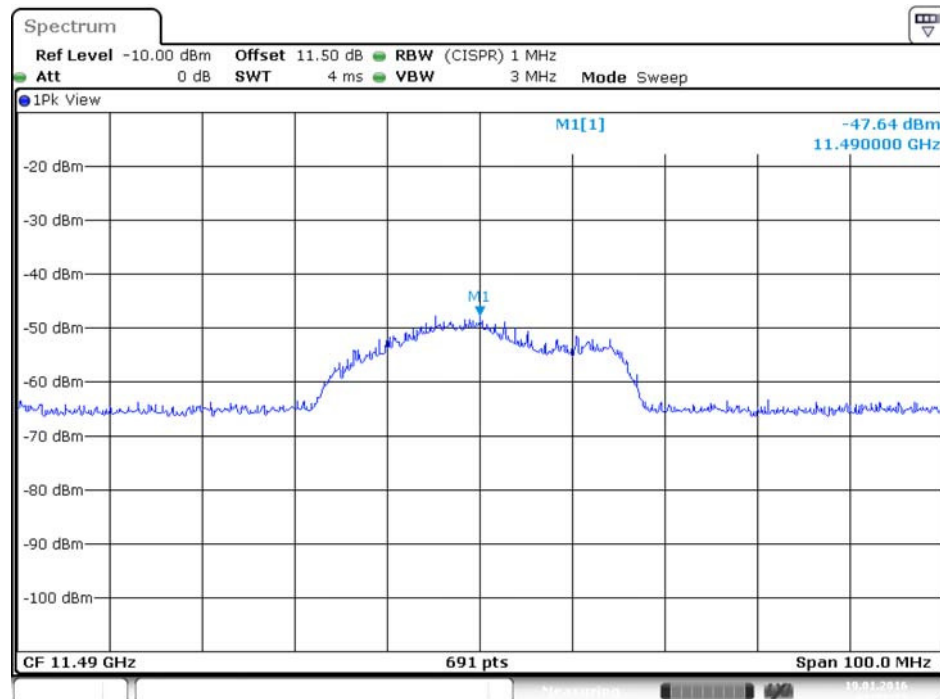


Date: 19.JAN.2016 01:52:28

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5785MHz / Peak / Chain 1 (TX1)

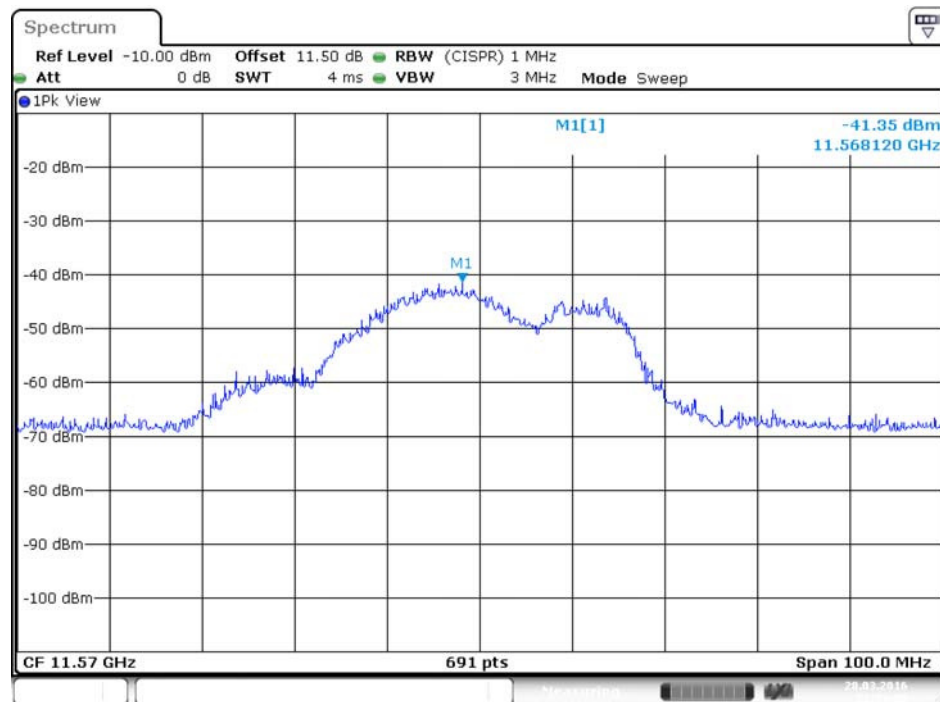


Date: 28.MAR.2016 22:39:29

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5785MHz / Peak / Chain 2 (TX2)

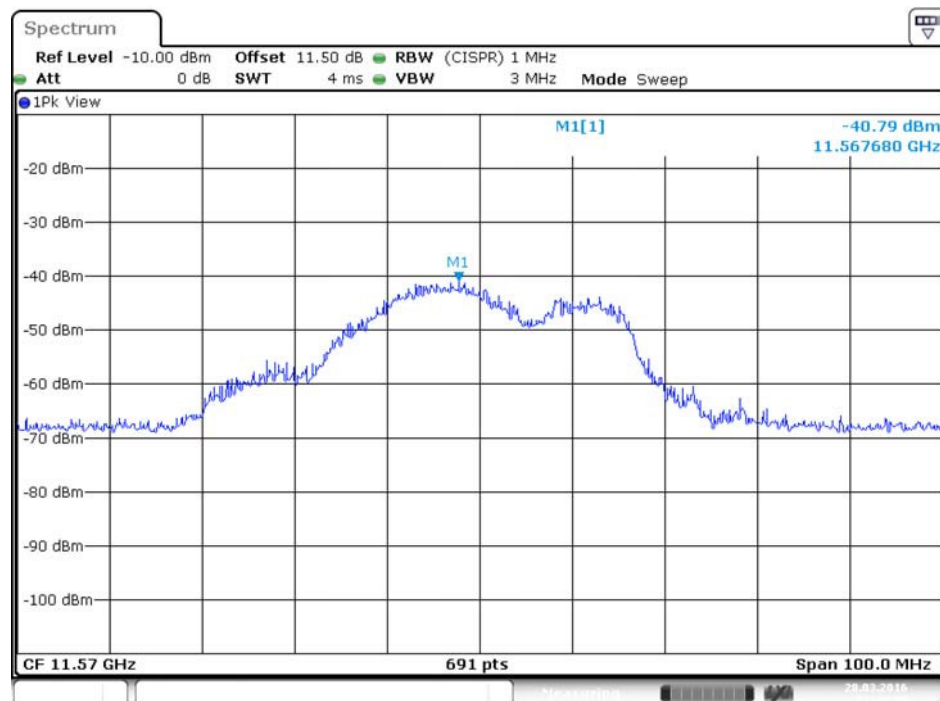


Date: 28.MAR.2016 22:40:28

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5825MHz / Peak / Chain 1 (TX1)

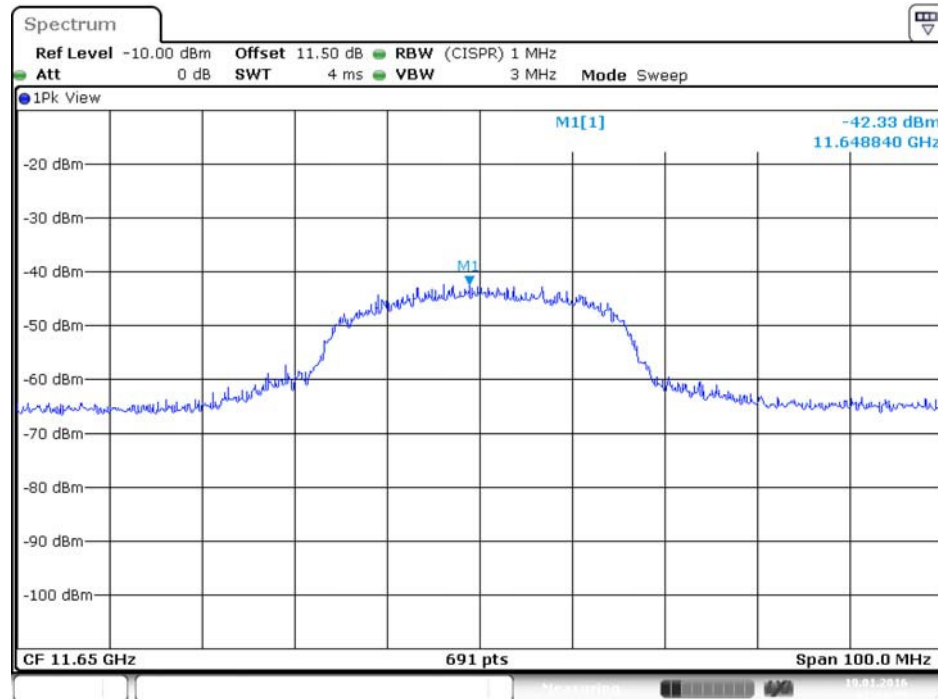


Date: 19.JAN.2016 02:04:53

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5825MHz / Peak / Chain 2 (TX2)

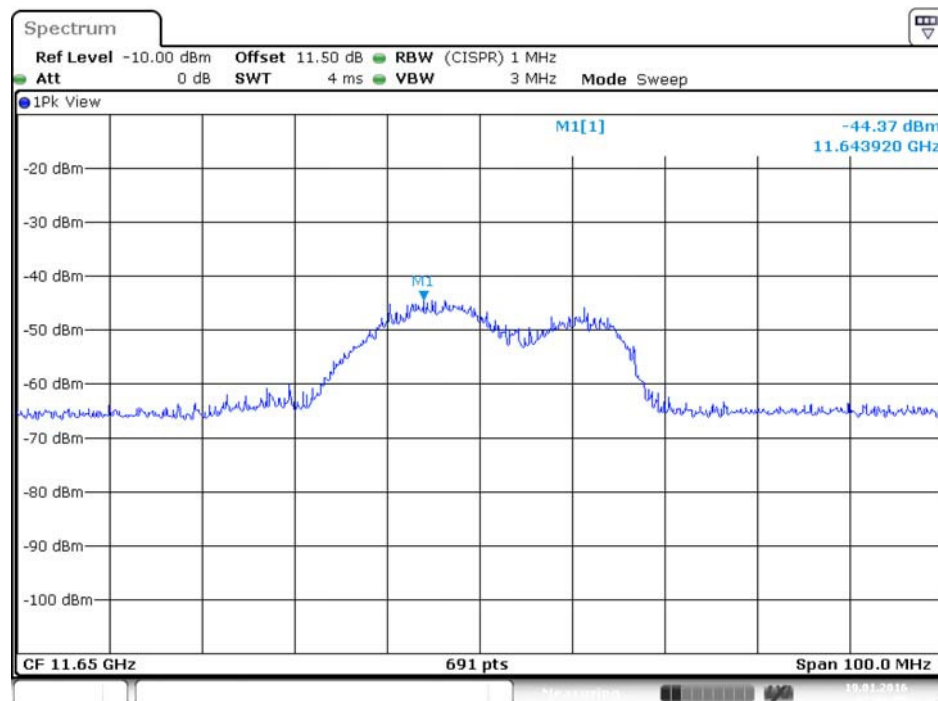


Date: 19.JAN.2016 02:06:59

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Average / Chain 1 (TX1)

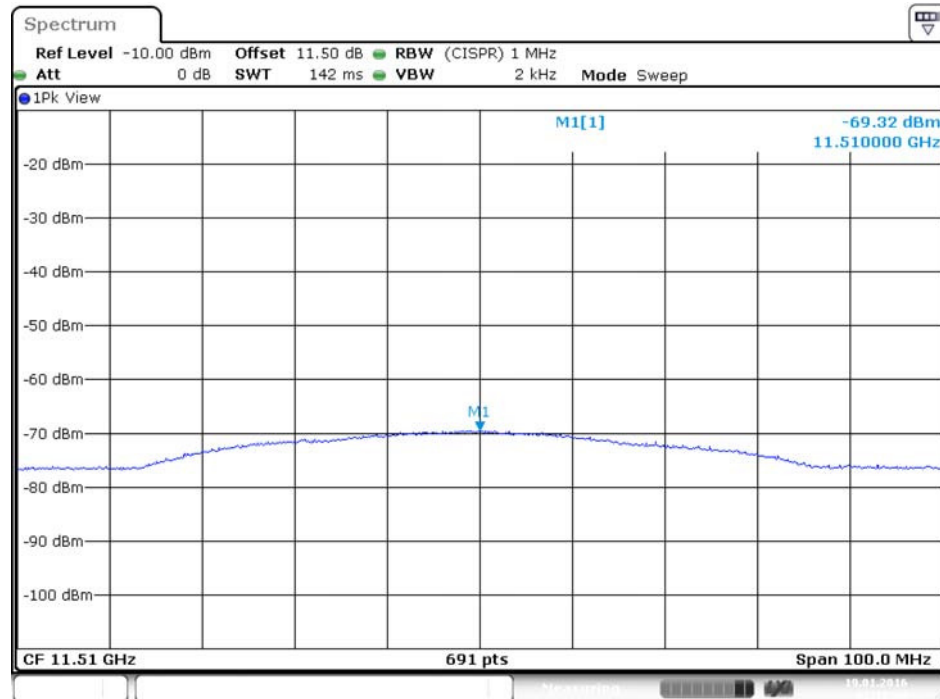


Date: 19.JAN.2016 02:18:34

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Average / Chain 2 (TX2)

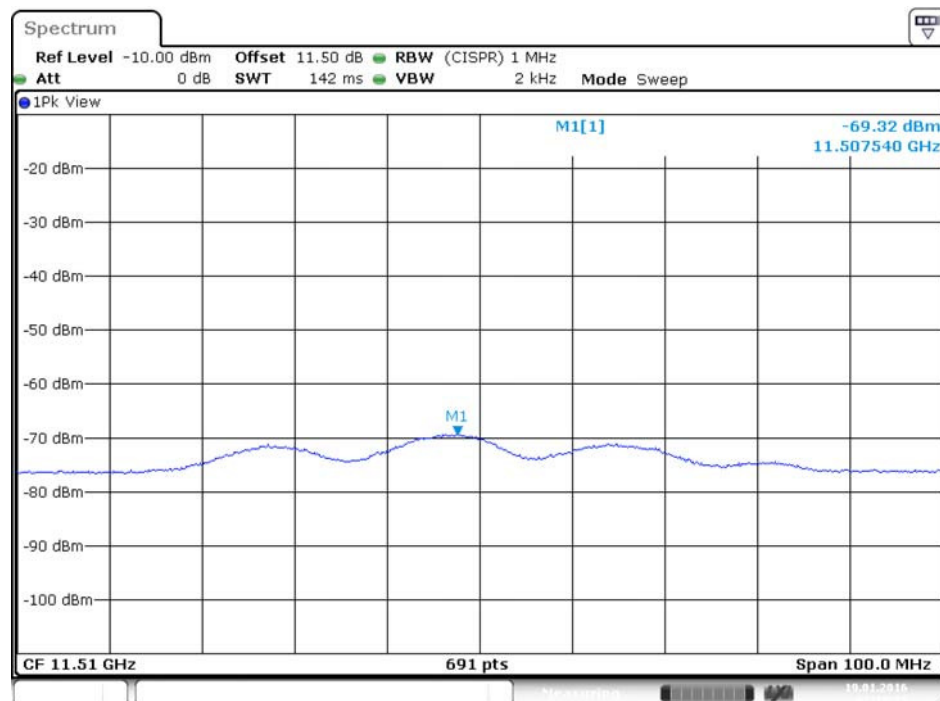


Date: 19.JAN.2016 02:13:14

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5795MHz / Average / Chain 1 (TX1)

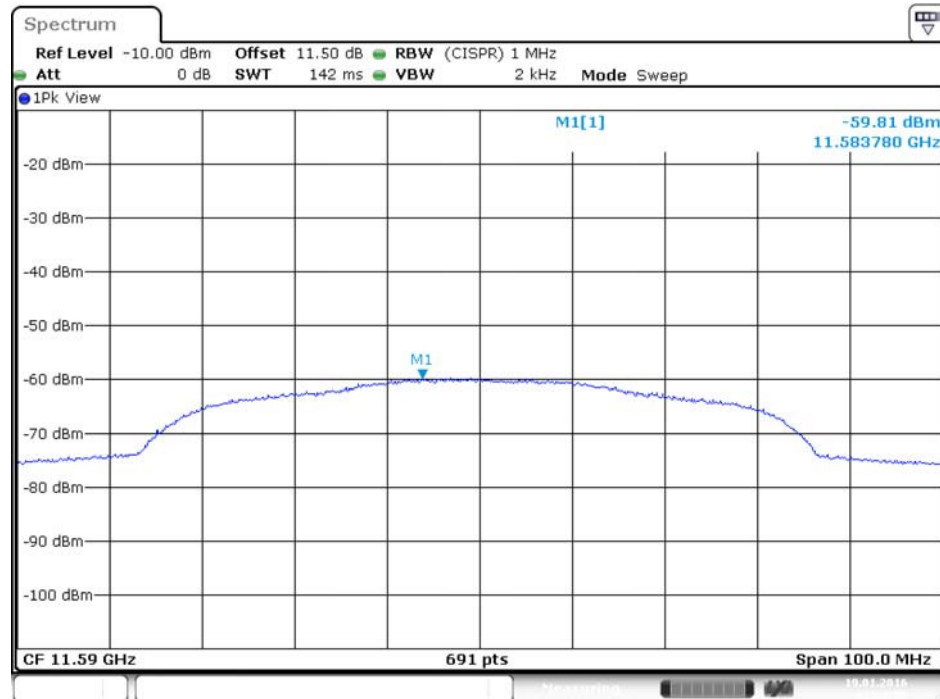


Date: 19.JAN.2016 02:20:57

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5795MHz / Average / Chain 2 (TX2)

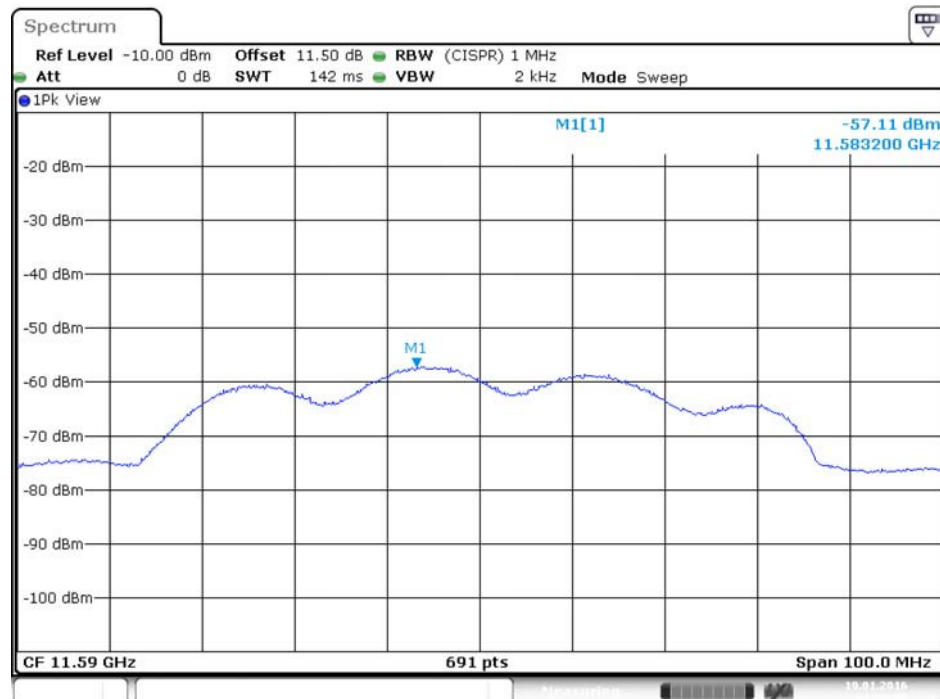


Date: 19.JAN.2016 02:25:06

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Peak / Chain 1 (TX1)

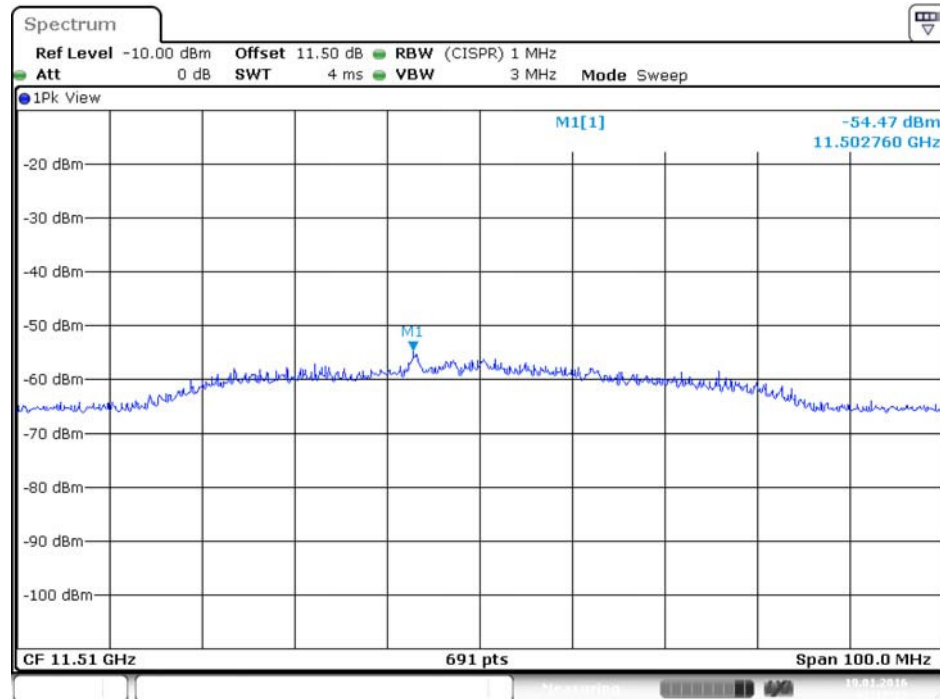


Date: 19.JAN.2016 02:17:12

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Peak / Chain 2 (TX2)

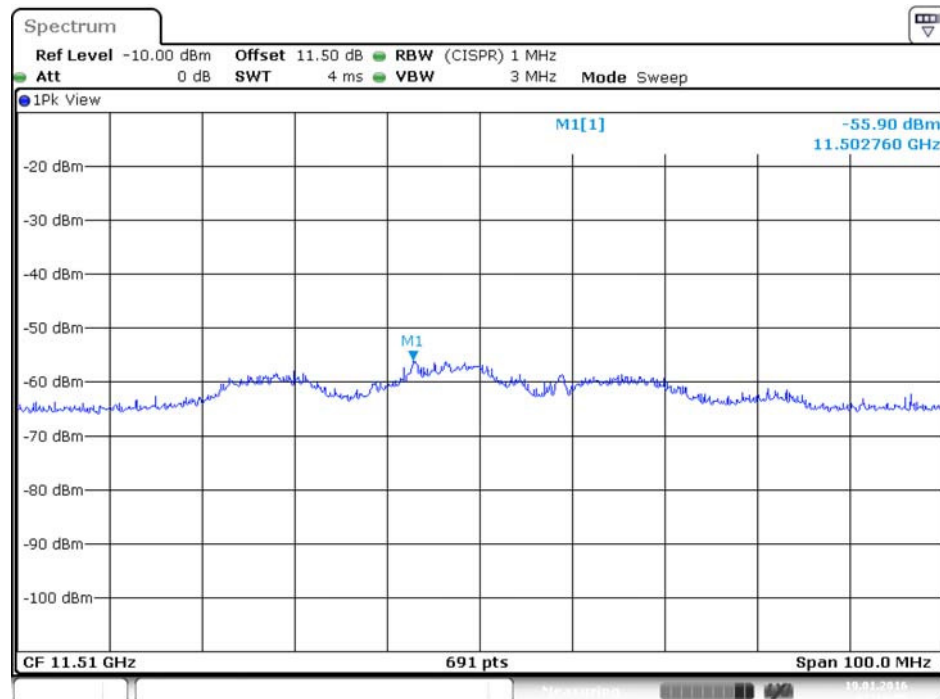


Date: 19.JAN.2016 02:14:55

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5795MHz / Peak / Chain 1 (TX1)

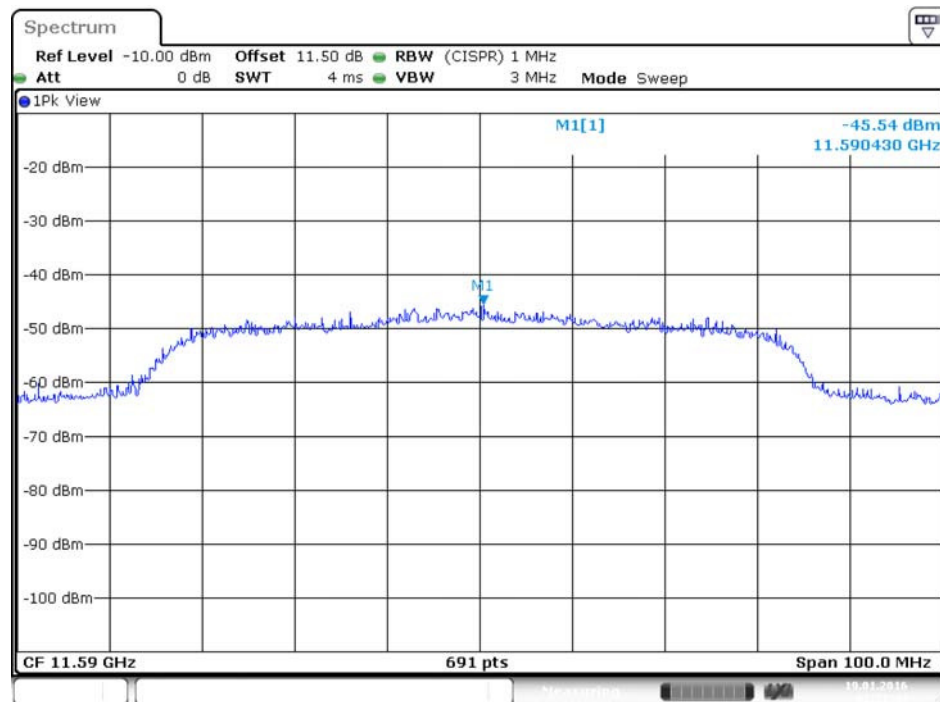

Date: 19.JAN.2016 02:21:44

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5795MHz / Peak / Chain 2 (TX2)

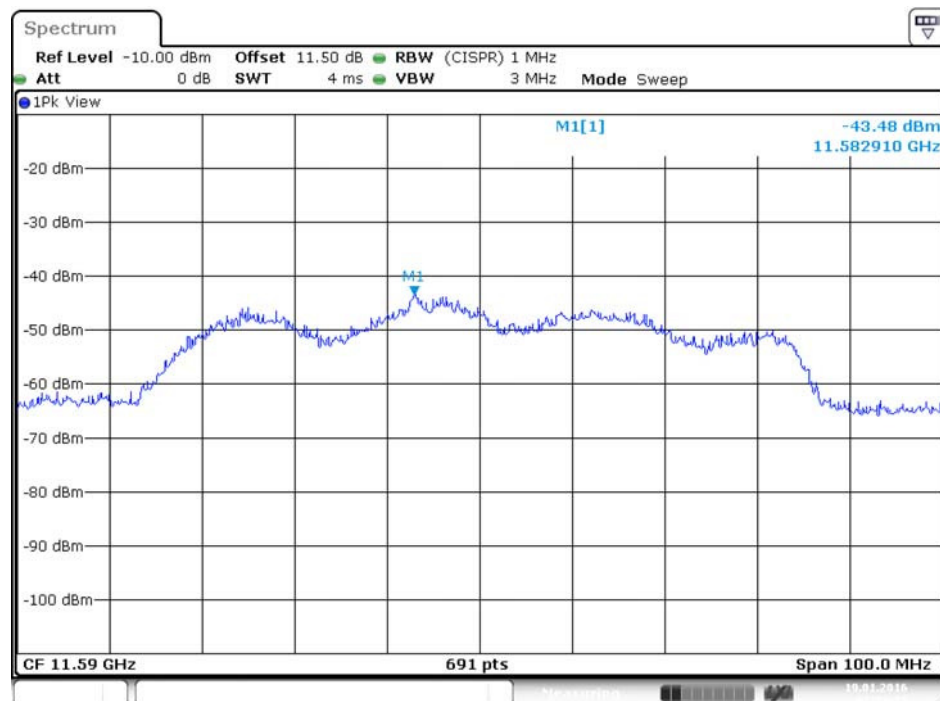

Date: 19.JAN.2016 02:24:15

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

The Conducted test procedure is the same as section 4.4.3.

4.6.4. Test Setup Layout

The Conducted test procedure is the same as section 4.4.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a / Peak / Chain 1 + Chain 2

Frequency(MHz)	Chain 1 (TX1) Spurious Level (dBm)	Chain 2 (TX2) Spurious Level (dBm)	Total Spurious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-44.50	-46.16	-34.47	-27.00	7.47
5785	-43.99	-45.54	-33.92	-27.00	6.92
5825	-38.52	-40.79	-28.73	-27.00	1.73

Frequency(MHz)	Chain 1 (TX1) Spurious Level (dBm)	Chain 2 (TX2) Spurious Level (dBm)	Total Spurious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-27.17	-33.72	-18.53	-17.00	1.53
5785	-41.79	-44.54	-32.17	-17.00	15.17
5825	-30.30	-34.07	-21.01	-17.00	4.01

Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT20 / Average / Chain 1 + Chain 2

Frequency(MHz)	Chain 1 (TX1) Spruious Level (dBm)	Chain 2 (TX2) Spruious Level (dBm)	Total Spruious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-45.99	-46.56	-35.49	-27.00	8.49
5785	-42.56	-45.33	-32.95	-27.00	5.95
5825	-41.28	-37.99	-28.55	-27.00	1.55


Frequency(MHz)	Chain 1 (TX1) Spruious Level (dBm)	Chain 2 (TX2) Spruious Level (dBm)	Total Spruious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-28.43	-30.88	-18.70	-17.00	1.70
5785	-35.09	-43.13	-26.69	-17.00	9.69
5825	-31.34	-28.69	-19.04	-17.00	2.04

Temperature	26°C	Humidity	46%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT40 / Average / Chain 1 + Chain 2

Frequency(MHz)	Chain 1 (TX1) Spruious Level (dBm)	Chain 2 (TX2) Spruious Level (dBm)	Total Spruious Level (dBm)	Limit (dBm)	Margin (dB)
5755	-38.59	-40.28	-28.57	-27.00	1.57
5795	-37.40	-43.38	-28.65	-27.00	1.65


Frequency(MHz)	Chain 1 (TX1) Spruious Level (dBm)	Chain 2 (TX2) Spruious Level (dBm)	Total Spruious Level (dBm)	Limit (dBm)	Margin (dB)
5745	-32.80	-34.56	-22.81	-17.00	5.81
5785	-34.12	-38.81	-25.08	-17.00	8.08

Plot on Configuration IEEE 802.11a / 5745MHz / Peck / Chain 1 (TX1)

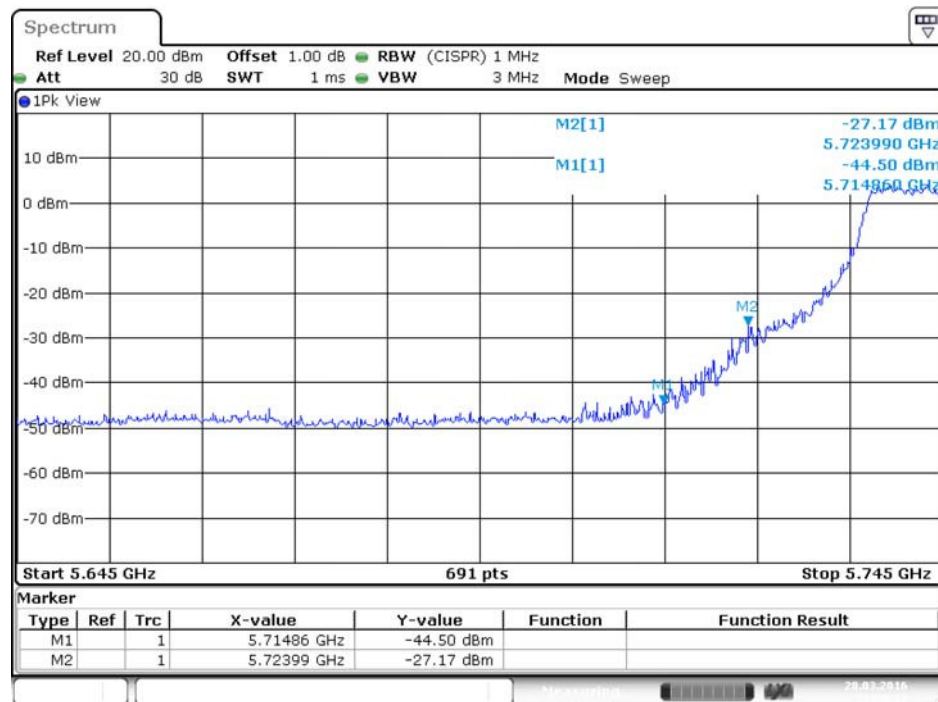


Date: 28.MAR.2016 21:30:32

Plot on Configuration IEEE 802.11a / 5745MHz / Peck / Chain 2 (TX2)

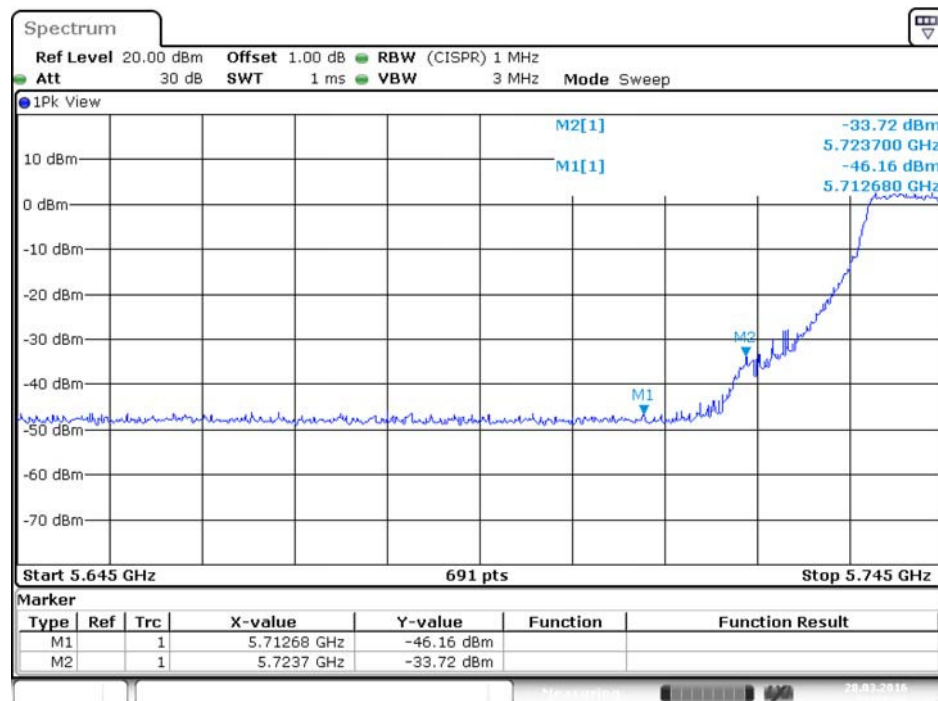


Date: 28.MAR.2016 21:22:47

Plot on Configuration IEEE 802.11a / 5785MHz / Peck / Chain 1 (TX1)

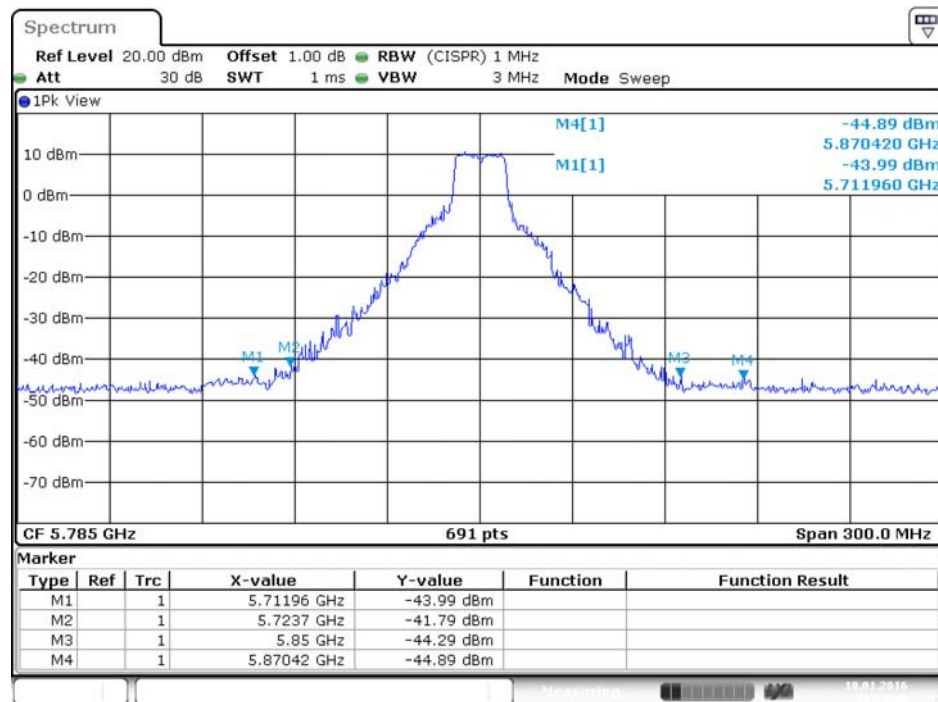


Date: 18.JAN.2016 23:23:48

Plot on Configuration IEEE 802.11a / 5785MHz / Peck / Chain 2 (TX2)

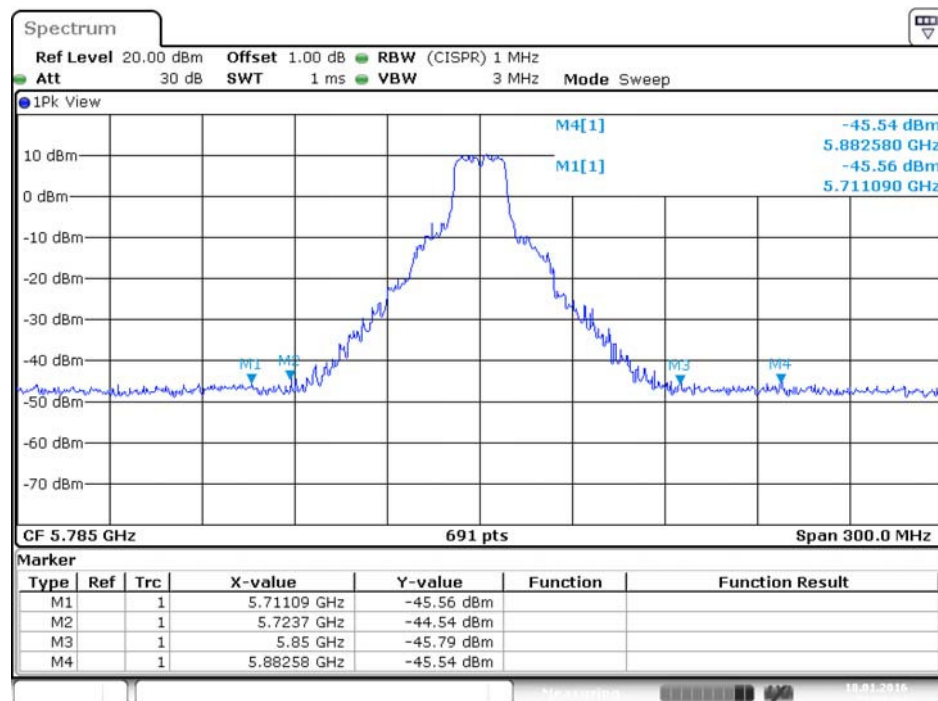


Date: 18.JAN.2016 23:26:04

Plot on Configuration IEEE 802.11a / 5825MHz / Peck / Chain 1 (TX1)

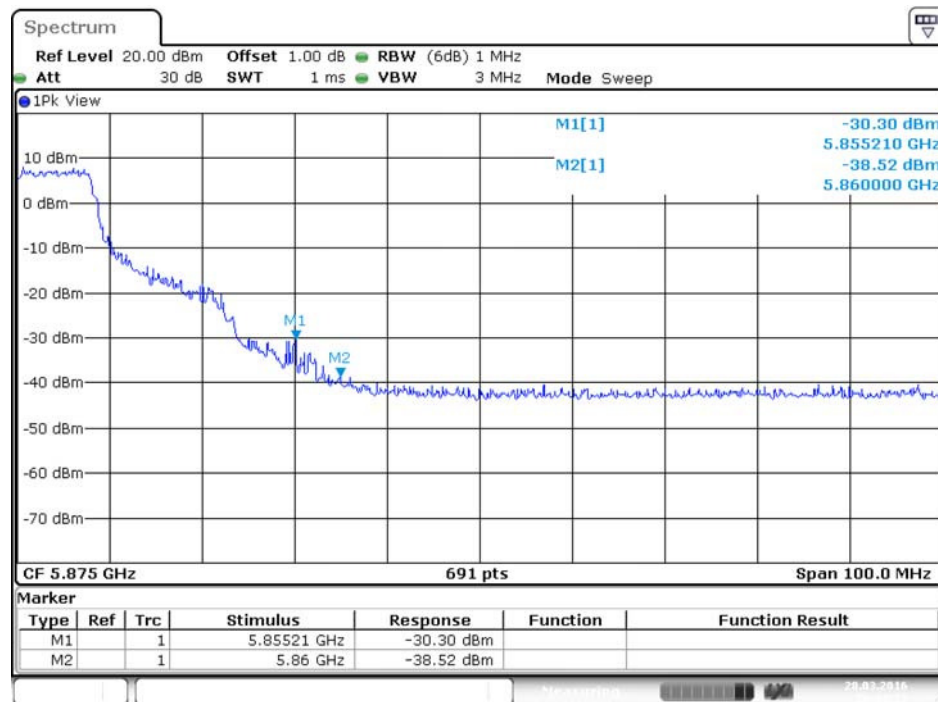


Date: 28.MAR.2016 20:43:27

Plot on Configuration IEEE 802.11a / 5825MHz / Peck / Chain 2 (TX2)

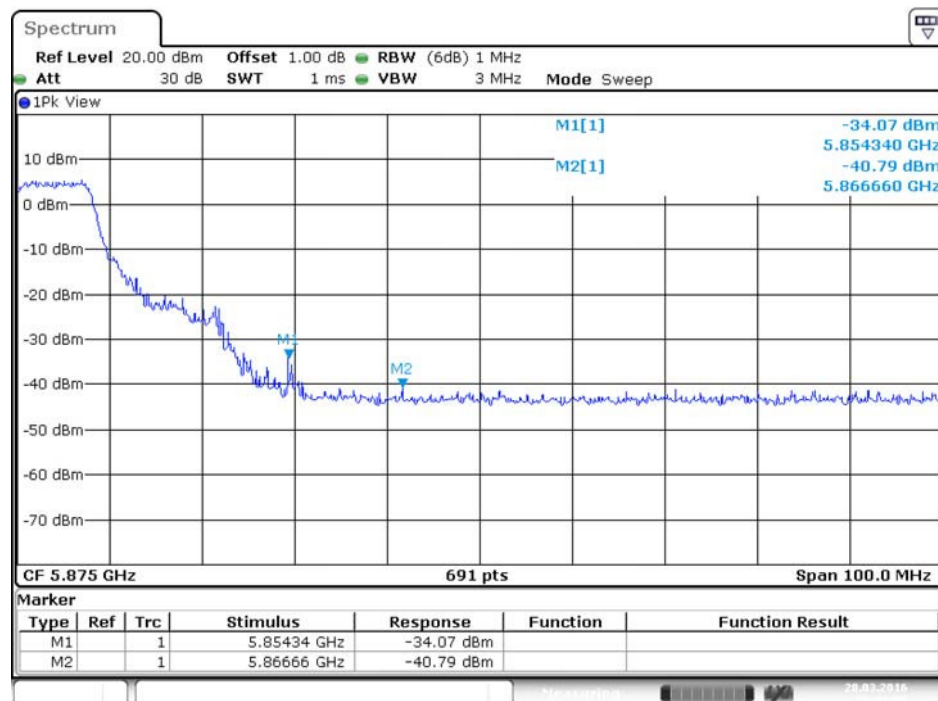


Date: 28.MAR.2016 20:38:26

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5745MHz / Peak / Chain 1 (TX1)

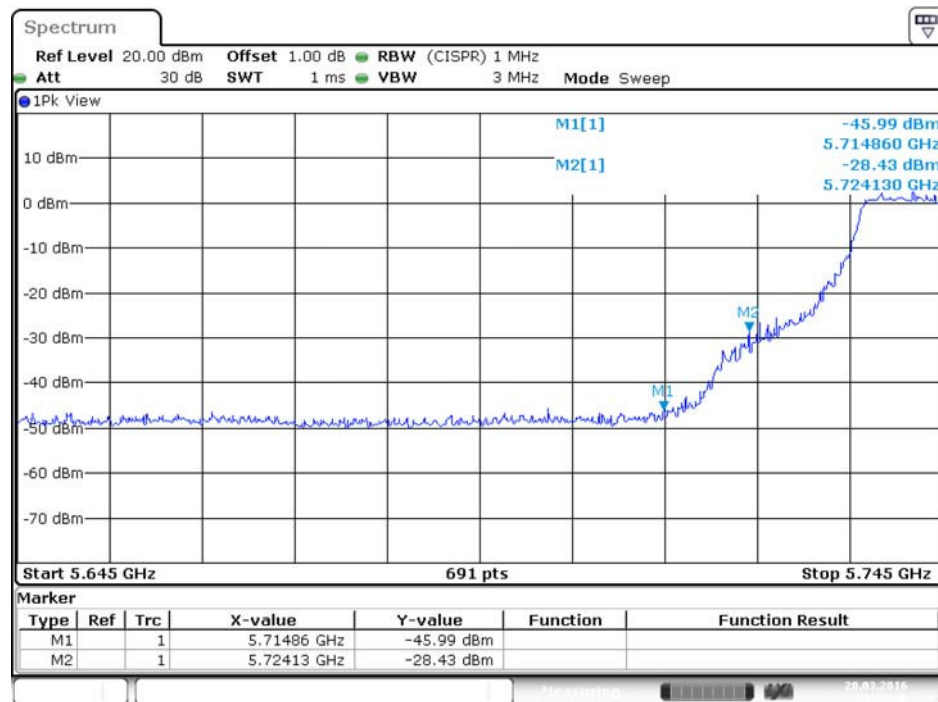


Date: 28.MAR.2016 21:34:46

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5745MHz / Peak / Chain 2 (TX2)

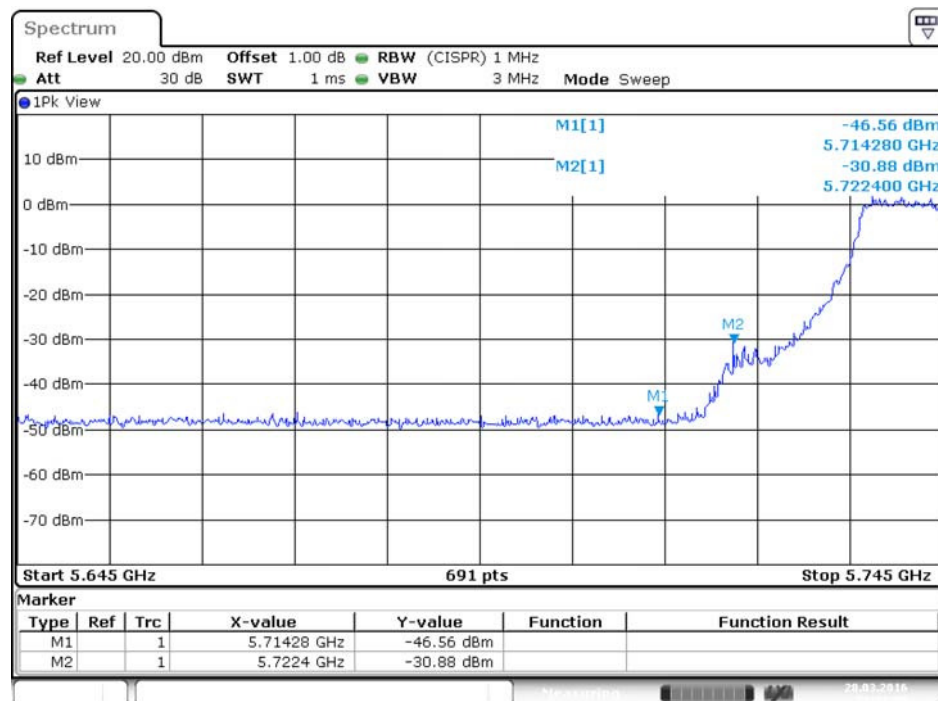


Date: 28.MAR.2016 21:38:09

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5785MHz / Peak / Chain 1 (TX1)

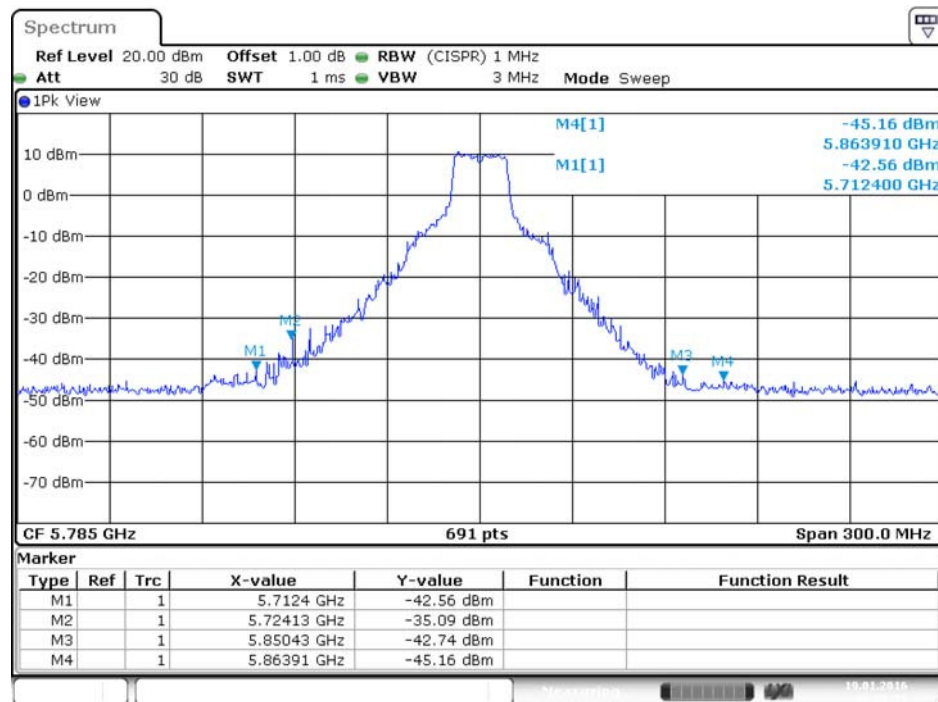


Date: 19.JAN.2016 00:56:10

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5785MHz / Peak / Chain 2 (TX2)

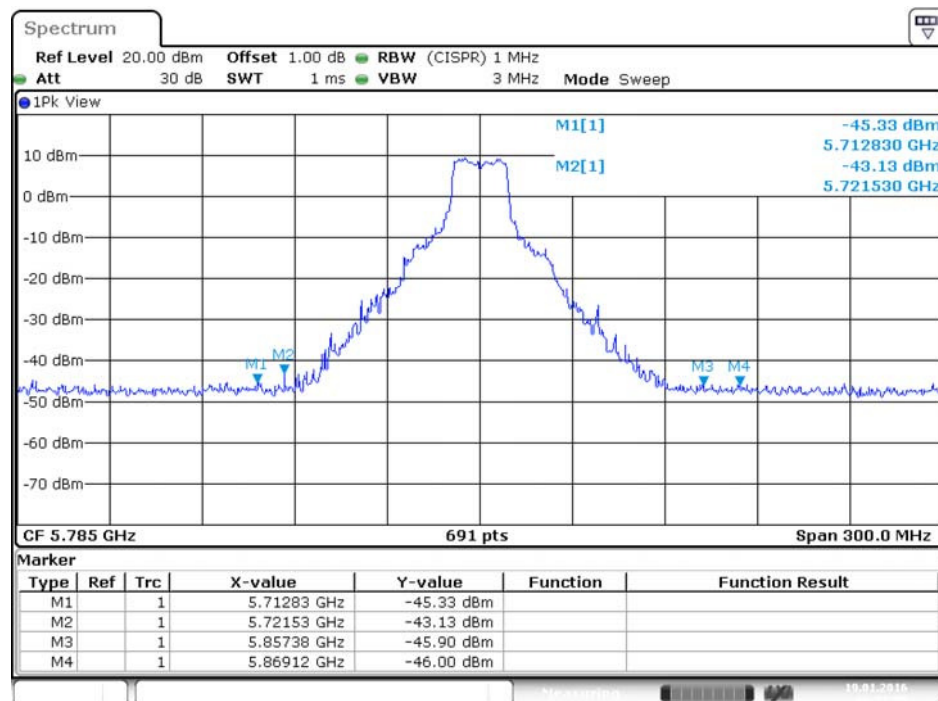


Date: 19.JAN.2016 00:57:59

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5825MHz / Peak / Chain 1 (TX1)

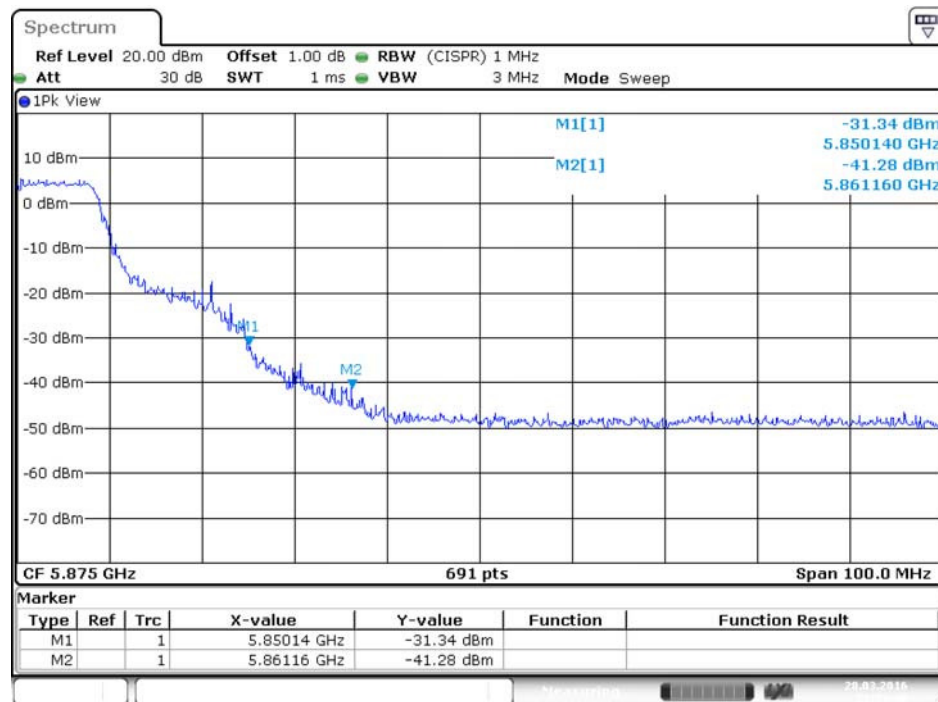


Date: 28.MAR.2016 21:59:41

Plot on Configuration IEEE 802.11n MCS0 HT20 / 5825MHz / Peak / Chain 2 (TX2)

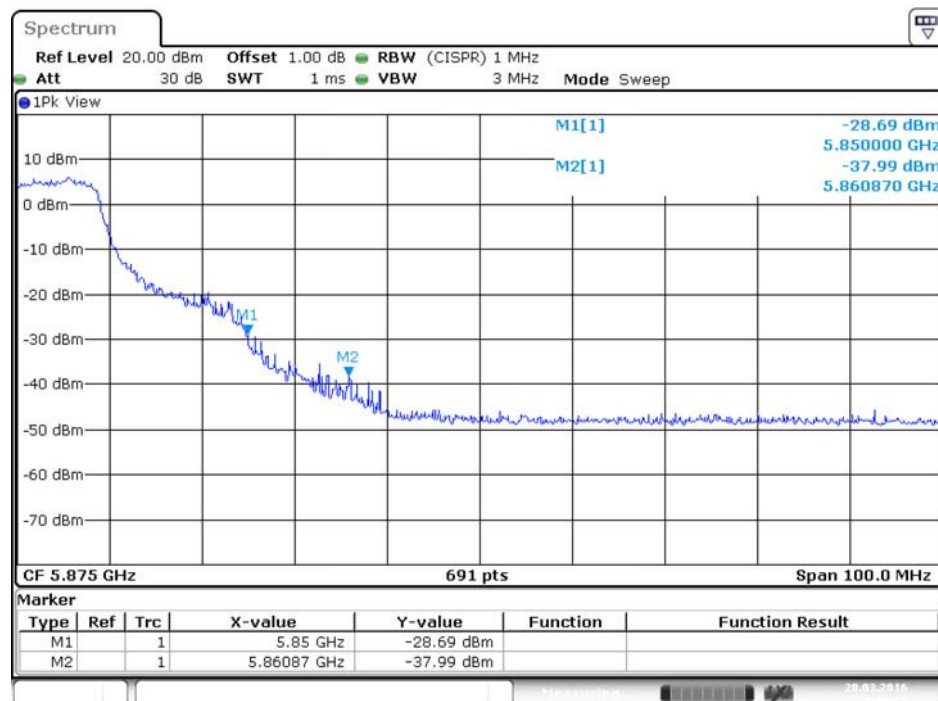


Date: 28.MAR.2016 21:49:31

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Peak / Chain 1 (TX1)

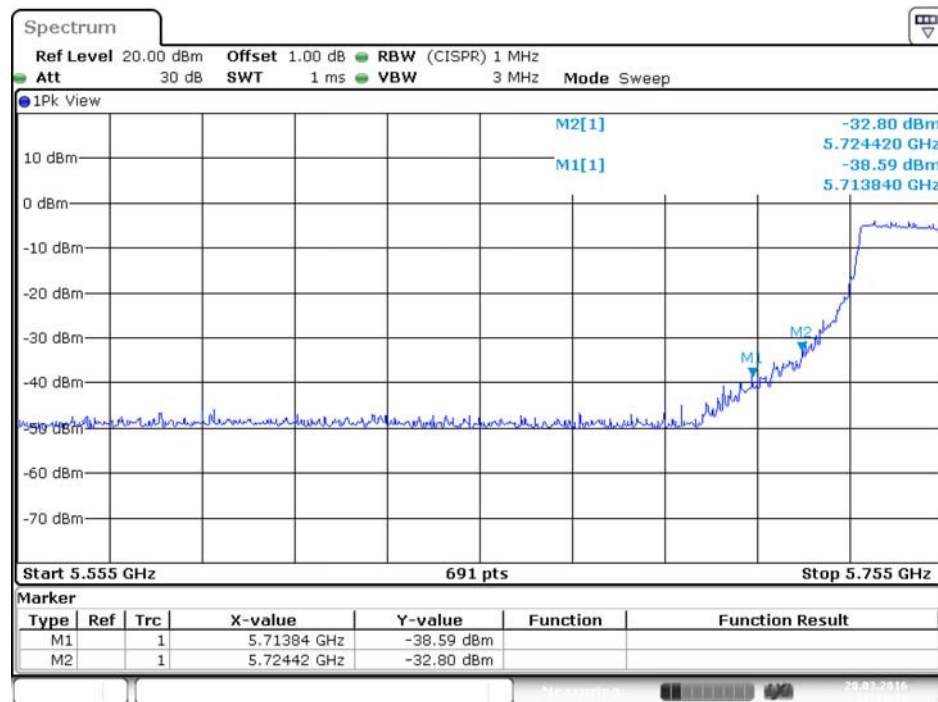


Date: 28.MAR.2016 22:04:33

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Peak / Chain 2 (TX2)

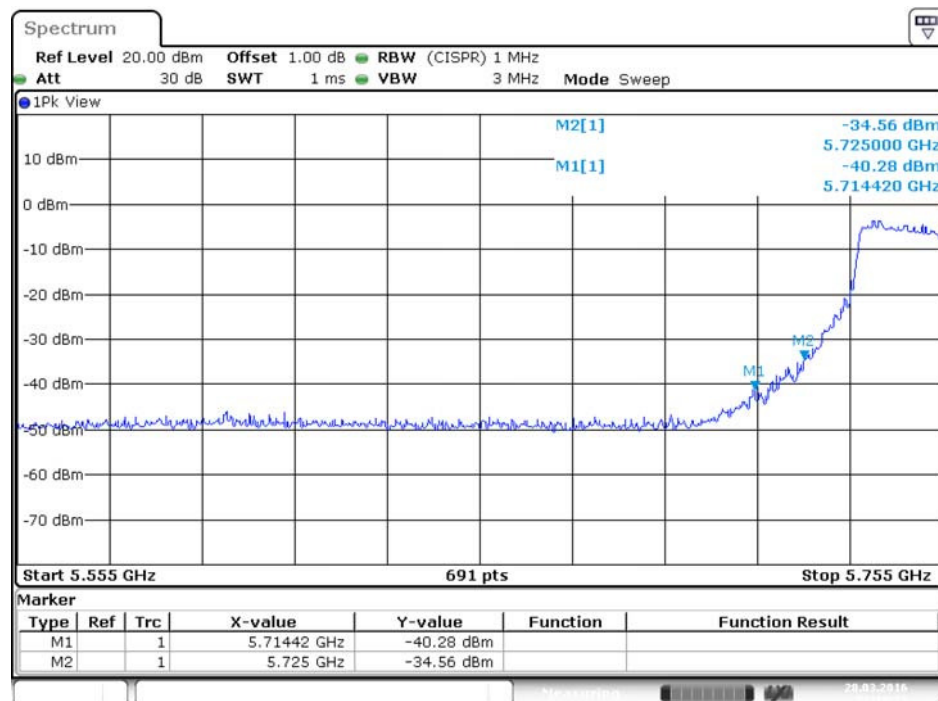


Date: 28.MAR.2016 22:10:27

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5795MHz / Peak / Chain 1 (TX1)

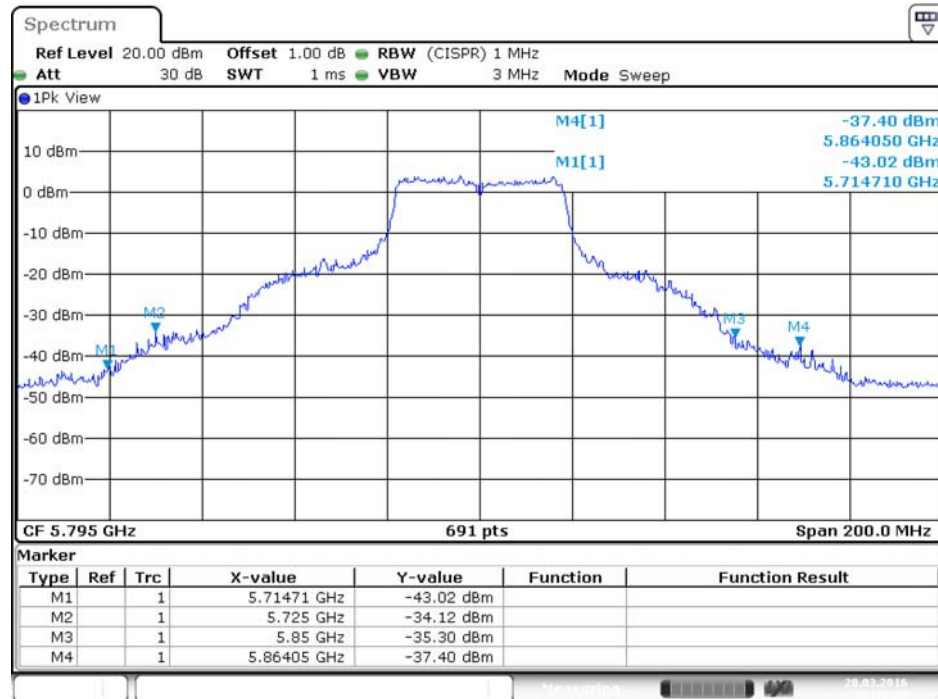

Date: 28.MAR.2016 22:18:23

Plot on Configuration IEEE 802.11n MCS0 HT40 / 5795MHz / Peak / Chain 2 (TX2)

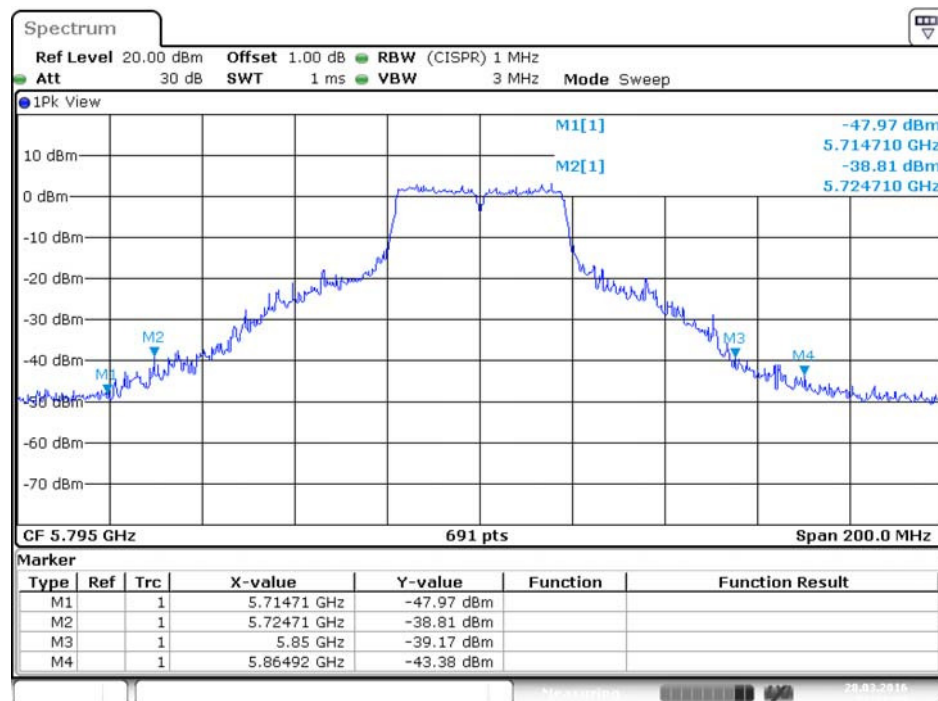

Date: 28.MAR.2016 22:22:53

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.7.4. Test Setup Layout

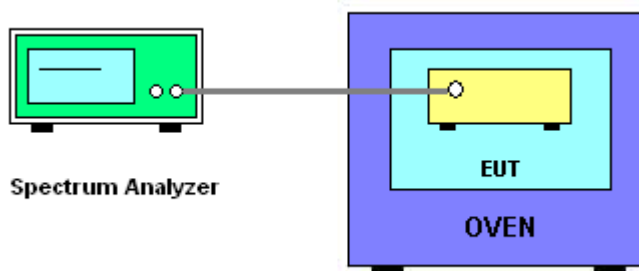

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	26°C	Humidity	45%
Test Engineer	Wen Chao	Test Date	Jan. 05, 2016 ~ Mar. 29, 2016

Mode: 20 MHz / Chain 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9340	5784.9332	5784.9325	5784.9321
110.00	5784.9335	5784.9333	5784.9324	5784.9318
93.50	5784.9333	5784.9325	5784.9315	5784.9314
Max. Deviation (MHz)	0.0667	0.0675	0.0685	0.0686
Max. Deviation (ppm)	11.53	11.67	11.84	11.86
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5784.9366	5784.9362	5784.9352	5784.9350
-20	5784.9360	5784.9356	5784.9352	5784.9348
-10	5784.9357	5784.9349	5784.9346	5784.9345
0	5784.9350	5784.9347	5784.9340	5784.9332
10	5784.9337	5784.9328	5784.9323	5784.9313
20	5784.9335	5784.9326	5784.9320	5784.9319
30	5784.9335	5784.9331	5784.9326	5784.9324
40	5784.9339	5784.9337	5784.9335	5784.9326
50	5784.9342	5784.9339	5784.9330	5784.9327
Max. Deviation (MHz)	0.0665	0.0674	0.0680	0.0687
Max. Deviation (ppm)	11.50	11.65	11.75	11.88
Result	Complies			

Mode: 40 MHz / Chain 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9343	5754.9341	5754.9338	5754.9329
110.00	5754.9335	5754.9332	5754.9326	5754.9319
93.50	5754.9327	5754.9324	5754.9314	5754.9312
Max. Deviation (MHz)	0.0673	0.0676	0.0686	0.0688
Max. Deviation (ppm)	11.69	11.75	11.92	11.95
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5754.9371	5754.9363	5754.9355	5754.9347
-20	5754.9356	5754.9348	5754.9342	5754.9338
-10	5754.9353	5754.9347	5754.9343	5754.9342
0	5754.9352	5754.9348	5754.9343	5754.9339
10	5754.9344	5754.9334	5754.9325	5754.9323
20	5754.9335	5754.9334	5754.9327	5754.9326
30	5754.9335	5754.9325	5754.9319	5754.9313
40	5754.9352	5754.9346	5754.9345	5754.9336
50	5754.9368	5754.9363	5754.9358	5754.9356
Max. Deviation (MHz)	0.0665	0.0675	0.0681	0.0687
Max. Deviation (ppm)	11.56	11.73	11.83	11.94
Result	Complies			

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov.13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%