


EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

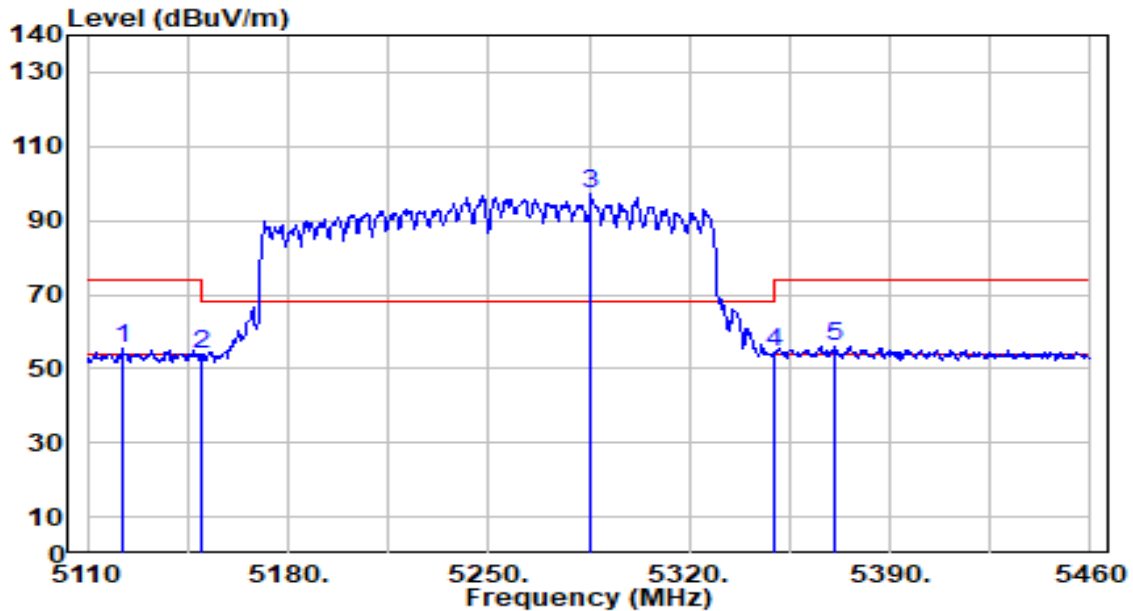


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5122.250	54.82	0.63	55.45	-18.55	74.00	318	197	Peak
2	5150.000	52.99	0.65	53.65	-20.35	74.00	318	197	Peak
3	5285.700	96.41	0.57	96.98	N/A	N/A	318	197	Peak
4	5350.000	54.12	0.47	54.60	-19.40	74.00	318	197	Peak
5	* 5371.100	55.74	0.44	56.18	-17.82	74.00	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

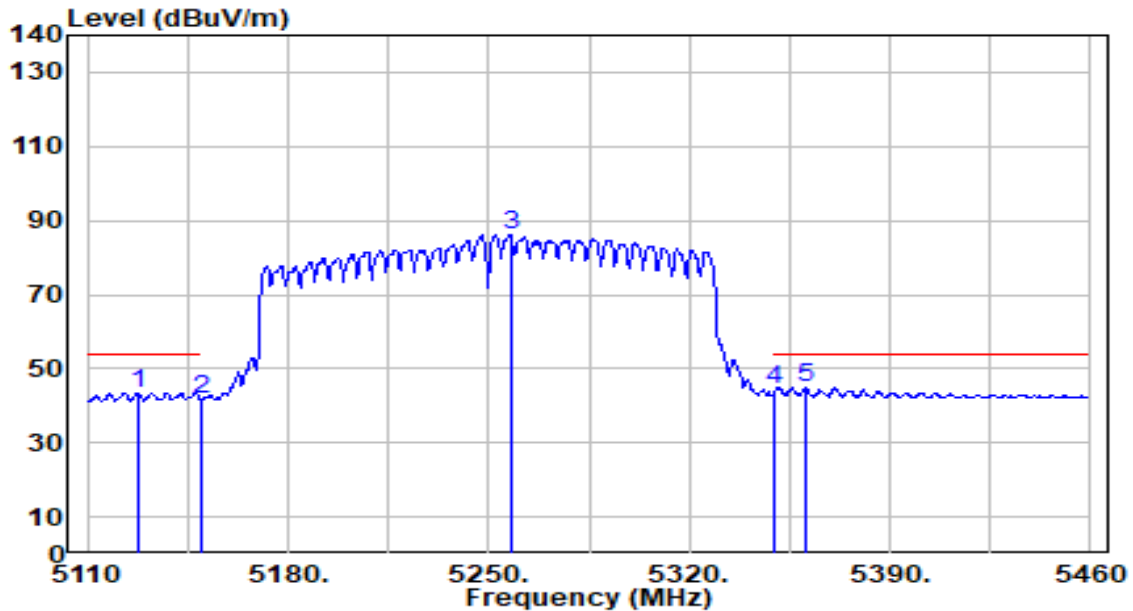


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5127.850	42.92	0.63	43.55	-10.45	54.00	318	197	Average
2		5150.000	41.10	0.65	41.76	-12.24	54.00	318	197	Average
3		5257.700	85.39	0.61	86.01	N/A	N/A	318	197	Average
4		5350.000	44.00	0.47	44.47	-9.53	54.00	318	197	Average
5	*	5360.600	44.67	0.45	45.12	-8.88	54.00	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

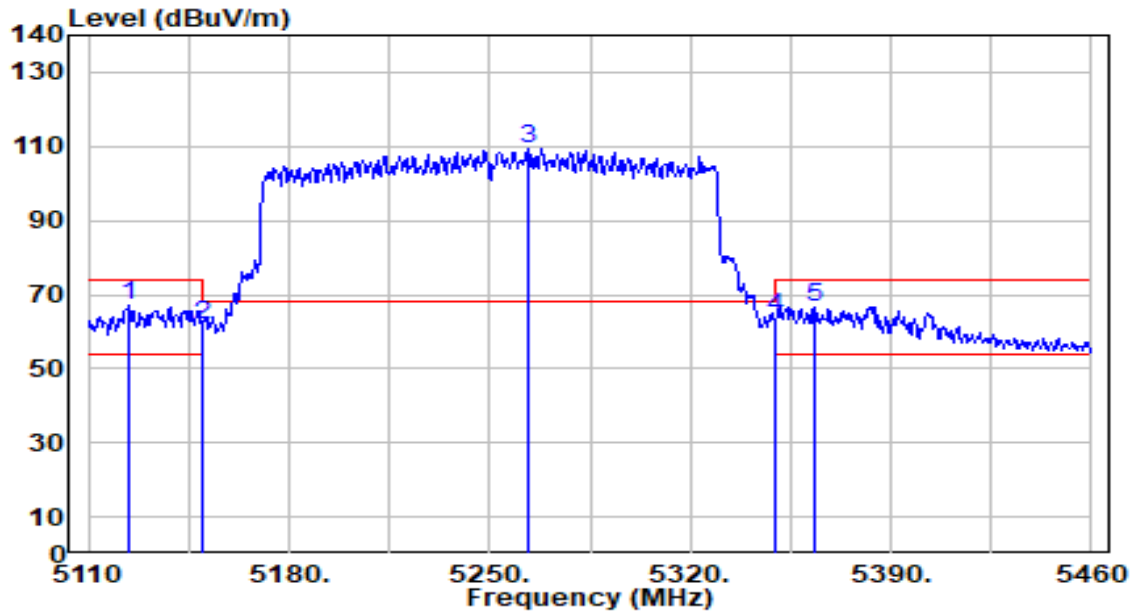


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5124.000	66.65	0.63	67.28	-6.72	74.00	200	290	Peak
2		5150.000	61.37	0.65	62.03	-11.97	74.00	200	290	Peak
3		5263.300	108.63	0.60	109.23	N/A	N/A	200	290	Peak
4		5350.000	63.22	0.47	63.69	-10.31	74.00	200	290	Peak
5		5363.050	66.24	0.45	66.69	-7.31	74.00	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

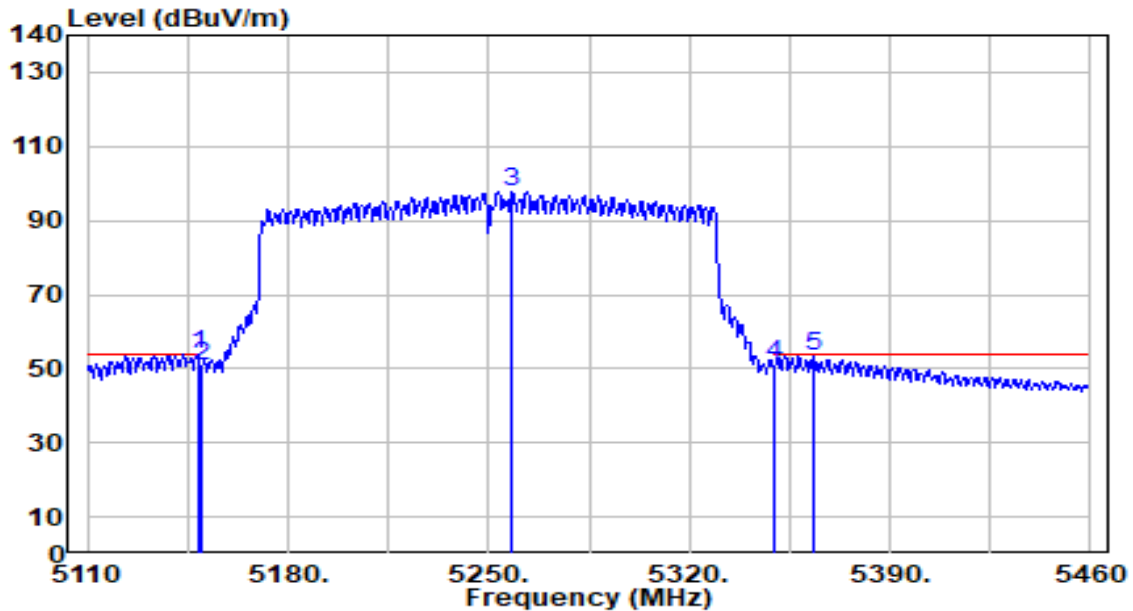


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.500	53.24	0.65	53.89	-0.11	54.00	200	290	Average
2		5150.000	50.10	0.65	50.75	-3.25	54.00	200	290	Average
3		5258.050	97.00	0.61	97.61	N/A	N/A	200	290	Average
4		5350.000	50.80	0.47	51.28	-2.72	54.00	200	290	Average
5		5363.400	52.78	0.45	53.23	-0.77	54.00	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

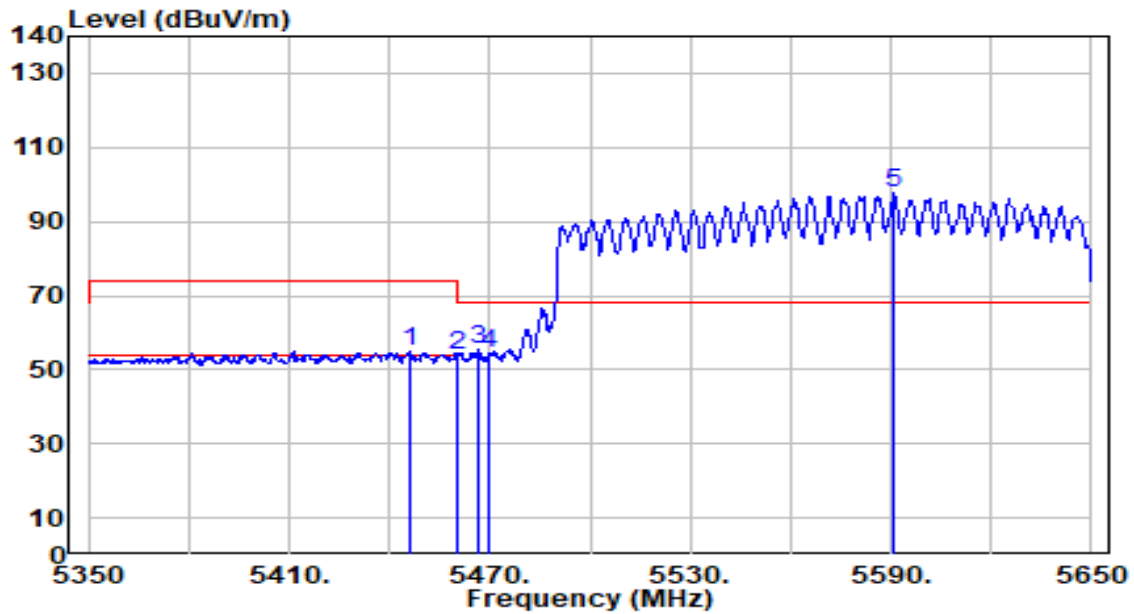


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.300	54.49	0.60	55.09	-18.91	74.00	300	186	Peak
2	5460.000	52.98	0.66	53.64	-20.36	74.00	300	186	Peak
3	* 5466.700	54.77	0.69	55.46	-12.74	68.20	300	186	Peak
4	5470.000	53.58	0.71	54.29	-13.91	68.20	300	186	Peak
5	5590.900	96.69	1.27	97.96	N/A	N/A	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

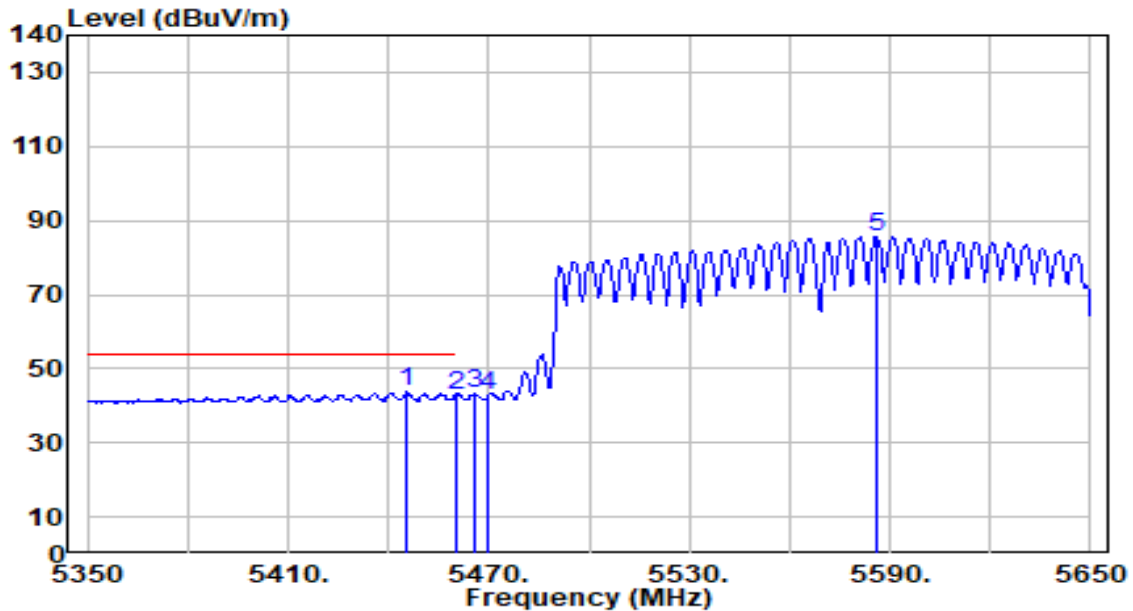


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5445.700	43.06	0.60	43.66	-10.34	54.00	300	186	Average
2		5460.000	42.21	0.66	42.87	-11.13	54.00	300	186	Average
3		5466.100	42.74	0.69	43.42	N/A	N/A	300	186	Average
4		5470.000	42.12	0.71	42.82	N/A	N/A	300	186	Average
5		5585.800	84.29	1.24	85.53	N/A	N/A	300	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

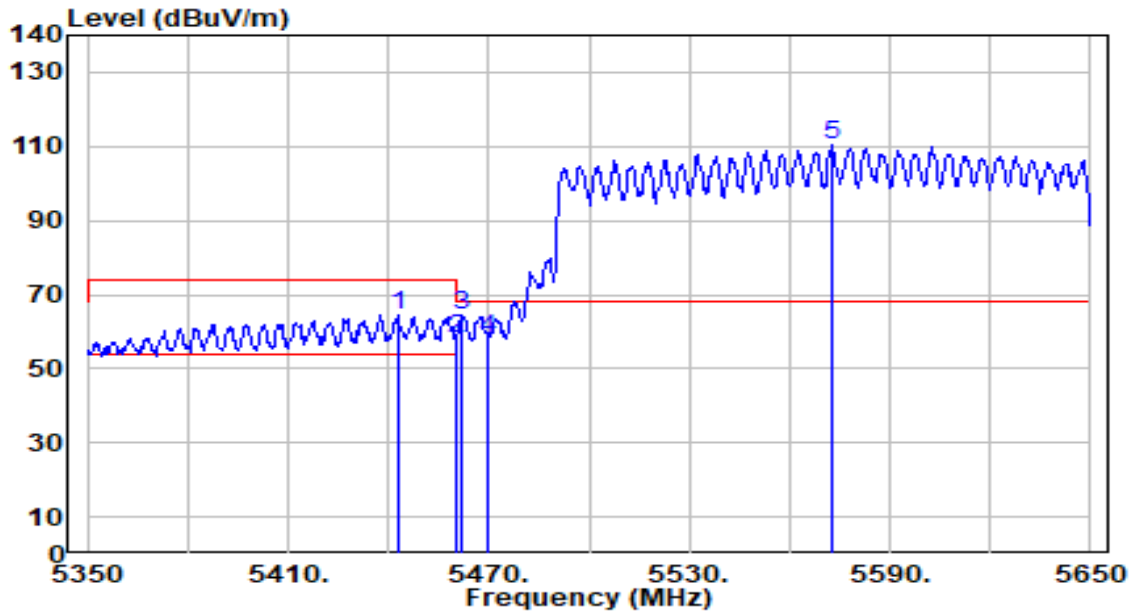


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5442.700	63.69	0.58	64.27	-9.73	74.00	200	165	Peak
2	5460.000	57.27	0.66	57.93	-16.07	74.00	200	165	Peak
3	* 5462.200	63.74	0.67	64.41	-3.79	68.20	200	165	Peak
4	5470.000	57.26	0.71	57.96	-10.24	68.20	200	165	Peak
5	5572.600	109.34	1.18	110.52	N/A	N/A	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

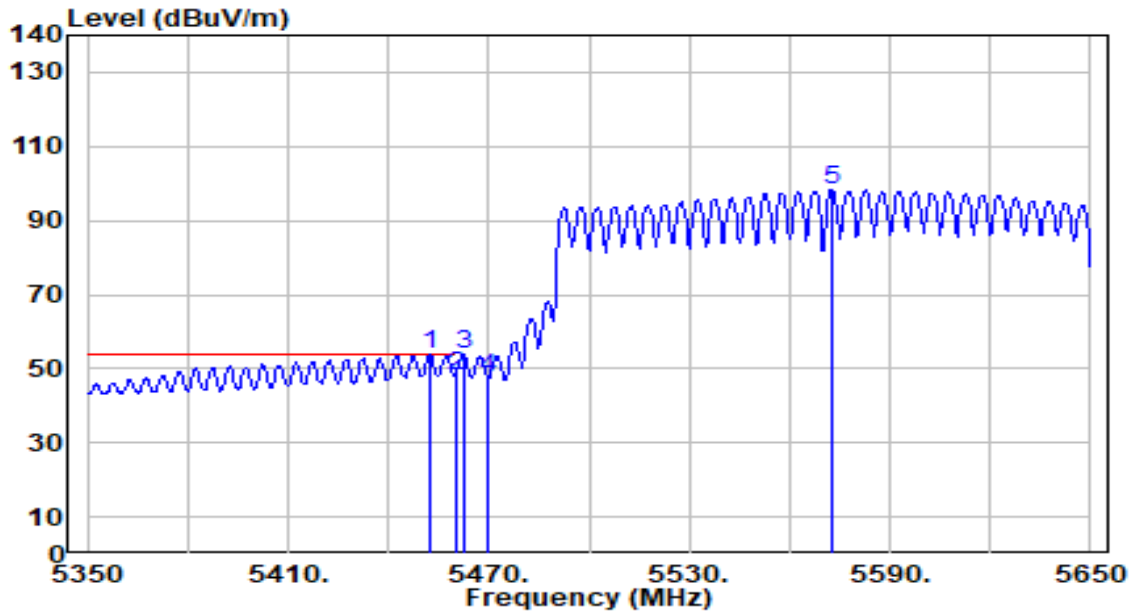


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.600	53.23	0.63	53.86	-0.14	54.00	200	165	Average
2		5460.000	47.32	0.66	47.98	-6.02	54.00	200	165	Average
3		5462.500	53.07	0.67	53.74	N/A	N/A	200	165	Average
4		5470.000	46.73	0.71	47.43	N/A	N/A	200	165	Average
5		5572.600	97.25	1.18	98.43	N/A	N/A	200	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

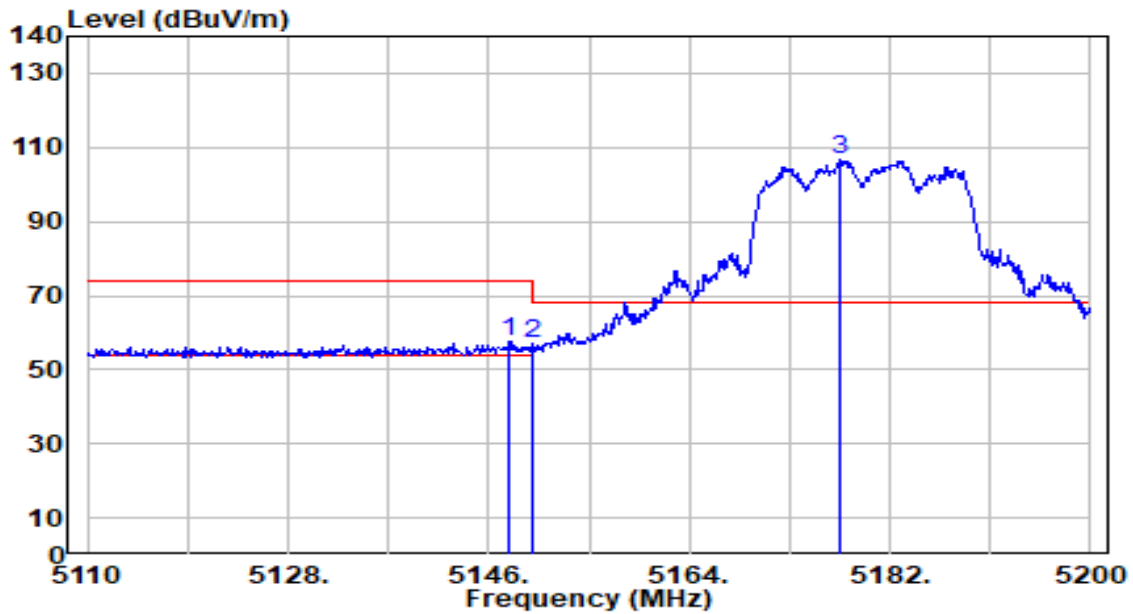


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	56.89	0.65	57.54	-16.46	74.00	318	197	Peak
2		5150.000	56.54	0.65	57.19	-16.81	74.00	318	197	Peak
3		5177.410	105.89	0.68	106.57	N/A	N/A	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

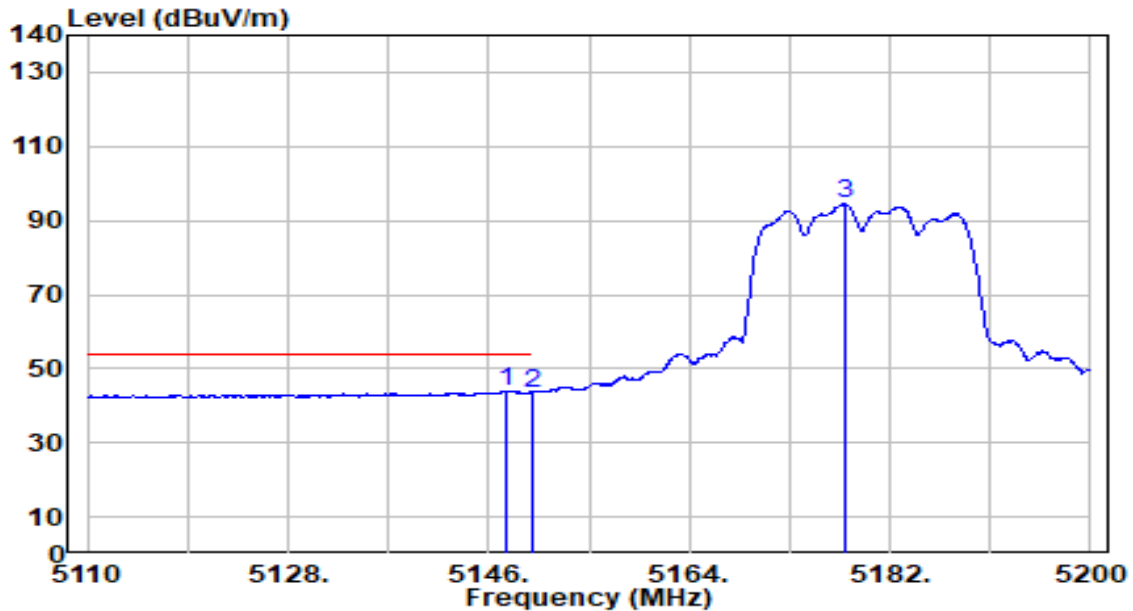


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.620	43.31	0.65	43.96	-10.04	54.00	318	197	Average
2		5150.000	42.88	0.65	43.53	-10.47	54.00	318	197	Average
3		5177.950	93.72	0.68	94.40	N/A	N/A	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

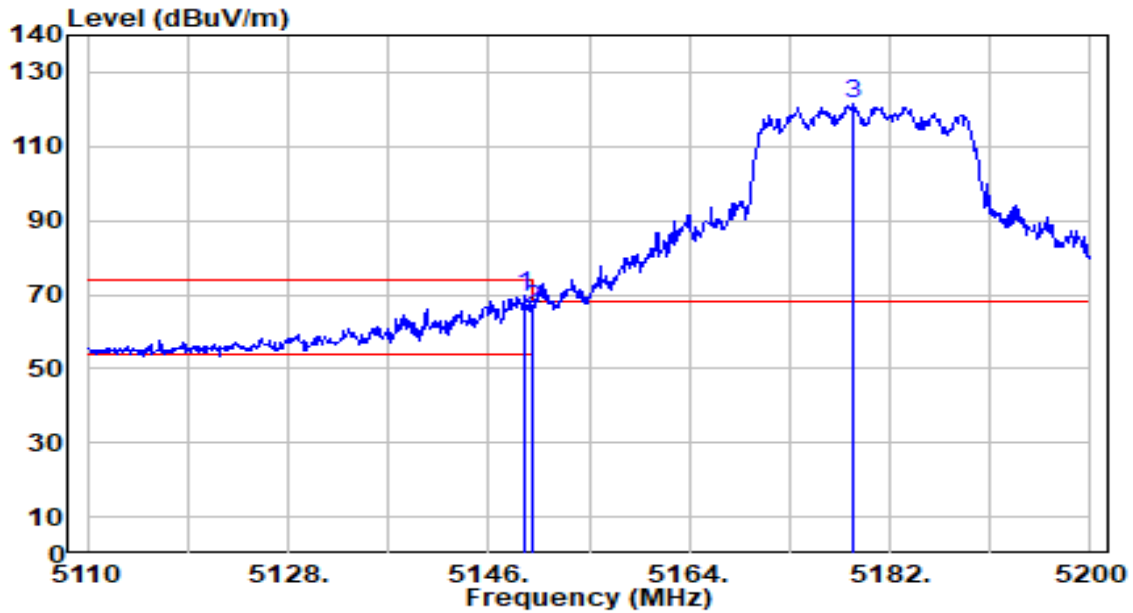


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	69.14	0.65	69.79	-4.21	74.00	200	290	Peak
2		5150.000	65.40	0.65	66.06	-7.94	74.00	200	290	Peak
3		5178.760	121.09	0.68	121.77	N/A	N/A	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

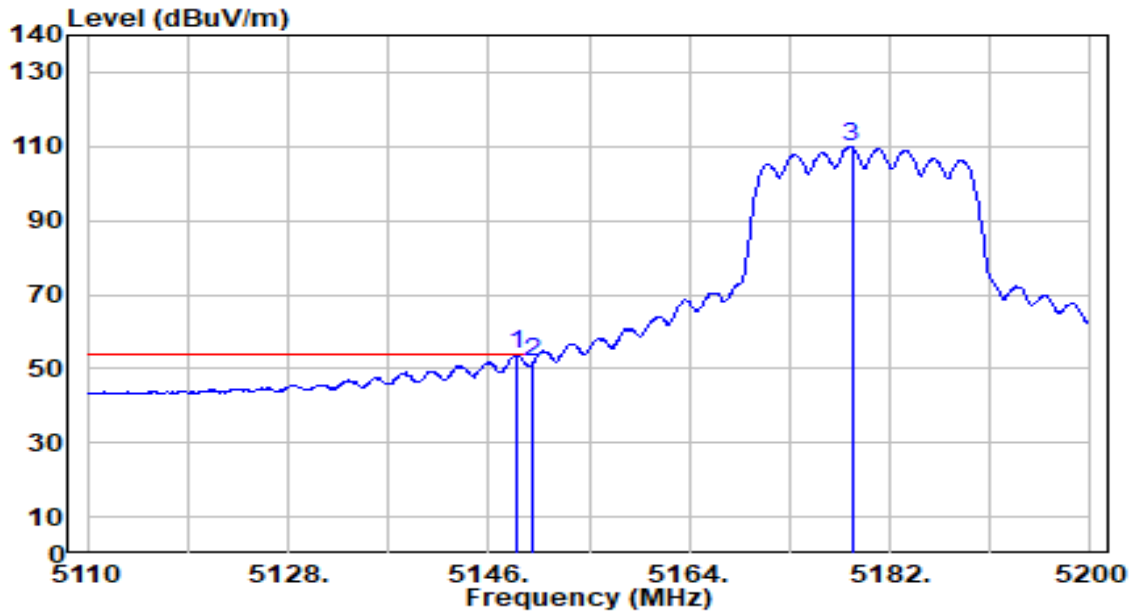


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.610	53.11	0.65	53.76	-0.24	54.00	200	290	Average
2		5150.000	50.89	0.65	51.54	-2.46	54.00	200	290	Average
3		5178.580	109.17	0.68	109.85	N/A	N/A	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

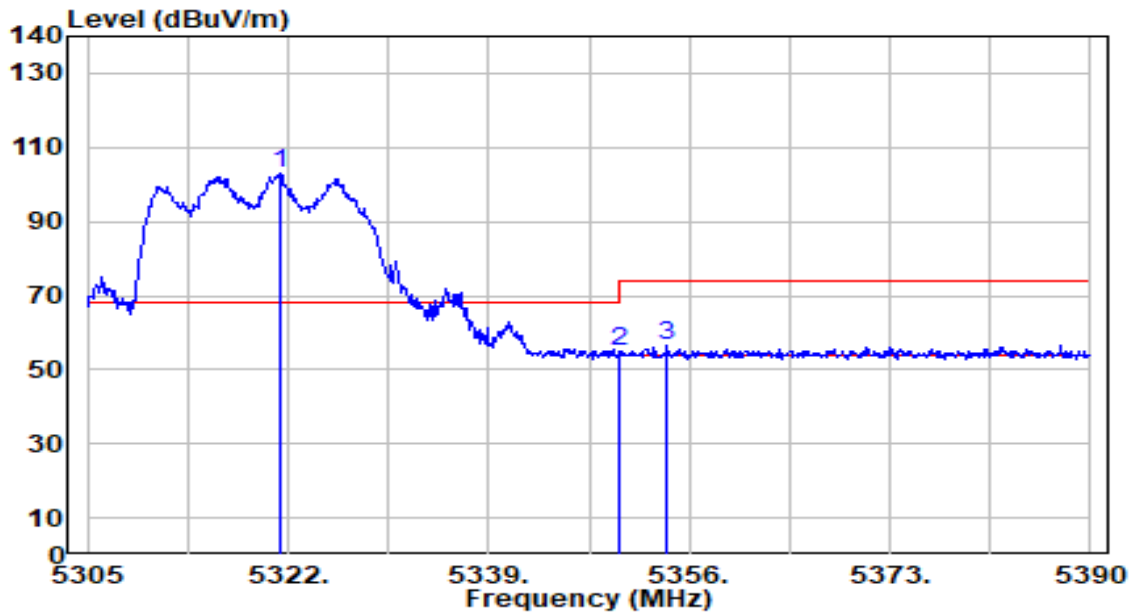


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.405	102.50	0.52	103.01	N/A	N/A	300	186	Peak
2	5350.000	54.22	0.47	54.69	-19.31	74.00	300	186	Peak
3	* 5354.045	56.23	0.46	56.70	-17.30	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

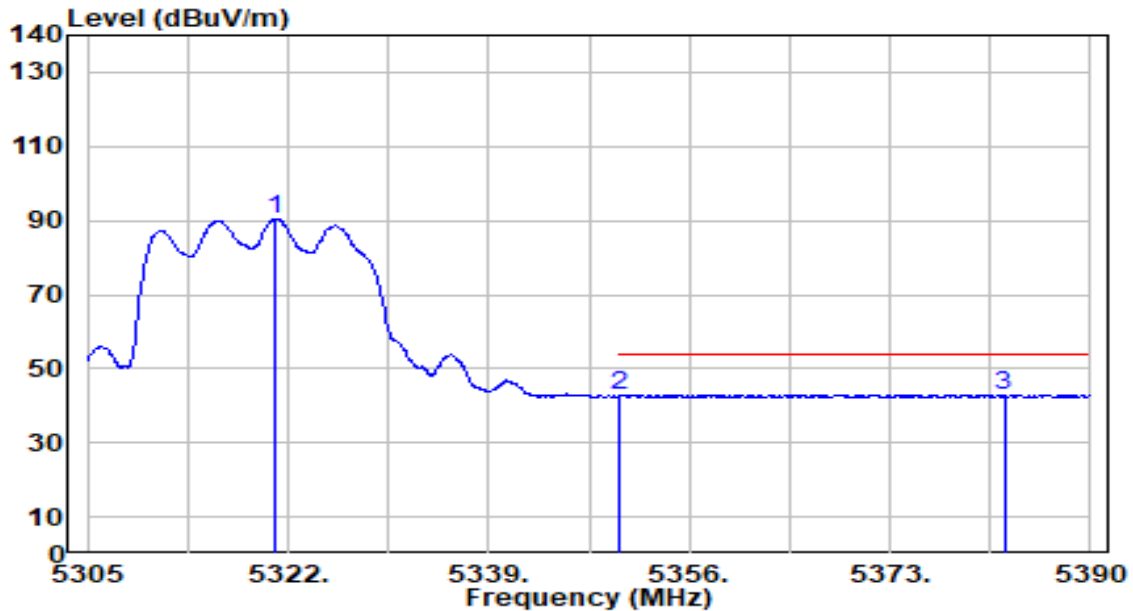


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.980	89.88	0.52	90.39	N/A	N/A	300	186	Average
2	5350.000	42.41	0.47	42.88	-11.12	54.00	300	186	Average
3	* 5382.690	42.57	0.42	42.99	-11.01	54.00	300	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

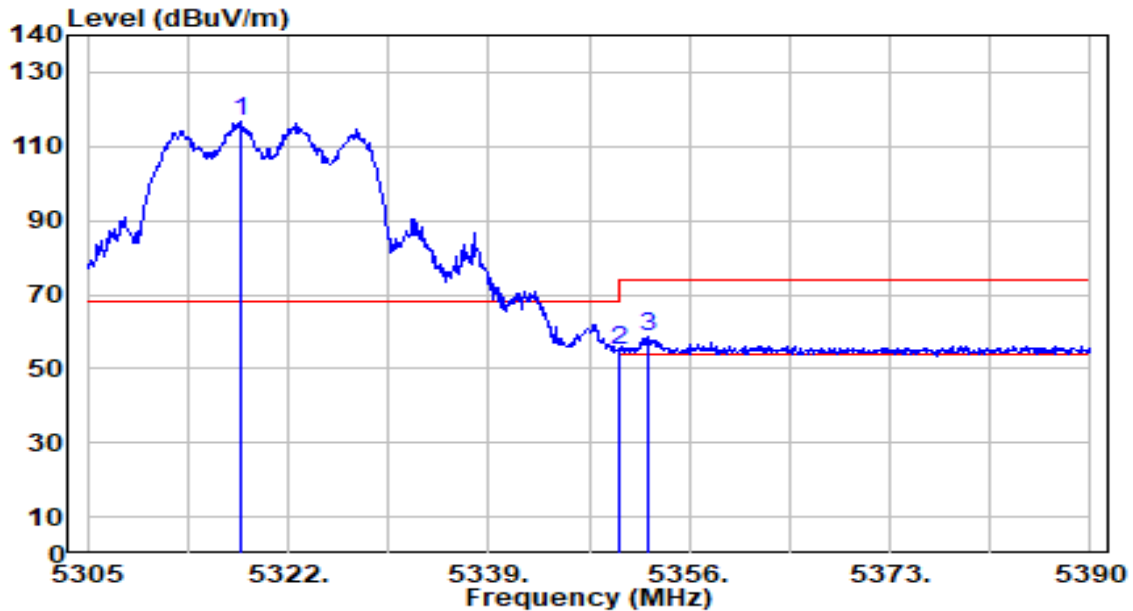


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.005	116.11	0.52	116.64	N/A	N/A	200	165	Peak
2	5350.000	54.32	0.47	54.79	-19.21	74.00	200	165	Peak
3	* 5352.515	57.91	0.47	58.38	-15.62	74.00	200	165	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

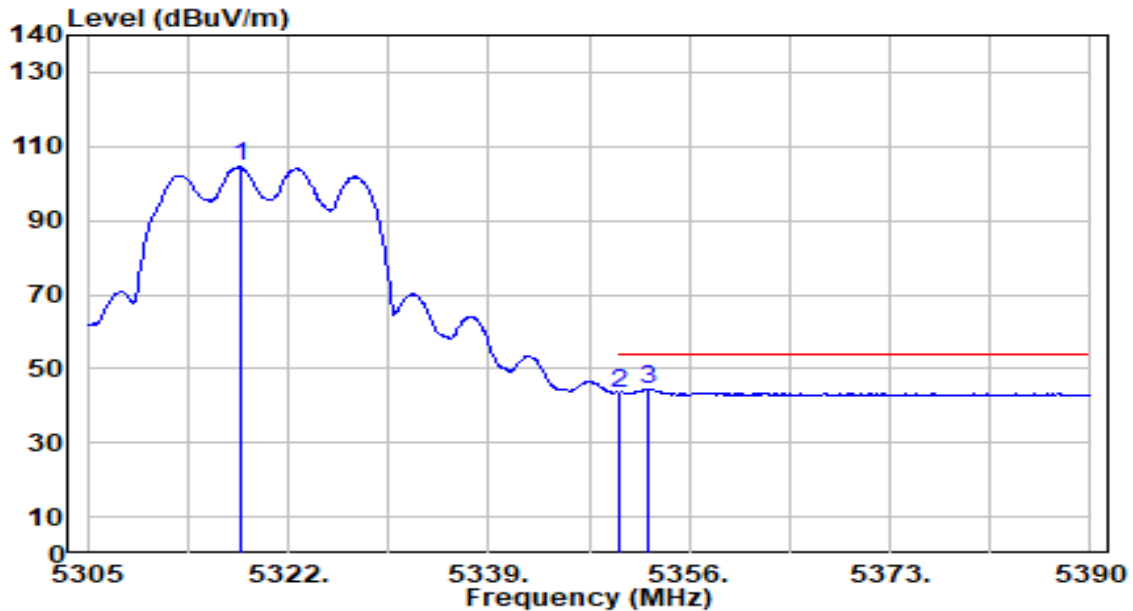


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.920	103.99	0.52	104.51	N/A	N/A	200	165	Average
2	5350.000	43.10	0.47	43.58	-10.42	54.00	200	165	Average
3	* 5352.515	43.94	0.47	44.41	-9.59	54.00	200	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

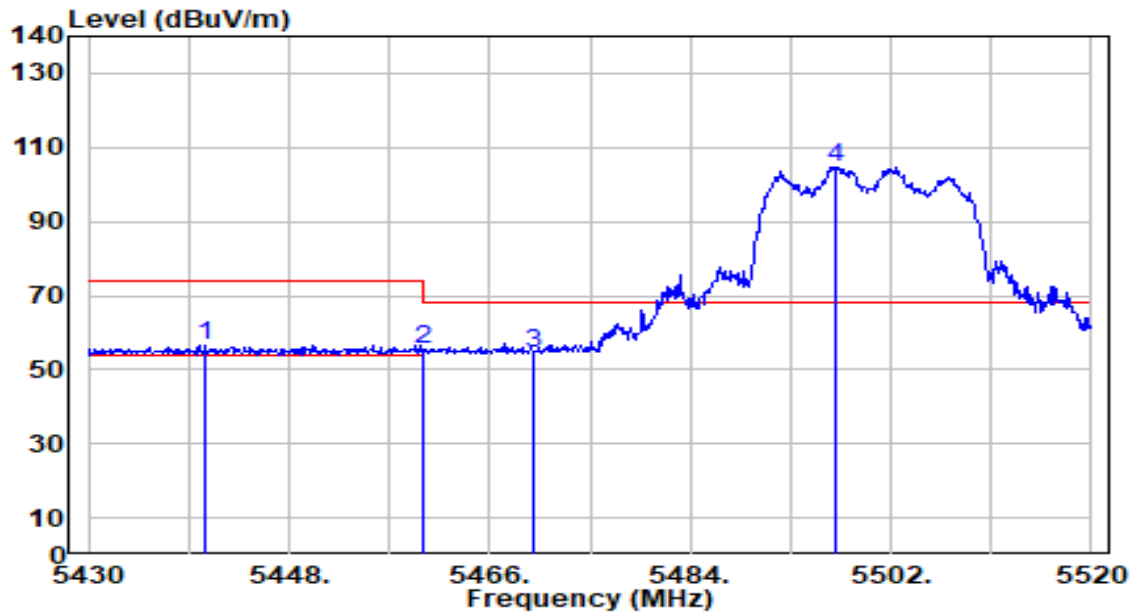


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5440.440	55.92	0.57	56.49	-17.51	74.00	248	186	Peak
2	5460.000	55.02	0.66	55.68	-18.32	74.00	248	186	Peak
3	* 5470.000	53.88	0.71	54.59	-13.61	68.20	248	186	Peak
4	5496.960	103.97	0.83	104.79	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

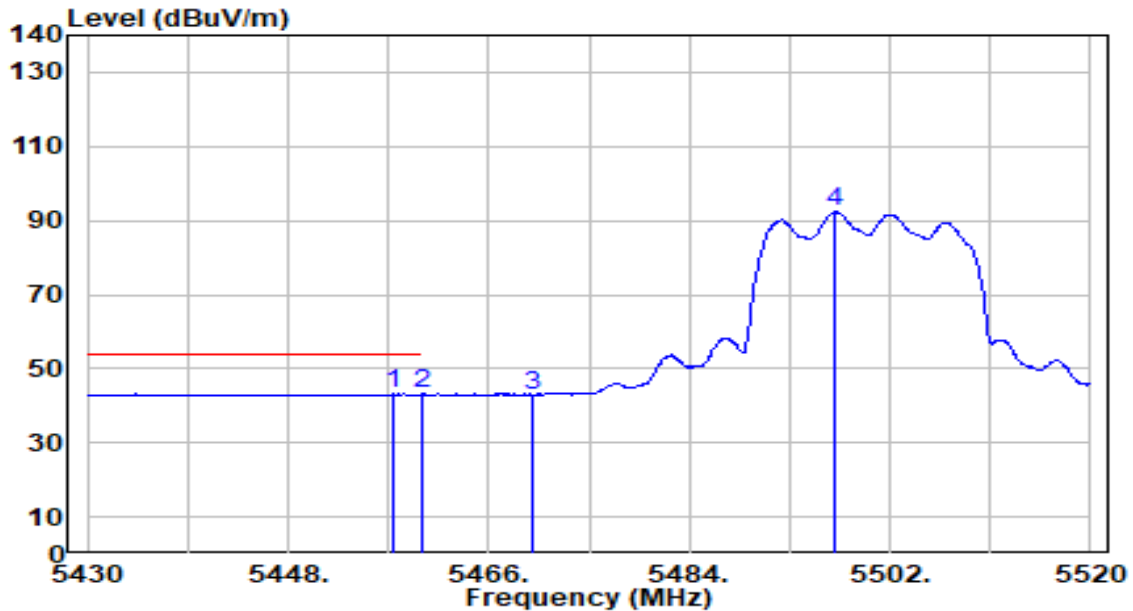


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.450	42.48	0.65	43.13	-10.87	54.00	248	186	Average
2		5460.000	42.41	0.66	43.07	-10.93	54.00	248	186	Average
3		5470.000	42.09	0.71	42.80	N/A	N/A	248	186	Average
4		5497.140	91.42	0.83	92.25	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

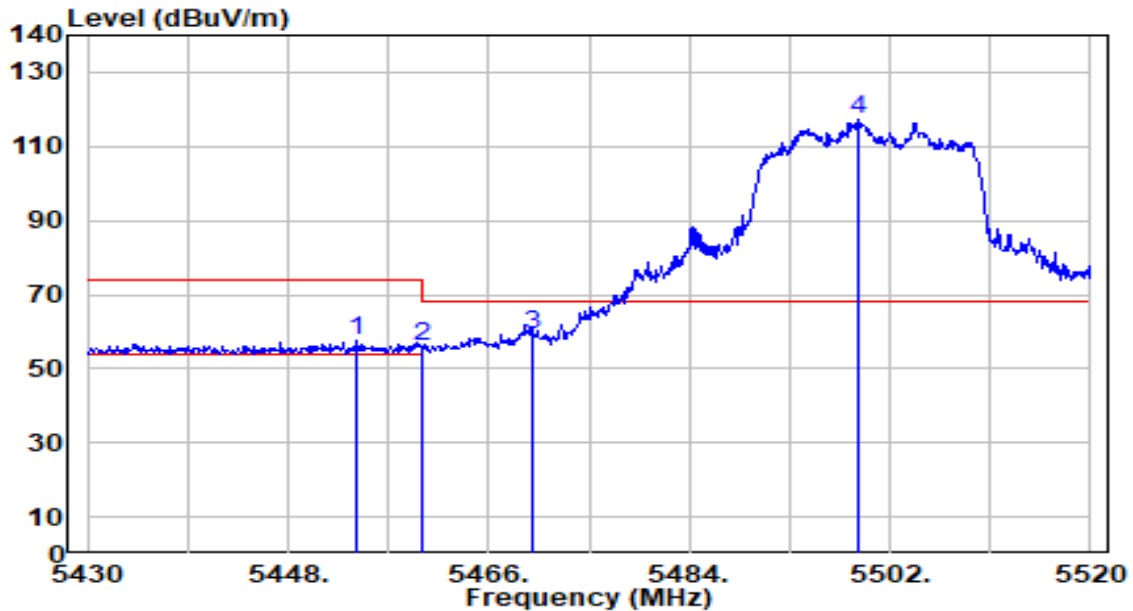


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.210	56.72	0.64	57.35	-16.65	74.00	184	192	Peak
2	5460.000	55.19	0.66	55.85	-18.15	74.00	184	192	Peak
3	* 5470.000	58.23	0.71	58.94	-9.26	68.20	184	192	Peak
4	5499.210	116.58	0.84	117.42	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

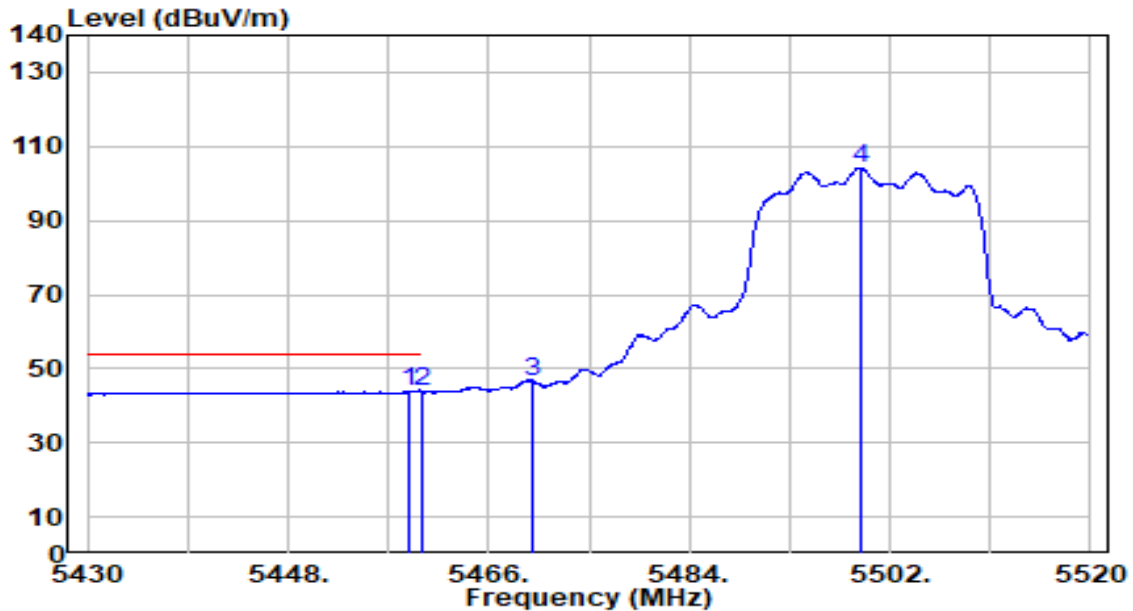


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.890	43.16	0.66	43.82	-10.18	54.00	184	192	Average
2		5460.000	43.11	0.66	43.77	-10.23	54.00	184	192	Average
3		5470.000	46.02	0.71	46.73	N/A	N/A	184	192	Average
4		5499.300	103.35	0.84	104.19	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

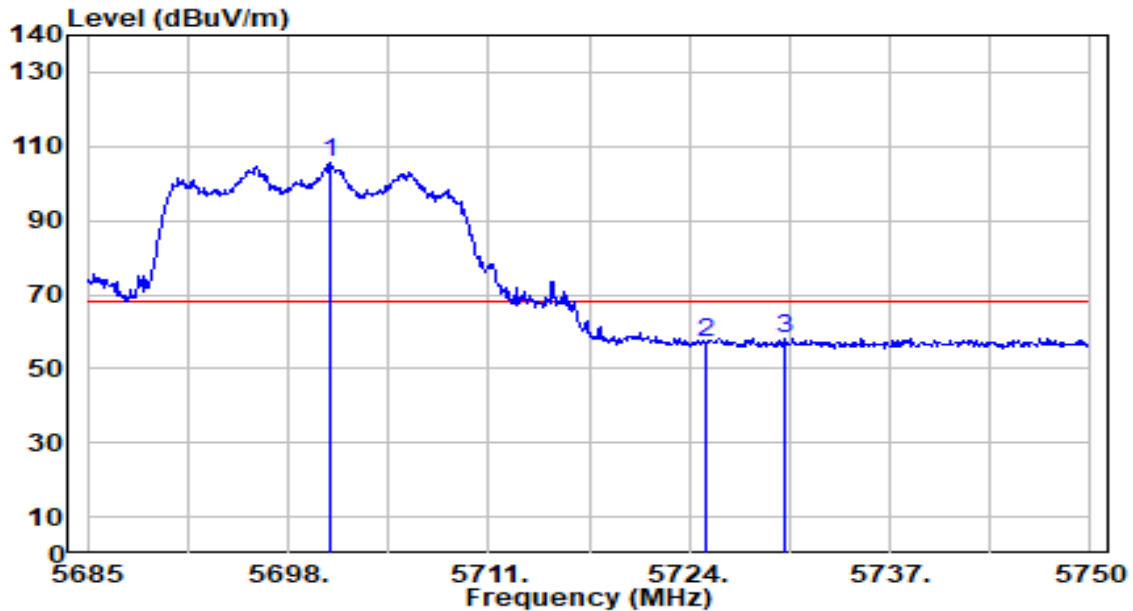


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.665	103.79	1.78	105.57	N/A	N/A	174	91	Peak
2	5725.000	55.02	1.89	56.91	-11.29	68.20	174	91	Peak
3	* 5730.240	56.38	1.92	58.30	-9.90	68.20	174	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

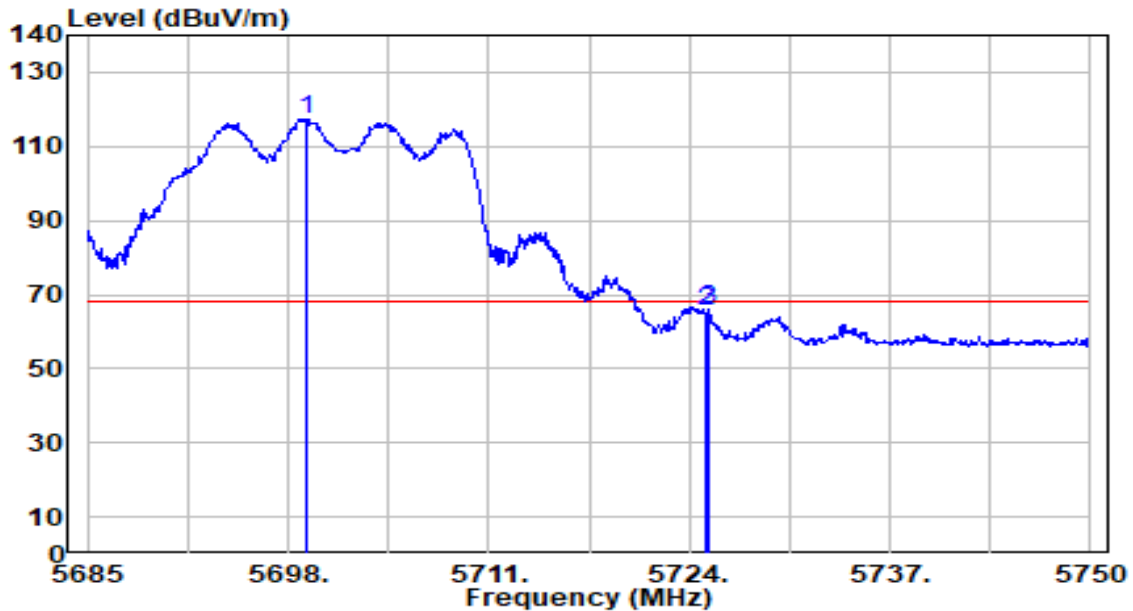


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.170	115.60	1.77	117.38	N/A	N/A	216	196	Peak
2	5725.000	63.47	1.89	65.37	-2.83	68.20	216	196	Peak
3	* 5725.300	64.31	1.89	66.21	-1.99	68.20	216	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

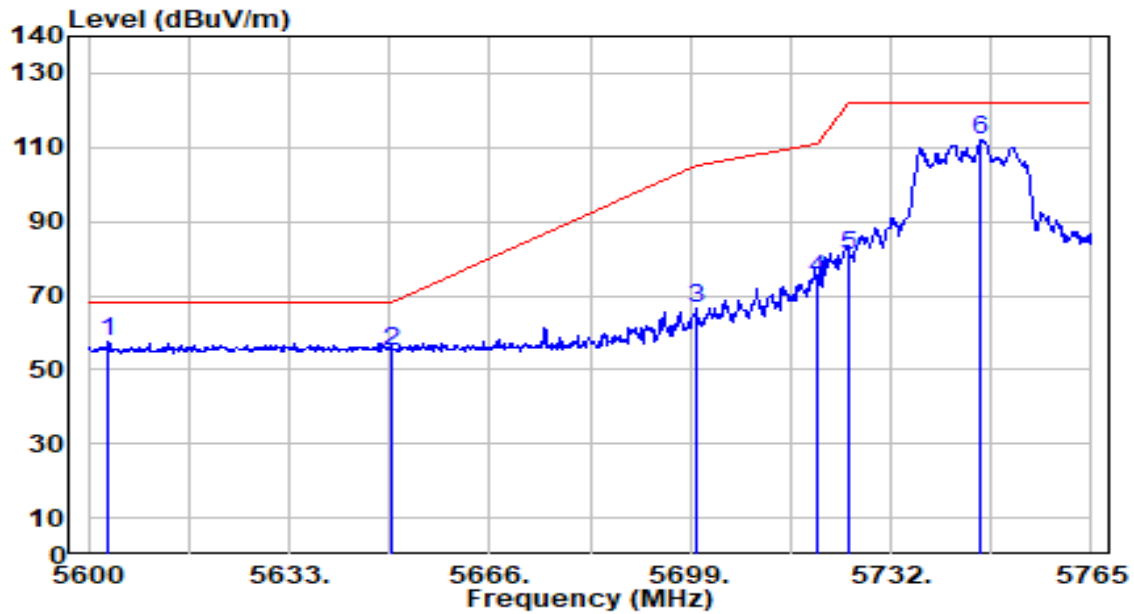


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5603.135	56.04	1.32	57.36	-10.84	68.20	183	168	Peak
2		5650.000	53.58	1.54	55.12	-13.08	68.20	183	168	Peak
3		5700.000	64.53	1.78	66.30	-38.90	105.20	183	168	Peak
4		5720.000	72.64	1.87	74.51	-36.29	110.80	183	168	Peak
5		5725.000	79.05	1.89	80.94	-41.26	122.20	183	168	Peak
6		5746.685	109.84	1.99	111.84	N/A	N/A	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

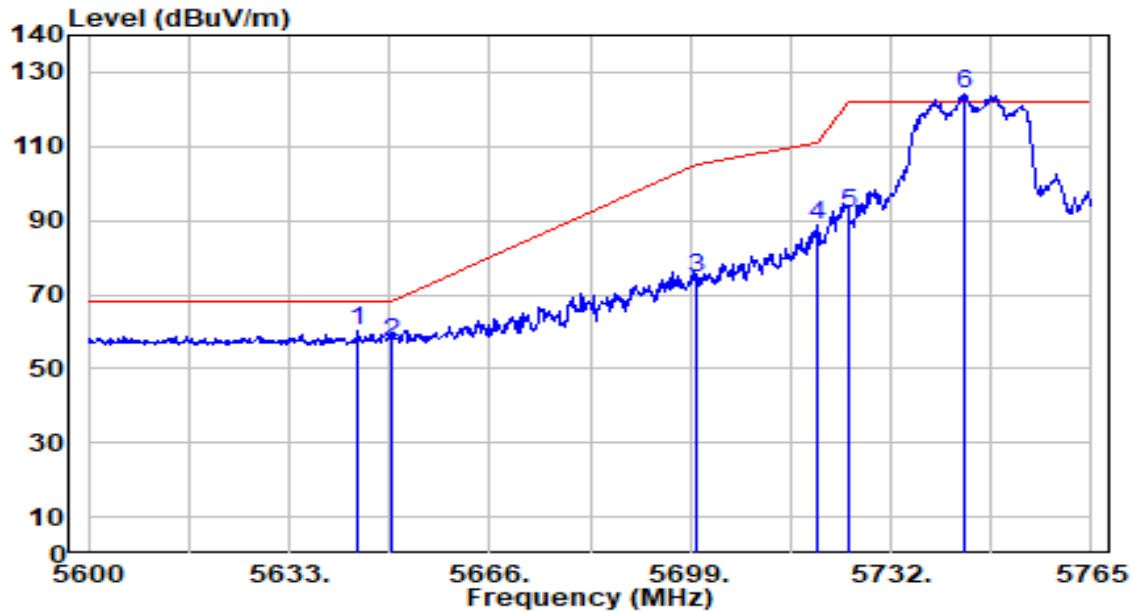


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.385	58.64	1.52	60.16	-8.04	68.20	181	156	Peak
2		5650.000	55.69	1.54	57.24	-10.96	68.20	181	156	Peak
3		5700.000	72.77	1.78	74.55	-30.65	105.20	181	156	Peak
4		5720.000	86.85	1.87	88.72	-22.08	110.80	181	156	Peak
5		5725.000	89.95	1.89	91.85	-30.35	122.20	181	156	Peak
6		5744.210	122.34	1.98	124.33	N/A	N/A	181	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

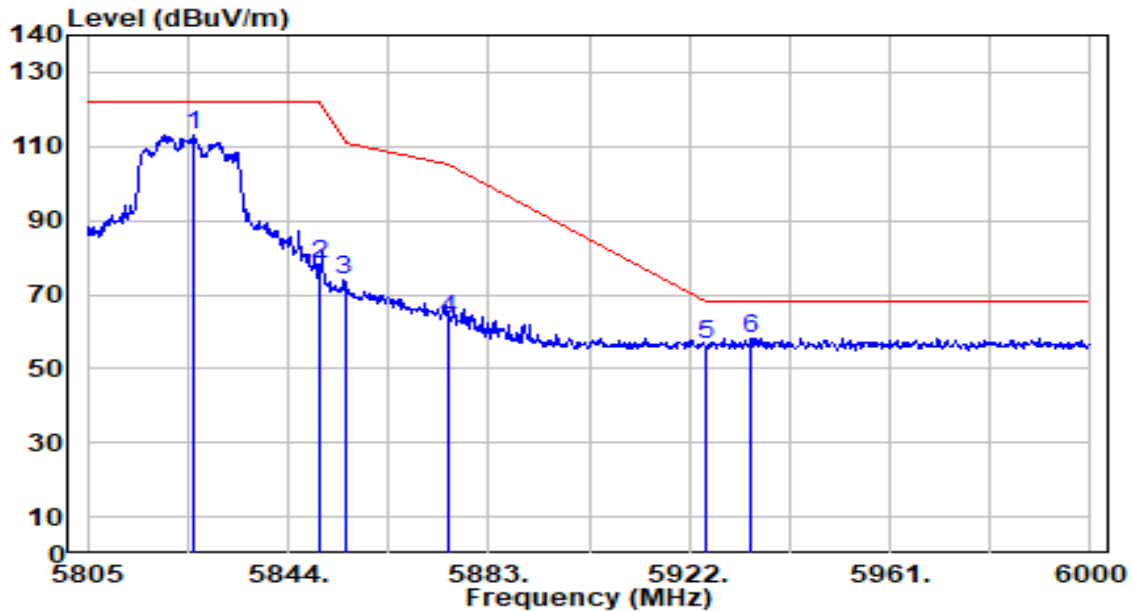


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.475	110.89	2.25	113.14	N/A	N/A	315	164	Peak
2	5850.000	75.68	2.25	77.93	-44.27	122.20	315	164	Peak
3	5855.000	71.55	2.25	73.81	-36.99	110.80	315	164	Peak
4	5875.000	60.89	2.26	63.14	-42.06	105.20	315	164	Peak
5	5925.000	54.33	2.27	56.60	-11.60	68.20	315	164	Peak
6	* 5933.895	56.10	2.27	58.36	-9.84	68.20	315	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

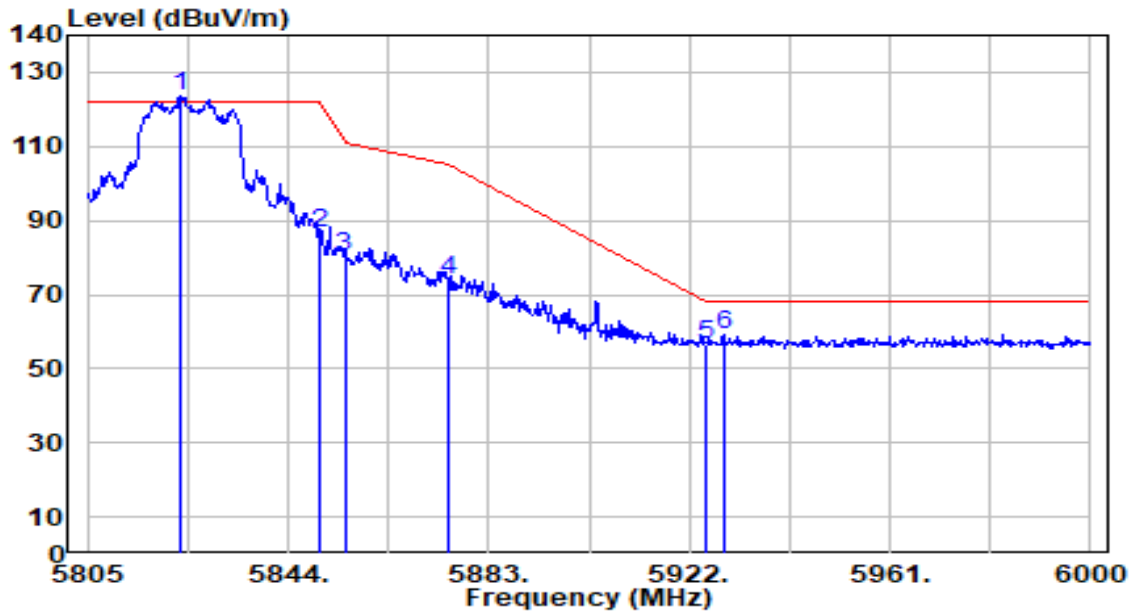


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.940	121.18	2.25	123.43	N/A	N/A	183	168	Peak
2	5850.000	84.30	2.25	86.55	-35.65	122.20	183	168	Peak
3	5855.000	78.12	2.25	80.37	-30.43	110.80	183	168	Peak
4	5875.000	71.97	2.26	74.22	-30.98	105.20	183	168	Peak
5	5925.000	54.52	2.27	56.79	-11.41	68.20	183	168	Peak
6	* 5928.630	56.74	2.27	59.00	-9.20	68.20	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

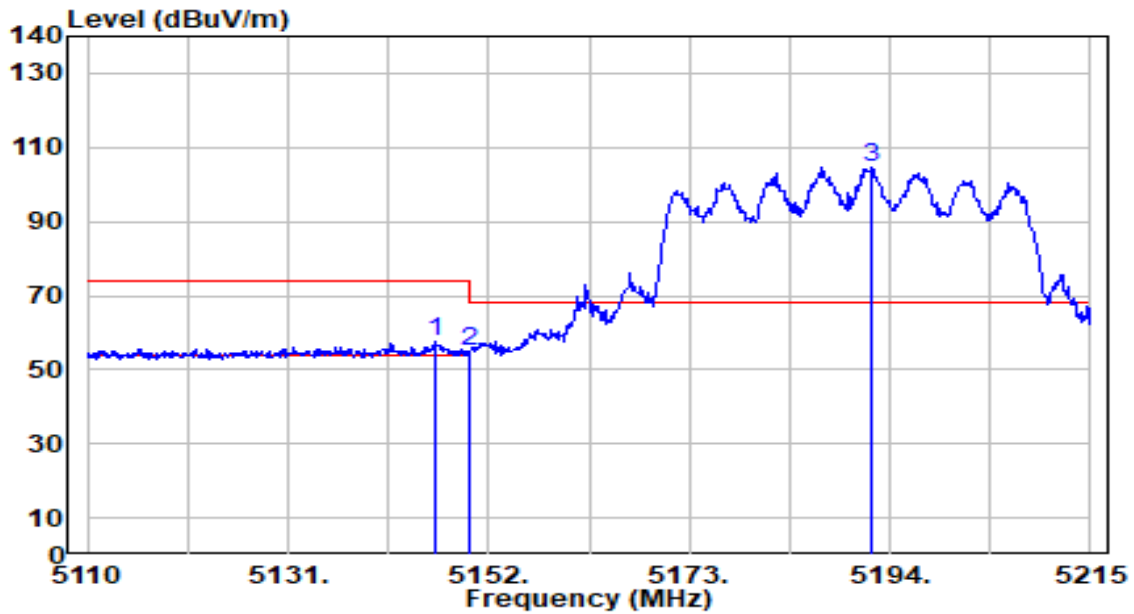


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.435	56.97	0.65	57.62	-16.38	74.00	318	197	Peak
2		5150.000	54.42	0.65	55.07	-18.93	74.00	318	197	Peak
3		5192.110	104.10	0.69	104.80	N/A	N/A	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

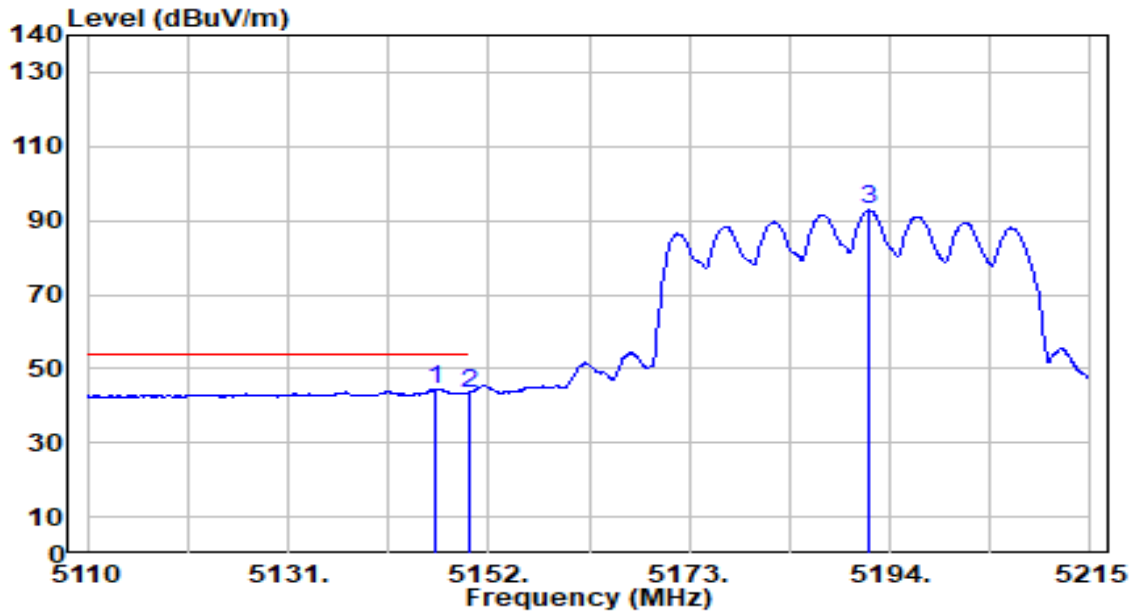


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.330	43.82	0.65	44.48	-9.52	54.00	318	197	Average
2		5150.000	42.81	0.65	43.47	-10.53	54.00	318	197	Average
3		5191.690	92.07	0.69	92.76	N/A	N/A	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

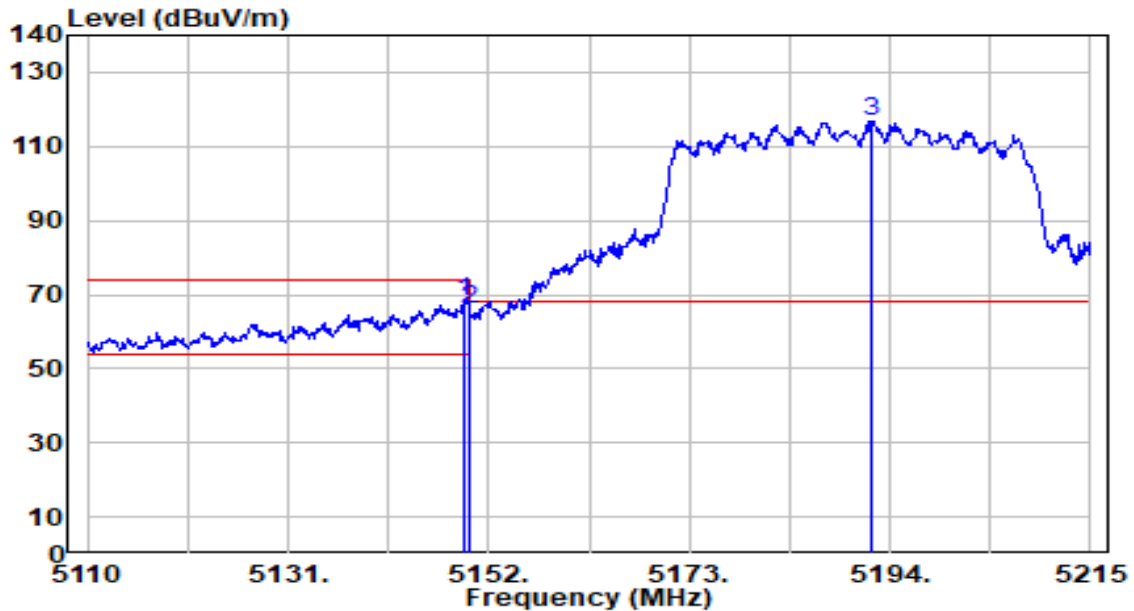


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	67.63	0.65	68.28	-5.72	74.00	200	290	Peak
2		5150.000	65.44	0.65	66.09	-7.91	74.00	200	290	Peak
3		5192.005	116.17	0.69	116.86	N/A	N/A	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

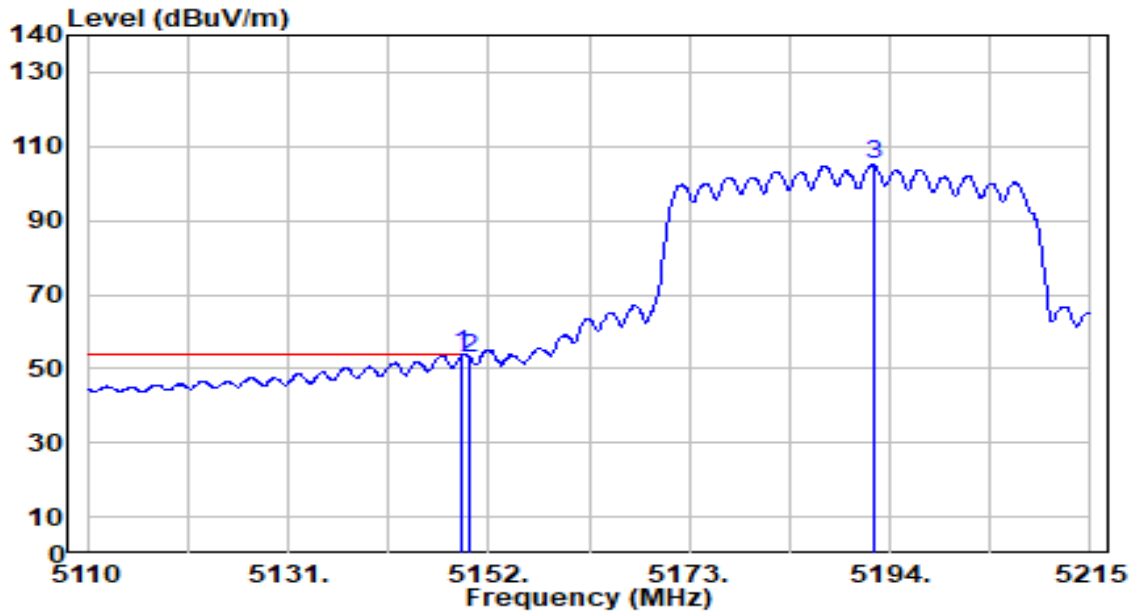


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	53.21	0.65	53.86	-0.14	54.00	200	290	Average
2		5150.000	52.29	0.65	52.94	-1.06	54.00	200	290	Average
3		5192.320	104.23	0.69	104.92	N/A	N/A	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

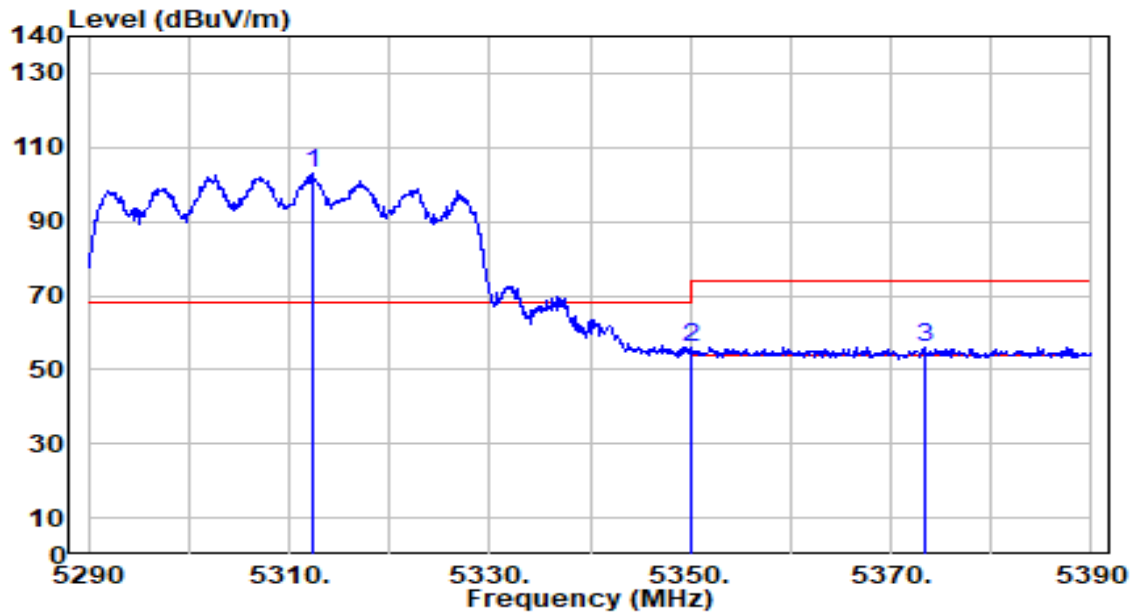


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.400	102.35	0.53	102.88	N/A	N/A	300	186	Peak
2	5350.000	55.62	0.47	56.09	-17.91	74.00	300	186	Peak
3	* 5373.300	55.71	0.44	56.14	-17.86	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

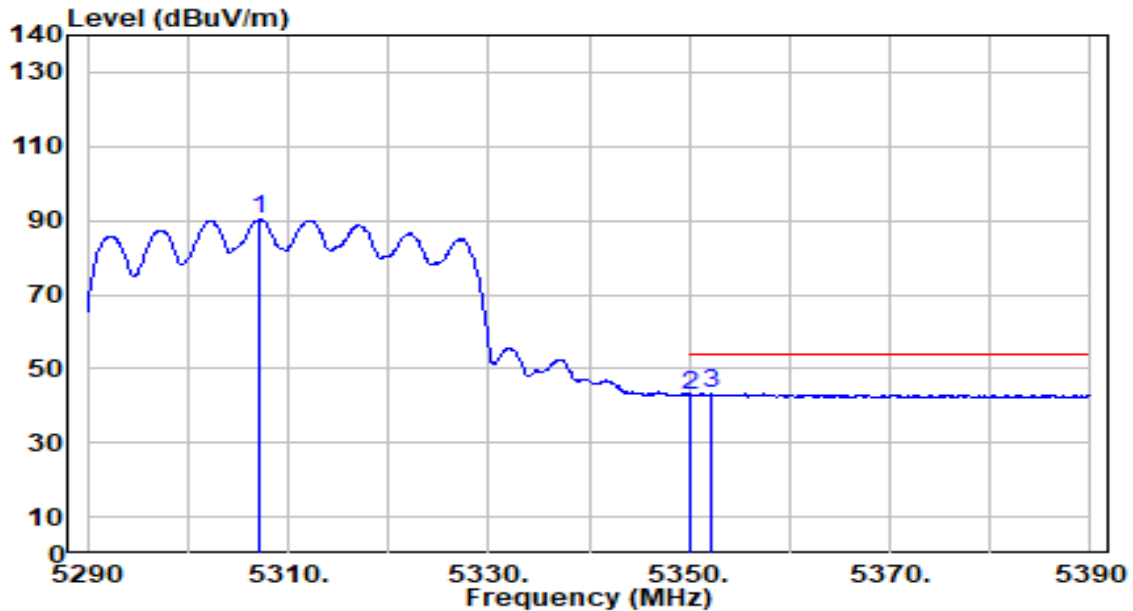


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5307.100	89.97	0.54	90.51	N/A	N/A	300	186	Average
2		5350.000	42.38	0.47	42.85	-11.15	54.00	300	186	Average
3	*	5352.300	42.75	0.47	43.22	-10.78	54.00	300	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

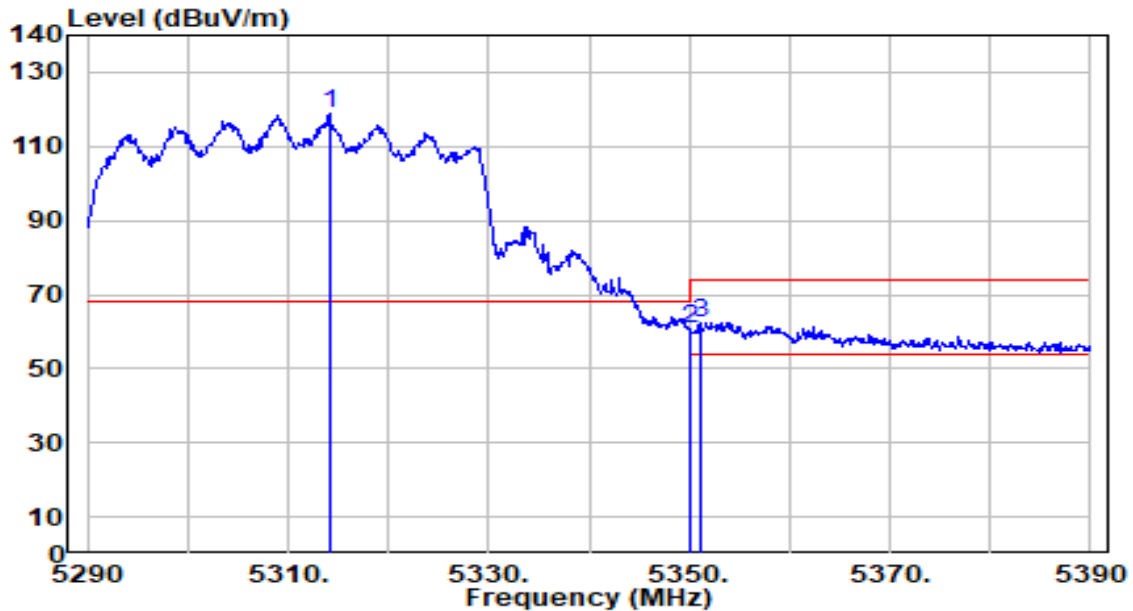


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.100	118.22	0.53	118.74	N/A	N/A	200	165	Peak
2	5350.000	60.10	0.47	60.58	-13.42	74.00	200	165	Peak
3	* 5351.100	62.06	0.47	62.53	-11.47	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

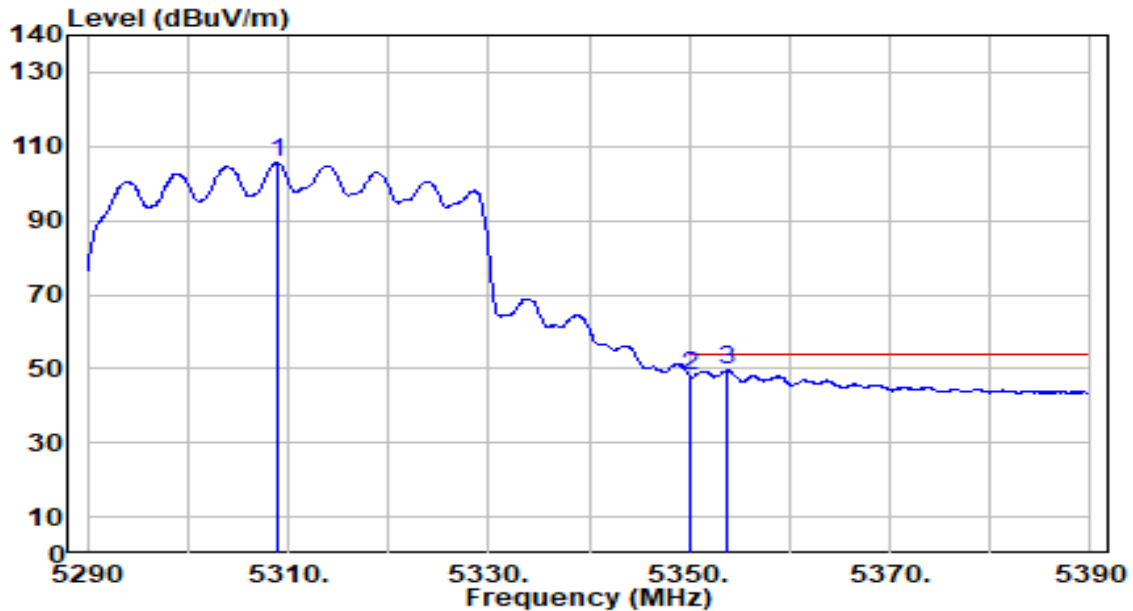


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5309.000	105.03	0.53	105.57	N/A	N/A	200	165	Average
2	5350.000	47.73	0.47	48.20	-5.80	54.00	200	165	Average
3	* 5353.800	49.06	0.47	49.52	-4.48	54.00	200	165	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

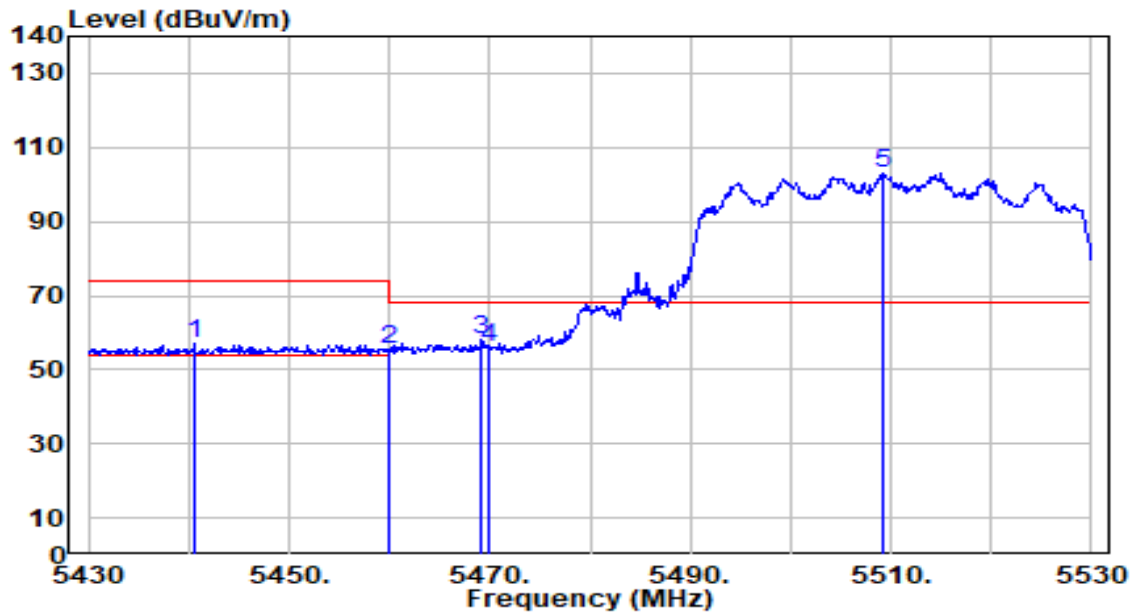


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5440.600	56.49	0.58	57.06	-16.94	74.00	248	186	Peak
2	5460.000	55.01	0.66	55.67	-18.33	74.00	248	186	Peak
3	* 5469.200	57.54	0.70	58.24	-9.96	68.20	248	186	Peak
4	5470.000	55.32	0.71	56.02	-12.18	68.20	248	186	Peak
5	5509.300	102.25	0.88	103.13	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

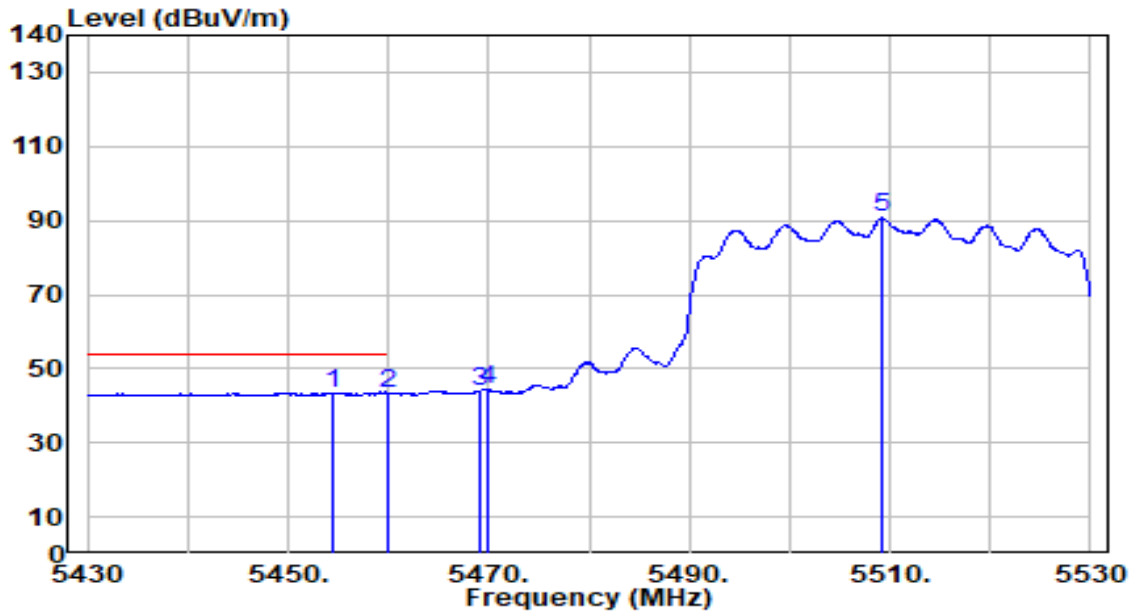


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5454.500	42.75	0.64	43.38	-10.62	54.00	248	186	Average
2	*	5460.000	42.89	0.66	43.55	-10.45	54.00	248	186	Average
3		5469.200	43.37	0.70	44.08	N/A	N/A	248	186	Average
4		5470.000	43.55	0.71	44.25	N/A	N/A	248	186	Average
5		5509.300	89.76	0.88	90.65	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

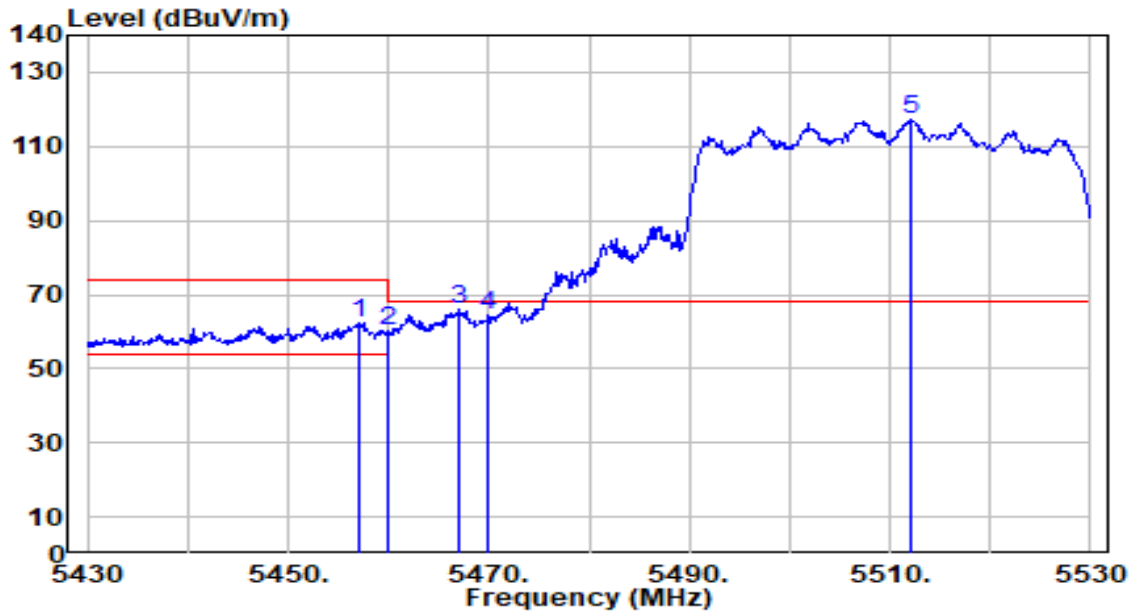


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.200	61.92	0.65	62.57	-11.43	74.00	184	192	Peak
2	5460.000	59.46	0.66	60.13	-13.87	74.00	184	192	Peak
3	* 5467.100	65.09	0.69	65.79	-2.41	68.20	184	192	Peak
4	5470.000	63.92	0.71	64.63	-3.57	68.20	184	192	Peak
5	5512.000	116.36	0.90	117.26	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

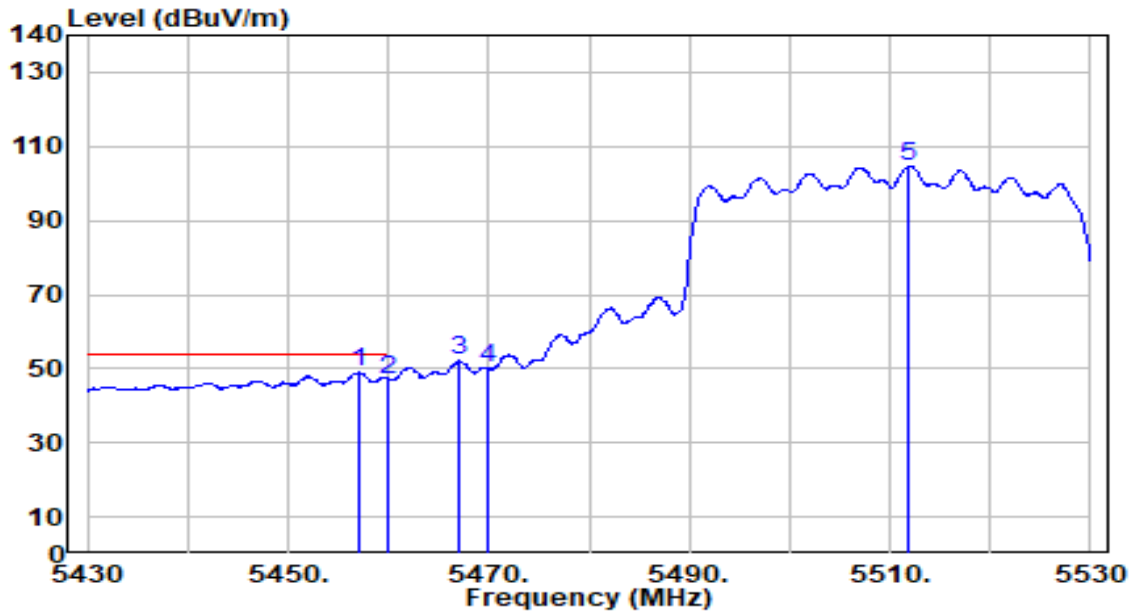


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.100	48.28	0.65	48.92	-5.08	54.00	184	192	Average
2		5460.000	46.53	0.66	47.19	-6.81	54.00	184	192	Average
3		5467.100	51.40	0.69	52.10	N/A	N/A	184	192	Average
4		5470.000	49.52	0.71	50.23	N/A	N/A	184	192	Average
5		5511.900	103.73	0.90	104.62	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

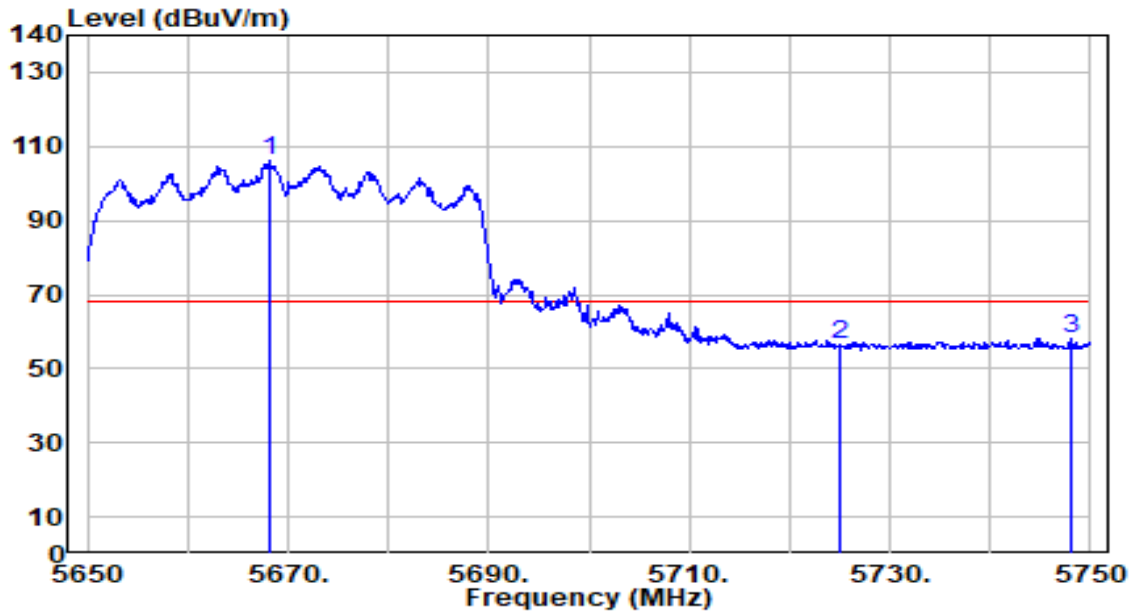


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.200	104.40	1.63	106.03	N/A	N/A	174	91	Peak
2	5725.000	54.78	1.89	56.67	-11.53	68.20	174	91	Peak
3	* 5748.200	56.18	2.00	58.19	-10.01	68.20	174	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

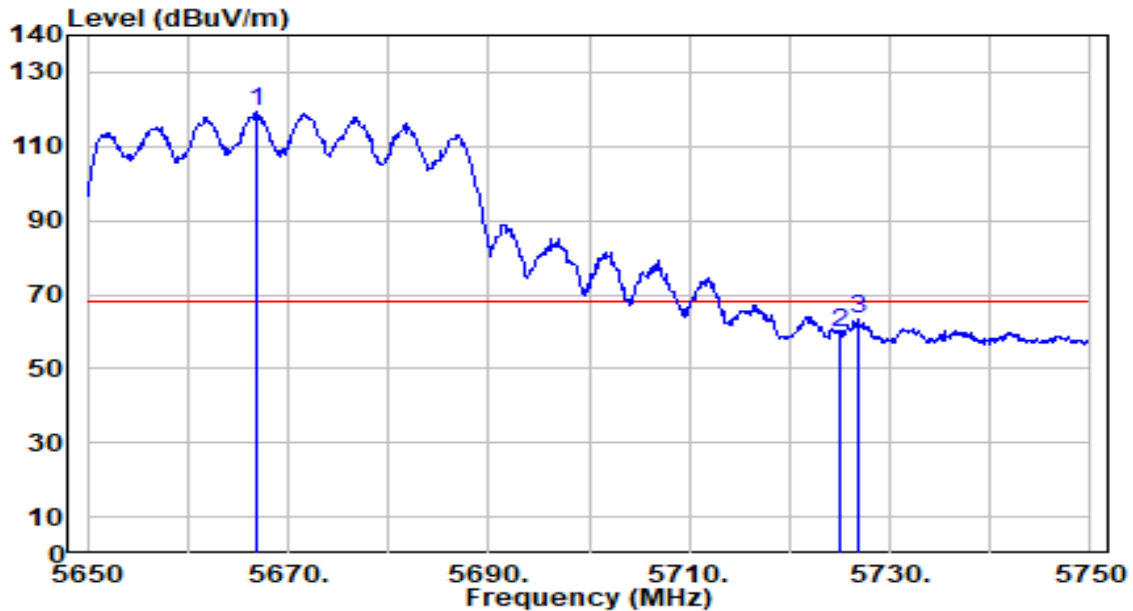


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.900	117.59	1.62	119.21	N/A	N/A	216	196	Peak
2	5725.000	57.83	1.89	59.72	-8.48	68.20	216	196	Peak
3	* 5726.800	61.31	1.90	63.21	-4.99	68.20	216	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

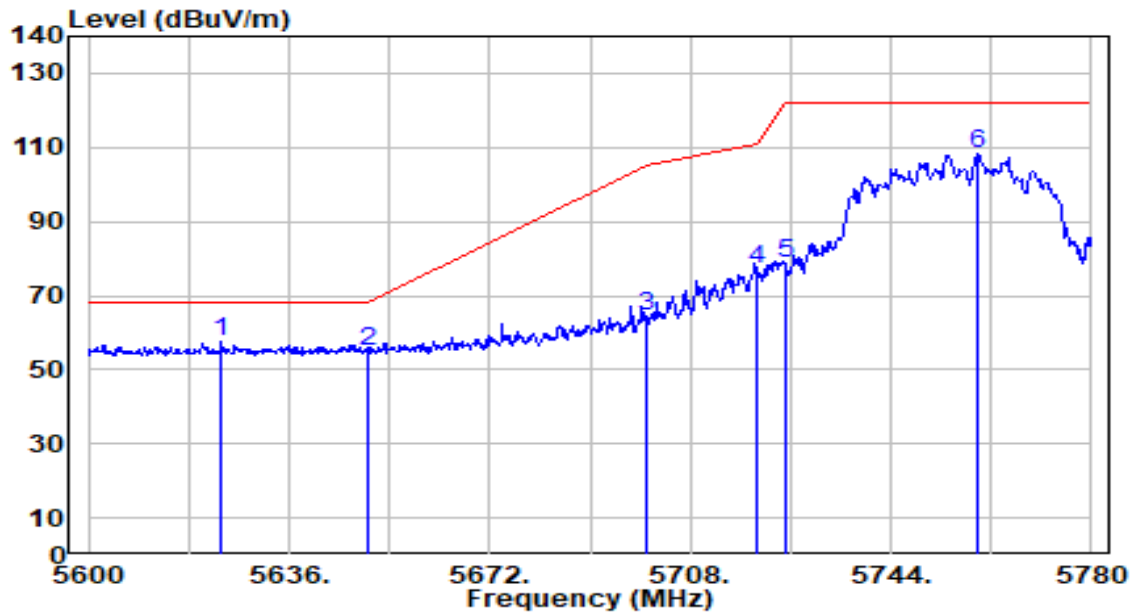


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5623.940	56.00	1.42	57.42	-10.78	68.20	183	168	Peak
2		5650.000	53.61	1.54	55.15	-13.05	68.20	183	168	Peak
3		5700.000	62.85	1.78	64.63	-40.57	105.20	183	168	Peak
4		5720.000	75.04	1.87	76.91	-33.89	110.80	183	168	Peak
5		5725.000	77.03	1.89	78.93	-43.27	122.20	183	168	Peak
6		5759.660	106.02	2.06	108.08	N/A	N/A	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

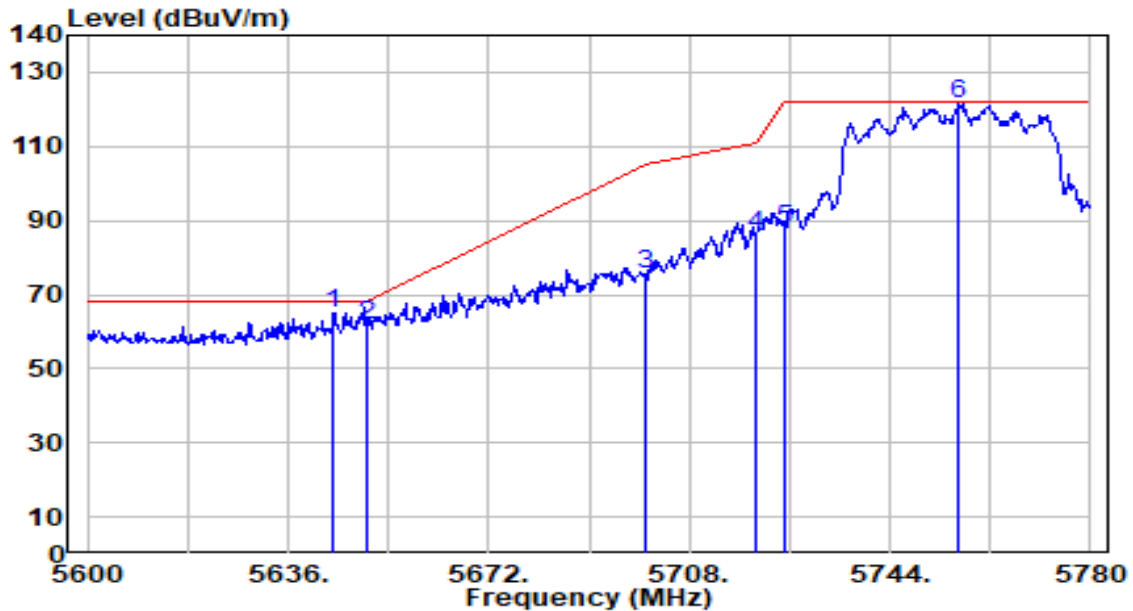


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.100	63.50	1.51	65.01	-3.19	68.20	181	156	Peak
2		5650.000	60.23	1.54	61.77	-6.43	68.20	181	156	Peak
3		5700.000	73.55	1.78	75.32	-29.88	105.20	181	156	Peak
4		5720.000	84.30	1.87	86.17	-24.63	110.80	181	156	Peak
5		5725.000	86.03	1.89	87.92	-34.28	122.20	181	156	Peak
6		5756.420	119.72	2.04	121.76	N/A	N/A	181	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

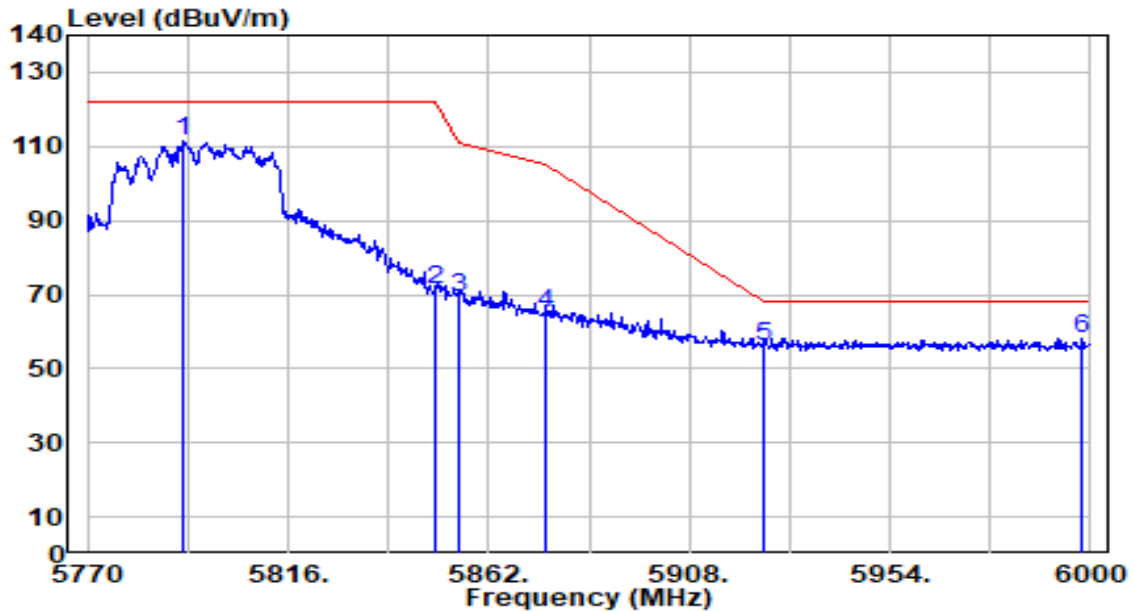


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5791.850	109.19	2.21	111.40	N/A	N/A	315	164	Peak
2	5850.000	68.94	2.25	71.19	-51.01	122.20	315	164	Peak
3	5855.000	67.19	2.25	69.44	-41.36	110.80	315	164	Peak
4	5875.000	62.99	2.26	65.24	-39.96	105.20	315	164	Peak
5	5925.000	53.68	2.27	55.94	-12.26	68.20	315	164	Peak
6	* 5998.160	56.07	2.28	58.35	-9.85	68.20	315	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

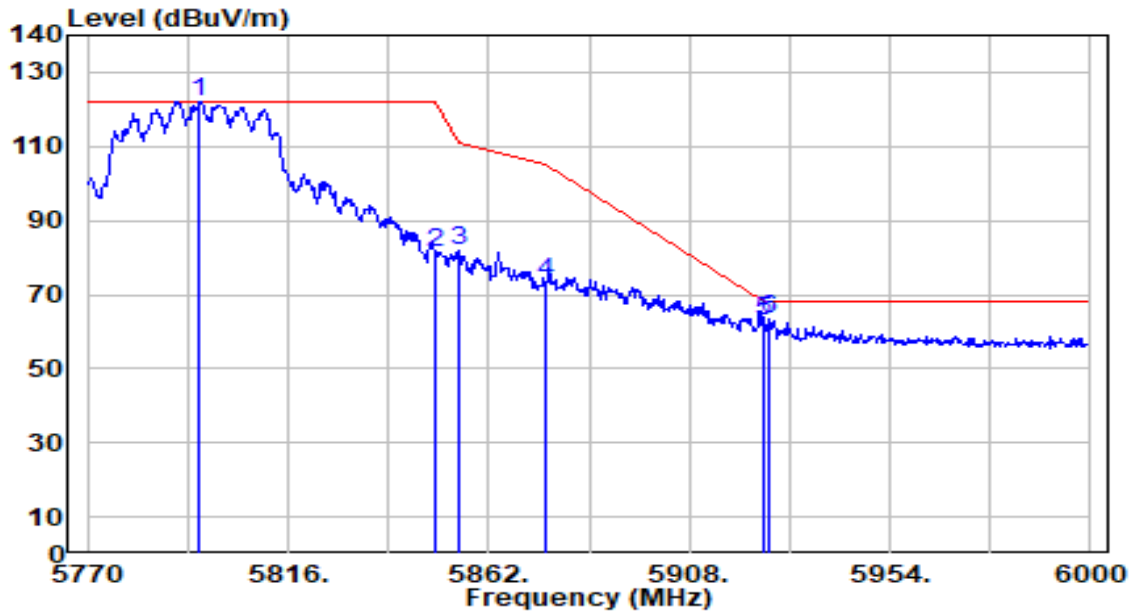


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5795.760	119.98	2.22	122.20	N/A	N/A	115	163	Peak
2	5850.000	79.19	2.25	81.44	-40.76	122.20	115	163	Peak
3	5855.000	79.43	2.25	81.68	-29.12	110.80	115	163	Peak
4	5875.000	71.25	2.26	73.51	-31.69	105.20	115	163	Peak
5	5925.000	60.54	2.27	62.81	-5.39	68.20	115	163	Peak
6	* 5926.400	61.04	2.27	63.31	-4.89	68.20	115	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

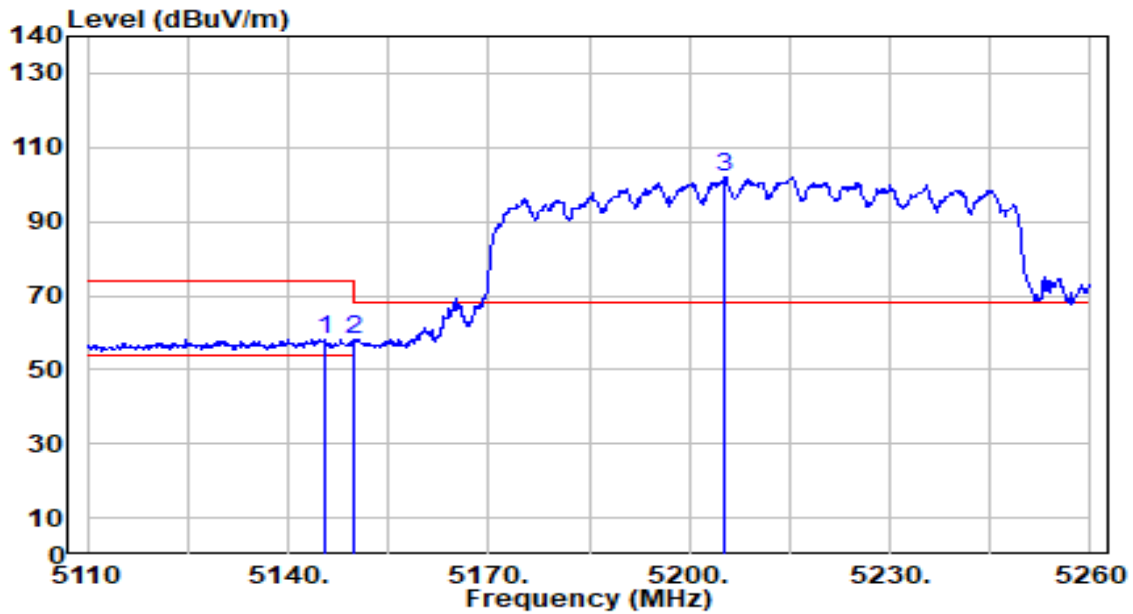


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.550	57.41	0.65	58.06	-15.94	74.00	318	197	Peak
2		5150.000	57.38	0.65	58.03	-15.97	74.00	318	197	Peak
3		5205.250	101.22	0.69	101.92	N/A	N/A	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

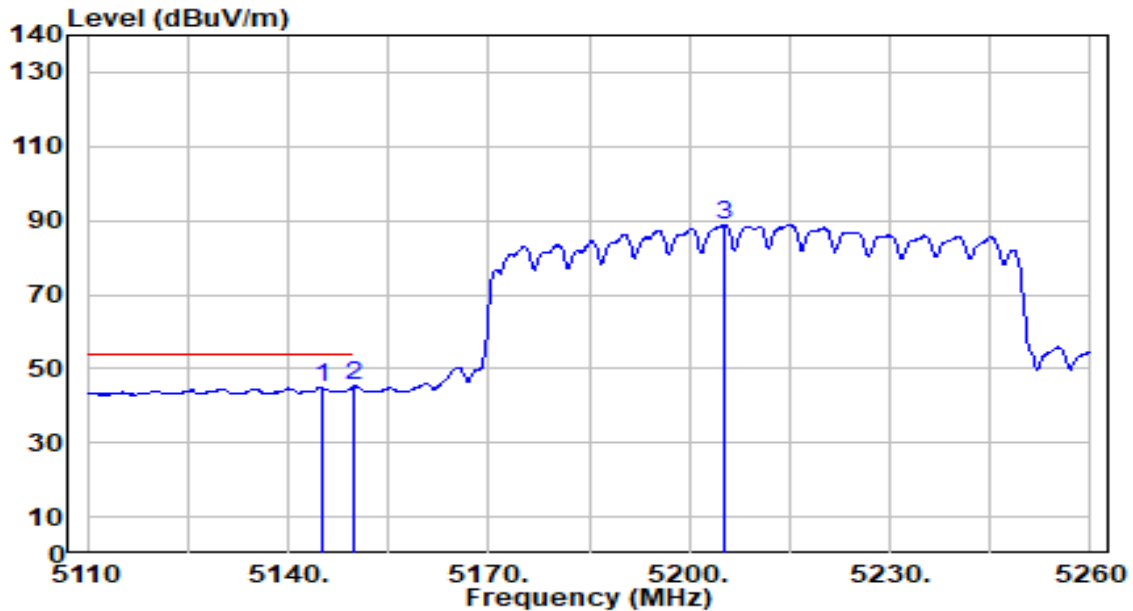


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.100	44.46	0.65	45.11	-8.89	54.00	318	197	Average
2	* 5150.000	44.60	0.65	45.26	-8.74	54.00	318	197	Average
3	5205.100	88.29	0.69	88.98	N/A	N/A	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

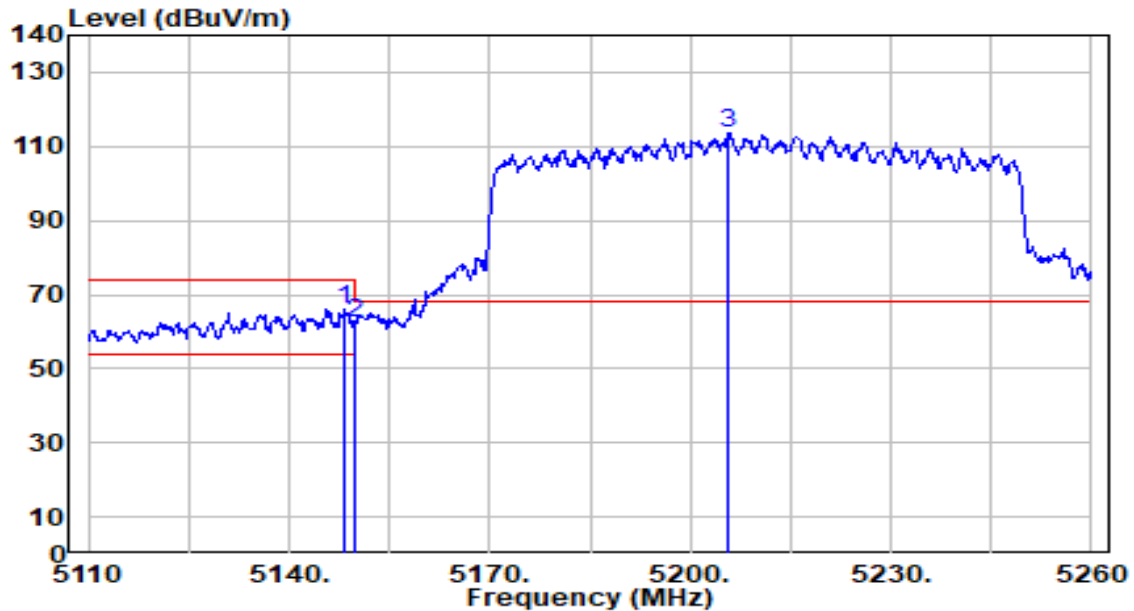


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.400	65.39	0.65	66.04	-7.96	74.00	200	290	Peak
2		5150.000	61.88	0.65	62.54	-11.46	74.00	200	290	Peak
3		5205.700	113.08	0.69	113.78	N/A	N/A	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

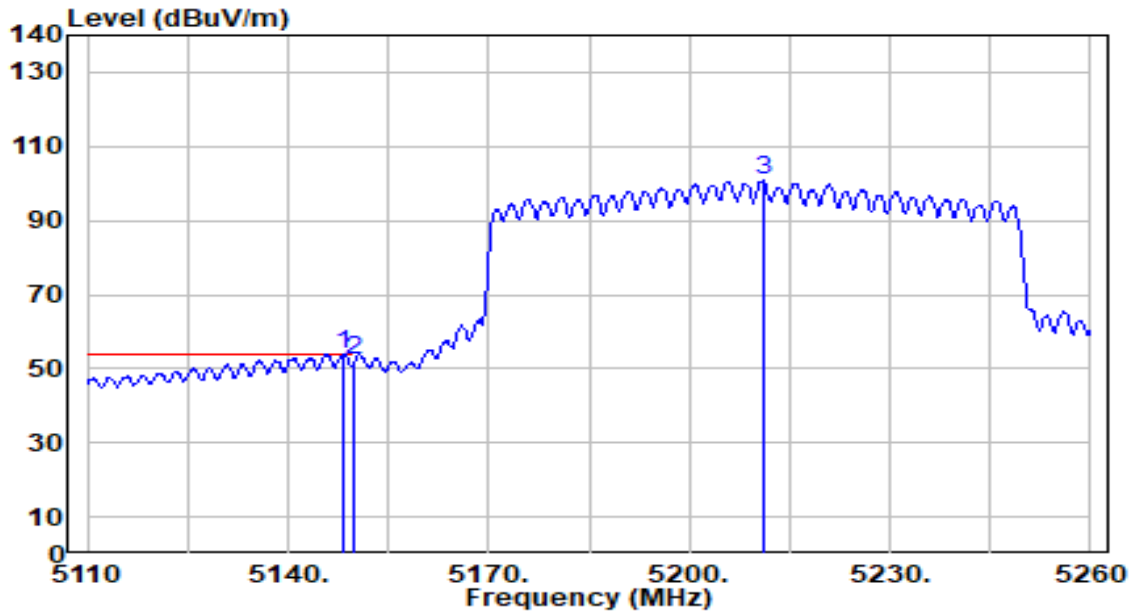


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.400	53.23	0.65	53.88	-0.12	54.00	200	290	Average
2		5150.000	51.79	0.65	52.45	-1.55	54.00	200	290	Average
3		5211.100	99.99	0.68	100.67	N/A	N/A	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

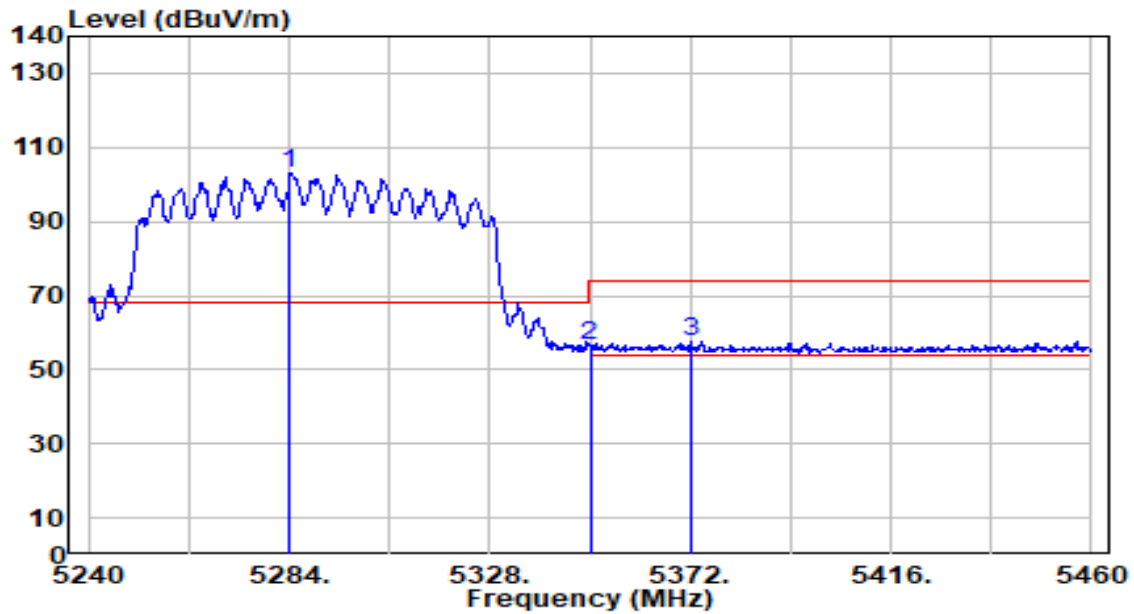


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5284.220	102.35	0.57	102.92	N/A	N/A	300	186	Peak
2	5350.000	56.14	0.47	56.61	-17.39	74.00	300	186	Peak
3	* 5372.000	57.16	0.44	57.60	-16.40	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

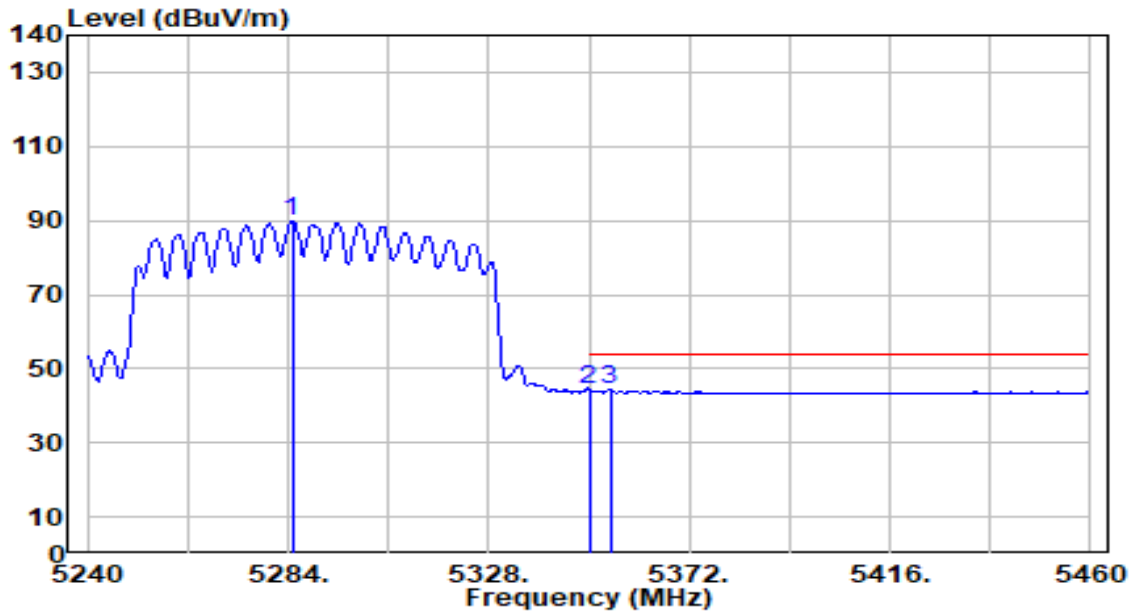


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5284.880	89.21	0.57	89.78	N/A	N/A	300	186	Average
2	* 5350.000	44.01	0.47	44.48	-9.52	54.00	300	186	Average
3	5354.620	43.73	0.46	44.19	-9.81	54.00	300	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

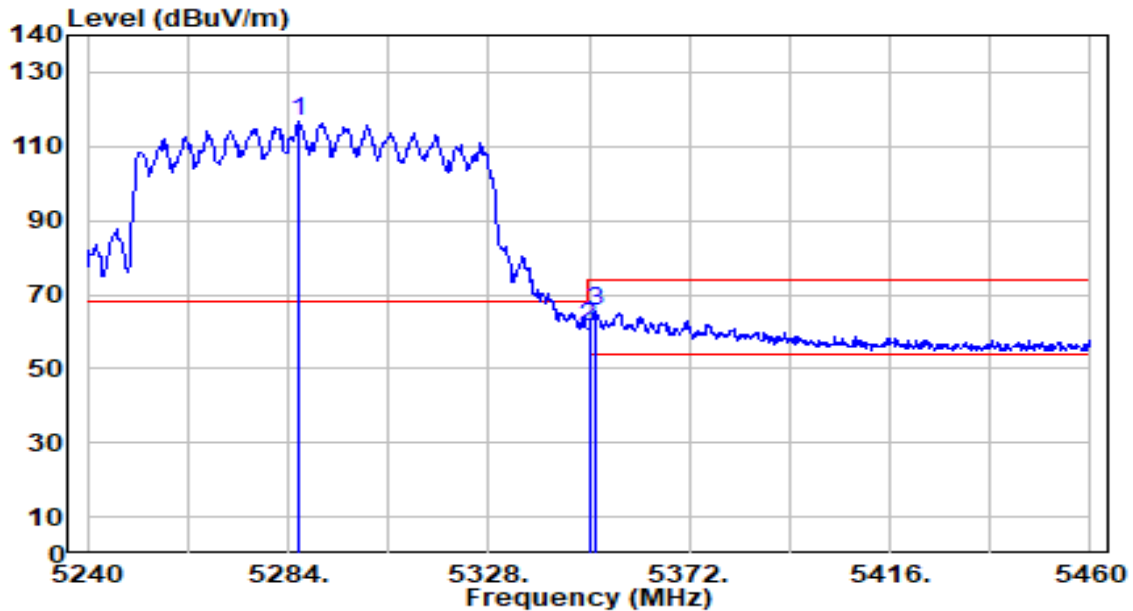


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.420	116.00	0.57	116.57	N/A	N/A	200	165	Peak
2	5350.000	61.07	0.47	61.54	-12.46	74.00	200	165	Peak
3	* 5351.320	65.24	0.47	65.71	-8.29	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

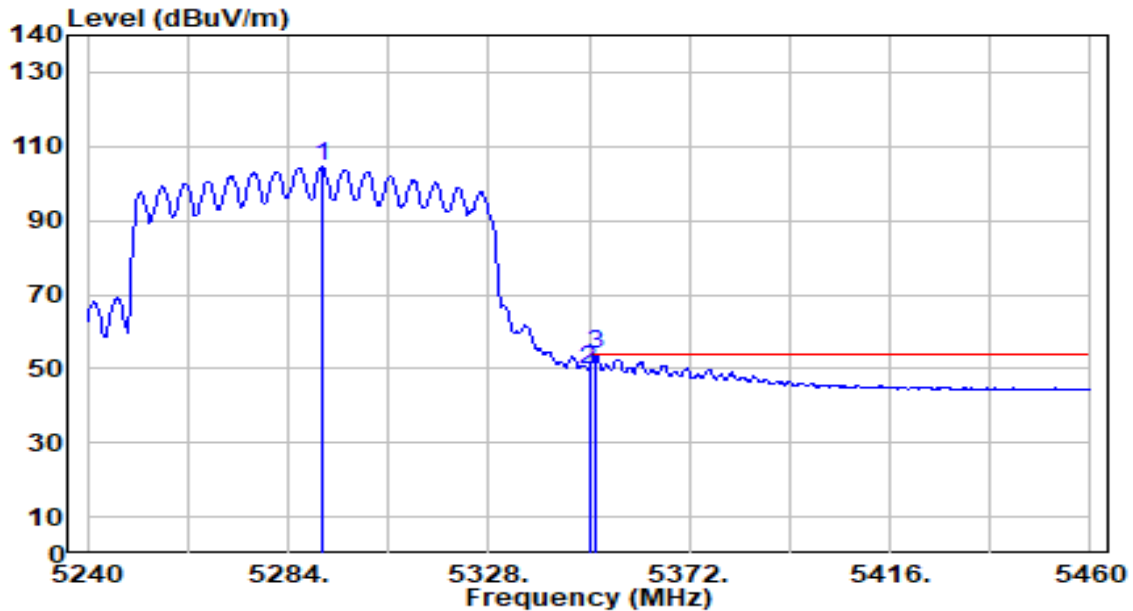


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.260	103.87	0.56	104.44	N/A	N/A	200	165	Average
2	5350.000	49.23	0.47	49.70	-4.30	54.00	200	165	Average
3	* 5351.320	53.31	0.47	53.78	-0.22	54.00	200	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

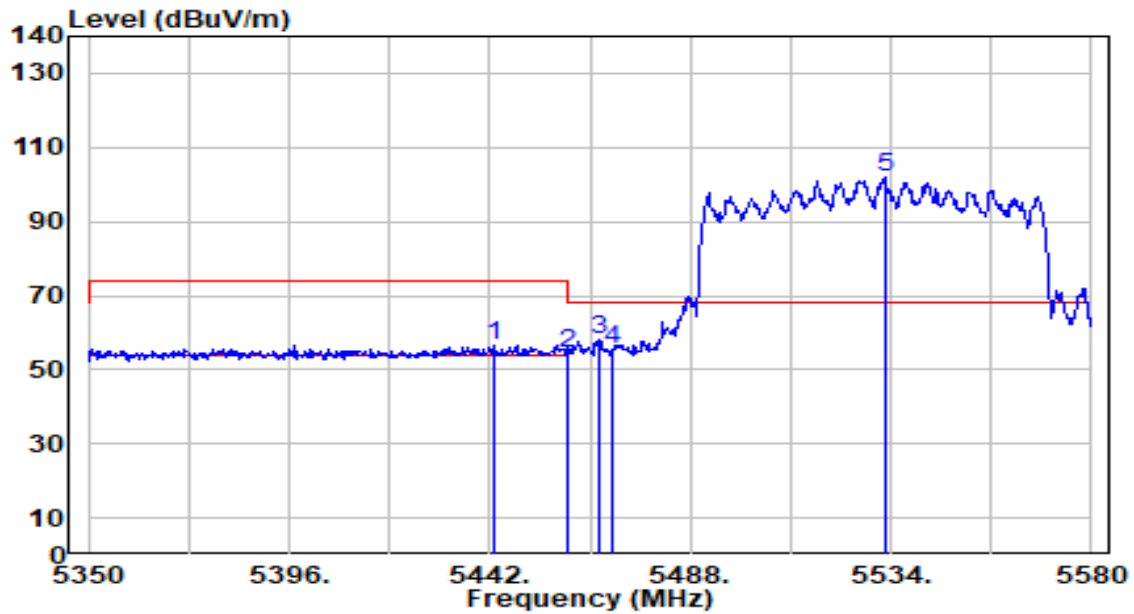


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5443.150	56.18	0.59	56.77	-17.23	74.00	248	186	Peak
2	5460.000	53.74	0.66	54.40	-19.60	74.00	248	186	Peak
3	* 5467.300	57.21	0.69	57.90	-10.30	68.20	248	186	Peak
4	5470.000	54.63	0.71	55.34	-12.86	68.20	248	186	Peak
5	5532.620	100.97	0.99	101.97	N/A	N/A	248	186	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

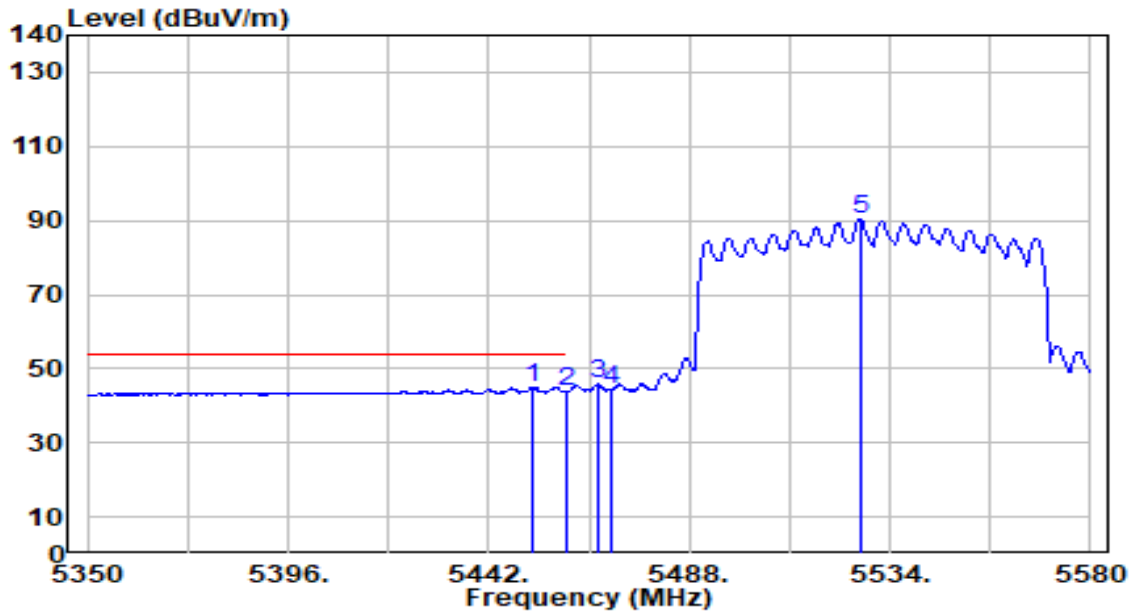


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.890	44.36	0.63	44.99	-9.01	54.00	248	186	Average
2		5460.000	43.32	0.66	43.99	-10.01	54.00	248	186	Average
3		5467.300	45.20	0.69	45.89	N/A	N/A	248	186	Average
4		5470.000	43.65	0.71	44.36	N/A	N/A	248	186	Average
5		5527.100	89.35	0.97	90.31	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

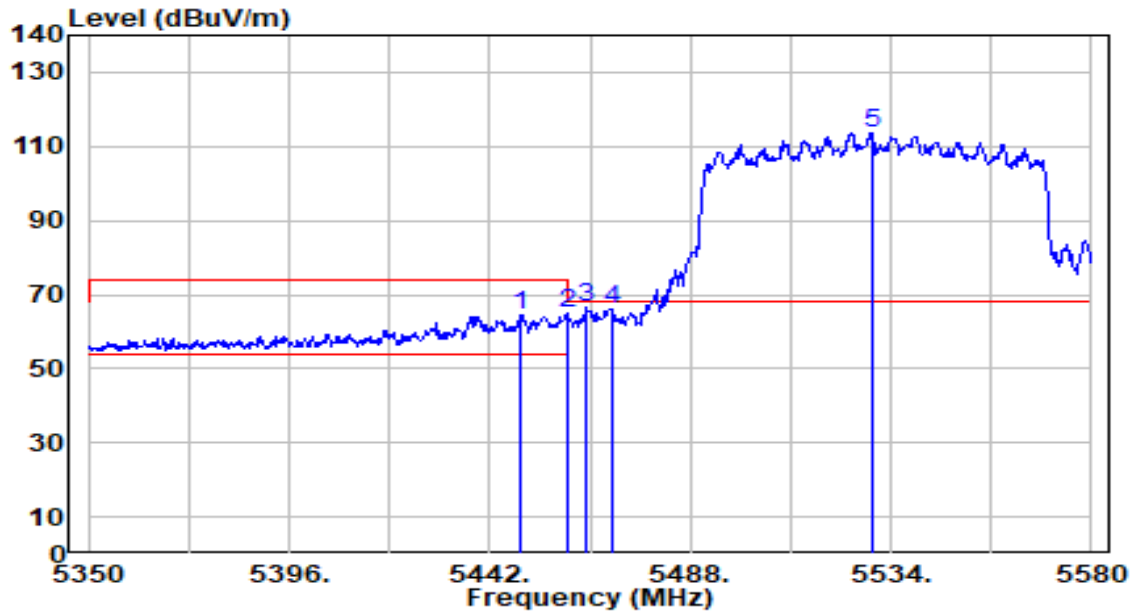


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5449.130	63.92	0.61	64.53	-9.47	74.00	184	192	Peak
2	5460.000	64.49	0.66	65.15	-8.85	74.00	184	192	Peak
3	* 5464.310	65.68	0.68	66.36	-1.84	68.20	184	192	Peak
4	5470.000	65.53	0.71	66.23	-1.97	68.20	184	192	Peak
5	5529.630	112.77	0.98	113.75	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

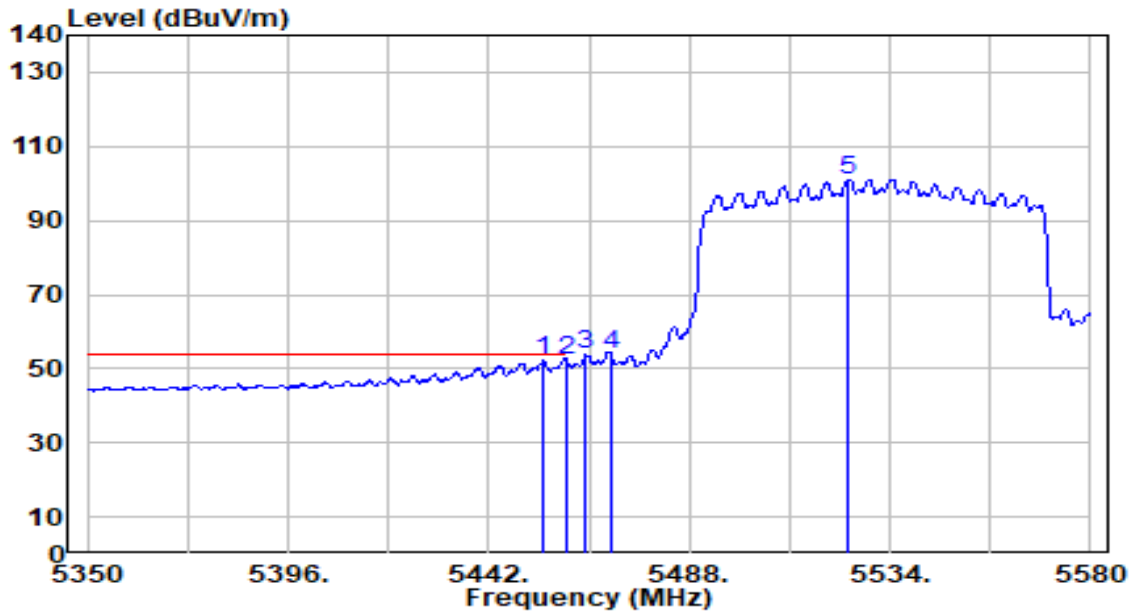


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5454.650	51.65	0.64	52.29	-1.71	54.00	184	192	Average
2	*	5460.000	51.81	0.66	52.47	-1.53	54.00	184	192	Average
3		5464.310	53.00	0.68	53.68	N/A	N/A	184	192	Average
4		5470.000	53.09	0.71	53.80	N/A	N/A	184	192	Average
5		5524.340	100.21	0.95	101.17	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

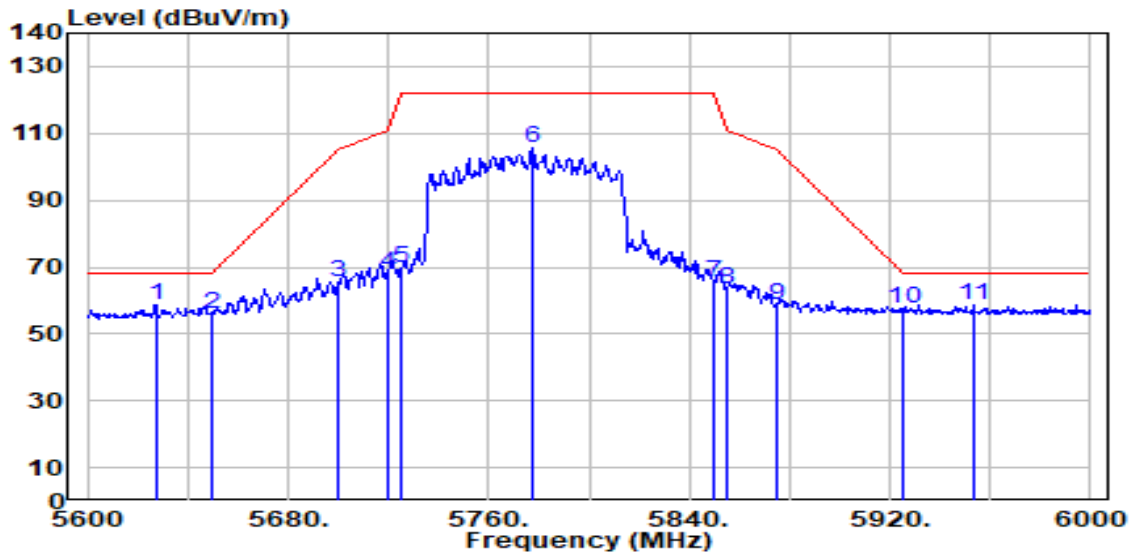


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5627.200	57.31	1.44	58.75	-9.45	68.20	183	168	Peak
2		5650.000	54.58	1.54	56.12	-12.08	68.20	183	168	Peak
3		5700.000	63.71	1.78	65.48	-39.72	105.20	183	168	Peak
4		5720.000	66.51	1.87	68.38	-42.42	110.80	183	168	Peak
5		5725.000	68.10	1.89	69.99	-52.21	122.20	183	168	Peak
6		5777.600	103.55	2.14	105.69	N/A	N/A	183	168	Peak
7		5850.000	63.00	2.25	65.25	-56.95	122.20	183	168	Peak
8		5855.000	61.02	2.25	63.28	-47.52	110.80	183	168	Peak
9		5875.000	56.18	2.26	58.44	-46.76	105.20	183	168	Peak
10		5925.000	55.37	2.27	57.63	-10.57	68.20	183	168	Peak
11		5953.200	56.46	2.27	58.73	-9.47	68.20	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

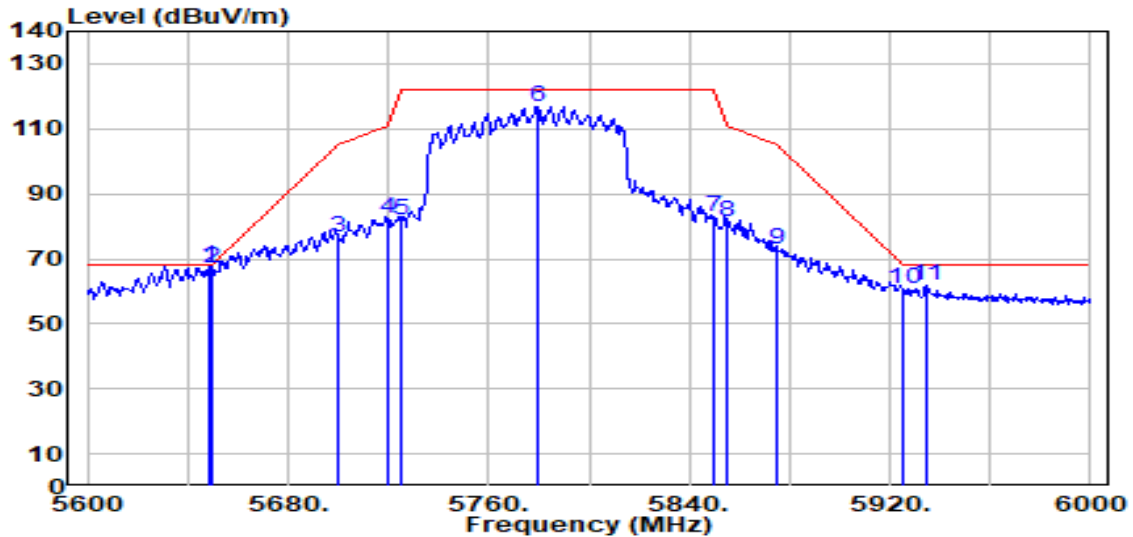


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.800	66.29	1.54	67.83	-0.37	68.20	181	156	Peak
2		5650.000	65.44	1.54	66.99	-1.21	68.20	181	156	Peak
3		5700.000	74.91	1.78	76.68	-28.52	105.20	181	156	Peak
4		5720.000	80.37	1.87	82.24	-28.56	110.80	181	156	Peak
5		5725.000	79.98	1.89	81.88	-40.32	122.20	181	156	Peak
6		5779.600	114.87	2.15	117.02	N/A	N/A	181	156	Peak
7		5850.000	80.90	2.25	83.16	-39.04	122.20	181	156	Peak
8		5855.000	78.99	2.25	81.25	-29.55	110.80	181	156	Peak
9		5875.000	70.58	2.26	72.83	-32.37	105.20	181	156	Peak
10		5925.000	58.65	2.27	60.92	-7.28	68.20	181	156	Peak
11		5934.400	59.46	2.27	61.73	-6.47	68.20	181	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

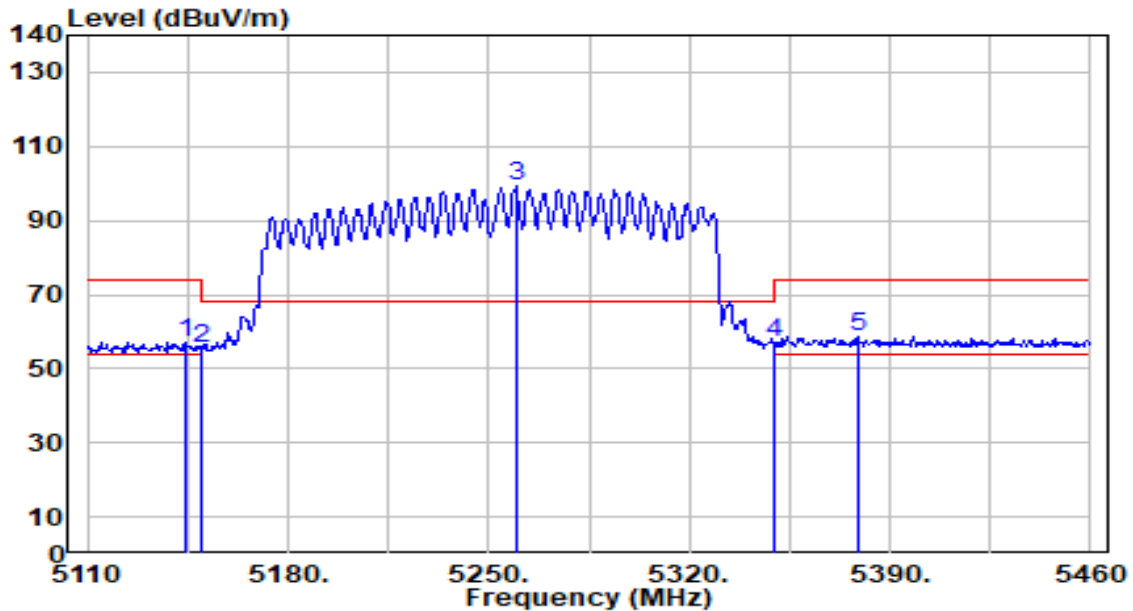


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5144.300	56.37	0.65	57.02	-16.98	74.00	318	197	Peak
2	5150.000	54.98	0.65	55.63	-18.37	74.00	318	197	Peak
3	5259.450	98.47	0.61	99.08	N/A	N/A	318	197	Peak
4	5350.000	56.74	0.47	57.22	-16.78	74.00	318	197	Peak
5	* 5378.800	58.45	0.43	58.87	-15.13	74.00	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

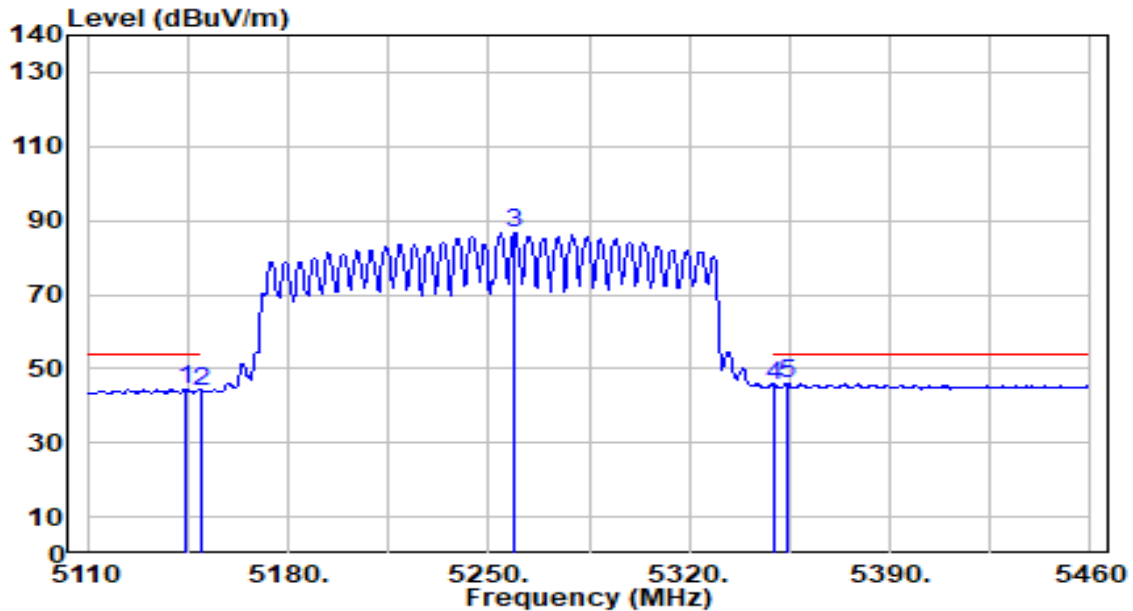


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5144.300	43.92	0.65	44.57	-9.43	54.00	318	197	Average
2		5150.000	43.45	0.65	44.11	-9.89	54.00	318	197	Average
3		5259.100	85.86	0.61	86.47	N/A	N/A	318	197	Average
4		5350.000	44.95	0.47	45.42	-8.58	54.00	318	197	Average
5	*	5354.300	45.75	0.46	46.22	-7.78	54.00	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

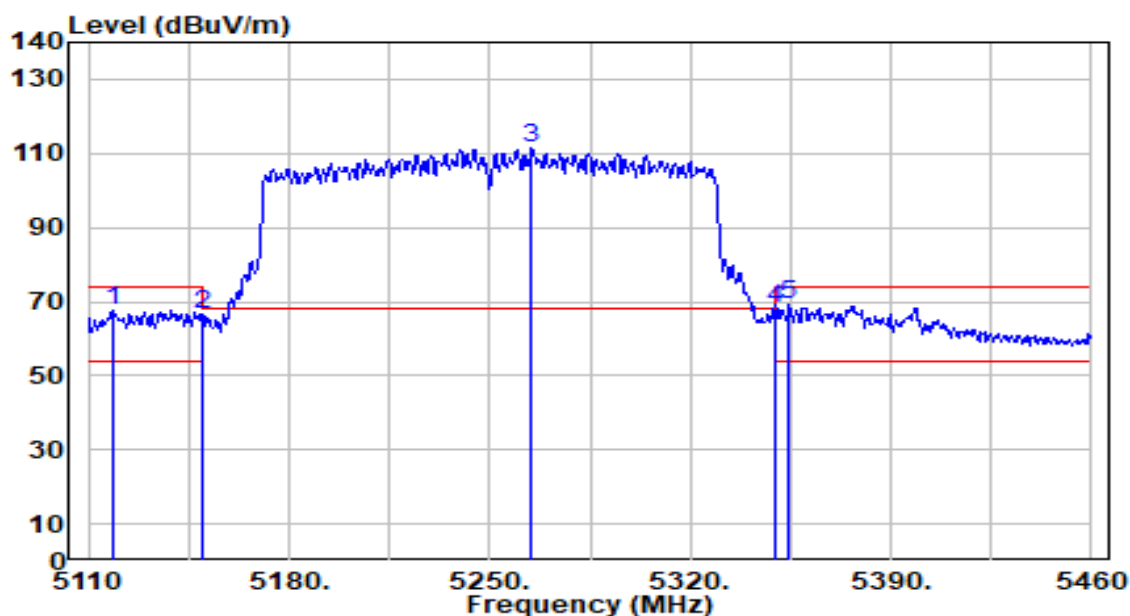


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5118.400	67.18	0.62	67.80	-6.20	74.00	200	290	Peak
2	5150.000	65.73	0.65	66.39	-7.61	74.00	200	290	Peak
3	5264.700	110.88	0.60	111.48	N/A	N/A	200	290	Peak
4	5350.000	67.93	0.47	68.40	-5.60	74.00	200	290	Peak
5	* 5354.650	68.62	0.46	69.09	-4.91	74.00	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

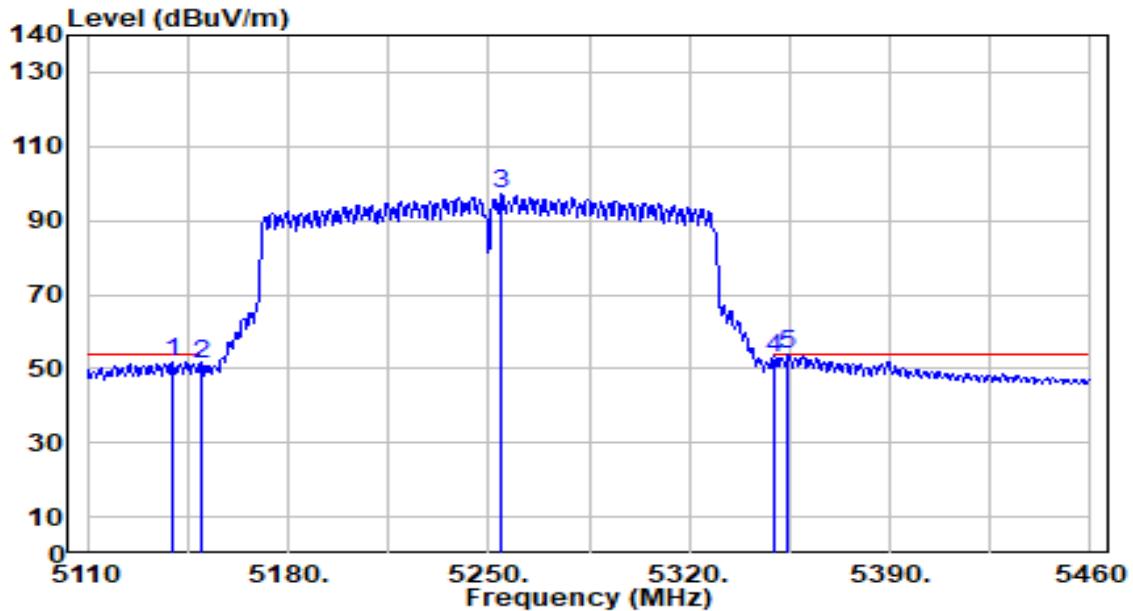


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5139.400	51.20	0.64	51.84	-2.16	54.00	200	290	Average
2		5150.000	50.81	0.65	51.46	-2.54	54.00	200	290	Average
3		5254.550	96.37	0.62	96.99	N/A	N/A	200	290	Average
4		5350.000	52.60	0.47	53.07	-0.93	54.00	200	290	Average
5	*	5354.650	53.43	0.46	53.90	-0.10	54.00	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

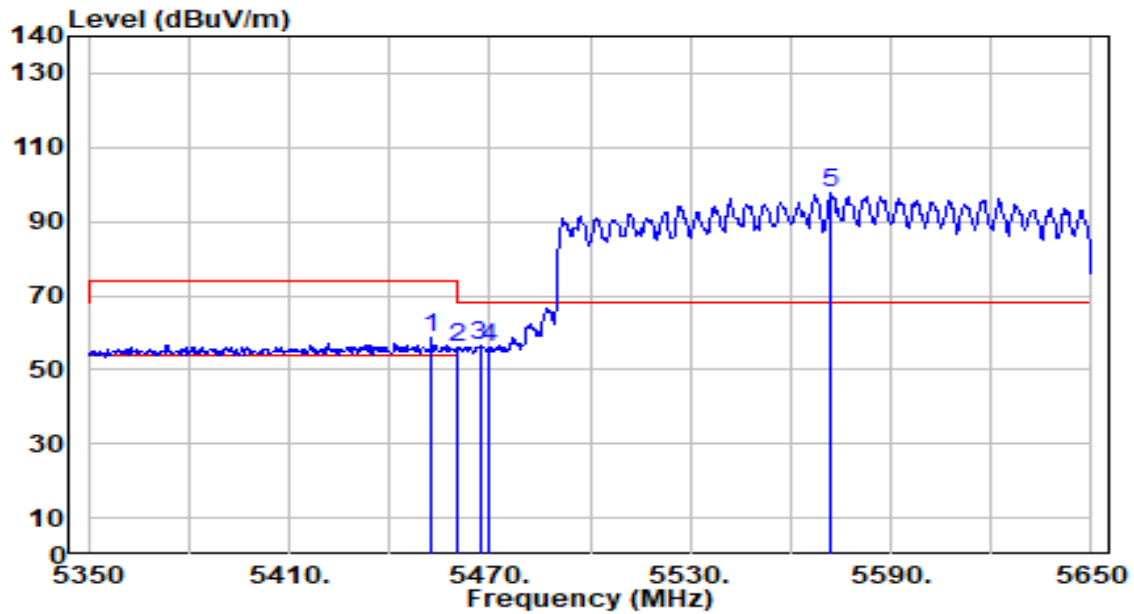


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.600	57.85	0.63	58.48	-15.52	74.00	248	186	Peak
2	5460.000	55.54	0.66	56.20	-17.80	74.00	248	186	Peak
3	* 5467.000	55.99	0.69	56.68	-11.52	68.20	248	186	Peak
4	5470.000	55.20	0.71	55.90	-12.30	68.20	248	186	Peak
5	5572.300	96.33	1.18	97.51	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

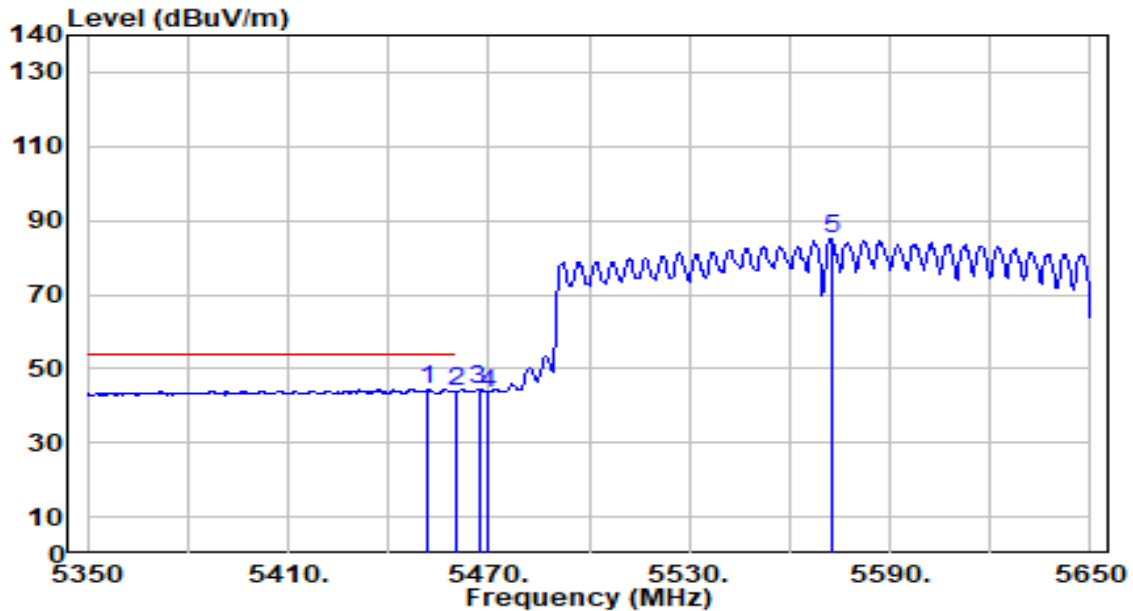


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.700	43.83	0.62	44.46	-9.54	54.00	248	186	Average
2		5460.000	42.96	0.66	43.63	-10.37	54.00	248	186	Average
3		5467.000	43.95	0.69	44.64	N/A	N/A	248	186	Average
4		5470.000	42.86	0.71	43.57	N/A	N/A	248	186	Average
5		5572.600	84.00	1.18	85.18	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

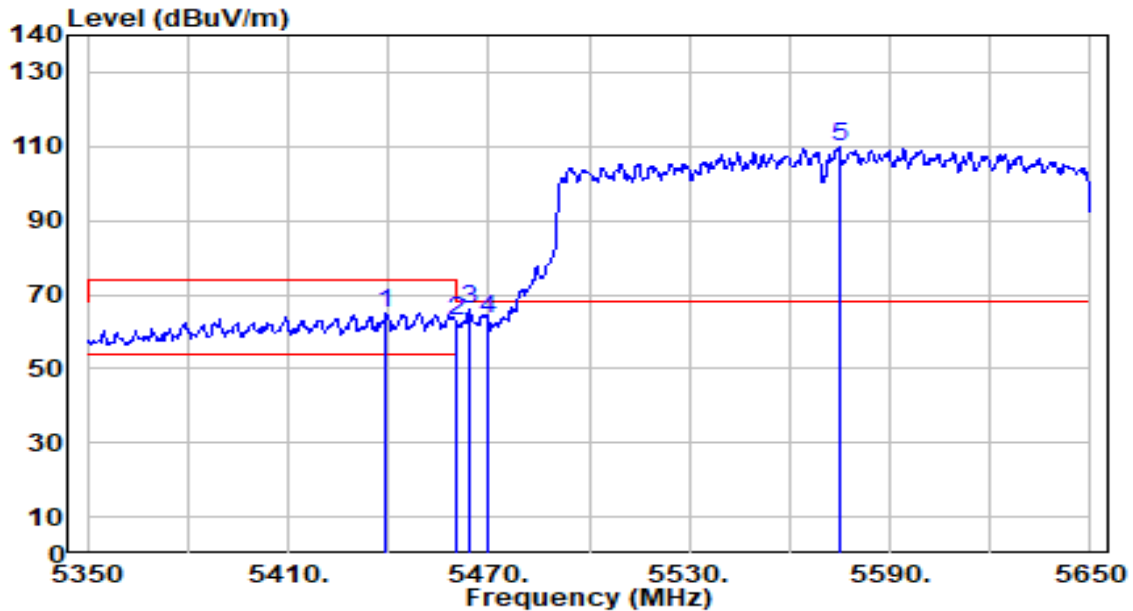


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5439.400	64.45	0.57	65.02	-8.98	74.00	184	192	Peak
2	5460.000	62.24	0.66	62.90	-11.10	74.00	184	192	Peak
3	* 5464.300	65.53	0.68	66.22	-1.98	68.20	184	192	Peak
4	5470.000	62.93	0.71	63.63	-4.57	68.20	184	192	Peak
5	5574.700	108.87	1.19	110.06	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

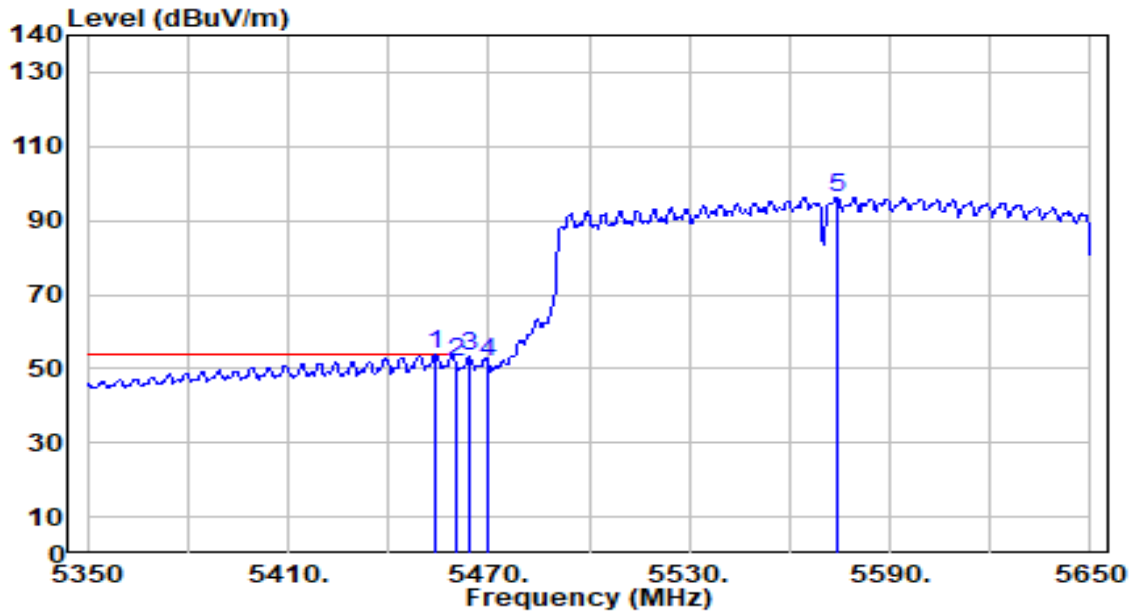


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.100	53.20	0.64	53.83	-0.17	54.00	184	192	Average
2		5460.000	51.18	0.66	51.85	-2.15	54.00	184	192	Average
3		5464.300	52.46	0.68	53.14	N/A	N/A	184	192	Average
4		5470.000	51.01	0.71	51.71	N/A	N/A	184	192	Average
5		5574.100	95.07	1.19	96.26	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

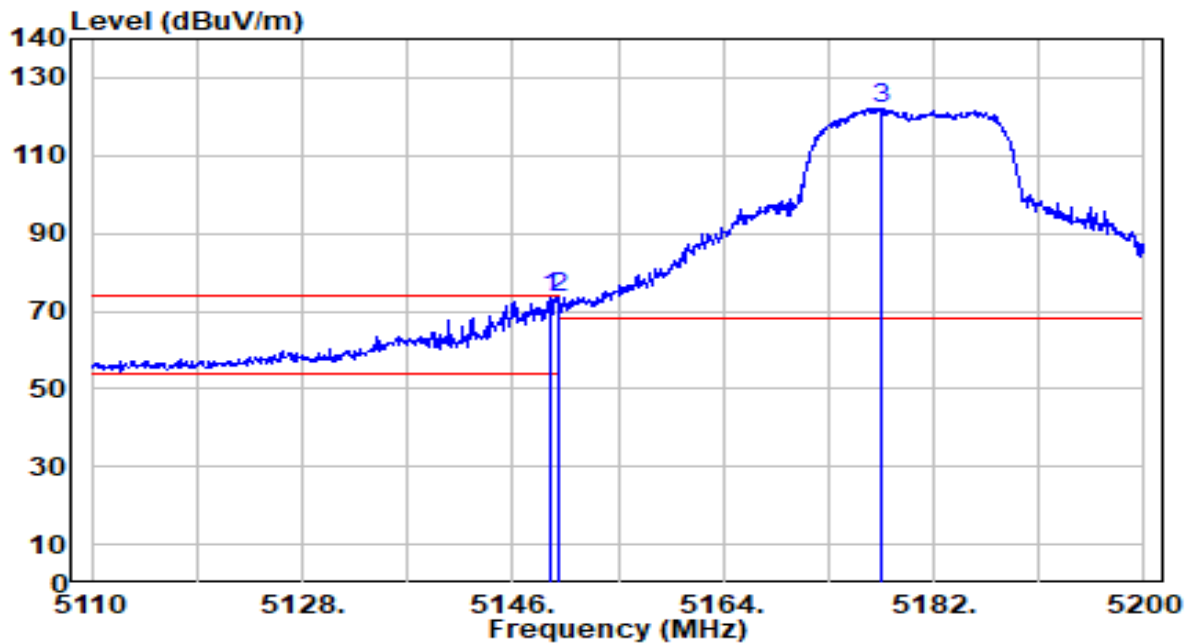


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	72.81	0.65	73.46	-0.54	74.00	205	194	Peak
2		5150.000	72.69	0.65	73.35	-0.65	74.00	205	194	Peak
3		5177.590	121.57	0.68	122.25	N/A	N/A	205	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

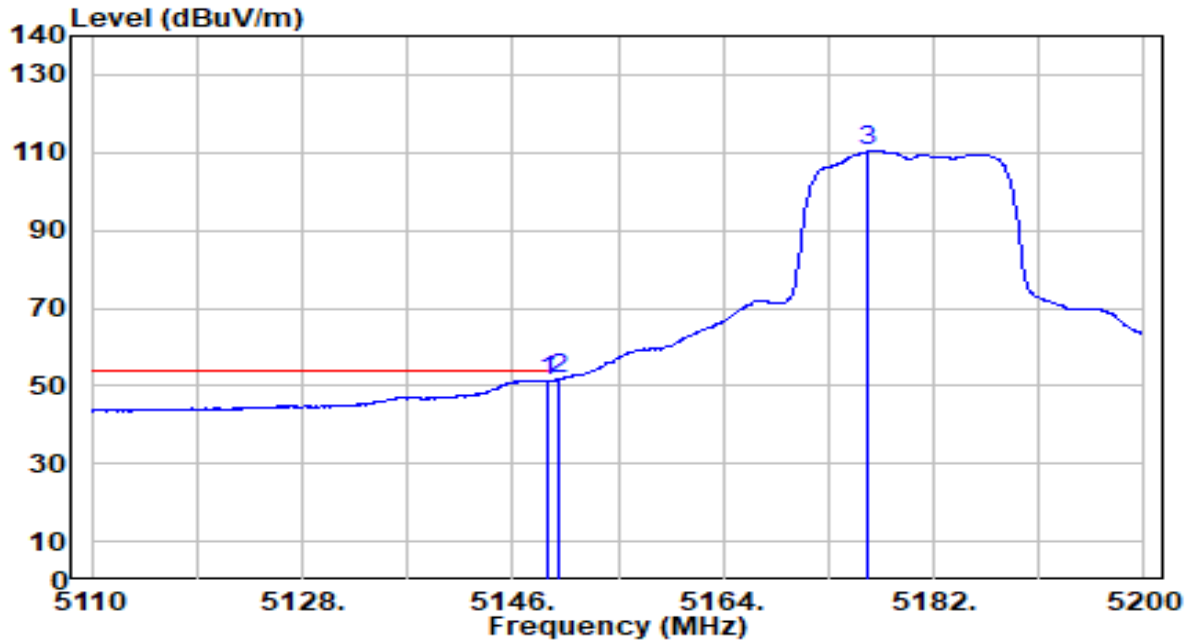


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.970	50.70	0.65	51.35	-2.65	54.00	205	194	Average
2	*	5150.000	50.95	0.65	51.61	-2.39	54.00	205	194	Average
3		5176.420	109.79	0.68	110.47	N/A	N/A	205	194	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

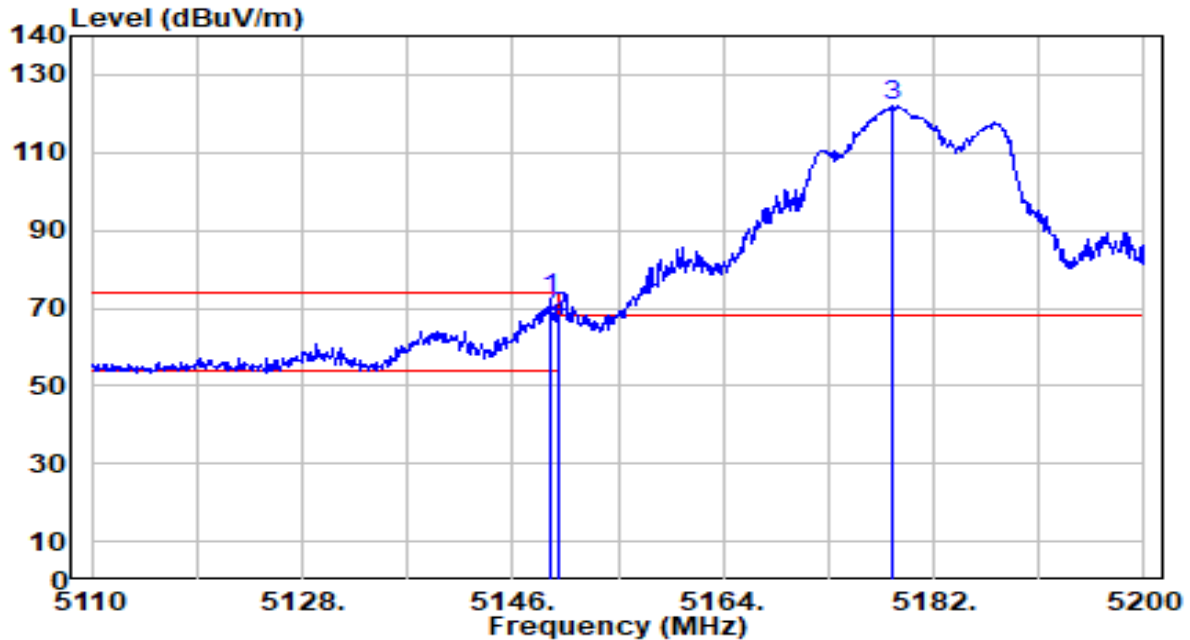


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	71.72	0.65	72.37	-1.63	74.00	200	292	Peak
2		5150.000	66.88	0.65	67.53	-6.47	74.00	200	292	Peak
3		5178.490	121.12	0.68	121.80	N/A	N/A	200	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

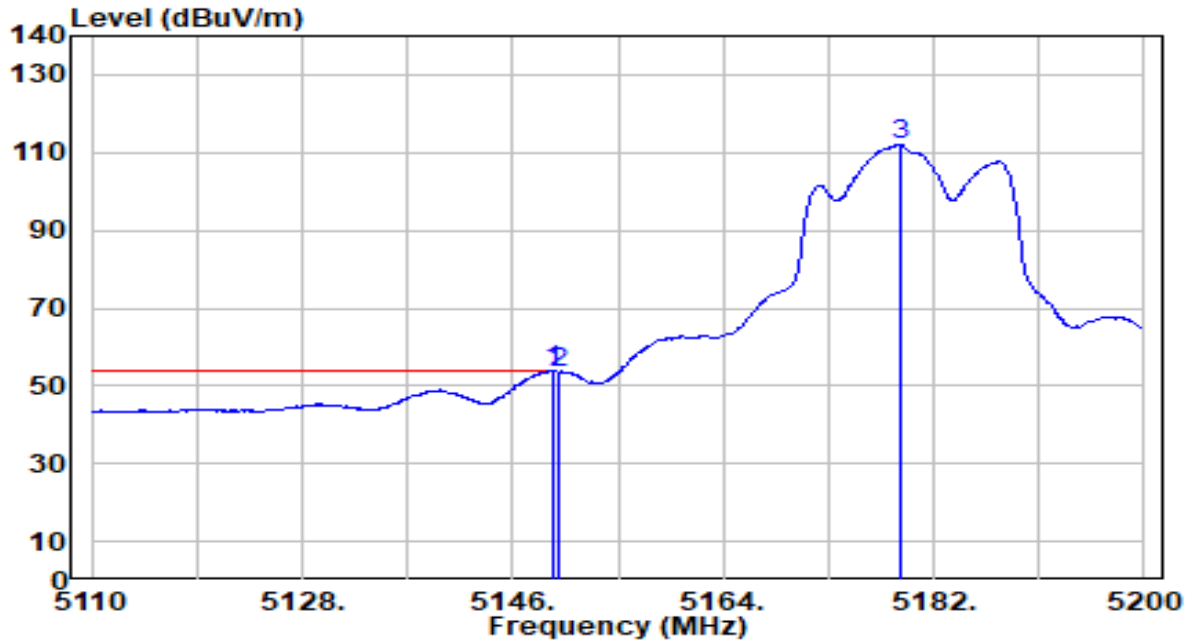


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	53.19	0.65	53.84	-0.16	54.00	200	292	Average
2		5150.000	52.92	0.65	53.58	-0.42	54.00	200	292	Average
3		5179.120	111.37	0.68	112.05	N/A	N/A	200	292	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

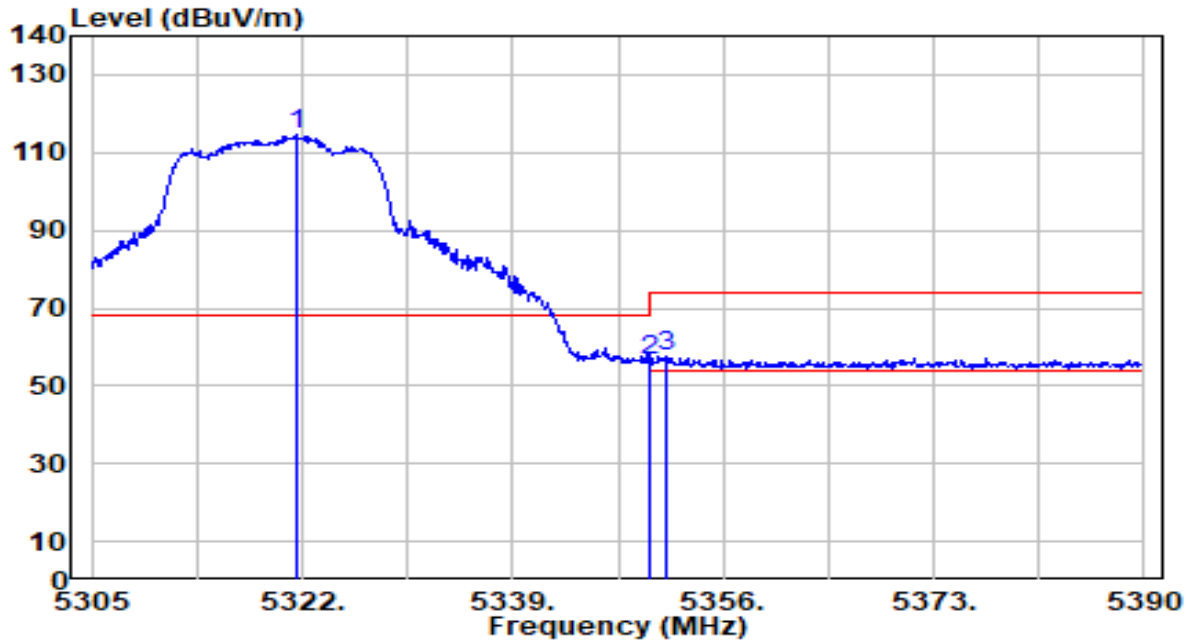


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.660	114.28	0.51	114.79	N/A	N/A	172	189	Peak
2	5350.000	56.29	0.47	56.77	-17.23	74.00	172	189	Peak
3	* 5351.325	57.21	0.47	57.68	-16.32	74.00	172	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

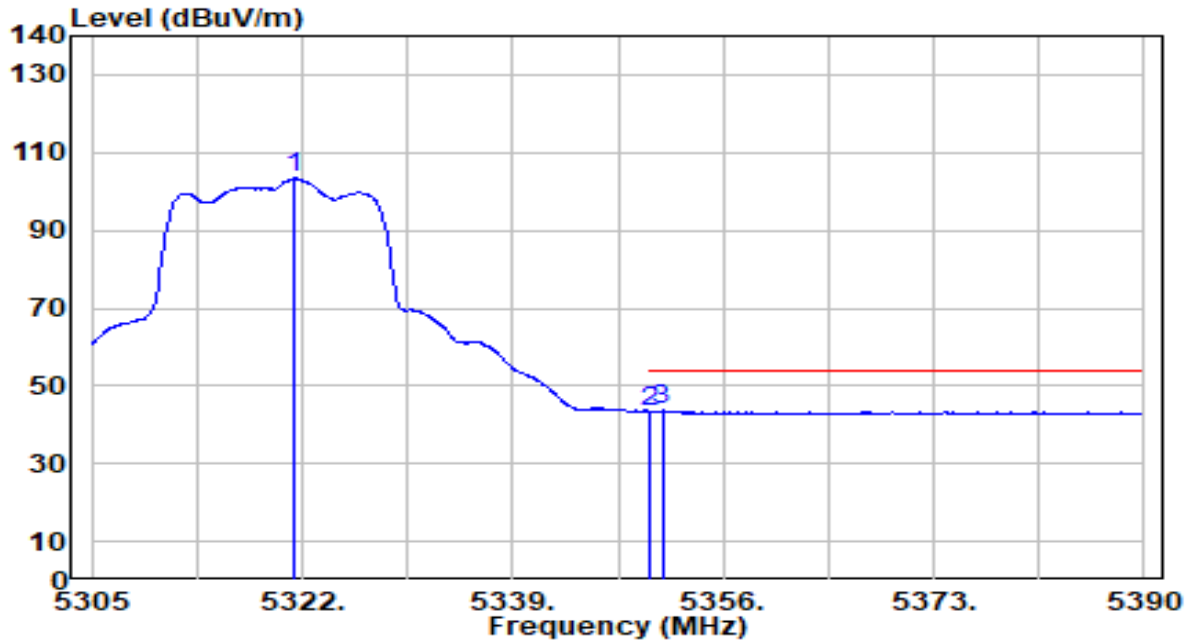


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.405	102.86	0.52	103.38	N/A	N/A	172	189	Average
2	5350.000	42.94	0.47	43.41	-10.59	54.00	172	189	Average
3	* 5351.070	43.18	0.47	43.65	-10.35	54.00	172	189	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

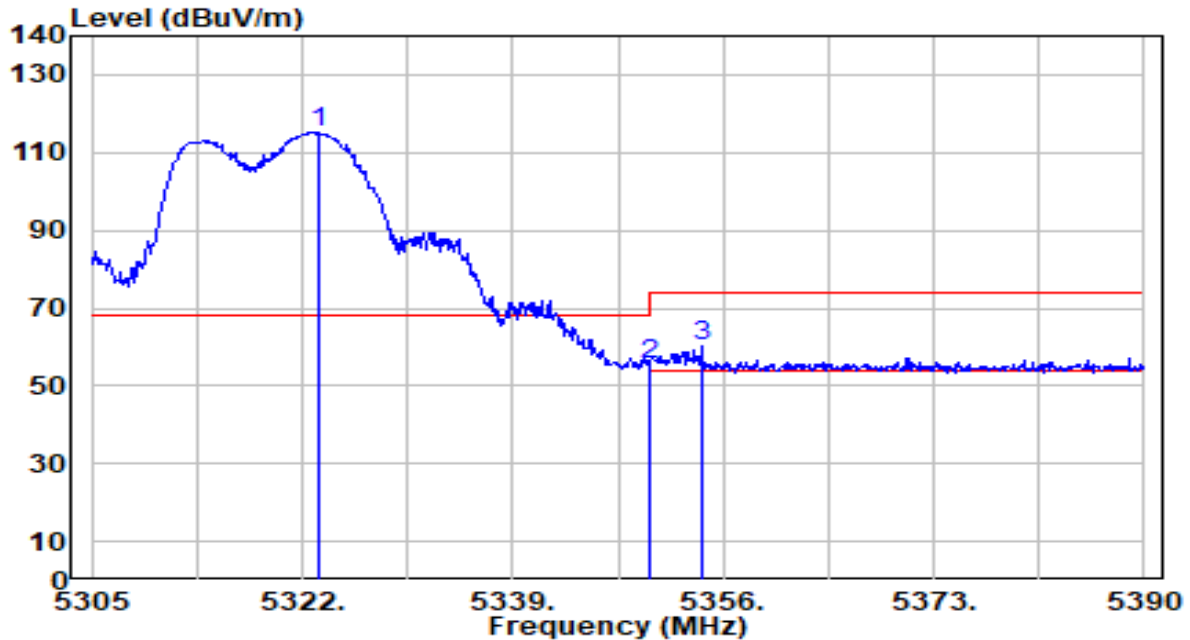


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.360	114.67	0.51	115.19	N/A	N/A	176	291	Peak
2	5350.000	55.08	0.47	55.55	-18.45	74.00	176	291	Peak
3	* 5354.215	59.71	0.46	60.17	-13.83	74.00	176	291	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

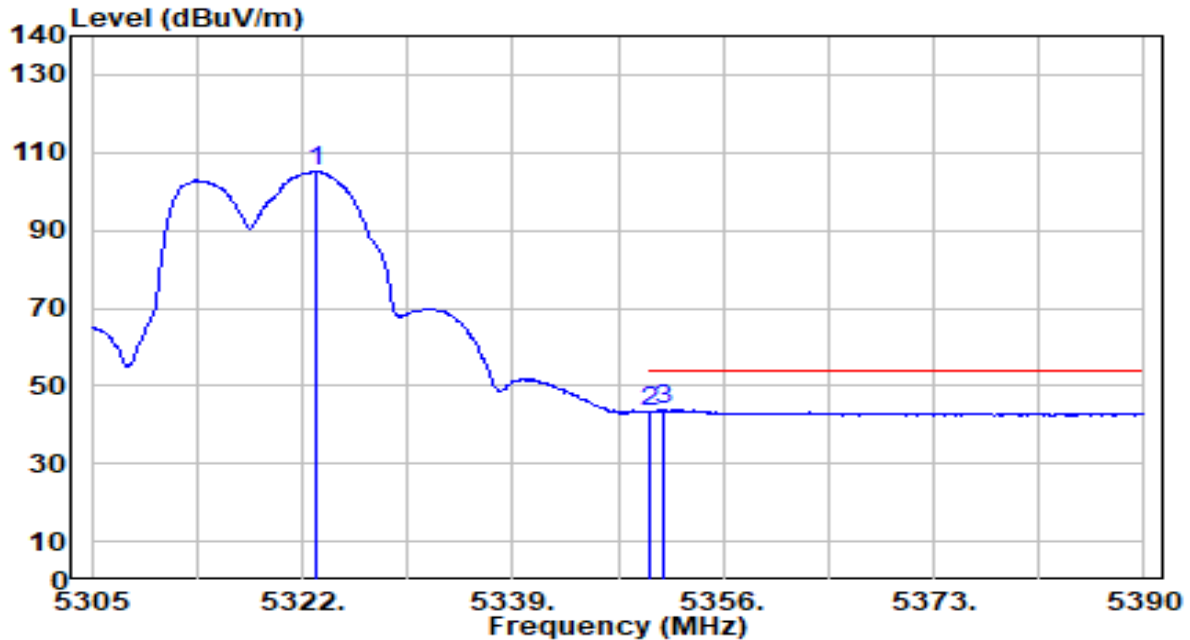


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.020	104.55	0.51	105.06	N/A	N/A	176	291	Average
2	5350.000	42.71	0.47	43.18	-10.82	54.00	176	291	Average
3	* 5351.155	43.24	0.47	43.71	-10.29	54.00	176	291	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

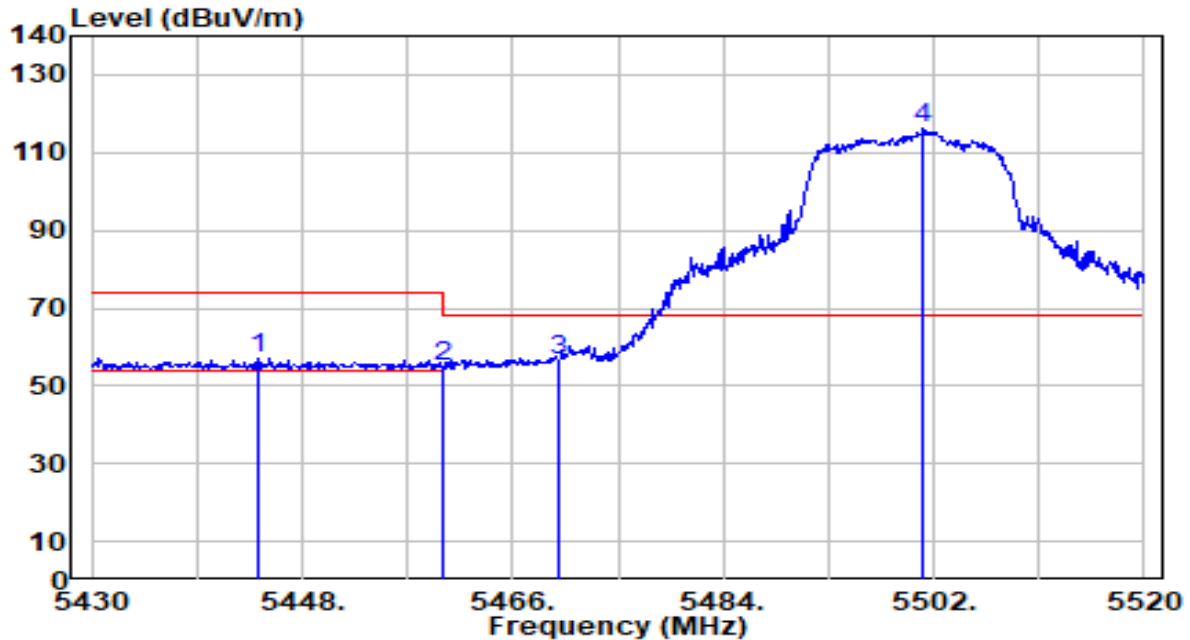


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.130	56.45	0.59	57.04	-16.96	74.00	163	185	Peak
2	5460.000	54.16	0.66	54.82	-19.18	74.00	163	185	Peak
3	* 5470.000	55.98	0.71	56.69	-11.51	68.20	163	185	Peak
4	5501.100	115.15	0.85	116.00	N/A	N/A	163	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

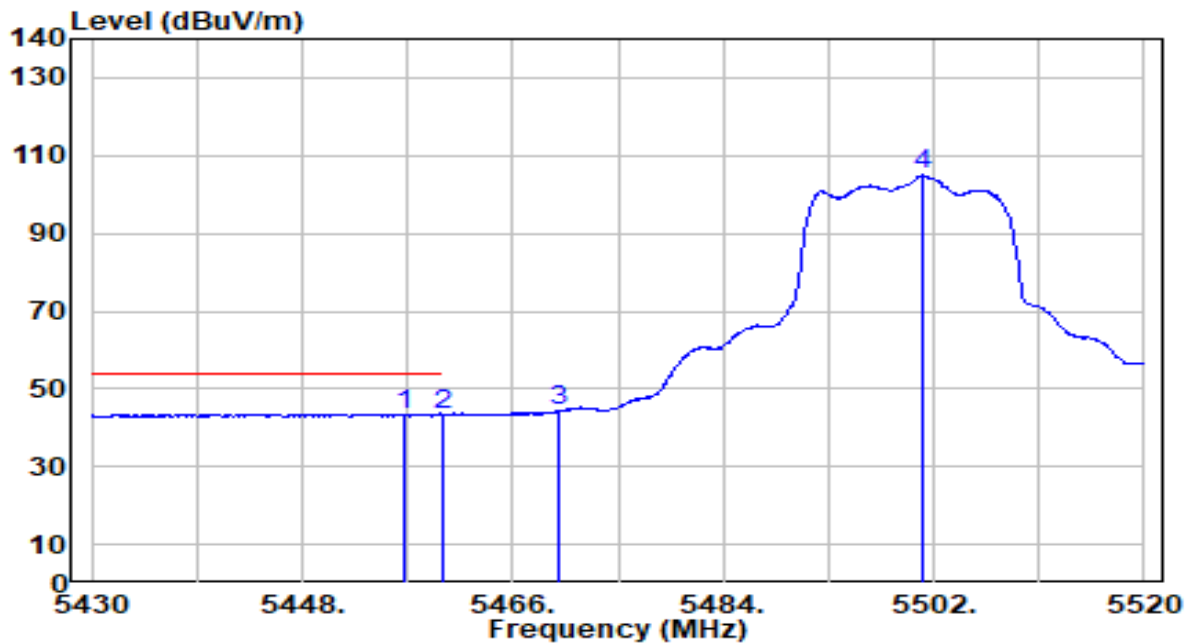


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.730	42.88	0.65	43.52	-10.48	54.00	163	185	Average
2		5460.000	42.52	0.66	43.18	-10.82	54.00	163	185	Average
3		5470.000	43.65	0.71	44.35	N/A	N/A	163	185	Average
4		5501.100	104.03	0.85	104.88	N/A	N/A	163	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

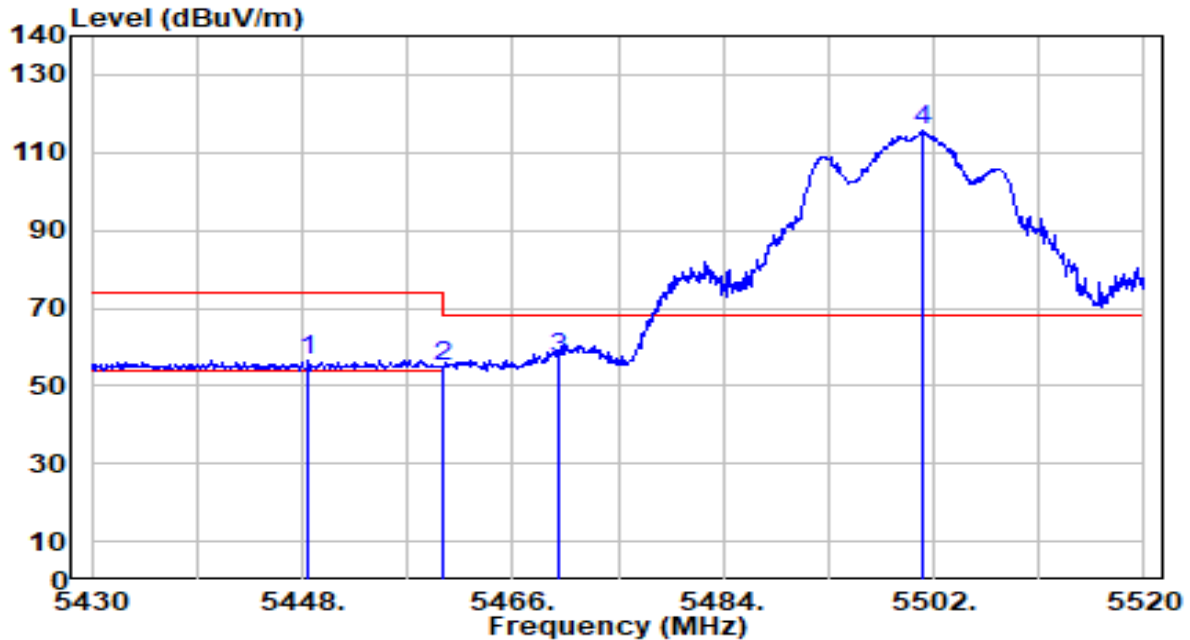


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.540	56.01	0.61	56.62	-17.38	74.00	169	316	Peak
2	5460.000	54.55	0.66	55.21	-18.79	74.00	169	316	Peak
3	* 5470.000	56.44	0.71	57.15	-11.05	68.20	169	316	Peak
4	5501.100	114.68	0.85	115.52	N/A	N/A	169	316	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

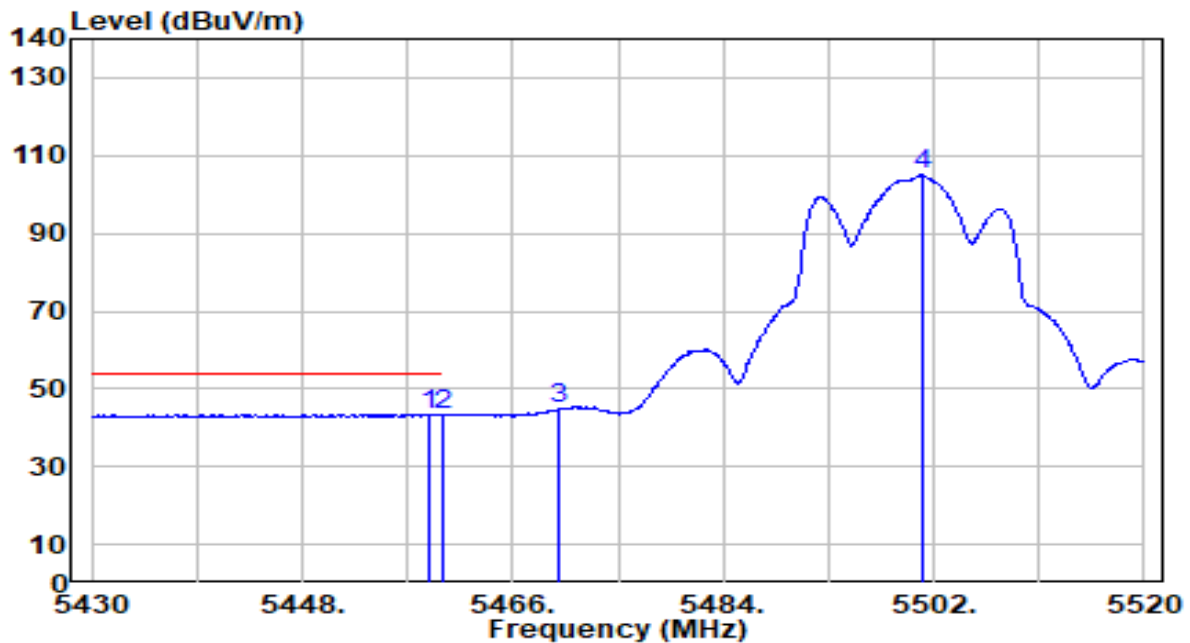


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.890	42.68	0.66	43.34	-10.66	54.00	169	316	Average
2	*	5460.000	42.68	0.66	43.34	-10.66	54.00	169	316	Average
3		5470.000	44.05	0.71	44.76	N/A	N/A	169	316	Average
4		5501.010	104.10	0.84	104.95	N/A	N/A	169	316	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

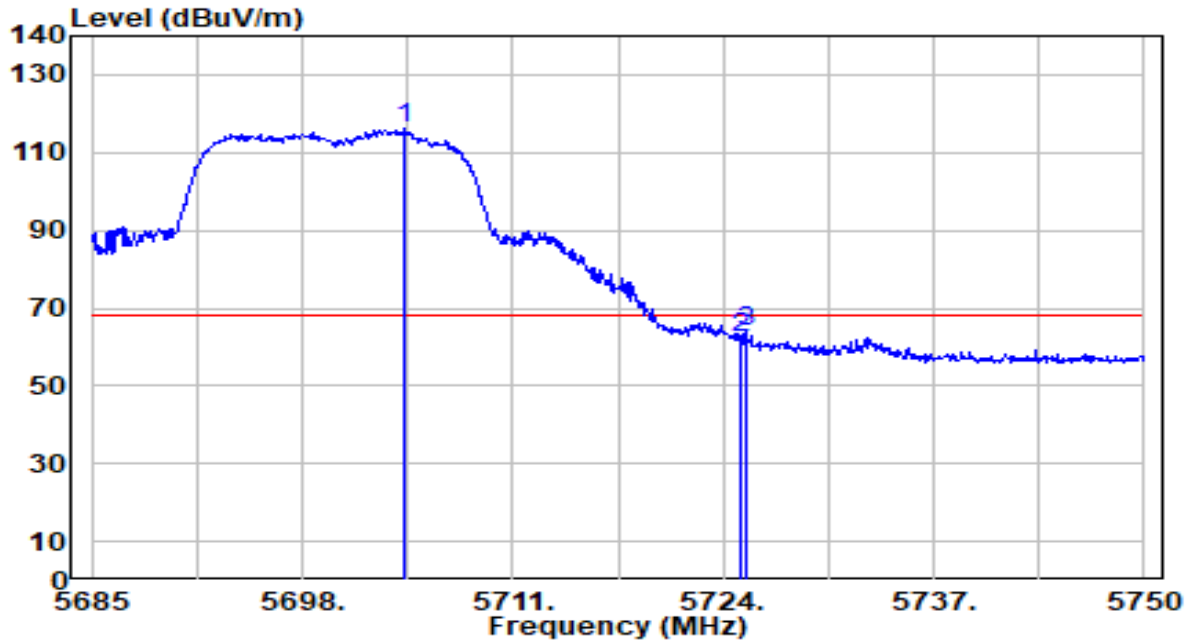


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5704.370	114.21	1.80	116.00	N/A	N/A	179	171	Peak
2	5725.000	60.69	1.89	62.59	-5.61	68.20	179	171	Peak
3	* 5725.365	62.18	1.89	64.07	-4.13	68.20	179	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

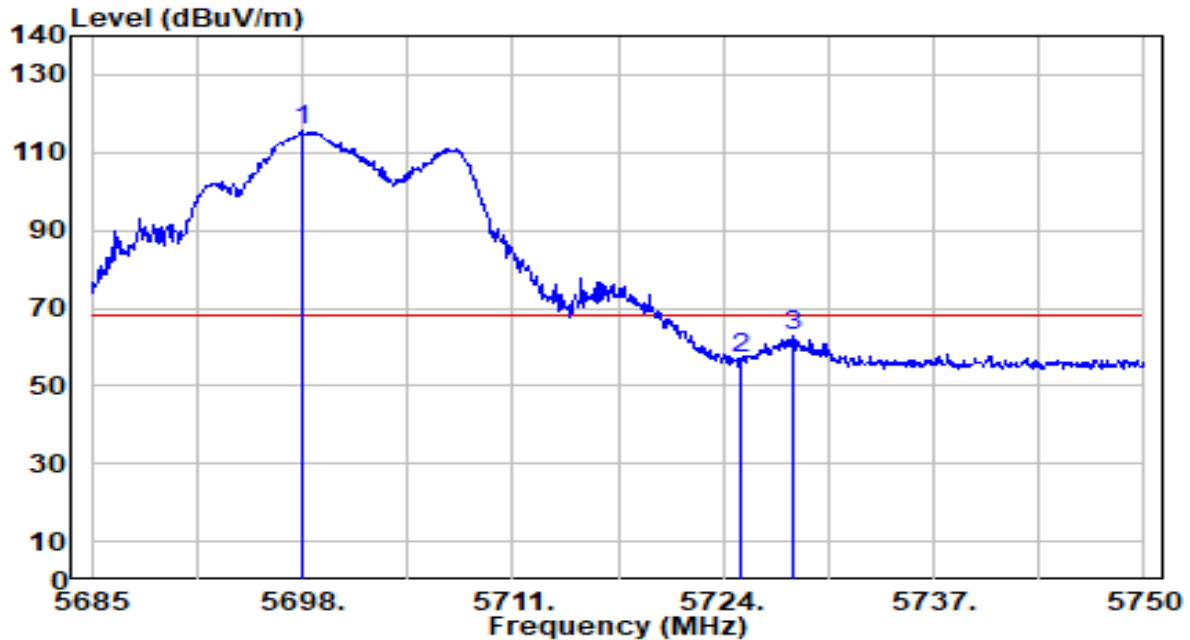


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.065	113.67	1.77	115.44	N/A	N/A	194	312	Peak
2	5725.000	55.06	1.89	56.96	-11.24	68.20	194	312	Peak
3	* 5728.355	60.77	1.91	62.68	-5.52	68.20	194	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

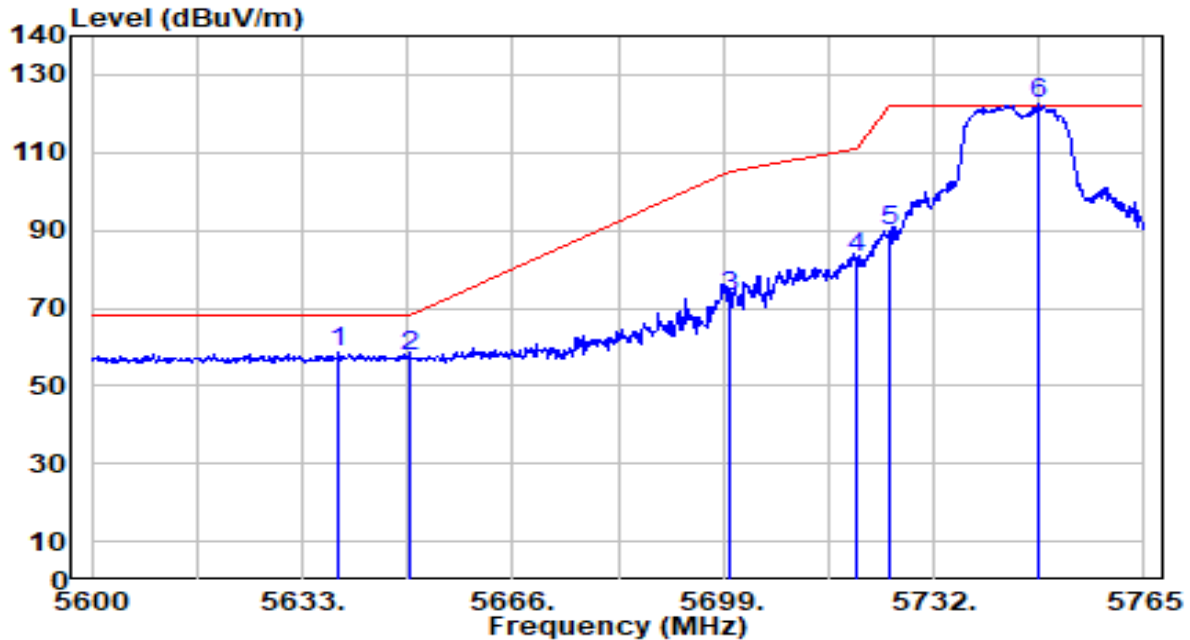


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.775	57.00	1.49	58.49	-9.71	68.20	137	172	Peak
2		5650.000	56.16	1.54	57.70	-10.50	68.20	137	172	Peak
3		5700.000	71.25	1.78	73.02	-32.18	105.20	137	172	Peak
4		5720.000	81.25	1.87	83.12	-27.68	110.80	137	172	Peak
5		5725.000	88.17	1.89	90.07	-32.13	122.20	137	172	Peak
6		5748.500	120.33	2.00	122.33	N/A	N/A	137	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

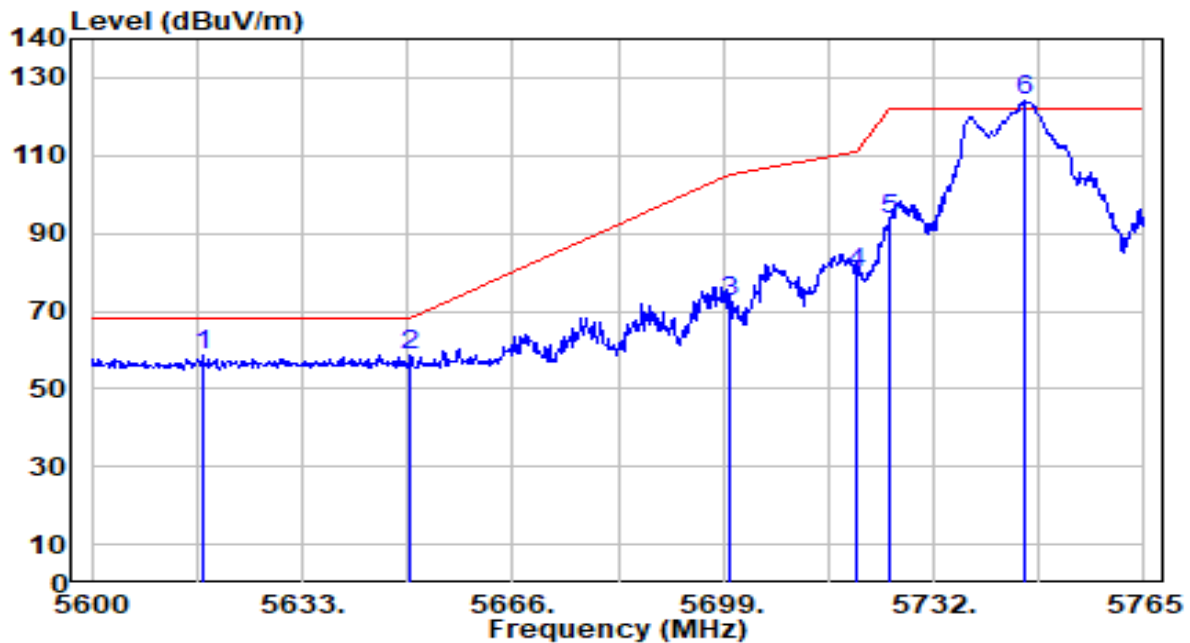


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5617.325	57.52	1.39	58.90	-9.30	68.20	166	287	Peak
2		5650.000	56.92	1.54	58.46	-9.74	68.20	166	287	Peak
3		5700.000	70.76	1.78	72.54	-32.66	105.20	166	287	Peak
4		5720.000	78.03	1.87	79.90	-30.90	110.80	166	287	Peak
5		5725.000	91.61	1.89	93.50	-28.70	122.20	166	287	Peak
6		5746.190	121.99	1.99	123.98	N/A	N/A	166	287	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

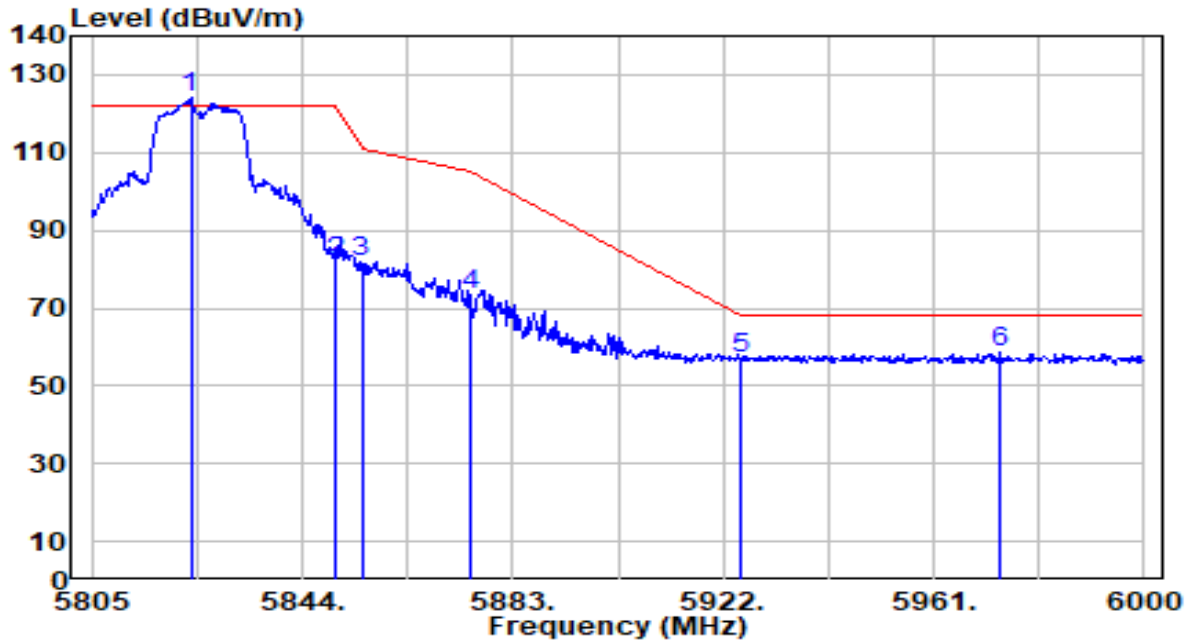


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.330	121.73	2.25	123.97	N/A	N/A	150	184	Peak
2	5850.000	79.86	2.25	82.11	-40.09	122.20	150	184	Peak
3	5855.000	79.57	2.25	81.82	-28.98	110.80	150	184	Peak
4	5875.000	71.00	2.26	73.26	-31.94	105.20	150	184	Peak
5	5925.000	54.94	2.27	57.20	-11.00	68.20	150	184	Peak
6	* 5973.285	56.32	2.28	58.59	-9.61	68.20	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

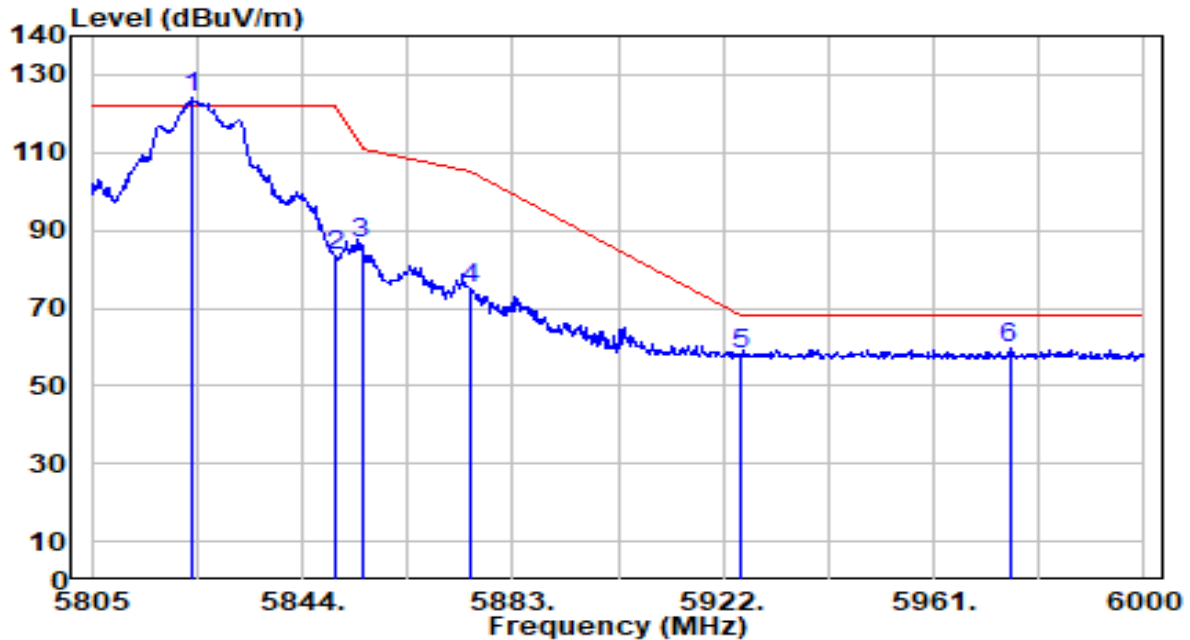


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.720	121.69	2.25	123.94	N/A	N/A	193	282	Peak
2	5850.000	81.04	2.25	83.29	-38.91	122.20	193	282	Peak
3	5855.000	84.47	2.25	86.72	-24.08	110.80	193	282	Peak
4	5875.000	72.80	2.26	75.05	-30.15	105.20	193	282	Peak
5	5925.000	55.78	2.27	58.04	-10.16	68.20	193	282	Peak
6	* 5975.040	57.55	2.28	59.83	-8.37	68.20	193	282	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

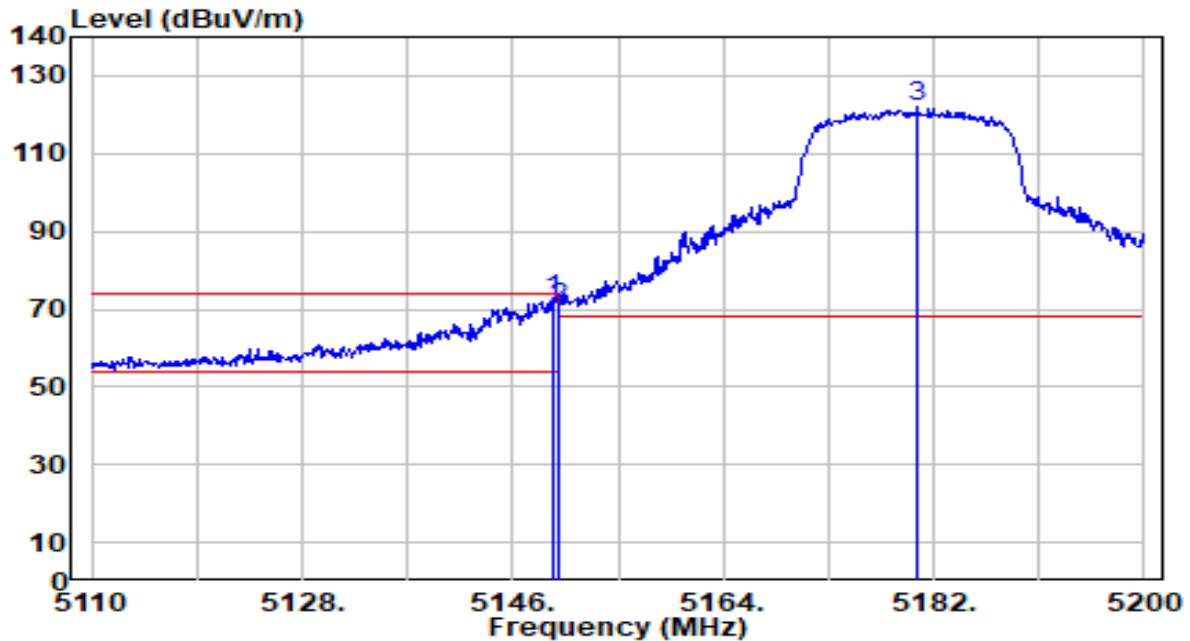


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	71.73	0.65	72.38	-1.62	74.00	205	194	Peak
2		5150.000	69.49	0.65	70.14	-3.86	74.00	205	194	Peak
3		5180.650	121.38	0.68	122.06	N/A	N/A	205	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

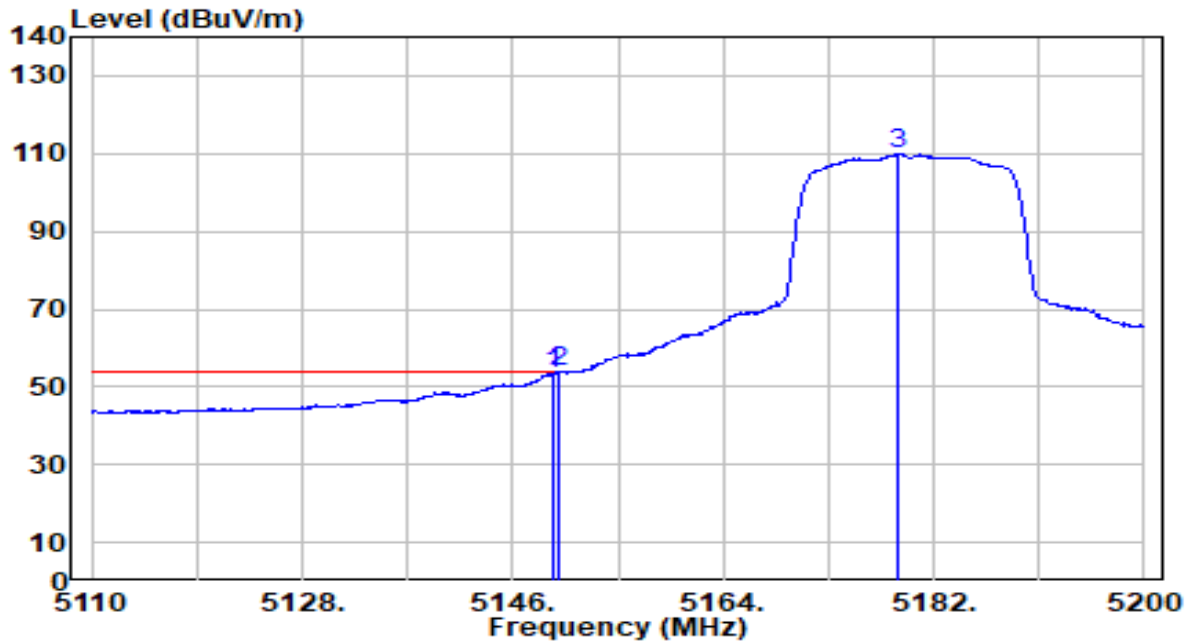


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	52.70	0.65	53.36	-0.64	54.00	205	194	Average
2	* 5150.000	53.19	0.65	53.85	-0.15	54.00	205	194	Average
3	5178.940	109.30	0.68	109.98	N/A	N/A	205	194	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

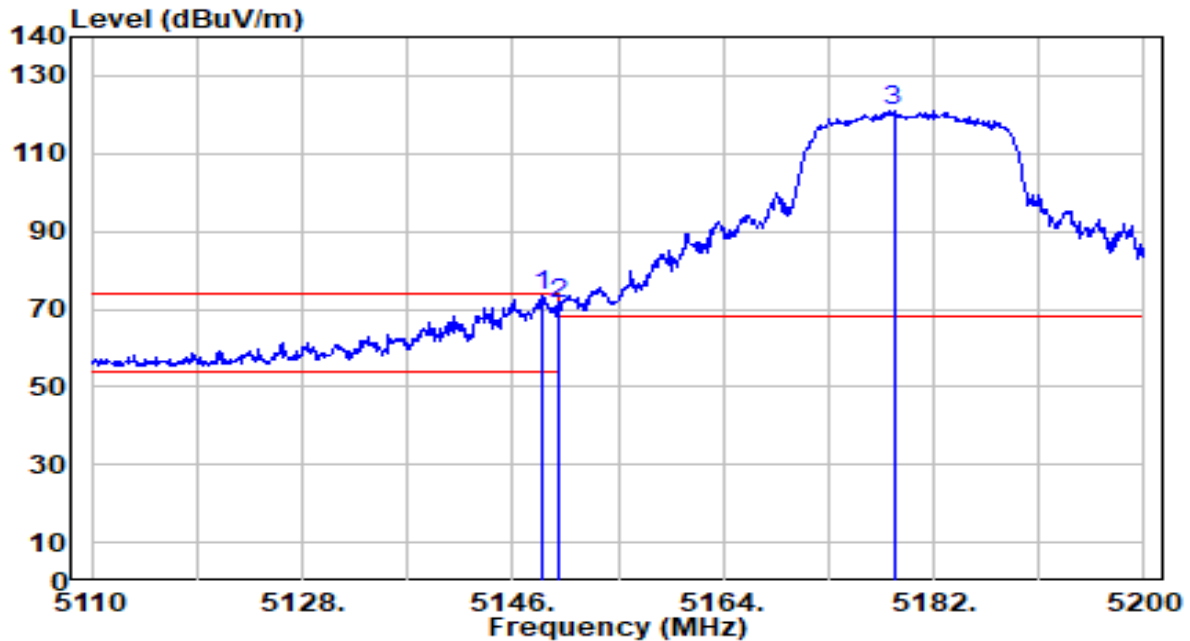


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	72.86	0.65	73.51	-0.49	74.00	200	292	Peak
2		5150.000	70.91	0.65	71.56	-2.44	74.00	200	292	Peak
3		5178.580	120.33	0.68	121.01	N/A	N/A	200	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

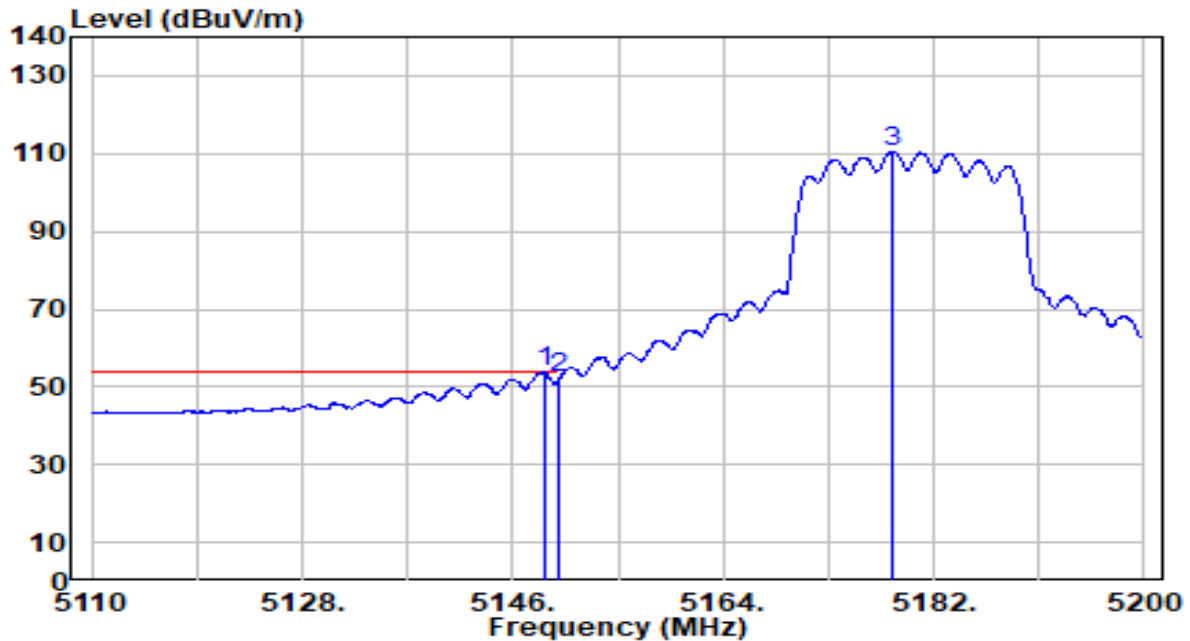


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	53.11	0.65	53.76	-0.24	54.00	200	292	Average
2		5150.000	51.48	0.65	52.13	-1.87	54.00	200	292	Average
3		5178.490	109.94	0.68	110.62	N/A	N/A	200	292	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

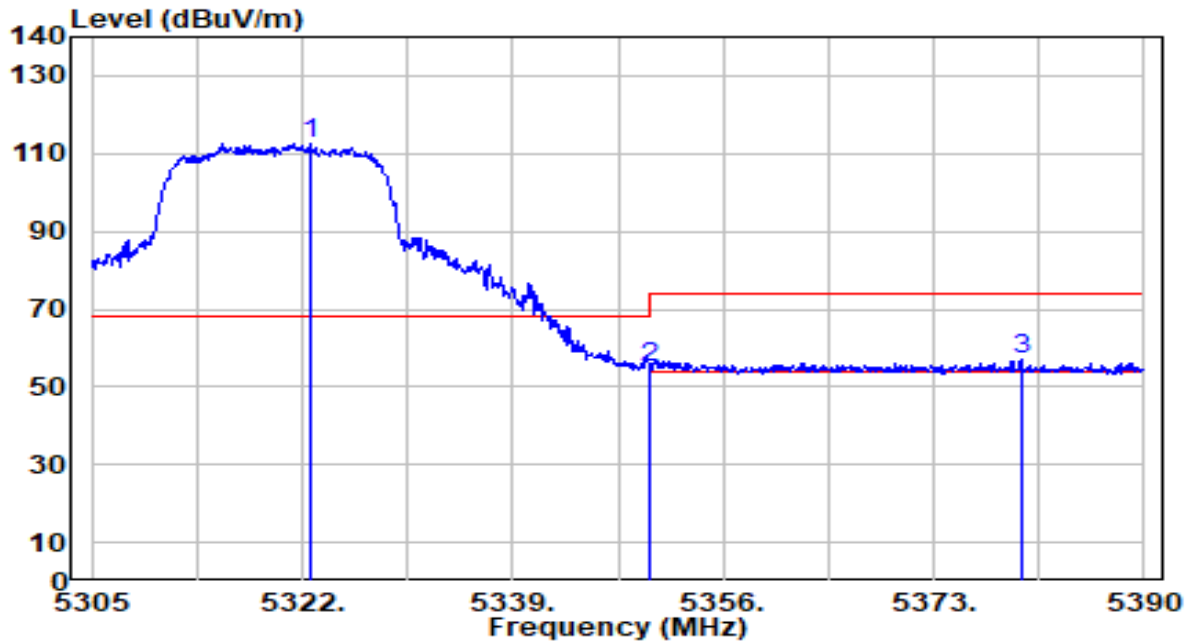


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.595	111.83	0.51	112.34	N/A	N/A	172	189	Peak
2	5350.000	54.30	0.47	54.77	-19.23	74.00	172	189	Peak
3	* 5380.055	56.44	0.42	56.86	-17.14	74.00	172	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

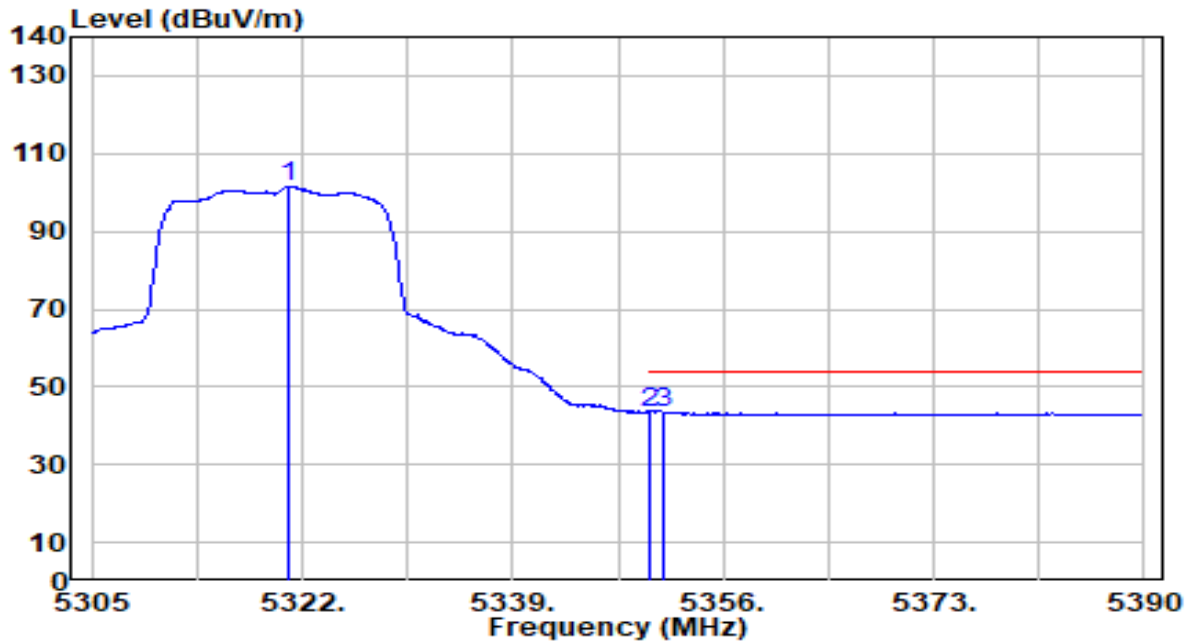


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5320.895	101.01	0.52	101.52	N/A	N/A	172	189	Average
2	*	5350.000	43.11	0.47	43.58	-10.42	54.00	172	189	Average
3		5351.155	43.08	0.47	43.55	-10.45	54.00	172	189	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

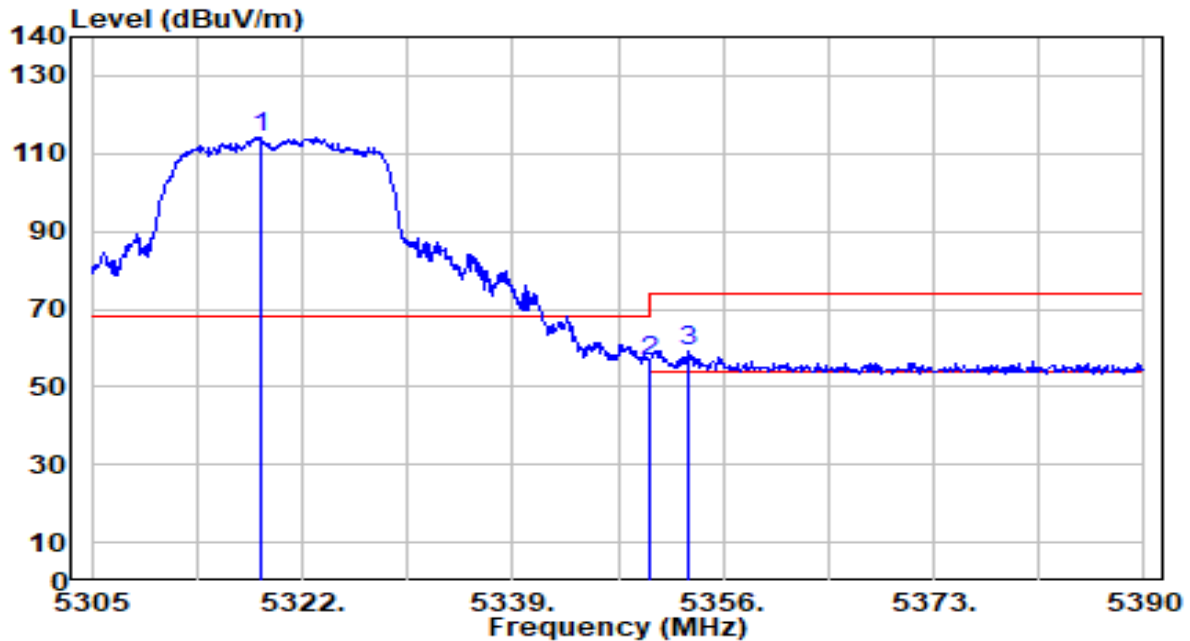


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.600	113.73	0.52	114.25	N/A	N/A	176	291	Peak
2	5350.000	56.14	0.47	56.61	-17.39	74.00	176	291	Peak
3	* 5353.280	58.79	0.47	59.25	-14.75	74.00	176	291	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

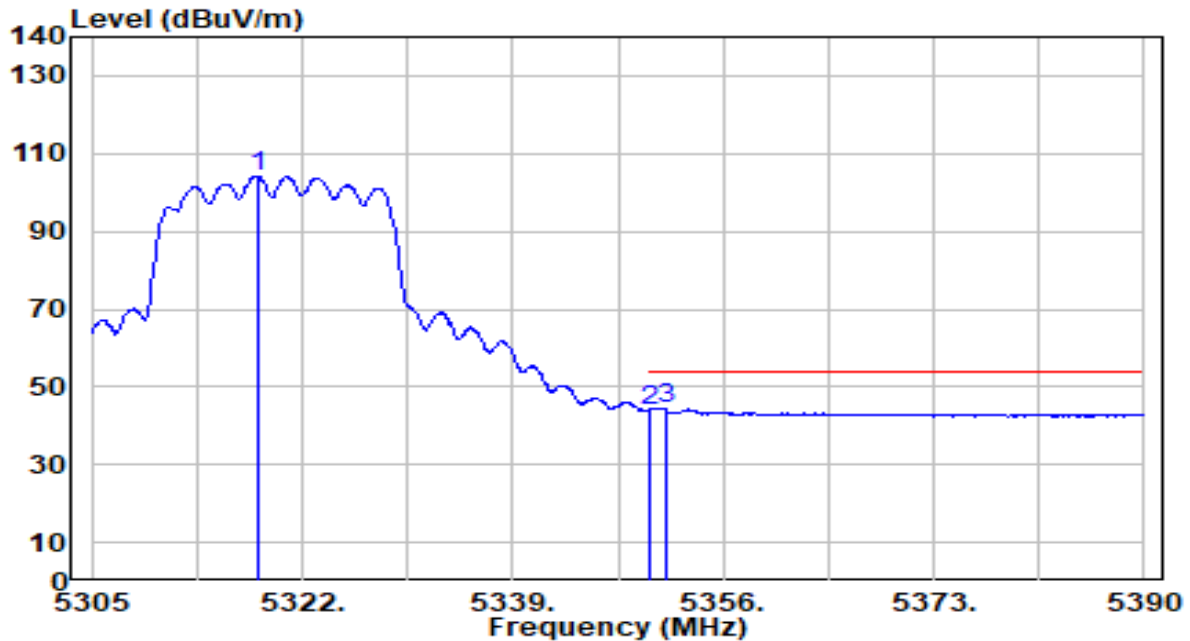


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.345	103.74	0.52	104.26	N/A	N/A	176	291	Average
2	5350.000	43.61	0.47	44.08	-9.92	54.00	176	291	Average
3	* 5351.325	43.93	0.47	44.40	-9.60	54.00	176	291	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

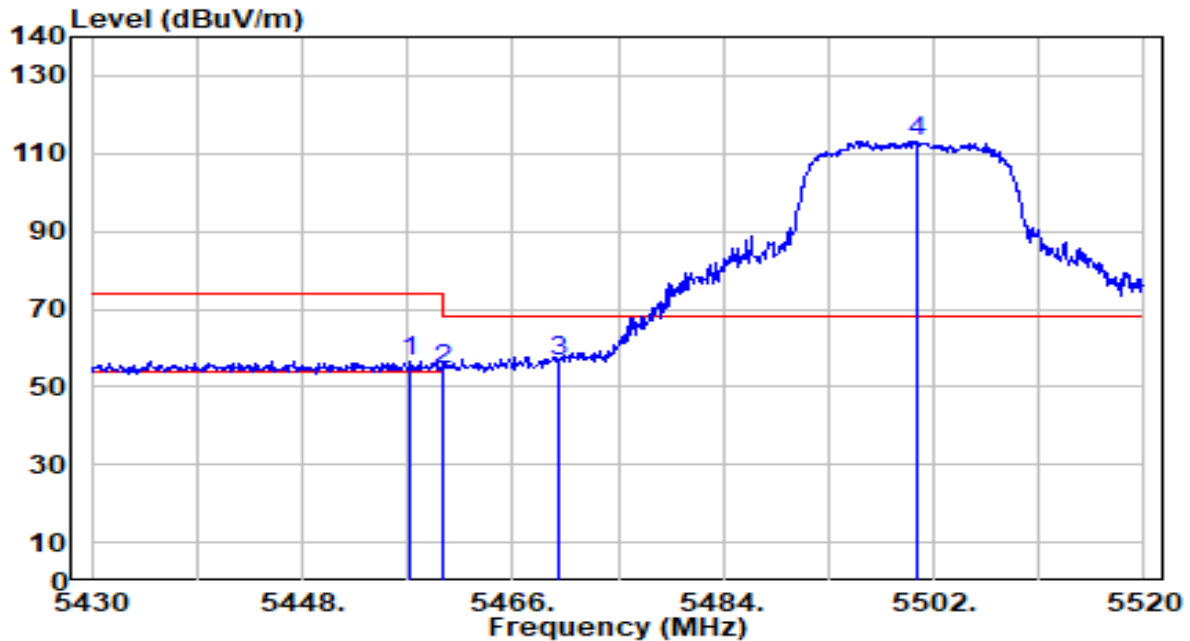


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.180	56.01	0.65	56.65	-17.35	74.00	163	185	Peak
2	5460.000	53.55	0.66	54.21	-19.79	74.00	163	185	Peak
3	* 5470.000	55.65	0.71	56.36	-11.84	68.20	163	185	Peak
4	5500.560	112.38	0.84	113.22	N/A	N/A	163	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

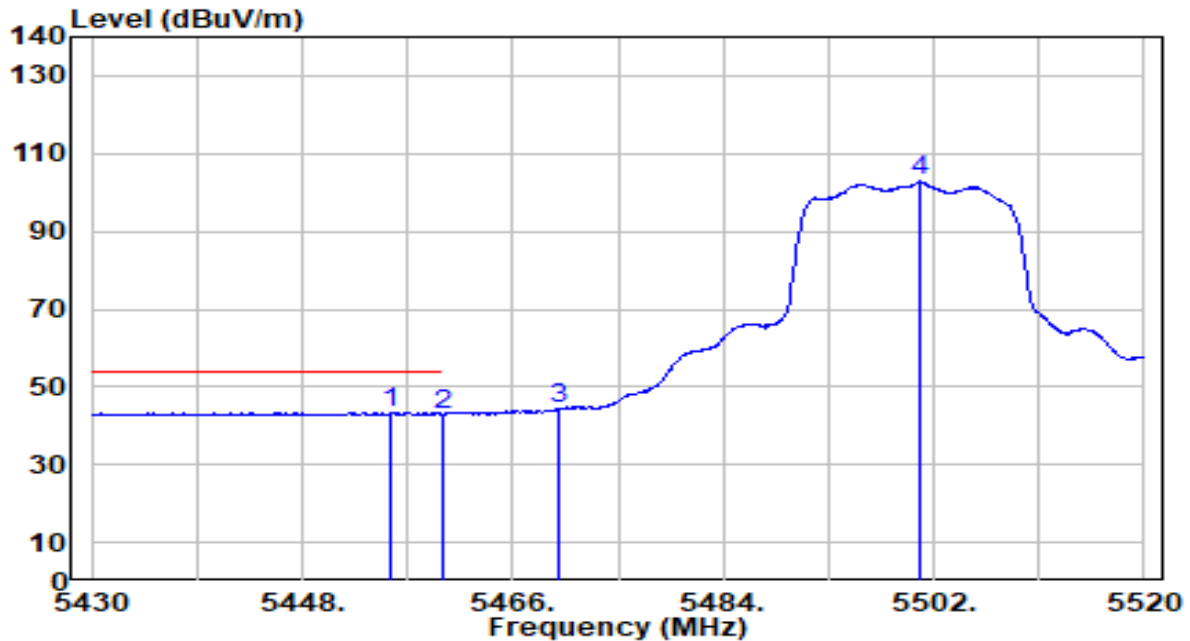


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.560	42.68	0.64	43.33	-10.67	54.00	163	185	Average
2		5460.000	42.39	0.66	43.05	-10.95	54.00	163	185	Average
3		5470.000	43.61	0.71	44.32	N/A	N/A	163	185	Average
4		5500.920	101.99	0.84	102.83	N/A	N/A	163	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

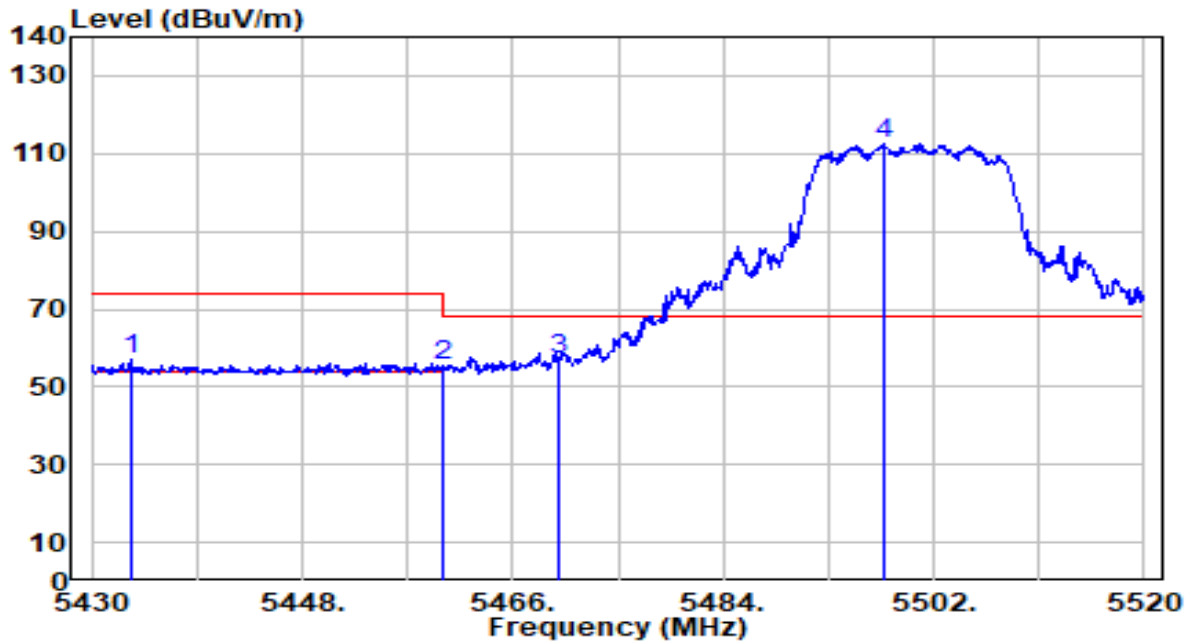


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5433.330	56.37	0.54	56.91	-17.09	74.00	169	316	Peak
2	5460.000	54.64	0.66	55.30	-18.70	74.00	169	316	Peak
3	* 5470.000	56.12	0.71	56.83	-11.37	68.20	169	316	Peak
4	5497.680	111.87	0.83	112.70	N/A	N/A	169	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

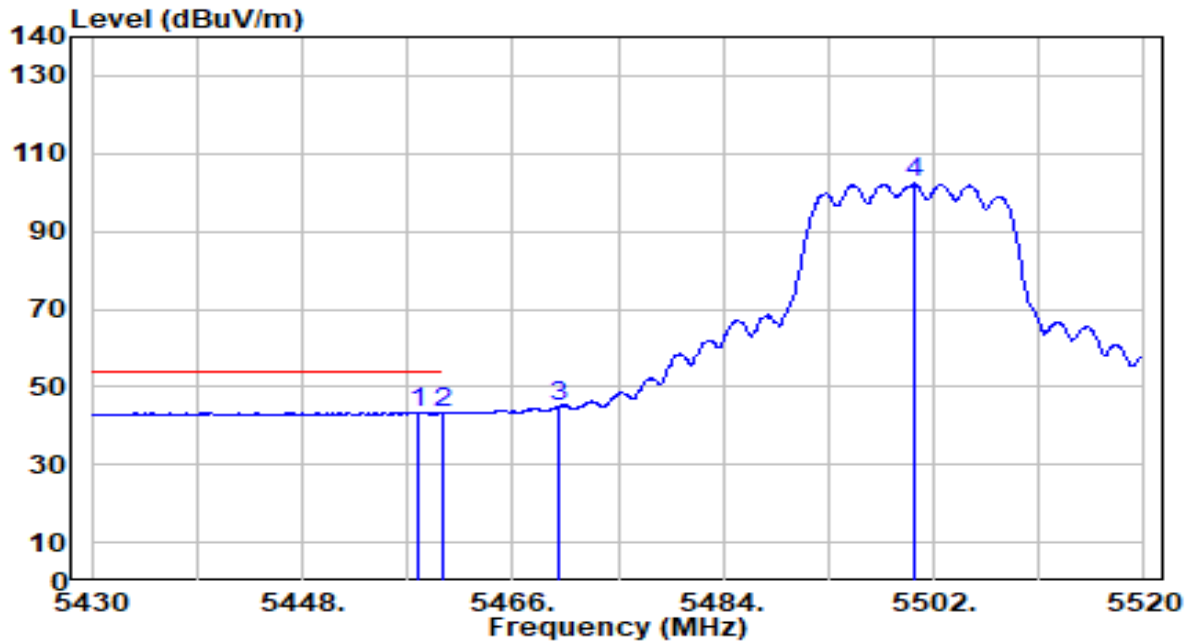


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.990	42.68	0.65	43.33	-10.67	54.00	169	316	Average
2		5460.000	42.55	0.66	43.22	-10.78	54.00	169	316	Average
3		5470.000	44.44	0.71	45.15	N/A	N/A	169	316	Average
4		5500.380	101.39	0.84	102.23	N/A	N/A	169	316	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

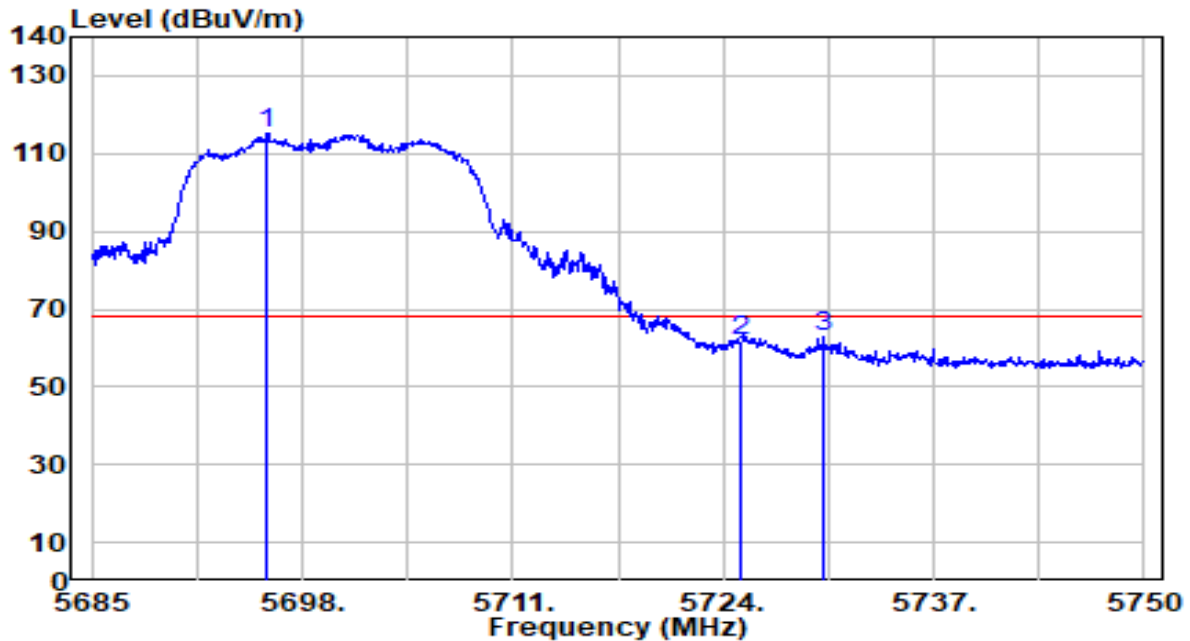


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.855	113.51	1.76	115.26	N/A	N/A	179	171	Peak
2	5725.000	59.88	1.89	61.78	-6.42	68.20	179	171	Peak
3	* 5730.240	61.09	1.92	63.01	-5.20	68.20	179	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

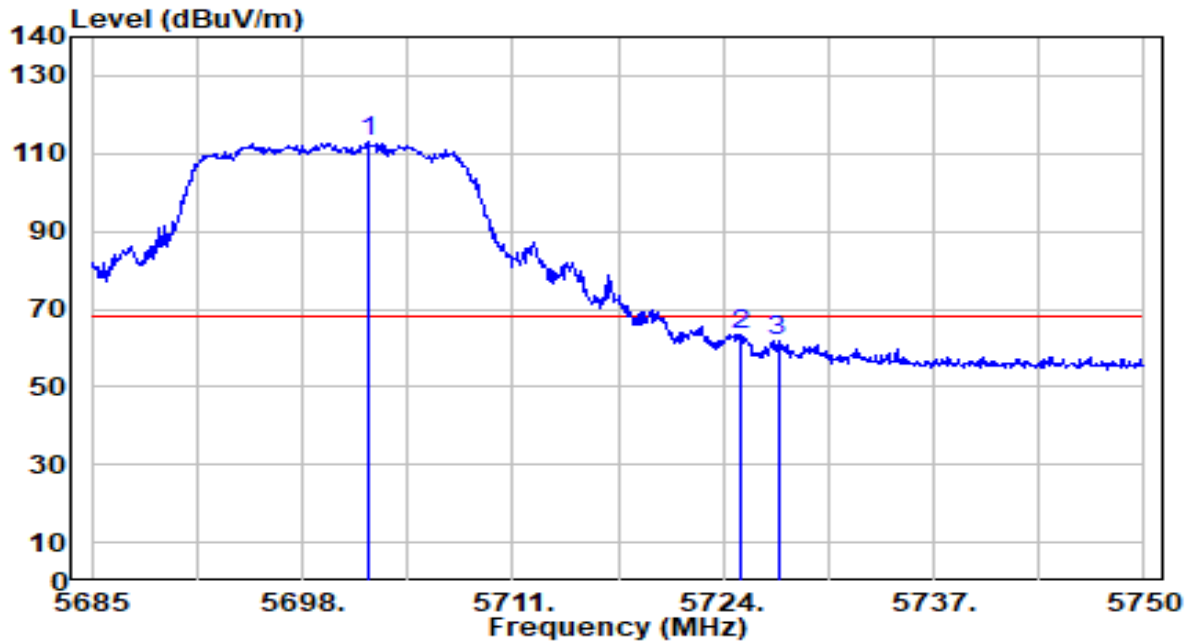


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5702.030	111.31	1.79	113.09	N/A	N/A	194	312	Peak
2	*	5725.000	61.25	1.89	63.14	-5.06	68.20	194	312	Peak
3		5727.380	59.83	1.90	61.74	-6.46	68.20	194	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

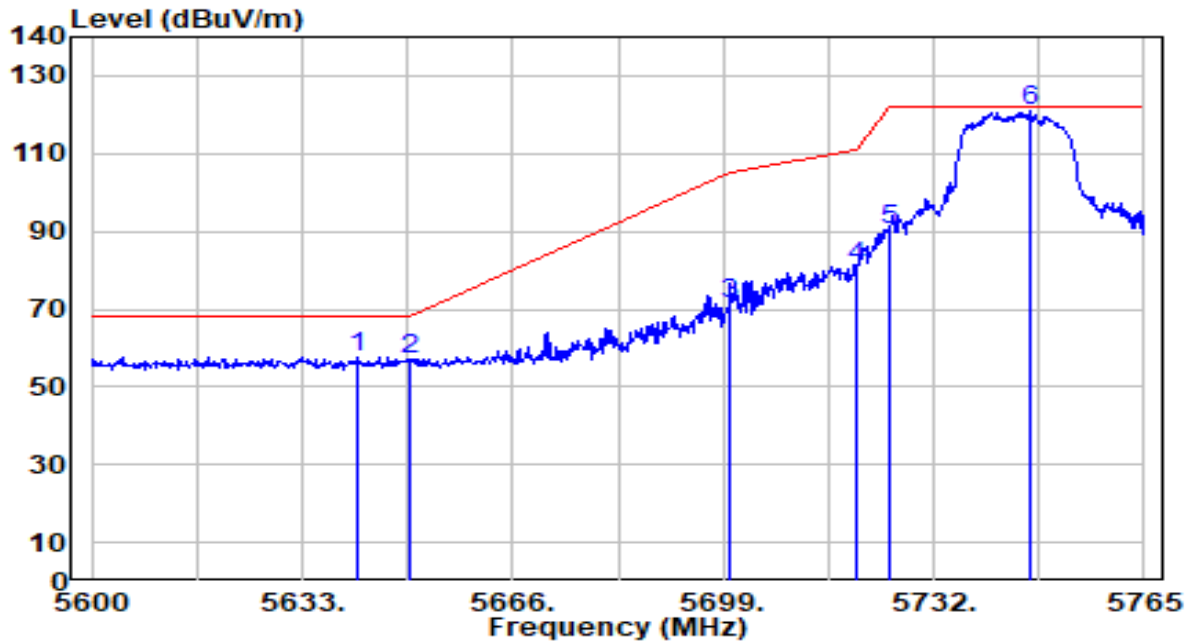


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.580	56.27	1.50	57.77	-10.43	68.20	137	172	Peak
2		5650.000	55.48	1.54	57.02	-11.18	68.20	137	172	Peak
3		5700.000	69.61	1.78	71.38	-33.82	105.20	137	172	Peak
4		5720.000	79.07	1.87	80.94	-29.86	110.80	137	172	Peak
5		5725.000	88.65	1.89	90.55	-31.65	122.20	137	172	Peak
6		5747.015	118.80	2.00	120.80	N/A	N/A	137	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

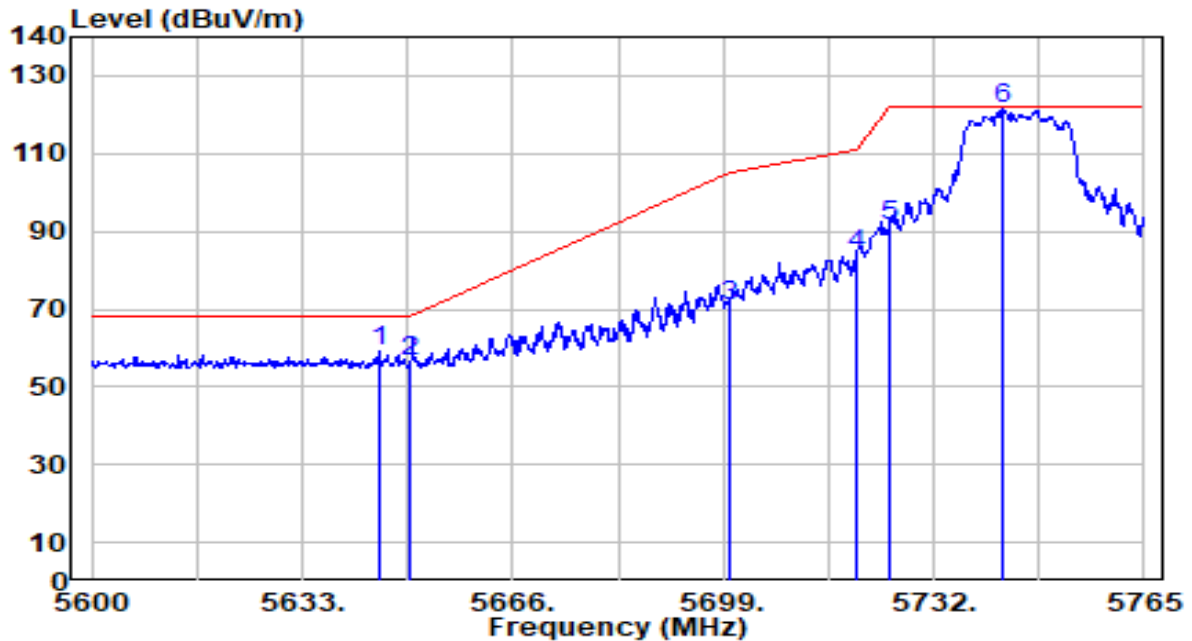


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.045	57.51	1.52	59.03	-9.17	68.20	166	287	Peak
2		5650.000	55.14	1.54	56.68	-11.52	68.20	166	287	Peak
3		5700.000	69.10	1.78	70.87	-34.33	105.20	166	287	Peak
4		5720.000	82.00	1.87	83.87	-26.93	110.80	166	287	Peak
5		5725.000	89.30	1.89	91.19	-31.01	122.20	166	287	Peak
6		5742.725	119.39	1.98	121.37	N/A	N/A	166	287	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

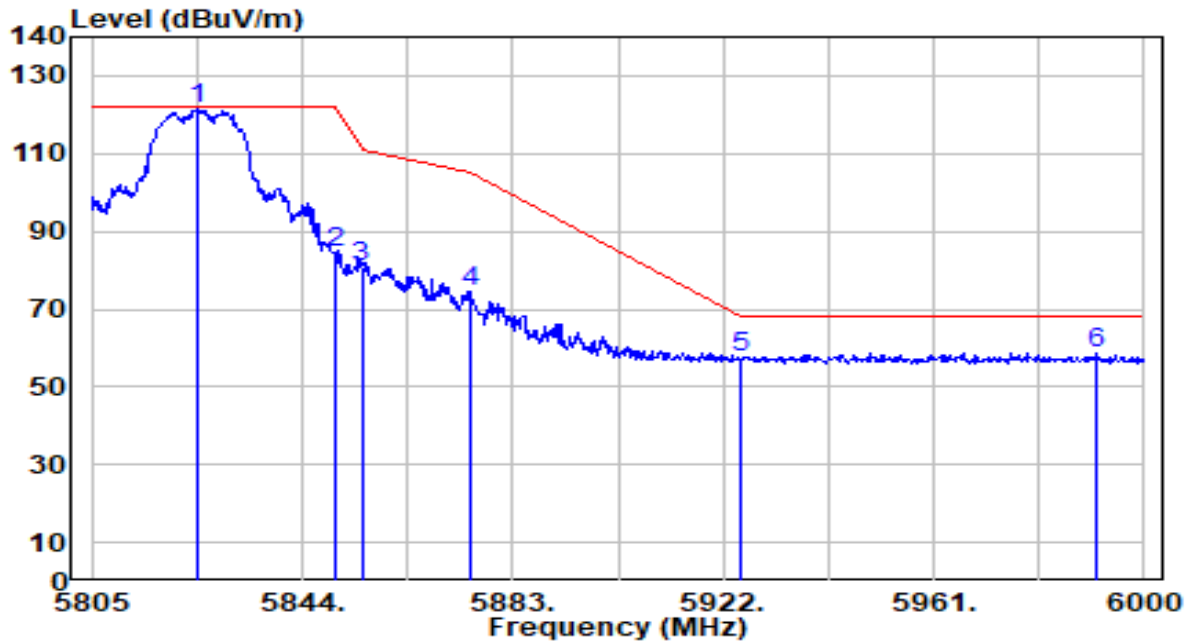


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.695	119.47	2.25	121.72	N/A	N/A	150	184	Peak
2	5850.000	82.30	2.25	84.56	-37.64	122.20	150	184	Peak
3	5855.000	78.62	2.25	80.87	-29.93	110.80	150	184	Peak
4	5875.000	72.23	2.26	74.49	-30.71	105.20	150	184	Peak
5	5925.000	55.52	2.27	57.78	-10.42	68.20	150	184	Peak
6	* 5991.225	56.52	2.28	58.80	-9.40	68.20	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

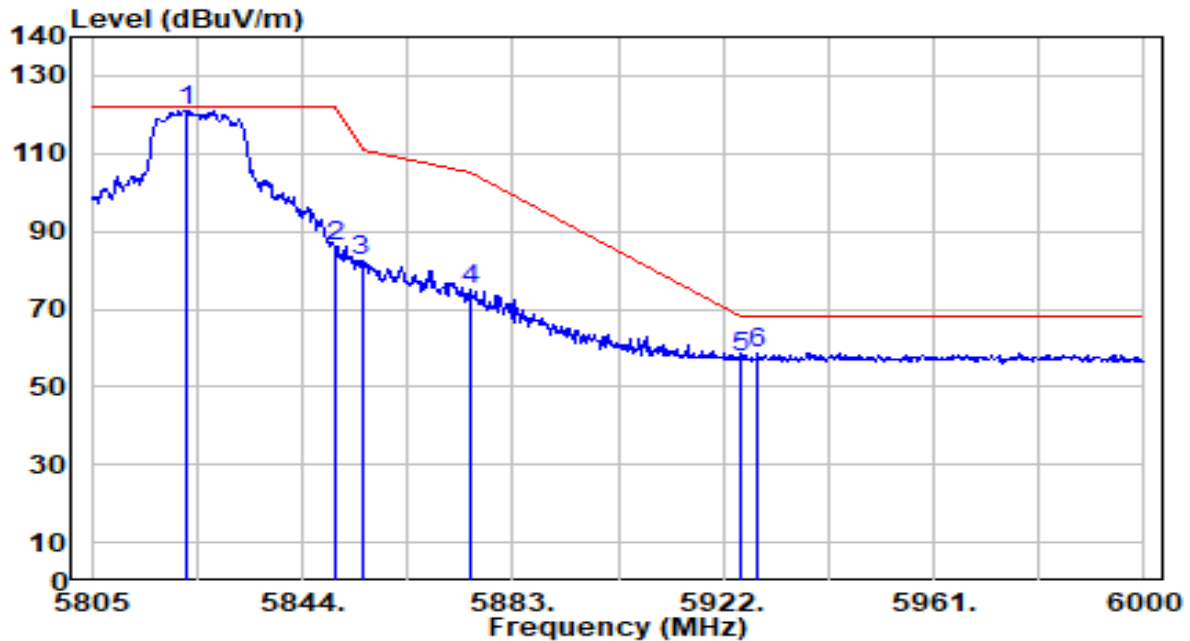


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.355	118.94	2.25	121.19	N/A	N/A	193	282	Peak
2	5850.000	84.12	2.25	86.37	-35.83	122.20	193	282	Peak
3	5855.000	80.27	2.25	82.52	-28.28	110.80	193	282	Peak
4	5875.000	72.62	2.26	74.88	-30.32	105.20	193	282	Peak
5	5925.000	55.50	2.27	57.76	-10.44	68.20	193	282	Peak
6	* 5928.435	56.54	2.27	58.80	-9.40	68.20	193	282	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

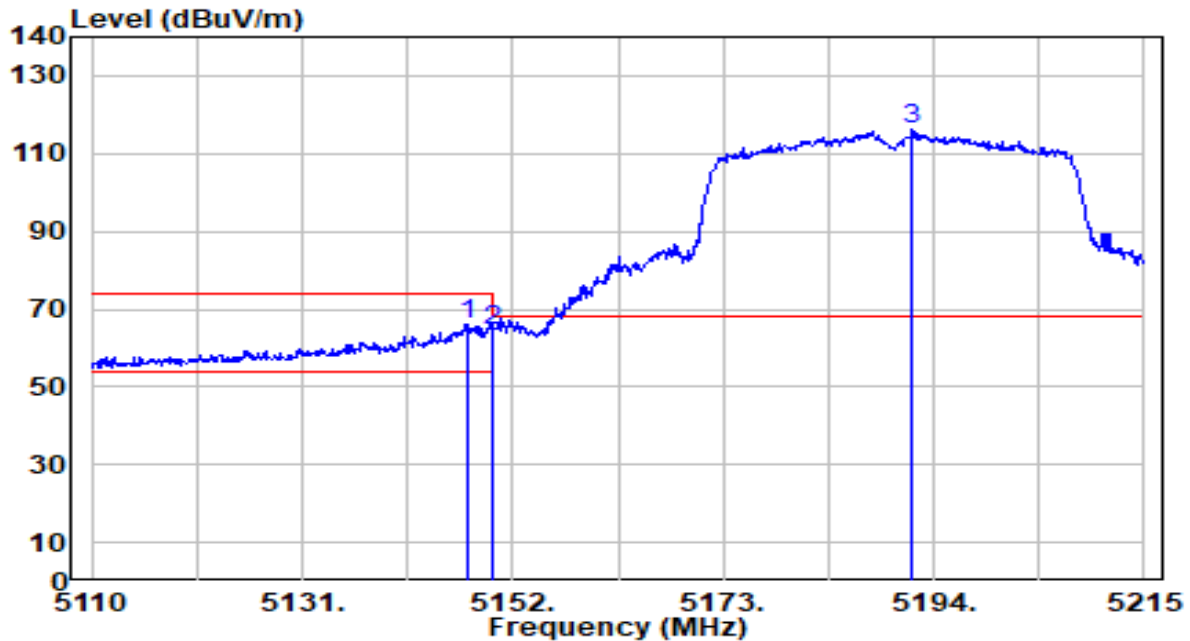


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.485	65.61	0.65	66.27	-7.73	74.00	205	194	Peak
2		5150.000	64.04	0.65	64.70	-9.30	74.00	205	194	Peak
3		5191.795	115.47	0.69	116.16	N/A	N/A	205	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

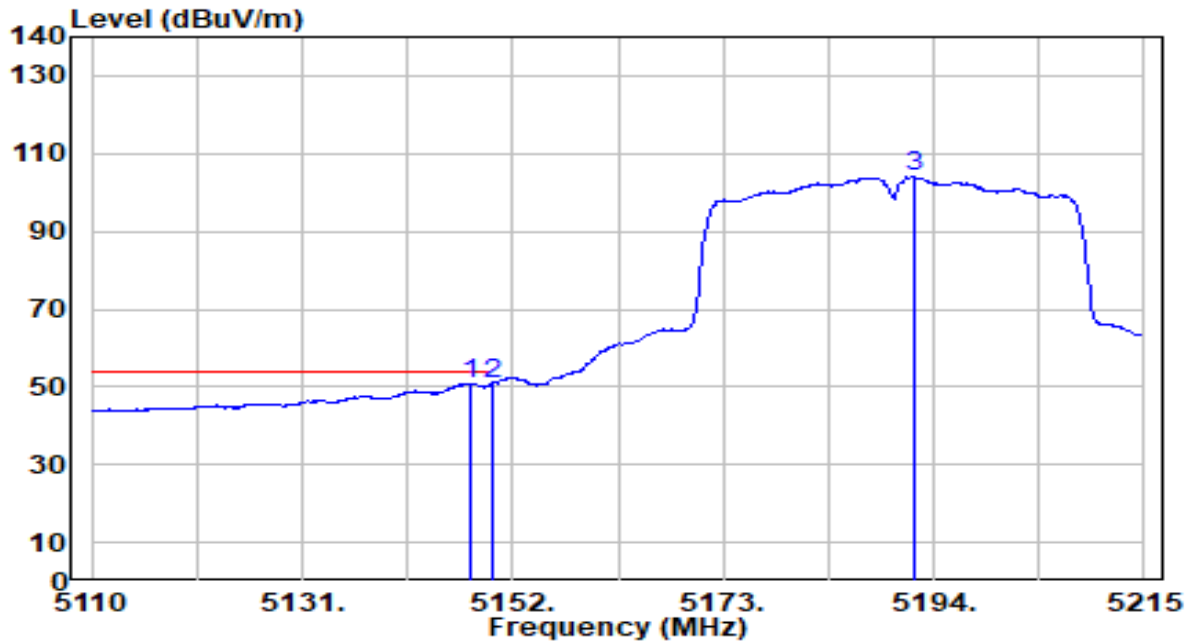


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.905	50.24	0.65	50.89	-3.11	54.00	205	194	Average
2		5150.000	50.11	0.65	50.76	-3.24	54.00	205	194	Average
3		5192.005	103.37	0.69	104.07	N/A	N/A	205	194	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

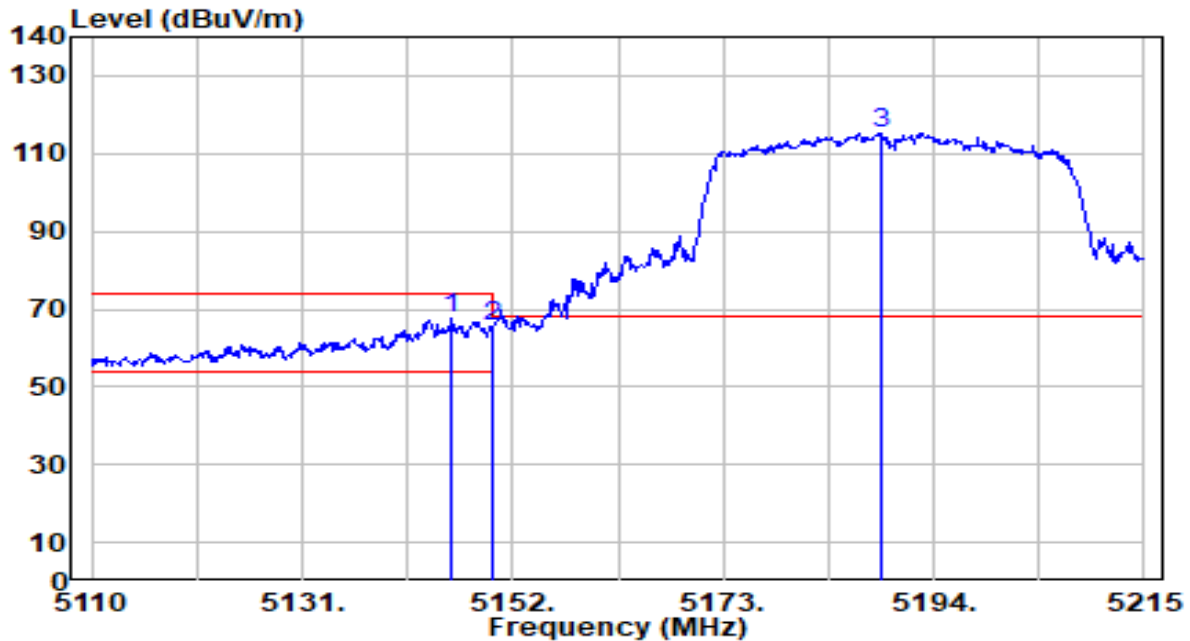


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.910	66.78	0.65	67.43	-6.57	74.00	200	292	Peak
2		5150.000	64.83	0.65	65.48	-8.52	74.00	200	292	Peak
3		5188.750	114.69	0.69	115.39	N/A	N/A	200	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

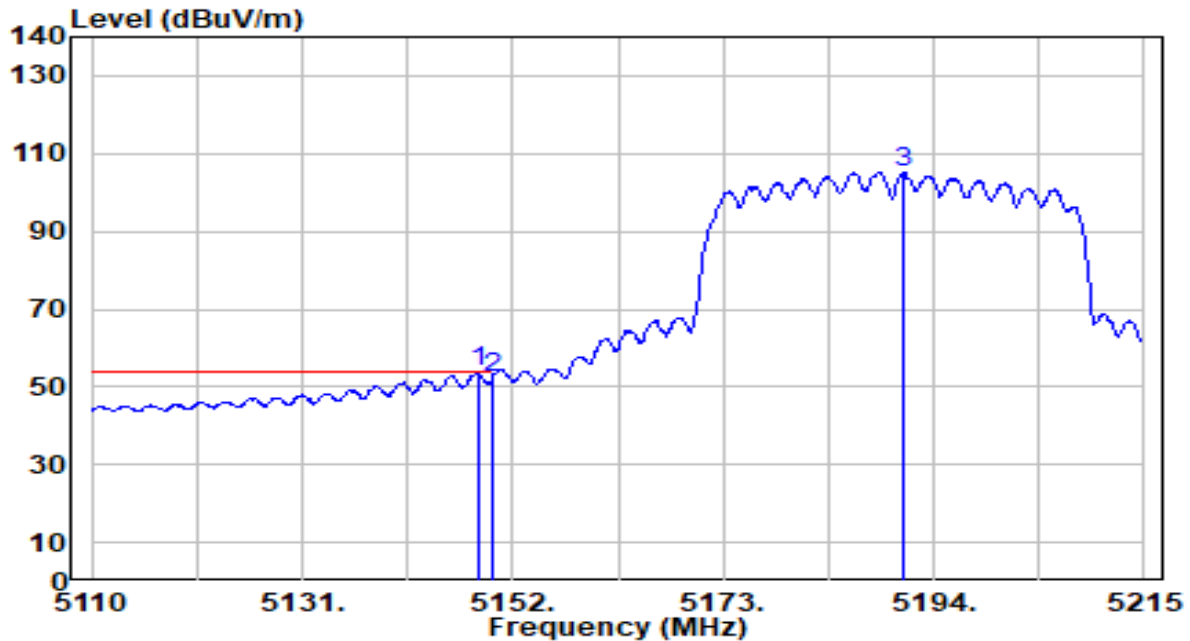


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.535	53.06	0.65	53.72	-0.28	54.00	200	292	Average
2		5150.000	51.55	0.65	52.20	-1.80	54.00	200	292	Average
3		5191.060	104.46	0.69	105.15	N/A	N/A	200	292	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

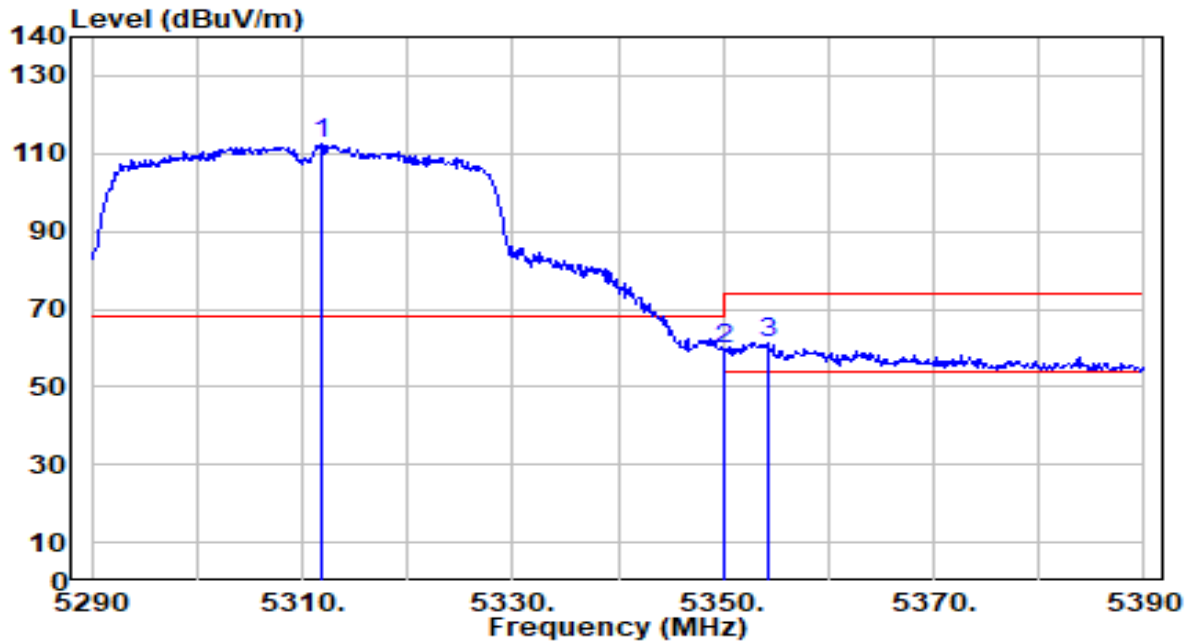


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.800	111.87	0.53	112.40	N/A	N/A	172	189	Peak
2	5350.000	59.26	0.47	59.73	-14.27	74.00	172	189	Peak
3	* 5354.300	60.84	0.46	61.31	-12.69	74.00	172	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-11
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

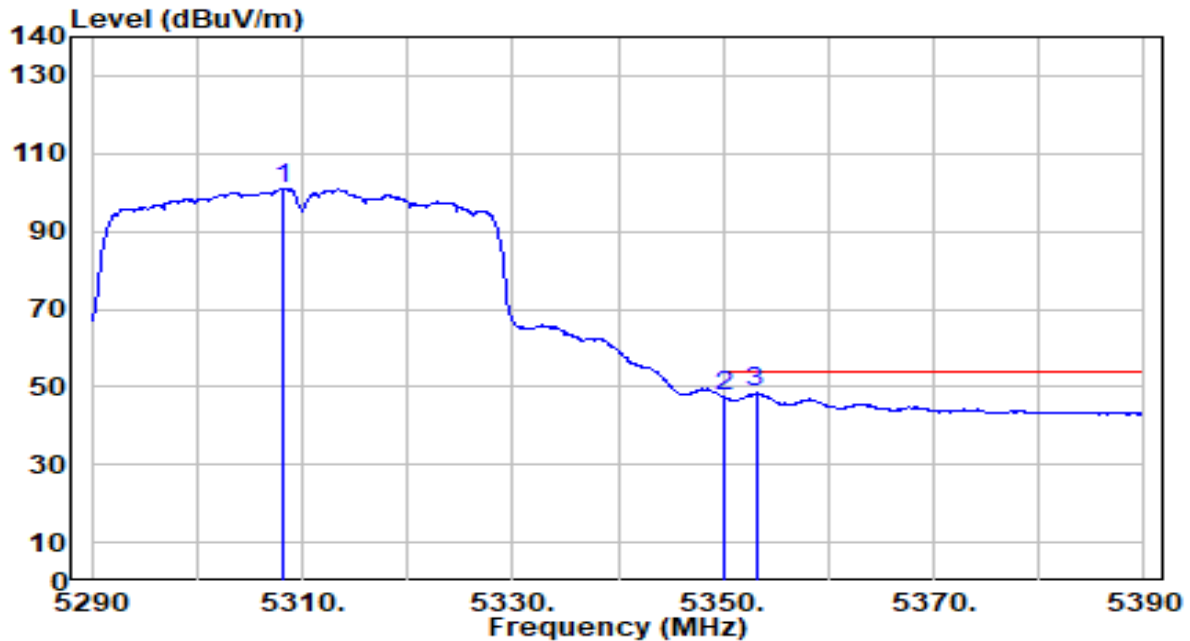

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.200	100.54	0.54	101.07	N/A	N/A	172	189	Average
2	5350.000	46.94	0.47	47.41	-6.59	54.00	172	189	Average
3	* 5353.100	47.88	0.47	48.35	-5.65	54.00	172	189	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.