

An Engineering Document

FOR

Buddi Limited

ON

Buddi Click System - Wristband

DOCUMENT NO. TRA-015303-05-47-01A

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.

T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com

www.tracglobal.com

TRaC Wireless Test Report : TRA-015303-05-47-01A

Applicant : Buddi Limited

Apparatus : Buddi Click System - Wristband

Specification(s) : FCC CFR47 Part 15 (c) & RSS-210 Issue 8

Purpose of Test : Certification

FCC ID : ZDL349A

Authorised by :



: Radio Product Manager

Issue Date : 30th May 2014

Authorised Copy Number : PDF

Contents

Section 1:	Introduction	4
1.1	General	4
1.2	Tests Requested By	5
1.3	Manufacturer	5
1.4	Apparatus Assessed	5
1.5	Test Result Summary	6
1.6	Notes relating to the assessment	7
1.7	Deviations from Test Standards	7
Section 2:	Measurement Uncertainty	8
2.1	Measurement Uncertainty Values	8
Section 3:	Modifications	10
3.1	Modifications Performed During Assessment	10
Appendix A:	Formal Emission Test Results	11
A1	Transmitter Intentional Emission Radiated	12
A2	Transmitter Bandwidth	13
A3	Radiated Electric Field Emissions	14
A4	Unintentional Radiated Emissions	17
Appendix B:	Supporting Graphical Data	19
Appendix C:	Additional Test and Sample Details	28
C1	Test samples	29
C2	EUT operating mode during testing	30
C3	EUT Configuration Information	31
C4	List of EUT Ports	32
C5	Details of Equipment Used	33
Appendix D:	Additional Information	34
Appendix E:	Photographs and Figures	35
Appendix F:	MPE Calculation	37

Section 1:**Introduction****1.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global []
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Global [X]
Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: A Tosif

Report author: A Tosif

This report must not be reproduced except in full without prior written permission from TRaC Global Ltd.

1.2 Tests Requested By

This testing in this report was requested by:

Buddi Limited

Talbot House
17 Church Street
Rickmansworth
Herts
WD3 1DE

1.3 Manufacturer

As above

1.4 Apparatus Assessed

The following apparatus was assessed between: 7th – 29th May 2014

Buddi Click System - Wristband.

The Wristband is a SRD device operating in 902 – 928 band.

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	FCC Regulation	IC Regulation	Measurement standard	Result
Spurious Emissions Radiated	Title 47 of the CFR: Part 15 Subpart (c) 15.249(a)(d)	RSS-210 Issue 8 December 2010 Annex 2 A2.9	ANSI C63.10	Pass
Unintentional Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart (b) 15.109	RSS-Gen Issue 3 December 2010 Section 4.10	ANSI C63.10	Pass
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart (c) 15.207	RSS-Gen Issue 3 December 2010 Section 7.2.4	ANSI C63.10	N/A
Intentional Emission Frequency	Title 47 of the CFR: Part 15 Subpart (c) 15.249 (a)	RSS-210 Issue 8 December 2010 Annex 2 A2.9	ANSI C63.10	Pass
Intentional Emission Field Strength	Title 47 of the CFR: Part 15 Subpart (c) 15.249 (a)	RSS-210 Issue 8 December 2010 Annex 2 A2.9	ANSI C63.10	Pass
Intentional Emission Band Occupancy	Title 47 of the CFR: Part 15 Subpart (c) 15.215 (c)	RSS-Gen Issue 3 December 2010 Section 4.6.1	ANSI C63.10	Pass

Abbreviations used in the above table:

CFR : Code of Federal Regulations
REFE : Radiated Electric Field Emissions

ANSI : American National Standards Institution
PLCE : Power Line Conducted Emissions

1.6 Notes relating to the assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 20 to 22 °C
Humidity	: 45 to 75 %

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For the test data recorded in accordance with note (iii) of Section 2.1 the following measurement uncertainty was calculated:

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**,
Uncertainty in time measurement = **0.59%**,
Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98%**

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test		
SE	: Support Equipment	Ref	: Reference
		Freq	: Frequency
L	: Live Power Line		
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

A1 Transmitter Intentional Emission Radiated

Test Details	
Regulation	Part15 Subpart (c) 15.249 (a) / RSS-210 Issue 8 Annex 2 A2.9
Measurement standard	ANSI C63.10:2003
EUT sample number	S24
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	25.9
Photographs	Refer to Appendix F

FREQ. (MHz)	MEASUREMENT Rx. READING (dBµV)	CABLE LOSS (dB)	ANT FACTOR (dB/m)	PRE AMP (dB)	FIELD STRENGTH (dBµV/m)	FIELD STRENGTH (mV/m)
915.8	66.4	3.6	20.9	N/A	90.9	35.075
918.3	66.1	3.6	20.9	N/A	90.6	33.884
920.8	65.8	3.6	20.9	N/A	90.3	32.734
Limit			50mV/m @ 3m			

- Notes:**
- 1 Results quoted are extrapolated as indicated
 - 2 Receiver detector @ fc = Quasi Peak / 120kHz bandwidth
 - 3 When battery powered the EUT was powered with new batteries

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.10
 - 2 Measuring distances 3m
 - 3 EUT 0.8 metre above ground plane
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded

A2 Transmitter Bandwidth

Test Details:	
Regulation	Part 15.215 (c) / RSS-Gen Issue 3 Section 4.6.1
Measurement standard	ANSI C63.10:2009
EUT sample number	S26
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	24°C

Band occupancy @ -20 dBc			
FREQ. (MHz)	f lower (MHz)	f higher (MHz)	Occ BW (kHz)
915.8	915.758	915.844	85.897
918.3	918.261	918.347	85.577
920.8	920.758	920.844	85.577

The 20dB Bandwidth of the carrier must be contained within the frequency band 902-928 MHz

99% Band occupancy			
FREQ. (MHz)	f lower (MHz)	f higher (MHz)	Occ BW (kHz)
915.8	915.760	915.842	82.051
918.3	918.260	918.342	81.731
920.8	920.760	920.841	81.731

A3 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Part 15 Subpart (c) Clause 15.209 (a) / RSS-Gen Issue 3 Section 7.2.5. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : ☐

3m alternative test site : ☒

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details	
Regulation	Part 15 Subpart (c) Clause 15.249 (a)(d) / RSS-210 Issue 8 Annex 2 A2.9
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz-10GHz
EUT sample number	S24
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	25.9

The worst case emissions are listed below:

Bottom Channel

Ref No.	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	HPF Loss (dB)	Duty Cycle correction (dB)	Field ST'GH (dBµV/m)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
1.	1831.59	64.0	2.9	27.2	36.3	-	-	57.8	773.571pk	5011pk
2.	1831.59	57.2	2.9	27.2	36.3	-	-	51.0	355.222av	500av
3.	2747.37	41.8	3.1	29.1	36.0	-	-	38.0	79.3414av	500av
4.	3663.25	48.6	3.1	31.6	35.7	-	-	47.6	239.607av	500av
5.	4579.01	46.9	3.5	32.3	35.6	-	-	47.1	227.51av	500av
6.	5494.89	54.1	3.9	33.9	35.7	-	-	56.2	648.634pk	5011pk
7.	5494.89	50.4	3.9	33.9	35.7	-	-	52.5	420.243av	500av
8.	7326.46	52.7	4.4	36.6	36.1	-	-	57.6	761.202pk	5011pk
9.	7326.46	47.1	4.4	36.6	36.1	-	-	52.0	397.649av	500av
10.	8242.22	50.1	4.6	36.8	36.4	-	-	55.1	570.821pk	5011pk
	8242.22	50.1	4.6	36.8	36.4	-	-	55.1	570.821pk	5011pk

Middle Channel

Ref No.	FREQ. (MHz)	MEAS Rx (dBμV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	HPF Loss (dB)	Duty Cycle correction (dB)	Field ST'GH (dBμV/m)	FIELD ST'GH (μV/m)	LIMIT (μV/m)
11.	1836.60	54.1	3.0	27.2	36.3	-	-	48.0	250.9av	500av
12.	2754.90	41.9	3.1	29.1	36.0	-	-	38.1	80.2602av	500av
13.	3673.14	48.3	3.1	31.6	35.7	-	-	47.3	231.206av	500av
14.	4591.52	45.8	3.5	32.3	35.6	-	-	46.0	199.986av	500av
15.	5509.82	54.8	3.9	33.9	35.7	-	-	56.9	696.627pk	5011pk
16.	5509.82	51.0	3.9	33.9	35.7	-	-	53.1	449.78av	500av
17.	7346.56	53.0	4.4	36.6	36.1	-	-	57.9	785.236pk	5011pk
18.	7346.56	47.7	4.4	36.6	36.1	-	-	52.6	426.089av	500av
19.	8264.55	49.7	4.6	36.9	36.4	-	-	54.8	550.808pk	5011pk
20.	1836.60	54.1	3.0	27.2	36.3	-	-	48.0	250.9av	500av

Top Channel

Ref No.	FREQ. (MHz)	MEAS Rx (dBμV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	HPF Loss (dB)	Duty Cycle correction (dB)	Field ST'GH (dBμV/m)	FIELD ST'GH (μV/m)	LIMIT (μV/m)
21.	1841.66	54.5	2.9	27.2	36.3	-	-	48.3	261.216av	500av
22.	2762.43	41.7	3.2	29.1	36.0	-	-	38.0	79.3414av	500av
23.	3683.23	48.2	3.1	31.7	35.7	-	-	47.3	230.94av	500av
24.	4603.95	46.0	3.6	32.3	35.6	-	-	46.3	205.353av	500av
25.	5524.82	54.6	3.9	33.9	35.7	-	-	56.7	687.068pk	5011pk
26.	5524.82	51.2	3.9	33.9	35.7	-	-	53.3	463.447av	500av
27.	7366.36	52.4	4.4	36.7	36.2	-	-	57.3	728.618pk	5011pk
28.	7366.36	47.2	4.4	36.7	36.2	-	-	52.1	402.717av	500av
29.	8287.26	49.2	4.6	36.9	36.4	-	-	54.3	518.8pk	5011pk
30.	8287.26	40.3	4.6	36.9	36.4	-	-	45.4	186.209av	500av

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak RBW=VBW= 1MHz
Average RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15:2010 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR part 15- Clause 15.209 / RSS-Gen Issue 3 Section 7.2.5 for all emissions except harmonics:

Frequency of emission (MHz)	Field strength (V/m)	Measurement Distance (m)	Field strength (dB V/m)
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels:

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels	✓			
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A4 Unintentional Radiated Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions on directly related to the transmitter. The maximum permitted field strength is listed in Part 15 Subpart (c) Clause 15.109 / RSS-Gen Issue 3 Section 6.1. The EUT was set to operate in transmit standby / receive mode.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :

☐

3m alternative test site :

☒

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details	
Regulation	Part 15 Subpart (c) Clause 15.109 / RSS-Gen Issue 3 Section 4.10
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz – 10GHz
EUT sample number	S24
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	22°C

No emissions were detected within 20dB of the limit.

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak (pk)	RBW=VBW= 1MHz
Average (Av)	RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR Part 15: Clause 15.109 / RSS-Gen Issue 3 section 6.1 for all emissions:

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Measurement Distance (m)	Field strength (dB $\mu\text{V/m}$)
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels	✓			
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				


Appendix B:**Supporting Graphical Data**

This appendix contains graphical data obtained during testing.

Notes:


- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

20dB Bandwidth

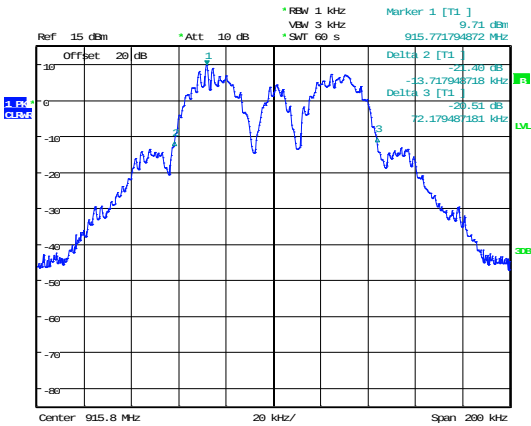


Date: 16.MAY.2014 15:11:52

20dB Bandwidth 915.8MHz

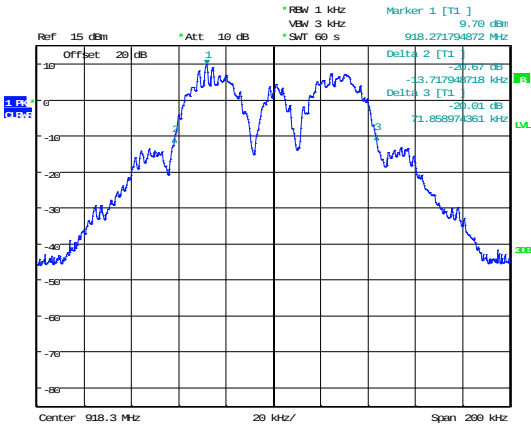

Date: 16.MAY.2014 15:14:05


20dB Bandwidth 918.3MHz

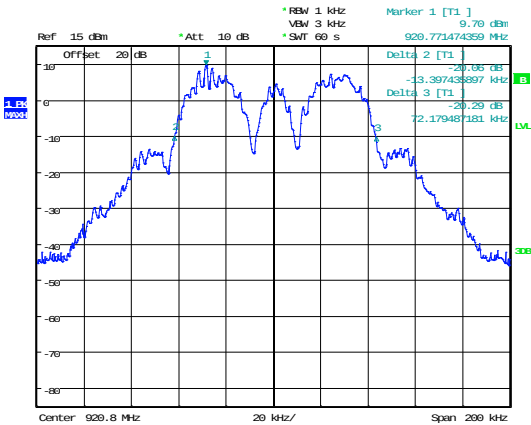

Date: 16.MAY.2014 15:16:29


20dB Bandwidth 920.8MHz

99% Bandwidth

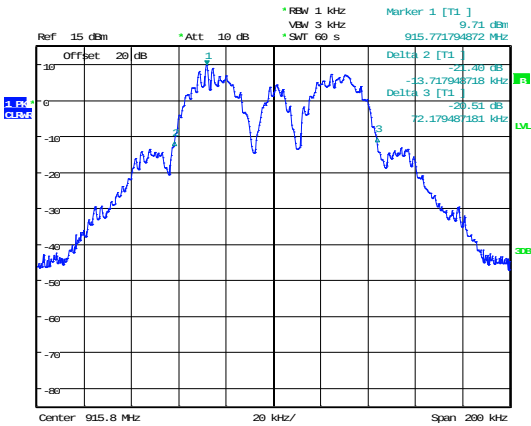


Date: 16.MAY.2014 15:11:52

99% Bandwidth 915.8MHz

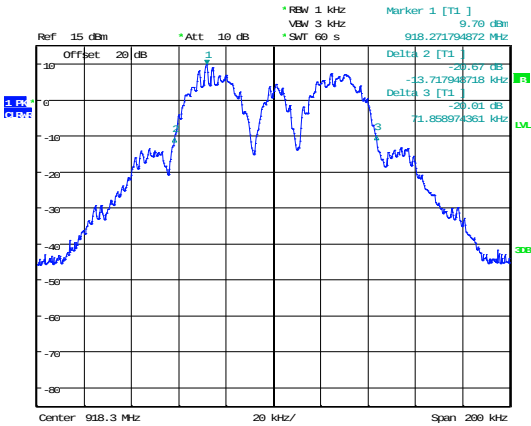

Date: 16.MAY.2014 15:14:05


99% Bandwidth 918.3MHz

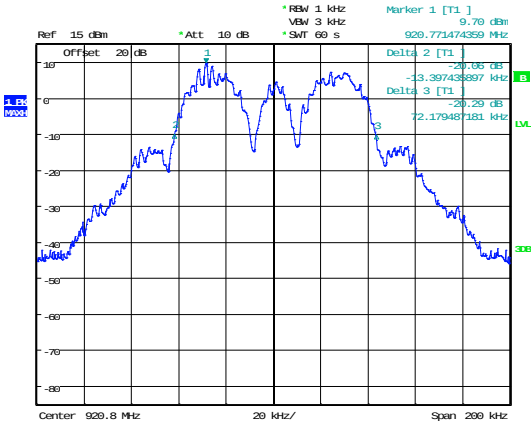

Date: 16.MAY.2014 15:16:29


99% Bandwidth 920.8MHz

Radiated Transmitter Emissions – 915.8MHz

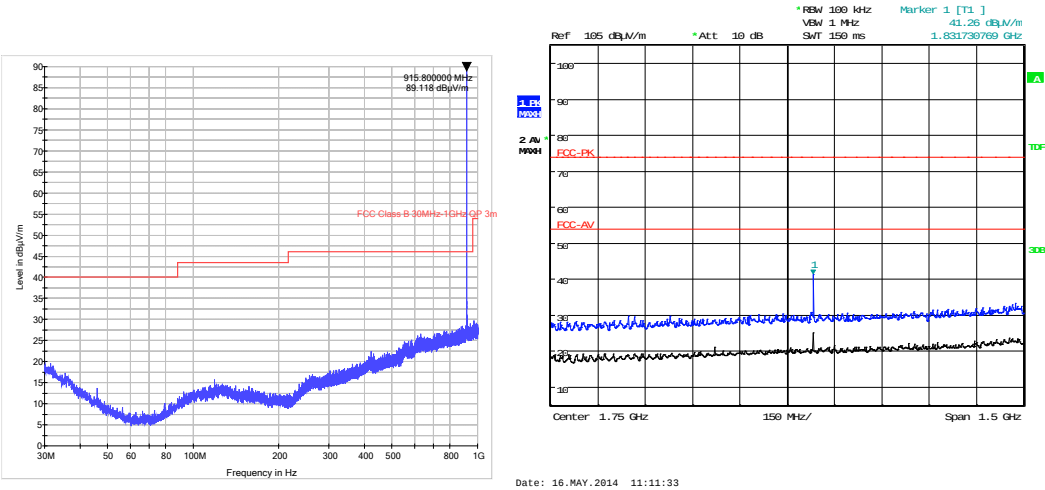

30MHz – 1GHz


1GHz – 2.5GHz

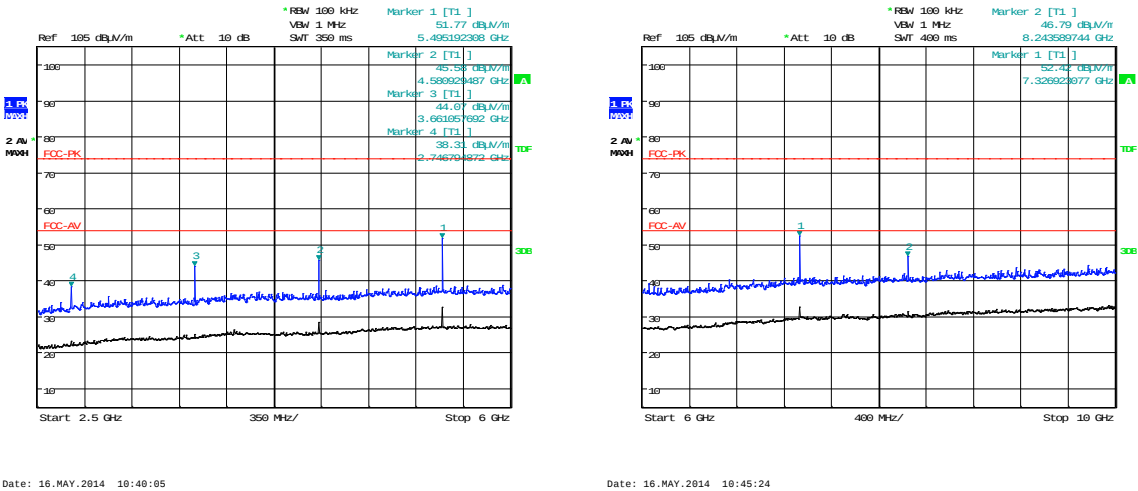


2.5GHz – 6GHz

6GHz – 10GHz

Radiated Transmitter Emissions – 918.3MHz

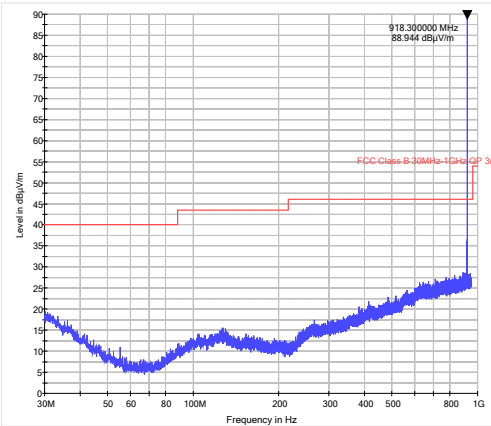


30MHz – 1GHz

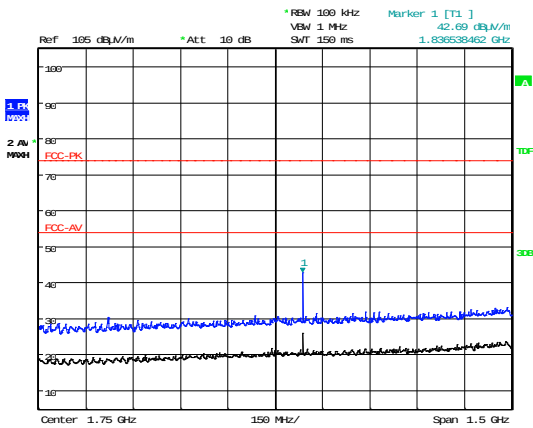


Date: 16.MAY.2014 11:14:11

1GHz – 2.5GHz

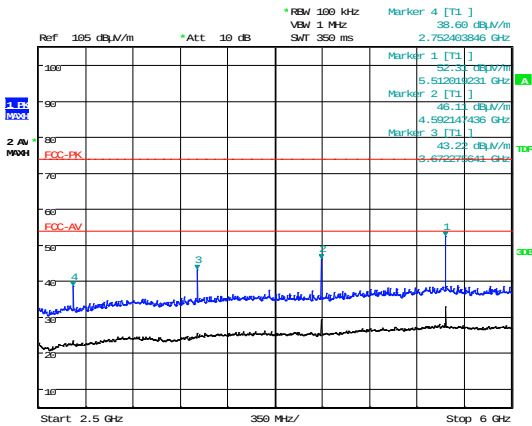

Date: 16.MAY.2014 10:52:56


2.5GHz – 6GHz

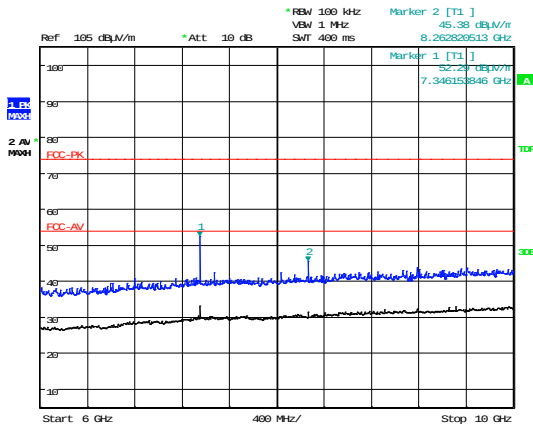


Date: 16.MAY.2014 10:55:42

6GHz – 10GHz

Radiated Transmitter Emissions – 920.8MHz

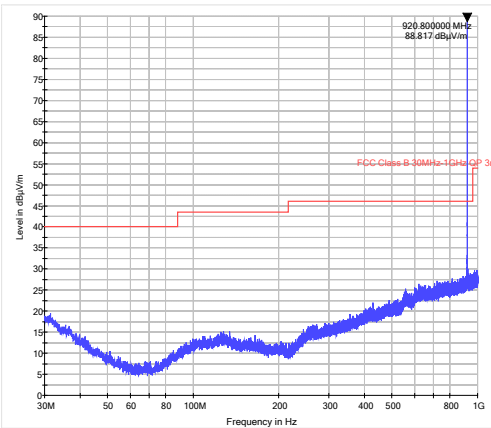


30MHz – 1GHz

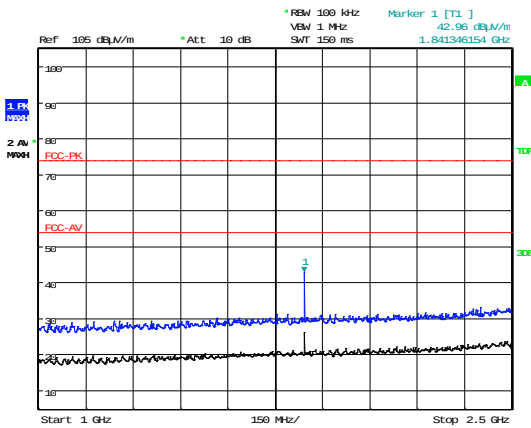


Date: 16.MAY.2014 11:10:25

1GHz – 2.5GHz

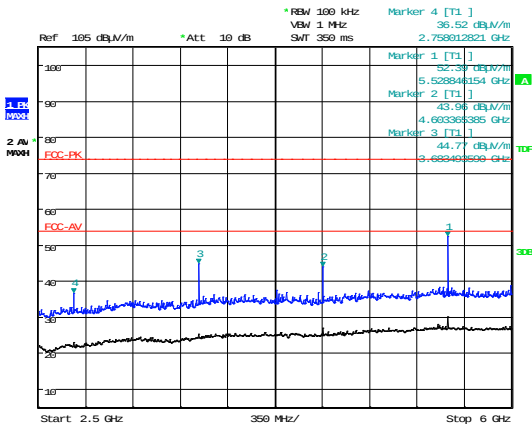

Date: 16.MAY.2014 10:59:21


2.5GHz – 6GHz

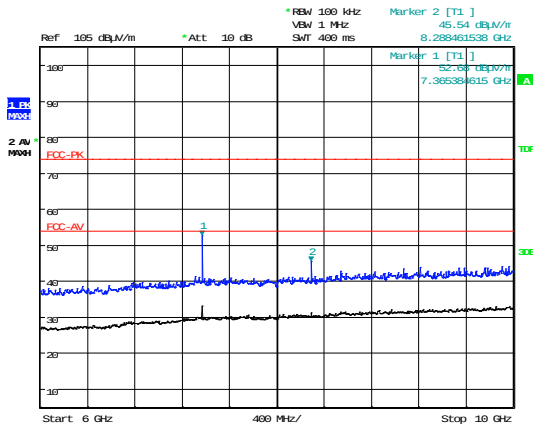


Date: 16.MAY.2014 10:56:57

6GHz – 10GHz

Unintentional Radiated Emissions – 915.8MHz

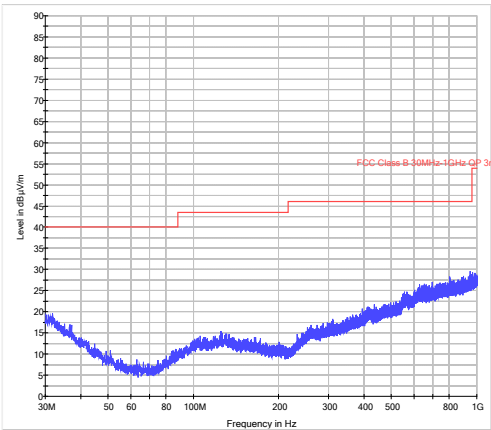


30MHz – 1GHz

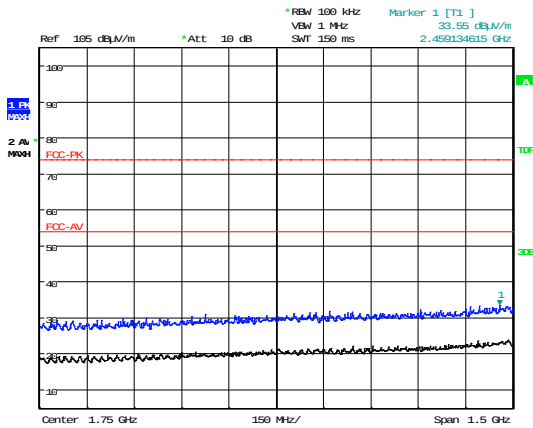


1GHz – 2.5GHz

Date: 16.MAY.2014 11:16:25

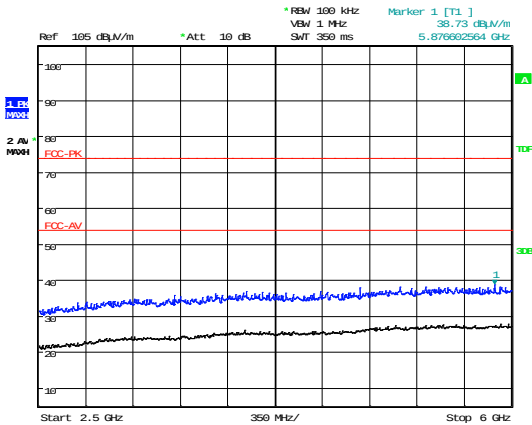

2.5GHz – 6GHz



Date: 16.MAY.2014 11:17:17

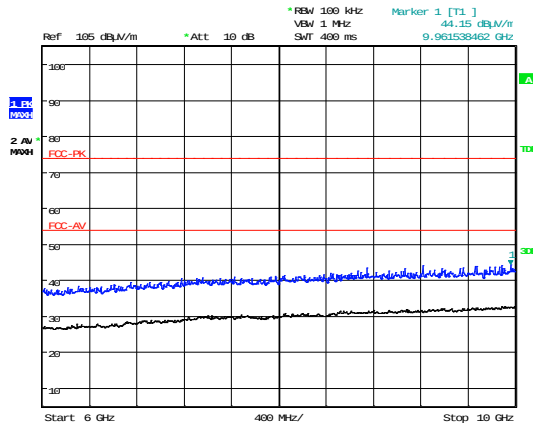


6GHz – 10GHz

Date: 16.MAY.2014 11:17:53

Unintentional Radiated Emissions – 918.3MHz

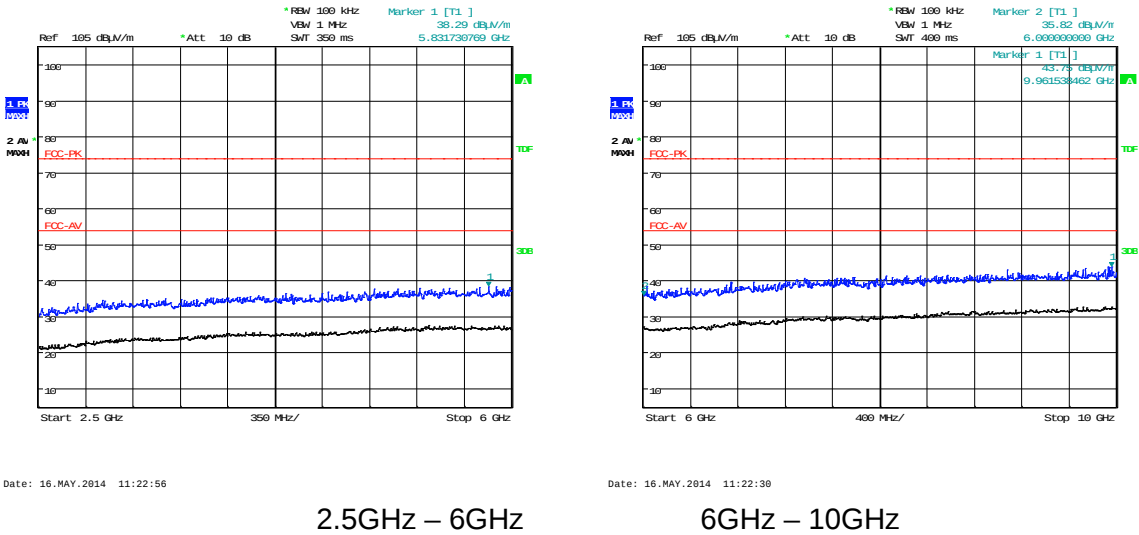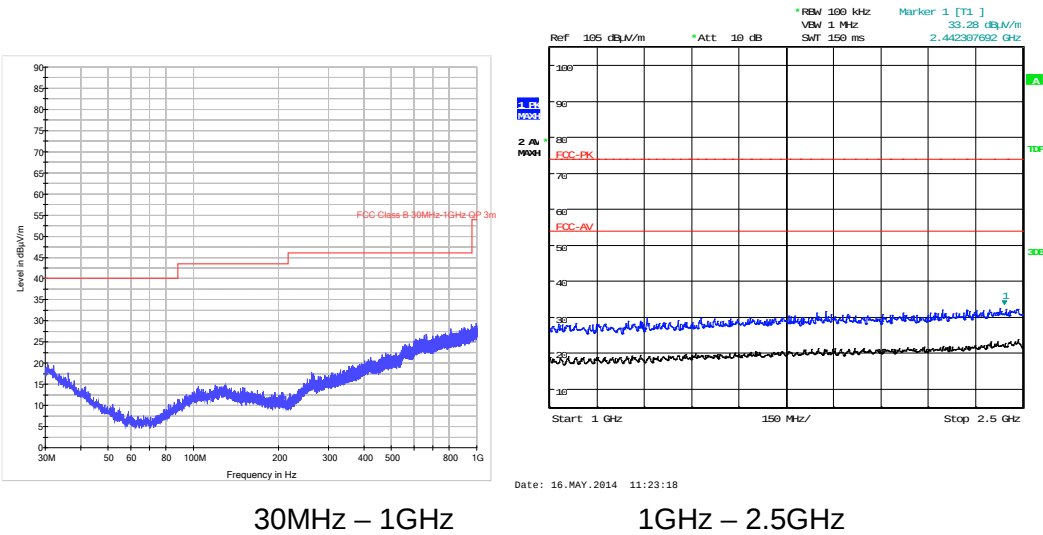


Unintentional Radiated Emissions – 920.8MHz

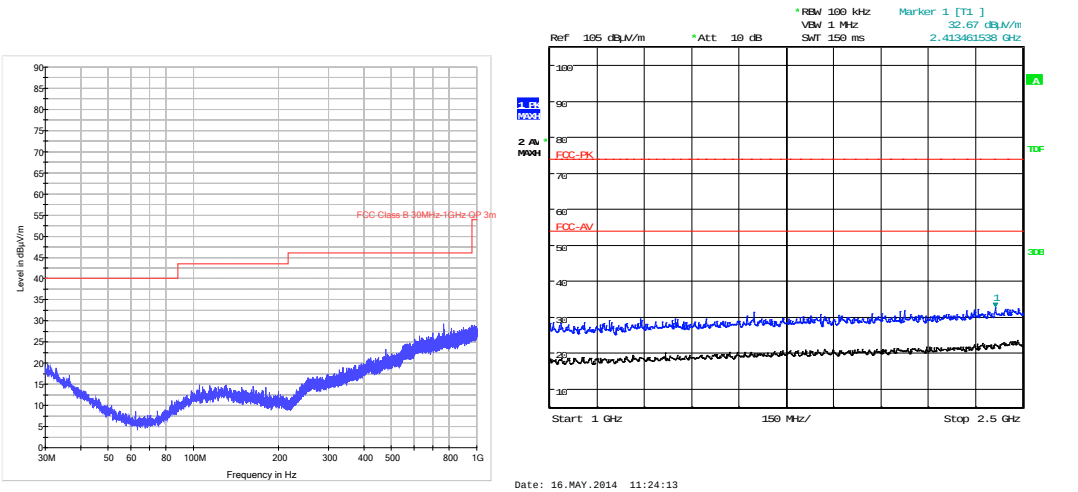

30MHz – 1GHz

1GHz – 2.5GHz

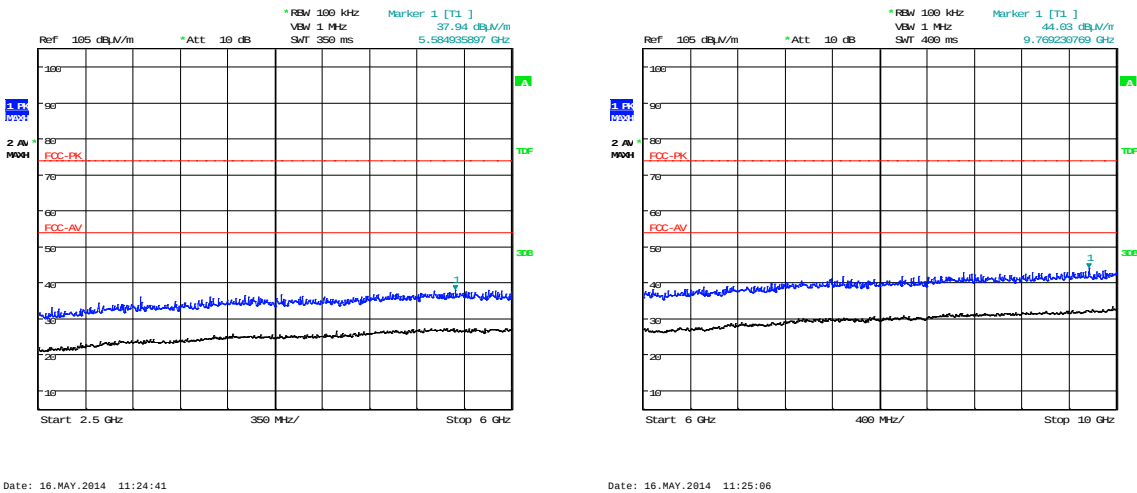

2.5GHz – 6GHz

6GHz – 10GHz

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods – An Overview", which can be supplied by TraC Global upon request.

C1 Test samples

The following samples of the apparatus were submitted by the client for testing:

Sample No.	Description	Identification
S24	Buddi Click System - Wristband	BWB-00000093
S26	Buddi Click System - Wristband	BWB-00000134

C2 EUT operating mode during testing

During testing, the EUT was exercised as described in the following tables:

Test	Description of Operating Mode: Transmit
All tests detailed in this report except receiver radiated spurious emissions	EUT actively transmitting

Test	Description of Operating Mode: Recieve
Receiver radiated spurious emissions	EUT in receive mode

C3 EUT Configuration Information

The EUT was submitted for testing in one single possible configuration.

C4 List of EUT Ports

The tables below describe the termination of EUT ports:

Sample : S24
Tests : Radiated Emissions

Port	Description of Cable Attached	Cable length	Equipment Connected
EUT is a battery powered device with no external ports			

C5 Details of Equipment Used

RFG No	Type	Description	Manufacturer	Date Calibrated.
UH191	CBL611/A	Bilog	Chase	13/12/2012
UH387	ATS	Chamber 1	Rainford EMC	04/07/2013
UH403	ESCI 7	Recevier	R&S	12/08/2013
REF909	FSU26	Spectrum Analyser	R&S	12/02/2014
UH281	FSU46	Spectrum Analyser	R&S	26/02/2014

Appendix D:

Additional Information

Appendix E:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement (Front view)
2. Radiated electric field emissions arrangement (Close up)

Photograph 1



Photograph 2



Appendix F:**MPE Calculation**

OET Bulletin No. 65, Supplement C 01-01

47 CFR §§1.1307, 2.1091 and RSS-102

Radio frequency radiation exposure evaluation: mobile devices.

For purposes of these requirements mobile devices are defined by the FCC and Industry Canada as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits. As the 20cm separation specified under FCC and Industry Canada rules may not be achievable under normal operation of the EUT, an RF exposure calculation is needed to show the minimum distance required to be less than 0.6mW/cm² (60W/m² for Industry Canada) power density limit, as required under FCC and IC rules

Prediction of MPE limit at a given distance

Equation from page 20 of OET Bulletin 65, Edition 97-01

$$S = \frac{1.64ERP}{4\pi R^2} \text{ re - arranged } R = \sqrt{\frac{1.64ERP}{S 4\pi}}$$

where:

S = power density

R = distance to the centre of radiation of the antenna

ERP = EUT Maximum power

Result

Prediction Frequency (MHz)	Maximum ERP (mW)	Power density limit (S) (mW/cm ²)	Distance (R) cm required to be less than 0.6mW/cm ²
915.8	0.22	0.61	0.22

