

Project Name : WB2200

Card Bus wireless LAN compliant with 802.11b
Designer : Bright Yeh

Index


Page 1	*Index *Revision History	Page 2	BLOCK	Page 3	Interface & Power
Page 4	BASEBAND	Page 5	TRANSCEIVER		

Revision History

Date	Description	Revision
2003.06.16	L11 Change to 1206, L12 change to 0805, R14.2 VCCA change to L11.1 (VCC) Add a resistor R43 between L11.1 (VCC) and D1, D2 change R14 to 2.9K and R15 to 4K from 2.7K.	X10
2003.08.18	1. Add a 125 with put on 0 ohm for option for OSC (U2) and not install L1. 2. Add L19 470pF for best matching network. 3. Put 180H on L21 form not installed for best matching network. 4. change L20 to 27nH form 39nH for best matching network. 5. change L14 and L15 to 2n7H form 2n2H and 4n7H for best matching network. 6. change R14 to 1k62 form 2k9 for best transmission power level. 7. change R15 to 3k3 form 4k for best transmission power level. 8. remove C32 form 15pF for cost down.	X20
2003.10.27	Change components value below for solve reflection problems. R18=>4.3K; R21=>3.9K; C65->15nF; C51=>330PF; C52=>27P; L16->47nH; L17->47nH.	A1

AboCom System, Inc.

Title			WB2200 INDEX		
Size	Document Number	Rev			
B		A1			
Date	Monday, October 27, 2003	Sheet	1	of	5

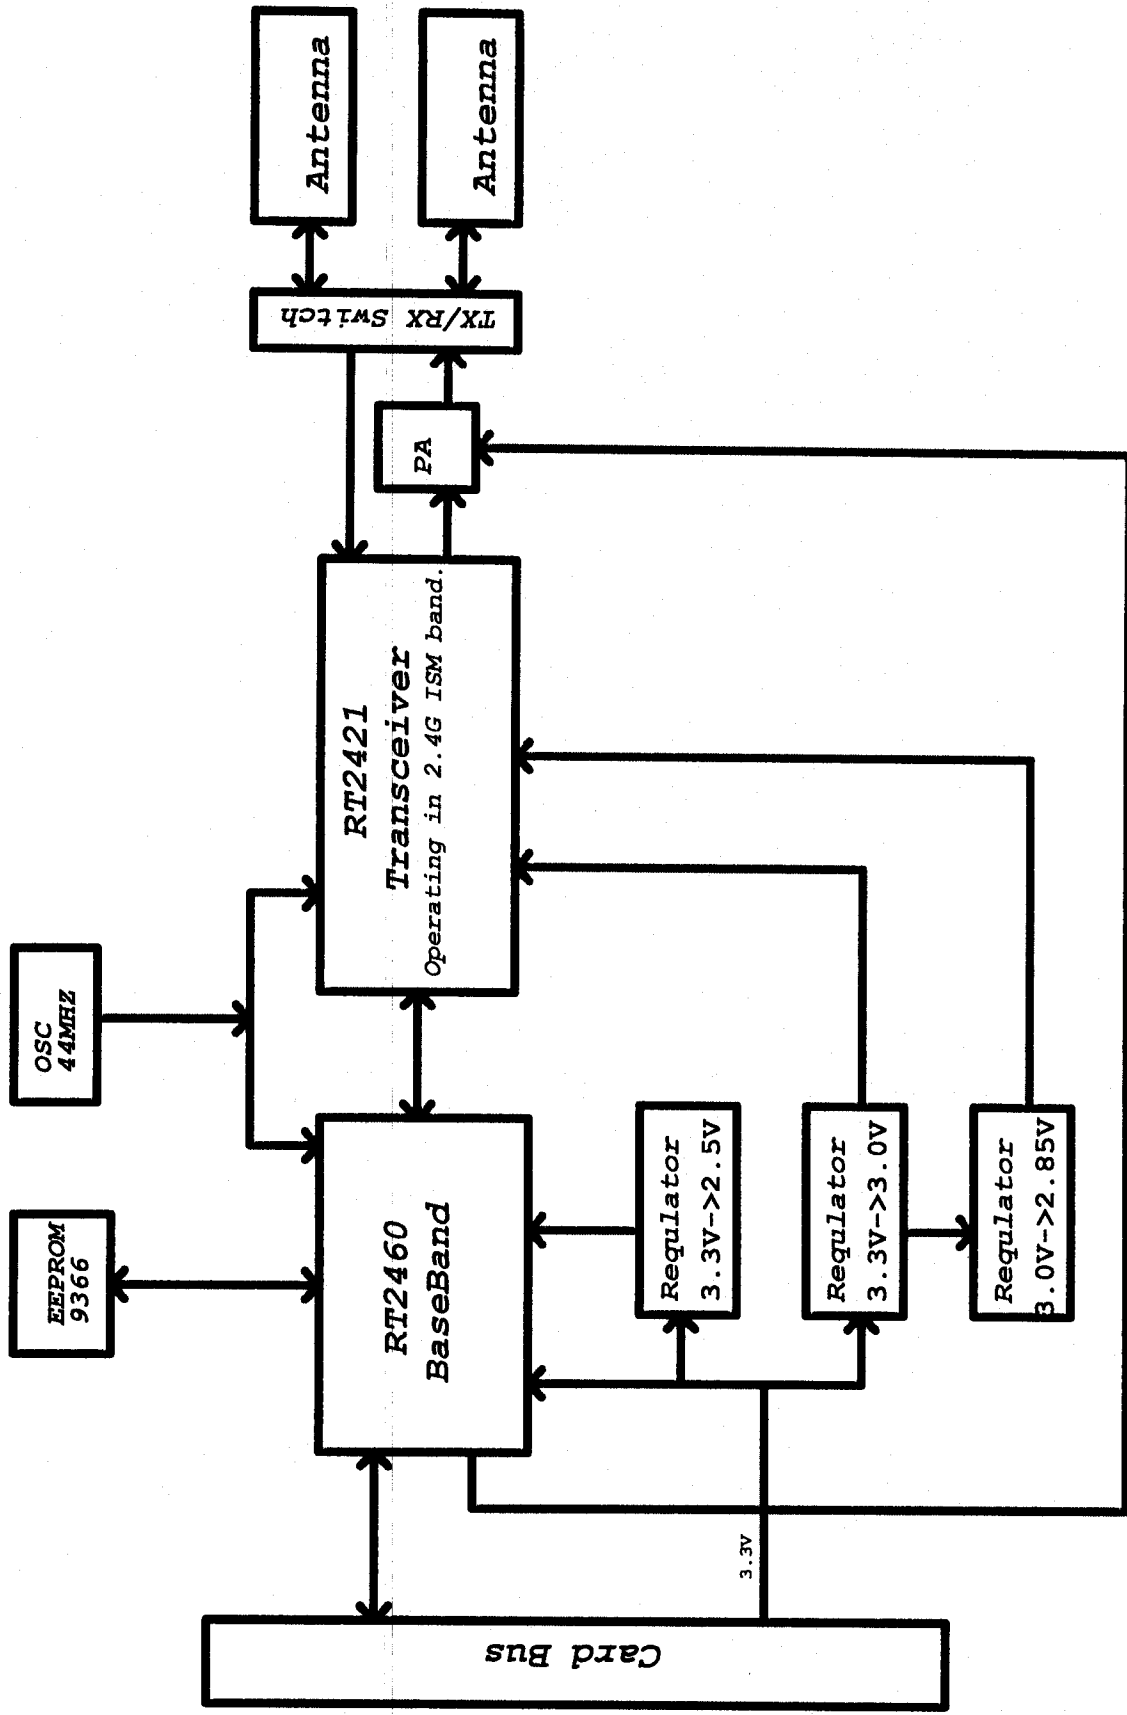

 AboCom Systems, Inc.				
Title				
WB2200_BLOCK				
Size Document Number				
B				Rev A1
Date	Monday, October 27, 2003		Sheet	2 of 5