



REPORT No.: SZ23040073W01

TEST REPORT

APPLICANT : Reliance Communications LLC

PRODUCT NAME : Orbic TAB10R 4G

MODEL NAME : RC10RLT

BRAND NAME : Orbic

FCC ID : 2ABGH-RC10RLT

STANDARD(S) : 47 CFR Part 2
47 CFR Part 22
47 CFR Part 24
47 CFR Part 27

RECEIPT DATE : 2023-05-10

TEST DATE : 2023-05-22 to 2023-07-21

ISSUE DATE : 2023-08-18



Edited by: Li Huaijie
Li Huaijie (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL-1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Maximum E.R.P./E.I.R.P. and Emission Designator	5
1.4. Test Standards and Results	5
1.5. Environmental Conditions	7
2. Summary Test Results And Description	8
2.1. Conducted RF Output Power	8
2.2. Peak to Average Ratio	11
2.3. Occupied Bandwidth	15
2.4. Frequency Stability	20
2.5. Conducted Out of Band Emissions	23
2.6. Band Edge	27
2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements	30
2.8. Radiated Out of Band Emissions	34
Annex A Test Uncertainty	73
Annex B Testing Laboratory Information	74

Change History		
Version	Date	Reason for change
1.0	2023-08-18	First edition





1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Reliance Communications LLC
Applicant Address:	555 Wireless Blvd. Hauppauge, NY 11788, United States
Manufacturer:	Unimaxcomm
Manufacturer Address:	35F,HBC HuiLong Center Building-II Minzhi Street,Longhua, Shenzhen, P.R. China 518110

1.2. Equipment Under Test (EUT) Description

Product Name:	Orbic TAB10R 4G	
Sample No.:	2#,5#	
Hardware Version:	T1003K_MB_V1.0	
Software Version:	ORB10RLT_v1.0.17_BVT-NA	
Modulation Type:	WCDMA Mode with QPSK Modulation HSDPA/DC- HSDPA Mode with QPSK Modulation HSUPA Mode with QPSK Modulation HSPA+ Mode with 16QAM Modulation	
Operating Frequency Range:	WCDMA Band V	Tx: 824MHz-849MHz
		Rx: 869MHz-894MHz
	WCDMA Band IV	Tx: 1710MHz-1755MHz
		Rx: 2110MHz-2155MHz
	WCDMA Band II	Tx: 1850MHz-1910MHz
		Rx: 1930MHz-1990MHz
Antenna Type:	PIFA Internal Antenna	
Antenna Gain:	WCDMA Band V:	-1.57dBi
	WCDMA Band IV:	-3.66dBi
	WCDMA Band II:	-1.50dBi
Accessory Information:	Battery	
	Brand Name:	Orbic
	Model No.:	BTE-6001
	Serial No.:	N/A



Accessory Information:	Capacity:	6100 mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.40V
	Manufacturer:	Huizhou Highpower Technology Co., Ltd
	AC Adapter	
	Brand Name:	N/A
	Model No.:	TPA-10S120150UU01
	Serial No.:	N/A
	Rated Output:	5.0V=3.0A or 9.0V=2.0A or 12.0V=1.5A
	Rated Input:	100-240V~50/60Hz, 0.6A
	Manufacturer:	Shenzhen Tianyin Electronics Co.,Ltd
	USB Cable:	
	Model No.:	USB2.0 TYPE A TO C L=1M (Black)
	Manufacturer:	HUIZHOU WASHIN ELECTRONICS CO.,LTD

Note 1: The transmitter (Tx) frequency arrangement of the WCDMA Band V used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4182(836.4MHz) and 4233 (846.6MHz).

Note 2: The transmitter (Tx) frequency arrangement of the WCDMA IV band used by the EUT can be represented with the formula $F(n)=1712.4+0.2*(n-1312)$, $1312 \leq n \leq 1513$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 1312 (1712.4MHz), 1413 (1732.6MHz) and 1513 (1752.6MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA Band II used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 4: All test modes and data rates were considered and evaluated respectively by performing full test. Test modes are chosen to be reported as the worst case below:

WCDMA mode for WCDMA band V;

WCDMA mode for WCDMA band IV;

WCDMA mode for WCDMA band II;

Note 5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

Test Mode	Maximum E.R.P./E.I.R.P. (W)	Emission Designator
WCDMA Band V	0.296	4M14F9W
WCDMA Band IV	0.497	4M16F9W
WCDMA Band II	0.089	4M17F9W

1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22, Part 24 and Part 27 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22	Public Mobile Services
3	47 CFR Part 24	Personal Communications Services
4	47 CFR Part 27	Miscellaneous Wireless Communications Services

WCDMA Band V			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7W	PASS
Peak-Average Ratio	N/A	N/A	N/A
Bandwidth	§2.1049	OBW: No limit EBW: No limit	PASS
Band Edges Compliance	§2.1051, §22.917(a)(b)	Refer to section 2.6	PASS
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	≤ -13 dBm/1MHz	PASS
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	≤ -13 dBm/1MHz	PASS
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm	PASS





WCDMA Band IV			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP $\leq$ 1 W	PASS
Peak-Average Ratio	§22.913(d)(5)	Limit $\leq$ 13 dB	PASS
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	PASS
Band Edges Compliance	§2.1051, §27.53(h)(1) §27.53(h)(3)(i)	Refer to section 2.6	PASS
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)(1)	$\leq$ -13 dBm/1MHz	PASS
Field Strength of Spurious Radiation	§2.1053, §27.53(h)(1)	$\leq$ -13 dBm/1MHz.	PASS
Frequency Stability	§2.1055, §27.54	No limit	N/A

WCDMA Band II			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP $\leq$ 2 W	PASS
Peak-Average Ratio	§24.232(d)	Limit $\leq$ 13 dB	PASS
Bandwidth	§2.1049	OBW: No limit EBW: No limit	PASS
Band Edges Compliance	§2.1051, §24.238(a)(b)	Refer to section 2.6	PASS
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)(b)	$\leq$ -13 dBm/1MHz	PASS
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	$\leq$ -13 dBm/1MHz	PASS
Frequency Stability	§2.1055, §24.235	No limit	N/A





Test detailed items/section required by FCC rules and results are as below:

Description	Test Date	Test Engineer	Result	Method determination/Remark
Conducted RF Output Power	2023/05/22	Tan Xiaowei Li Huaijie	PASS	No deviation
Peak -Average Ratio	2023/05/22	Li Huaijie	PASS	No deviation
Occupied Bandwidth	2023/05/22	Li Huaijie	PASS	No deviation
Frequency Stability	2023/05/22	Li Huaijie	PASS	No deviation
Conducted Out of Band Emissions	2023/05/22	Li Huaijie	PASS	No deviation
Band Edge	2023/05/22	Li Huaijie	PASS	No deviation
Transmitter Radiated Power (E.I.P.R./E.R.P.)	2023/05/22	Li Huaijie	PASS	No deviation
Radiated Out of Band Emissions	2023/07/21	Li hanbin	PASS	No deviation
Note 1: The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03r01 and ANSI/TIA-603-E-2016. Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table. Note 3: The declared of product specification for EUT presented in the report are provided by manufacturer and the test laboratory is not responsible for the accuracy of the information. Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.				

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. Summary Test Results And Description


2.1. Conducted RF Output Power

2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2. Test Description

Test Setup:

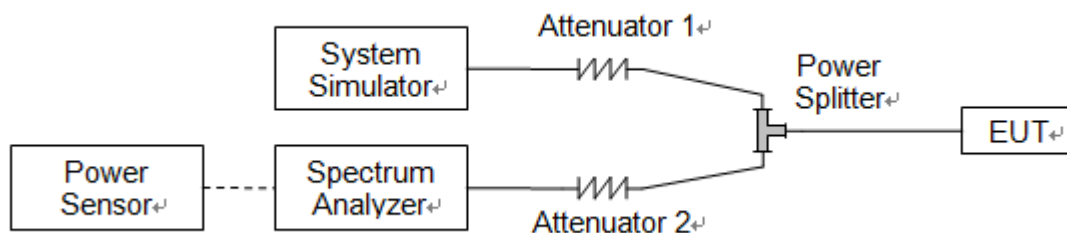

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



**2.1.3.Test Results**

WCDMA Band V	Average Power (dBm)		
TX Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2Kbps	23.13	23.22	23.17
HSDPA Subtest-1	22.44	22.34	22.46
HSDPA Subtest-2	22.11	22.14	22.19
HSDPA Subtest-3	21.10	21.21	21.16
HSDPA Subtest-4	20.71	20.79	20.95
DC-HSDPA Subtest-1	22.83	22.76	22.87
DC-HSDPA Subtest-2	22.83	22.77	22.90
DC-HSDPA Subtest-3	22.32	22.28	22.35
DC-HSDPA Subtest-4	22.33	22.30	22.37
HSUPA Subtest-1	22.45	22.39	22.54
HSUPA Subtest-2	22.44	22.54	22.54
HSUPA Subtest-3	22.42	22.54	22.54
HSUPA Subtest-4	22.14	22.54	22.54
HSUPA Subtest-5	22.57	22.54	22.54
HSPA+ (16QAM) Subtest-1	22.66	22.71	22.63

WCDMA Band IV	Average Power (dBm)		
TX Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2Kbps	23.24	23.30	23.17
HSDPA Subtest-1	22.61	22.52	22.40
HSDPA Subtest-2	21.25	22.23	21.94
HSDPA Subtest-3	21.10	21.49	21.13
HSDPA Subtest-4	21.20	21.42	21.40
DC-HSDPA Subtest-1	22.97	22.93	22.91
DC-HSDPA Subtest-2	22.88	22.83	22.98
DC-HSDPA Subtest-3	22.69	22.64	22.52
DC-HSDPA Subtest-4	22.70	22.62	22.49
HSUPA Subtest-1	22.60	22.52	22.61
HSUPA Subtest-2	20.65	20.40	20.36
HSUPA Subtest-3	21.56	21.53	21.29
HSUPA Subtest-4	20.66	20.40	20.40
HSUPA Subtest-5	22.65	22.44	22.39





HSPA+ (16QAM) Subtest-1	22.61	22.63	22.44
-------------------------	-------	-------	-------

WCDMA Band II	Average Power (dBm)		
TX Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2Kbps	23.19	23.22	23.16
HSDPA Subtest-1	21.94	22.07	22.01
HSDPA Subtest-2	20.66	21.81	21.74
HSDPA Subtest-3	19.37	20.87	20.67
HSDPA Subtest-4	18.26	20.56	20.60
DC-HSDPA Subtest-1	22.49	22.54	22.49
DC-HSDPA Subtest-2	22.48	22.54	22.54
DC-HSDPA Subtest-3	22.00	22.05	22.03
DC-HSDPA Subtest-4	21.90	22.05	22.05
HSUPA Subtest-1	21.95	22.03	22.05
HSUPA Subtest-2	19.97	20.02	19.92
HSUPA Subtest-3	20.89	21.00	20.97
HSUPA Subtest-4	19.98	20.00	20.05
HSUPA Subtest-5	21.98	22.01	21.93
HSPA+ (16QAM) Subtest-1	22.51	22.41	22.50




2.2. Peak to Average Ratio

2.2.1. Requirement

According to FCC 24.232(d) and 27.50(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2. Test Description

Test Setup:

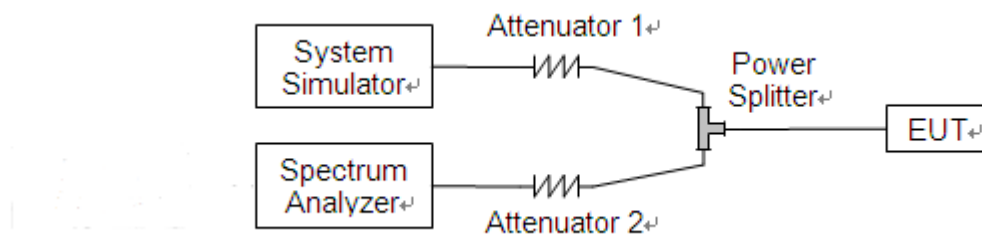

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2.2.3. Test procedure

1. For GSM/EDGE operating mode:
 - a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
 - b. Set EUT in maximum output power, and triggered the bust signal.
 - c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.
2. For UMTS operating mode:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.






**2.2.4. Test Result****A. Test Verdict:**

WCDMA Band IV					
Mode	Channel	Frequency (MHz)	Peak to Average ratio (dB)	Limit (dB)	Verdict
WCDMA	1312	1712.4	2.43	13	PASS
	1413	1732.6	2.57		PASS
	1513	1752.6	2.63		PASS

WCDMA Band II					
Mode	Channel	Frequency (MHz)	Peak to Average ratio (dB)	Limit (dB)	Verdict
WCDMA	9262	1852.4	2.84	13	PASS
	9400	1880.0	2.74		PASS
	9538	1907.6	2.81		PASS

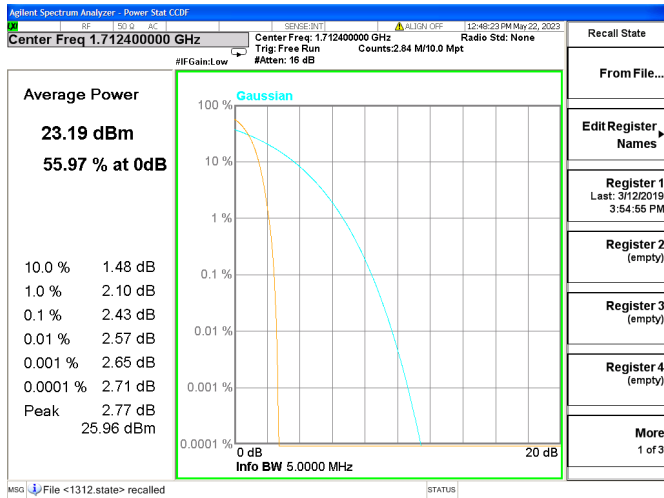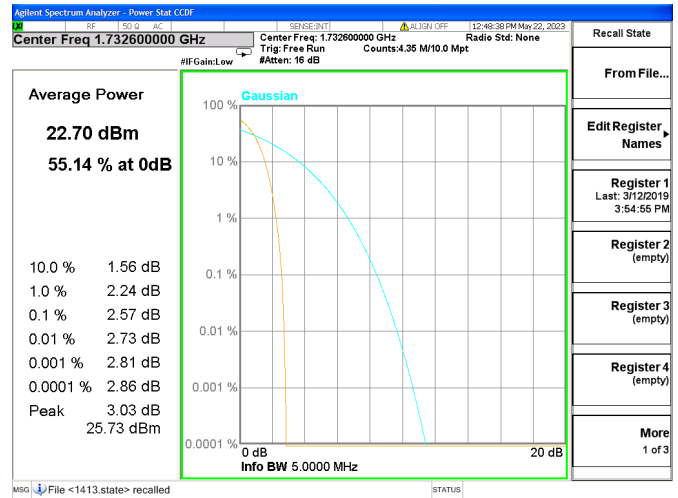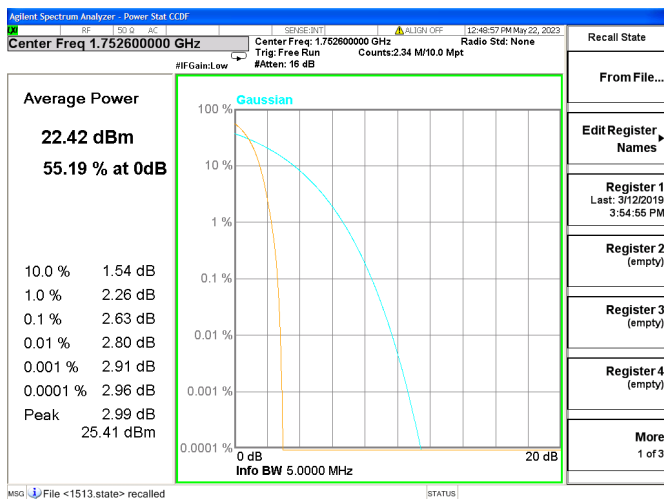


**WCDMA Band IV, CH1312, 1712.4MHz****WCDMA Band IV, CH1413, 1732.6MHz****WCDMA Band IV, CH1513, 1752.6MHz**

N/A







WCDMA Band II, CH9262, 1852.4MHz

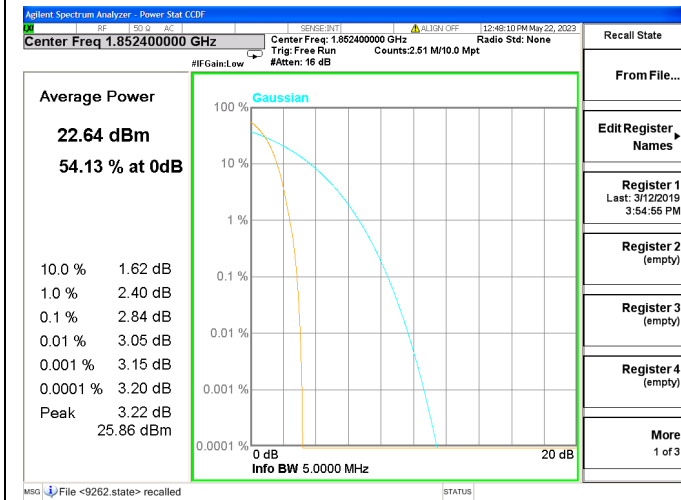

WCDMA Band II, CH9400, 1880.0MHz

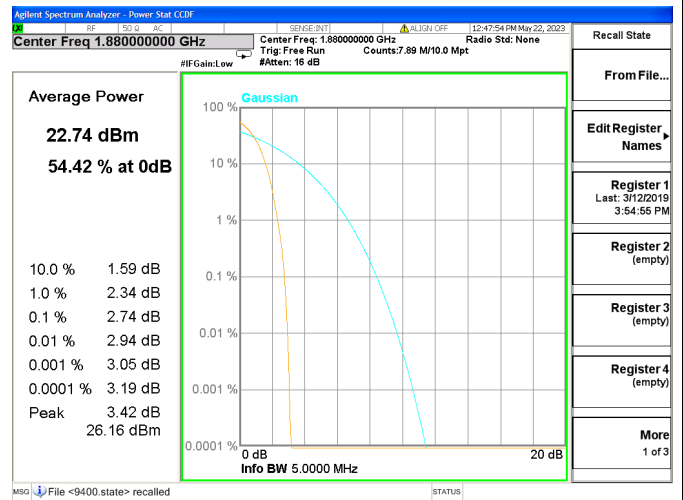

WCDMA Band II, CH9538, 1907.6MHz

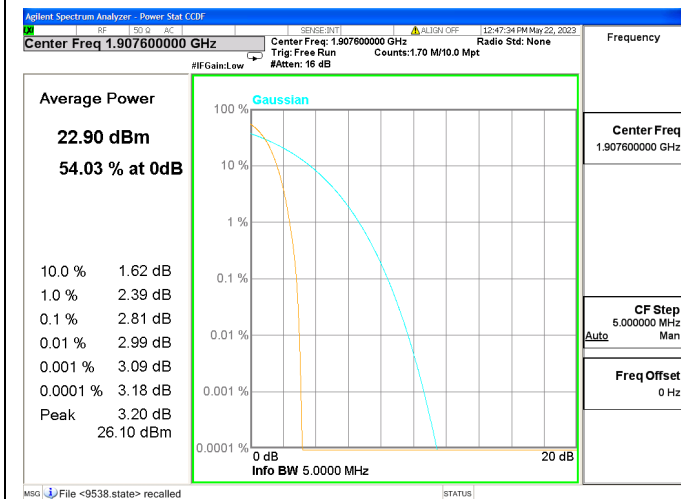

N/A




2.3. Occupied Bandwidth

2.3.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

2.3.2. Test Description

Test Setup:

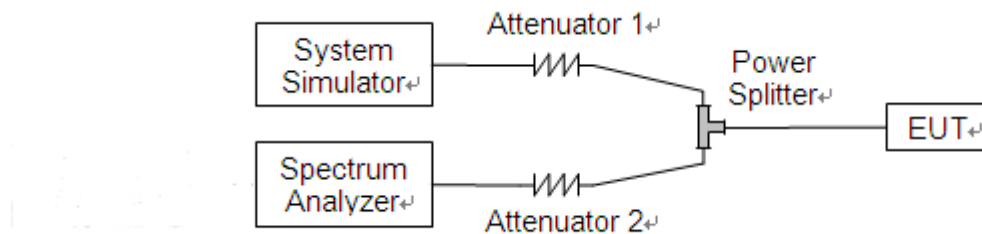

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



**2.3.3.Test Result**

WCDMA Band V				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	4132	826.4	4.14	4.71
	4182	836.4	4.13	4.72
	4233	846.6	4.14	4.73




WCDMA Band IV				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	1312	1712.4	4.16	4.78
	1413	1732.6	4.14	4.77
	1513	1752.6	4.12	4.73

WCDMA Band II				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	9262	1852.4	4.15	4.74
	9400	1880.0	4.17	4.75
	9538	1907.6	4.15	4.75





REPORT No.: SZ23040073W01

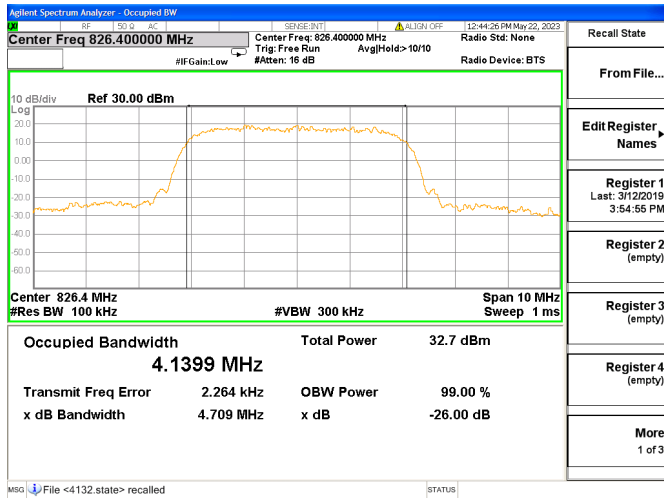
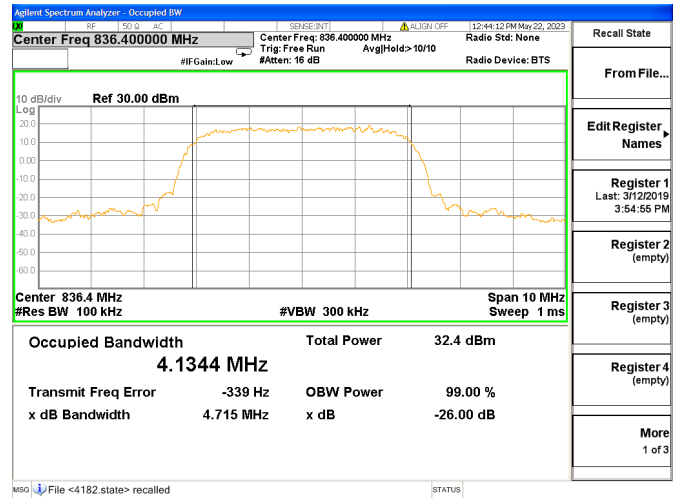
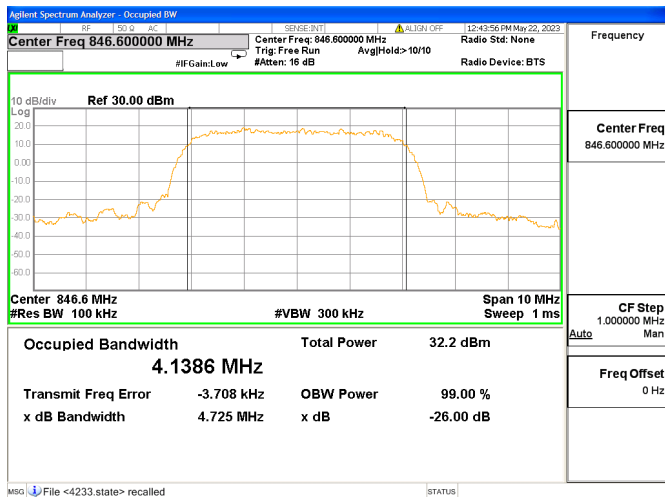
WCDMA Band V, CH4132, 826.4MHz**WCDMA Band V, CH4182, 836.4MHz****WCDMA Band V, CH4233, 846.6MHz**

N/A





REPORT No.: SZ23040073W01

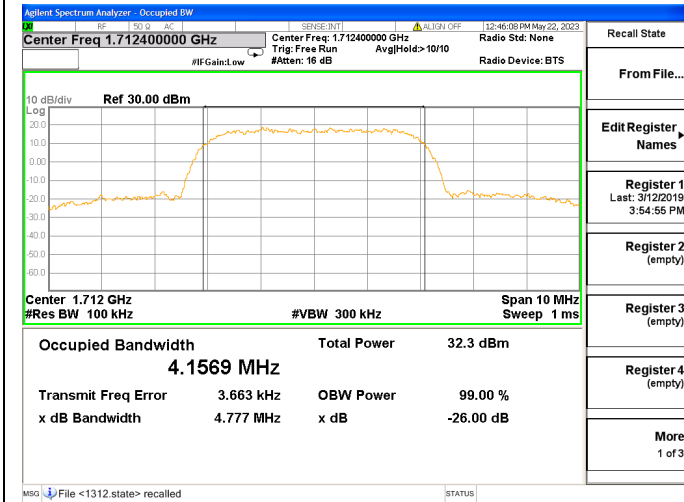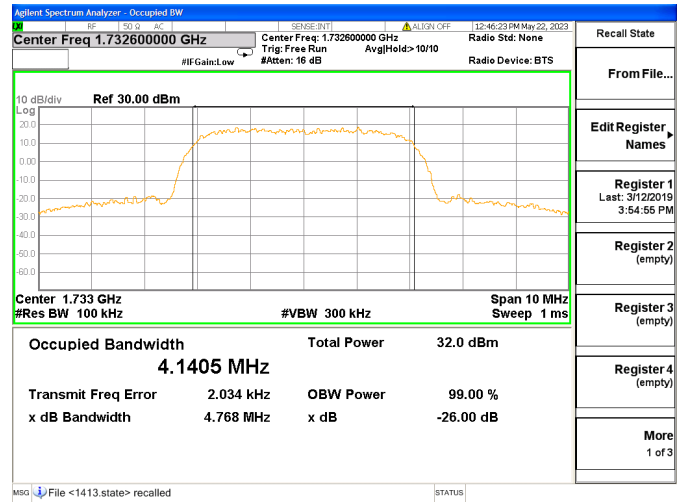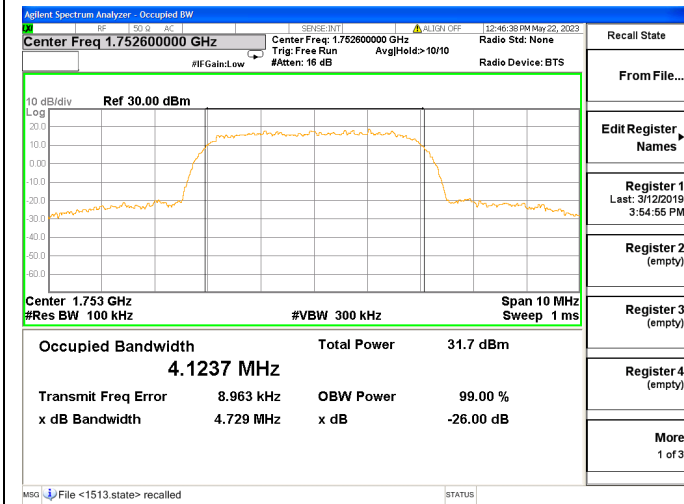
WCDMA Band IV, CH1312, 1712.4MHz**WCDMA Band IV, CH1413, 1732.6MHz****WCDMA Band IV, CH1513, 1752.6MHz**

N/A







WCDMA Band II, CH9262, 1852.4MHz

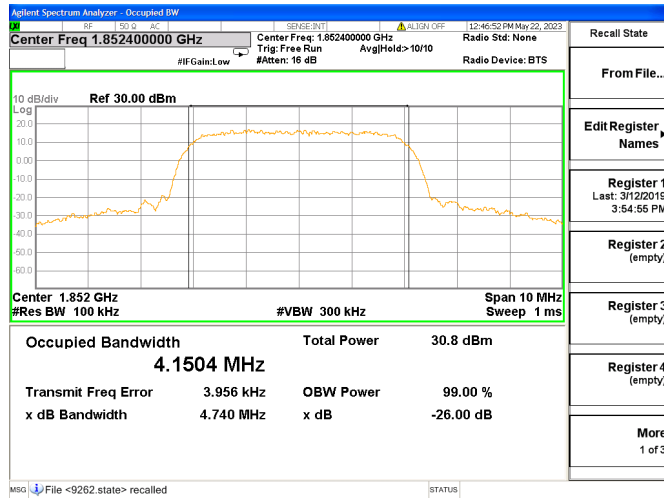

WCDMA Band II, CH9400, 1880.0MHz

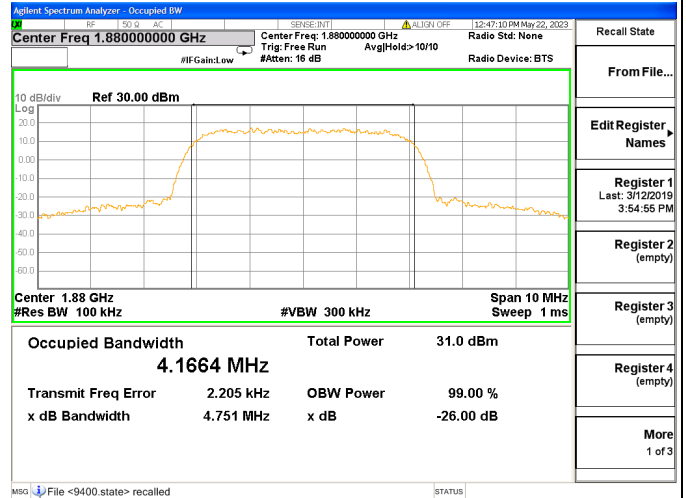

WCDMA Band II, CH9538, 1907.6MHz

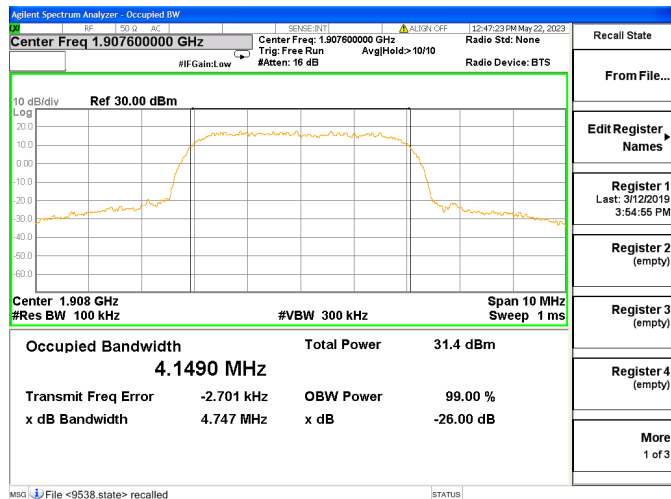

N/A



2.4. Frequency Stability

2.4.1. Requirement


According to FCC section 22.355, 24.235 and 27.54 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Note: The operating temperature of EUT is from -10°C to 45°C , which are specified by the applicant.

2.4.2. Test Description

Test Setup:

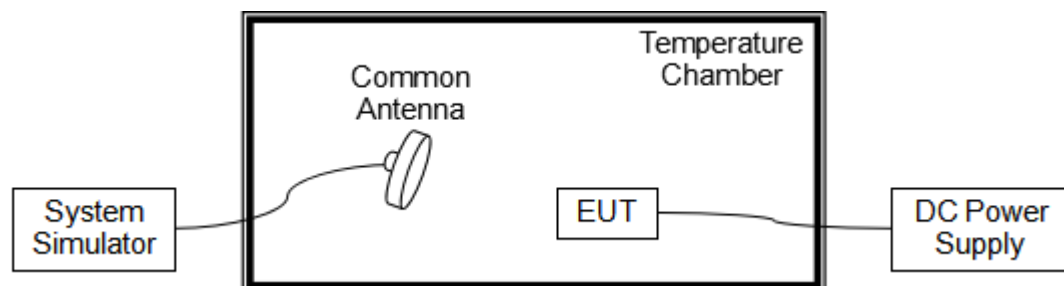

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.





2.4.3.Test Result

The nominal, highest and lowest extreme voltages are separately 3.85V, 4.40V and 3.60V, which are specified by the applicant; the normal temperature here used is 20°C.

WCDMA Band V, Channel 4182, Frequency 836.4MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	17	0.020	PASS
Normal		-10	14	0.017	
Normal		0	21	0.025	
Normal		+10	22	0.026	
Normal		+20	23	0.027	
Normal		+30	-22	-0.026	
Normal		+40	-1	-0.001	
Normal		+45	14	0.017	
High	4.40	+20	12	0.014	
BATT.ENDPOINT	3.60	+20	17	0.020	

WCDMA Band II, Channel 9400, Frequency 1880.0MHz					
Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	20	0.011	PASS
Normal		-10	19	0.010	
Normal		0	18	0.010	
Normal		+10	8	0.004	
Normal		+20	13	0.007	
Normal		+30	14	0.007	
Normal		+40	-21	-0.011	
Normal		+45	6	0.003	
High	4.40	+20	20	0.011	
BATT.ENDPOINT	3.60	+20	5	0.003	





WCDMA Band IV, Channel 1413, Frequency 1732.6MHz Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.85	+20(Ref)	17	0.010	PASS
Normal		-10	17	0.010	
Normal		0	18	0.010	
Normal		+10	16	0.009	
Normal		+20	-2	-0.001	
Normal		+30	17	0.010	
Normal		+40	5	0.003	
Normal		+45	20	0.012	
High	4.40	+20	16	0.009	
BATT.ENDPOINT	3.60	+20	-4	-0.002	




2.5. Conducted Out of Band Emissions

2.5.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.

2.5.2. Test Description

Test Setup:

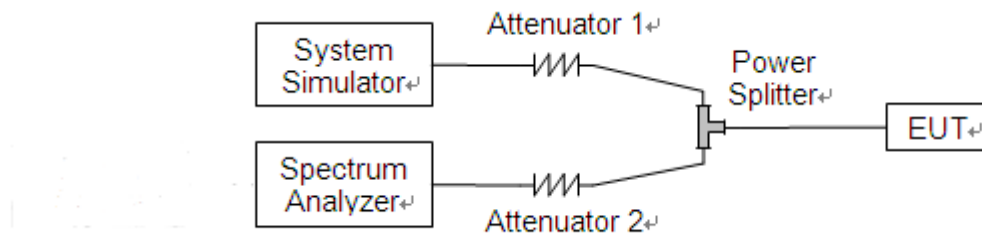


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.






2.5.3. Test Result


WCDMA Band V, CH4132, 826.4MHz

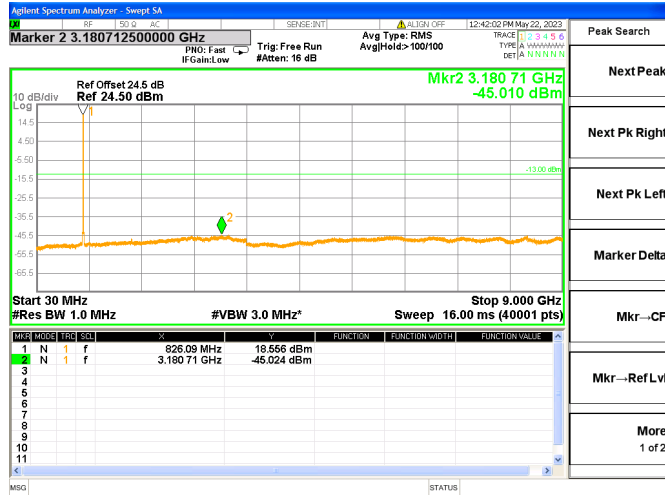

WCDMA Band V, CH4182, 836.4MHz

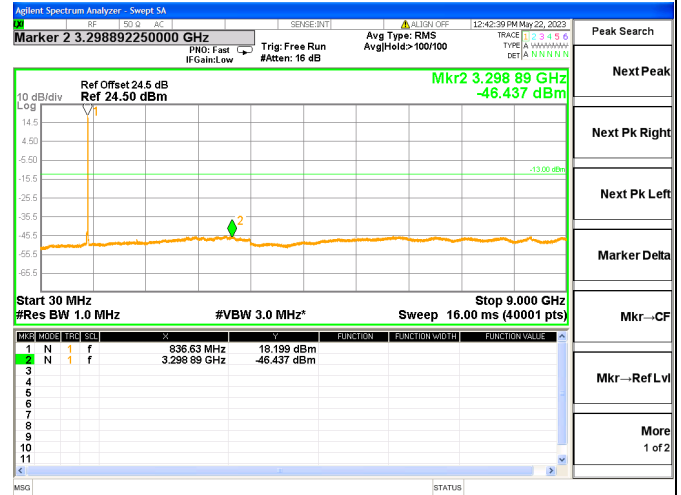

WCDMA Band V, CH4233, 846.6MHz

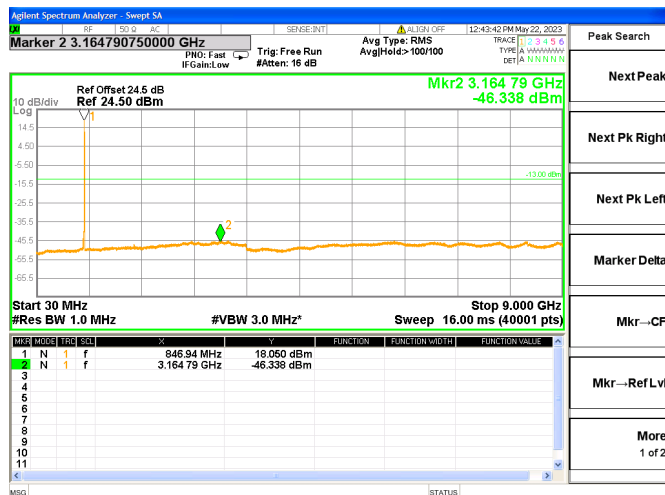


N/A






WCDMA Band IV, CH1312, 1712.4MHz

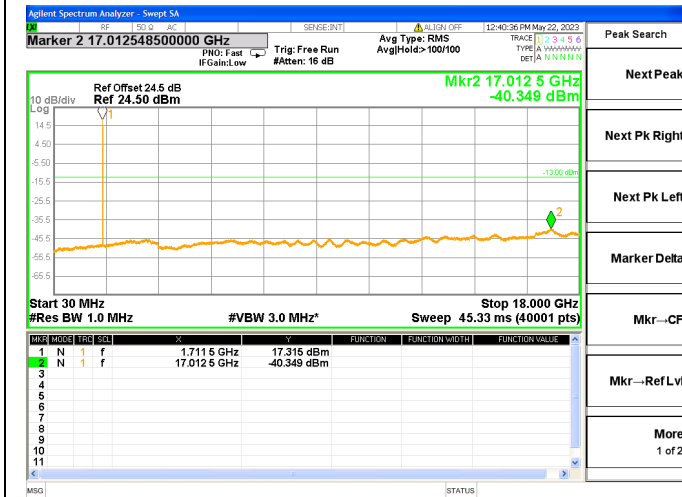

WCDMA Band IV, CH1413, 1732.6MHz



WCDMA Band IV, CH1513, 1752.6MHz

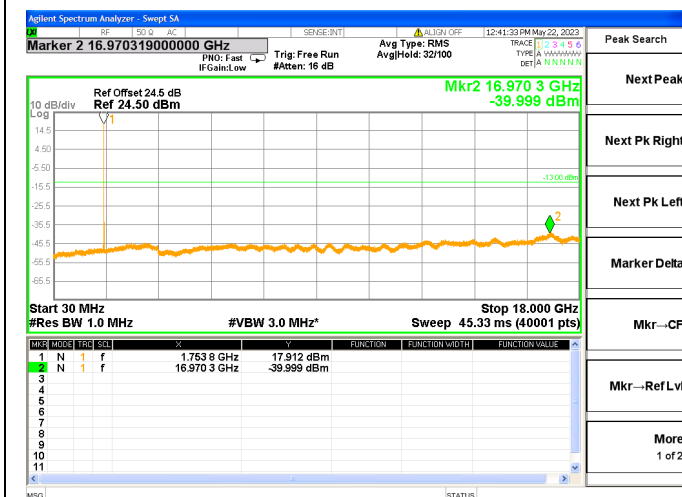


N/A







WCDMA Band II, CH9262, 1852.4MHz

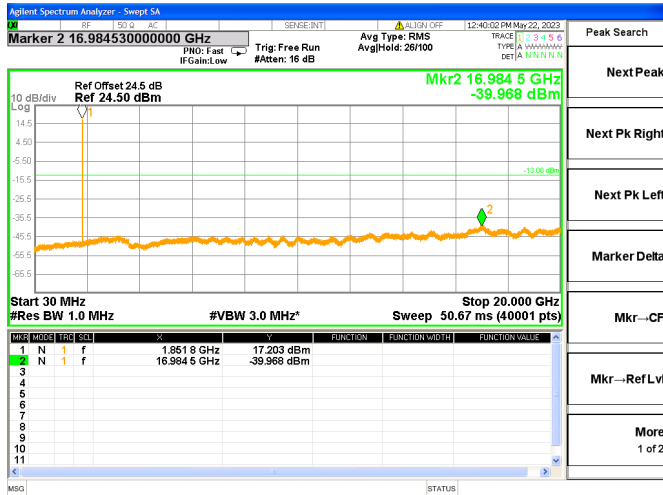

WCDMA Band II, CH9400, 1880.0MHz

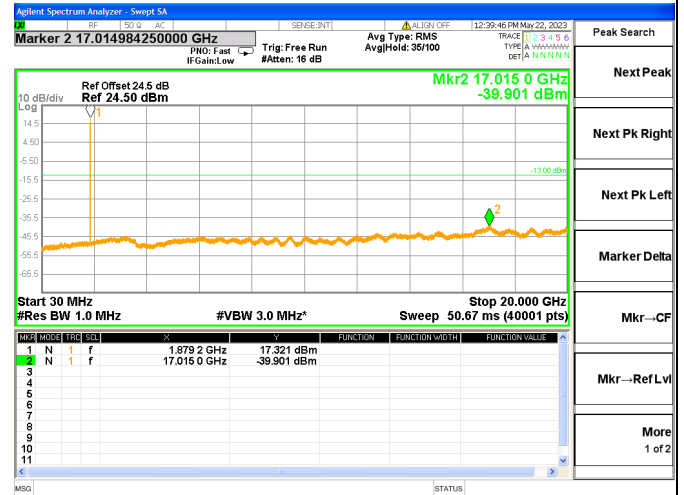

WCDMA Band II, CH9538, 1907.6MHz

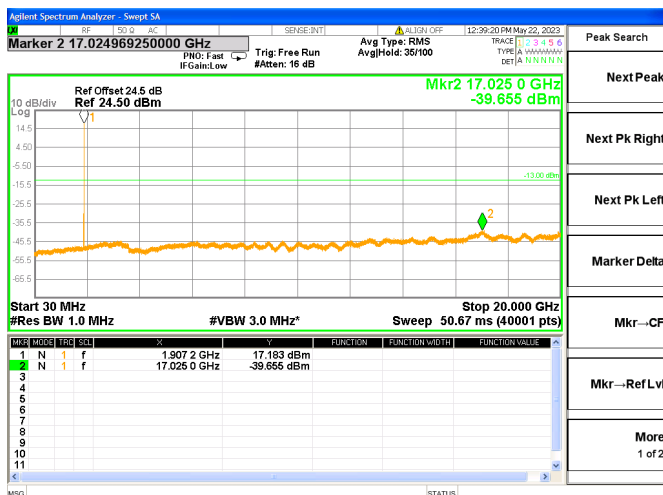

N/A




2.6. Band Edge

2.6.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \cdot \log(P)$ dB.

2.6.2. Test Description

Test Setup:

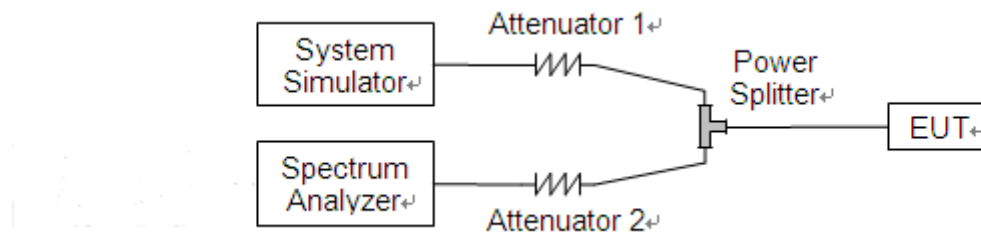


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.





2.6.3. Test Result


The lowest and highest channels are tested to verify the band edge emissions.

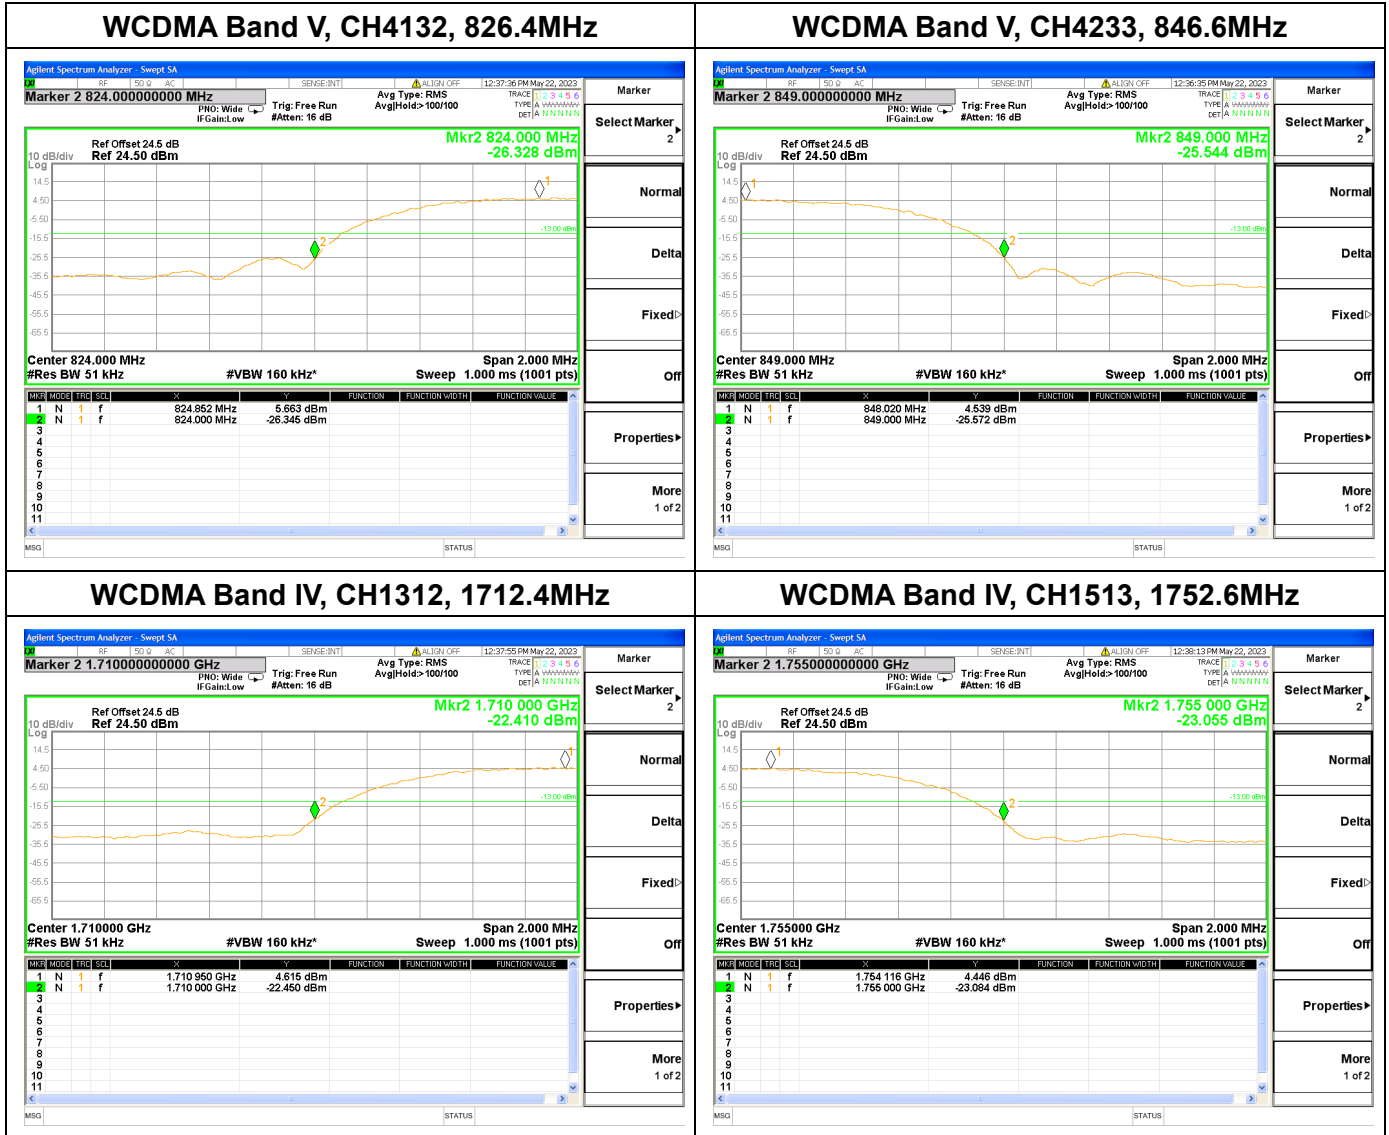




REPORT No.: SZ23040073W01

WCDMA Band II, CH9262, 1852.4MHz

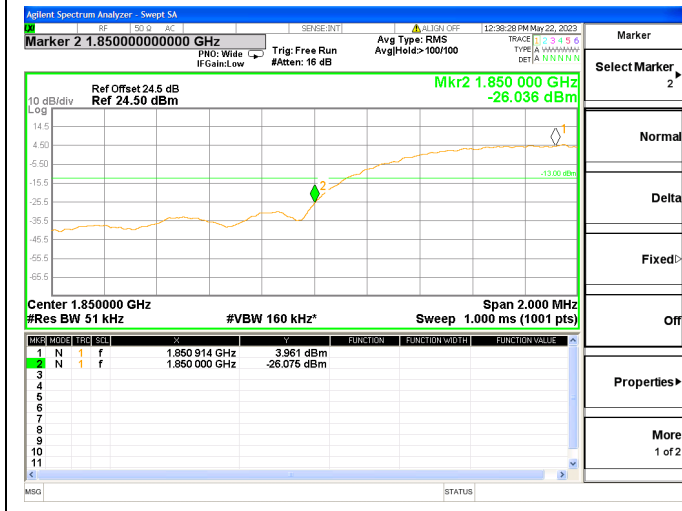

WCDMA Band II, CH9538, 1907.6MHz

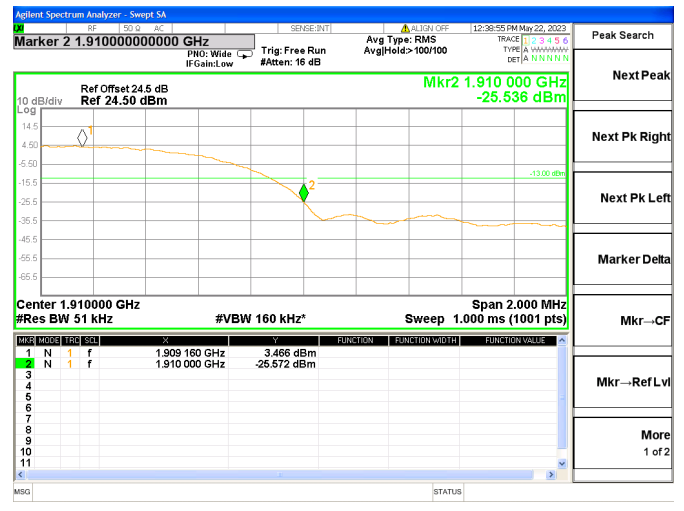

Shenzhen Morlab Communication Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.cn

Fax: 86-755-36698525
E-mail: service@morlab.cn



2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements

2.7.1. Requirement

According to FCC section 22.913, the Effective Radiated Power (E.R.P.) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

According to FCC section 27.50, mobile, and portable (hand-held) stations is limited to 1 Watts e.i.r.p. peak power.

2.7.2. Test Description

The test setups refer to section 2.1.3

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded. Please refer to section 2.1.3 of this report.

The relevant equation for determining the maximum E.R.P. or E.I.R.P. from the measured RF output power is given in Equation (1) as follows:

$$\text{E.R.P. or E.I.R.P.} = P_{\text{Meas}} + G_T$$

Where:

E.R.P. or E.I.R.P. effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (E.R.P.) or dBi (E.I.R.P.)

For devices utilizing multiple antennas, see ANSI C63.25-2015 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

The following equations demonstrate the mathematical relationship between E.R.P. and E.I.R.P.:

a) $\text{E.R.P.} = \text{E.I.R.P.} - 2.15$, where E.R.P. and E.I.R.P. are expressed in consistent units.

b) $\text{E.I.R.P.} = \text{E.R.P.} + 2.15$, where E.R.P. and E.I.R.P. are expressed in consistent units.



**2.7.3.Test Result**

WCDMA Band V							
Band	Channel	Frequency (MHz)	Measured E.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	4132	826.4	19.41	0.087	38.5	7	PASS
	4182	836.4	19.50	0.089			PASS
	4233	846.6	19.45	0.088			PASS
HSDPA	4132	826.4	18.72	0.074	38.5	7	PASS
	4182	836.4	18.62	0.073			PASS
	4233	846.6	18.74	0.075			PASS
DC-HSD PA	4132	826.4	19.11	0.081	38.5	7	PASS
	4182	836.4	19.05	0.080			PASS
	4233	846.6	19.18	0.083			PASS
HSUPA	4132	826.4	18.85	0.077	38.5	7	PASS
	4182	836.4	18.82	0.076			PASS
	4233	846.6	18.82	0.076			PASS
HSPA+	4132	826.4	18.94	0.078	38.5	7	PASS
	4182	836.4	18.99	0.079			PASS
	4233	846.6	18.91	0.078			PASS
Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.							





WCDMA Band IV							
Band	Channel	Frequency (MHz)	Measured E.I.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	1312	1712.4	26.90	0.490	30	1	PASS
	1413	1732.6	26.96	0.497			PASS
	1513	1752.6	26.83	0.482			PASS
HSDPA	1312	1712.4	26.27	0.424	30	1	PASS
	1413	1732.6	26.18	0.415			PASS
	1513	1752.6	26.06	0.404			PASS
DC-HSD PA	1312	1712.4	26.63	0.460	30	1	PASS
	1413	1732.6	26.59	0.456			PASS
	1513	1752.6	26.64	0.461			PASS
HSUPA	1312	1712.4	26.31	0.428	30	1	PASS
	1413	1732.6	26.18	0.415			PASS
	1513	1752.6	26.27	0.424			PASS
HSPA+	1312	1712.4	26.27	0.424	30	1	PASS
	1413	1732.6	26.29	0.426			PASS
	1513	1752.6	26.10	0.407			PASS
Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.							





WCDMA Band II							
Band	Channel	Frequency (MHz)	Measured E.I.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	9262	1852.4	24.69	0.294	33	2	PASS
	9400	1880.0	24.72	0.296			PASS
	9538	1907.6	24.66	0.292			PASS
HSDPA	9262	1852.4	23.44	0.221	33	2	PASS
	9400	1880.0	23.57	0.228			PASS
	9538	1907.6	23.51	0.224			PASS
DC-HSD PA	9262	1852.4	23.99	0.251	33	2	PASS
	9400	1880.0	24.04	0.254			PASS
	9538	1907.6	24.04	0.254			PASS
HSUPA	9262	1852.4	23.48	0.223	33	2	PASS
	9400	1880.0	23.53	0.225			PASS
	9538	1907.6	23.55	0.226			PASS
HSPA+	9262	1852.4	24.01	0.252	33	2	PASS
	9400	1880.0	23.91	0.246			PASS
	9538	1907.6	24.00	0.251			PASS
Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.							




2.8. Radiated Out of Band Emissions

2.8.1. Requirement


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \cdot \log(P)$ dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.

2.8.2. Test Description

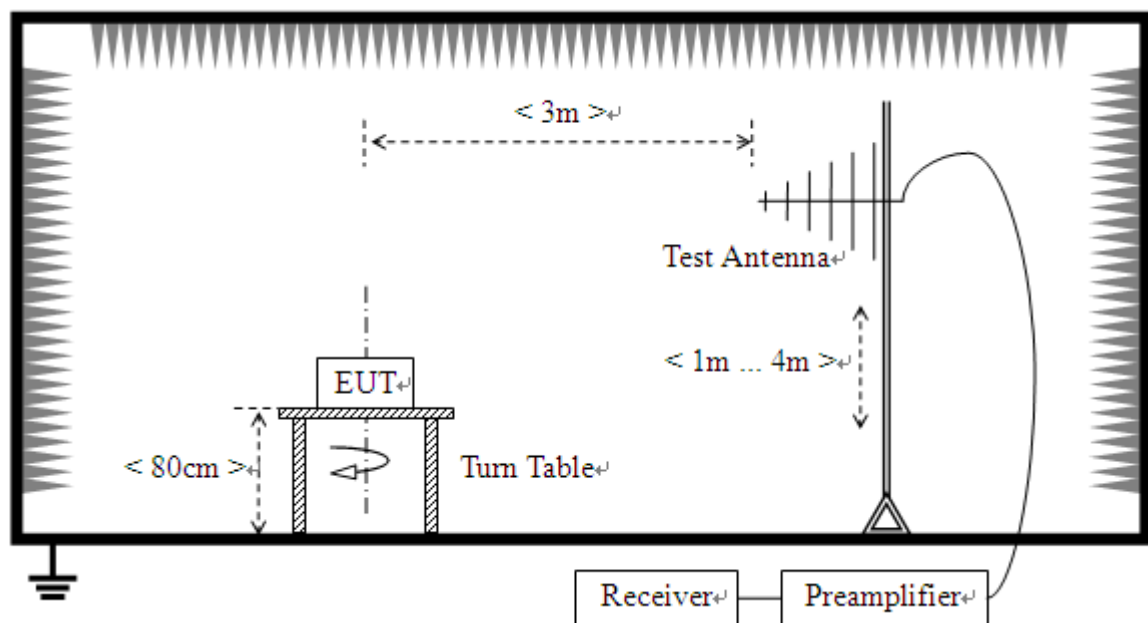

(For the test frequency from 30MHz to 1GHz)



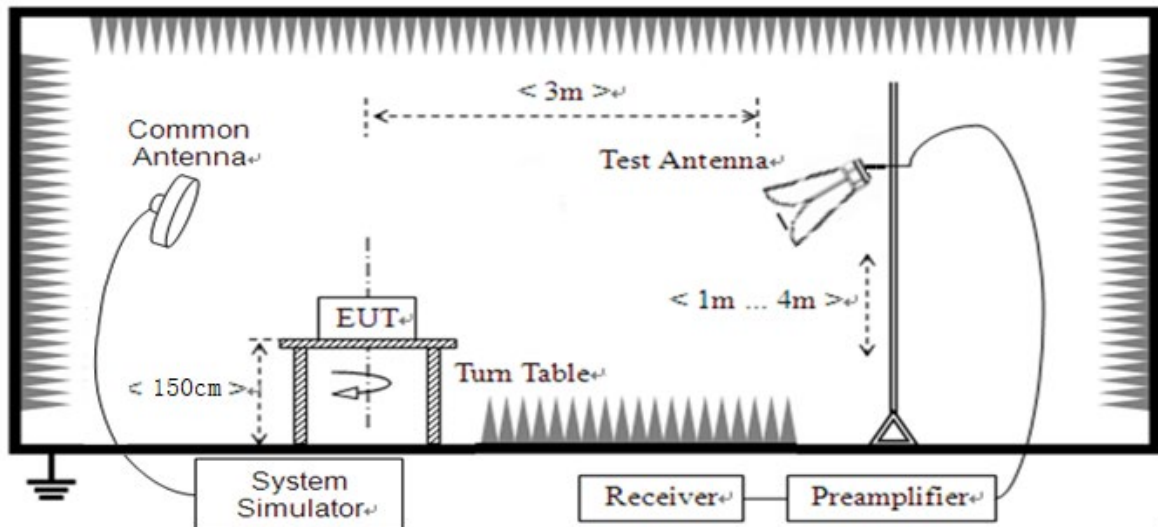

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

Note: When doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.8.3.Test Procedure

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.





2.8.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of A_{TOT} .


Note1: The power of the EUT transmitting frequency should be ignored.

Note2: All test mode and condition mentioned were considered and evaluated respectively by performing full test, only the worst data were recorded and reported.

Note3: All spurious emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note4: N/A means the frequency is the basic frequency or the base station frequency; they are no need to verdict.



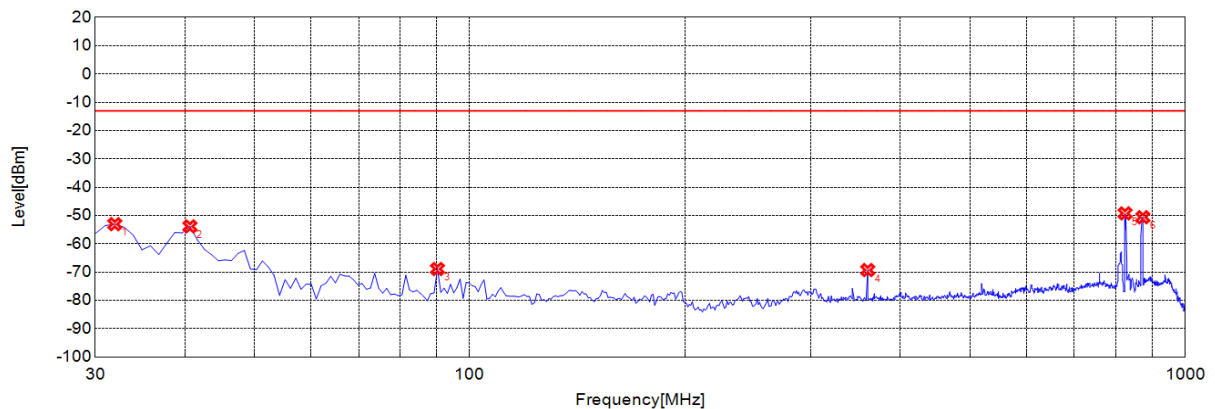


✘ Final Test

Suspected List

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	31.9420	-53.08	-13.00	40.08	-19.94	-42.65	22.71	Vertical
2	40.6810	-53.86	-13.00	40.86	-19.29	-42.58	23.29	Vertical
3	90.2000	-68.92	-13.00	55.92	-20.37	-42.58	22.21	Vertical
4	360.1300	-69.29	-13.00	56.29	-16.03	-41.88	25.85	Vertical
5	824.2540	-49.25	-13.00	36.25	-8.95	-40.31	31.36	N/A
6	872.8030	-50.62	-13.00	37.62	-8.24	-40.20	31.96	N/A

WCDMA Band V (WCDMA), Low Channel 30M-1G Vertical



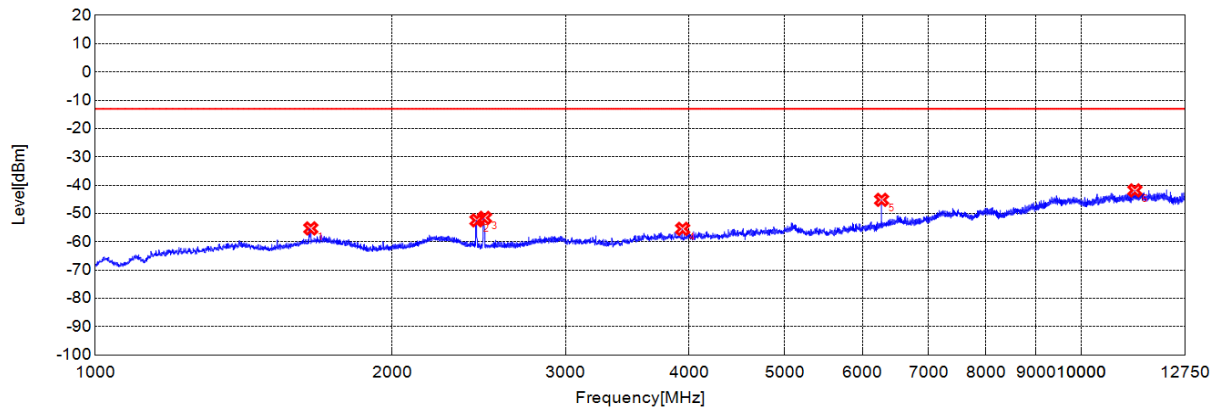


✂ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1654.2180	-55.29	-13.00	42.29	-10.30	-46.75	36.45	Vertical
2	2438.4790	-52.43	-13.00	39.43	-10.76	-47.67	36.91	Vertical
3	2482.4940	-51.55	-13.00	38.55	-11.00	-47.65	36.65	Vertical
4	3942.6570	-55.45	-13.00	42.45	-5.98	-45.26	39.28	Vertical
5	6274.9210	-45.18	-13.00	32.18	0.84	-41.10	41.94	Vertical
6	11337.6400	-41.86	-13.00	28.86	14.00	-35.06	49.06	Vertical

WCDMA Band V (WCDMA), Low Channel 1G -12.75G Vertical



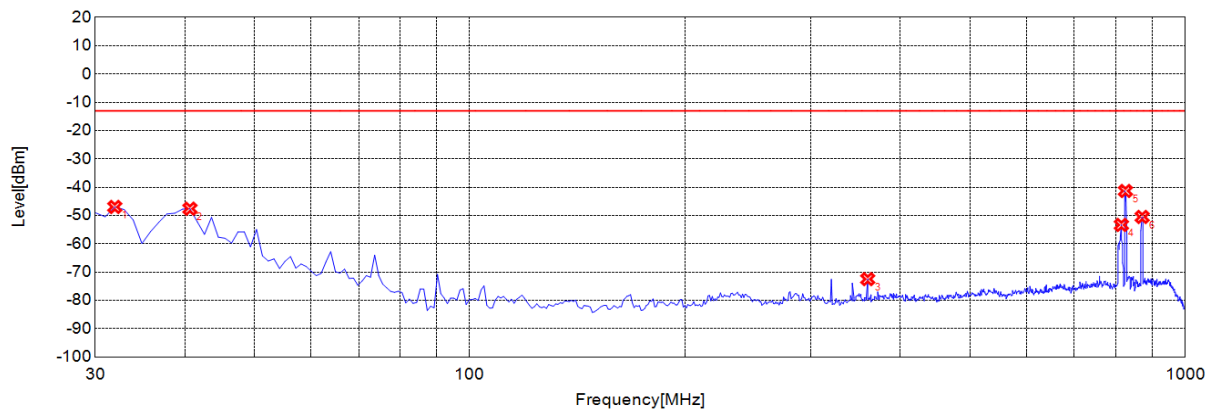


✂ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	31.9420	-46.99	-13.00	33.99	-13.73	-42.65	28.92	Horizontal
2	40.6810	-47.62	-13.00	34.62	-10.10	-42.58	32.48	Horizontal
3	360.1300	-72.5	-13.00	59.50	-16.48	-41.88	25.40	Horizontal
4	814.5450	-53.35	-13.00	40.35	-9.47	-40.35	30.88	Horizontal
5	825.2250	-41.34	-13.00	28.34	-9.10	-40.30	31.20	N/A
6	870.8610	-50.53	-13.00	37.53	-8.35	-40.20	31.85	N/A

WCDMA Band V (WCDMA), Low Channel 30M-1G Horizontal



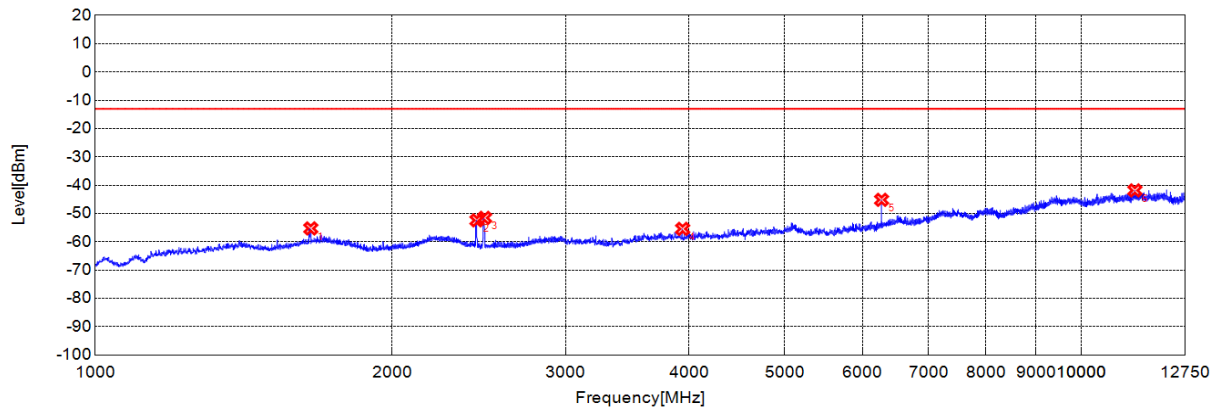


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1650.8840	-54.91	-13.00	41.91	-9.48	-46.77	37.29	Horizontal
2	2438.4790	-49.74	-13.00	36.74	-10.64	-47.67	37.03	Horizontal
3	2475.8250	-50.56	-13.00	37.56	-10.83	-47.65	36.82	Horizontal
4	3620.8530	-55.88	-13.00	42.88	-6.25	-45.51	39.26	Horizontal
5	6274.9210	-47.33	-13.00	34.33	0.93	-41.10	42.03	Horizontal
6	10749.2920	-42.36	-13.00	29.36	13.22	-35.72	48.94	Horizontal

WCDMA Band V (WCDMA), Low Channel 1G -12.75G Horizontal



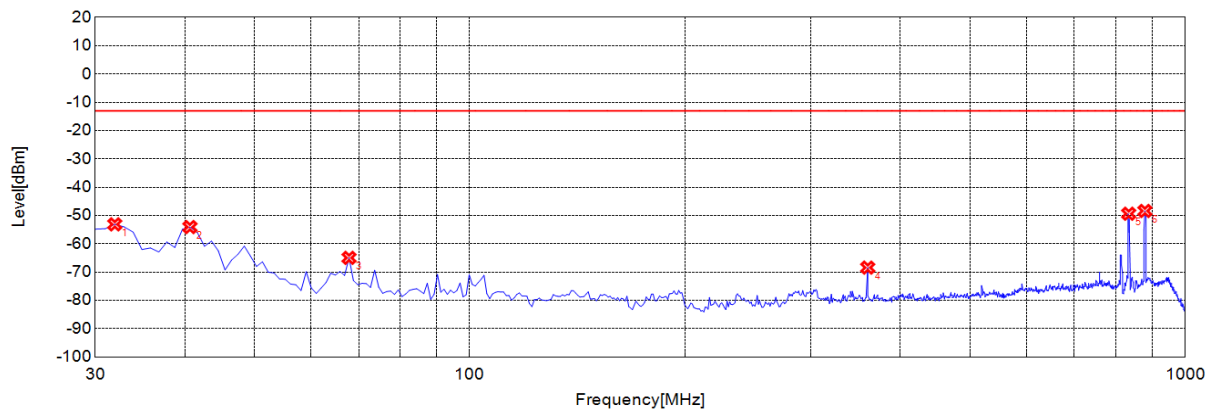


✘ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	31.9420	-53.13	-13.00	40.13	-19.94	-42.65	22.71	Vertical
2	40.6810	-54.1	-13.00	41.10	-19.29	-42.58	23.29	Vertical
3	67.8680	-64.97	-13.00	51.97	-21.18	-42.44	21.26	Vertical
4	360.1300	-68.43	-13.00	55.43	-16.03	-41.88	25.85	Vertical
5	833.9640	-49.39	-13.00	36.39	-8.76	-40.27	31.51	N/A
6	878.6290	-48.41	-13.00	35.41	-7.85	-40.20	32.35	N/A

WCDMA Band V (WCDMA), Mid Channel 30M-1G Vertical



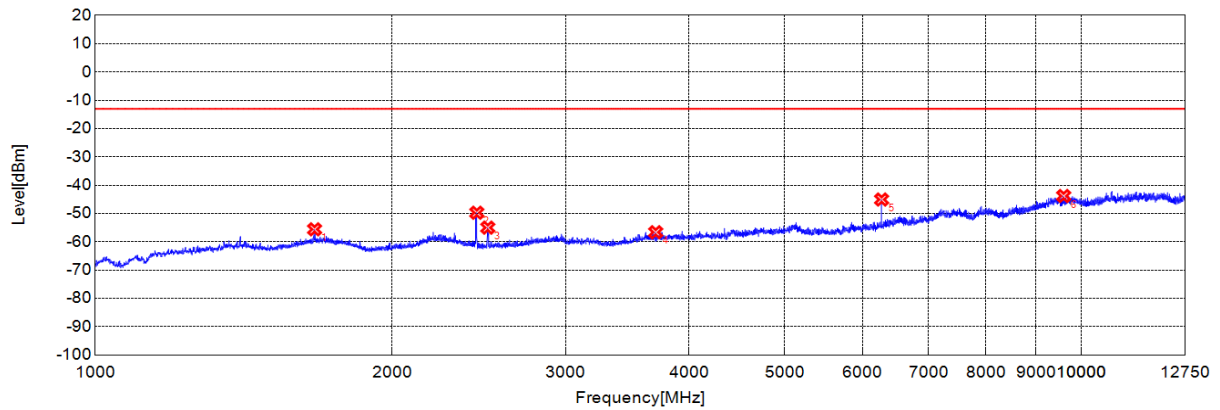


✘ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1668.8900	-55.6	-13.00	42.60	-10.06	-46.67	36.61	Vertical
2	2437.8130	-49.74	-13.00	36.74	-10.76	-47.67	36.91	Vertical
3	2501.1670	-55.01	-13.00	42.01	-11.10	-47.64	36.54	Vertical
4	3702.1170	-56.64	-13.00	43.64	-6.64	-45.71	39.07	Vertical
5	6274.9210	-45.07	-13.00	32.07	0.84	-41.10	41.94	Vertical
6	9600.2250	-43.83	-13.00	30.83	11.21	-37.52	48.73	Vertical

WCDMA Band V (WCDMA), Mid Channel 1G -12.75G Vertical



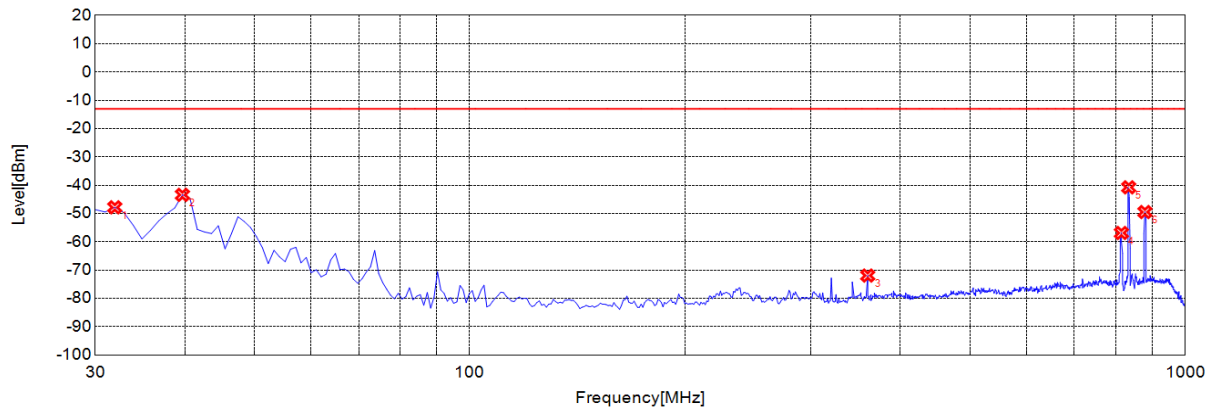


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	31.9420	-47.83	-13.00	34.83	-13.73	-42.65	28.92	Horizontal
2	39.7100	-43.42	-13.00	30.42	-10.25	-42.60	32.35	Horizontal
3	360.1300	-71.94	-13.00	58.94	-16.48	-41.88	25.40	Horizontal
4	814.5450	-56.89	-13.00	43.89	-9.47	-40.35	30.88	Horizontal
5	833.9640	-40.77	-13.00	27.77	-8.80	-40.27	31.47	N/A
6	878.6290	-49.49	-13.00	36.49	-8.34	-40.20	31.86	N/A

WCDMA Band V (WCDMA), Mid Channel 30M-1G Horizontal



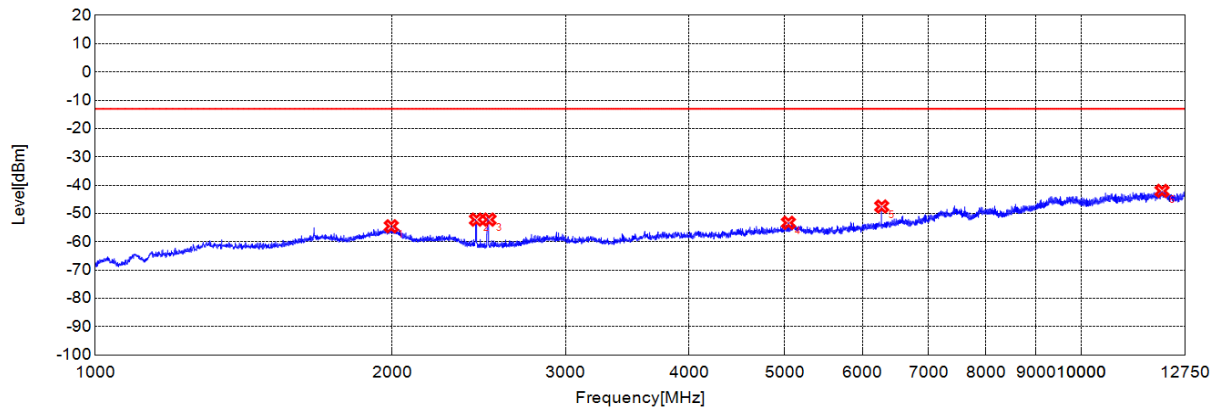


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1996.3320	-54.53	-13.00	41.53	-5.66	-47.65	41.99	Horizontal
2	2435.8120	-52.18	-13.00	39.18	-10.62	-47.67	37.05	Horizontal
3	2508.5030	-52.18	-13.00	39.18	-10.94	-47.64	36.70	Horizontal
4	5047.8410	-53.3	-13.00	40.30	-1.69	-43.14	41.45	Horizontal
5	6276.5460	-47.54	-13.00	34.54	0.94	-41.10	42.04	Horizontal
6	12080.3880	-42.04	-13.00	29.04	15.31	-34.16	49.47	Horizontal

WCDMA Band V (WCDMA), Mid Channel 1G -12.75G Horizontal



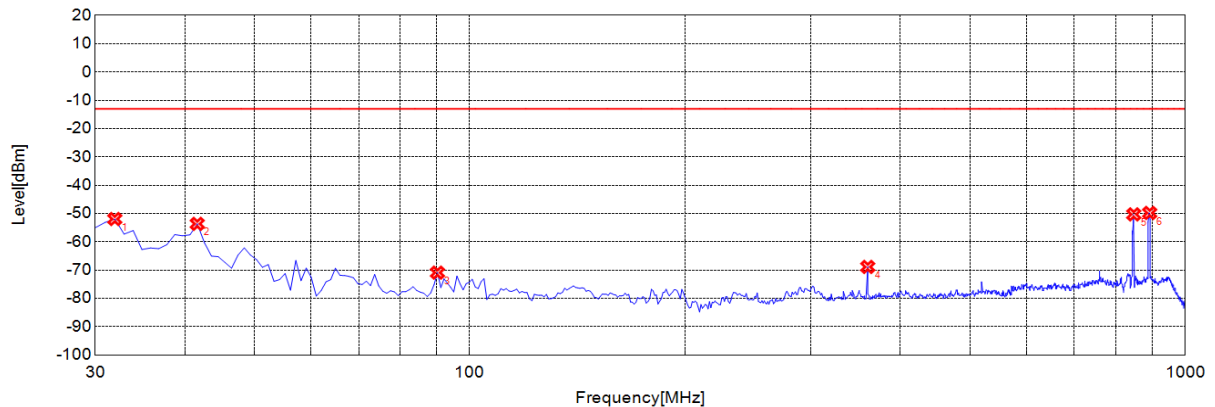


Final Test

Suspected List

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	31.9420	-51.96	-13.00	38.96	-19.94	-42.65	22.71	Vertical
2	41.6520	-53.67	-13.00	40.67	-19.16	-42.55	23.39	Vertical
3	90.2000	-70.91	-13.00	57.91	-20.37	-42.58	22.21	Vertical
4	360.1300	-68.89	-13.00	55.89	-16.03	-41.88	25.85	Vertical
5	847.5580	-50.32	-13.00	37.32	-9.11	-40.21	31.10	N/A
6	892.2220	-49.82	-13.00	36.82	-7.51	-40.20	32.69	N/A

WCDMA Band V (WCDMA), High Channel 30M-1G Vertical



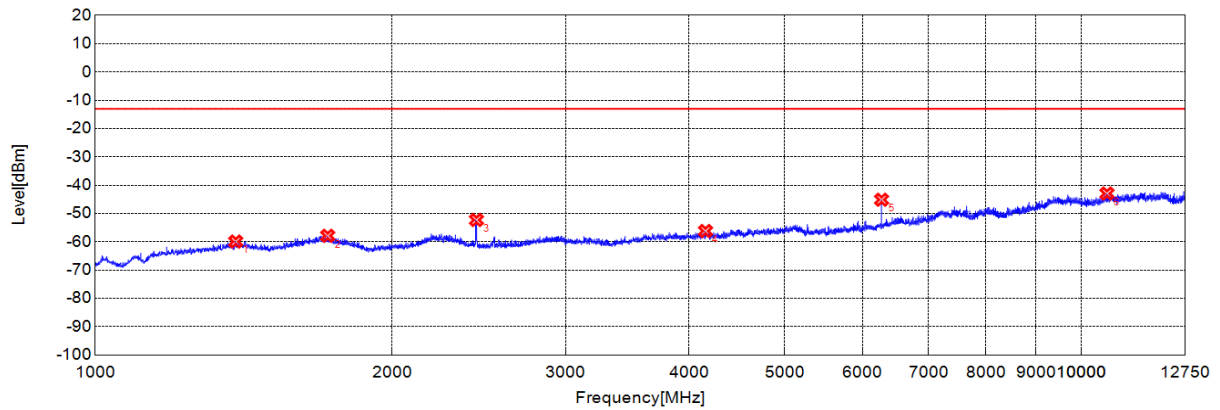


✂ Final Test

Suspected List

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1388.1290	-59.94	-13.00	46.94	-11.75	-48.90	37.15	Vertical
2	1720.9070	-57.89	-13.00	44.89	-9.73	-46.70	36.97	Vertical
3	2435.8120	-52.3	-13.00	39.30	-10.74	-47.67	36.93	Vertical
4	4158.8180	-56.21	-13.00	43.21	-5.21	-44.71	39.50	Vertical
5	6274.9210	-45.14	-13.00	32.14	0.84	-41.10	41.94	Vertical
6	10622.5200	-42.96	-13.00	29.96	12.84	-36.02	48.86	Vertical

WCDMA Band V (WCDMA), High Channel 1G -12.75G Vertical



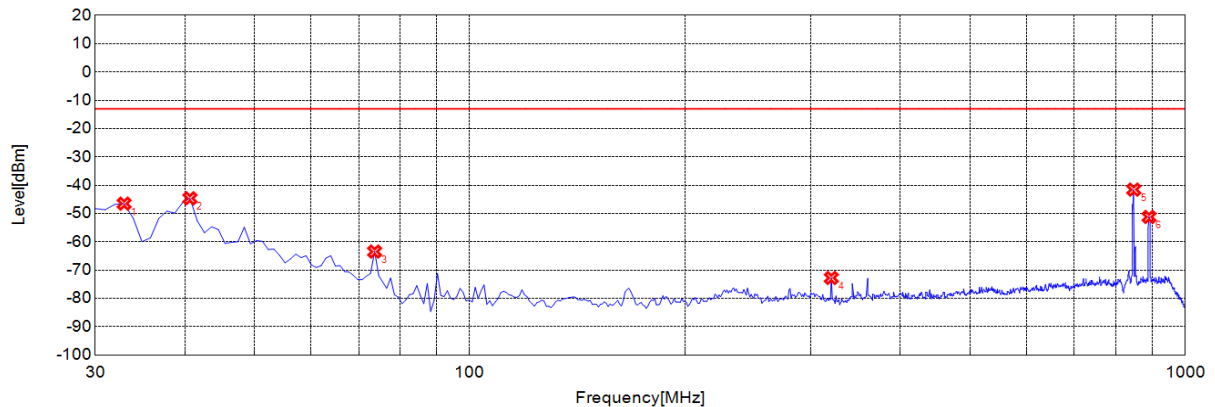


✂ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	32.9130	-46.53	-13.00	33.53	-13.32	-42.67	29.35	Horizontal
2	40.6810	-44.65	-13.00	31.65	-10.10	-42.58	32.48	Horizontal
3	73.6940	-63.48	-13.00	50.48	-19.95	-42.46	22.51	Horizontal
4	320.3200	-72.79	-13.00	59.79	-17.77	-42.18	24.41	Horizontal
5	847.5580	-41.57	-13.00	28.57	-8.59	-40.21	31.62	N/A
6	890.2800	-51.23	-13.00	38.23	-8.22	-40.20	31.98	N/A

WCDMA Band V (WCDMA), High Channel 30M-1G Horizontal



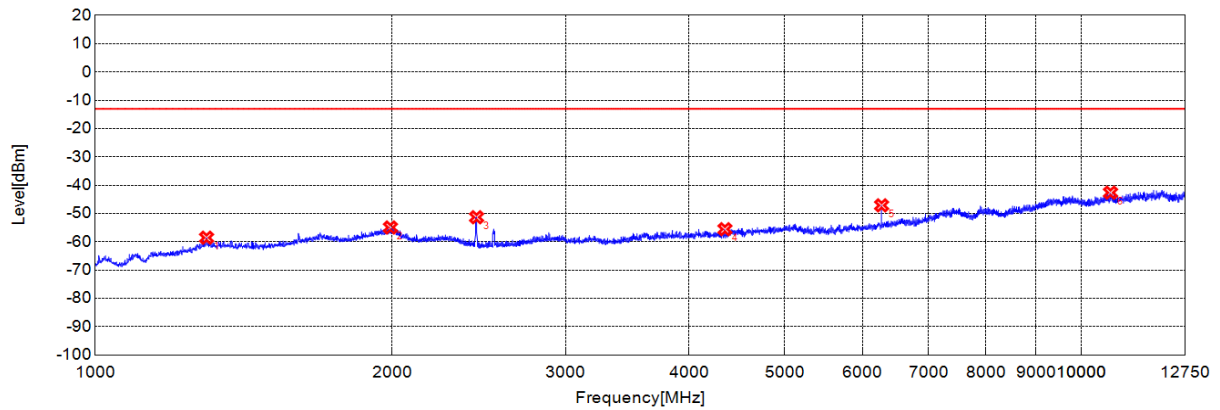


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1296.7660	-58.57	-13.00	45.57	-11.44	-49.02	37.58	Horizontal
2	1992.3310	-54.95	-13.00	41.95	-5.74	-47.67	41.93	Horizontal
3	2436.4790	-51.33	-13.00	38.33	-10.63	-47.67	37.04	Horizontal
4	4352.2250	-55.56	-13.00	42.56	-4.53	-44.55	40.02	Horizontal
5	6274.9210	-47.13	-13.00	34.13	0.93	-41.10	42.03	Horizontal
6	10710.2850	-42.65	-13.00	29.65	12.81	-35.81	48.62	Horizontal

WCDMA Band V (WCDMA), High Channel 1G -12.75G Horizontal



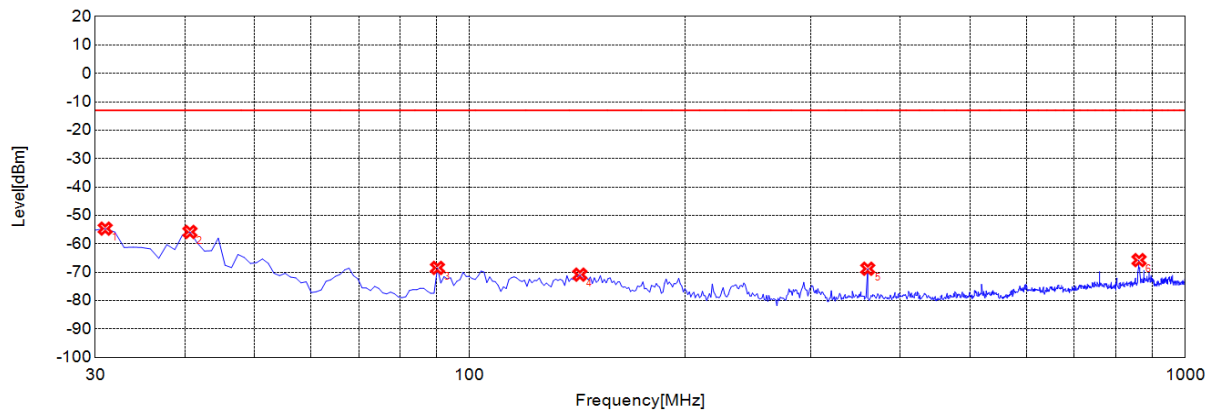


✕ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	30.9710	-54.66	-13.00	41.66	-19.99	-42.64	22.65	Vertical
2	40.6810	-55.83	-13.00	42.83	-19.29	-42.58	23.29	Vertical
3	90.2000	-68.48	-13.00	55.48	-20.37	-42.58	22.21	Vertical
4	142.6330	-70.86	-13.00	57.86	-19.66	-42.73	23.07	Vertical
5	360.1300	-68.78	-13.00	55.78	-16.03	-41.88	25.85	Vertical
6	862.1220	-65.75	-13.00	52.75	-8.81	-40.20	31.39	Vertical

WCDMA Band IV (WCDMA), Low Channel 30M-1G Vertical



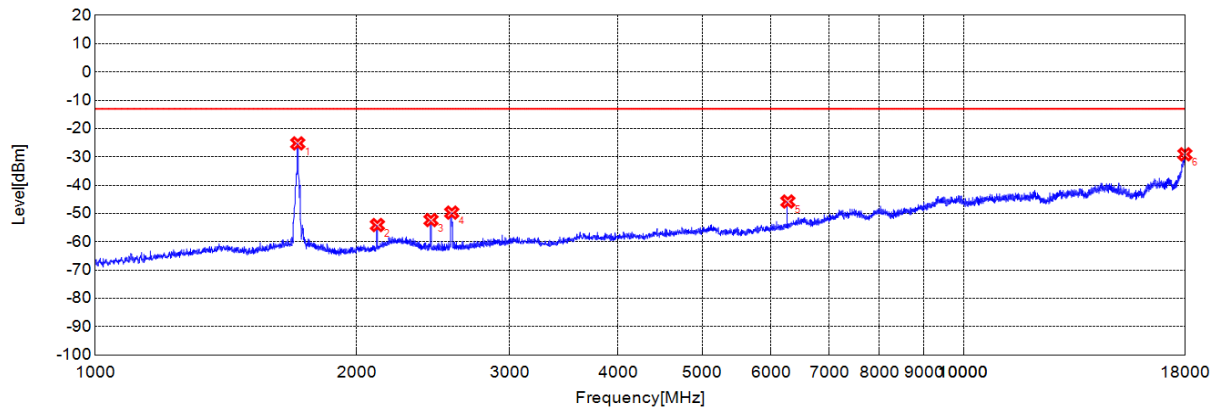


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1710.9040	-25.23	-13.00	12.23	-9.65	-46.60	36.95	N/A
2	2113.0380	-54.09	-13.00	41.09	-10.73	-47.98	37.25	N/A
3	2435.8120	-52.33	-13.00	39.33	-10.74	-47.67	36.93	Vertical
4	2573.8580	-49.71	-13.00	36.71	-10.94	-47.67	36.73	Vertical
5	6275.5460	-45.79	-13.00	32.79	0.84	-41.10	41.94	Vertical
6	17989.9980	-29.09	-13.00	16.09	28.91	-27.42	56.33	Vertical

WCDMA Band IV (WCDMA), Low Channel 1G -18G Vertical



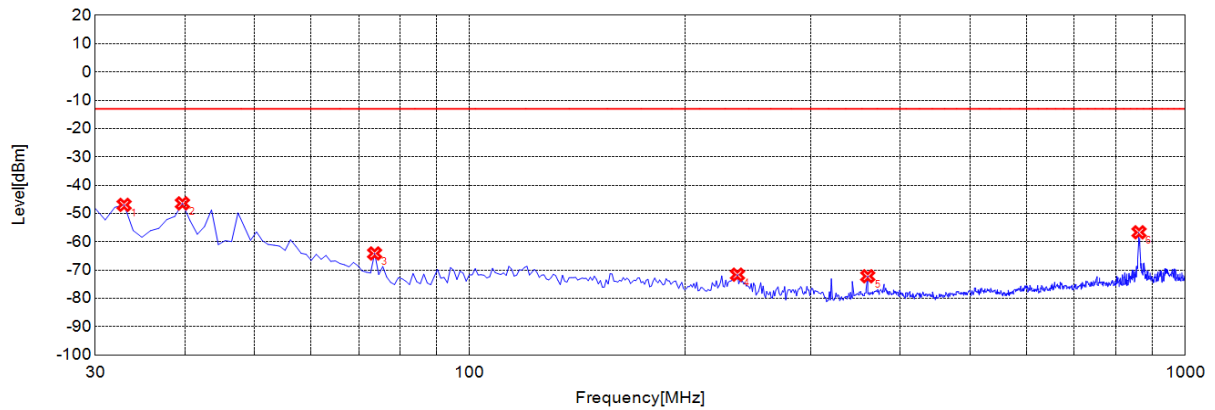


✂ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	32.9130	-46.96	-13.00	33.96	-13.32	-42.67	29.35	Horizontal
2	39.7100	-46.45	-13.00	33.45	-10.25	-42.60	32.35	Horizontal
3	73.6940	-64.13	-13.00	51.13	-19.95	-42.46	22.51	Horizontal
4	236.8170	-71.63	-13.00	58.63	-16.08	-42.74	26.66	Horizontal
5	360.1300	-72.19	-13.00	59.19	-16.48	-41.88	25.40	Horizontal
6	862.1220	-56.66	-13.00	43.66	-8.44	-40.20	31.76	Horizontal

WCDMA Band IV (WCDMA), Low Channel 30M-1G Horizontal



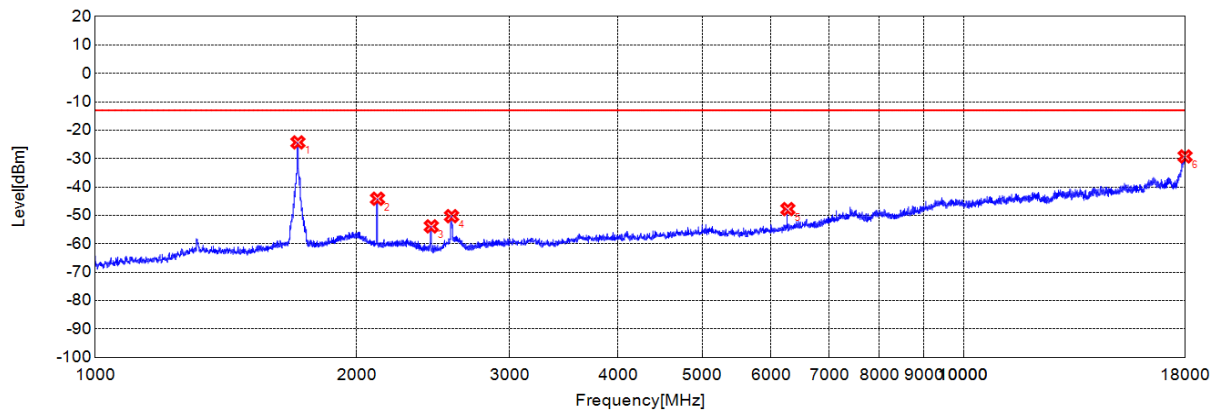


✖ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1711.5710	-24.3	-13.00	11.30	-8.67	-46.61	37.94	N/A
2	2113.7050	-44.14	-13.00	31.14	-9.15	-47.98	38.83	N/A
3	2437.8130	-53.87	-13.00	40.87	-10.64	-47.67	37.03	Horizontal
4	2572.5240	-50.28	-13.00	37.28	-10.81	-47.67	36.86	Horizontal
5	6275.5460	-47.78	-13.00	34.78	0.94	-41.10	42.04	Horizontal
6	17997.5000	-29.25	-13.00	16.25	29.80	-27.40	57.20	Horizontal

WCDMA Band IV (WCDMA), Low Channel 1G -18G Horizontal



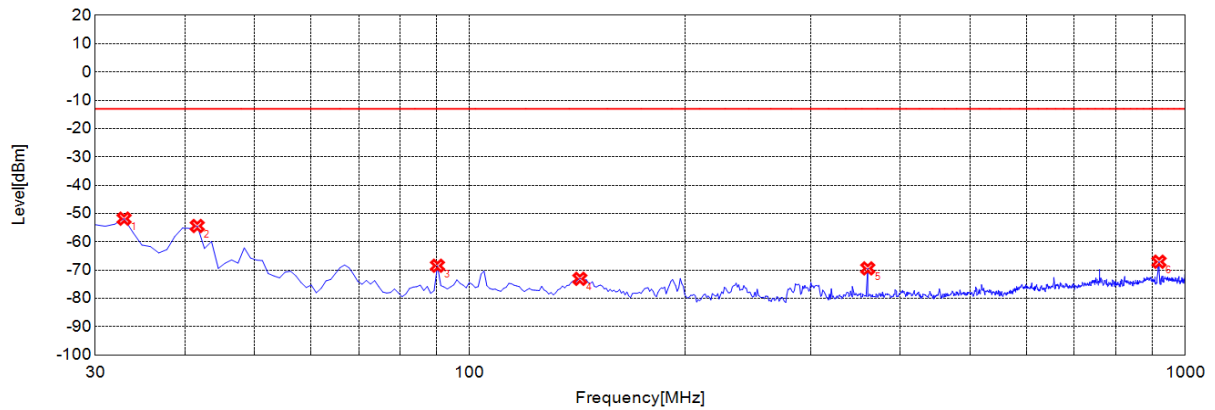


✖ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	32.9130	-51.84	-13.00	38.84	-19.90	-42.67	22.77	Vertical
2	41.6520	-54.42	-13.00	41.42	-19.16	-42.55	23.39	Vertical
3	90.2000	-68.47	-13.00	55.47	-20.37	-42.58	22.21	Vertical
4	142.6330	-73.09	-13.00	60.09	-19.66	-42.73	23.07	Vertical
5	360.1300	-69.41	-13.00	56.41	-16.03	-41.88	25.85	Vertical
6	919.4090	-67.06	-13.00	54.06	-8.55	-40.22	31.67	Vertical

WCDMA Band IV (WCDMA), Mid Channel 30M-1G Vertical



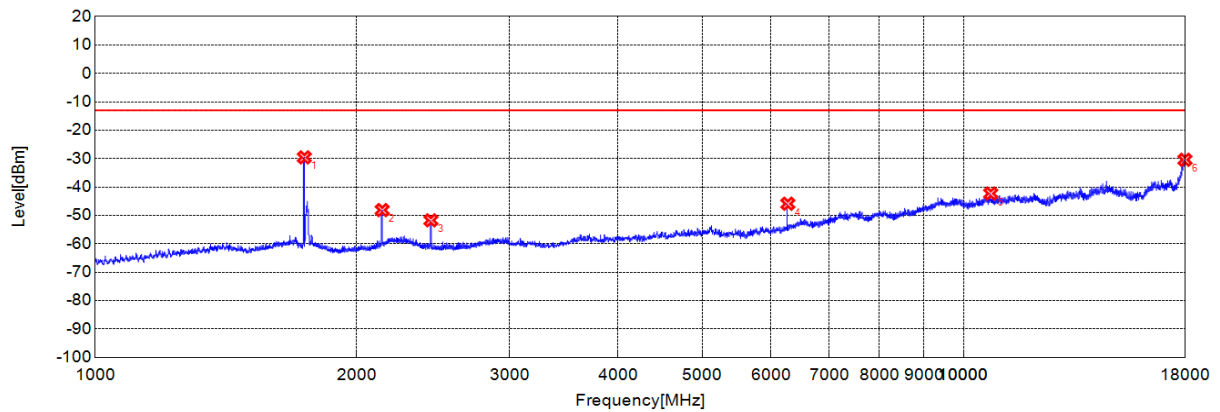


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1740.9140	-29.58	-13.00	16.58	-9.89	-46.88	36.99	N/A
2	2140.3800	-48.13	-13.00	35.13	-9.91	-47.87	37.96	N/A
3	2435.1450	-51.74	-13.00	38.74	-10.74	-47.67	36.93	Vertical
4	6275.5460	-45.9	-13.00	32.90	0.84	-41.10	41.94	Vertical
5	10748.7910	-42.31	-13.00	29.31	13.39	-35.72	49.11	Vertical
6	17992.4990	-30.42	-13.00	17.42	28.98	-27.41	56.39	Vertical

WCDMA Band IV (WCDMA), Mid Channel 1G -18G Vertical



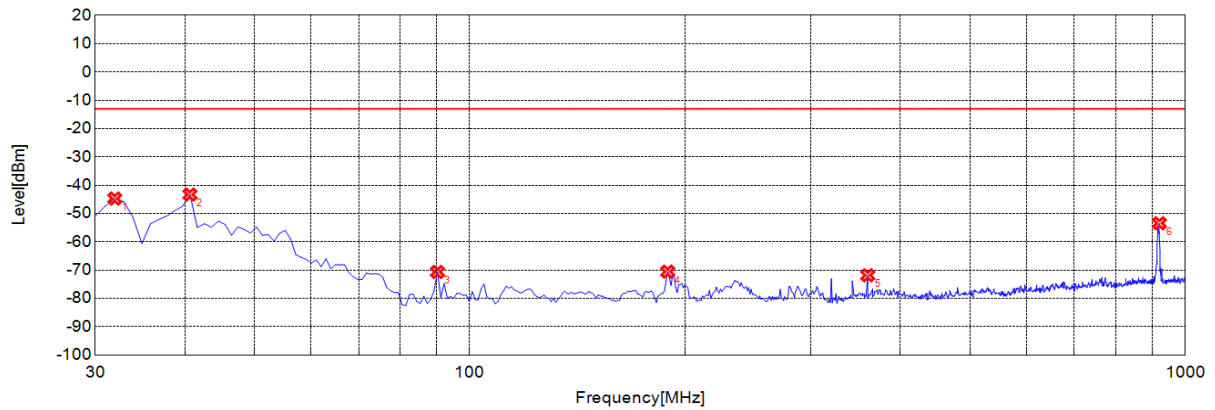


Final Test

Suspected List

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	31.9420	-44.73	-13.00	31.73	-13.73	-42.65	28.92	Horizontal
2	40.6810	-43.31	-13.00	30.31	-10.10	-42.58	32.48	Horizontal
3	90.2000	-70.66	-13.00	57.66	-22.79	-42.58	19.79	Horizontal
4	189.2390	-70.55	-13.00	57.55	-19.64	-42.79	23.15	Horizontal
5	360.1300	-71.85	-13.00	58.85	-16.48	-41.88	25.40	Horizontal
6	920.3800	-53.45	-13.00	40.45	-8.46	-40.22	31.76	Horizontal

WCDMA Band IV (WCDMA), Mid Channel 30M-1G Horizontal



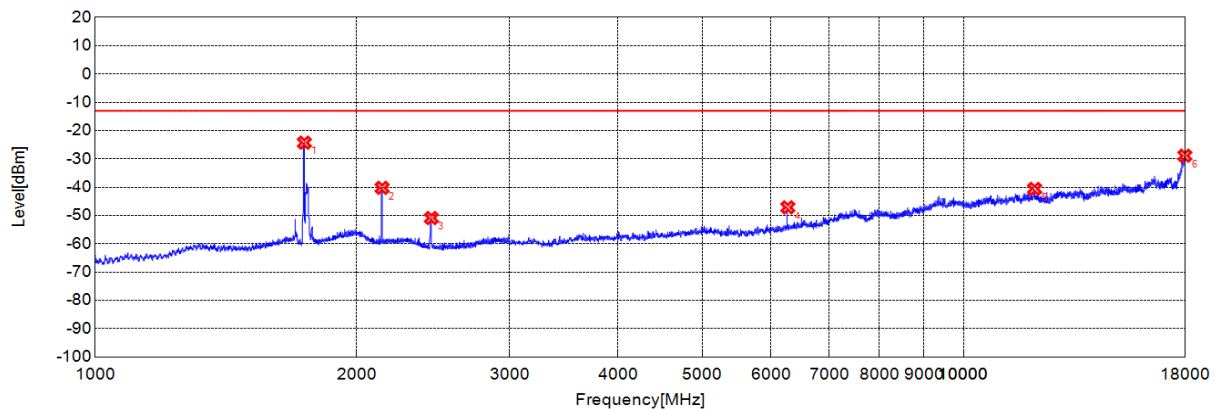


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1740.9140	-24.28	-13.00	11.28	-8.90	-46.88	37.98	N/A
2	2139.7130	-40.23	-13.00	27.23	-8.96	-47.87	38.91	N/A
3	2438.4790	-50.9	-13.00	37.90	-10.64	-47.67	37.03	Horizontal
4	6275.5460	-47.14	-13.00	34.14	0.94	-41.10	42.04	Horizontal
5	12076.5130	-40.61	-13.00	27.61	15.32	-34.15	49.47	Horizontal
6	17984.9970	-28.88	-13.00	15.88	29.51	-27.42	56.93	Horizontal

WCDMA Band IV (WCDMA), Mid Channel 1G -18G Horizontal



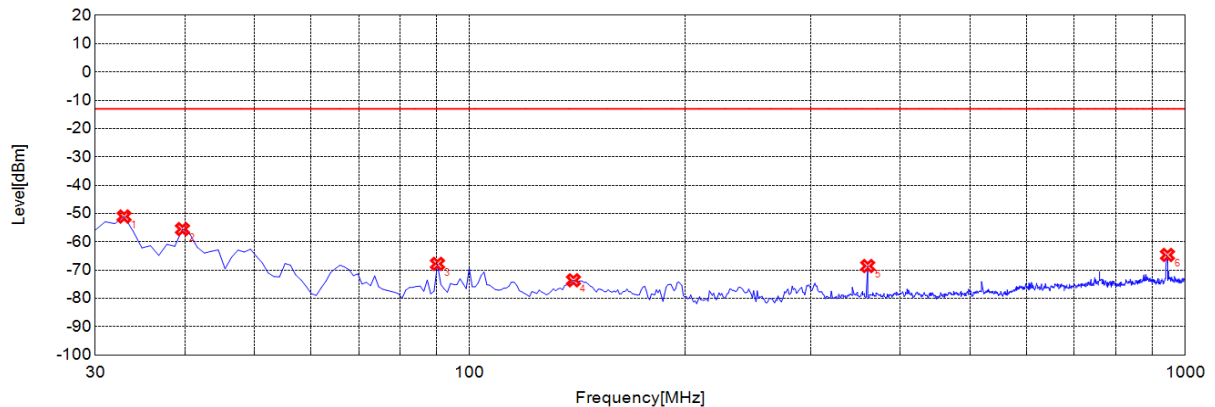


✘ Final Test

Suspected List

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	32.9130	-51.07	-13.00	38.07	-19.90	-42.67	22.77	Vertical
2	39.7100	-55.53	-13.00	42.53	-19.40	-42.60	23.20	Vertical
3	90.2000	-67.81	-13.00	54.81	-20.37	-42.58	22.21	Vertical
4	139.7200	-73.62	-13.00	60.62	-19.26	-42.69	23.43	Vertical
5	360.1300	-68.57	-13.00	55.57	-16.03	-41.88	25.85	Vertical
6	944.6550	-64.66	-13.00	51.66	-7.60	-40.24	32.64	Vertical

WCDMA Band IV (WCDMA), High Channel 30M-1G Vertical



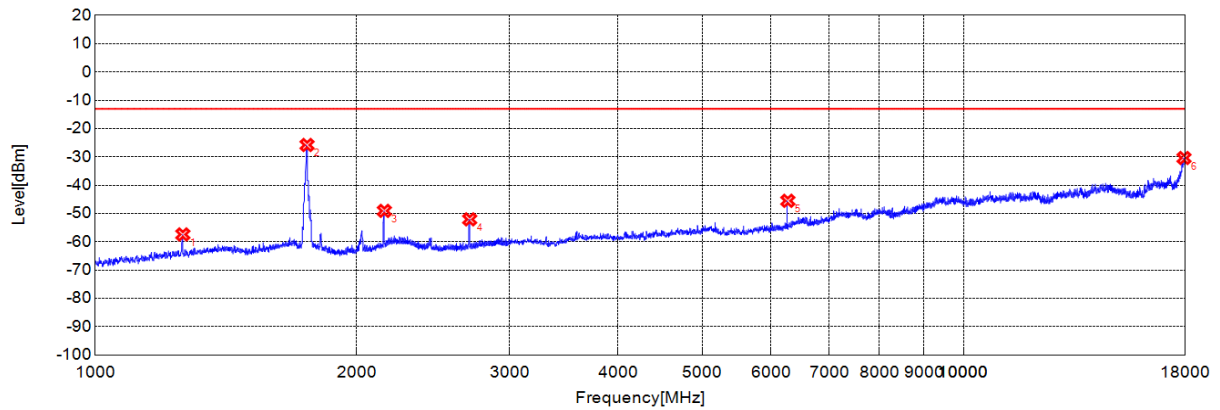


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1261.4200	-57.41	-13.00	44.41	-13.46	-49.12	35.66	Vertical
2	1753.5850	-25.8	-13.00	12.80	-9.99	-47.00	37.01	N/A
3	2152.3840	-49.09	-13.00	36.09	-9.54	-47.82	38.28	N/A
4	2699.2330	-52.09	-13.00	39.09	-10.72	-47.75	37.03	Vertical
5	6275.5460	-45.52	-13.00	32.52	0.84	-41.10	41.94	Vertical
6	17944.9910	-30.39	-13.00	17.39	27.78	-27.49	55.27	Vertical

WCDMA Band IV (WCDMA), High Channel 1G -18G Vertical



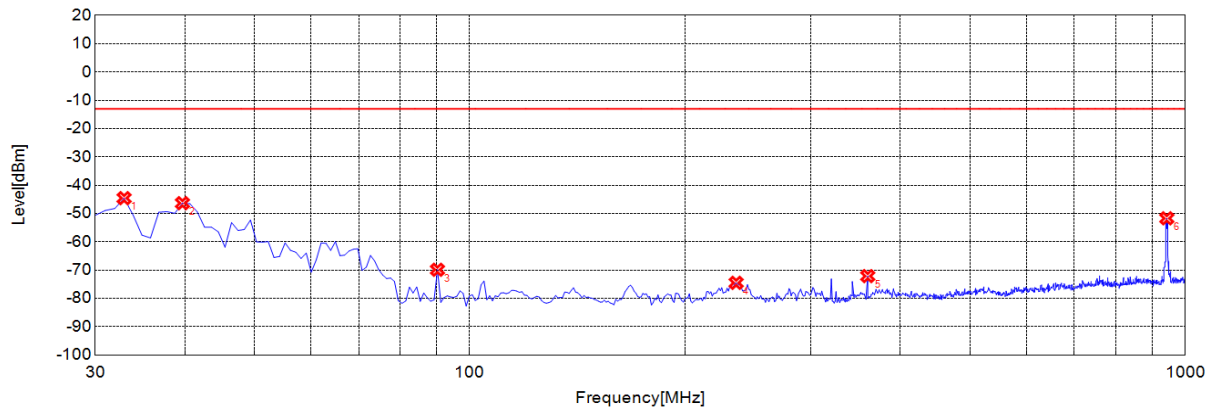


✂ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	32.9130	-44.59	-13.00	31.59	-13.32	-42.67	29.35	Horizontal
2	39.7100	-46.36	-13.00	33.36	-10.25	-42.60	32.35	Horizontal
3	90.2000	-69.89	-13.00	56.89	-22.79	-42.58	19.79	Horizontal
4	235.8460	-74.51	-13.00	61.51	-16.06	-42.75	26.69	Horizontal
5	360.1300	-72.14	-13.00	59.14	-16.48	-41.88	25.40	Horizontal
6	942.7130	-51.71	-13.00	38.71	-8.22	-40.24	32.02	Horizontal

WCDMA Band IV (WCDMA), High Channel 30M-1G Horizontal



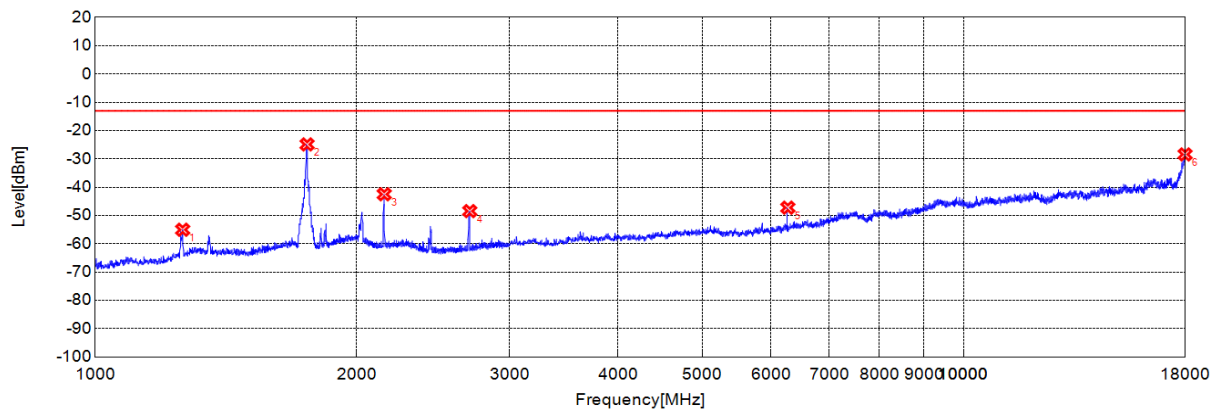


✘ Final Test

Suspected List

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1260.7540	-55.04	-13.00	42.04	-12.71	-49.12	36.41	Horizontal
2	1753.5850	-24.89	-13.00	11.89	-9.00	-47.00	38.00	N/A
3	2151.7170	-42.51	-13.00	29.51	-8.87	-47.82	38.95	N/A
4	2699.9000	-48.46	-13.00	35.46	-10.46	-47.75	37.29	Horizontal
5	6275.5460	-47.24	-13.00	34.24	0.94	-41.10	42.04	Horizontal
6	17997.5000	-28.43	-13.00	15.43	29.80	-27.40	57.20	Horizontal

WCDMA Band IV (WCDMA), High Channel 1G -18G Horizontal



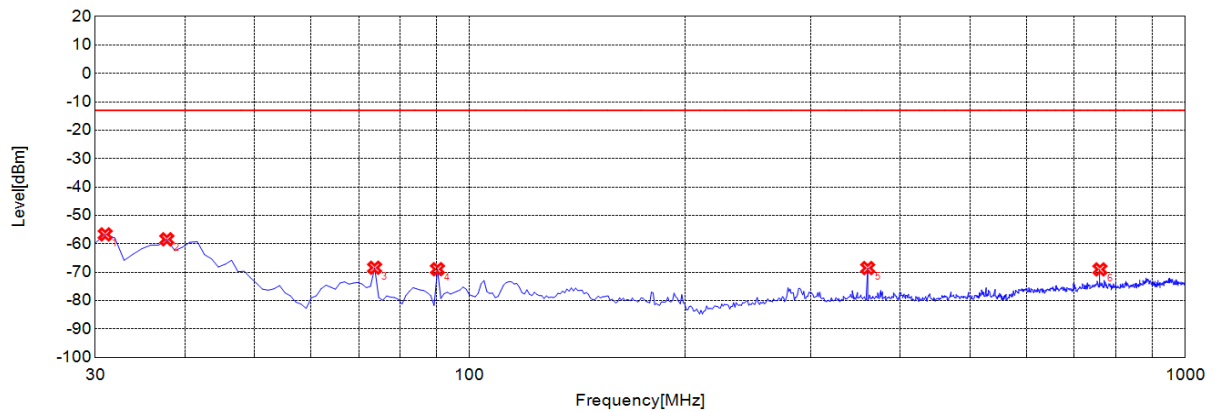


✕ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	30.9710	-56.69	-13.00	43.69	-19.99	-42.64	22.65	Vertical
2	37.7680	-58.42	-13.00	45.42	-19.56	-42.64	23.08	Vertical
3	73.6940	-68.43	-13.00	55.43	-22.09	-42.46	20.37	Vertical
4	90.2000	-68.95	-13.00	55.95	-20.37	-42.58	22.21	Vertical
5	360.1300	-68.53	-13.00	55.53	-16.03	-41.88	25.85	Vertical
6	760.1700	-69.01	-13.00	56.01	-8.58	-40.49	31.91	Vertical

WCDMA Band II (WCDMA), Low Channel 30M-1G Vertical



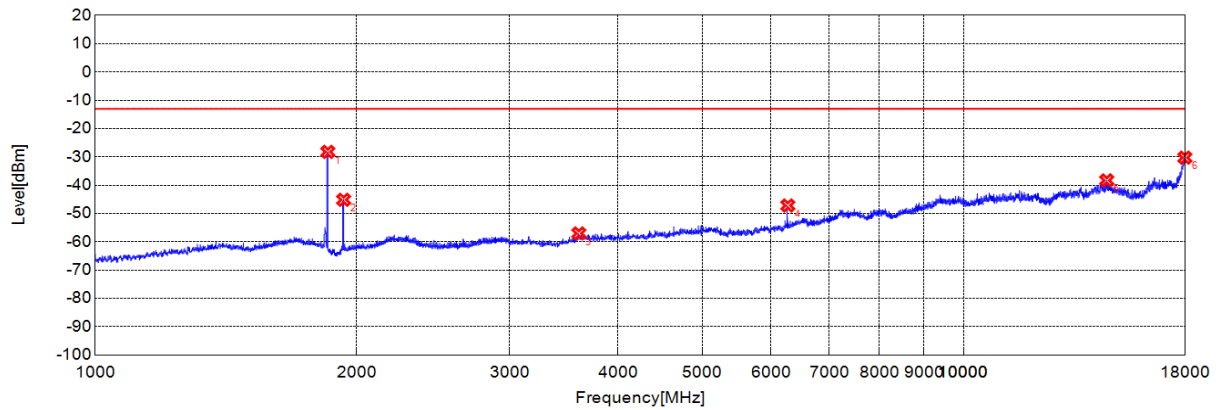


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1852.9510	-28.23	-13.00	15.23	-11.54	-47.76	36.22	N/A
2	1932.3110	-45.16	-13.00	32.16	-12.19	-47.91	35.72	N/A
3	3605.1010	-57.04	-13.00	44.04	-6.76	-45.47	38.71	Vertical
4	6275.5460	-47.18	-13.00	34.18	0.84	-41.10	41.94	Vertical
5	14619.4370	-38.3	-13.00	25.30	19.01	-31.27	50.28	Vertical
6	17987.4980	-30.27	-13.00	17.27	28.85	-27.42	56.27	Vertical

WCDMA Band II (WCDMA), Low Channel 1G -18G Vertical



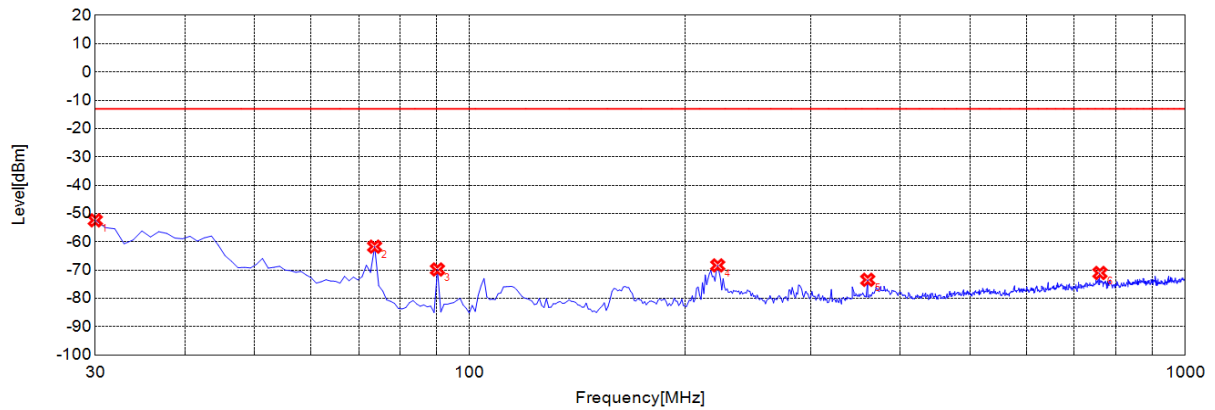


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	30.0000	-52.42	-13.00	39.42	-14.56	-42.62	28.06	Horizontal
2	73.6940	-61.73	-13.00	48.73	-19.95	-42.46	22.51	Horizontal
3	90.2000	-69.79	-13.00	56.79	-22.79	-42.58	19.79	Horizontal
4	222.2520	-68.36	-13.00	55.36	-17.16	-42.80	25.64	Horizontal
5	360.1300	-73.45	-13.00	60.45	-16.48	-41.88	25.40	Horizontal
6	760.1700	-71.03	-13.00	58.03	-8.77	-40.49	31.72	Horizontal

WCDMA Band II (WCDMA), Low Channel 30M-1G Horizontal



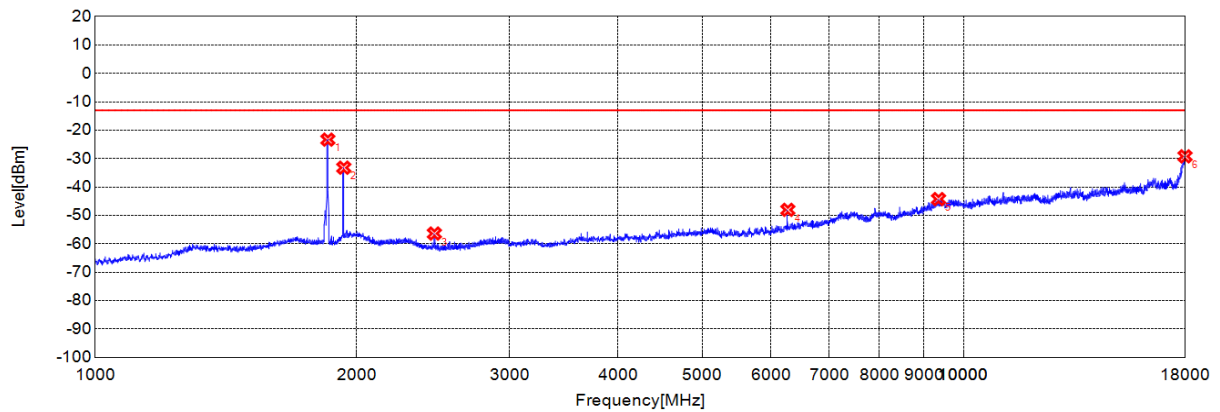


✘ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1852.9510	-23.33	-13.00	10.33	-8.34	-47.76	39.42	N/A
2	1932.9780	-33.21	-13.00	20.21	-6.82	-47.91	41.09	N/A
3	2457.8190	-56.39	-13.00	43.39	-10.74	-47.66	36.92	Horizontal
4	6275.5460	-48.05	-13.00	35.05	0.94	-41.10	42.04	Horizontal
5	9358.5600	-44.27	-13.00	31.27	11.62	-37.28	48.90	Horizontal
6	17994.9990	-29.21	-13.00	16.21	29.74	-27.41	57.15	Horizontal

WCDMA Band II (WCDMA), Low Channel 1G -18G Horizontal



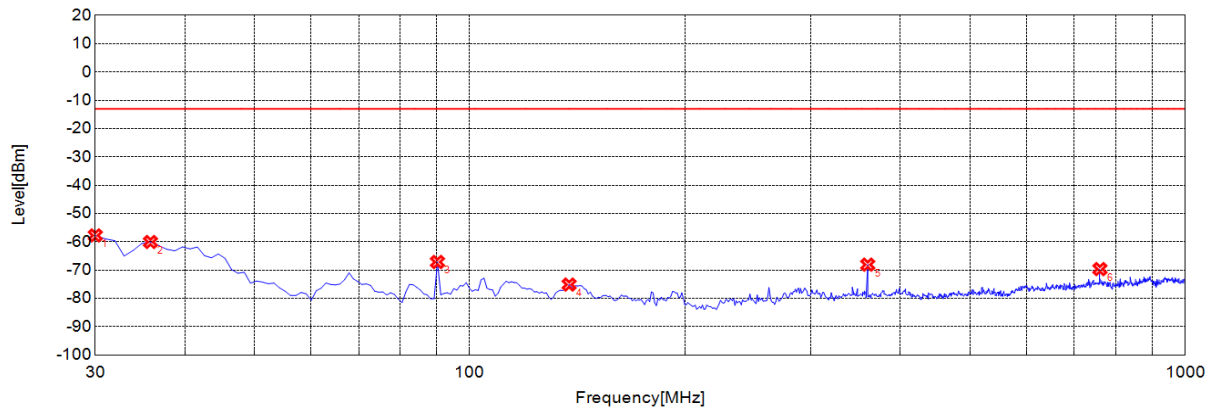


✘ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	30.0000	-57.76	-13.00	44.76	-20.03	-42.62	22.59	Vertical
2	35.8260	-60.08	-13.00	47.08	-19.72	-42.68	22.96	Vertical
3	90.2000	-67.15	-13.00	54.15	-20.37	-42.58	22.21	Vertical
4	137.7780	-75.12	-13.00	62.12	-19.65	-42.71	23.06	Vertical
5	360.1300	-68.09	-13.00	55.09	-16.03	-41.88	25.85	Vertical
6	760.1700	-69.66	-13.00	56.66	-8.58	-40.49	31.91	Vertical

WCDMA Band II (WCDMA), Mid Channel 30M-1G Vertical



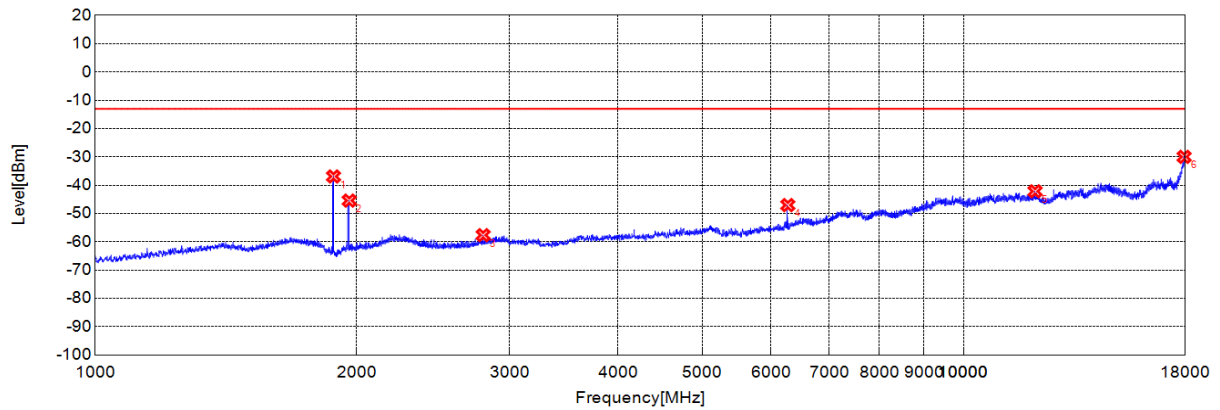


✖ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1880.9600	-36.92	-13.00	23.92	-12.16	-47.93	35.77	N/A
2	1960.9870	-45.45	-13.00	32.45	-11.84	-47.80	35.96	N/A
3	2797.2660	-57.66	-13.00	44.66	-9.25	-47.33	38.08	Vertical
4	6275.5460	-47.04	-13.00	34.04	0.84	-41.10	41.94	Vertical
5	12089.0150	-42.17	-13.00	29.17	14.60	-34.16	48.76	Vertical
6	17952.4920	-29.99	-13.00	16.99	27.96	-27.48	55.44	Vertical

WCDMA Band II (WCDMA), Mid Channel 1G -18G Vertical



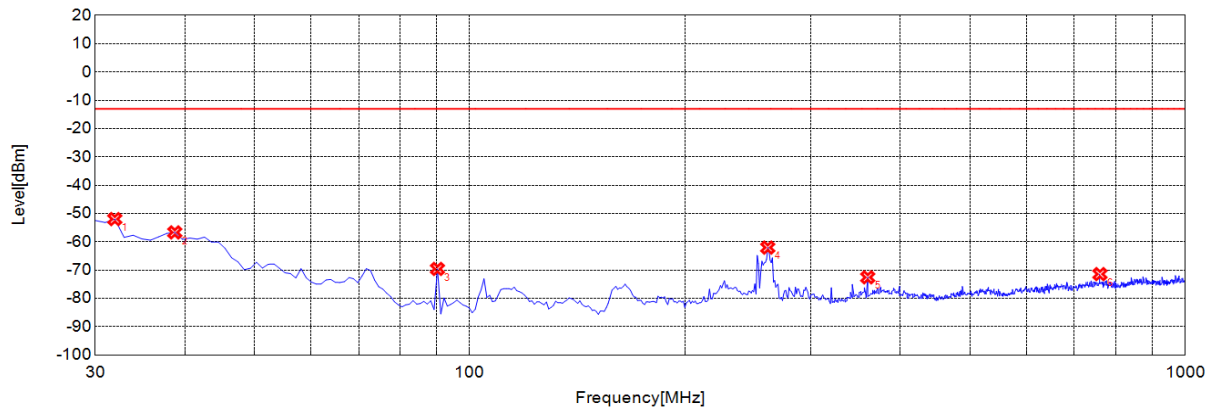


✂ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	31.9420	-51.98	-13.00	38.98	-13.73	-42.65	28.92	Horizontal
2	38.7390	-56.69	-13.00	43.69	-10.70	-42.62	31.92	Horizontal
3	90.2000	-69.6	-13.00	56.60	-22.79	-42.58	19.79	Horizontal
4	261.0910	-62.05	-13.00	49.05	-17.87	-42.60	24.73	Horizontal
5	360.1300	-72.57	-13.00	59.57	-16.48	-41.88	25.40	Horizontal
6	760.1700	-71.43	-13.00	58.43	-8.77	-40.49	31.72	Horizontal

WCDMA Band II (WCDMA), Mid Channel 30M-1G Horizontal



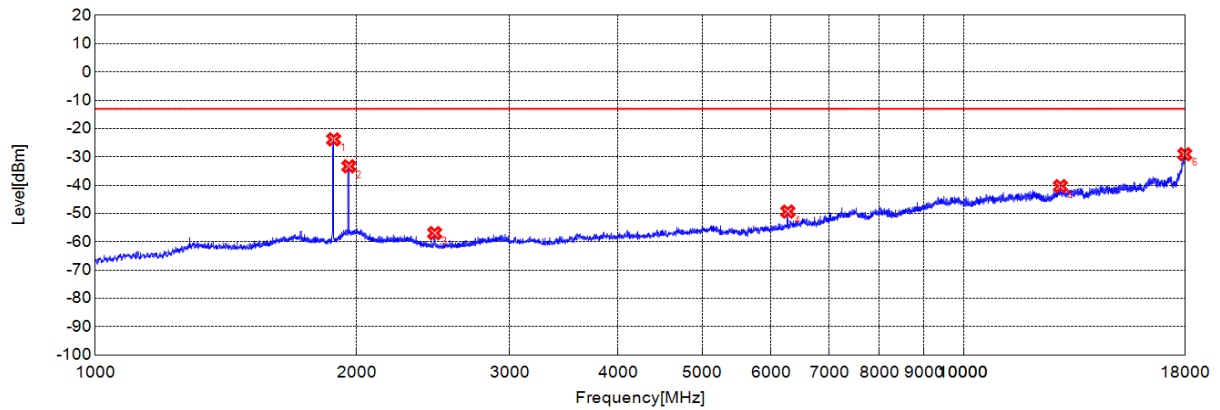


Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1881.6270	-23.82	-13.00	10.82	-7.77	-47.93	40.16	N/A
2	1958.9860	-33.34	-13.00	20.34	-6.34	-47.80	41.46	N/A
3	2459.8200	-56.95	-13.00	43.95	-10.75	-47.66	36.91	Horizontal
4	6275.5460	-49.34	-13.00	36.34	0.94	-41.10	42.04	Horizontal
5	12929.1550	-40.36	-13.00	27.36	16.80	-33.21	50.01	Horizontal
6	17982.4970	-29.07	-13.00	16.07	29.44	-27.43	56.87	Horizontal

WCDMA Band II (WCDMA), Mid Channel 1G -18G Horizontal



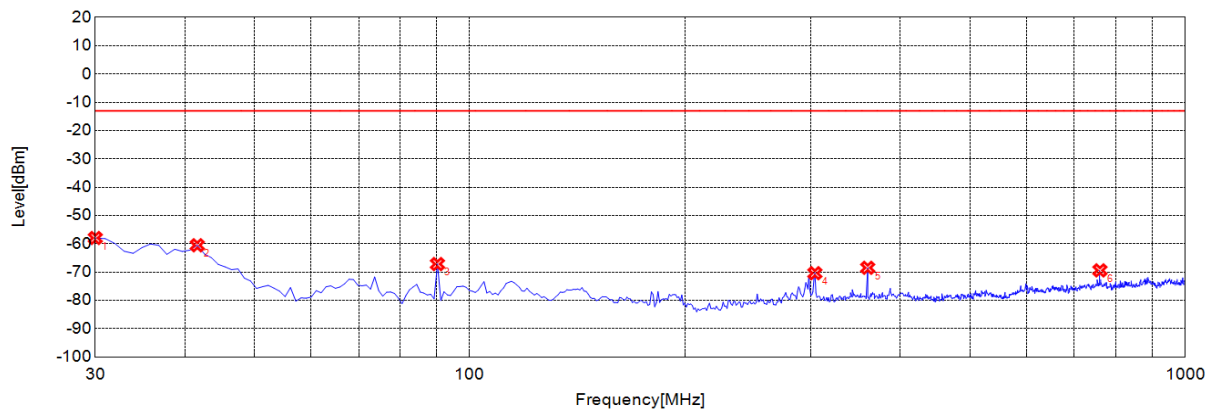


Final Test

Suspected List

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	30.0000	-57.96	-13.00	44.96	-20.03	-42.62	22.59	Vertical
2	41.6520	-60.53	-13.00	47.53	-19.16	-42.55	23.39	Vertical
3	90.2000	-67.17	-13.00	54.17	-20.37	-42.58	22.21	Vertical
4	303.8140	-70.4	-13.00	57.40	-17.22	-42.25	25.03	Vertical
5	360.1300	-68.49	-13.00	55.49	-16.03	-41.88	25.85	Vertical
6	760.1700	-69.4	-13.00	56.40	-8.58	-40.49	31.91	Vertical

WCDMA Band II (WCDMA), High Channel 30M-1G Vertical



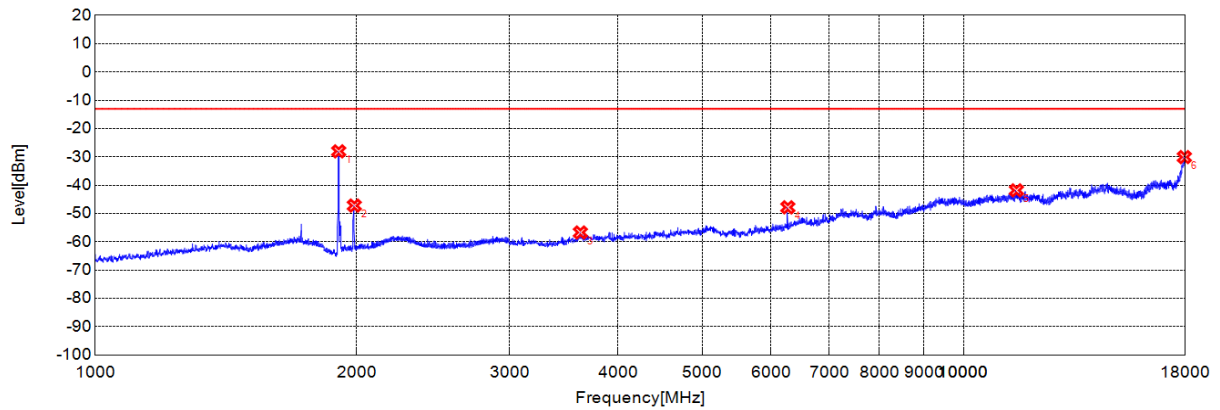


✘ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1906.9690	-28.05	-13.00	15.05	-12.49	-48.01	35.52	N/A
2	1987.6630	-47.21	-13.00	34.21	-11.51	-47.69	36.18	N/A
3	3620.1030	-56.73	-13.00	43.73	-6.74	-45.51	38.77	Vertical
4	6275.5460	-47.83	-13.00	34.83	0.84	-41.10	41.94	Vertical
5	11506.4180	-41.83	-13.00	28.83	14.78	-35.01	49.79	Vertical
6	17962.4940	-30.08	-13.00	17.08	28.22	-27.46	55.68	Vertical

WCDMA Band II (WCDMA), High Channel 1G -18G Vertical



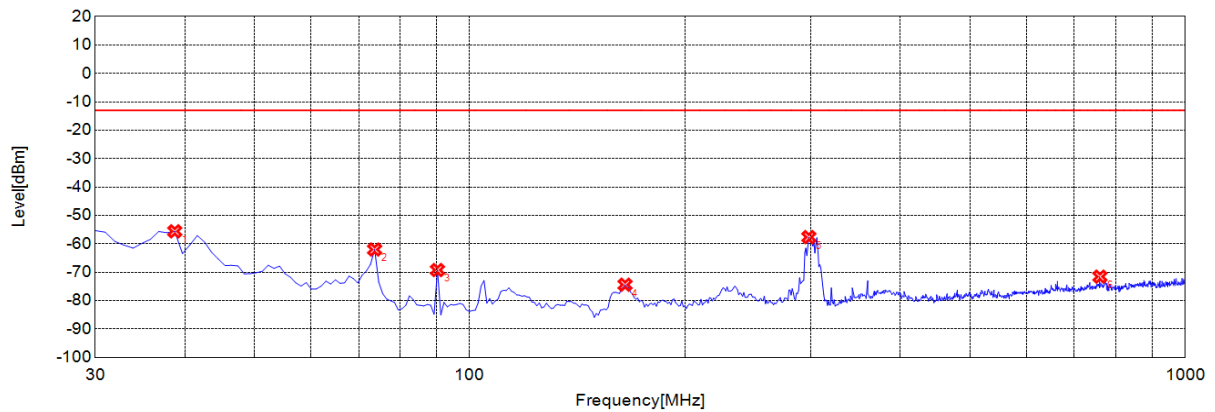


✘ Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	38.7390	-55.61	-13.00	42.61	-10.70	-42.62	31.92	Horizontal
2	73.6940	-62.01	-13.00	49.01	-19.95	-42.46	22.51	Horizontal
3	90.2000	-69.24	-13.00	56.24	-22.79	-42.58	19.79	Horizontal
4	164.9650	-74.41	-13.00	61.41	-23.63	-42.84	19.21	Horizontal
5	297.9880	-57.65	-13.00	44.65	-17.34	-42.27	24.93	Horizontal
6	760.1700	-71.56	-13.00	58.56	-8.77	-40.49	31.72	Horizontal

WCDMA Band II (WCDMA), High Channel 30M-1G Horizontal



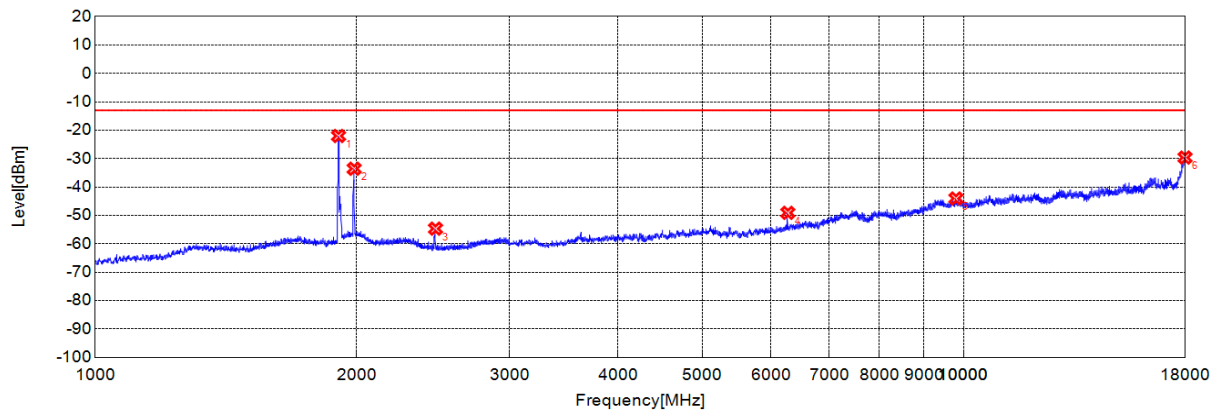

Final Test

Suspected List								
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Ant. Pol.
1	1906.3020	-22.04	-13.00	9.04	-7.29	-48.01	40.72	N/A
2	1986.9960	-33.57	-13.00	20.57	-5.83	-47.69	41.86	N/A
3	2465.1550	-54.67	-13.00	41.67	-10.78	-47.66	36.88	Horizontal
4	6275.5460	-49.1	-13.00	36.10	0.94	-41.10	42.04	Horizontal
5	9801.1340	-44.05	-13.00	31.05	12.60	-36.45	49.05	Horizontal
6	17994.9990	-29.64	-13.00	16.64	29.74	-27.41	57.15	Horizontal

WCDMA Band II (WCDMA), High Channel 1G -18G Horizontal





Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Output Power	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Radiated Emission	$\pm 2.95\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.





Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





REPORT No.: SZ23040073W01

4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY51511149	N9020A	Agilent	2022.07.04	2023.07.03
				2023.06.21	2024.06.20
Communication Test Station	6200995016	MT8820C	Anritsu	2022.10.11	2023.10.10
Temperature Chamber	S022177101 00089002	KMT-36LF 1A0	KOMEG	2022.11.18	2023.11.17

4.2 List of Software Used

Description	Manufacturer	Software Version
MORLAB EMCR V1.2	MORLAB	V1.2



**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Loop Antenna	00131	FMZB 1519B	SCHWARZBECK	2022.10.25	2025.10.24
Loop Antenna	1519-022	FMZB 1519	SCHWARZBECK	2022.02.11	2025.02.10
Bi-Log Antenna	9163-274	VULB 9163	SCHWARZBECK	2022.11.07	2025.11.06
Bi-Log Antenna	9163-519	VULB 9163	SCHWARZBECK	2022.05.25	2025.05.24
Horn Antenna	9120D-963	BBHA 9120D	SCHWARZBECK	2022.05.25	2025.05.24
Horn Antenna	01774	BBHA 9120D	SCHWARZBECK	2022.07.13	2025.07.12
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
Signal Analyzer	MY56060145	N9020A	Agilent	2023.06.21	2024.06.20
6db Attenuator	E191001	BW-N6W5+	Mini-circuits	2022.10.11	2023.10.10
Preamplifier (2GHz-8GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2023.07.04	2024.07.03
System Simulator	152038	CMW500	R&S	2022.10.11	2023.10.10
System Simulator	MY48364176	8960-E5515 C	Agilent	2023.02.27	2024.02.26
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03

————— END OF REPORT —————

