

TEST REPORT


EMC Test for LCWB-008

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-EM-2501-FC004

DATE OF ISSUE
January 24, 2025

Tested by
Jang-Ho Park



Technical Manager
Jeong-Hyun Choi



Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401



TEST REPORT

FCC SDoC

REPORT NO.

HCT-EM-2501-FC004

DATE OF ISSUE

January 24, 2025

FCC ID.

BEJ-LCWB008

Applicant

LG Electronics Inc.

170, Seongsan Pachong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do 51533, Republic of Korea

Product Name

RF Module

Model Name

LCWB-008

Date of Test

01.11.2025

Location of Test

☒ Permanent Testing Lab

☐ On Site Testing Lab

(Address: See clause 1.2)

Test Standard Used

FCC CFR 47 PART 15 Subpart B Class B
ANSI C63.4-2014

Test Results

Refer to the present document

Manufacturer

LG Electronics Inc.

Brand Name

LG

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	January 24, 2025	Initial Release

Notice

Content

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

This test report provides test result(s) under the scope accredited by the Korea Laboratory Accreditation Scheme (KOLAS), which signed the ILAC-MRA.

(KOLAS (KS Q ISO/IEC 17025) Accreditation No. KT197)

CONTENTS

1. TESTING LABORATORY	5
1.1 General Information	5
1.2 Location of the Test Site	5
2. GENERAL INFORMATION	6
2.1 Description of EUT	6
2.2 Power Source	6
2.3 Tested System Details	7
2.4 Cable Description	7
2.5 Noise Suppression Parts on Cable (I/O Cable)	7
2.6 Test Facility	8
2.7 Calibration of Measuring Instrument	8
2.8 Measurement Uncertainty	8
3. DESCRIPTION OF TEST	9
3.1 Measurement of Conducted Emission	9
3.2 Antenna Conducted Power Measurements	10
3.3 Measurement of Radiated Emission	11
3.4 Configuration of Tested System	12
4. OPERATION OF THE EUT	13
5. MEASURING INSTRUMENTS	14
6. EMISSION TEST SUMMARY	15
6.1 Conducted Emission	15
6.2 Antenna Conducted Power Emission	16
6.3 Radiated Emission Below 1 GHz	16
6.4 Radiated Emission Above 1 GHz	20
APPENDIX A. TEST SETUP PHOTO	23

1. TESTING LABORATORY

1.1 General Information

Organization Name	HCT Co., Ltd.
Address	2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Telephone	+82 31 645 6300
FAX	+82 31 645 6401

1.2 Location of the Test Site

The test site is located at the following address.;

Address	74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Telephone	+82 31 645 6300
FAX	+82 31 645 6401

2. GENERAL INFORMATION

2.1 Description of EUT

FCC ID.	BEJ-LCWB008
Model Name	LCWB-008
Product Name	RF Module
Frequency Range	Bluetooth LE: 2 402 MHz to 2 480 MHz WiFi 2.4 GHz: 2 412 MHz to 2 462 MHz
Power Rating	DC 3.3 V, DC 5 V
Manufacturer	LG Electronics Inc.

2.2 Power Source

During the test, the following power supply levels are utilized/provided.;

Power supply: AC 120 V, 60 Hz

2.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer
RF Module (EUT)	LCWB-008	-	LG Electronics Inc.
DC Power Supply	PWS-3003D	04050810	Protek

2.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	2 pin	N/A	N	0.4(D)
	2 pin	N	N/A	0.6(P)

“(D)” data cable and “(P)” power cable.

2.5 Noise Suppression Parts on Cable (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	2pin	N	-	N	-
	2pin	N	-	N	

2.6 Test Facility

Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014 and ANSI C63.4a-2017

Our laboratories are accredited and designated in accordance with the provisions of Radio Waves ACT and International Standard ISO/IEC 17025:2017. (National Radio Research Agency, CABID No. KR0032)

2.7 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017.

2.8 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the UCISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Test Item	Test Site (Chamber)	Expanded Uncertainty
Radiated Emission (30 MHz to 1 GHz)	3 m Semi Anechoic Chamber #1	5.8 dB
Radiated Emission (1 GHz to 18 GHz)	3 m Semi Anechoic Chamber #1	4.9 dB

3. DESCRIPTION OF TEST

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).

If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).

Other support units were connected to the power mains through another LISN.

The two LISNs provide $50\ \Omega / 50\ \mu\text{H}$ of coupling impedance for the measuring instrument.

b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.

c. The frequency ranges from 150 kHz to 30 MHz was searched.

Conducted Emission Limits

Frequency (MHz)	Class A Quasi-Peak (dB μ V)	Class A Average (dB μ V)	Class B Quasi-Peak (dB μ V)	Class B Average (dB μ V)
0.15 to 0.5	79	66	66 to 56*	56 to 46*
0.5 to 5	73	60	56	46
5 to 30	73	60	60	50

NOTE. The more stringent limit applies at transition frequencies.

[*] The limit level in dB μ V decreases linearly with the logarithm of frequency.

3.2 Antenna Conducted Power Measurements

The test procedure was in accordance with ANSI C63.4-2014, Clause 12.2.6.

Antenna-conducted power measurements shall be performed on each broadcast reception tuner input in accordance with the requirements of the applicable regulatory authority. For example, see 47 CFR paragraph 15.111 and ANSI C63.4 paragraph 12.1.5 and Appendix H5 (test method) with the following clarifications:

- a. With the TV tuned to each channel [e.g., channel 2 to channel 69], the level of the local oscillator frequency and the second harmonic shall be measured and recorded for each tuner.
- b. Antenna-conducted power measurements shall be performed with the EUT antenna terminals connected directly to either a spectrum analyzer or another measurement instrument conforming to ANSI C63.2 or CISPR 16-1 or the latest revision thereof, if the antenna impedance matches the impedance of the measuring instrument.

Otherwise, use a balun or impedance-matching network to connect the measuring instrument to the antenna terminals of the EUT. Manufacturer-supplied interconnect cabling or wiring shall be used, or if none is supplied, the cable shall be commercially available and a maximum of 2 m in length. Losses in decibels in any balun or impedance-matching network used shall be added to the measured value in dB μ V.

Antenna Conducted Power Emission Limits

Frequency (MHz)	Limits (dB μ V)	
	Quasi-Peak	Peak
30 to 1 000	51.7	-
1 000 to 2 150	-	51.7

3.3 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber.
The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. (1 GHz to 40 GHz)

Radiated Emission Limits


Frequency (MHz)	Class A			Class B		
	Antenna Distance (m)	Field Strength ($\mu\text{V/m}$)	Quasi-Peak (dB $\mu\text{V/m}$)	Antenna Distance (m)	Field Strength ($\mu\text{V/m}$)	Quasi-Peak (dB $\mu\text{V/m}$)
30 to 88	10	90	39.0	3	100	40.0
88 to 216	10	150	43.5	3	150	43.5
216 to 960	10	210	46.4	3	200	46.0
Above 960	10	300	49.5	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Class A		Class B		
		Peak (dB $\mu\text{V/m}$)	Average (dB $\mu\text{V/m}$)	Peak (dB $\mu\text{V/m}$)	Average (dB $\mu\text{V/m}$)	
Above 1 000	3	80	60	74	54	

Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

3.4 Configuration of Tested System

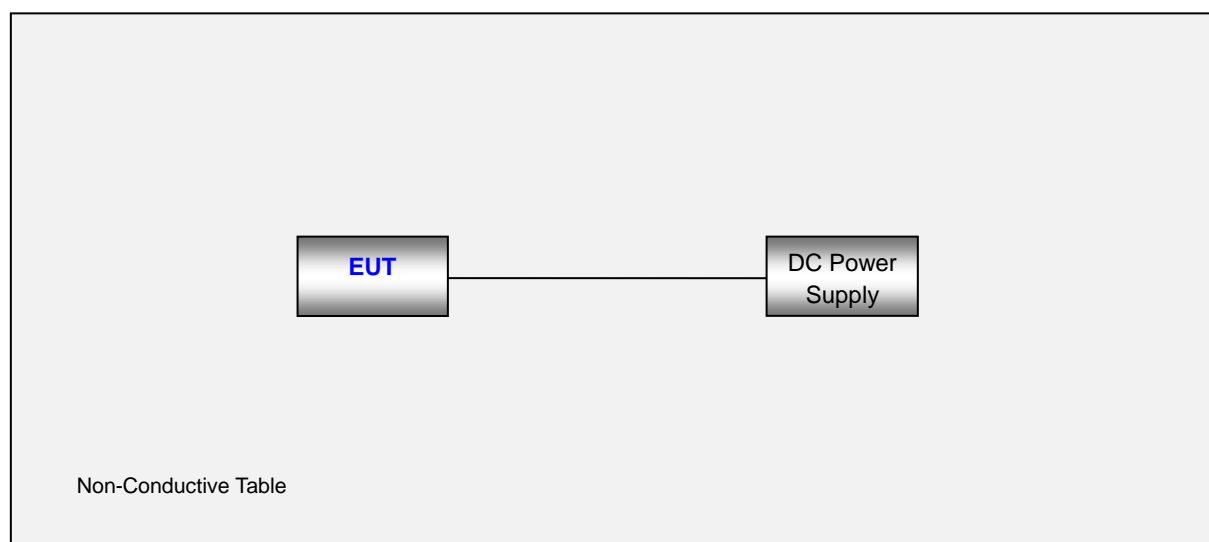

4. OPERATION OF THE EUT

During preliminary test and final tests, the following operating mode was investigated.

It was tested the following operating mode, after connecting all peripheral devices.

Operating Mode: Idle mode (3.3 V)
Idle mode (5 V)

5. MEASURING INSTRUMENTS

Type	Model Name	Manufacturer	Serial Number	Cal. Cycle	Next Cal. Date (yy.mm.dd)
Conducted emission					
<input type="checkbox"/> EMI Test Receiver	ESR7	Rohde&Schwarz	101910	1 year	2025.08.27
<input type="checkbox"/> LISN	ENV4200	Rohde & Schwarz	100054	1 year	2026.01.09
<input type="checkbox"/> LISN	ENV216	Rohde & Schwarz	102246	1 year	2025.11.19
<input type="checkbox"/> LISN	ENV216	Rohde & Schwarz	100073	1 year	2025.05.07
<input type="checkbox"/> Software	EMC32	Rohde & Schwarz	-	-	-
Antenna Conducted Power Emission					
<input type="checkbox"/> EMI Test Receiver	ESCI	Rohde & Schwarz	100584	1 year	2025.05.08
<input type="checkbox"/> Impedance Matching Pad	PE7070	PASTERNAK	5	1 year	2026.01.08
Radiated emission below 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	ESU40	Rohde & Schwarz	100524	1 year	2025.05.07
<input checked="" type="checkbox"/> Bilog Antenna	VULB9168	Schwarzbeck	255	1 year	2025.03.10
<input checked="" type="checkbox"/> Antenna master	MA4640-XP-ET	INNCO SYSTEM	-	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	CO3000	INNCO SYSTEM	CO3000/870 /35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	1060	INNCO SYSTEM	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	CO2000	INNCO SYSTEM	CO2000/095 /7590304/L	N/A	-
<input checked="" type="checkbox"/> Software	EMC32	Rohde&Schwarz	-	-	-
Radiated emission above 1 GHz					
<input checked="" type="checkbox"/> EMI test receiver	ESU40	Rohde & Schwarz	100524	1 year	2025.05.07
<input checked="" type="checkbox"/> Horn Antenna	HF907	Rohde & Schwarz	103160	1 year	2025.10.15
<input checked="" type="checkbox"/> Power Amplifier	TK-PA18H	TESTEK	170034-L	1 year	2025.10.14
<input checked="" type="checkbox"/> Antenna master	MA4640-XP-ET	INNCO SYSTEM	-	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	CO3000	INNCO SYSTEM	CO3000/870 /35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	1060	INNCO SYSTEM	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	CO2000	INNCO SYSTEM	CO2000/095 /7590304/L	N/A	-
<input type="checkbox"/> Horn Antenna	BBHA 9170	Schwarzbeck	BBHA 9170 #786	1 year	2025.10.30
<input type="checkbox"/> Power Amplifier	TK-PA1840H	TESTEK	170030-L	1 year	2025.02.20
<input checked="" type="checkbox"/> Software	EMC32	Rohde & Schwarz	-	-	-

6. EMISSION TEST SUMMARY

6.1 Conducted Emission (Not Applicable)

6.1.1 Operating Condition

The test results of conducted emission at mains ports provide the following information:

Date of Test (yy.mm.dd)	---							
Temperature	min.		°C		Relative Humidity	min.		%
	max.		°C			max.		%
Test Site	EMI Shield Room							
Test Standard Used	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014							
Frequency Range	0.15 MHz to 30 MHz							
Detector	Quasi-Peak, CISPR-Average							
Bandwidth	9 kHz (6 dB)							
Operating Mode	---							

A Conducted emission is calculated by the following equation:

$$\begin{aligned} \text{Calculation Formula: } \text{QuasiPeak or CAverage} &= \text{Receiver Reading} + \text{Corr.} \\ \text{Corr.} &= \text{LISN Factor} + \text{Cable Loss} \\ \text{Margin} &= \text{Limit} - \text{QuasiPeak or CAverage} \end{aligned}$$

The measurements from both Live (L1) and Neutral (N) of the LISN are combined into a single graph.

6.1.2 Measurement Data

Not applicable

Since this product uses DC power source, this test does not apply.

6.2 Antenna Conducted Power Emission (Not Applicable)

6.2.1 Operating Condition

The test results of antenna conducted power emission provide the following information.;

Date of Test (yy.mm.dd)	---							
Temperature	min.		°C		Relative Humidity	min.		%
	max.		°C			max.		%
Test Site	EMI Shield Room							
Test Method Used	ANSI C63.4-2014							
Frequency Range	30 MHz to 2150 MHz							
Detector / Bandwidth	For frequencies ≤ 1 GHz: Quasi-peak / 120 kHz For frequencies ≥ 1 GHz: Peak / 1 MHz							
Operating Mode	---							

6.2.2 Measurement Data

Not applicable

6.3 Radiated Emission Below 1 GHz

6.3.1 Operating Condition

The test results of radiated emission provide the following information:

Date of Test (yy.mm.dd)	2025.01.11							
Temperature	min.	18.3	°C		Relative Humidity	min.	26.4	%
	max.	22.9	°C			max.	30.7	%
Test Site	3 m Semi Anechoic Chamber #1							
Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014							
Frequency Range	30 MHz to 1 000 MHz							
Detector	Quasi-Peak							
Bandwidth	120 kHz (6 dB)							
Antenna Height	1 m to 4 m							
Measurement Distance	3 m							
Antenna Polarity	Horizontal, Vertical							
Operating Mode	Idle mode (3.3 V) Idle mode (5 V)							

A field strength is calculated by the following equation.


$$\begin{aligned}
 \text{Calculation Formula: } & \text{QuasiPeak} = \text{Reading (Receiver Reading)} + \text{Corr.} \\
 & \text{Corr. (Correction Factor)} = \text{Antenna Factor} + \text{Cable Loss} \\
 & \text{Margin} = \text{Limit} - \text{QuasiPeak}
 \end{aligned}$$

The measurements' polarities are H and V, where H means horizontal and V means vertical.

6.3.2 Measurement Data

[3.3 V] Idle Mode


Full Spectrum

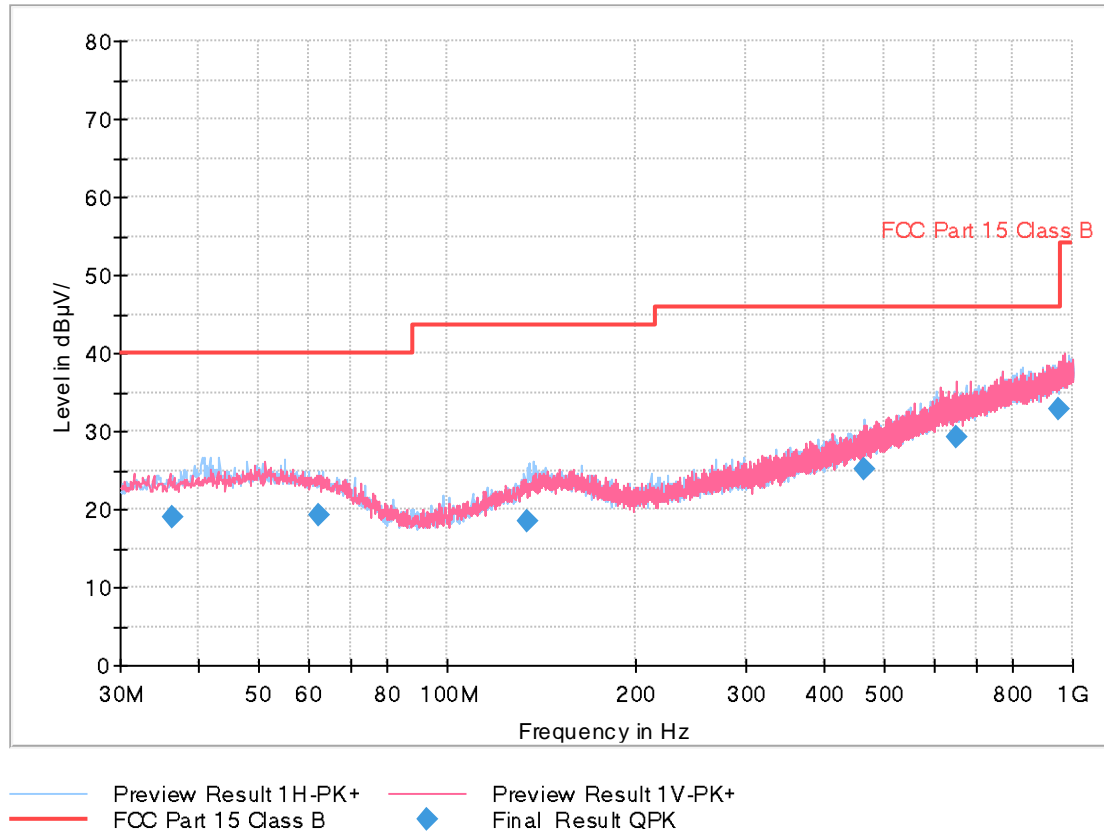

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.4034	19.00	40.00	21.00	198.1	H	319.0	19.3
62.2221	19.20	40.00	20.80	198.7	H	314.0	19.4
134.2379	18.50	43.50	25.00	198.8	H	92.0	18.8
464.4771	25.10	46.00	10.90	181.4	H	237.0	24.6
653.9958	29.20	46.00	16.80	181.8	V	359.0	28.2
946.1772	32.80	46.00	13.20	314.2	V	92.0	32.1

[5 V] Idle Mode

Full Spectrum

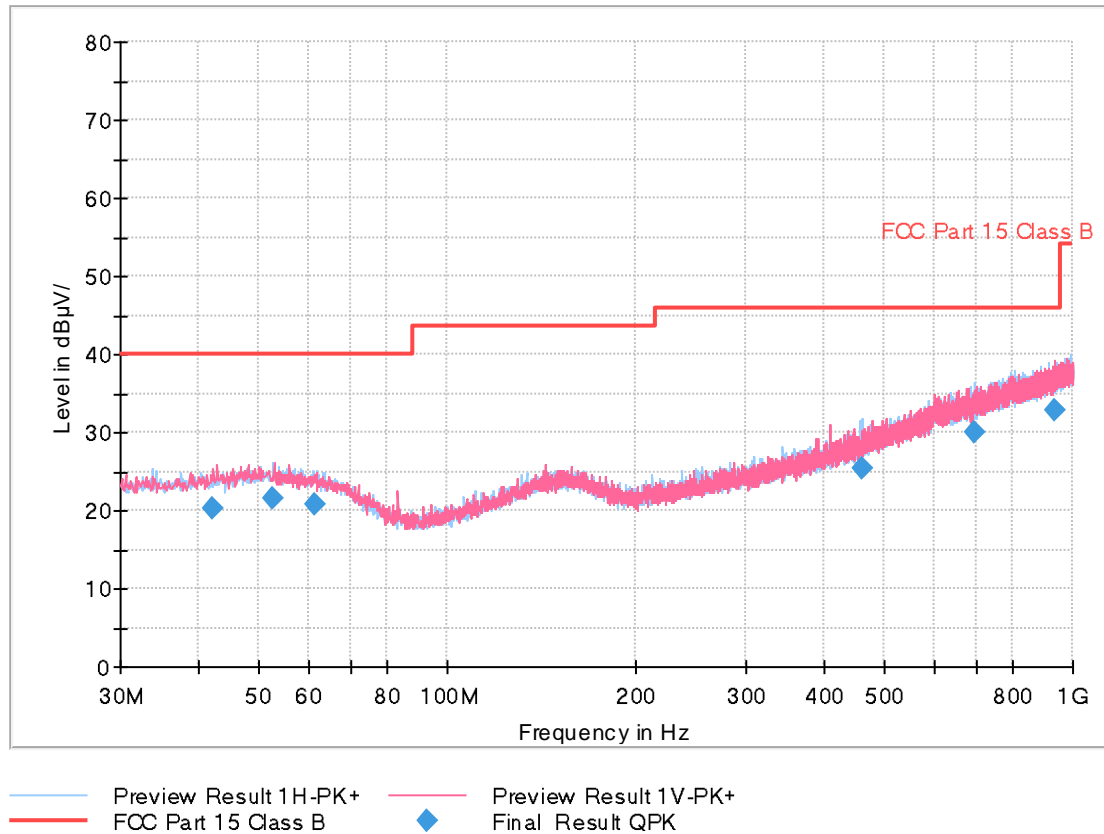

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.1985	20.30	40.00	19.70	311.7	V	260.0	19.8
52.7625	21.50	40.00	18.50	398.0	V	46.0	20.2
61.2018	20.80	40.00	19.20	281.0	H	337.0	19.5
461.0043	25.30	46.00	20.70	125.2	H	107.0	24.5
695.7575	30.10	46.00	15.90	225.2	H	289.0	28.8
934.4036	32.70	46.00	13.30	274.4	V	0.0	31.9

6.4 Radiated Emission Above 1 GHz

6.4.1 Operating Condition

The test results of radiated emission provide the following information:

Date of Test (yy.mm.dd)	2025.01.11							
Temperature	min.	18.3	°C		Relative Humidity	min.	26.4	%
	max.	22.9	°C			max.	30.7	%
Test Site	3 m Semi Anechoic Chamber #1							
Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014							
Detector	Peak, CISPR-Average							
Bandwidth	1 MHz							
Highest Frequency	2480 MHz							
Tested Frequency Range	1 GHz to 18 GHz							
Antenna Height	1 m to 4 m							
Measurement Distance	3 m							
Operating Mode	Idle mode (3.3 V) Idle mode (5 V)							

A field strength is calculated by the following equation.


Calculation Formula: Peak or CAverage = Reading (Receiver Reading) + Corr.
Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
Margin = Limit - Peak or CAverage

The measurements' polarities are H and V, where H means horizontal and V means vertical.

6.4.2 Measurement Data

[3.3 V] Idle Mode

Full Spectrum

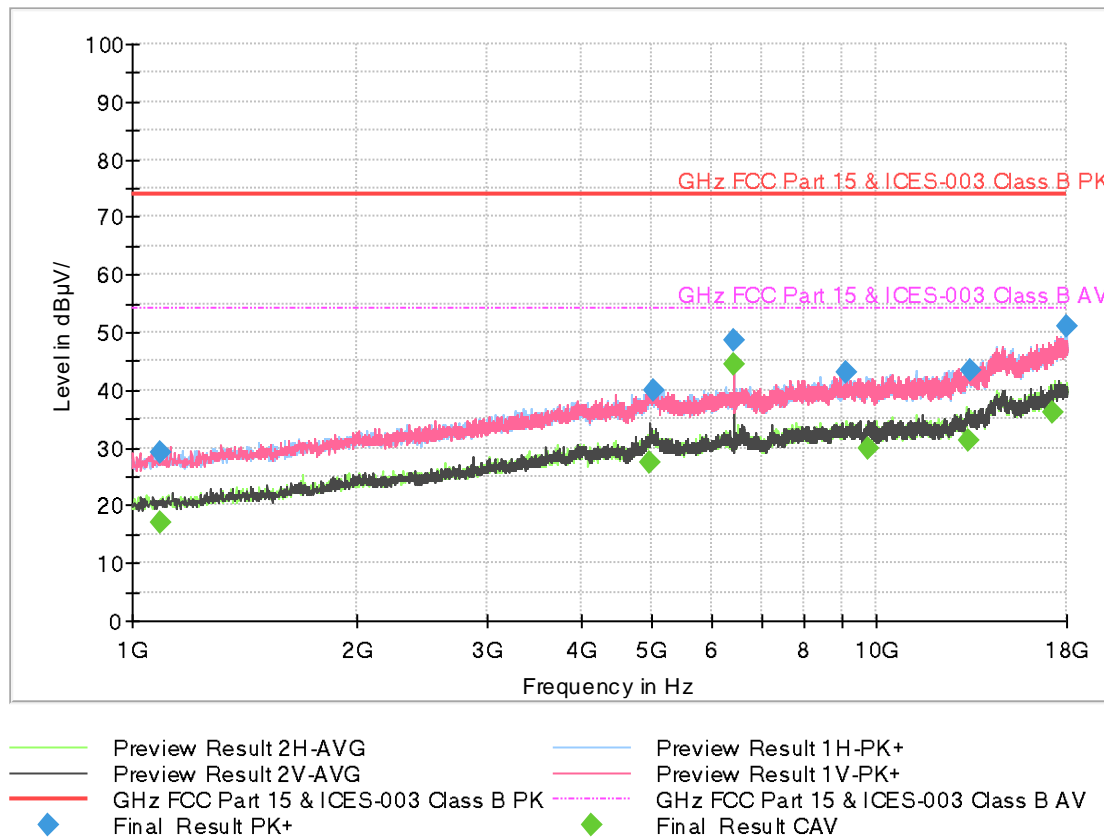


Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1092.8600	29.01	74.00	44.99	181.3	V	1.0	-30.9
5007.6250	39.76	74.00	34.24	102.2	H	71.0	-14.6
6432.0750	48.47	74.00	25.53	102.4	H	105.0	-12.0
9073.3600	43.06	74.00	30.94	206.2	H	266.0	-9.3
13397.8850	43.47	74.00	30.53	201.9	V	25.0	-3.5
17995.0921	50.90	74.00	23.10	321.4	H	230.0	6.5

Frequency (MHz)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1087.7750	16.98	54.00	37.02	177.0	V	31.0	-30.9
4965.3850	27.30	54.00	26.70	125.1	V	20.0	-14.7
6431.8900	44.33	54.00	9.67	102.2	H	105.0	-12.0
9760.2750	30.03	54.00	23.97	295.8	V	350.0	-8.3
13248.1500	31.21	54.00	22.79	324.9	H	104.0	-3.8
17283.2150	36.11	54.00	17.89	208.1	H	354.0	3.4

[5 V] Idle Mode

Full Spectrum

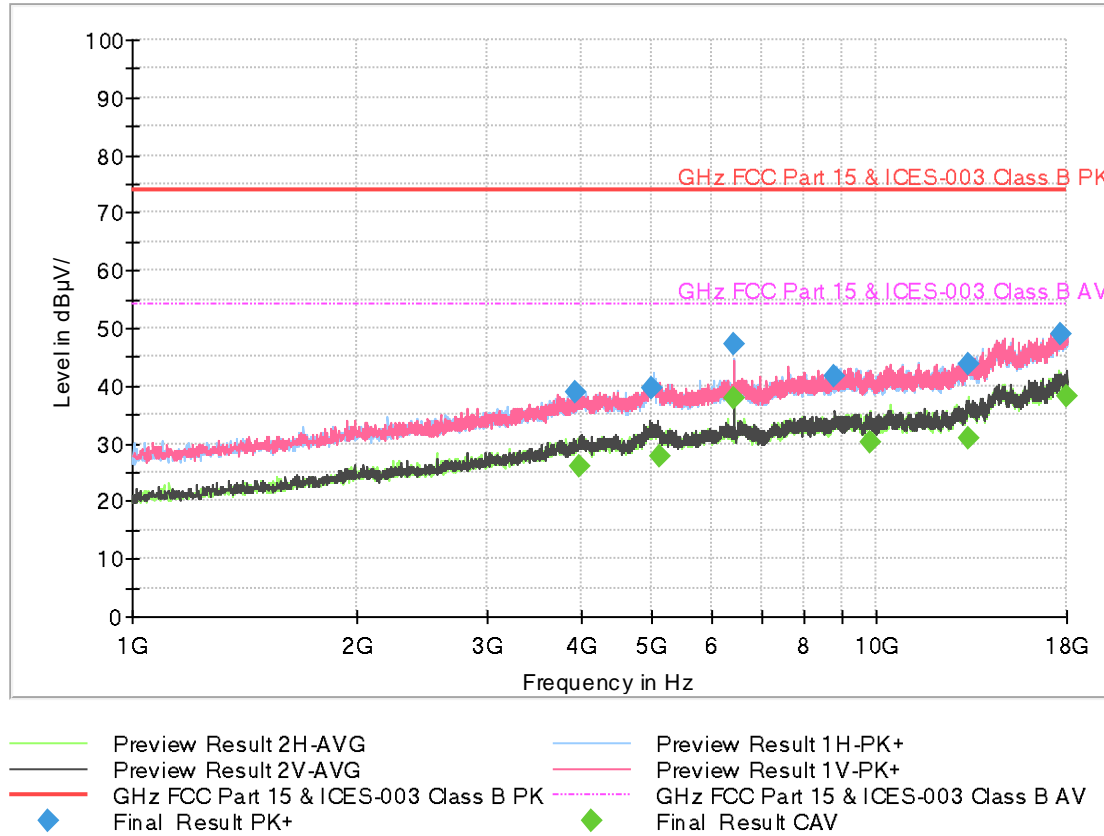

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
3948.6950	38.97	74.00	35.03	100.0	V	104.0	-17.6
4993.2050	39.54	74.00	34.46	292.4	H	0.0	-14.6
6432.0450	47.24	74.00	26.76	217.7	H	93.0	-12.0
8786.6200	41.79	74.00	32.21	323.0	H	3.0	-9.2
13265.4150	43.63	74.00	30.37	325.1	H	120.0	-3.8
17677.3850	48.89	74.00	25.11	224.8	V	269.0	4.8

Frequency (MHz)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
3986.5200	25.98	54.00	28.02	274.1	V	24.0	-17.5
5096.2200	27.65	54.00	26.35	174.4	V	123.0	-14.4
6432.1150	37.92	54.00	16.08	274.2	H	89.0	-12.0
9785.3950	30.28	54.00	23.72	108.9	H	0.0	-8.2
13285.2950	30.93	54.00	23.07	107.0	H	335.0	-3.8
17997.5121	38.34	54.00	15.66	109.3	V	69.0	6.5

APPENDIX A. TEST SETUP PHOTO

Please refer to Appendix. A and test setup photo file no. as follows;

File No.	Date of Issue	Description
HCT-EM-2501-FC004-P	January 24, 2025	Initial Release

End of report