TEST REPORT

Report No.:	TW2303072E
Applicant:	Shenzhen Zigxico Technology Co., Ltd.
Product:	Smart Wi-Fi Camera
Model No.:	S43, S43-KB, S47, S48, S49, R3569, SF-G09D, SF-G09D-4MP, SF-C383T, SF-C383T-4G, SF-A09
Trademark:	Zigxico
Test Standards:	FCC Part 15.247
Test result:	It is herewith confirmed and found to comply with the requirements set up by ANSI C63.10, FCC Part 15.247 for the evaluation of electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: March 24, 2023

Results appearing herein relate only to the sample tested
The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Special Statement:

The testing quality ability of our laboratory meet with “Quality Law of People’s Republic of China” Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Test Report Conclusion

Content

1.0 **General Details**

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688

Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189

For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Zigxico Technology Co., Ltd.

Address: 3F, building B, Shuichanjingwan First Industrial Park, Gushu,Xixiang Street, Baoan District, Shenzhen, China.

Telephone: 15820477919

Fax: --

1.3 Description of EUT

Product:	Smart Wi-Fi Camera
Manufacturer:	Shenzhen Zigxico Technology Co., Ltd.
Address:	3F, building B, Shuichanjingwan First Industrial Park, Gushu,Xixiang Street, Baoan District, Shenzhen, China.
Trademark:	Zigxico
Model Number:	S43
Additional Model Number:	S43-KB, S47, S48, S49, R3569, SF-G09D, SF-G09D-4MP, SF-C383T, SF-C383T-4G, SF-A09
Rating:	DC5.0V, 1A
Battery:	DC3.7V, 5200mAh Li-ion battery
Type of Modulation	IEEE 802.11b: DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Frequency range	IEEE 802.11b/g/n (HT20): 2412-2462MHz; IEEE 802.11n HT40: 2422-2452MHz
Channel Spacing	5MHz for IEEE 802.11b/g/n (HT20, HT40)
Air Data Rate	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

	IEEE 802.11n HT20/HT40: mcs0-mcs7
Frequency Selection	By software
Channel Number	IEEE 802.11b/g/n (HT20): 11 Channels; IEEE 802.11n (HT40): 7 Channels;
Antenna:	Integral antenna with gain 3.0dBi Max (Get from the antenna specification)

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2023-03-02 to 2023-03-24

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by _____

Print Name: Andy Xing

2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17
LISN	R&S	EZH3-Z5	100253	2022-07-18	2023-07-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-07-18	2023-07-17
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2022-07-15	2023-07-14
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2022-07-18	2023-07-17
Power sensor	Anritsu	MA2491A	32263	2022-07-18	2023-07-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic	--	--	N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2022-07-15	2023-07-14
EMI Test Receiver	RS	ESCS 30	834115/006	2022-07-15	2023-07-14
Spectrum	HP/Agilent	E4407B	MY50441392	2022-07-15	2023-07-14
Spectrum	RS	FSP	1164.4391.38	2022-07-15	2023-07-14
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA	--	2022-07-15	2023-07-14
RF Cable	Zhengdi	7m	--	2022-07-15	2023-07-14
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-07-15	2023-07-14
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-07-15	2023-07-14
LISN	SCHAFFNER	NNB42	00012	2022-08-18	2023-07-17

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing;

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: mcs0 data rate (worst case) were chosen for full testing

Note: During the test, the duty cycle was set up to >98%

3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	Pass	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	Pass	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	Pass	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm/3kHz	Pass	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

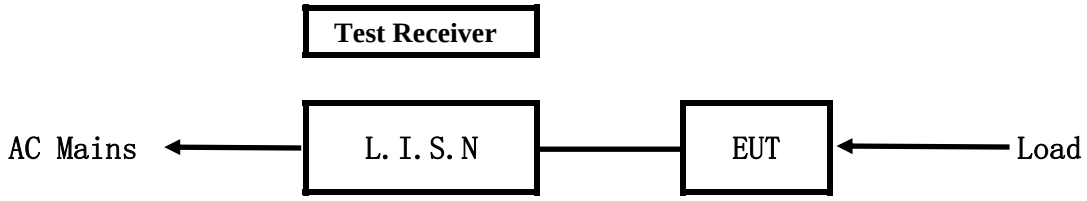

EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013.The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

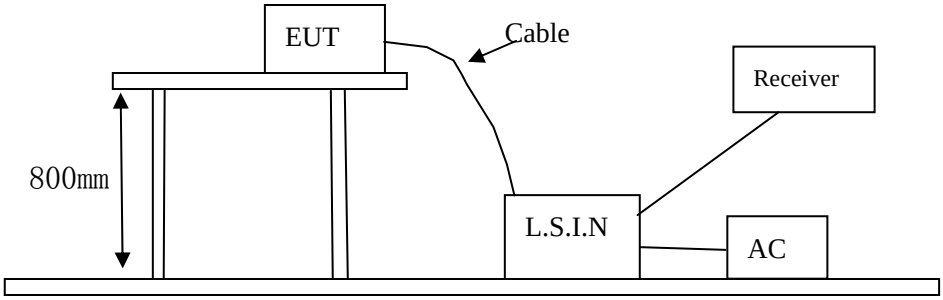

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Smart Wi-Fi Camera	Shenzhen Zigxico Technology Co., Ltd.	S43, S43-KB, S47, S48, S49, R3569, SF-G09D, SF-G09D-4MP, SF-C383T, SF-C383T-4G, SF-A09	2AZHU-S43

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
--	--	--	--	--

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

A Setup the EUT and simulators as shown on follow

B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency (MHz)	Limits (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ～ 0.50	66.0～56.0*	56.0～46.0*
0.50 ～ 5.00	56.0	46.0
5.00 ～ 30.00	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

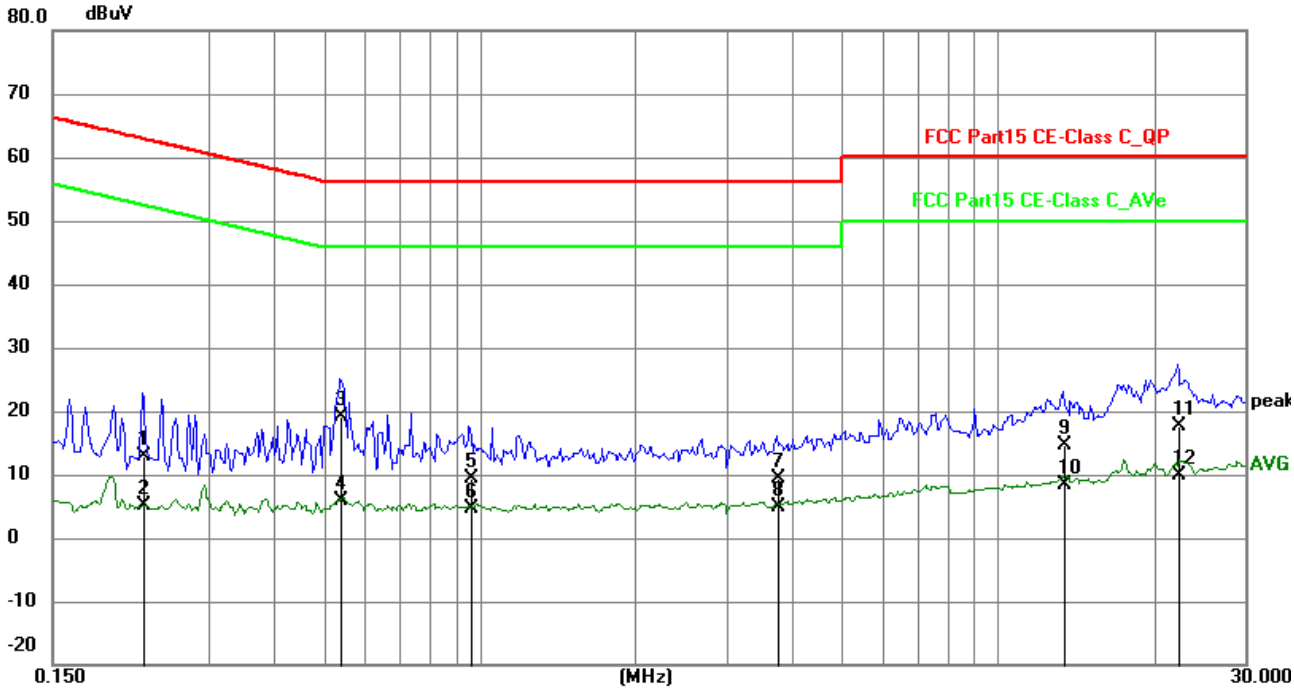

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2241	3.09	9.75	12.84	62.67	-49.83	QP	P
2	0.2241	-4.65	9.75	5.10	52.67	-47.57	AVG	P
3	0.5400	9.25	9.77	19.02	56.00	-36.98	QP	P
4	0.5400	-3.99	9.77	5.78	46.00	-40.22	AVG	P
5	0.9582	-0.51	9.79	9.28	56.00	-46.72	QP	P
6	0.9582	-5.25	9.79	4.54	46.00	-41.46	AVG	P
7	3.7410	-0.57	9.88	9.31	56.00	-46.69	QP	P
8	3.7410	-5.00	9.88	4.88	46.00	-41.12	AVG	P
9	13.3389	4.29	10.31	14.60	60.00	-45.40	QP	P
10	13.3389	-1.94	10.31	8.37	50.00	-41.63	AVG	P
11	22.2192	6.84	10.82	17.66	60.00	-42.34	QP	P
12	22.2192	-1.06	10.82	9.76	50.00	-40.24	AVG	P

B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

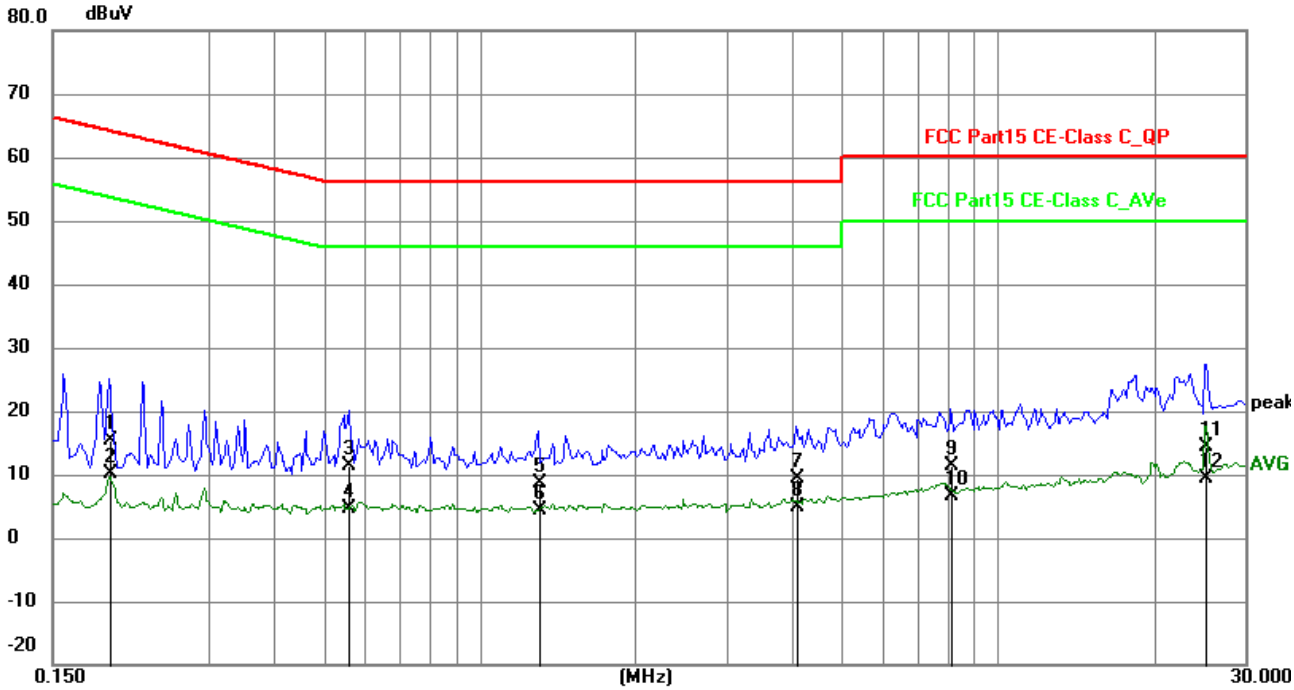

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1929	5.75	9.75	15.50	63.91	-48.41	QP	P
2	0.1929	0.38	9.75	10.13	53.91	-43.78	AVG	P
3	0.5595	1.67	9.77	11.44	56.00	-44.56	QP	P
4	0.5595	-5.13	9.77	4.64	46.00	-41.36	AVG	P
5	1.2966	-1.16	9.79	8.63	56.00	-47.37	QP	P
6	1.2966	-5.38	9.79	4.41	46.00	-41.59	AVG	P
7	4.0803	-0.61	9.89	9.28	56.00	-46.72	QP	P
8	4.0803	-5.04	9.89	4.85	46.00	-41.15	AVG	P
9	8.1168	1.26	10.07	11.33	60.00	-48.67	QP	P
10	8.1168	-3.55	10.07	6.52	50.00	-43.48	AVG	P
11	25.1871	3.50	11.00	14.50	60.00	-45.50	QP	P
12	25.1871	-1.58	11.00	9.42	50.00	-40.58	AVG	P

6 Radiated Emission Test

6.1 Test Method and test Procedure:

(1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189

(2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.

(3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.

(4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.

(5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.

(6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

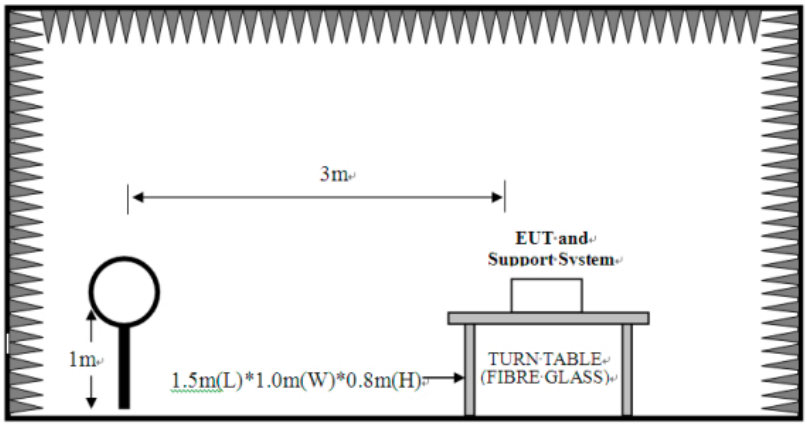

For radiated emissions from 30MHz to1GHz

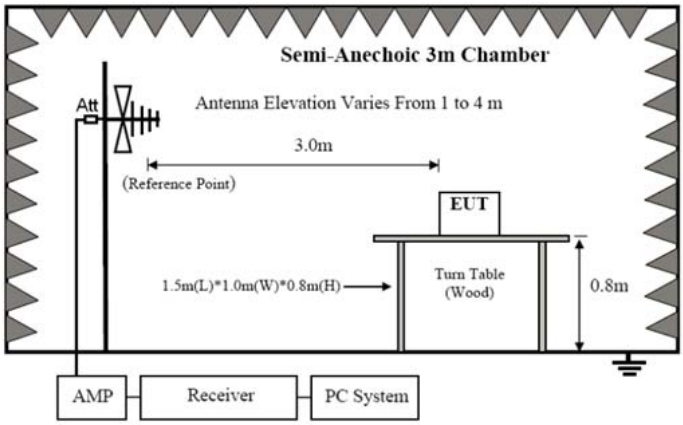

For radiated emissions above 1GHz

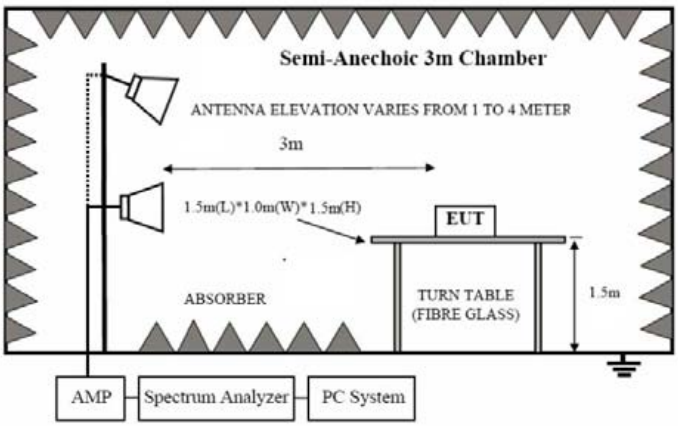

6.2 Configuration of The EUT

Same as section 5.3 of this report

6.3 EUT Operating Condition

Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

2. In the Above Table, the tighter limit applies at the band edges.

3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.

5. For radiated emissions from 9kHz to 30MHz， the emission level is much less than the limit for more than 20dB. No necessary to take down the record.

6. Worse case were recorded in the test report. 802.11g was the worst case.

7. Battery fully charged was used during the test

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: **Pass**

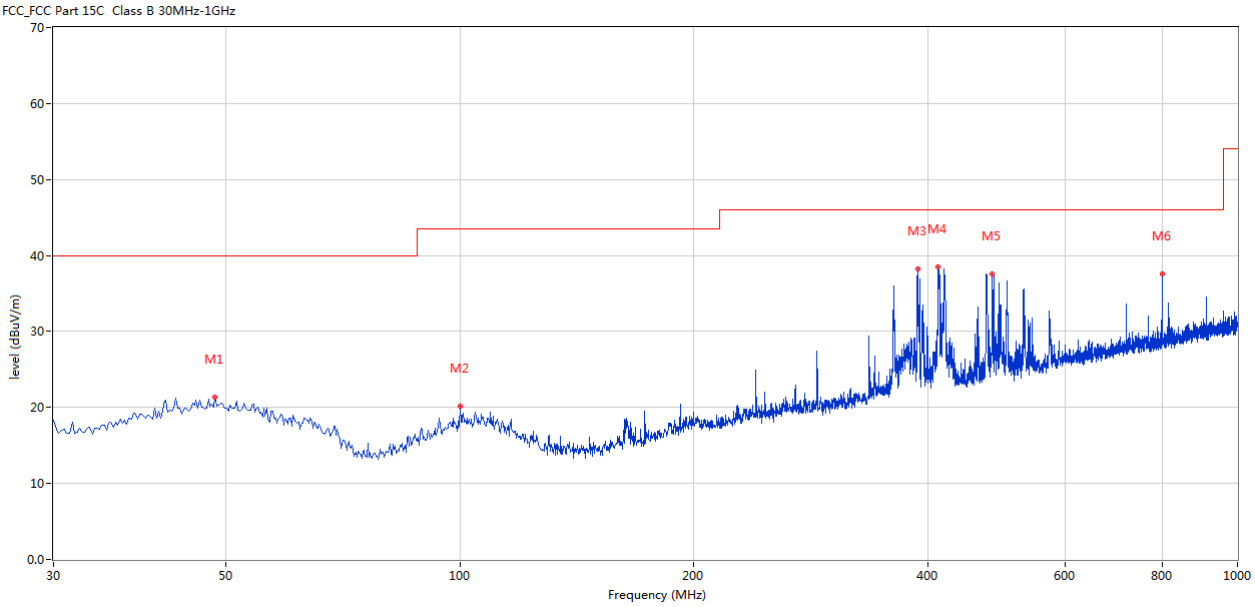

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	48.425	21.30	-11.22	40.0	-18.70	Peak	360.00	200	Horizontal	Pass
2	100.065	20.12	-13.52	43.5	-23.38	Peak	243.00	200	Horizontal	Pass
3	388.083	38.21	-8.94	46.0	-7.79	Peak	116.00	400	Horizontal	Pass
4	412.084	38.43	-8.44	46.0	-7.57	Peak	116.00	400	Horizontal	Pass
5	483.847	37.62	-7.37	46.0	-8.38	Peak	113.00	400	Horizontal	Pass
6	799.745	37.54	-2.97	46.0	-8.46	Peak	288.00	100	Horizontal	Pass

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: **Pass**

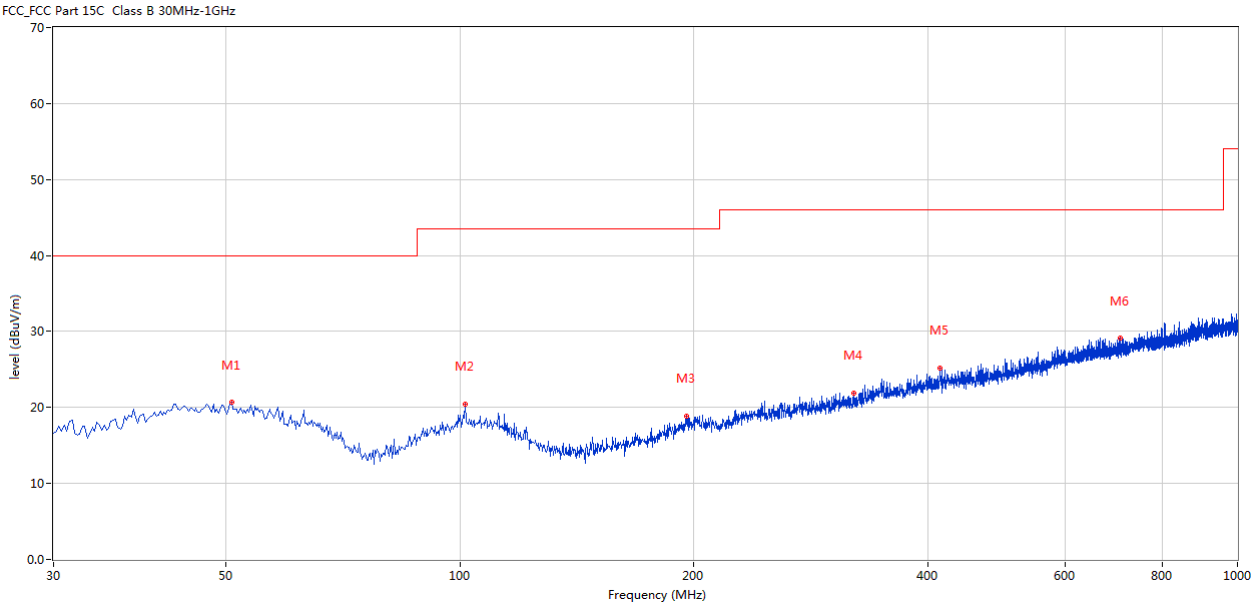

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	50.850	20.63	-11.40	40.0	-19.37	Peak	59.00	100	Vertical	Pass
2	101.520	20.49	-13.44	43.5	-23.01	Peak	360.00	200	Vertical	Pass
3	195.829	18.84	-13.66	43.5	-24.66	Peak	360.00	200	Vertical	Pass
4	320.927	21.83	-10.56	46.0	-24.17	Peak	0.00	300	Vertical	Pass
5	414.751	25.22	-8.22	46.0	-20.78	Peak	0.00	100	Vertical	Pass
6	707.376	29.08	-3.87	46.0	-16.92	Peak	360.00	200	Vertical	Pass

Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

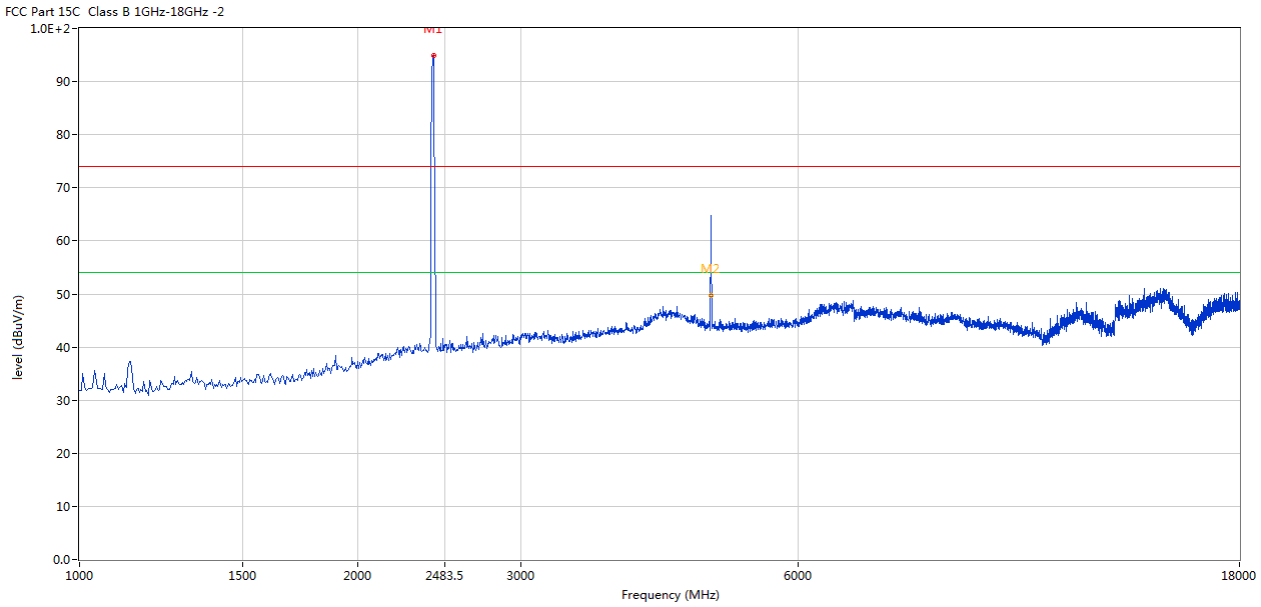

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2414.896	94.99	-3.57	74.0	20.99	Peak	113.00	100	Horizontal	N/A
2	4824.044	64.83	3.14	74.0	-9.17	Peak	113.00	100	Horizontal	Pass
2**	4824.044	49.80	3.14	54.0	-4.20	AV	113.00	100	Horizontal	Pass

CH01 for 11g at 6Mbps: Vertical

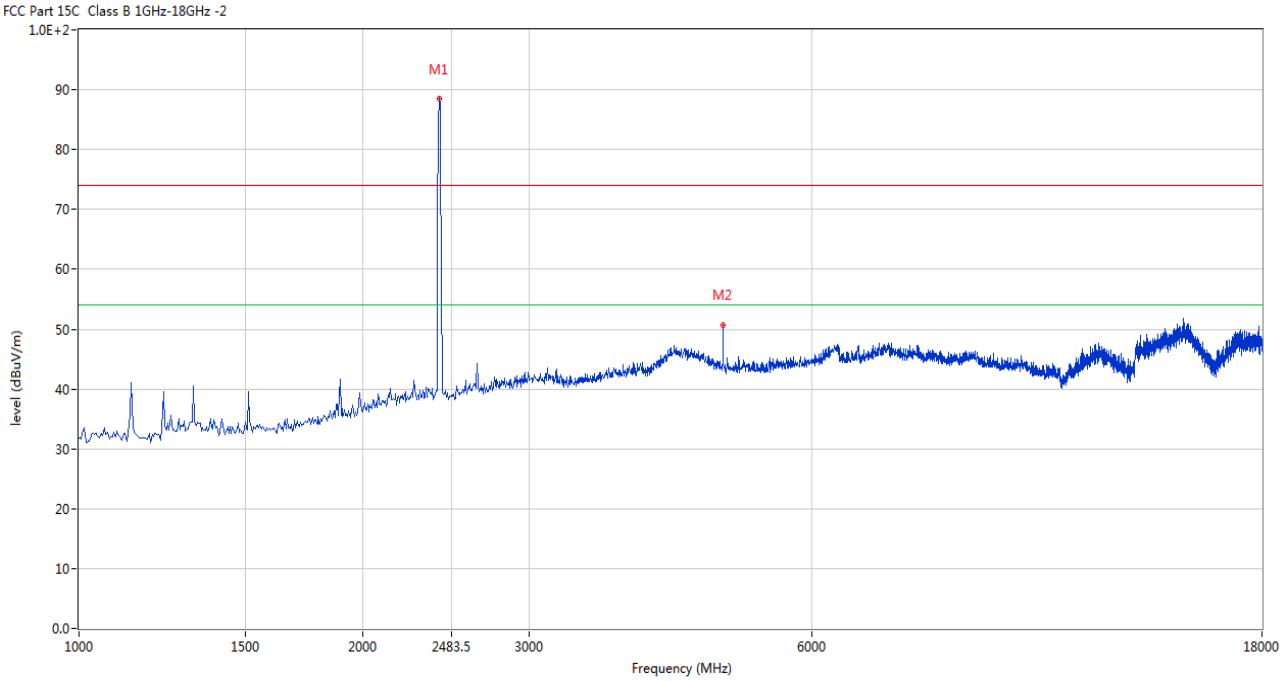

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2410.647	88.45	-3.57	74.0	14.45	Peak	159.00	100	Vertical	N/A
2	4824.044	53.72	3.14	74.0	-20.28	Peak	159.00	100	Vertical	Pass

CH06 for 11g at 6Mbps: Horizontal

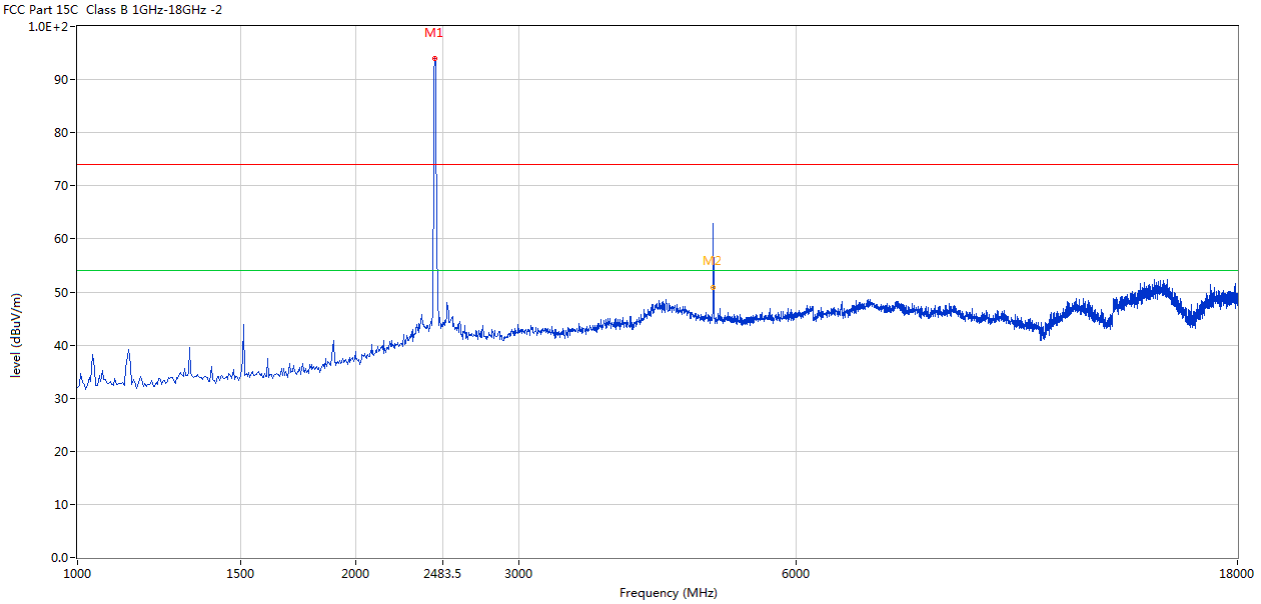

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2436.141	93.93	-3.57	74.0	19.93	Peak	108.00	100	Horizontal	N/A
2	4875.031	62.85	3.19	74.0	-11.15	Peak	108.00	100	Horizontal	Pass
2**	4875.031	50.82	3.19	54.0	-3.18	AV	108.00	100	Horizontal	Pass

CH06 for 11g at 6Mbps: Vertical

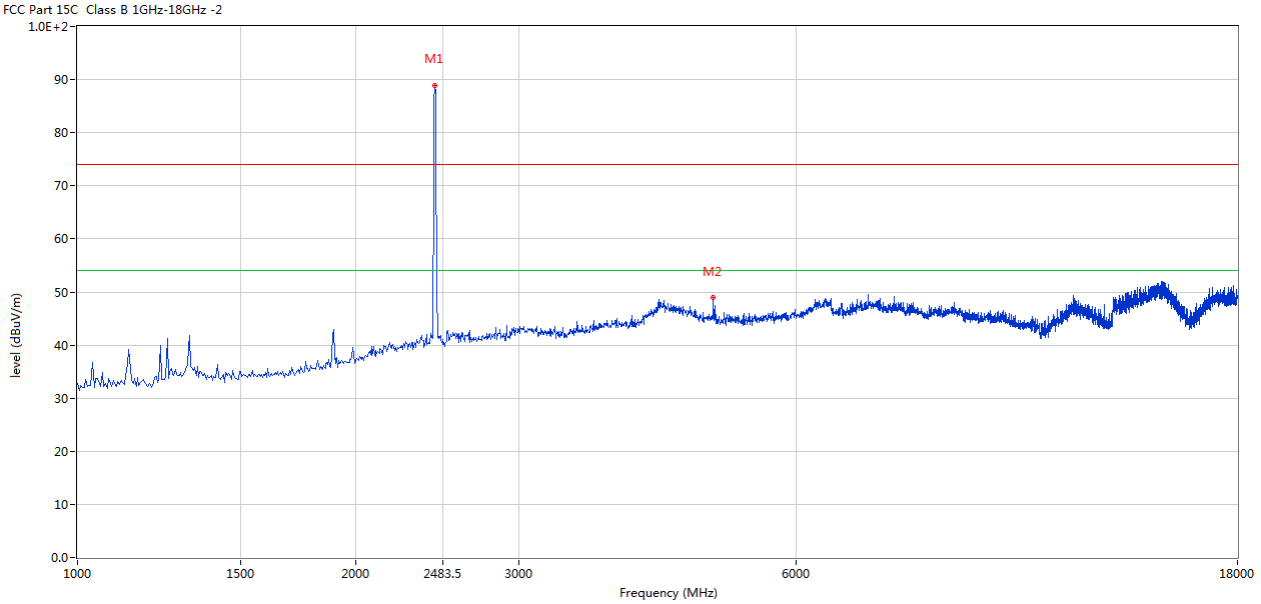

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2436.141	88.94	-3.57	74.0	14.94	Peak	149.00	100	Vertical	N/A
2	4875.031	48.95	3.19	74.0	-25.05	Peak	154.00	100	Vertical	Pass

CH11 for 11g at 6Mbps: Horizontal

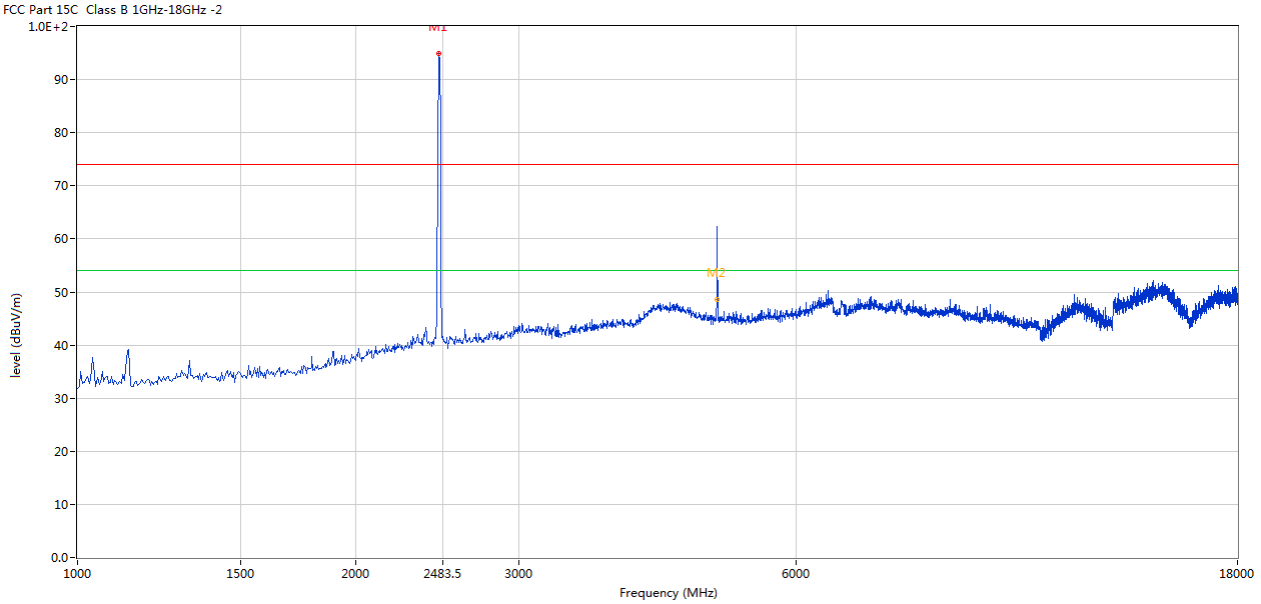

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2461.635	94.85	-3.57	74.0	20.85	Peak	112.00	100	Horizontal	N/A
2	4921.770	62.33	3.27	74.0	-11.67	Peak	112.00	100	Horizontal	Pass
2**	4921.770	48.63	3.27	54.0	-5.37	AV	112.00	100	Horizontal	Pass

CH11 for 11g at 6Mbps: Vertical

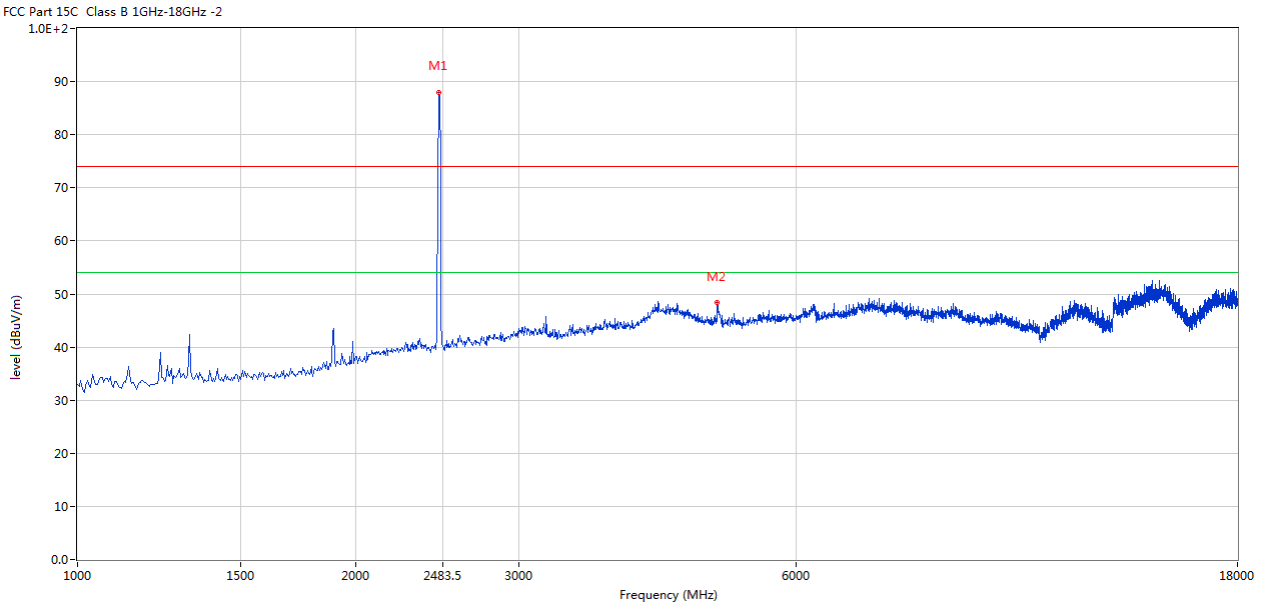

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2461.635	88.04	-3.57	74.0	14.04	Peak	164.00	100	Vertical	N/A
2	4926.018	48.50	3.28	74.0	-25.50	Peak	159.00	100	Vertical	Pass

Note: 1. Result Level = Reading + Factor

2. Factor= AF + Cable Loss- Preamp

3. Margin = Result– Limit

4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.

5. Note: the final peak measurement results less than the AV limit. No necessary to take down the final AV measurement result

7.0 6dB Bandwidth Measurement

7.1 Test Setup

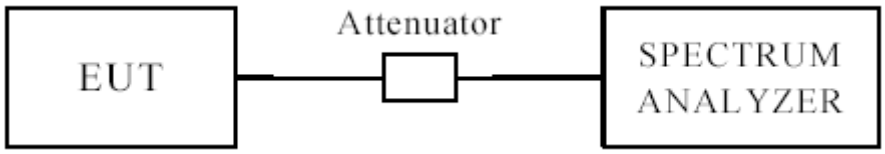

7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

6dB Occupied Bandwidth

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11b	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	1	9.02	0.5	Pass
6	2437	1	9.08	0.5	Pass
11	2462	1	9.08	0.5	Pass
1	2412	11	8.60	0.5	Pass
6	2437	11	9.08	0.5	Pass
11	2462	11	9.32	0.5	Pass

1. 802.11b at 1Mbps of CH01

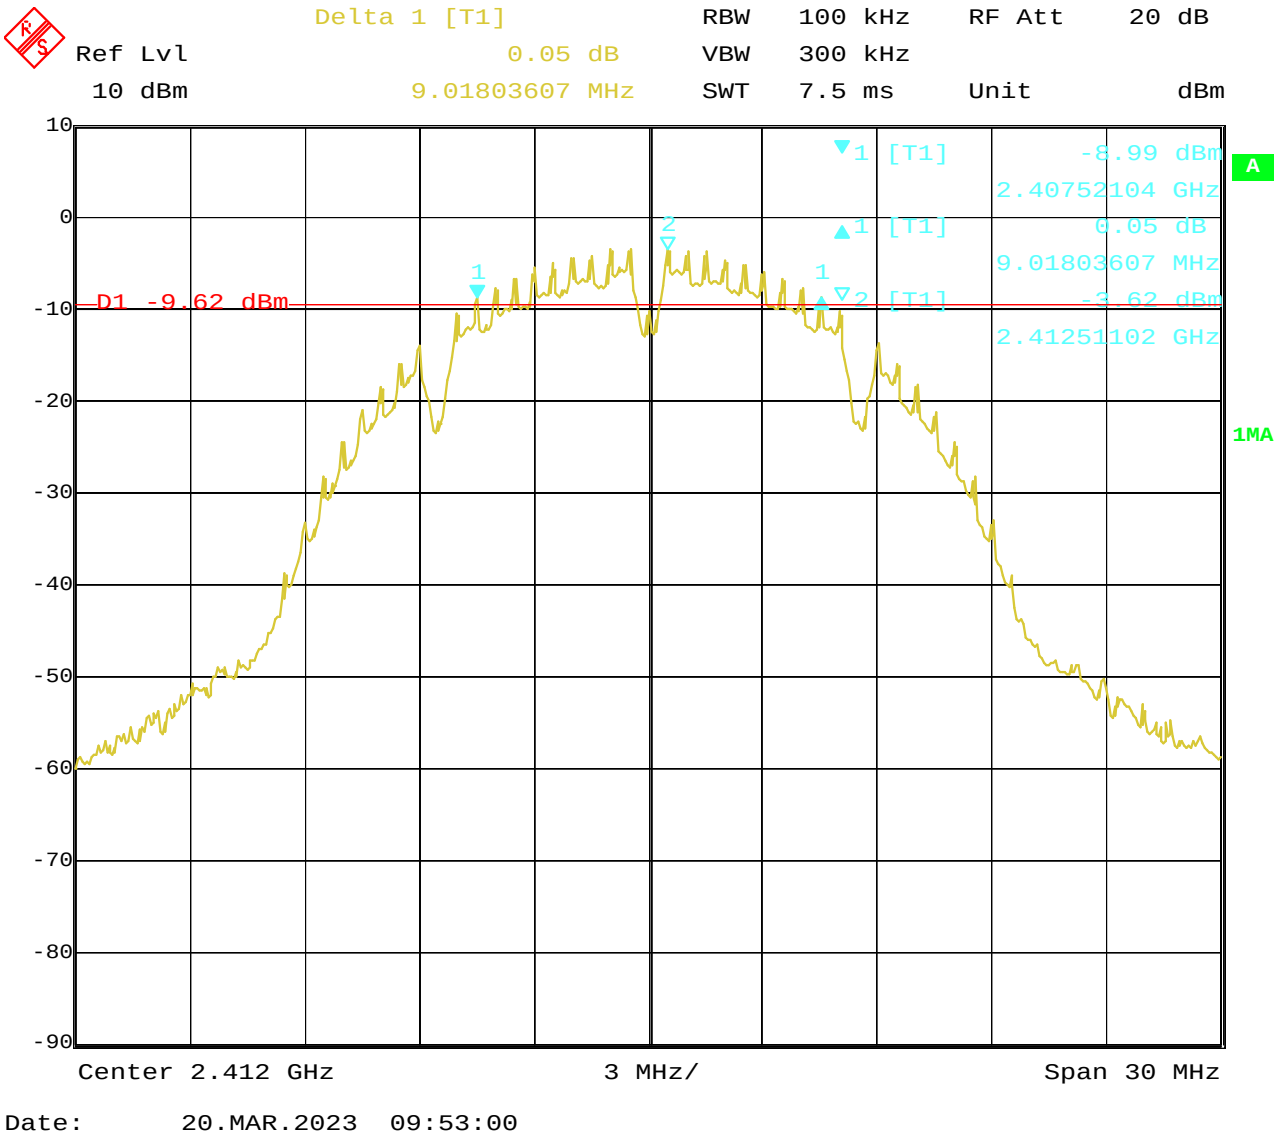

2. 802.11b at 1Mbps of CH06

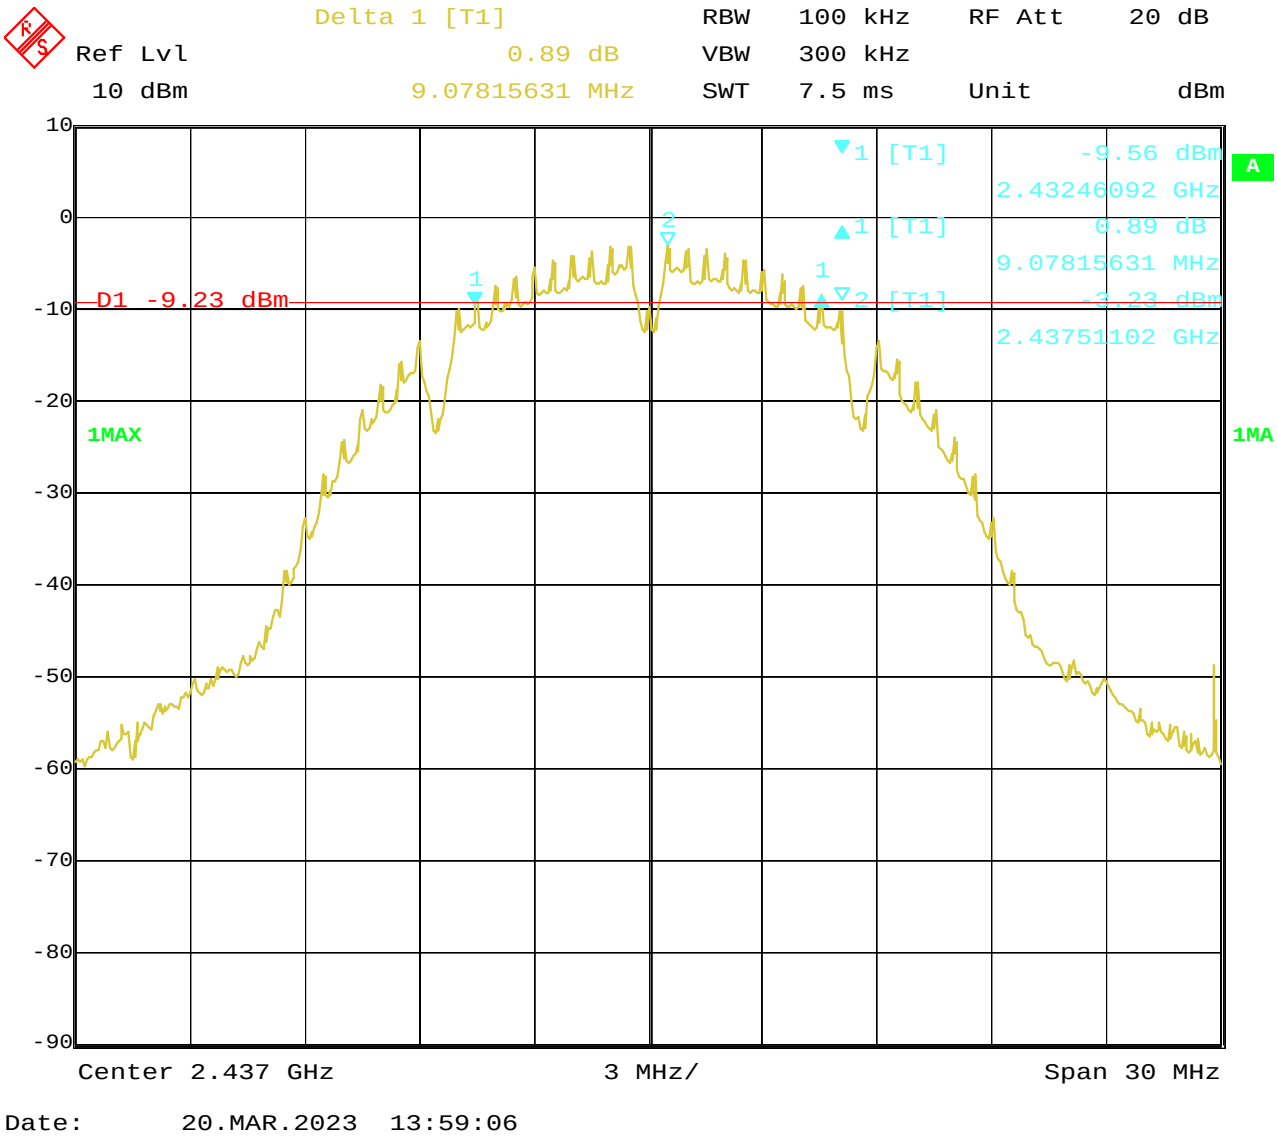

3. 802.11b at 1Mbps of CH11

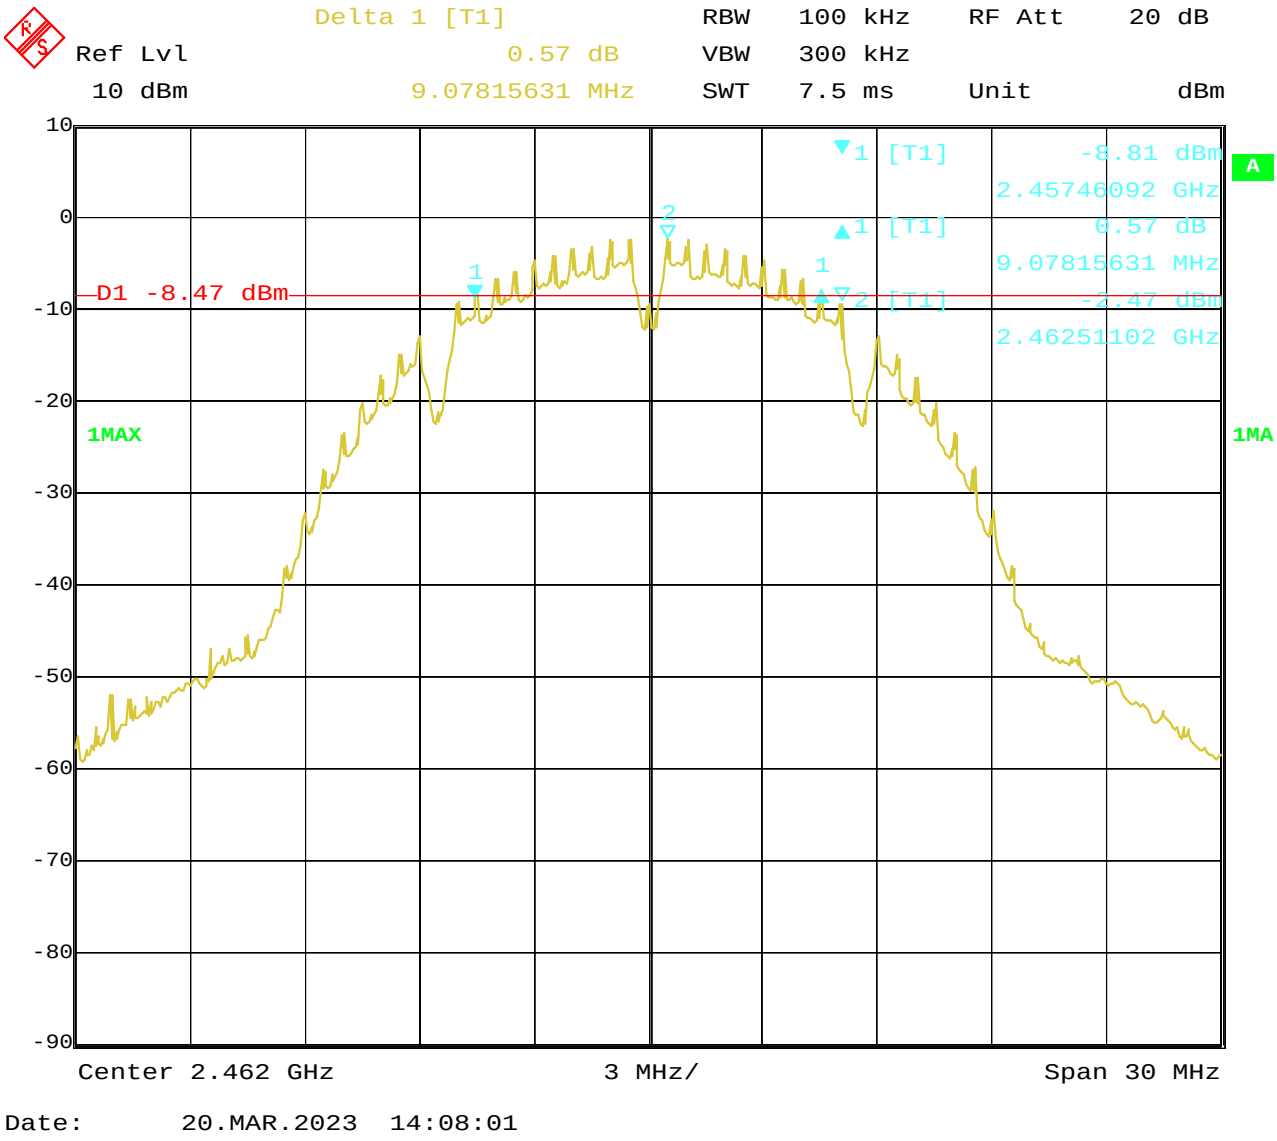

4. 802.11b at 11Mbps of CH01

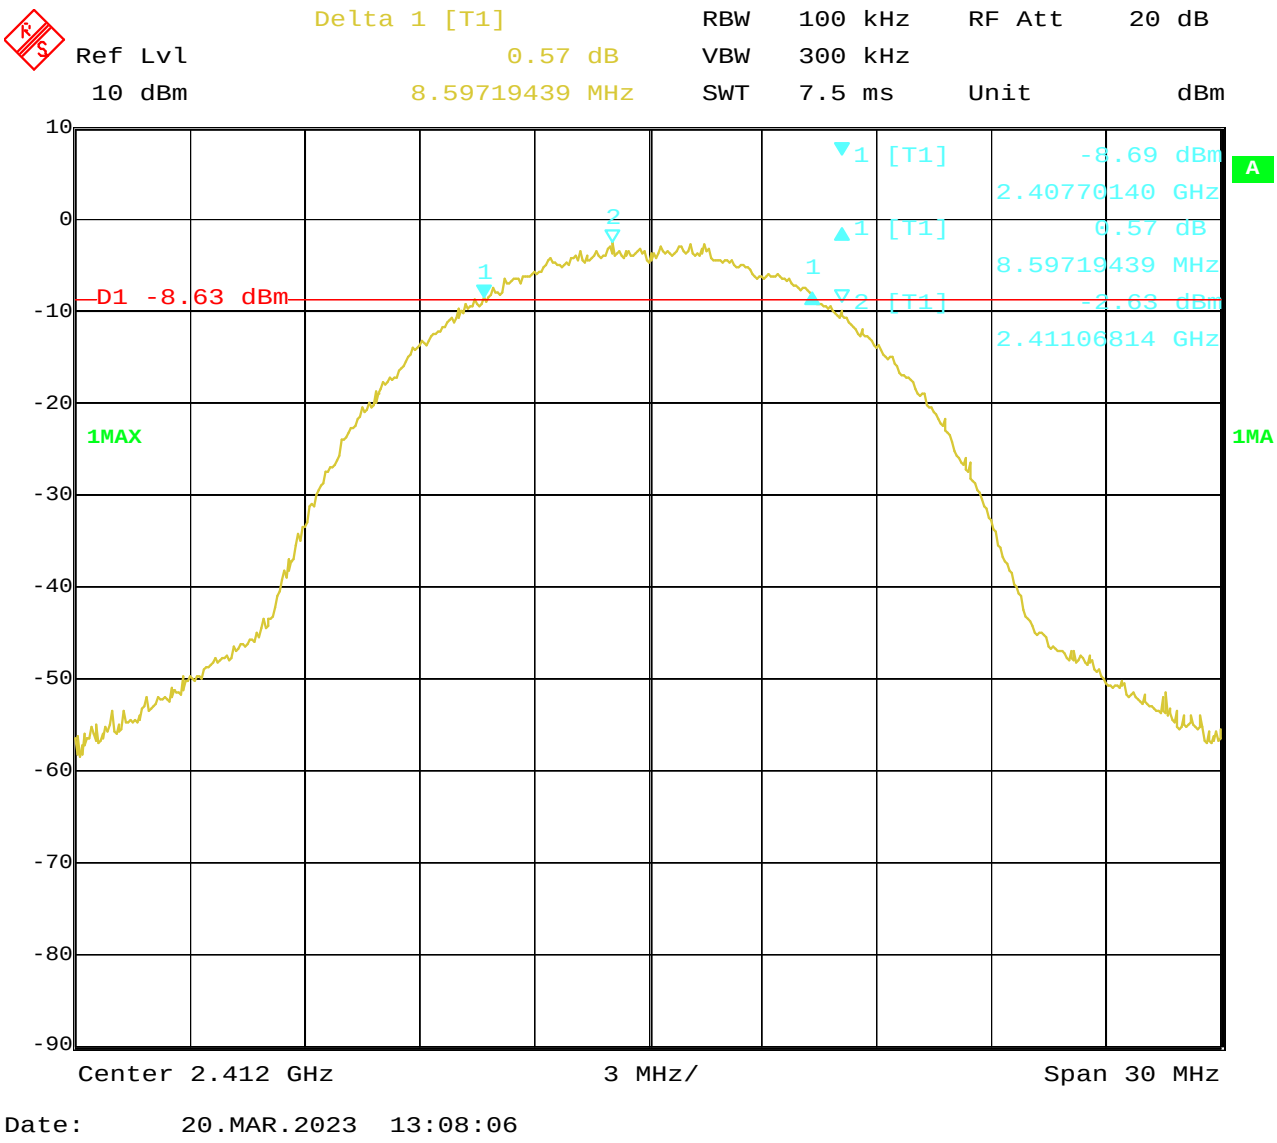

5. 802.11b at 11Mbps of CH06

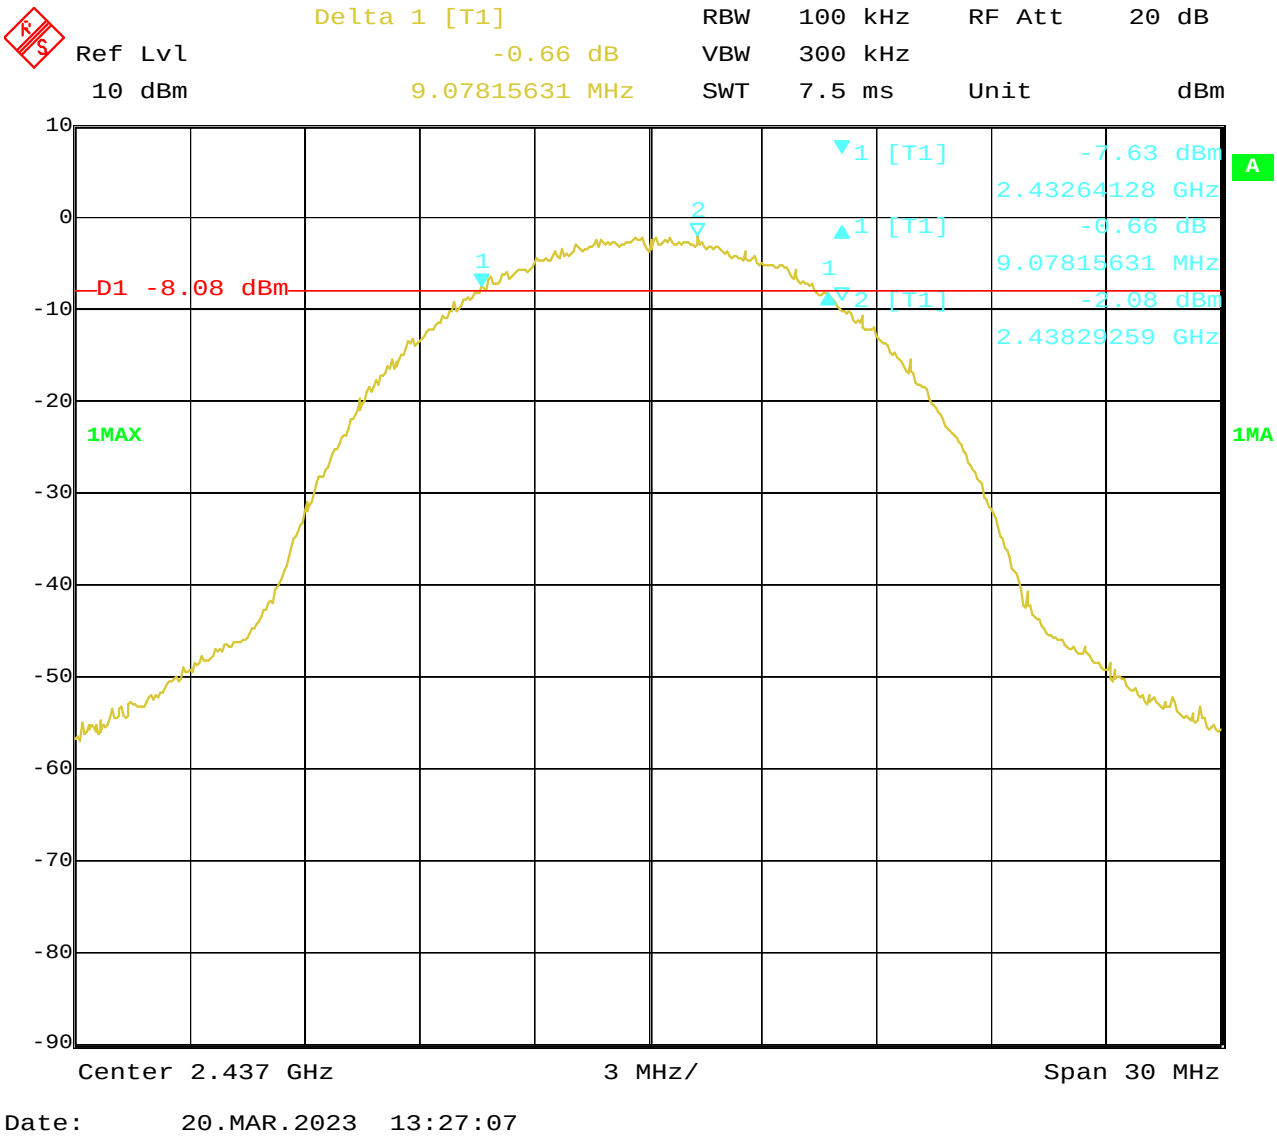

6. 802.11b at 11Mbps of CH11

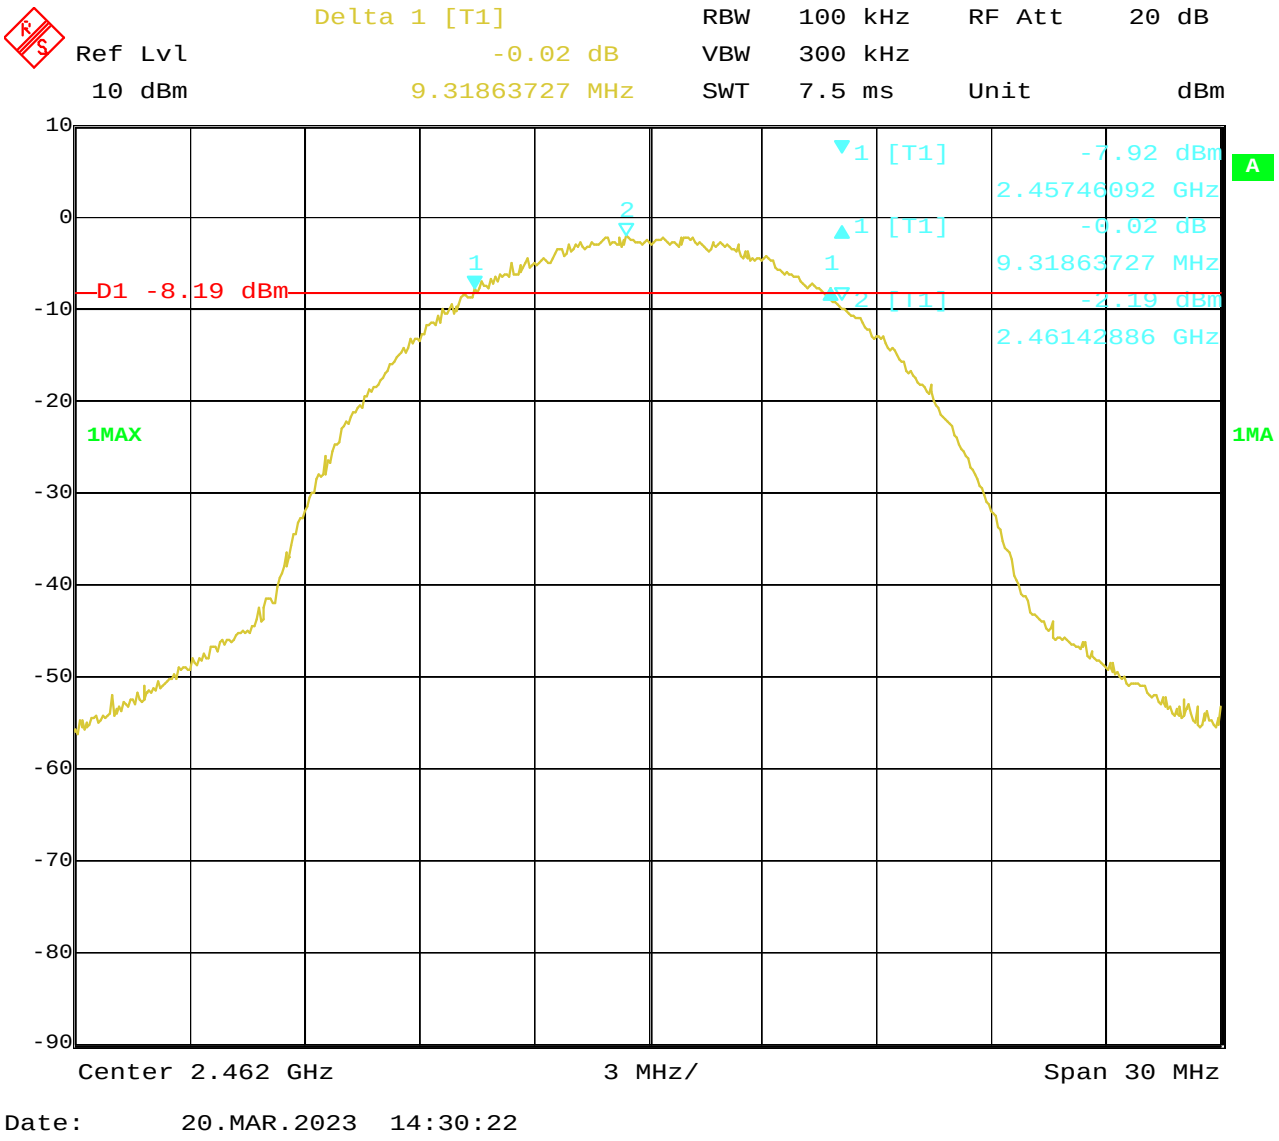

6dB Occupied Bandwidth

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11g	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	6	16.41	0.5	Pass
6	2437	6	16.35	0.5	Pass
11	2462	6	16.41	0.5	Pass

Test Plots:

1. 802.11g at 6Mbps of CH01

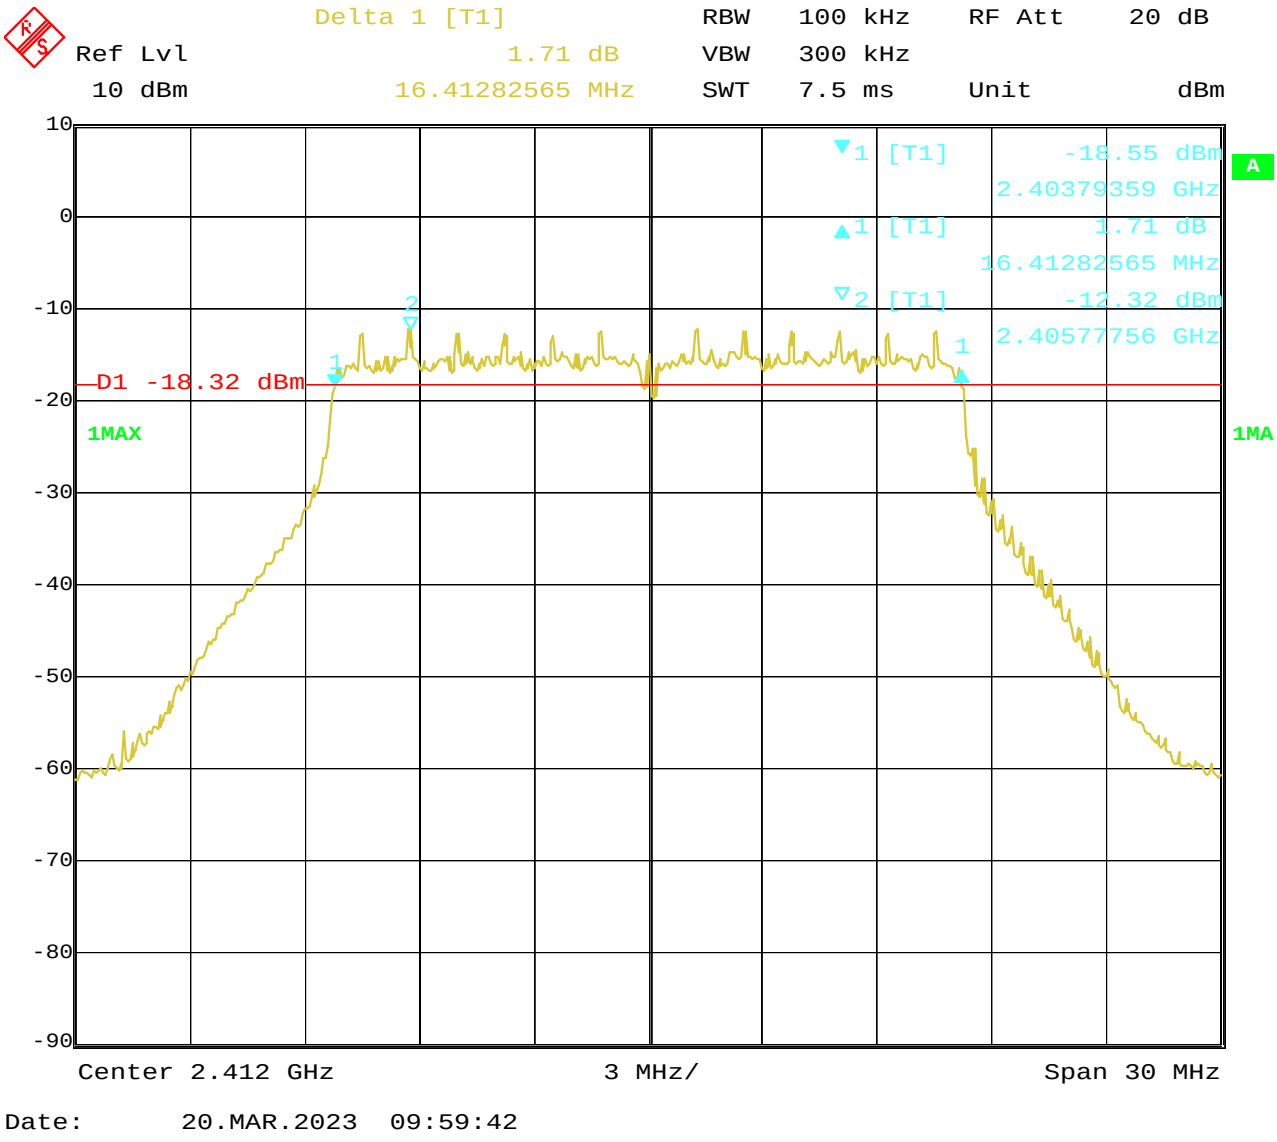

2. 802.11g at 6Mbps of CH06

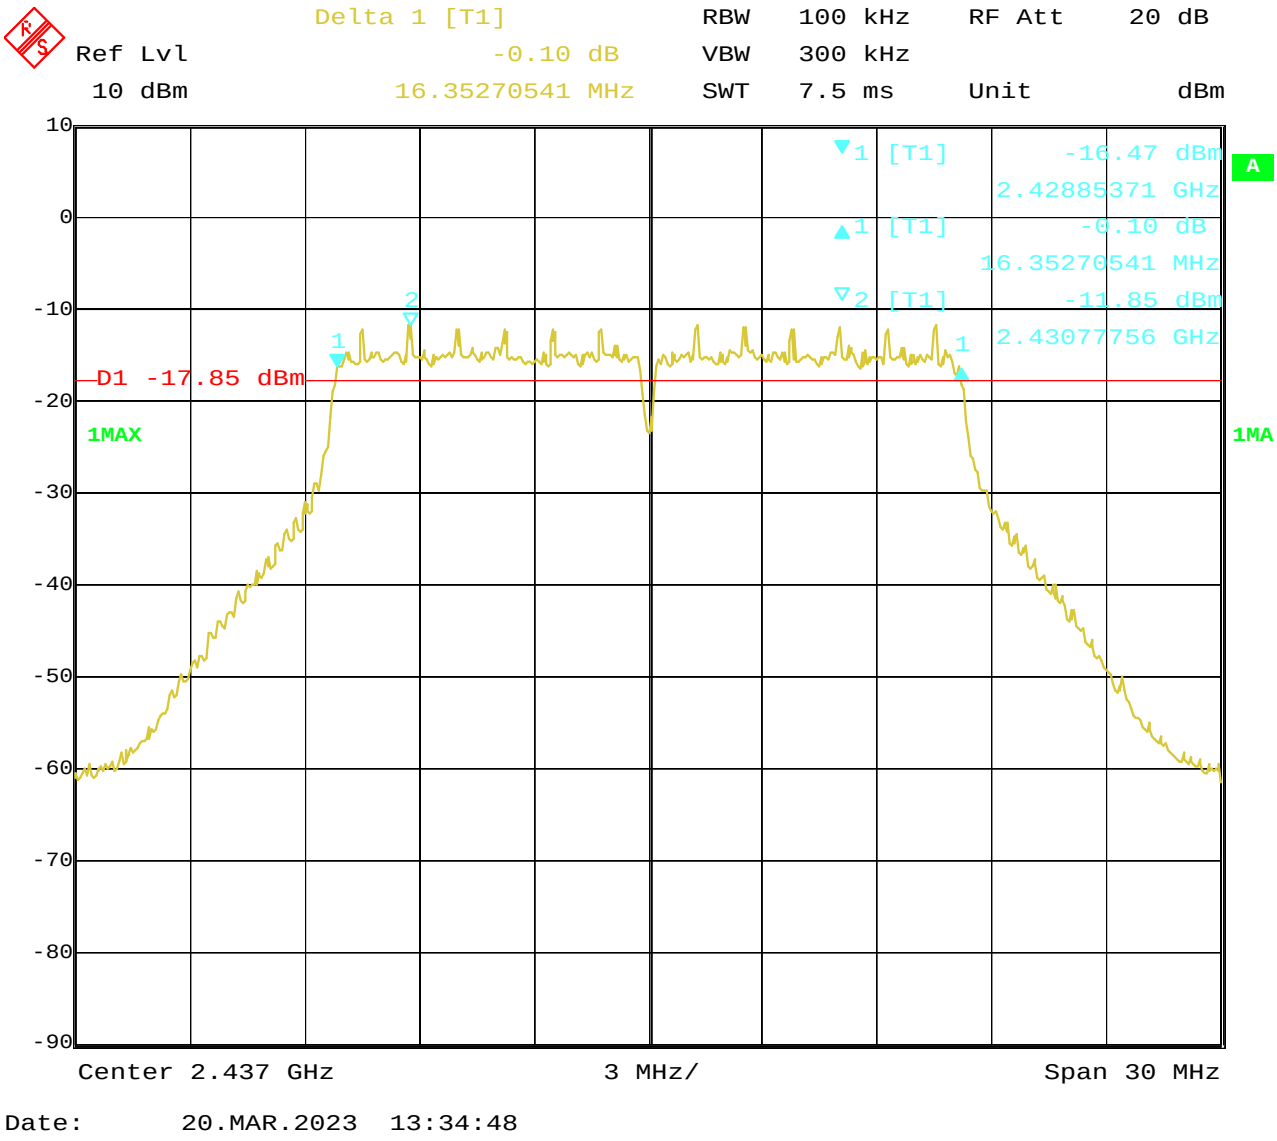

3. 802.11g at 6Mbps of CH11

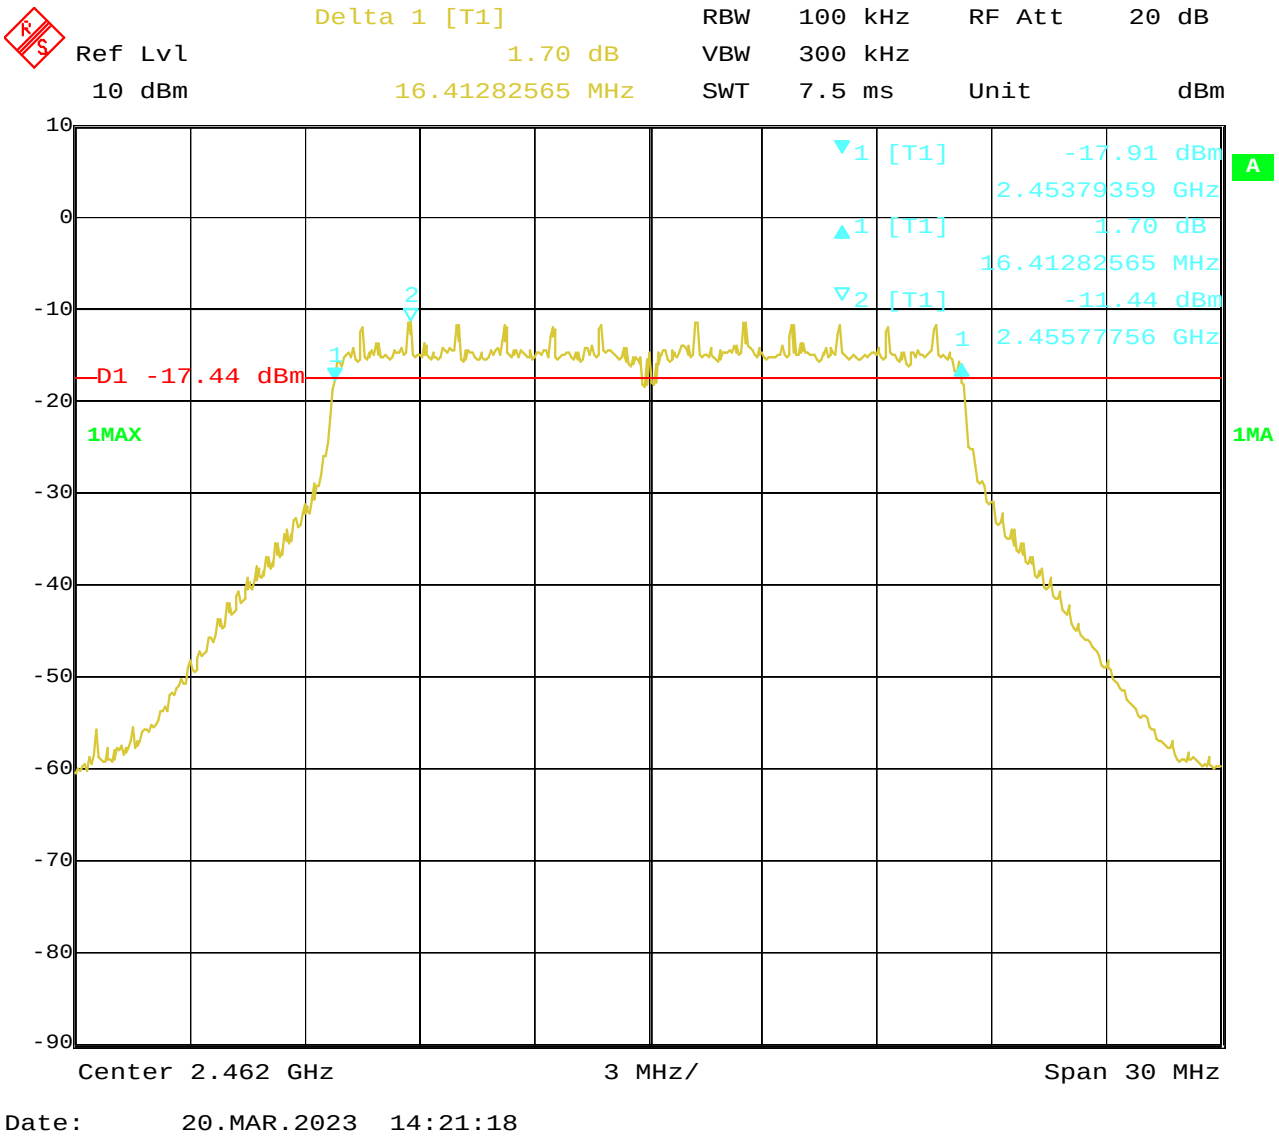

6dB Occupied Bandwidth

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11n HT20	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	mcs0	17.56	0.5	Pass
6	2437	mcs0	17.56	0.5	Pass
11	2462	mcs0	17.56	0.5	Pass

Test Plots:

1. 802.11n at HT20 of CH01

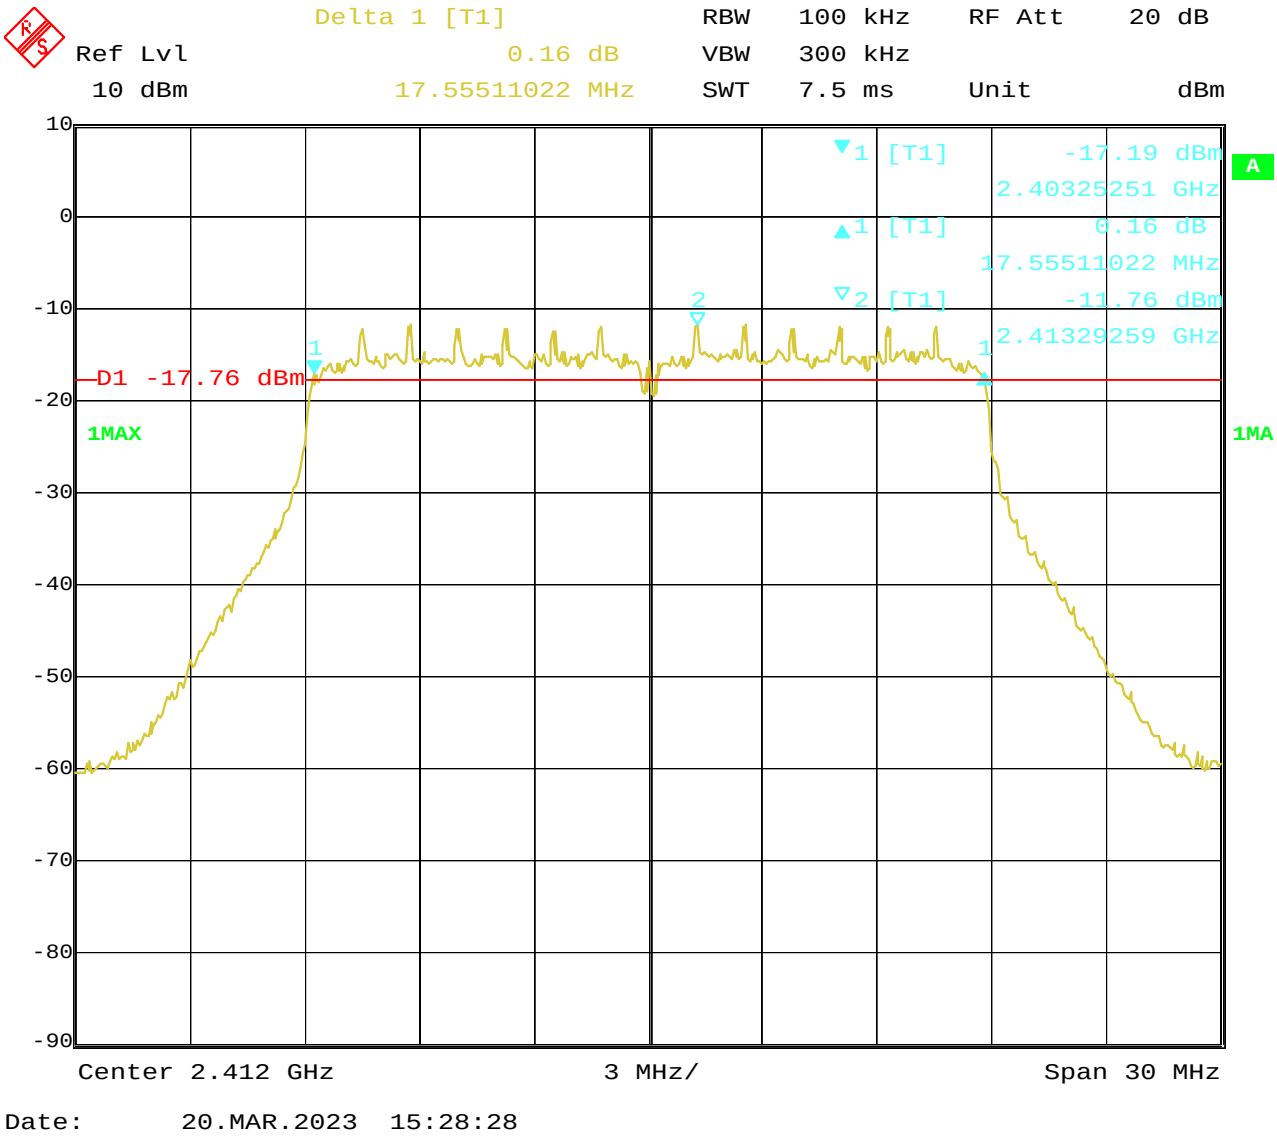

2. 802.11n at HT20 of CH06

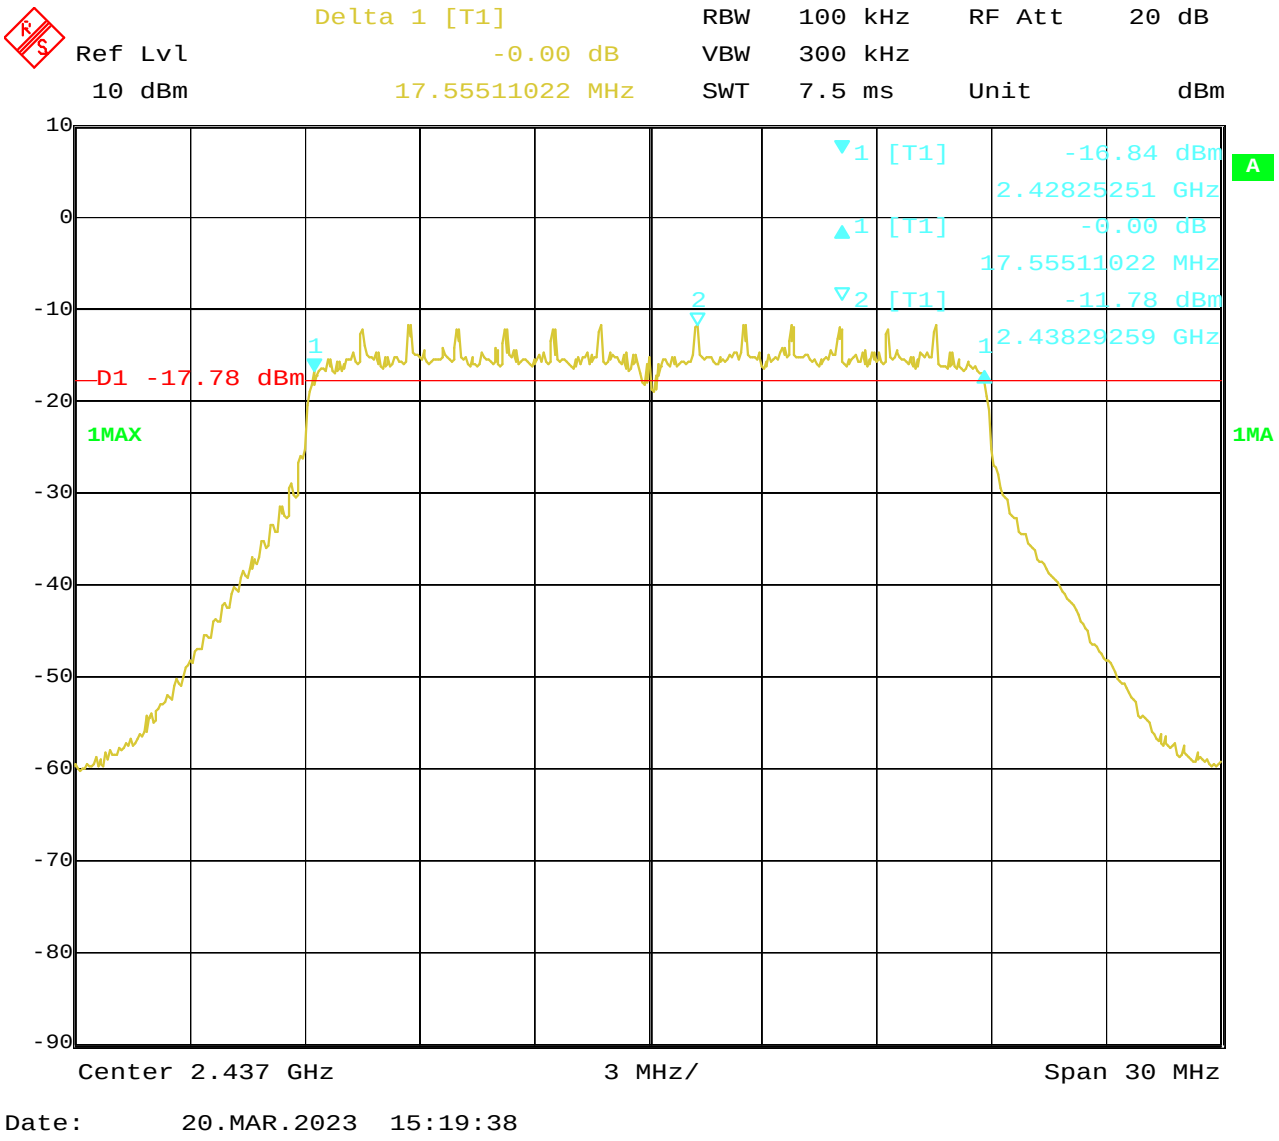

3. 802.11n at HT20 of CH11

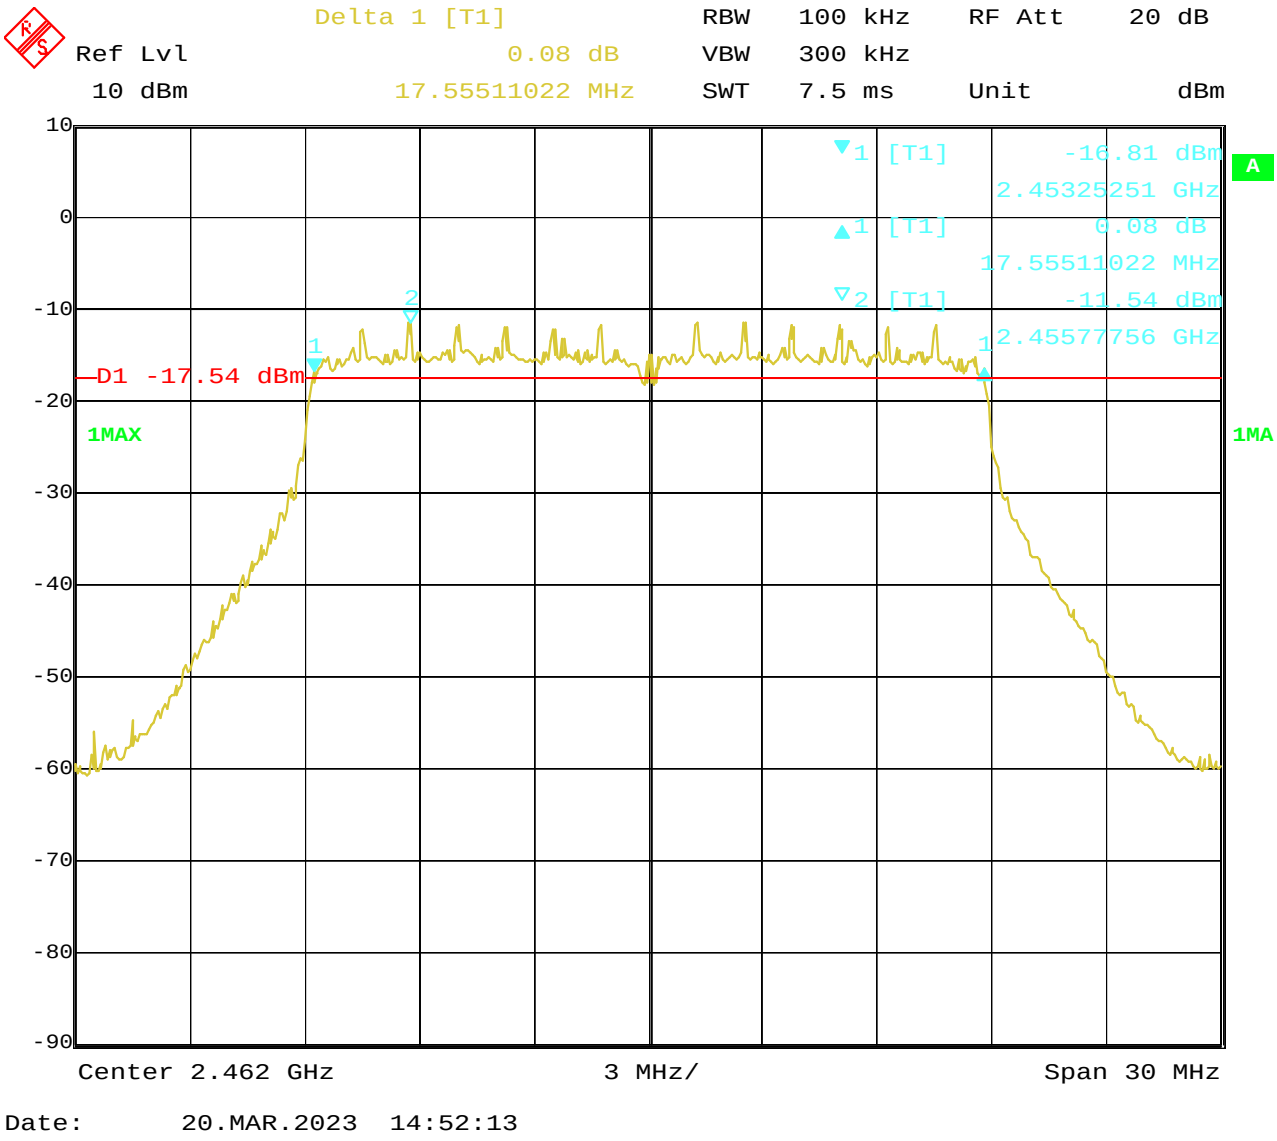

6dB Occupied Bandwidth

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11n HT40	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
3	2422	mcs0	35.56	0.5	Pass
6	2437	mcs0	35.36	0.5	Pass
9	2452	mcs0	35.59	0.5	Pass

Test Plots:

1. 802.11n at HT40 of CH03

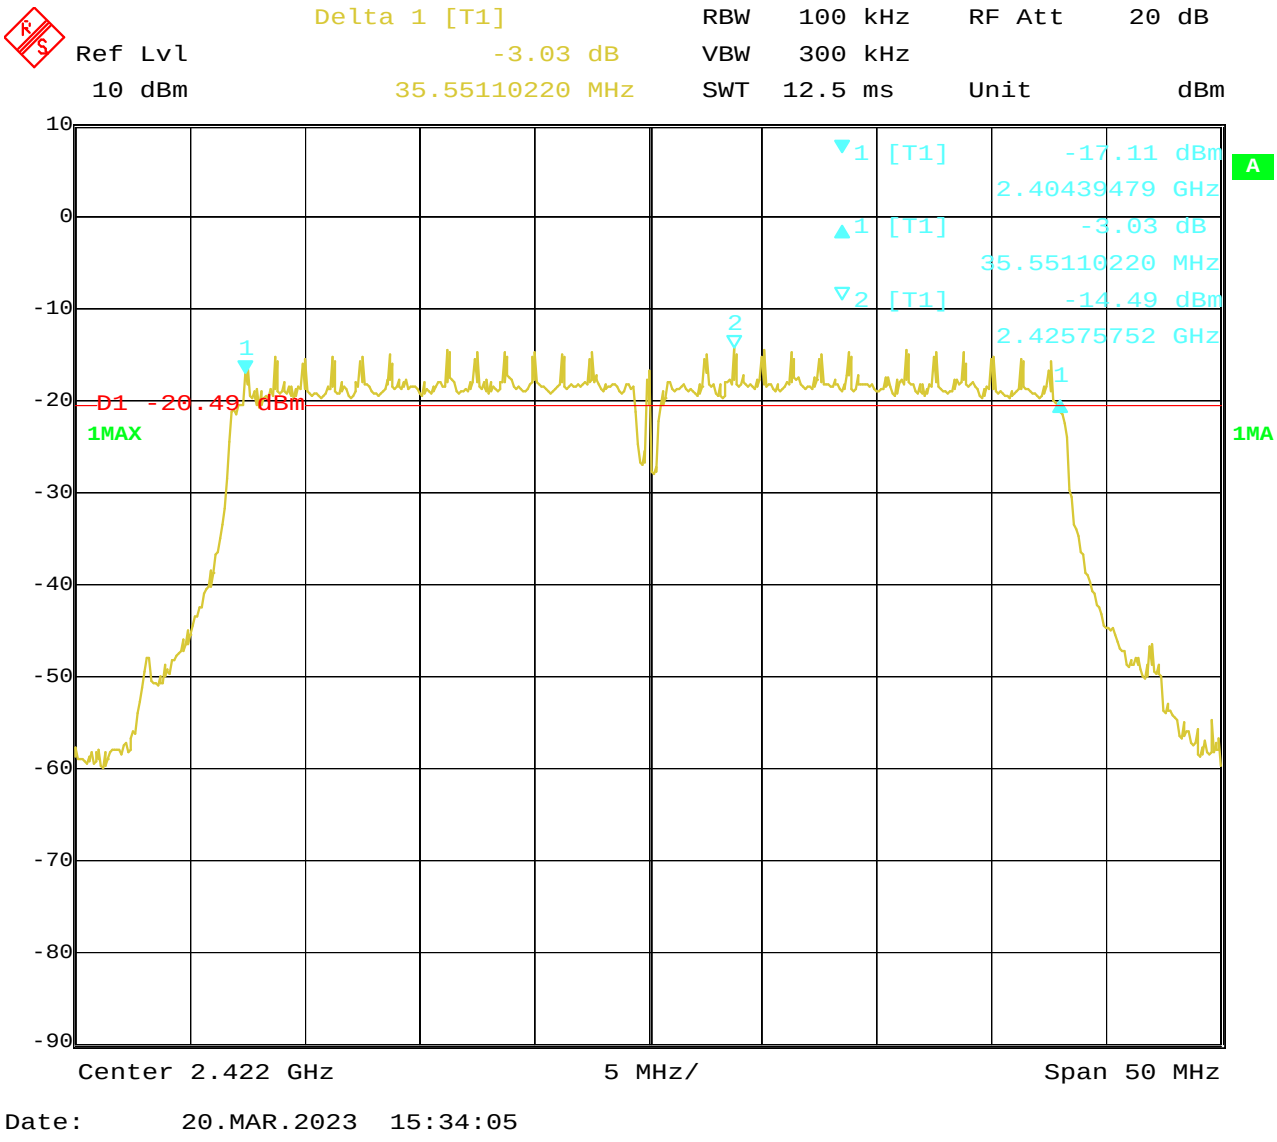

2. 802.11n at HT40 of CH06

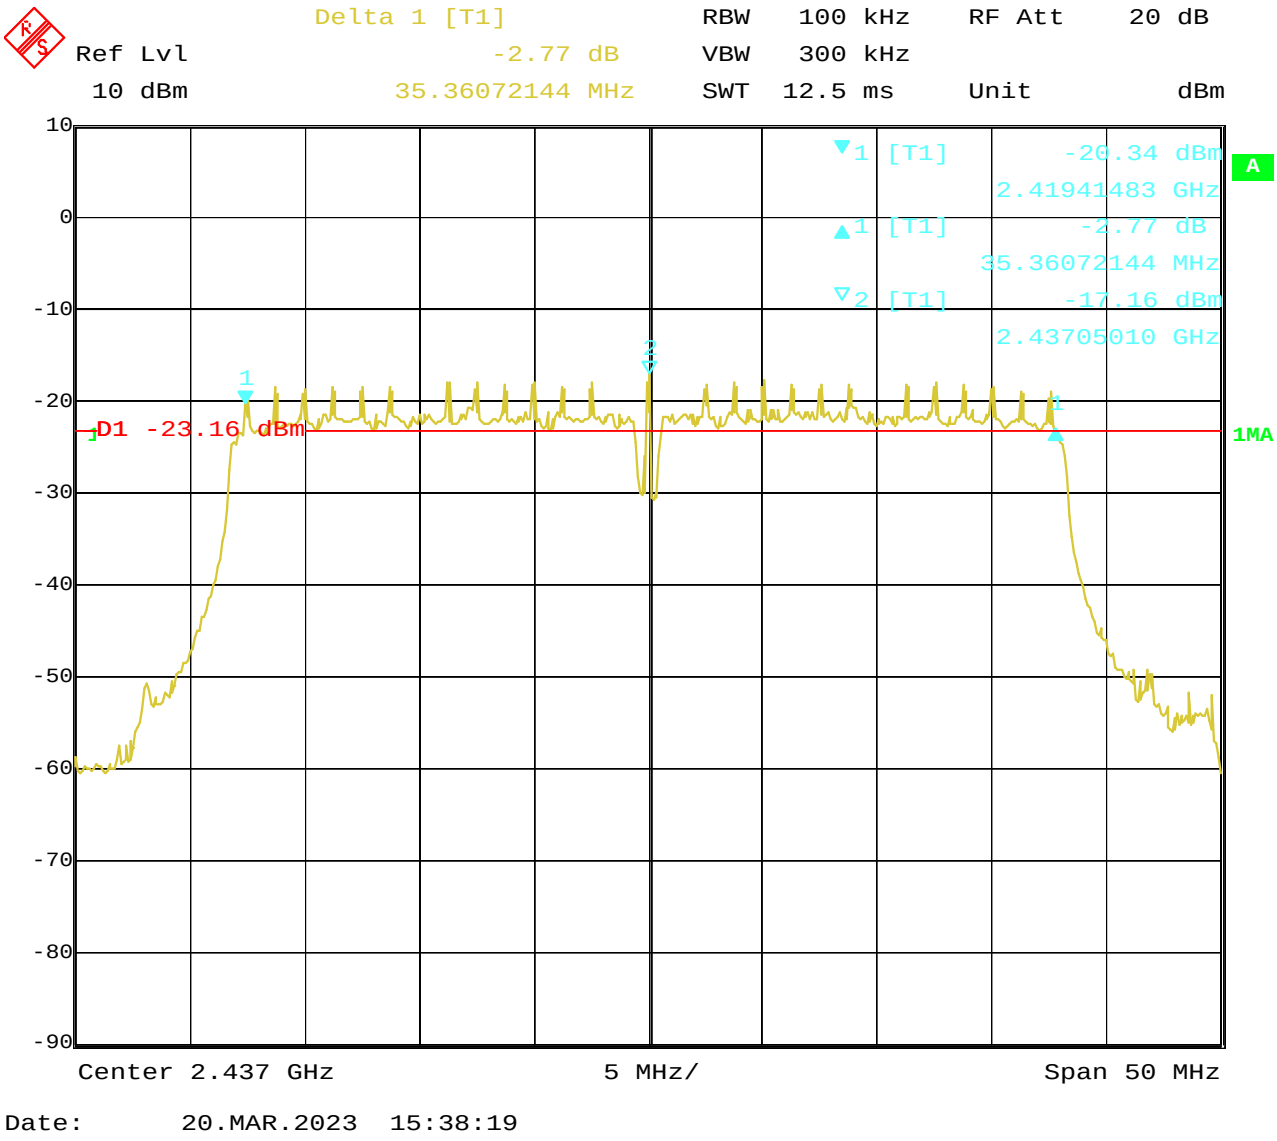

3. 802.11n at HT40 of CH09

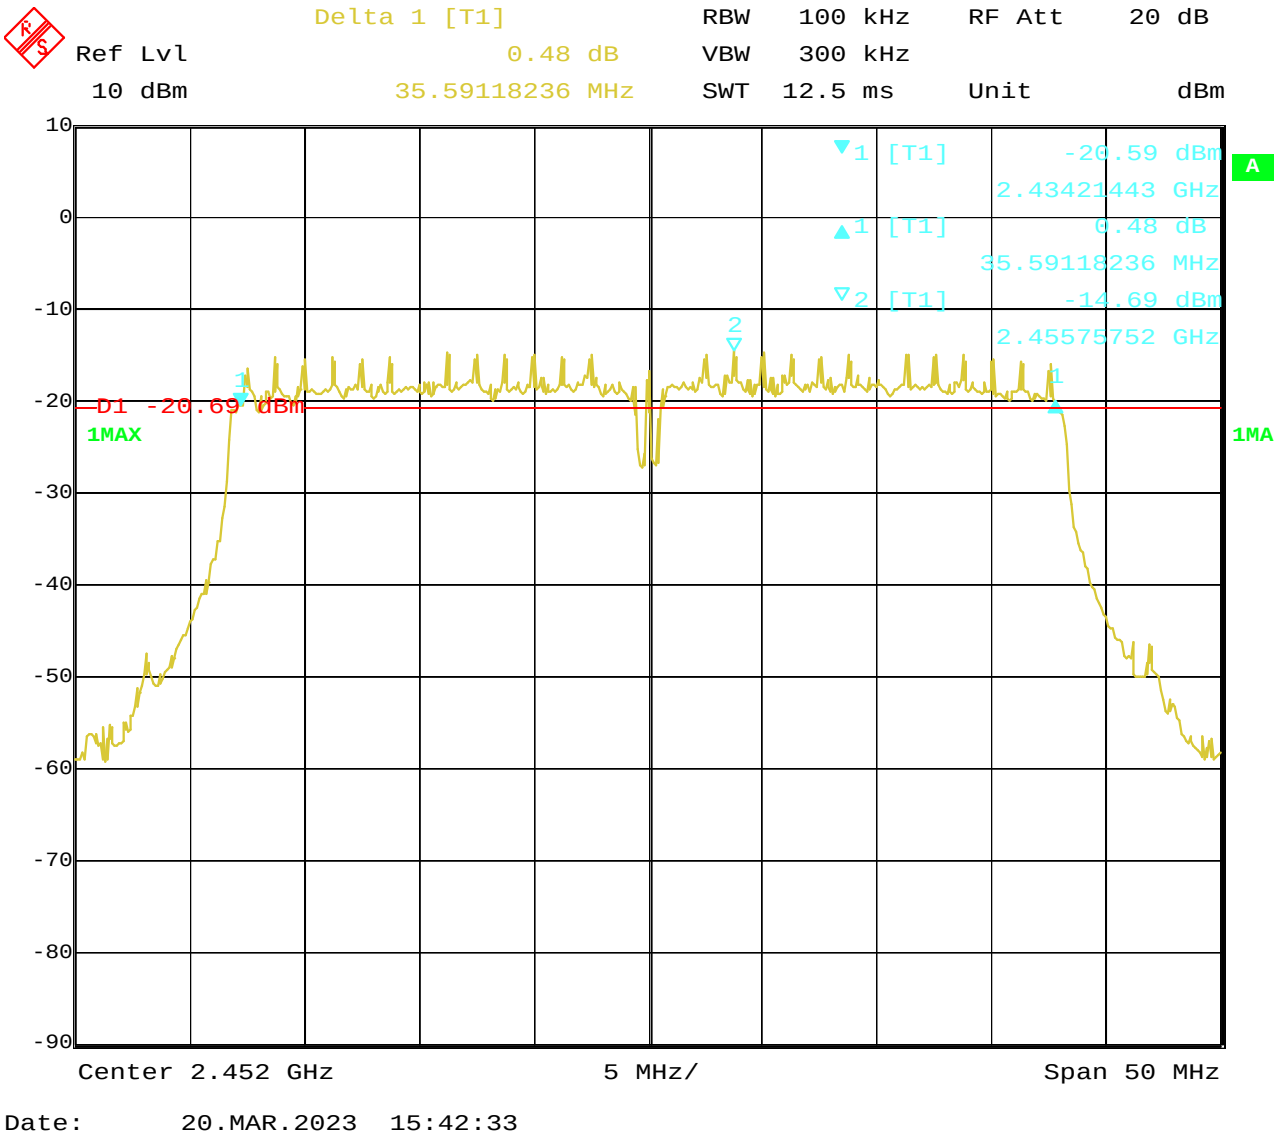

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The PK power was measured

8.4Test Results

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11b	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	PK Power (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412	12.82	30	Pass
6	2437	13.16	30	Pass
11	2462	13.44	30	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11
2. The result basic equation calculation as follow:
Power Output = Power Reading + Cable loss + Attenuator
3. The worse case was recorded

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11g	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	PK Power (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412	10.07	30	Pass
6	2437	10.22	30	Pass
11	2462	10.49	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11
2. The result basic equation calculation as follow:
Power Output = Power Reading + Cable loss + Attenuator
3. The worse case was recorded

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11n (HT20)	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	PK Power (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412	10.09	30	Pass
6	2437	10.45	30	Pass
11	2462	10.47	30	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11n (HT40)	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	PK Power (dBm)	Power Limit (dBm)	Pass/ Fail
3	2422	10.02	30	Pass
6	2437	10.04	30	Pass
9	2452	10.28	30	Pass

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 10 kHz.
3. Set the VBW ≥ 30 kHz.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be ≤ 8 dBm/3kHz.

9.4Test Result

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11b 11Mbps	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	Power Spectral Density (dBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1	2412	-2.08	8	Pass
6	2437	-1.07	8	Pass
11	2462	-1.28	8	Pass

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11b 1Mbps	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	Power Spectral Density (dBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1	2412	-0.58	8	Pass
6	2437	-1.48	8	Pass
11	2462	-0.16	8	Pass

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11g 6Mbps	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	Power Spectral Density (dBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1	2412	-17.40	8	Pass
6	2437	-17.30	8	Pass
11	2462	-16.88	8	Pass

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11n HT20 mcs0	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	Power Spectral Density (dBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1	2412	-17.26	8	Pass
6	2437	-17.18	8	Pass
11	2462	-17.01	8	Pass

EUT	Smart Wi-Fi Camera	Model	S43
Mode	802.11n HT40 mcs0	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Frequency (MHz)	Power Spectral Density (dBm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
3	2422	-17.55	8	Pass
6	2437	-17.31	8	Pass
9	2452	-17.15	8	Pass

9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

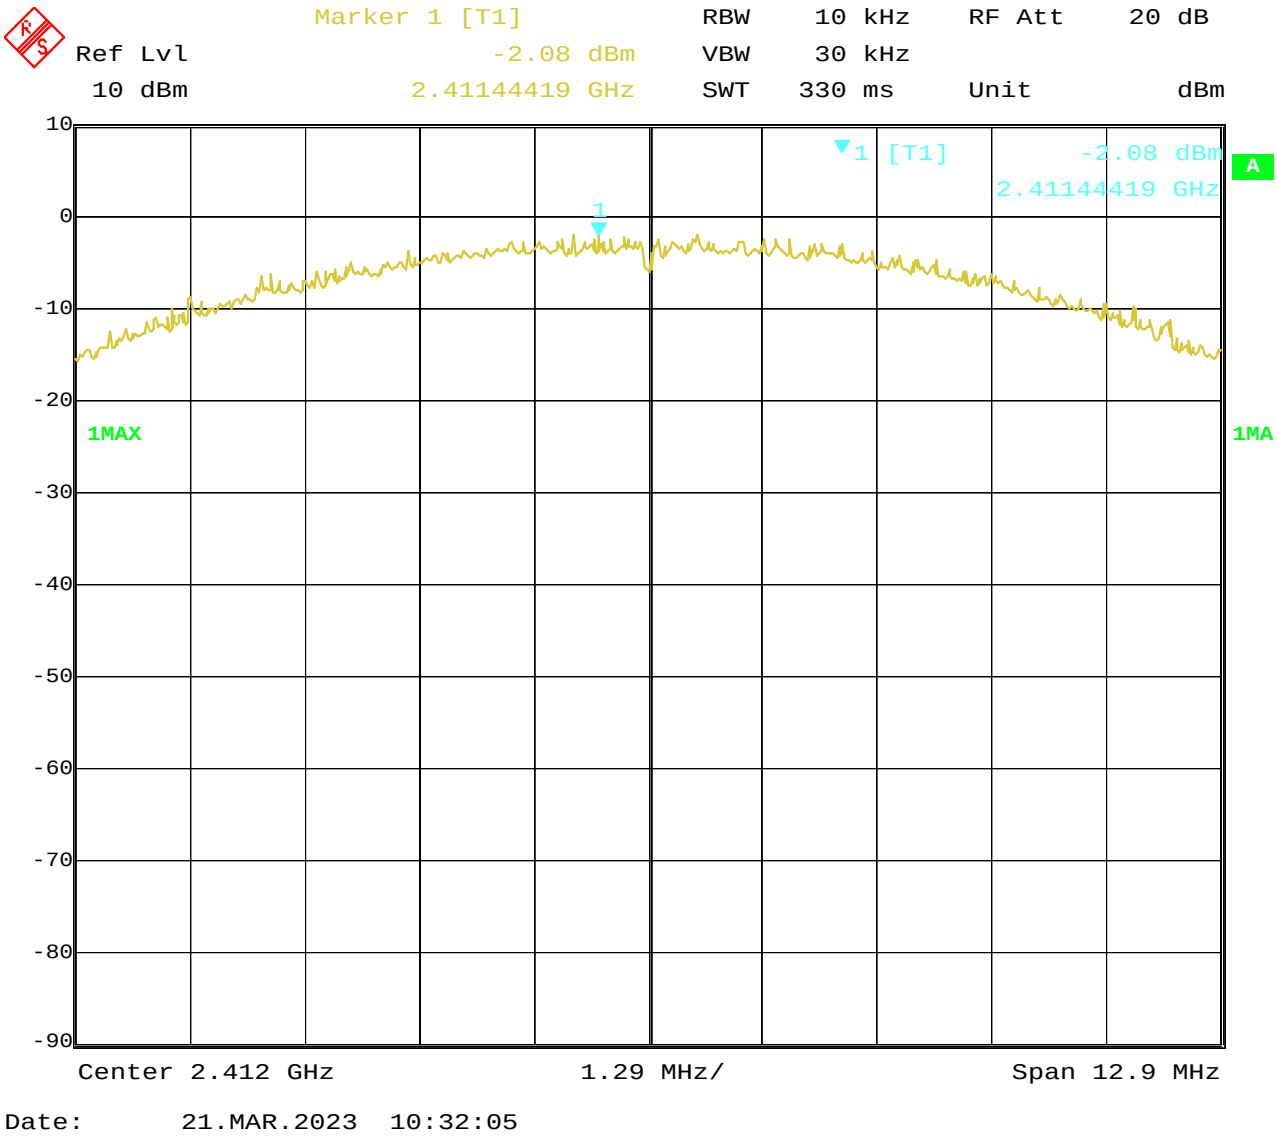

2. 802.11b at 11Mbps at CH06

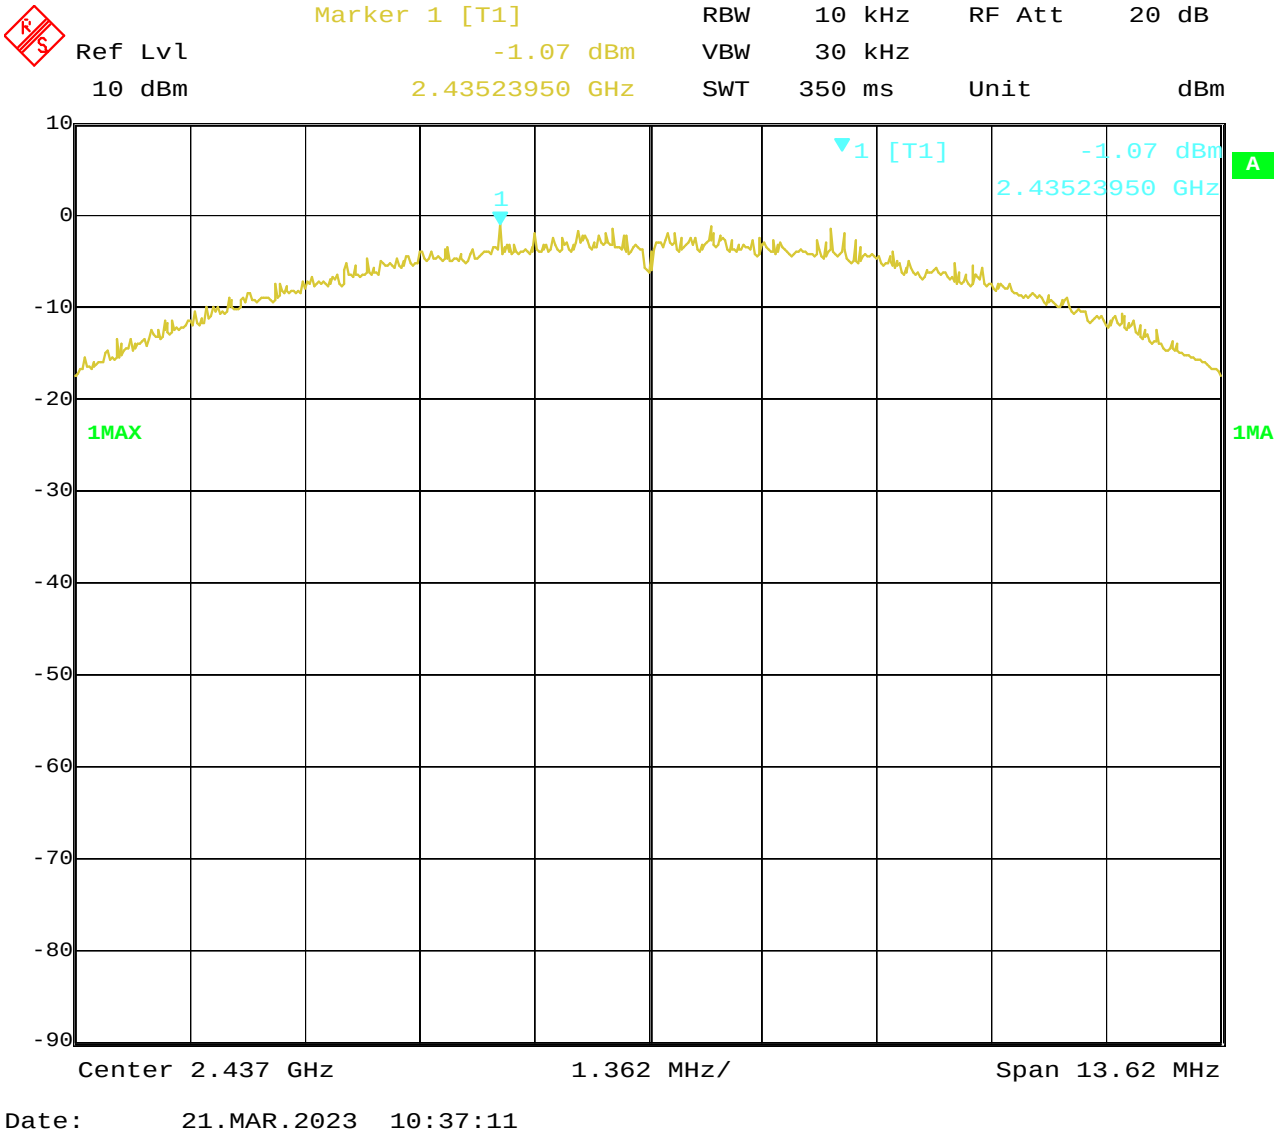

3. 802.11b at 11Mbps of CH11

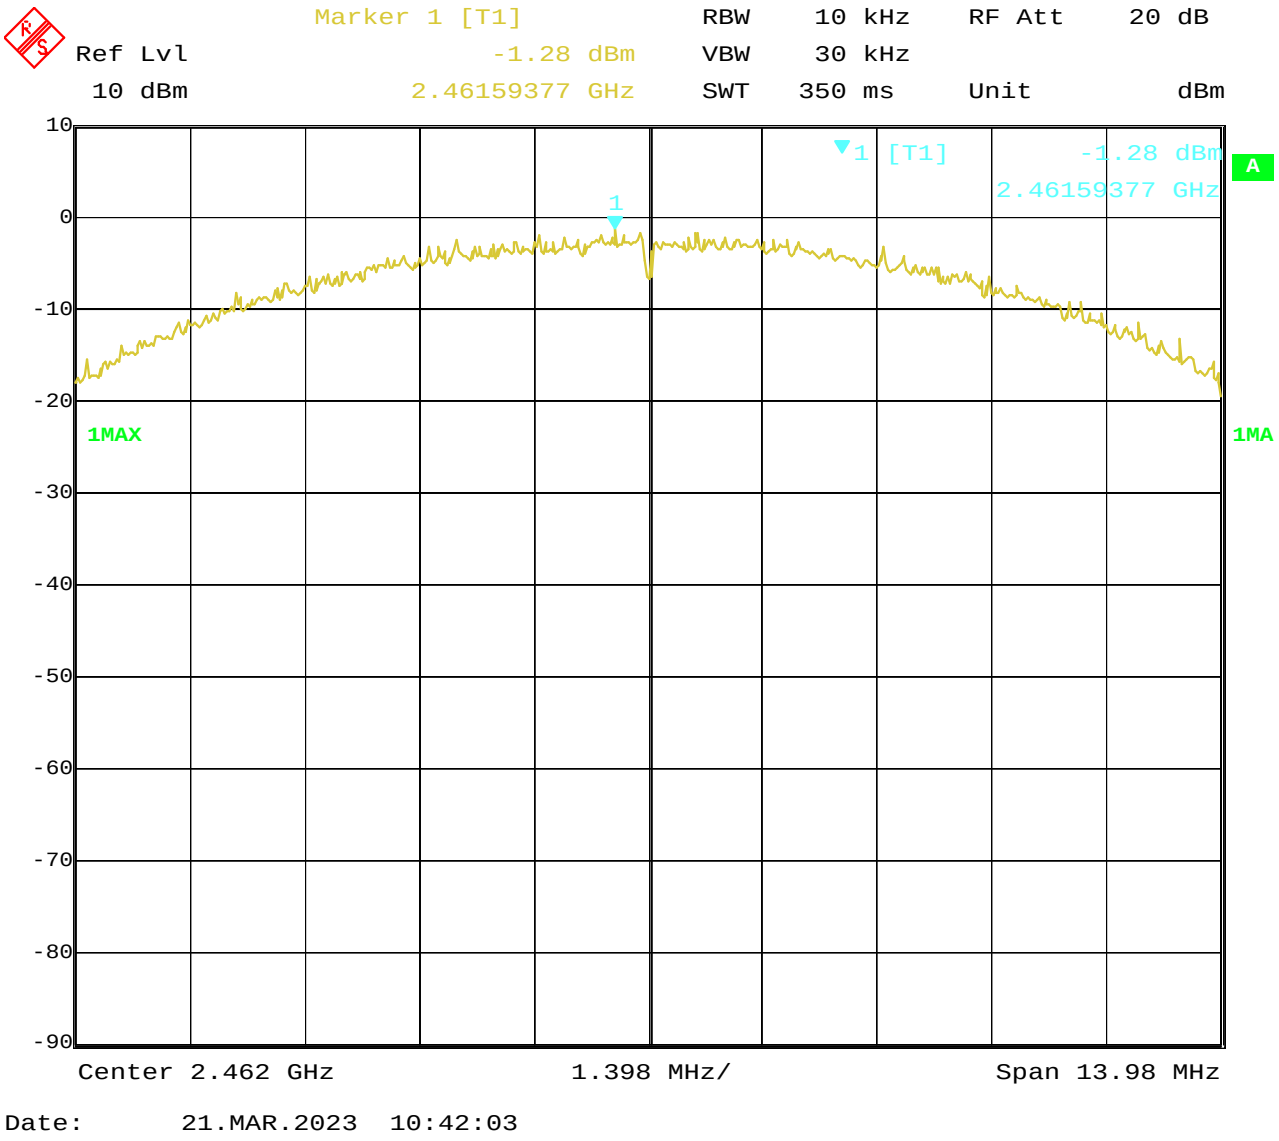

4. 802.11b at 1Mbps of CH1

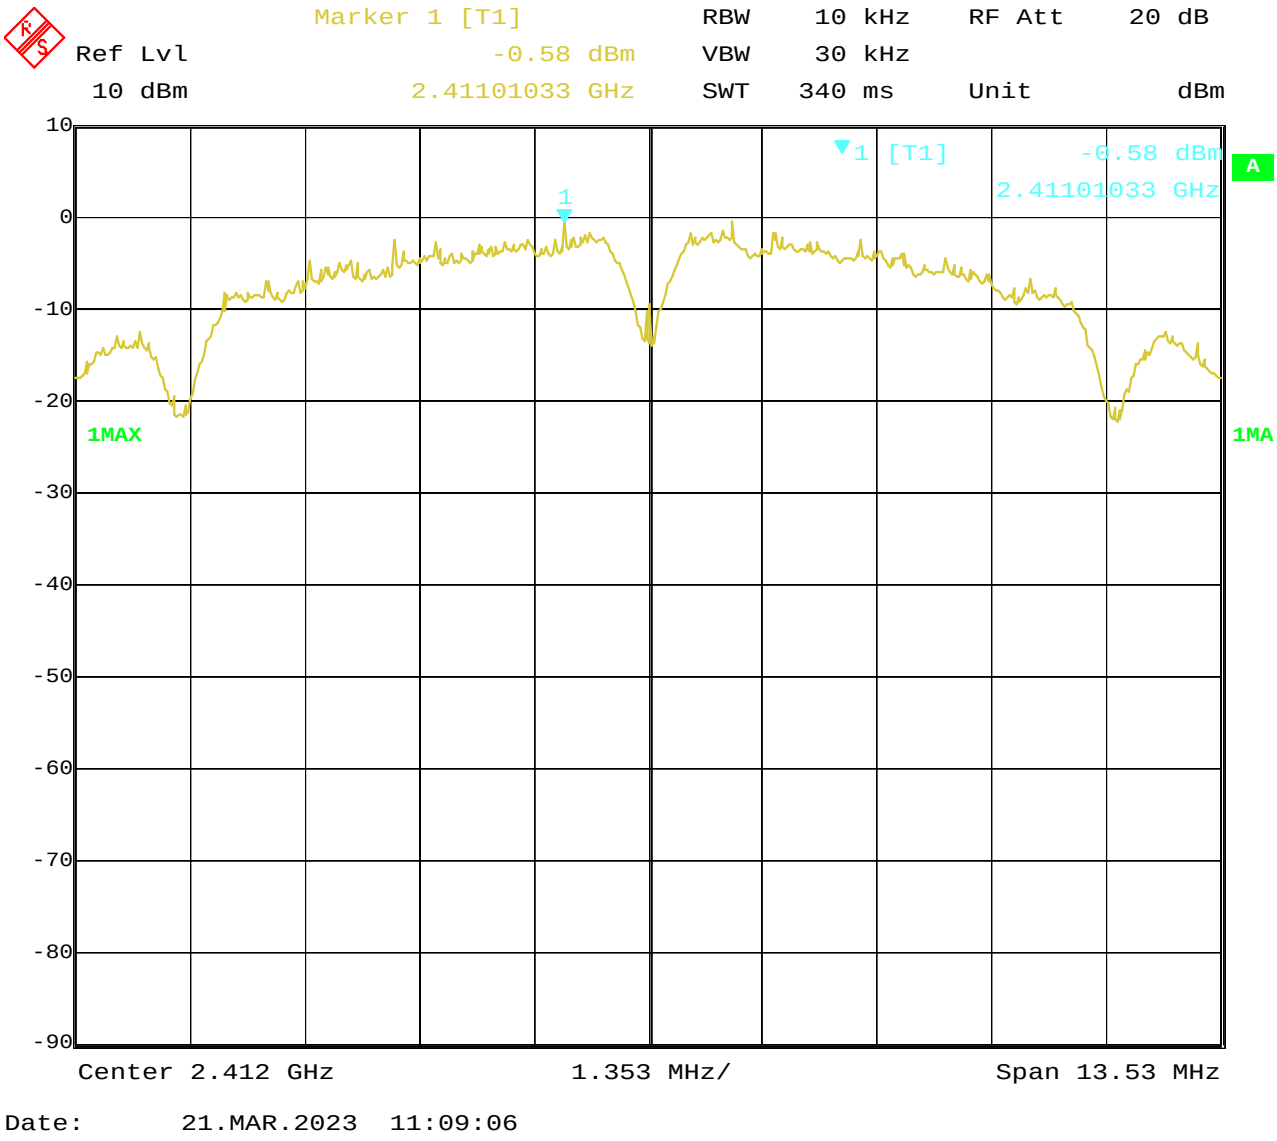

5. 802.11b at 1Mbps of CH6

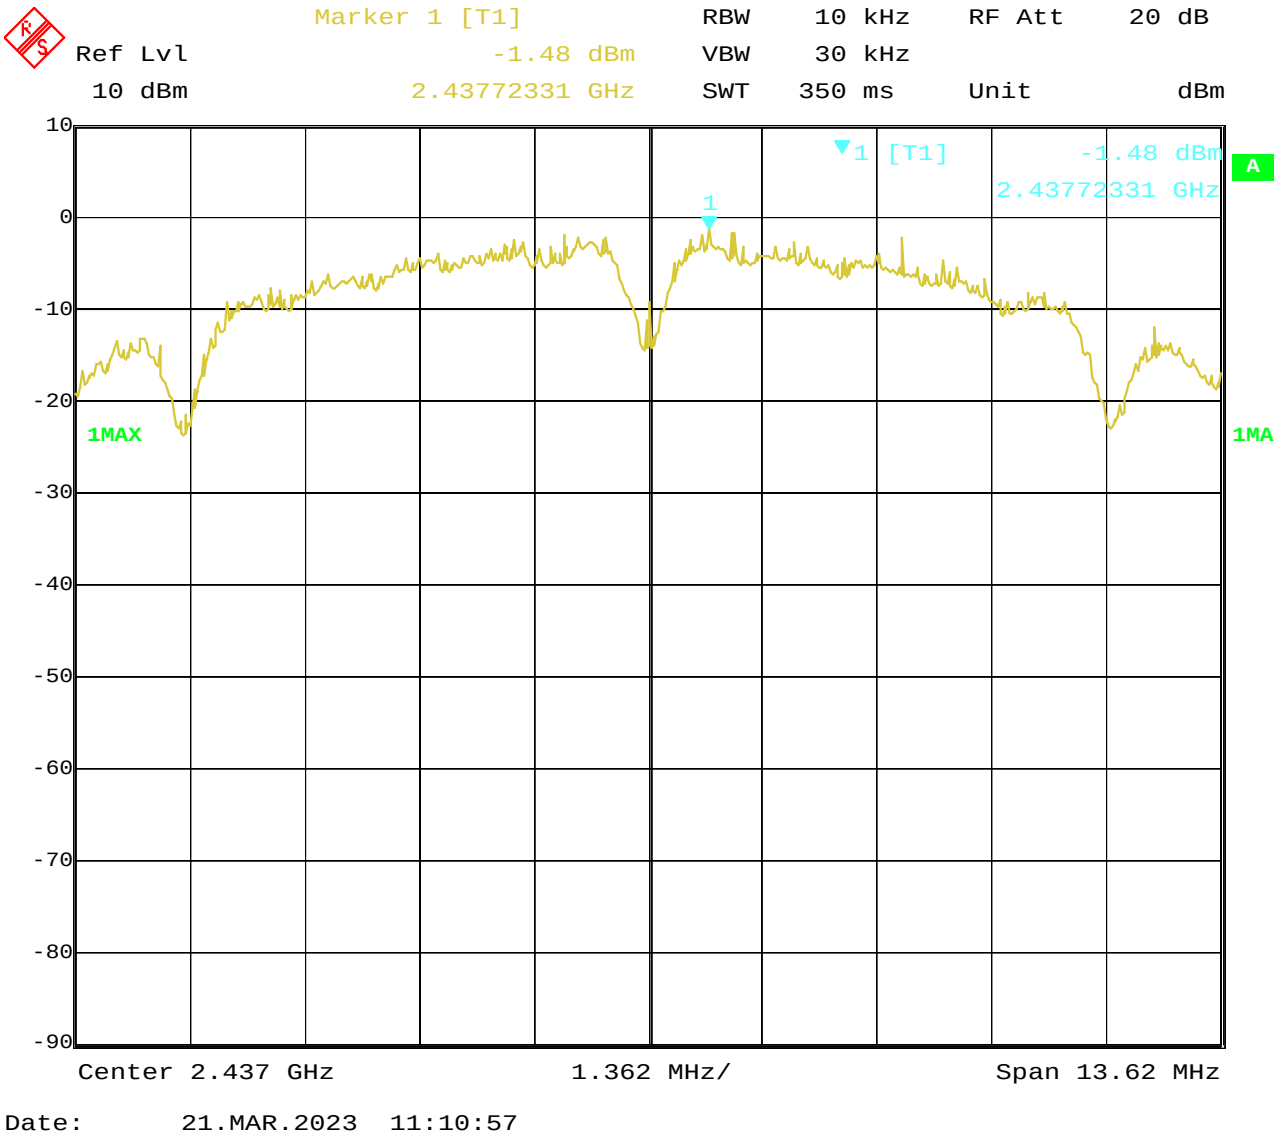

6. 802.11b at 1Mbps of CH11

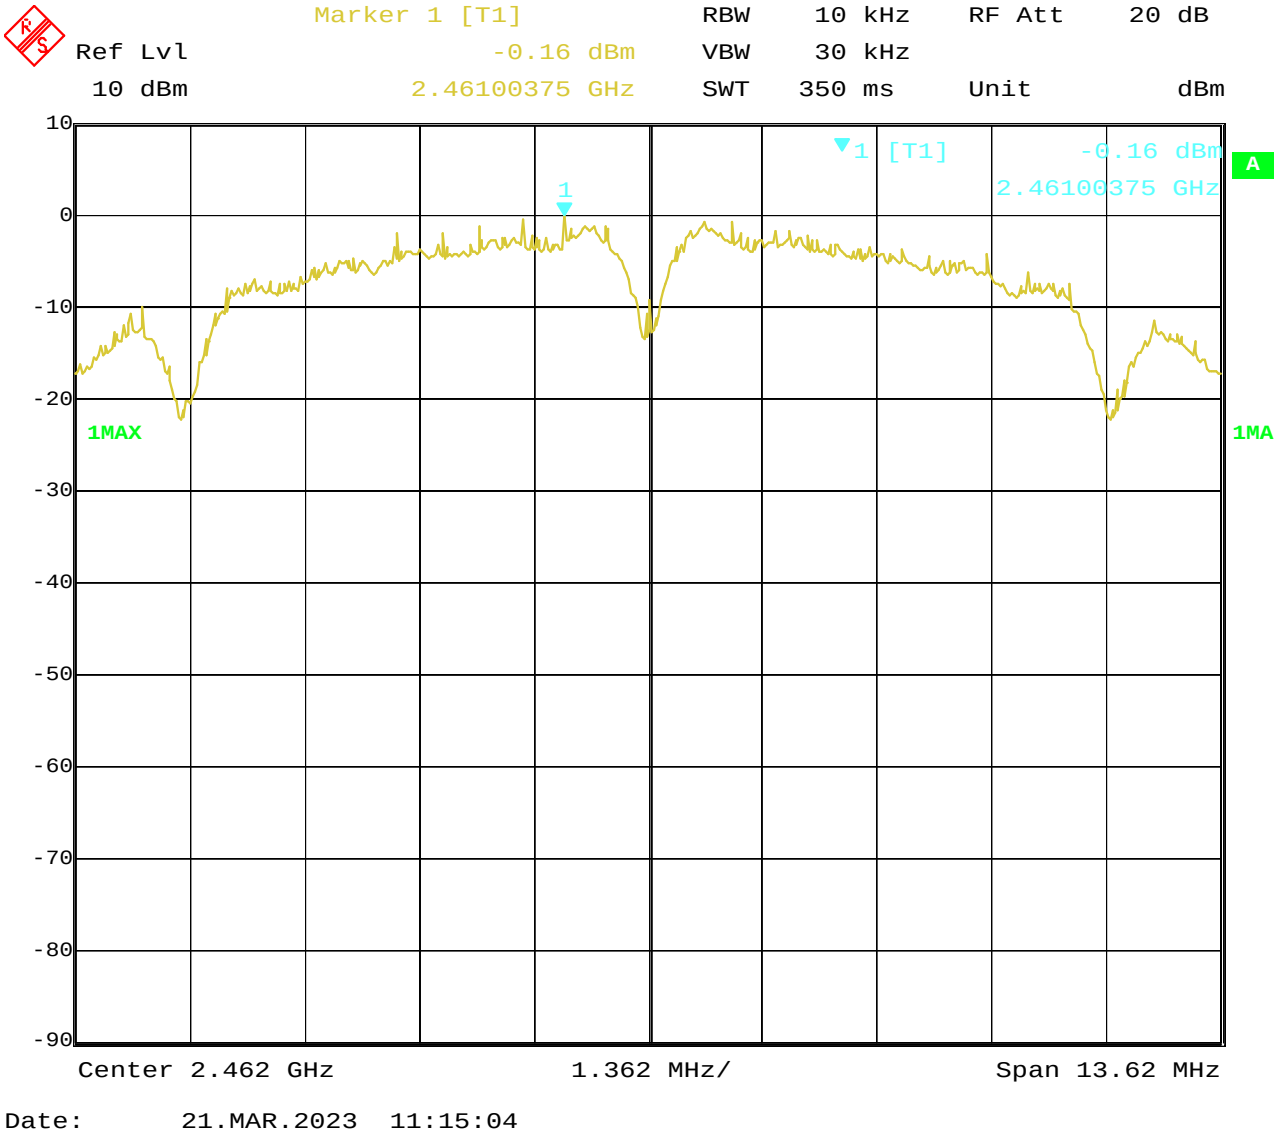

7. 802.11g at 6Mbps of CH1

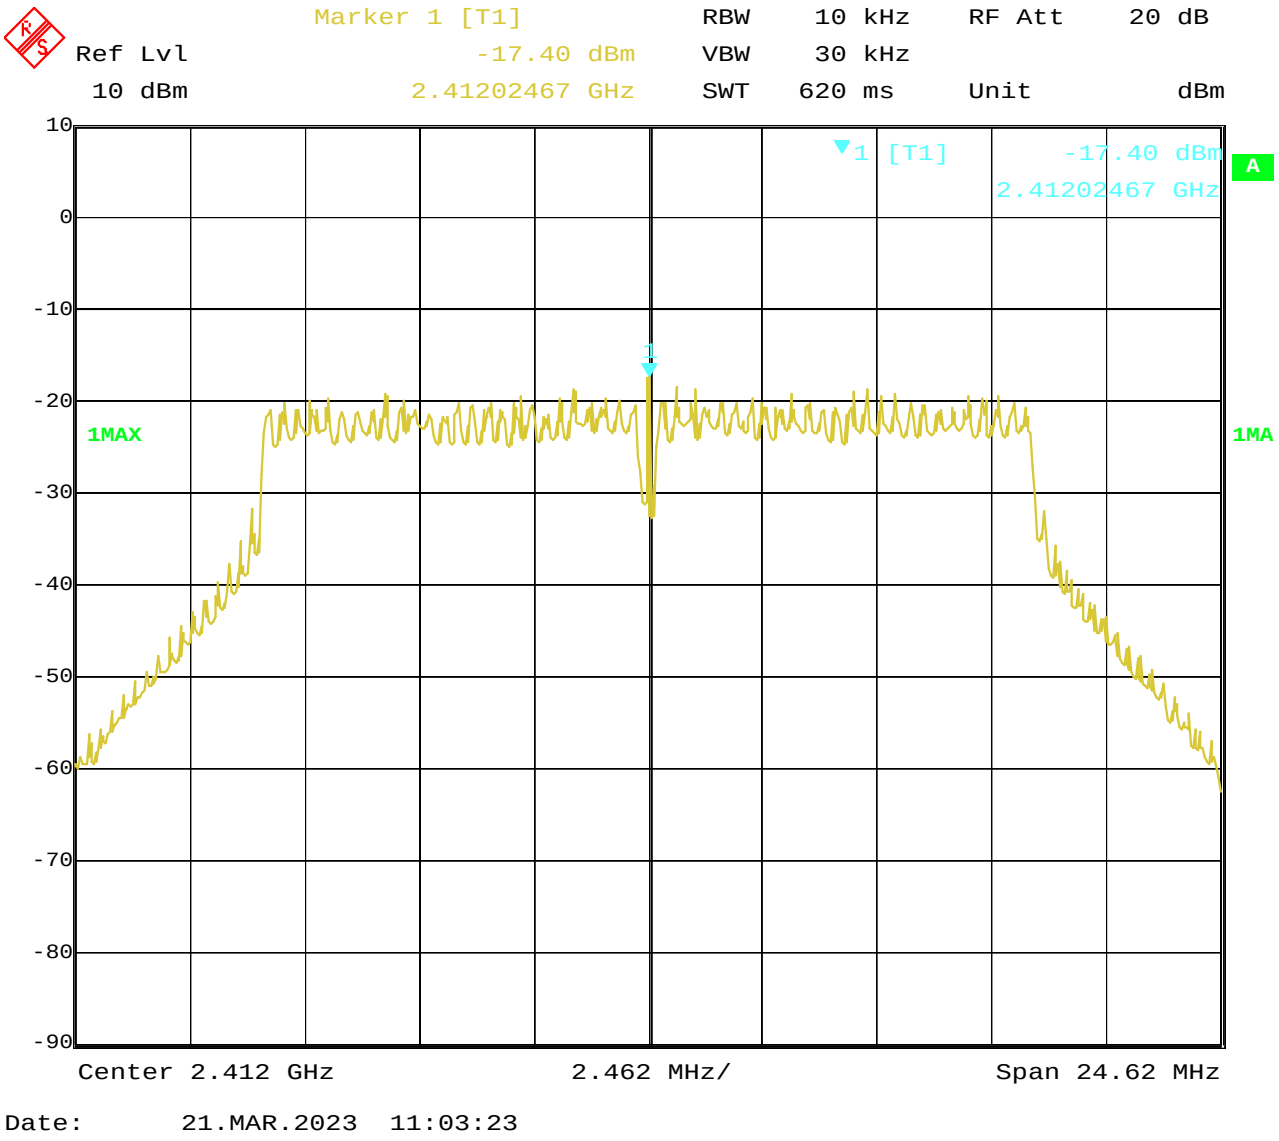

8. 802.11g at 6Mbps of CH6

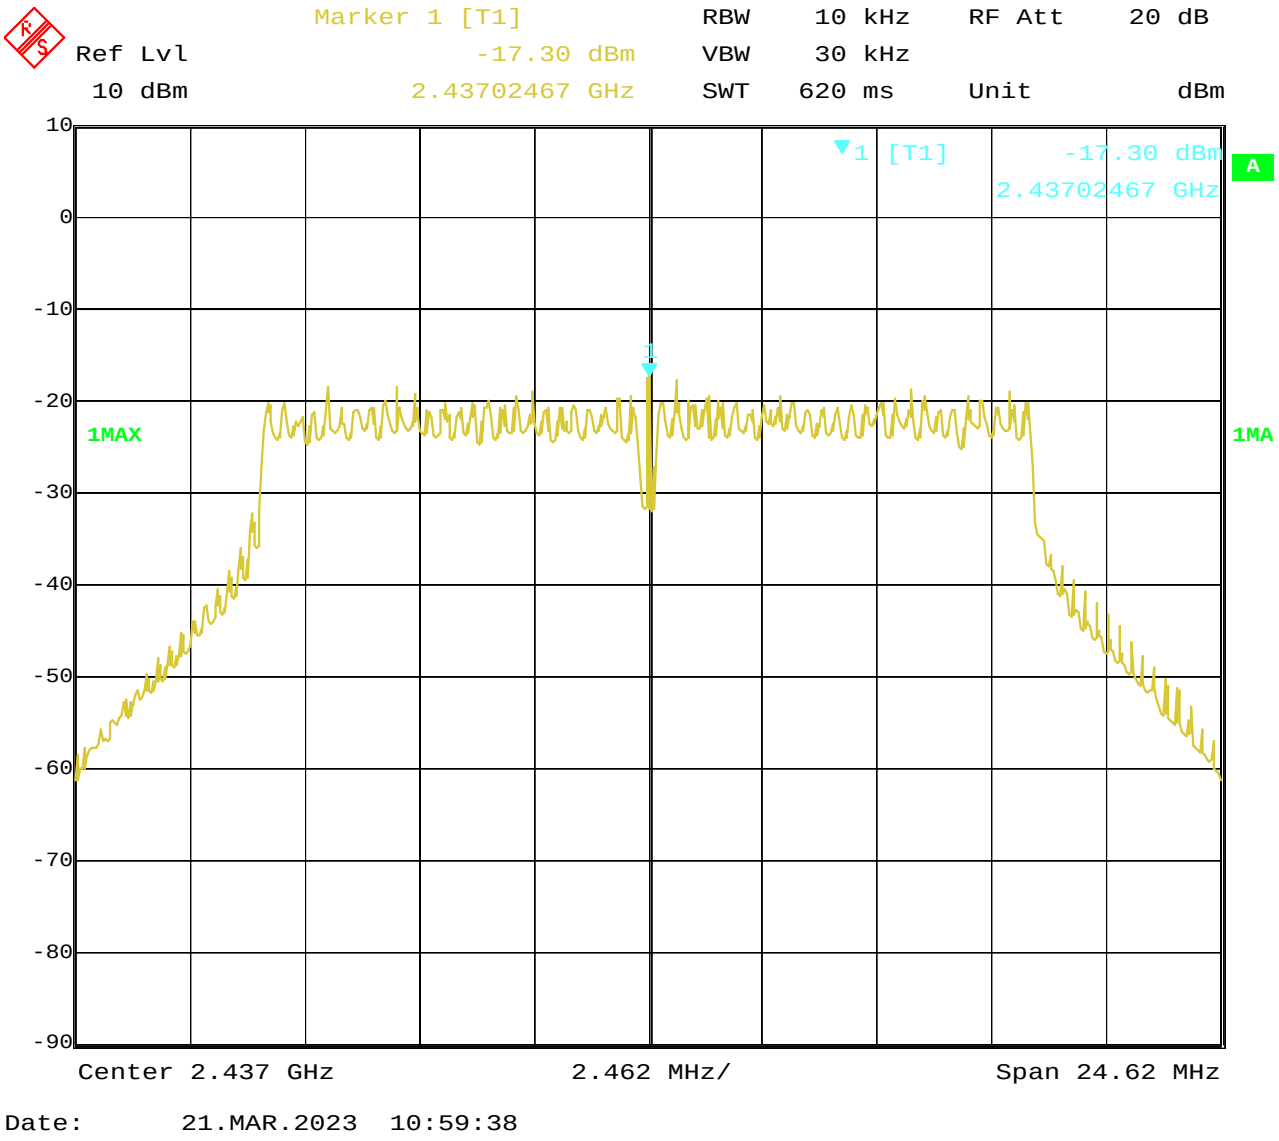

9. 802.11g at 6Mbps of CH11

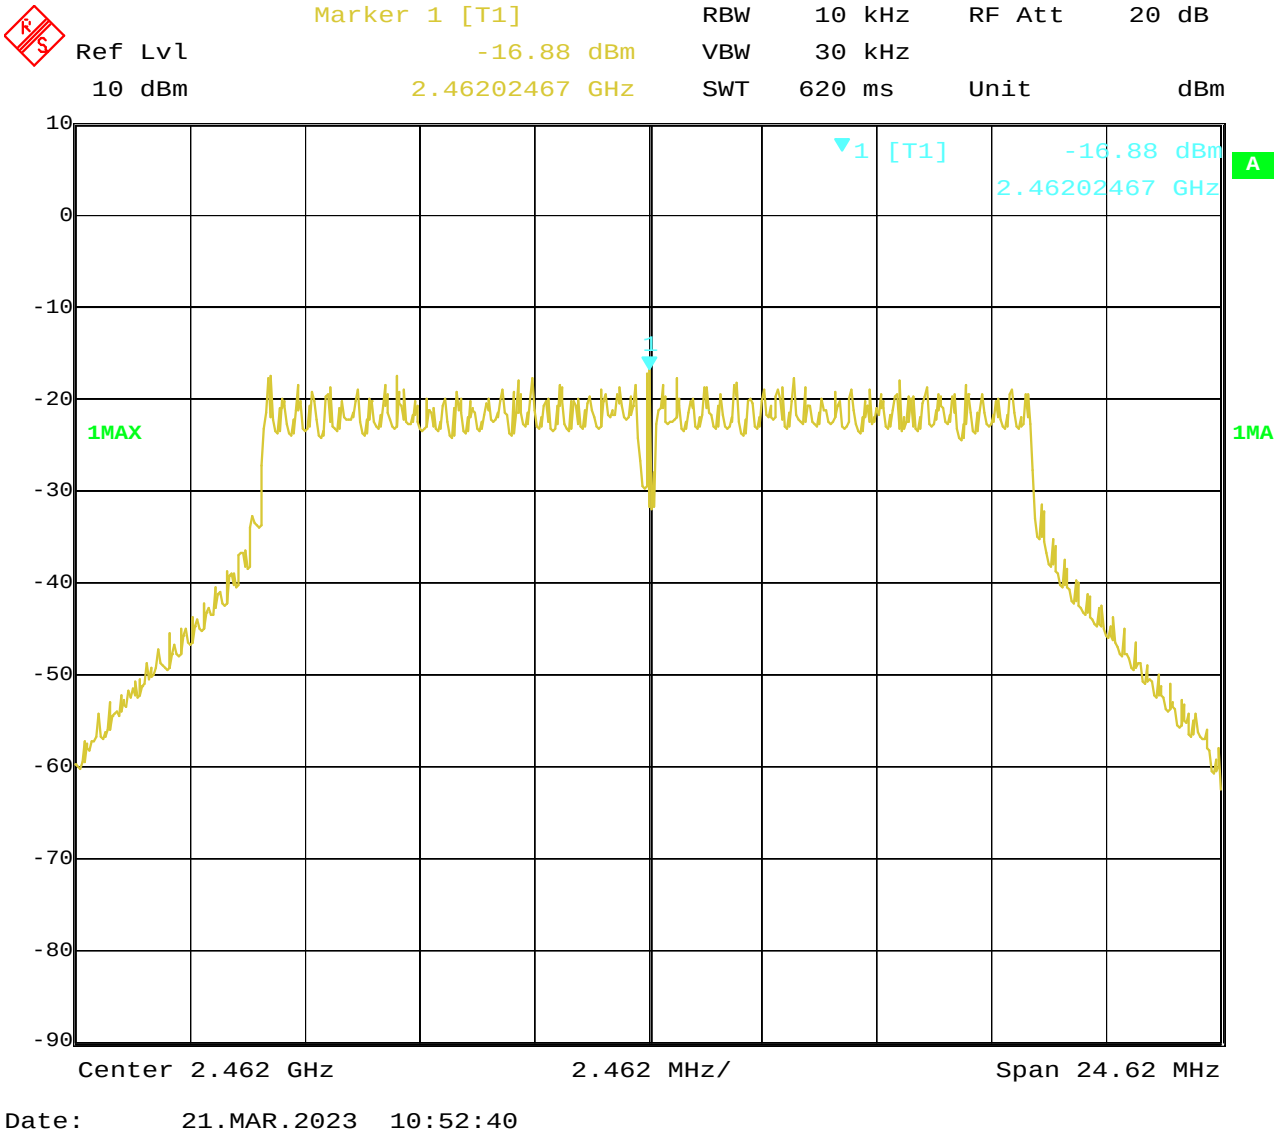

10. 802.11n at HT20 of CH01

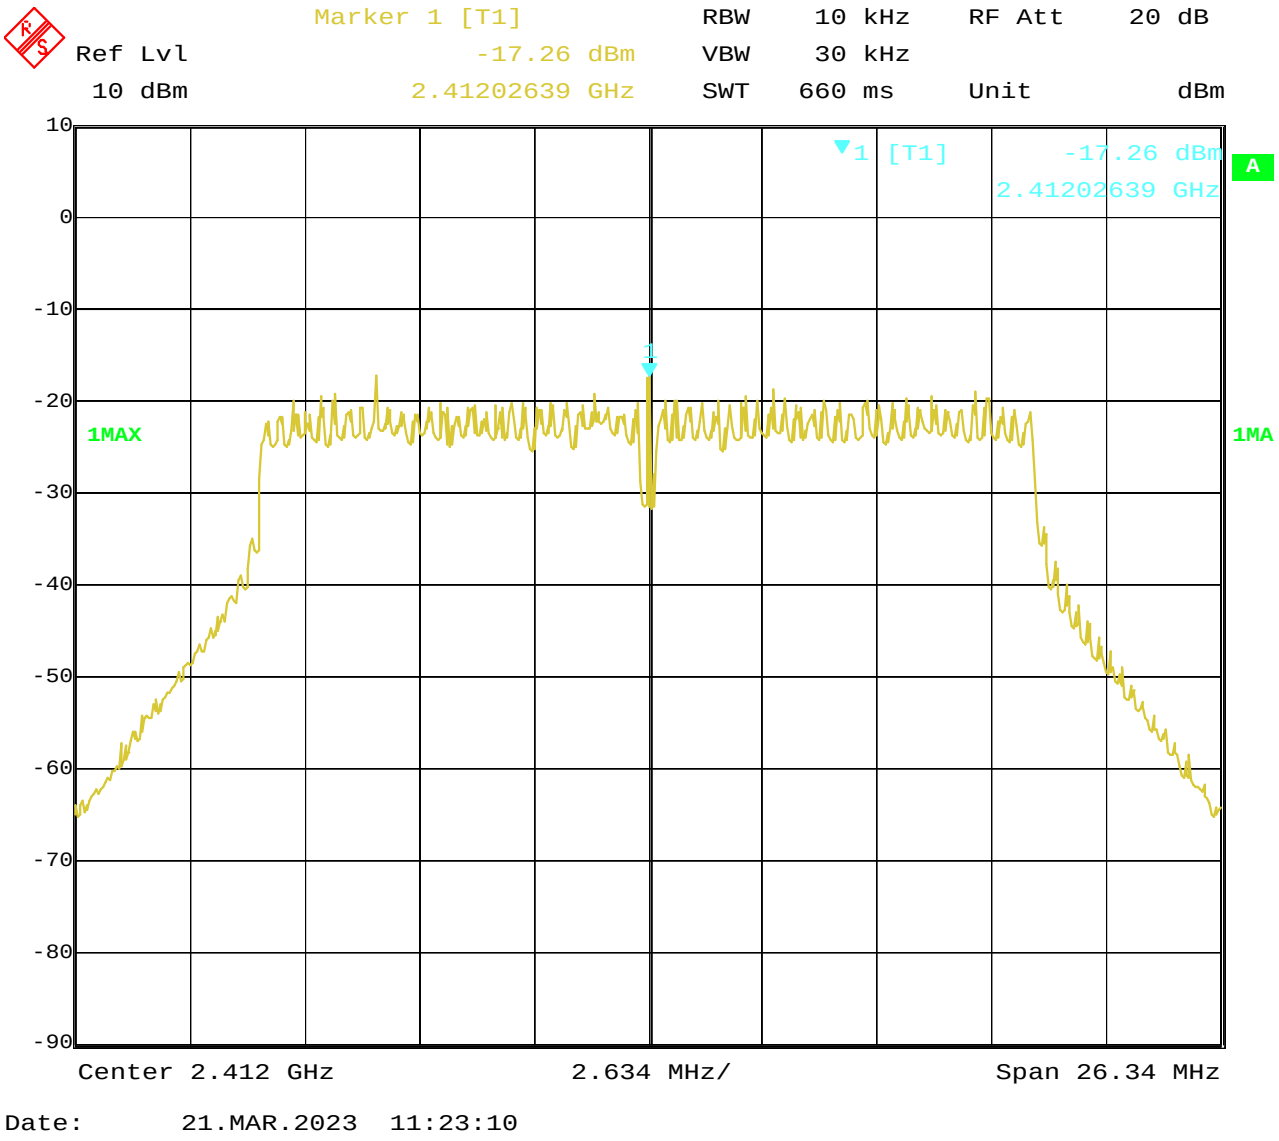

11. 802.11n at HT20 of CH06

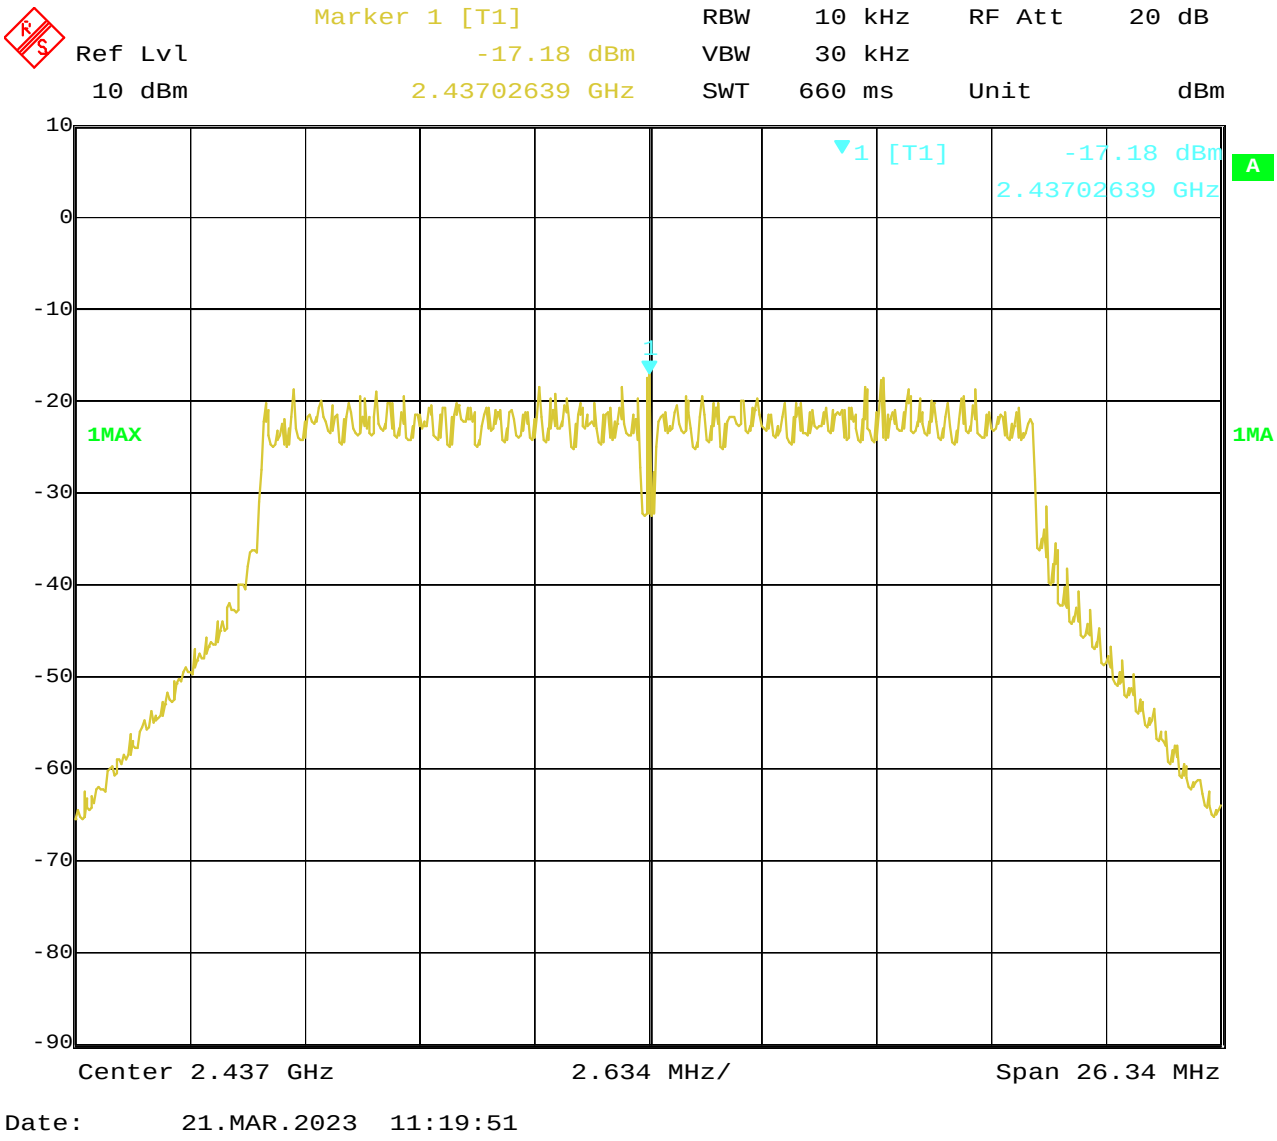

12. 802.11n at HT20 of CH11

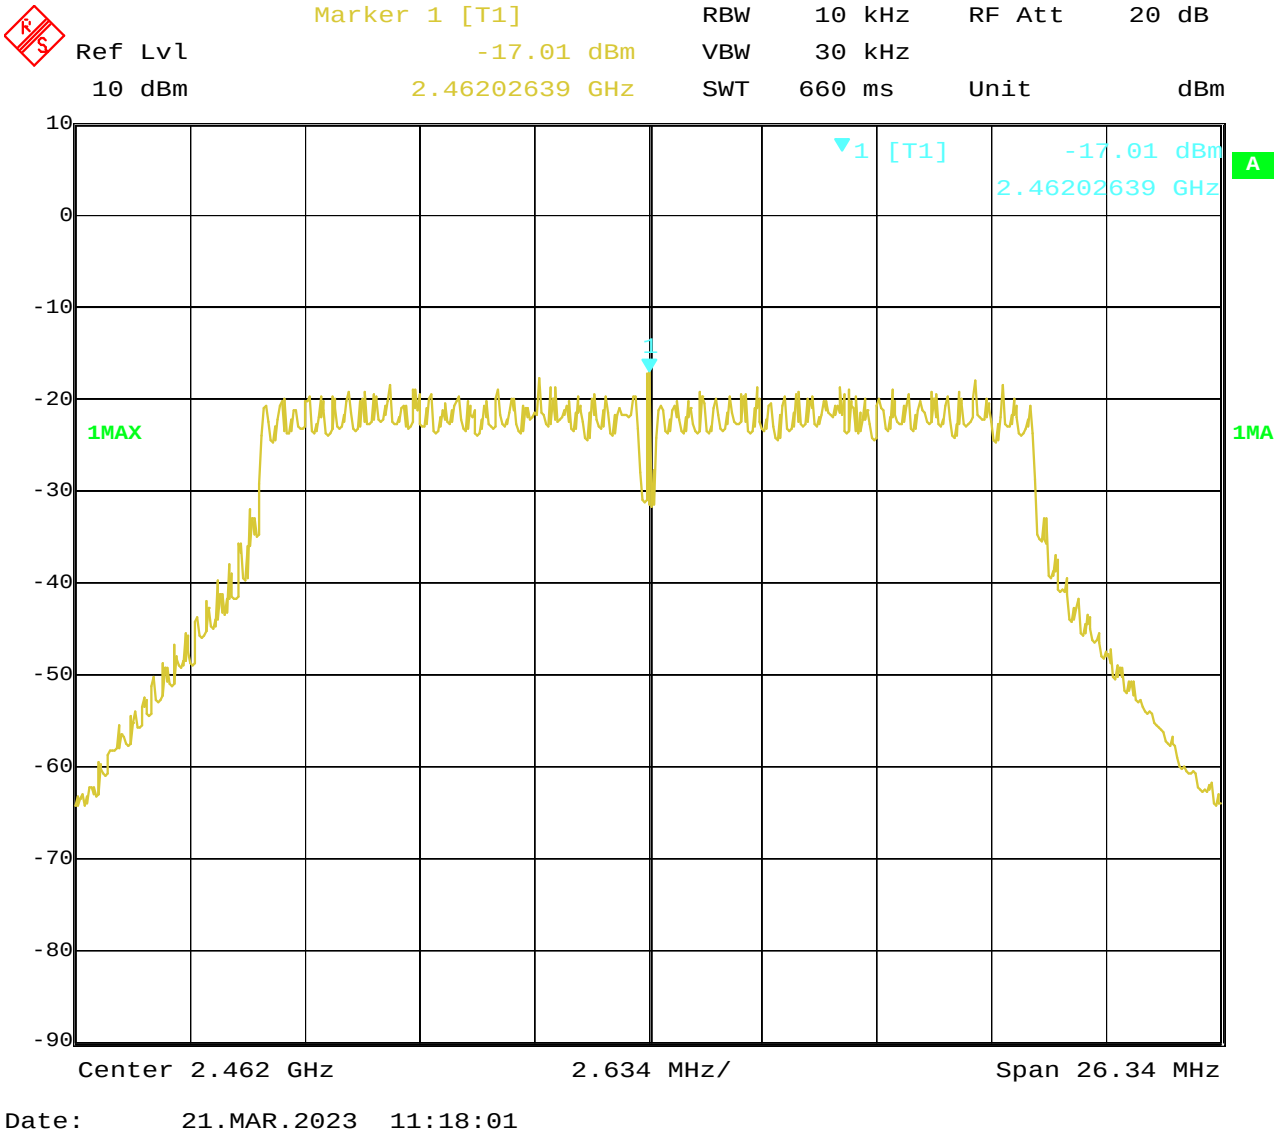

13. 802.11n at HT40 of CH03

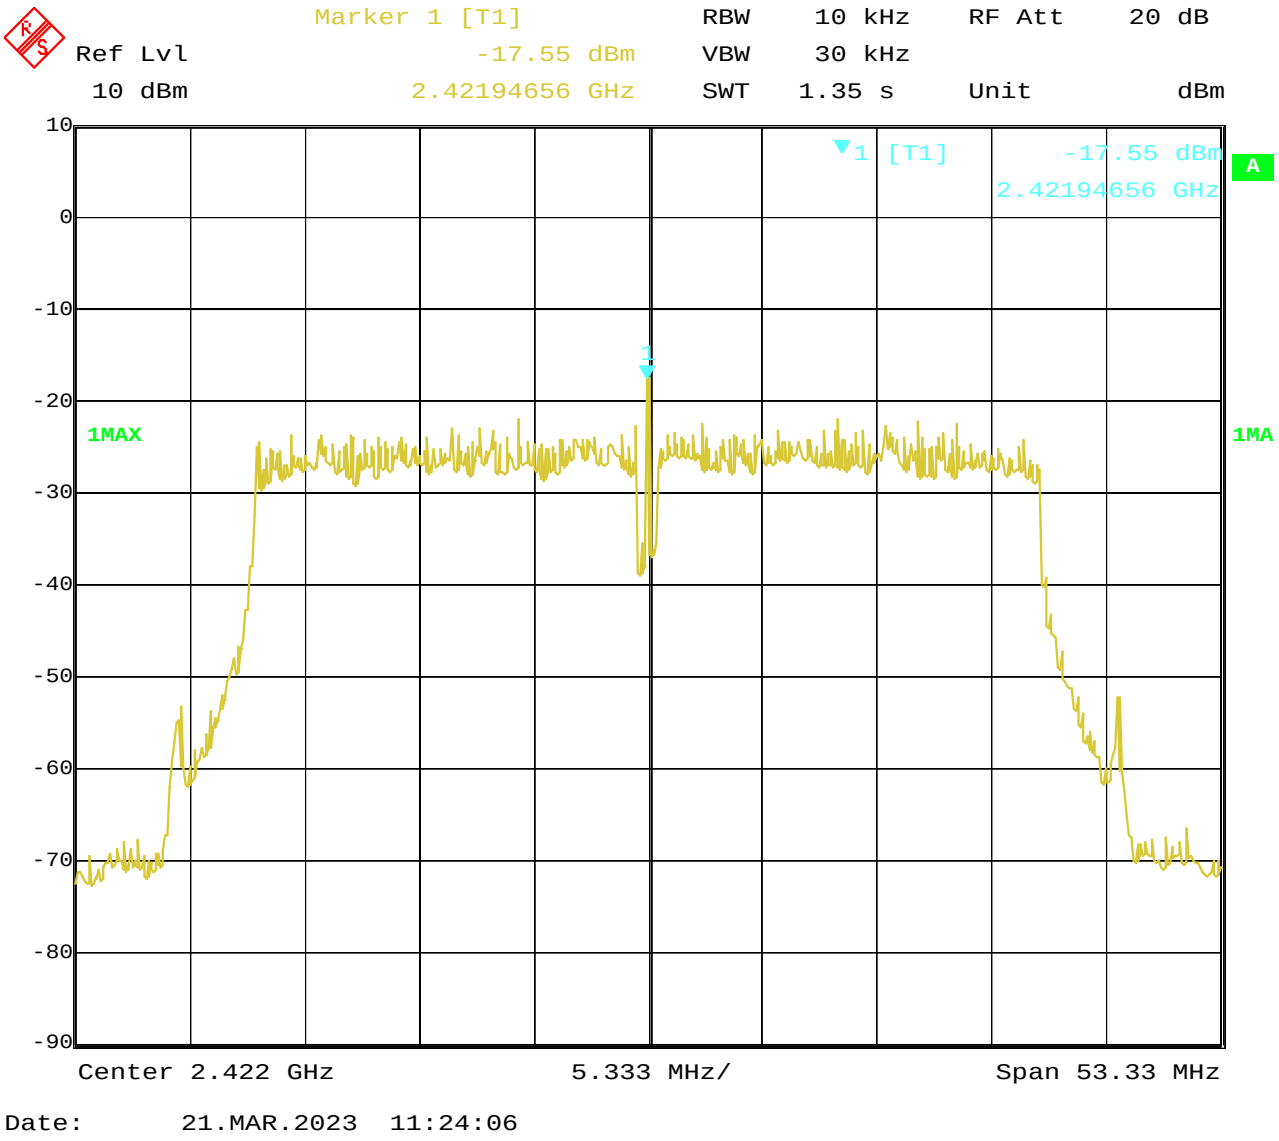

14. 802.11n at HT40 of CH06

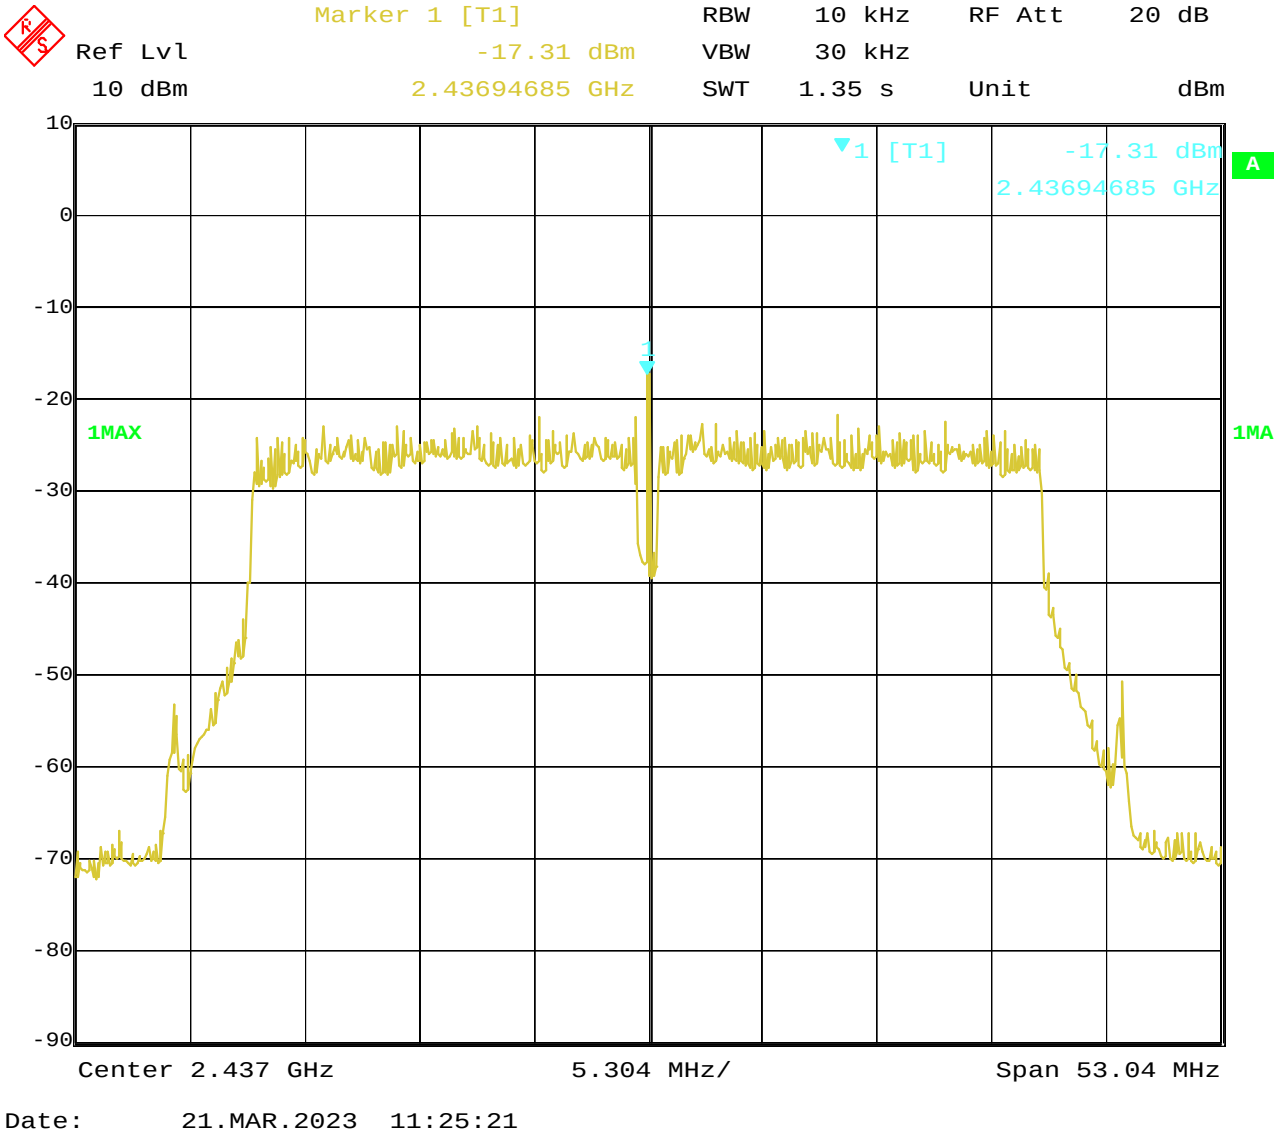

15. 802.11n at HT40 of CH09

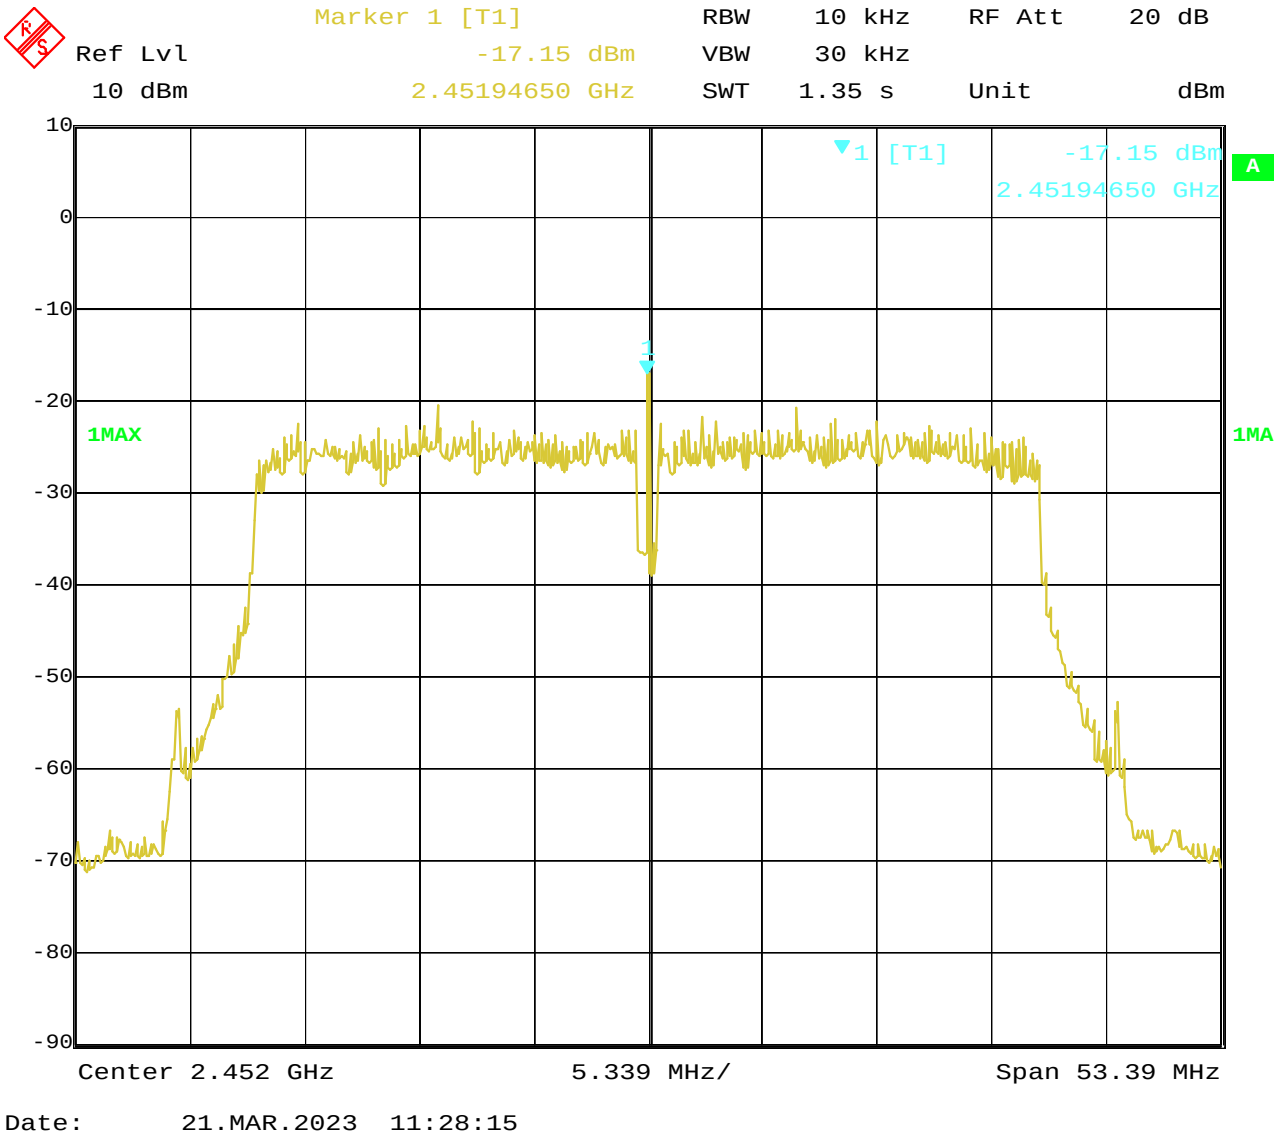

10 Out of Band Measurement

10.1 Test Setup for band edge

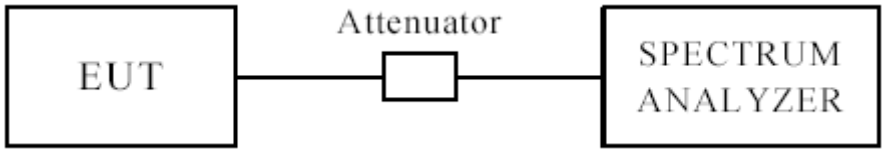

The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

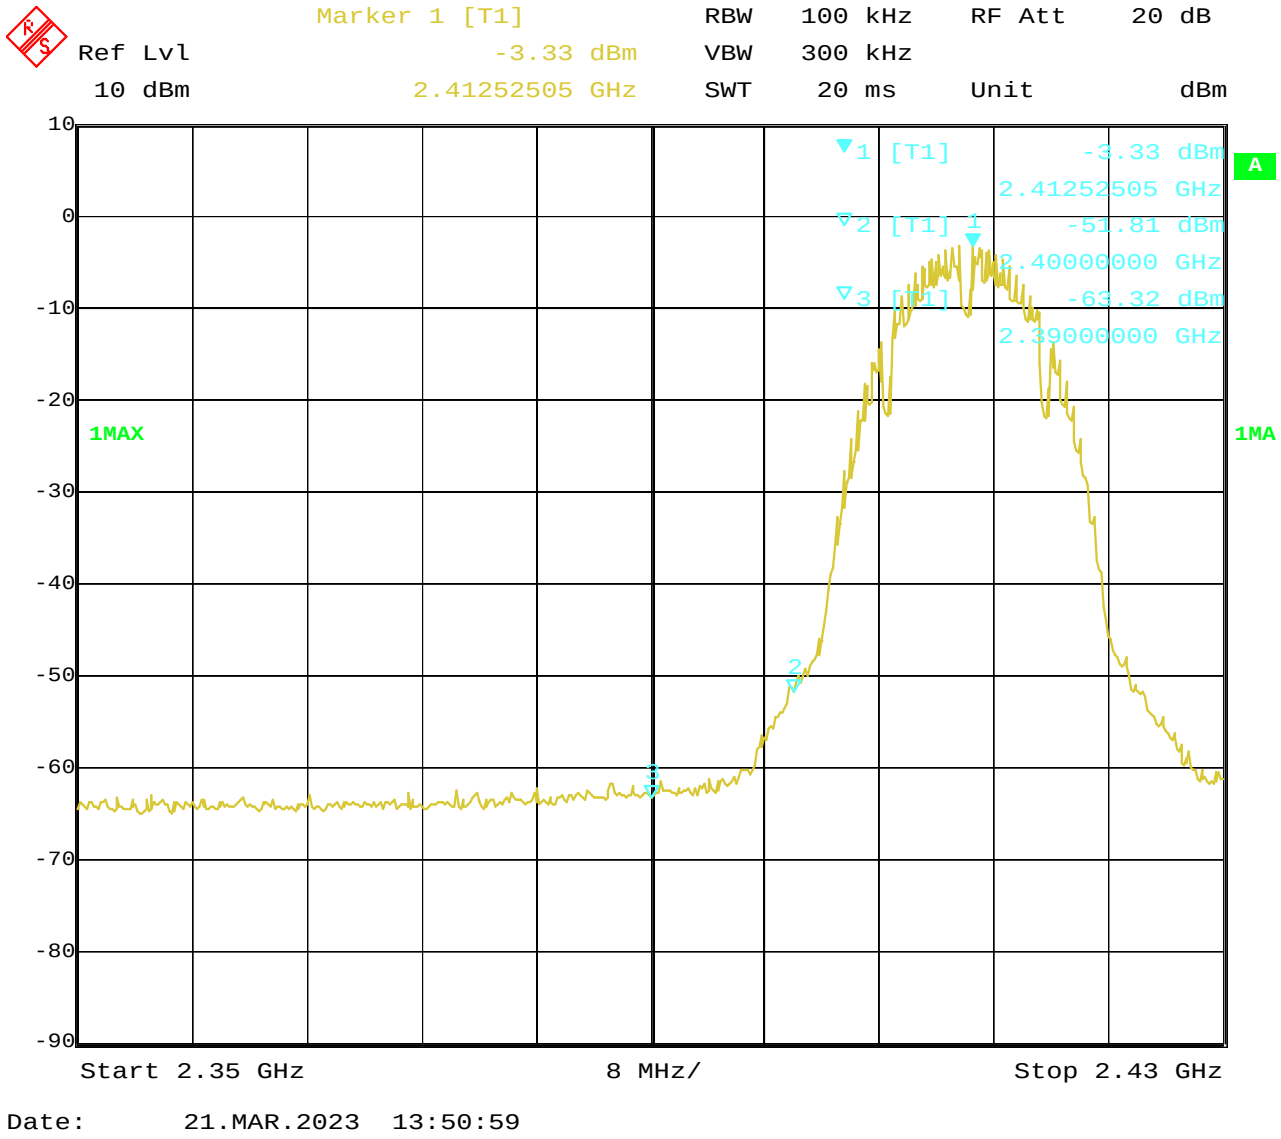

CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

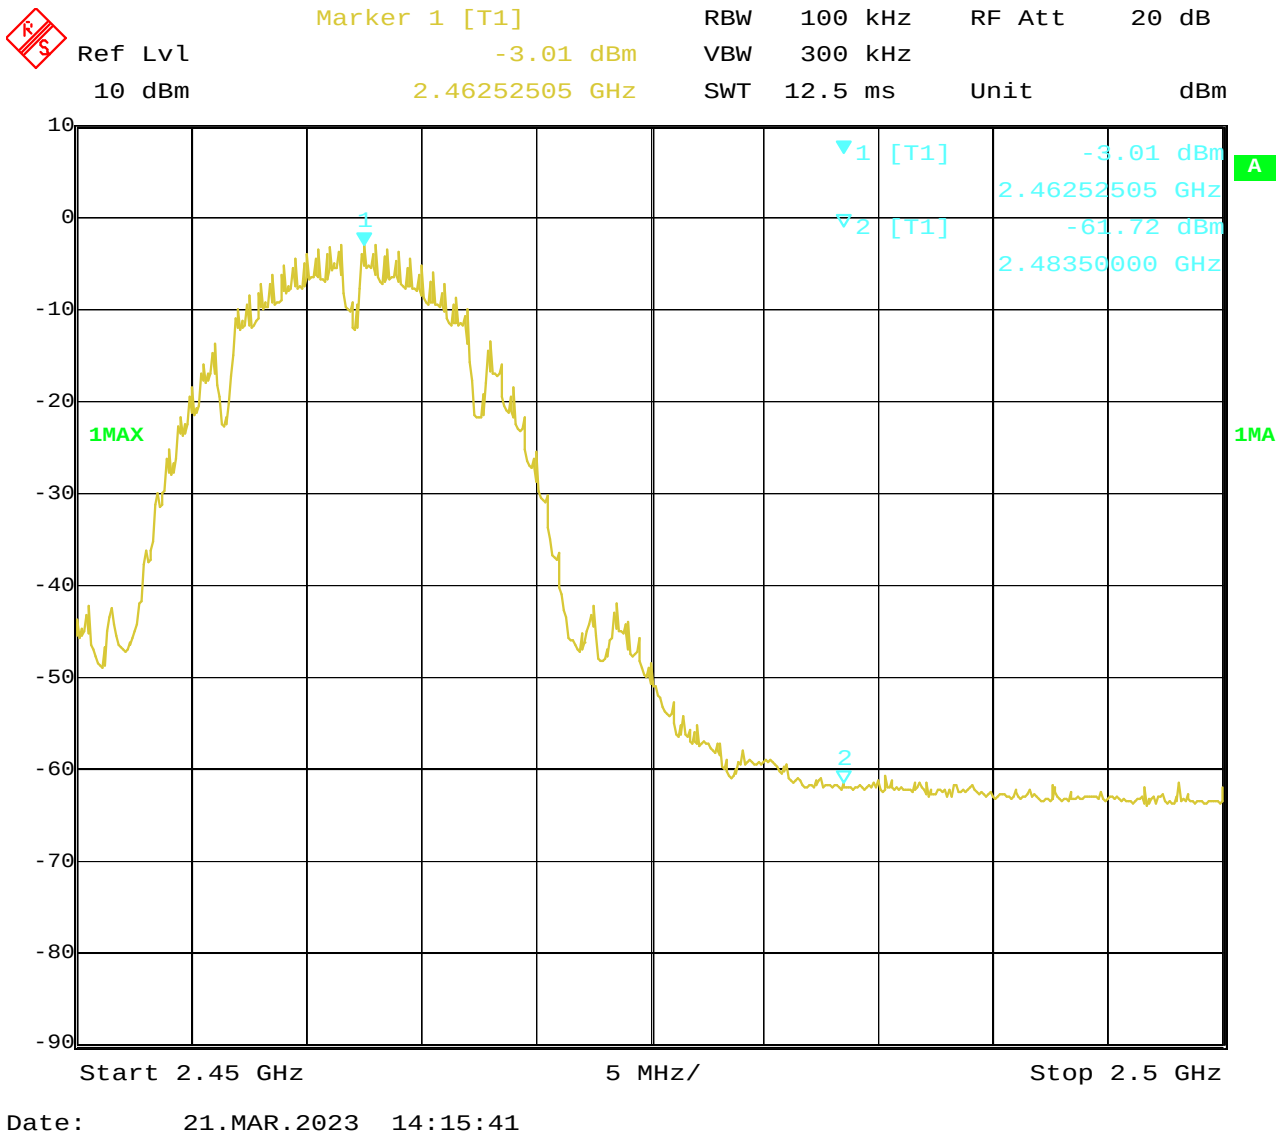

For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

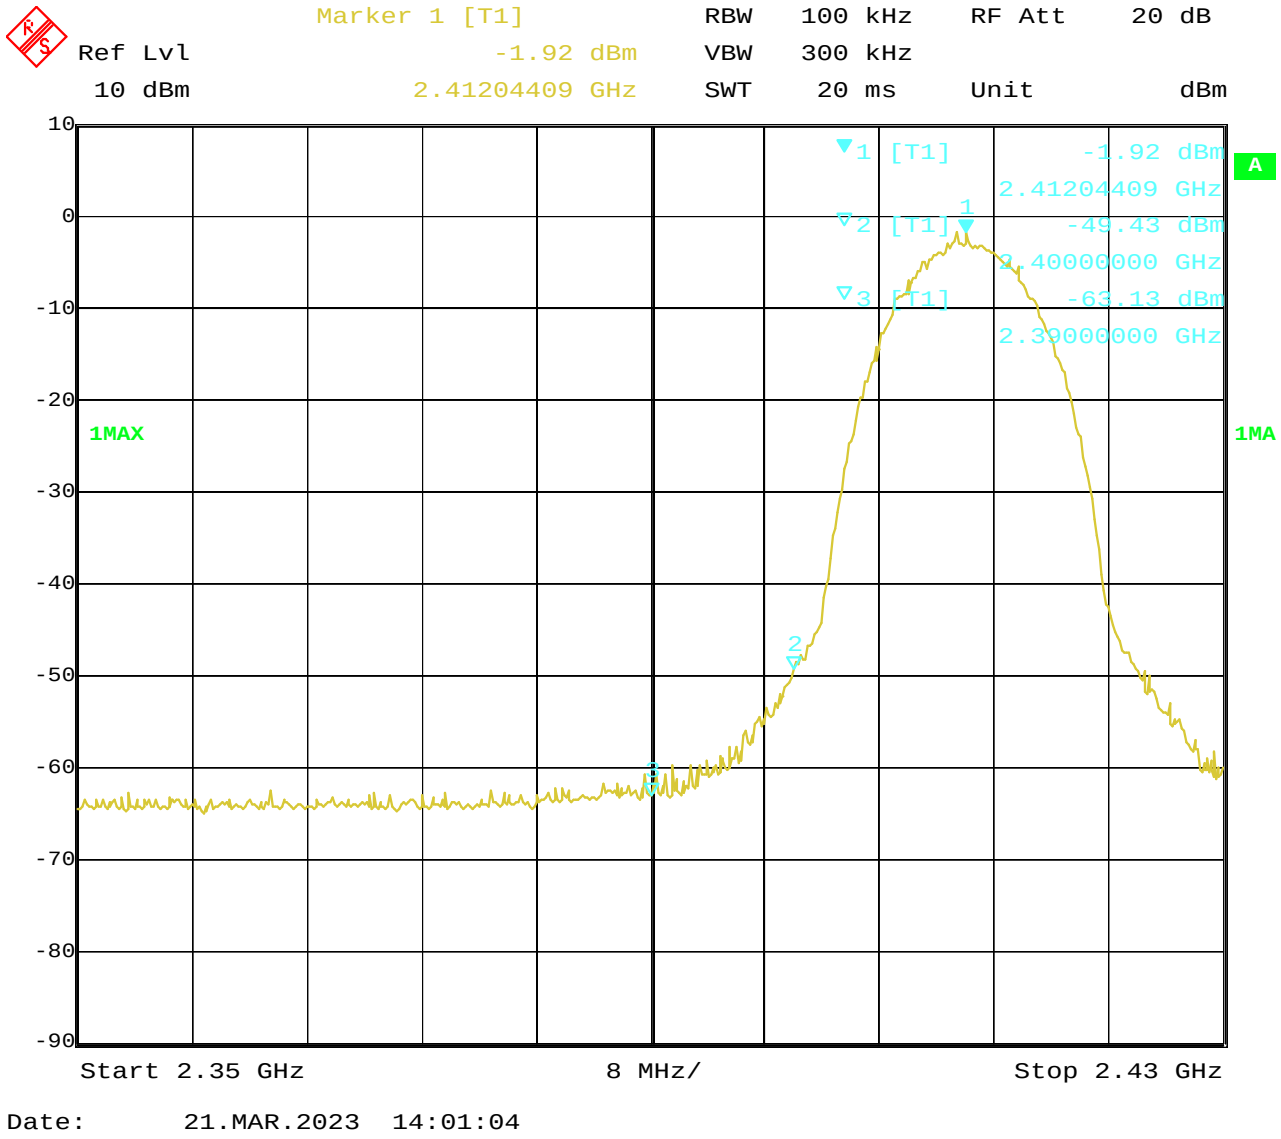

CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

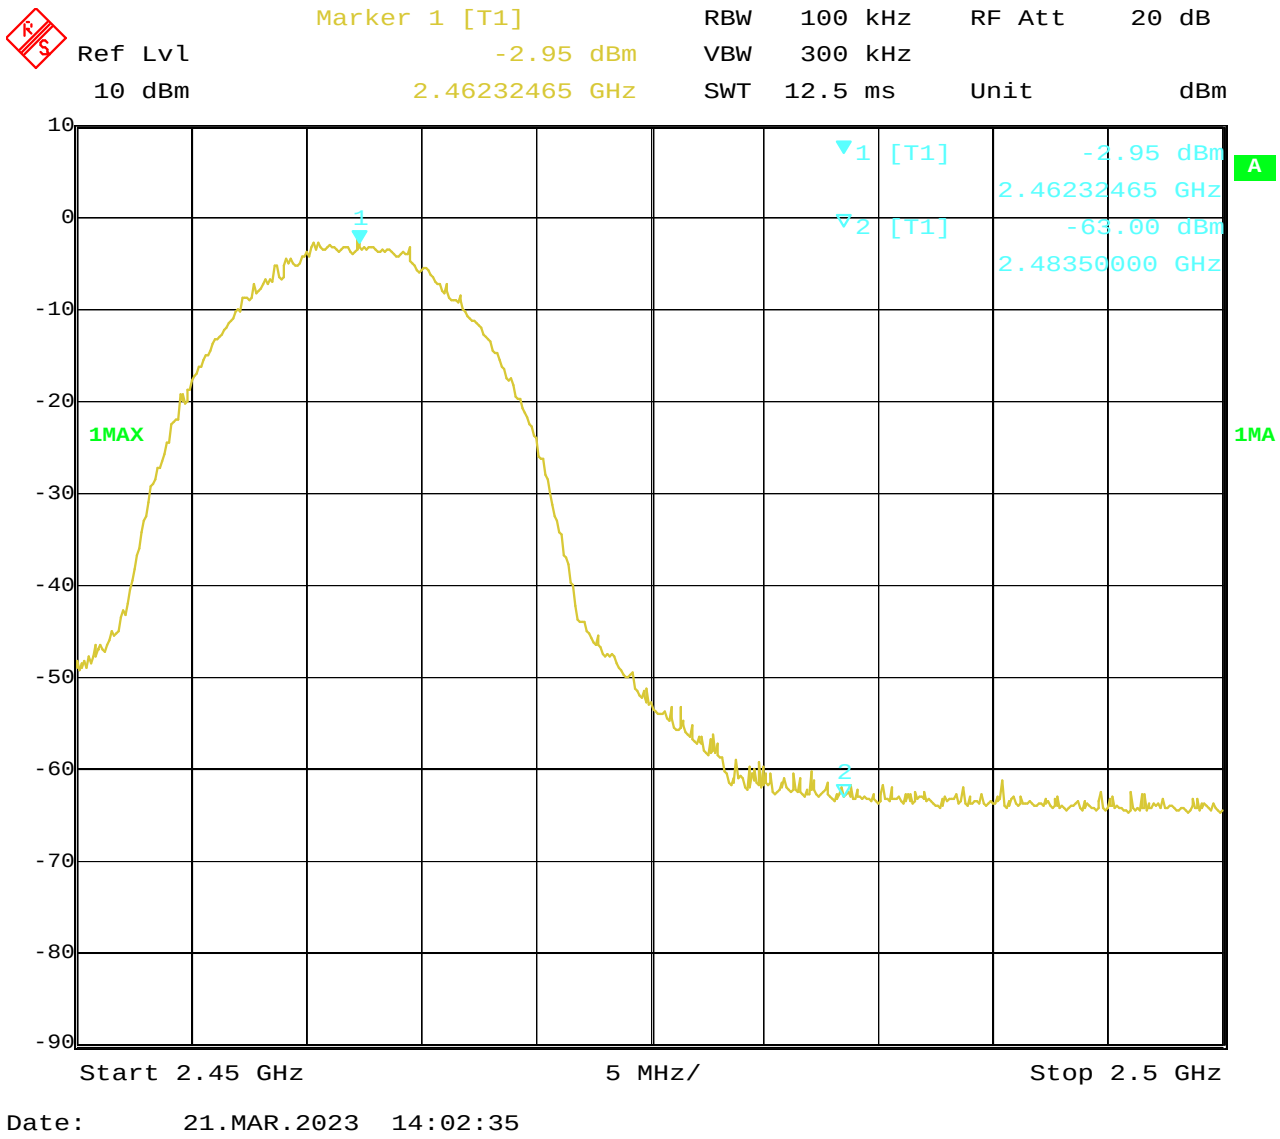

For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

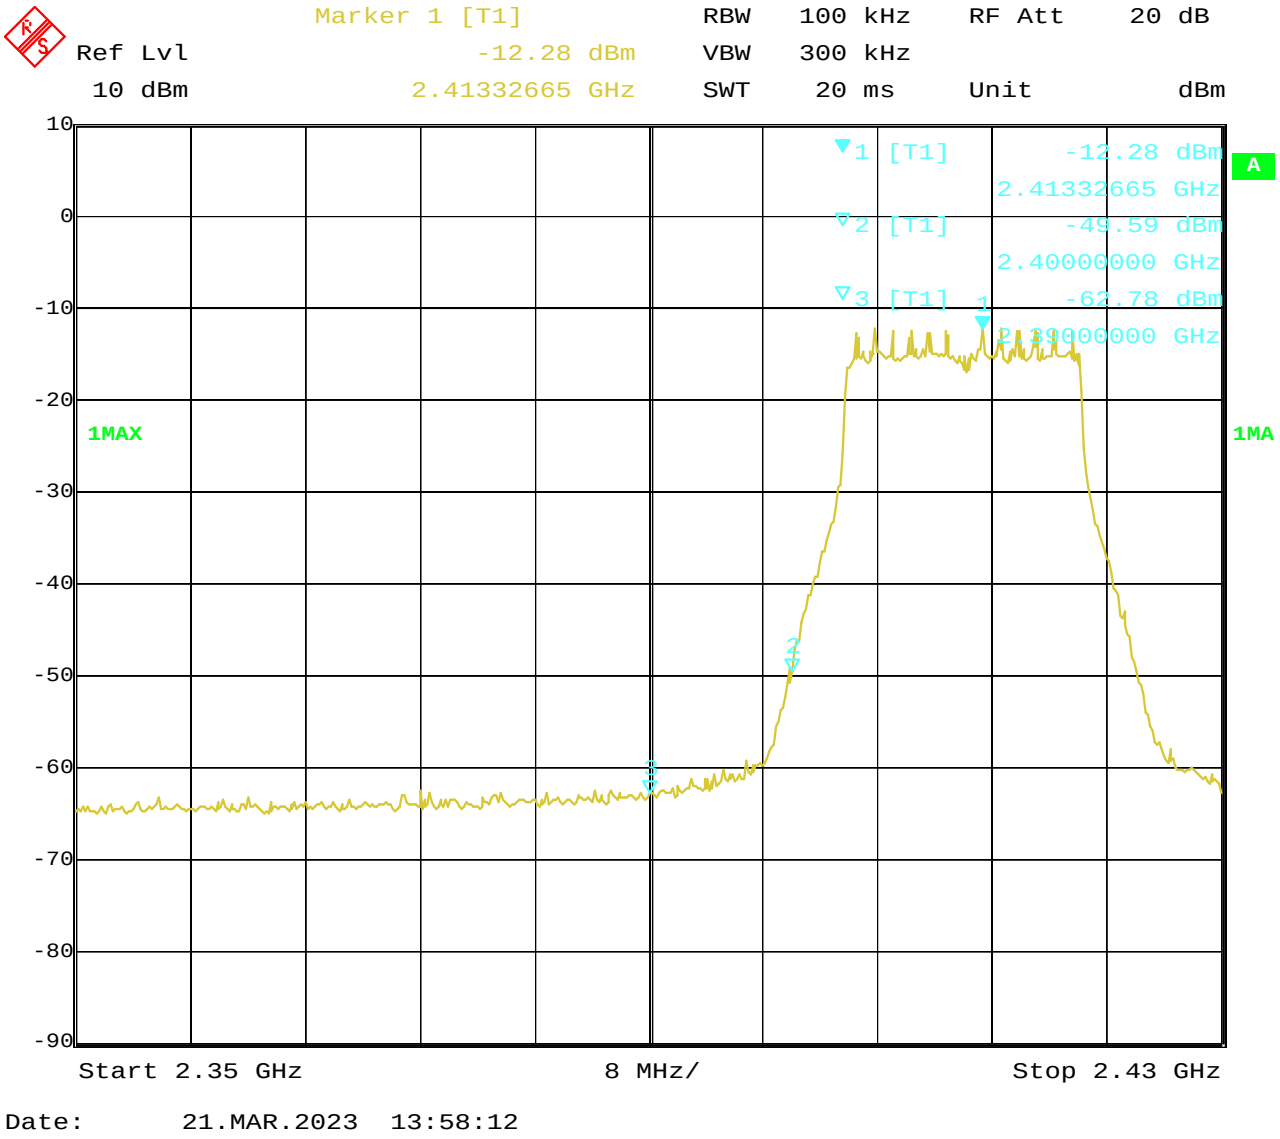

CH11 at 6Mbps

10.4 Band-edge Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

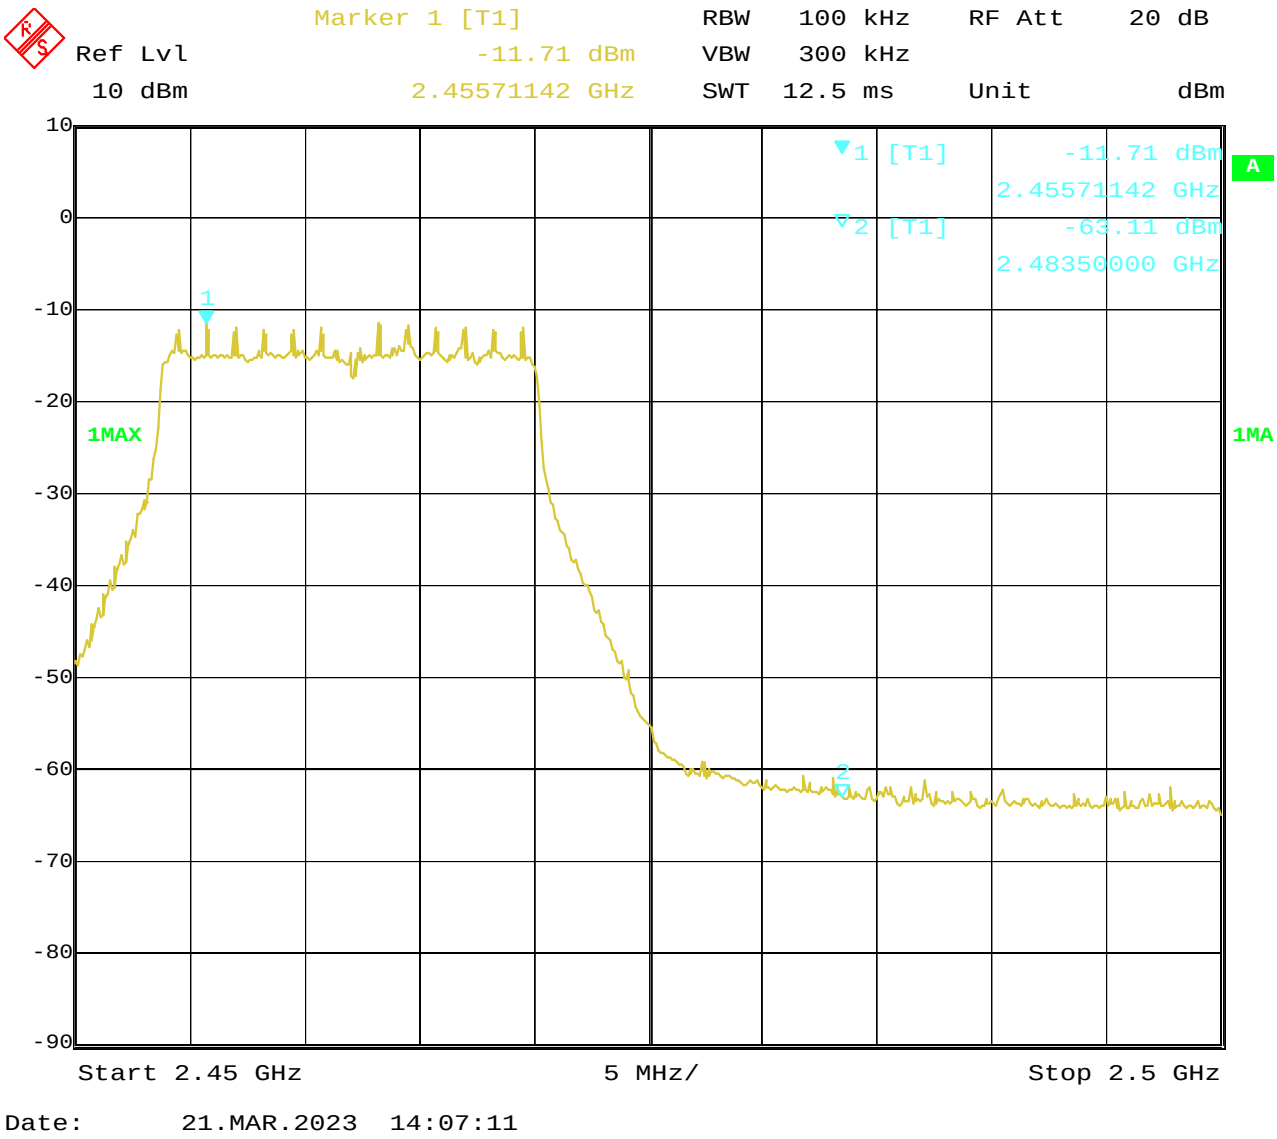

For 802.11n (HT20) mode

CH01 at mcs0

10.4 Band-edge Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

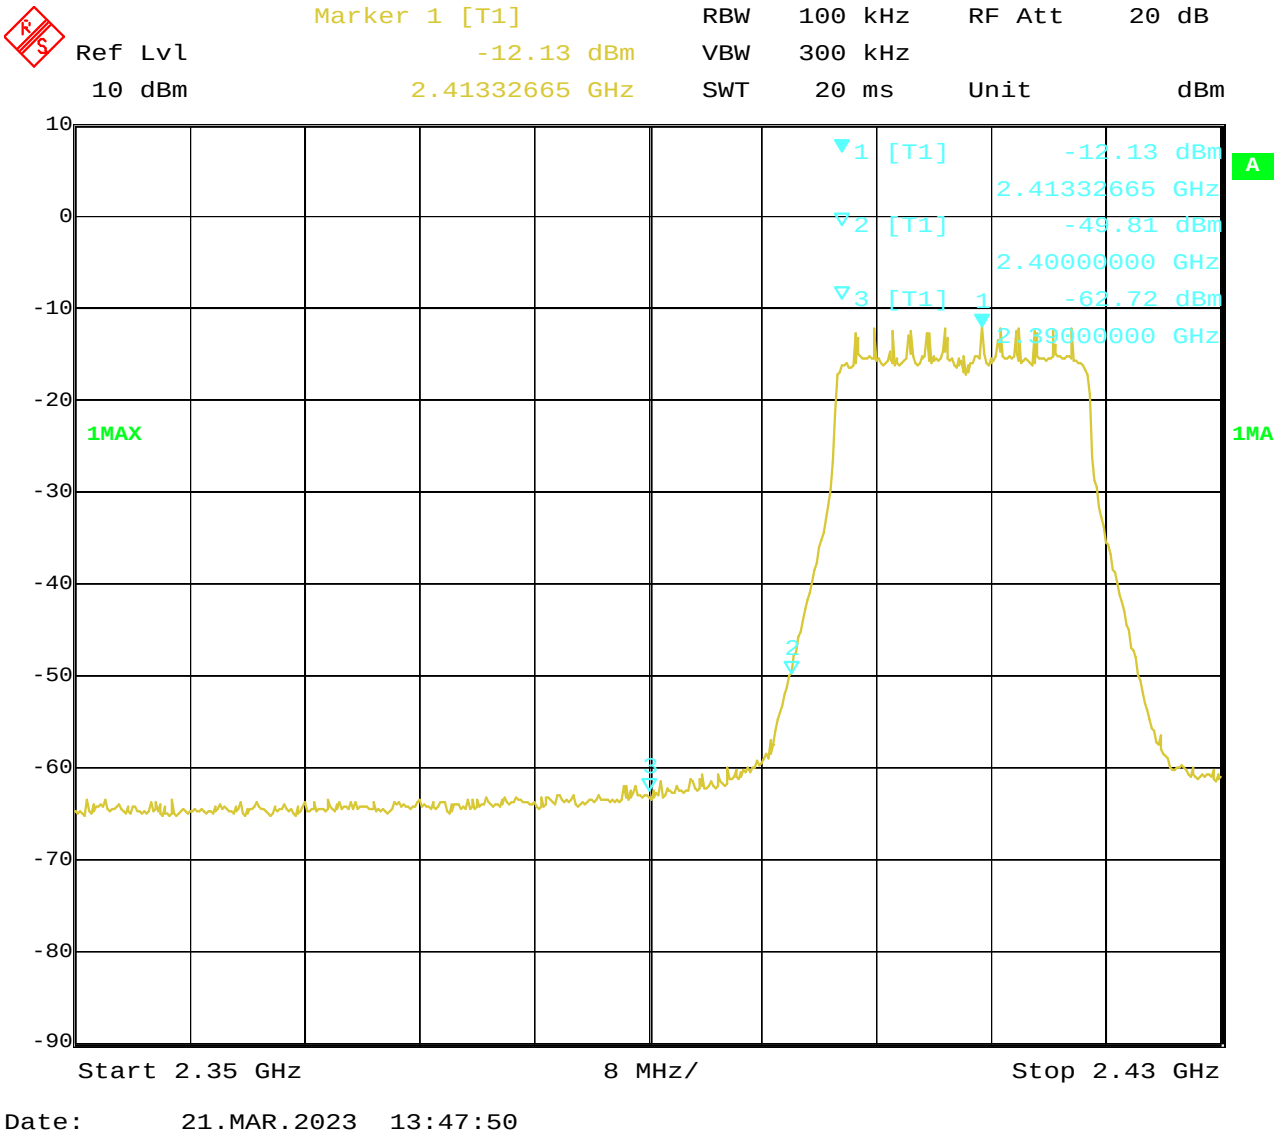

CH11 at mcs0

10.4 Band-edge Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

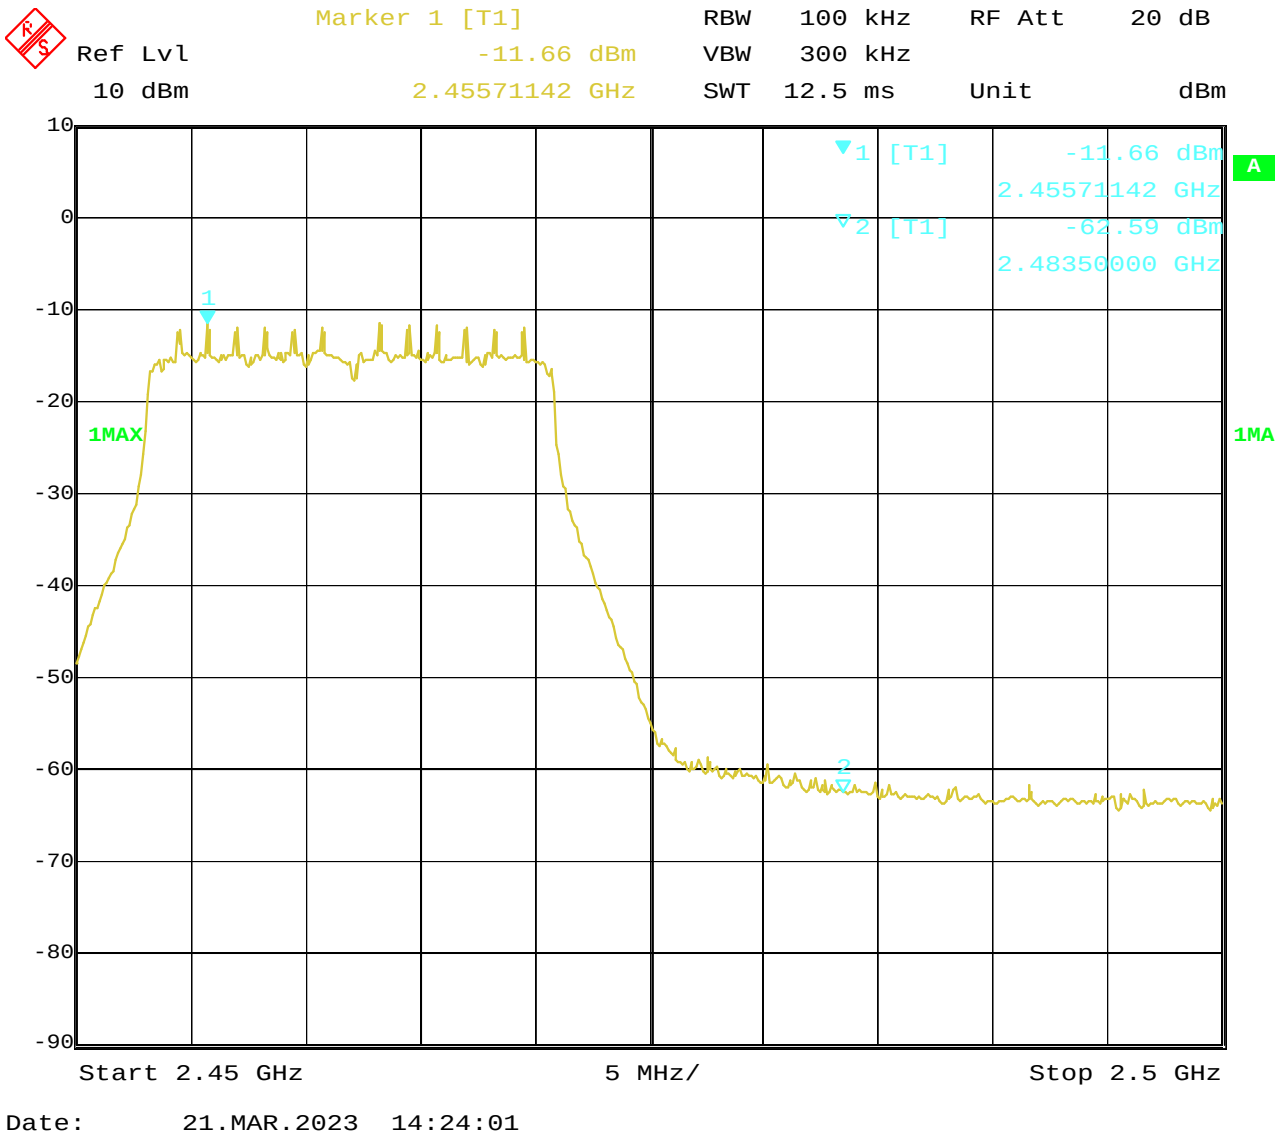

For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

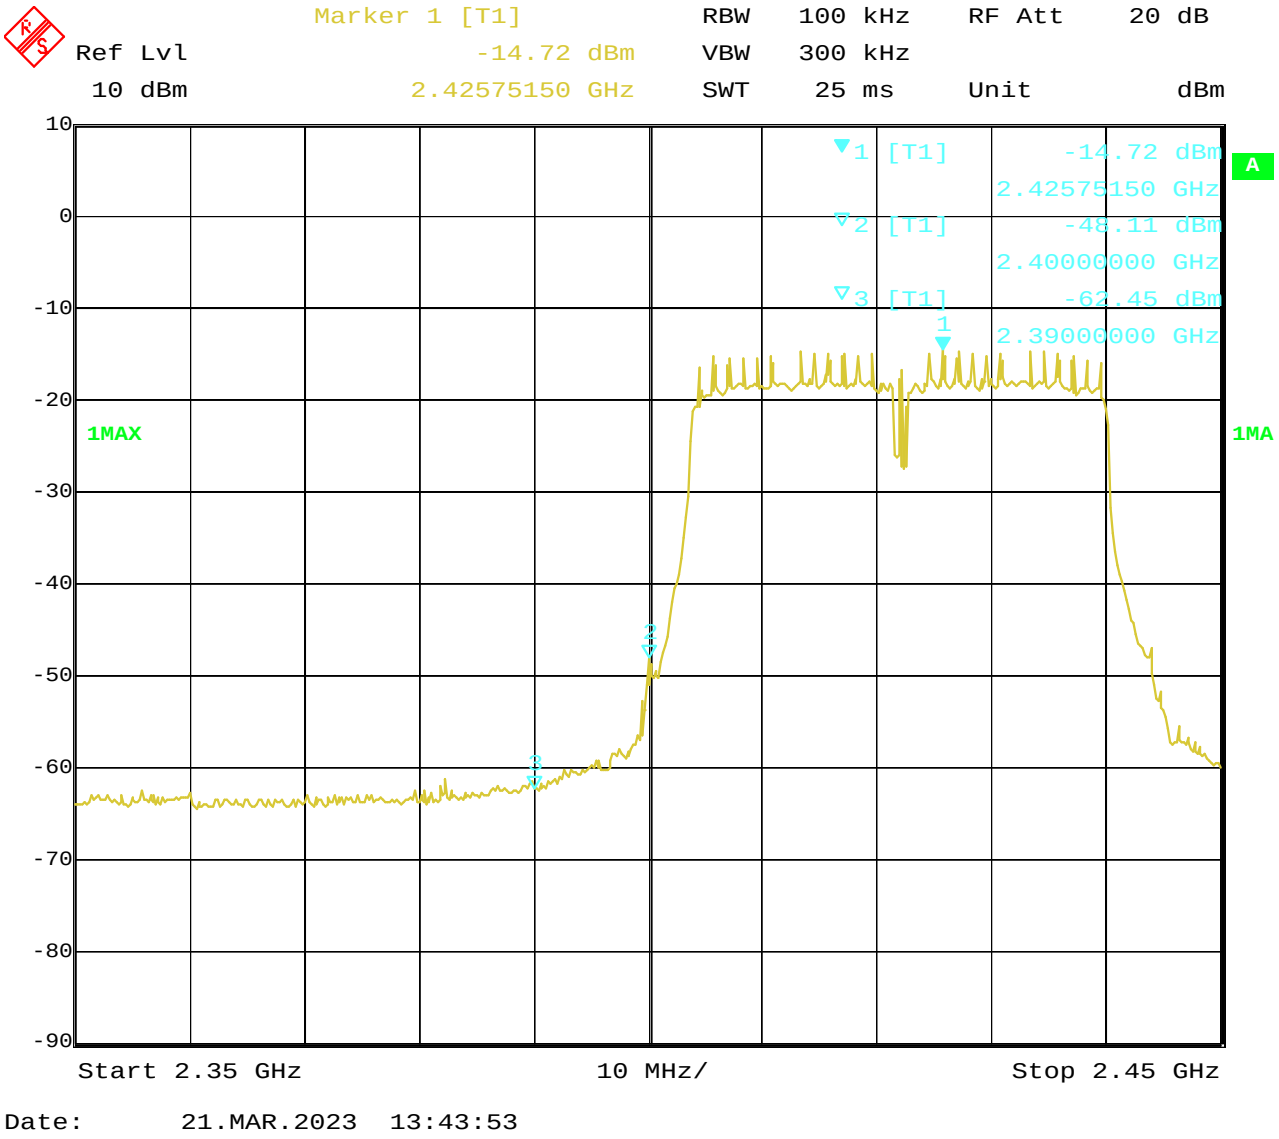

CH09 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Smart Wi-Fi Camera	Model	S43
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

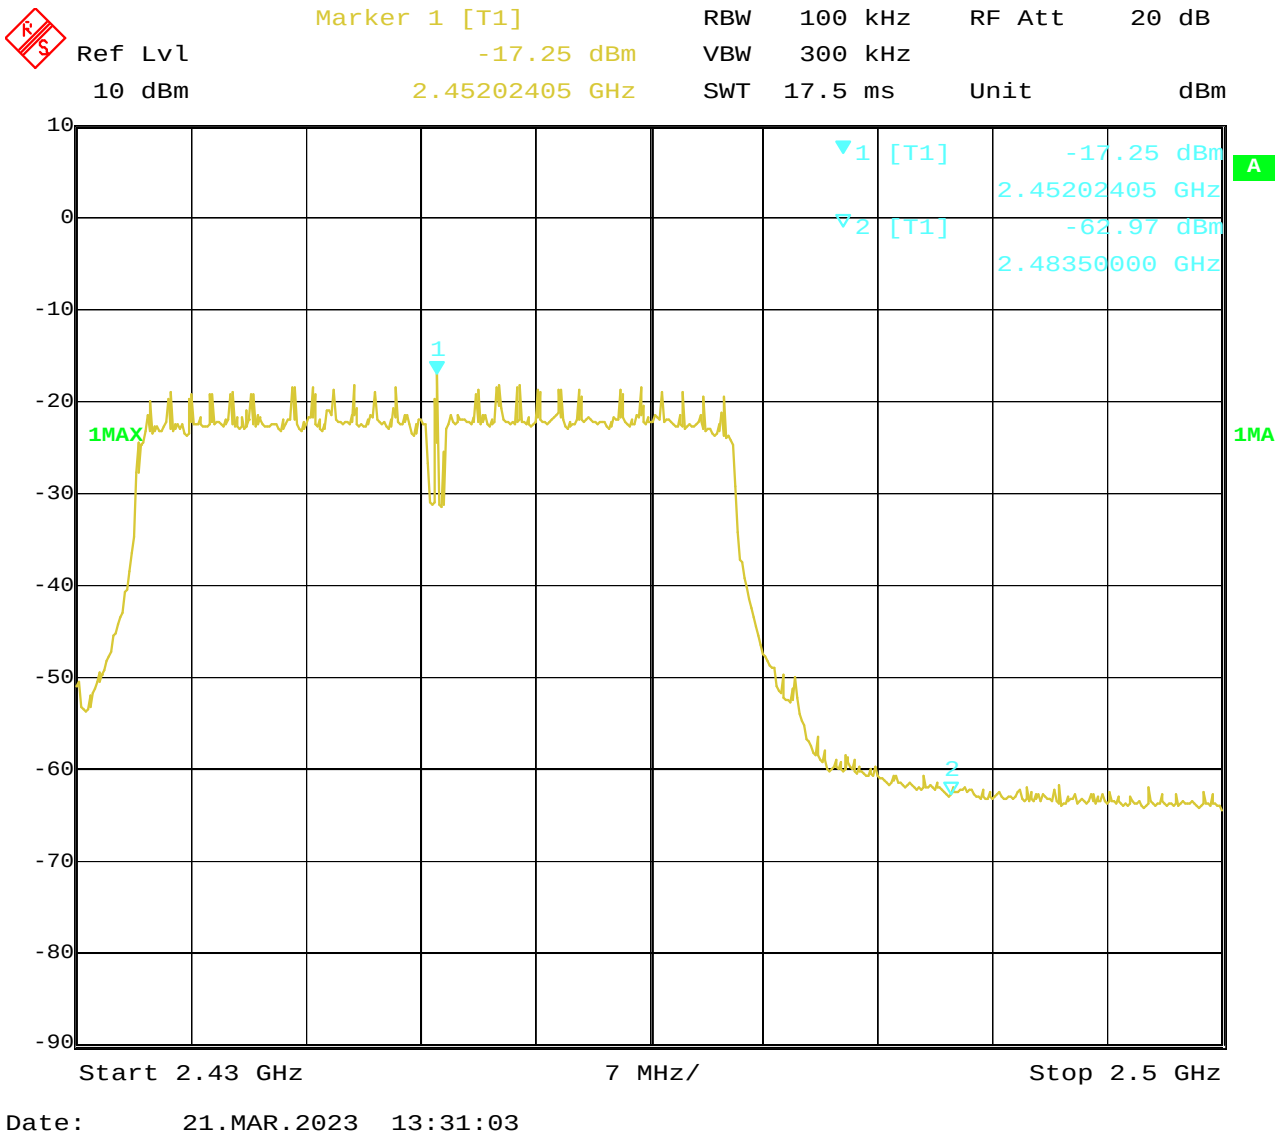

10.5 Restricted band Measurement

EUT	Smart Wi-Fi Camera		Model	S43
Mode	Keeping Transmitting		Test Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
802.11b mode, Low Channel, Horizontal				
2390	PK (dBμV/m)	38.85	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)
802.11b mode, Low Channel, Vertical				
2390	PK (dBμV/m)	40.34	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

10.5 Restricted band Measurement

EUT	Smart Wi-Fi Camera		Model	S43
Mode	Keeping Transmitting		Test Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
802.11b mode, High Channel, Horizontal				
2483.5	PK (dBμV/m)	39.68	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)
802.11b mode, High Channel, Vertical				
2483.5	PK (dBμV/m)	37.34	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

10.5 Restricted band Measurement

EUT	Smart Wi-Fi Camera		Model	S43
Mode	Keeping Transmitting		Test Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
802.11g mode, Low Channel, Horizontal				
2390	PK (dBμV/m)	49.68	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)
802.11g mode, Low Channel, Vertical				
2390	PK (dBμV/m)	41.47	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

10.5 Restricted band Measurement

EUT	Smart Wi-Fi Camera		Model	S43
Mode	Keeping Transmitting		Test Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
802.11g mode, High Channel, Horizontal				
2483.5	PK (dBμV/m)	38.35	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)
802.11g mode, High Channel, Vertical				
2483.5	PK (dBμV/m)	37.51	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

10.5 Restricted band Measurement

EUT	Smart Wi-Fi Camera		Model	S43
Mode	Keeping Transmitting		Test Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
802.11n HT20 mode, Low Channel, Horizontal				
2390	PK (dBμV/m)	39.01	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)
802.11n HT20 mode, Low Channel, Vertical				
2390	PK (dBμV/m)	42.86	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

10.5 Restricted band Measurement

EUT	Smart Wi-Fi Camera		Model	S43
Mode	Keeping Transmitting		Test Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
802.11n HT20 mode, High Channel, Horizontal				
2483.5	PK (dBμV/m)	40.23	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)
802.11n HT20 mode, High Channel, Vertical				
2483.5	PK (dBμV/m)	38.13	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

10.5 Restricted band Measurement

EUT	Smart Wi-Fi Camera		Model	S43
Mode	Keeping Transmitting		Test Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
802.11n HT40 mode, Low Channel, Horizontal				
2390	PK (dBμV/m)	39.50	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)
802.11n HT40 mode, Low Channel Vertical				
2390	PK (dBμV/m)	44.39	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Plots

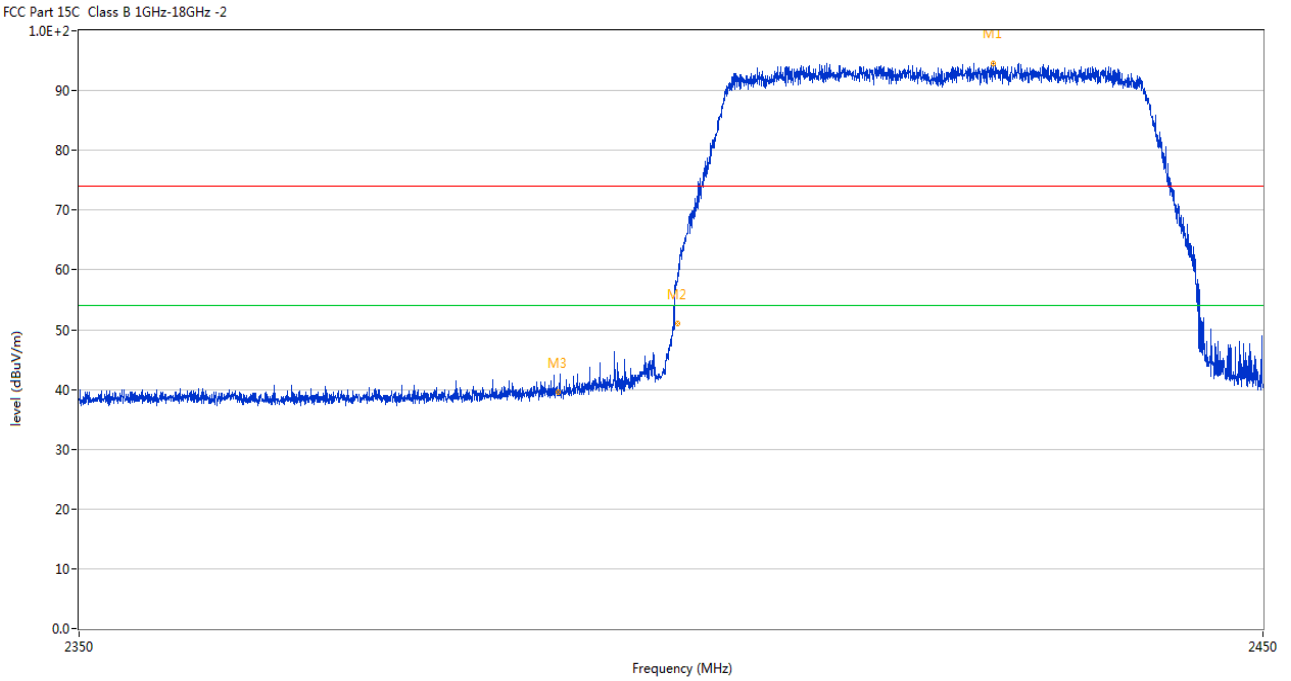

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
3	2390.000	39.50	-3.53	74.0	-34.50	Peak	156.40	100	Horizontal	Pass

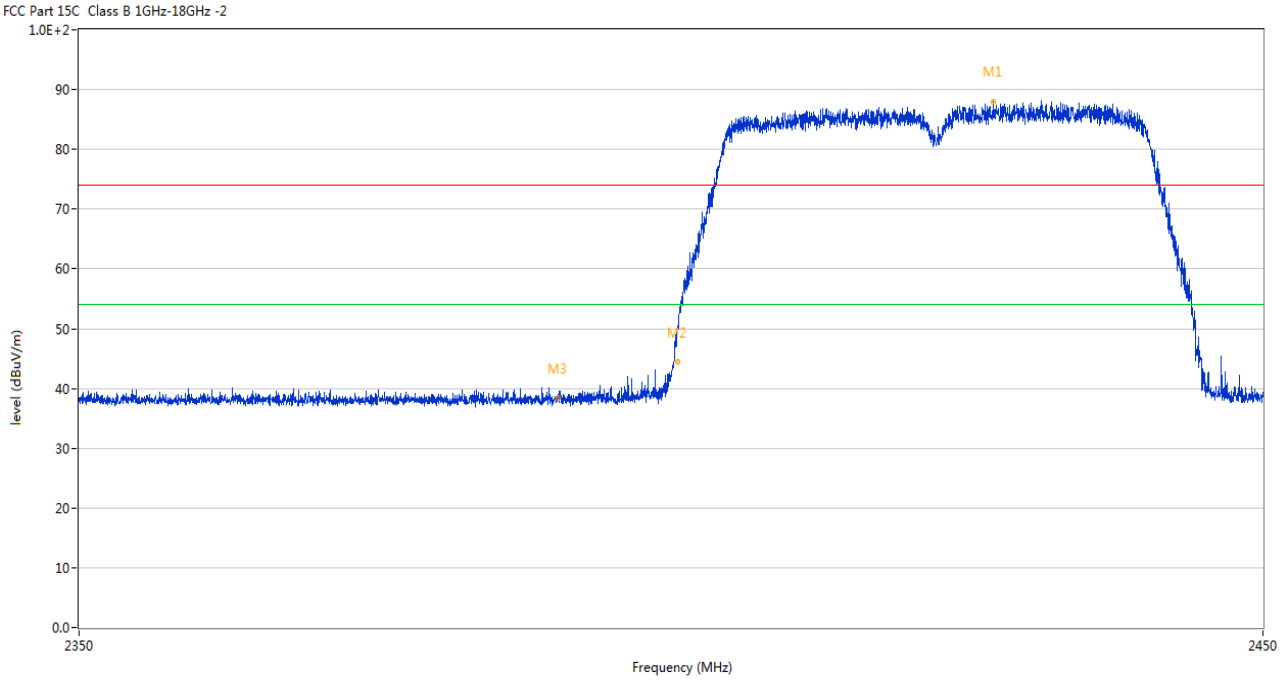

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
3	2390.000	38.42	-3.53	74.0	-35.58	Peak	236.60	100	Vertical	Pass

10.5 Restricted band Measurement

EUT	Smart Wi-Fi Camera		Model	S43
Mode	Keeping Transmitting		Test Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
802.11n HT40 mode, High Channel, Horizontal				
2483.5	PK (dBμV/m)	40.59	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)
802.11n HT40 mode, High Channel, Vertical				
2483.5	PK (dBμV/m)	37.77	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

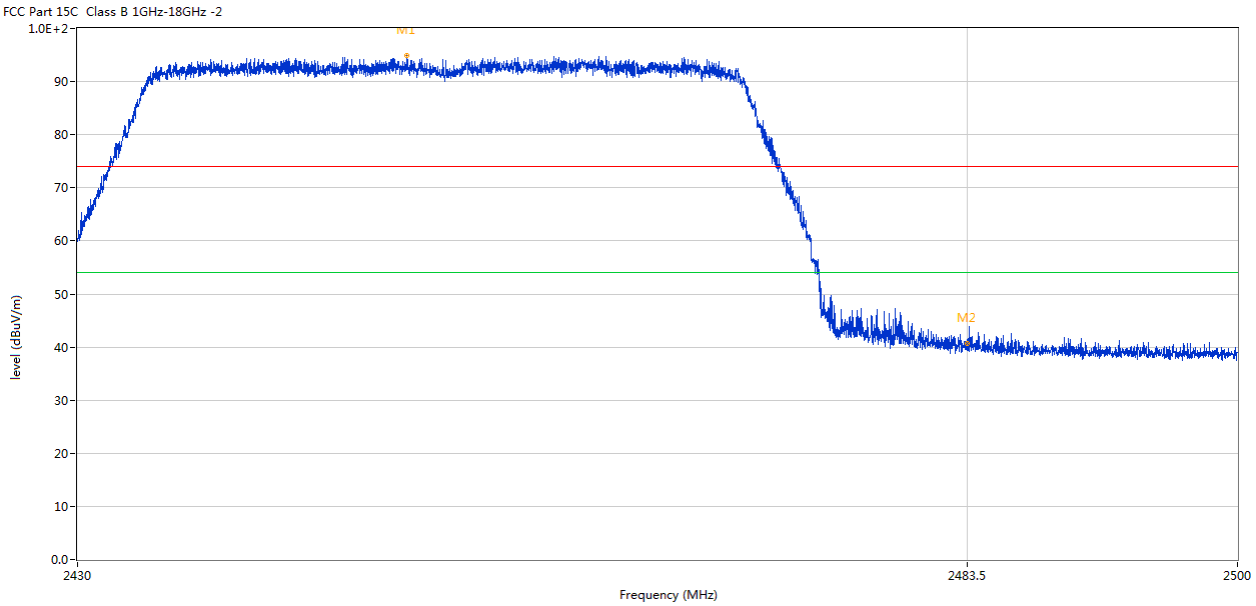

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
2	2483.500	40.59	-3.57	74.0	-33.41	Peak	245.44	100	Horizontal	Pass

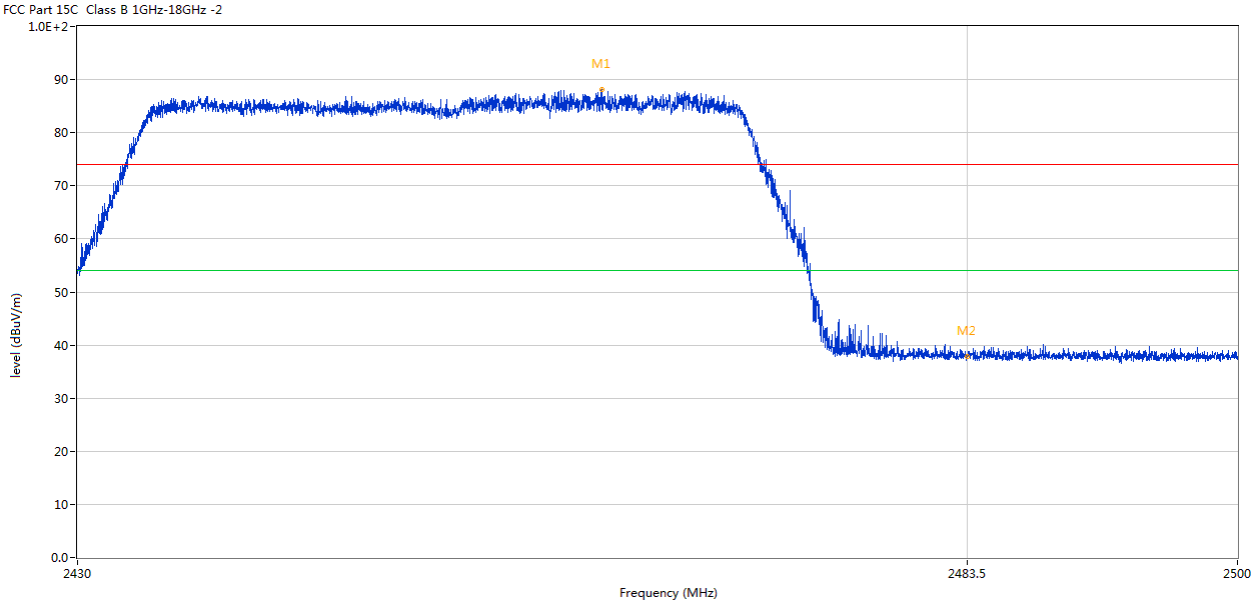

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
2	2483.500	37.77	-3.57	74.0	-36.23	Peak	159.56	100	Vertical	Pass

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna with gain 3.0dBi Max (Get from the antenna specification)

12.0 FCC ID Label

FCC ID: 2AZHU-S43

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

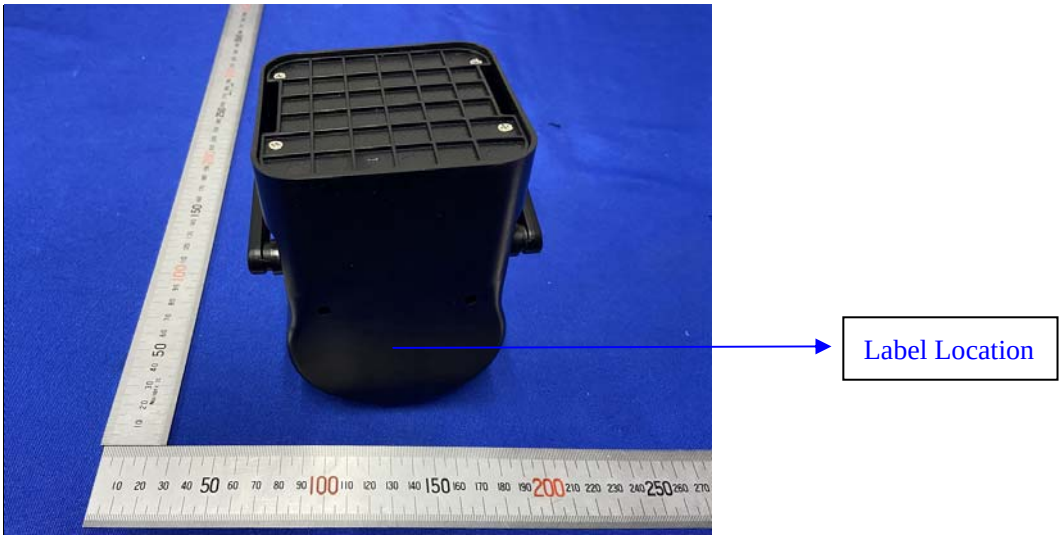

13.0 Photo of testing

Conducted Emission Test Setup:

Radiated Emission Test Setup:

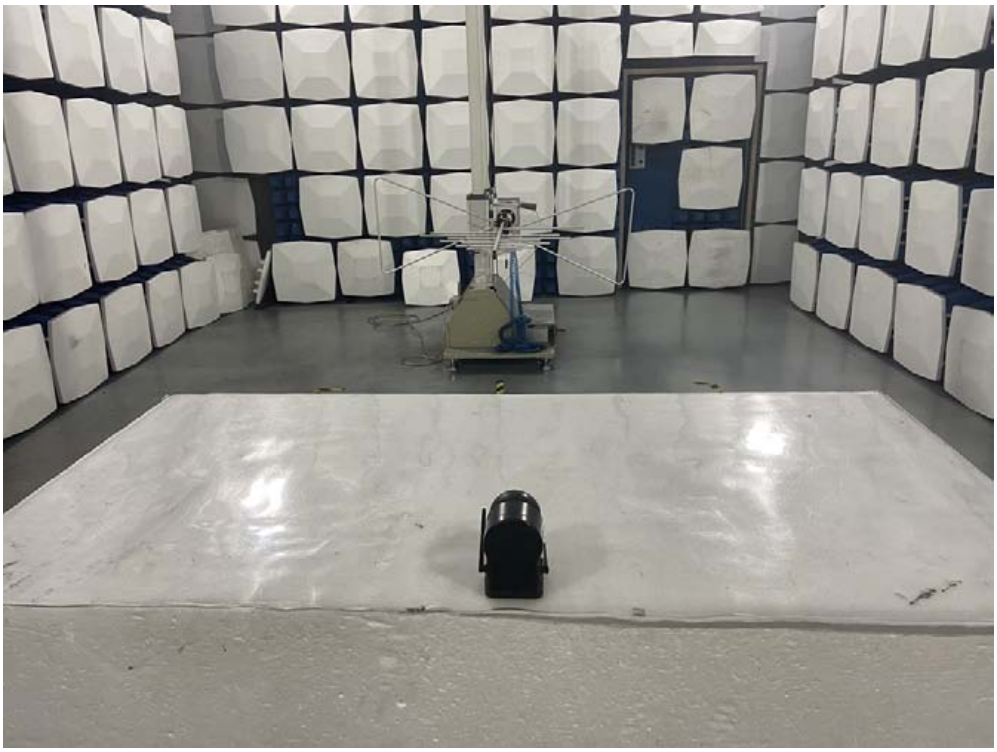

Outside View

Outside View

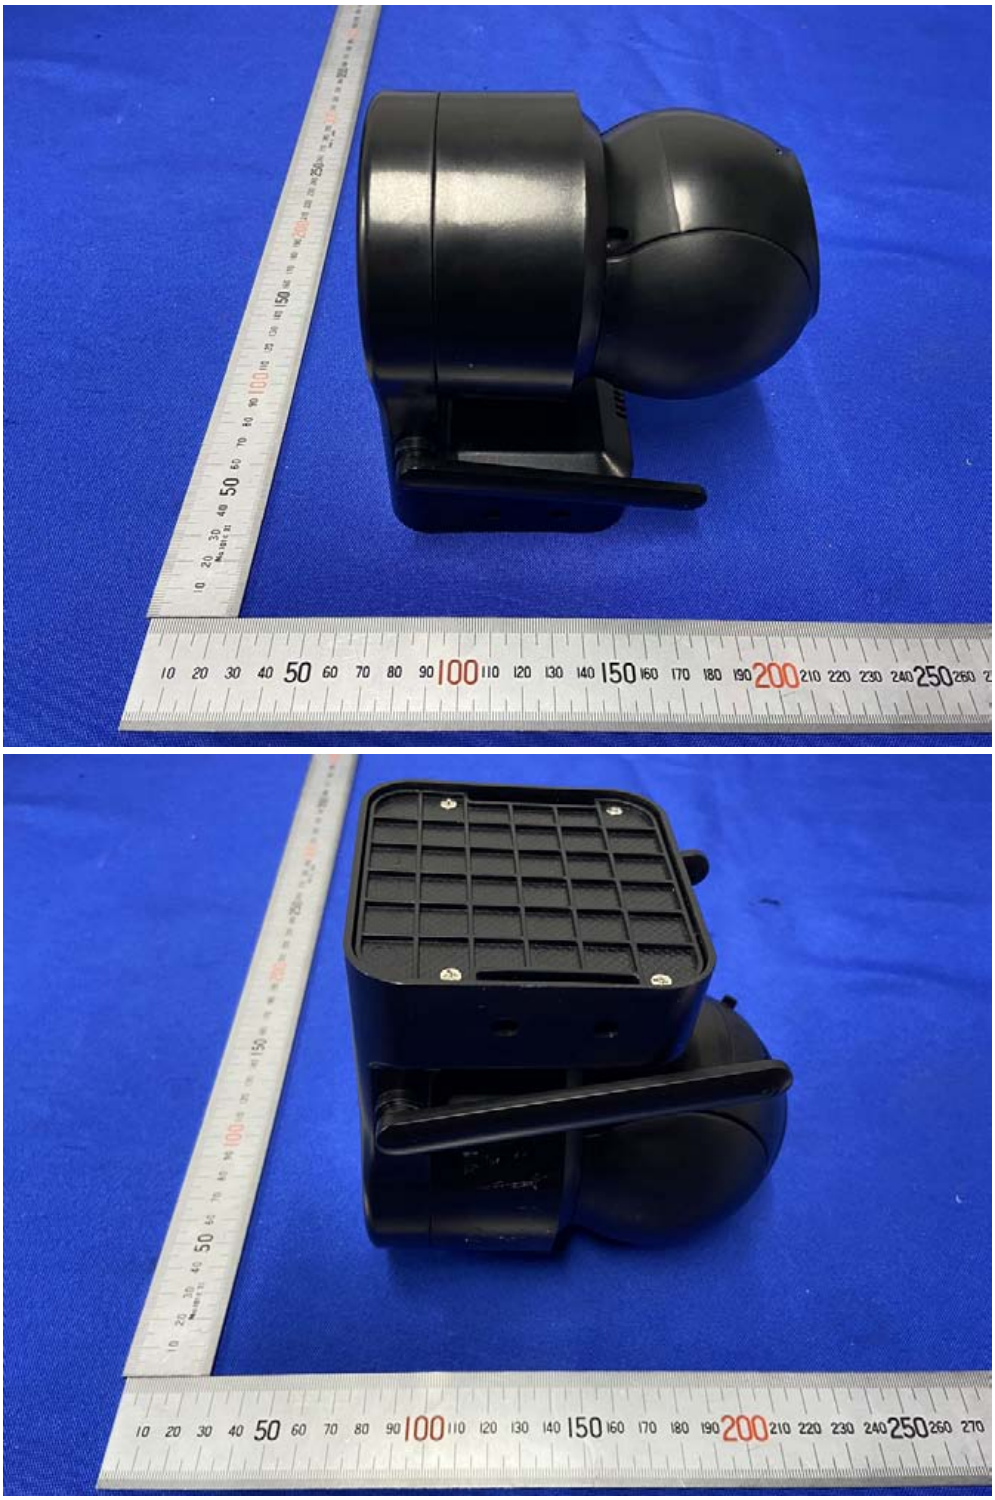

Outside View

Inside view

Inside view

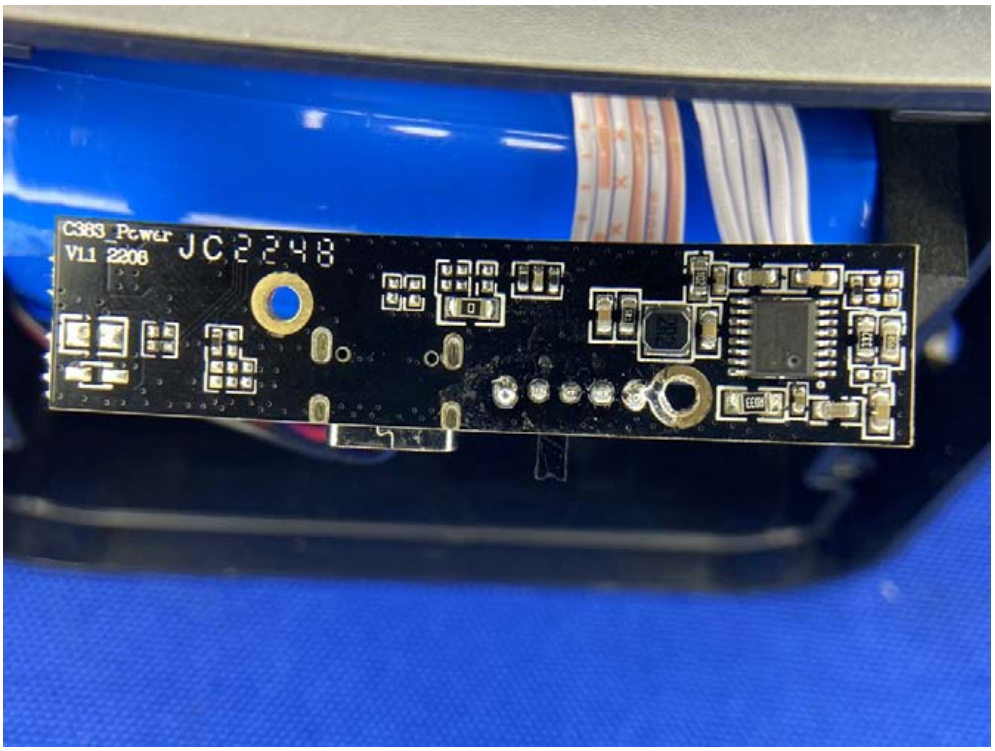

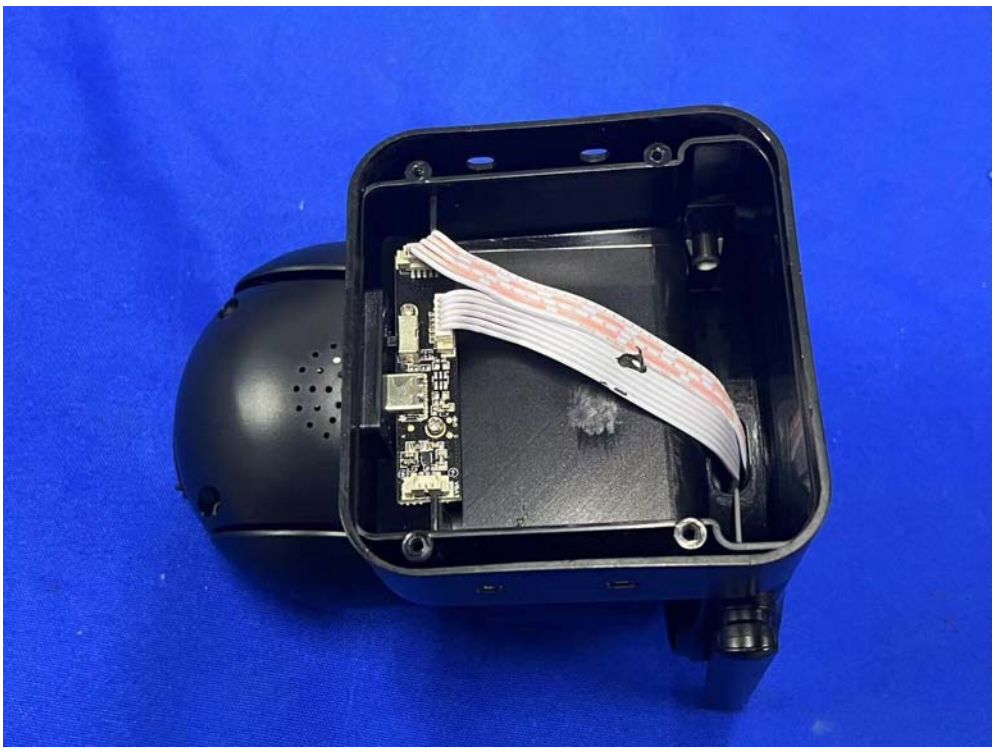

Inside view

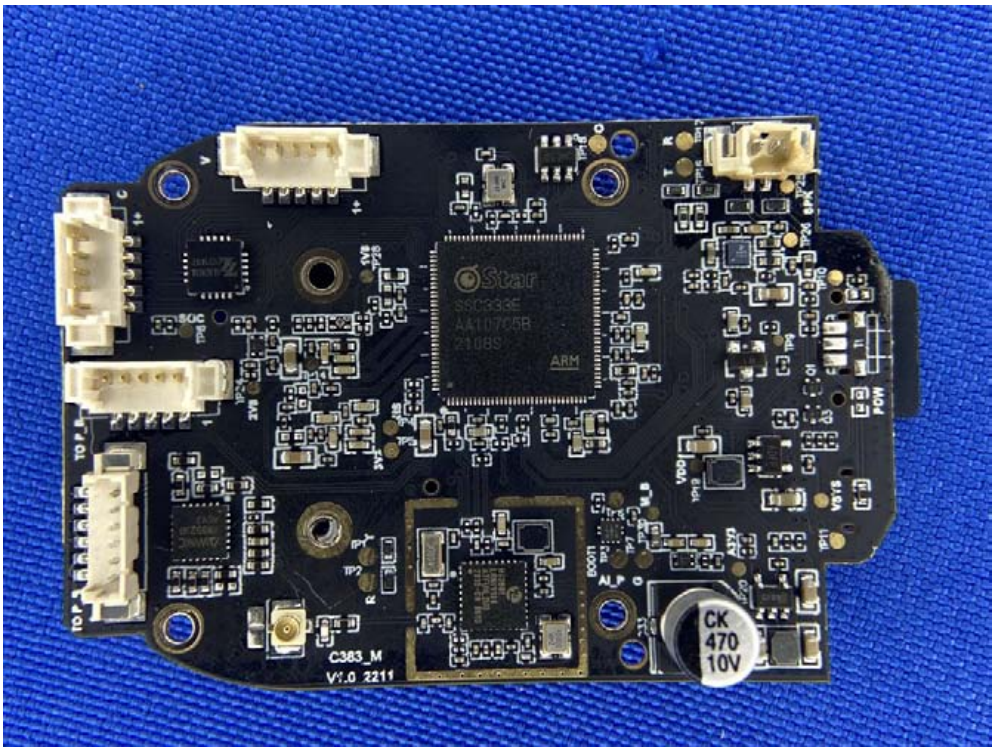

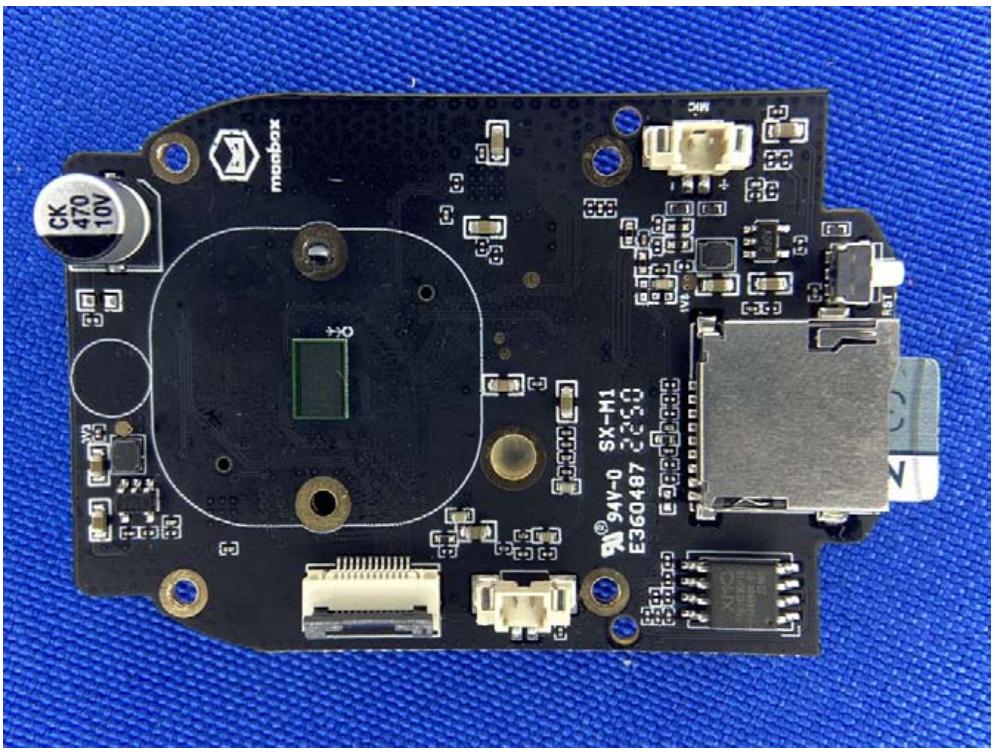

Inside view

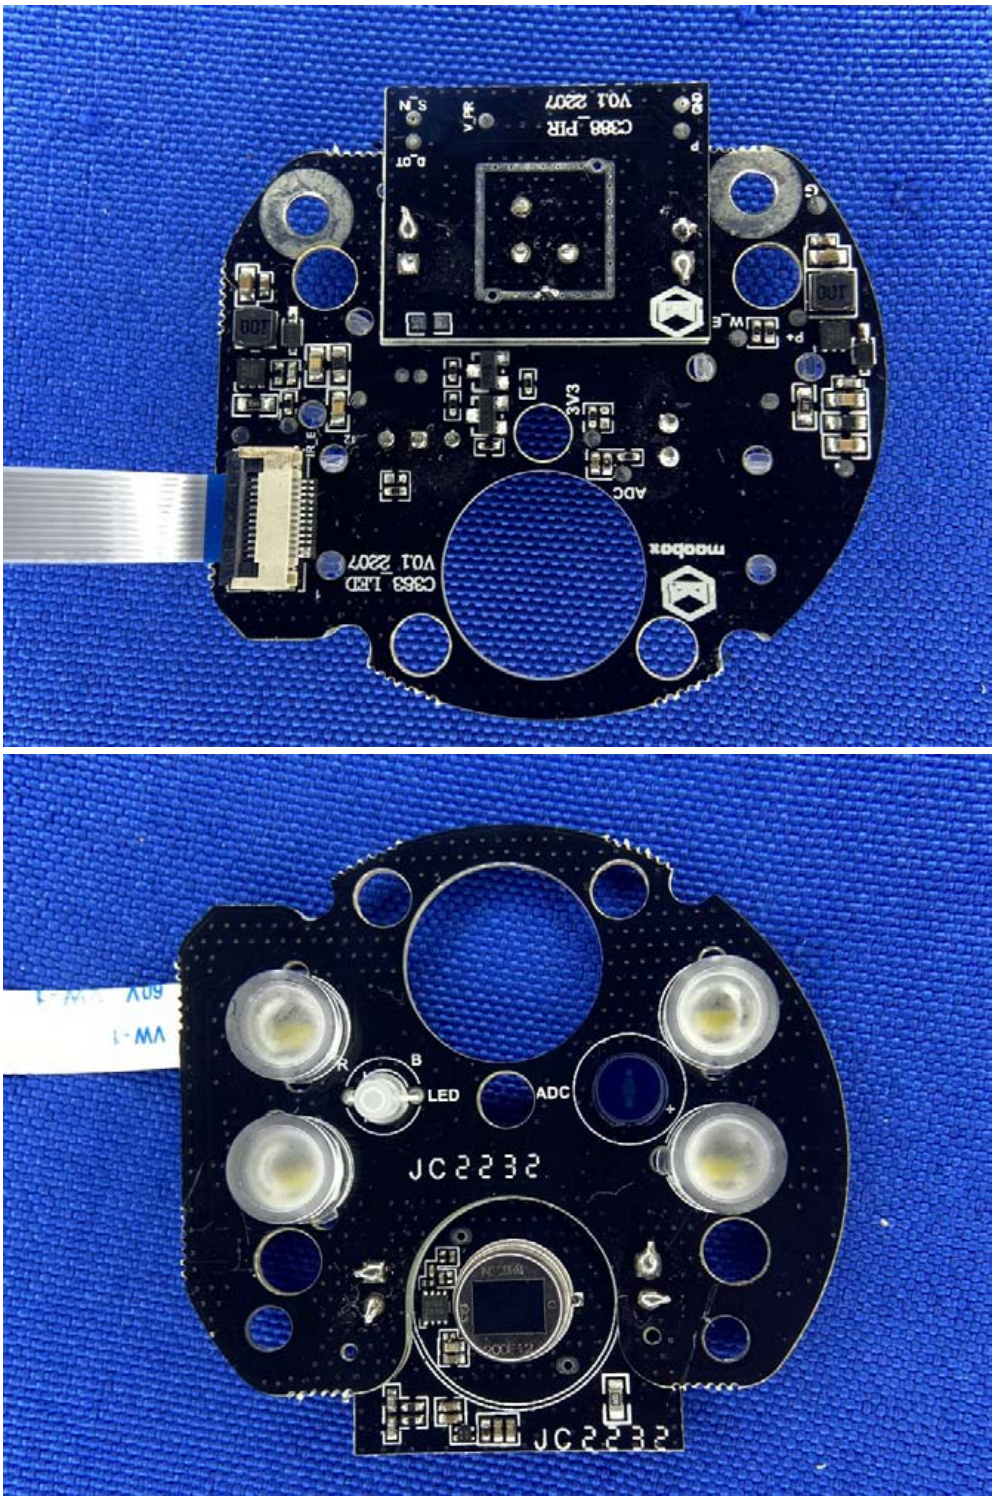

Inside view

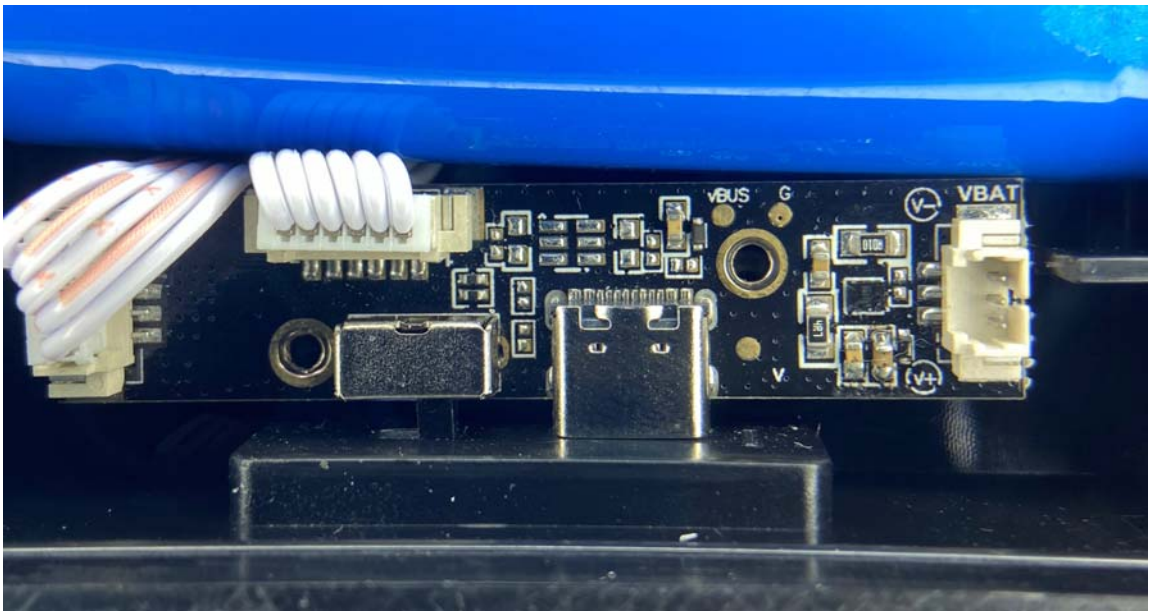

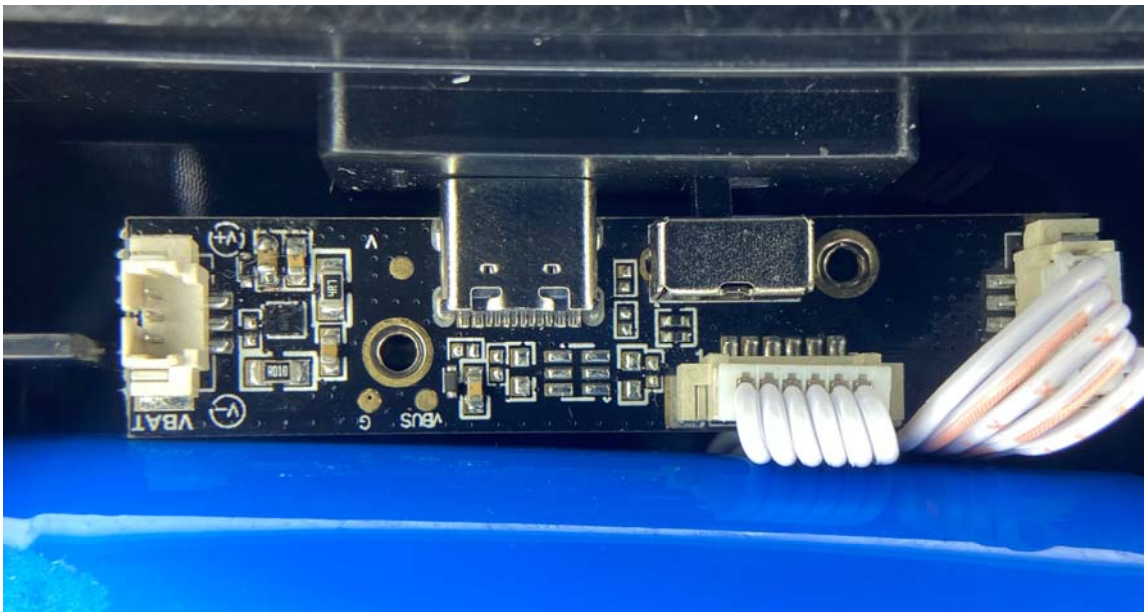

Inside view

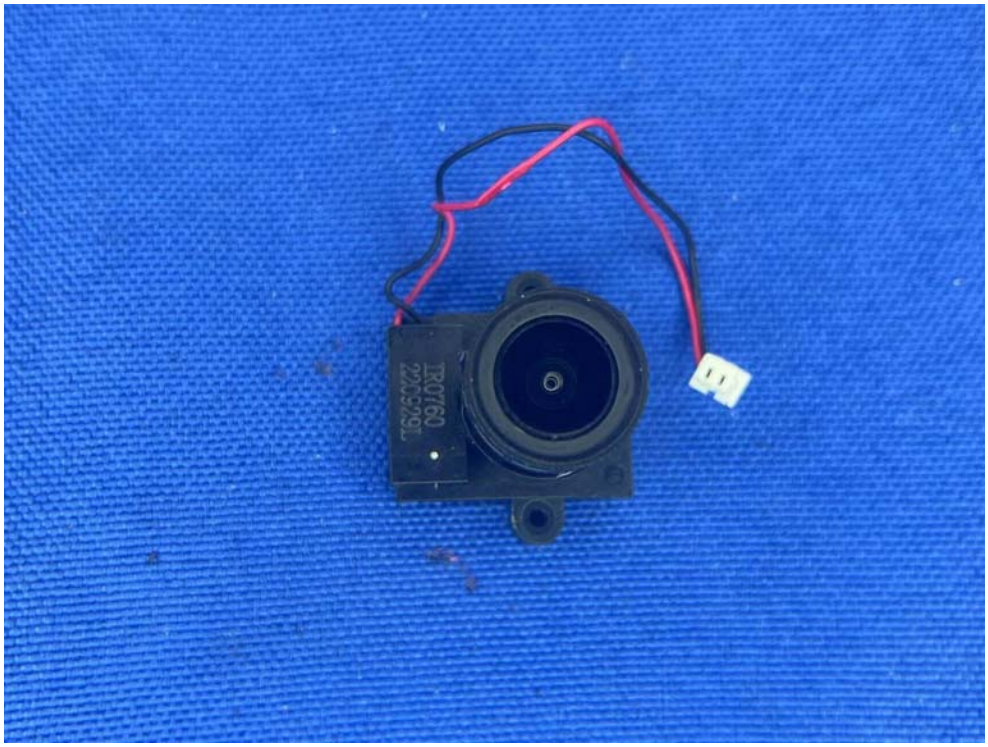

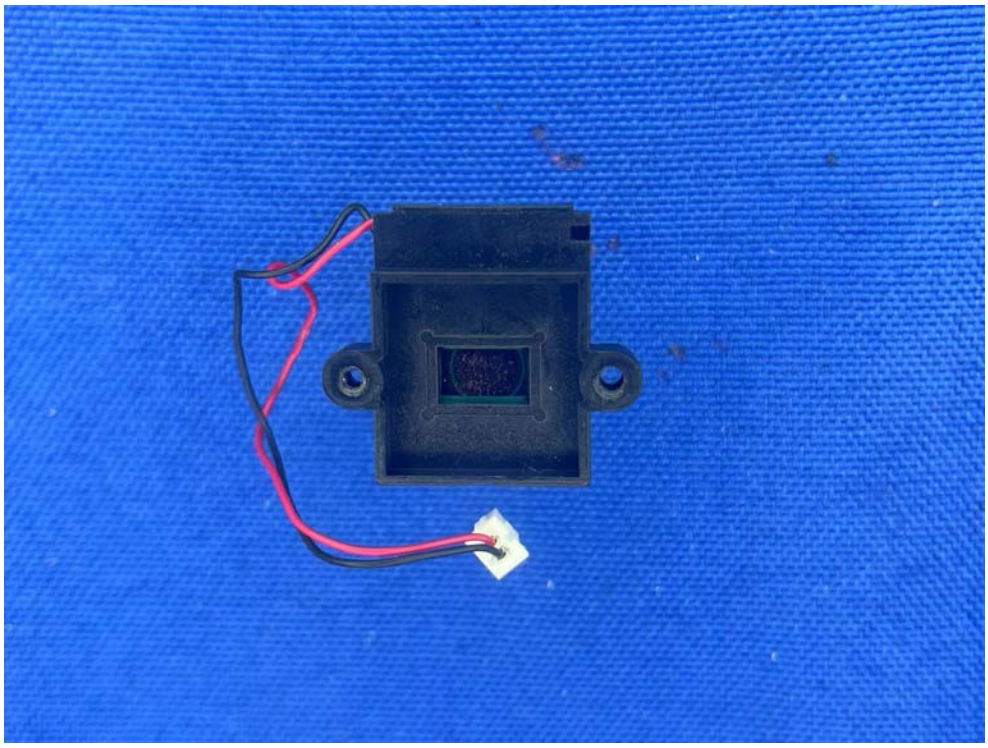

Inside view

Inside view

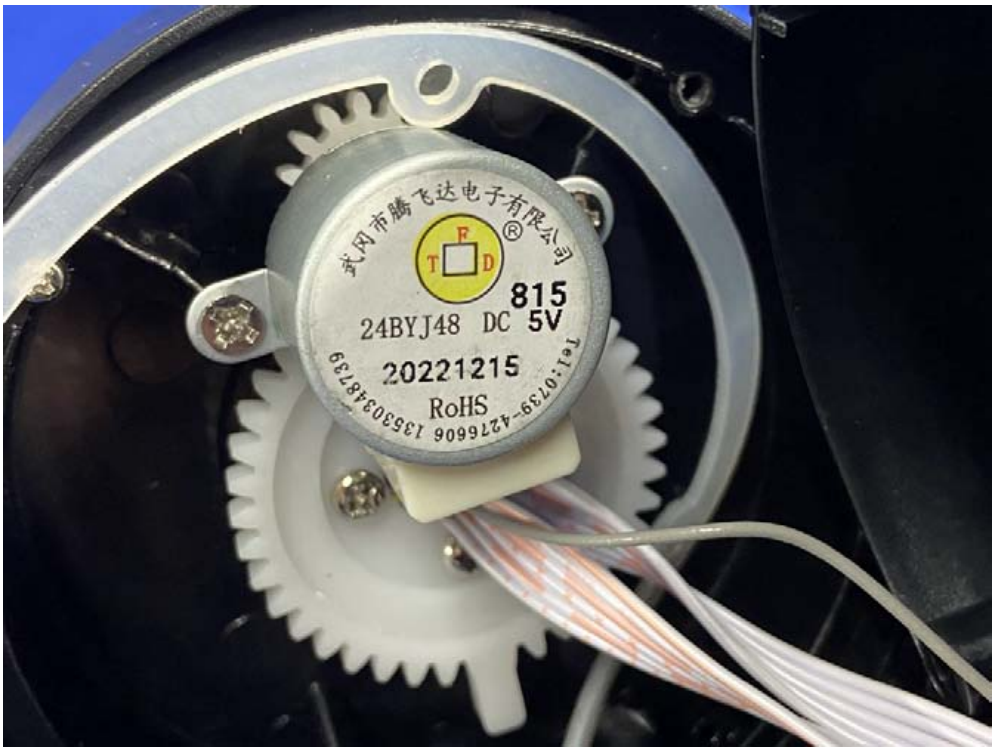

-End of the report-