



RADIO TEST REPORT


Test Report No. : 12562011S-A

Applicant : CASIO COMPUTER CO., LTD.
Type of Equipment : Watch
Model No. : GG-B100
FCC ID : BBQS0IW
Test regulation : FCC Part 15 Subpart C: 2018
Test Result : Complied (Refer to Section 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in Section 1.

Date of test: November 29 to December 14, 2018

Representative test engineer:


Kazuya Noda
Engineer
Consumer Technology Division

Approved by:


Akio Hayashi
Leader
Consumer Technology Division



- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated Spurious Emission	9
SECTION 6: Antenna Terminal Conducted Tests.....	11
APPENDIX 1: Test data	12
6 dB Bandwidth and 99 % Occupied Bandwidth.....	12
Maximum Peak Output Power	14
Average Output Power	14
Duty Factor Calculation sheet.....	15
Radiated Spurious Emission	16
Conducted Spurious Emission	22
Power Density	25
APPENDIX 2: Test instruments	27
APPENDIX 3: Photographs of test setup	29
Radiated Spurious Emission	29
Pre-check of Worst Case Position.....	30

SECTION 1: Customer information

Company Name	:	CASIO COMPUTER CO., LTD.
Address	:	2-1, Sakaecho 3 chome, Hamura-shi, Tokyo 205-8555 Japan
Telephone Number	:	+81-42-579-7282
Facsimile Number	:	+81-42-579-7702
Contact Person	:	Hiroaki Suzuki

The information provided from the customer is as follows:

- Applicant, Type of Equipment, Model No. on the cover page and other relevant pages
- Section 1: Customer information
- Section 2: Equipment under test (E.U.T.)
- Section 4: Operation of E.U.T. during testing

* The laboratory is exempted from liability of any test results affected from the information in Section 2 and 4.

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Watch
Model No.	:	GG-B100
Serial No.	:	Refer to Section 4, Clause 4.2
Rating	:	GG-B100 (Watch): Typical DC 3.0 V CW5594 (Module): Normal: DC 3.0 V, Min.: DC 1.9 V, Max.: DC 3.3 V
Receipt Date of Sample (Information from test lab.)	:	November 27, 2018
Country of Mass-production	:	China, Thailand, Japan
Condition of EUT	:	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab.

2.2 Product Description

Model: GG-B100 (referred to as the EUT in this report) is a Watch.

* GG-B100 has alternative name as R020.

Radio Specification

Radio Type	:	Transceiver
Frequency of Operation	:	2402 MHz - 2480 MHz
Modulation	:	GFSK
Channel spacing	:	2 MHz
Antenna type	:	Chip (Monopole)
Antenna Gain	:	2.5 dBi
Operating Temperature	:	-10 deg.C to +60 deg.C
Clock frequency (Maximum)	:	26 MHz

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on March 12, 2018 and effective April 11, 2018

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods	FCC: Section 15.207		N/A	*1)
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8			
6 dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05	FCC: Section 15.247(a)(2)	See data.	Complied a)	Conducted
	IC: -	IC: RSS-247 5.2(a)			
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05	FCC: Section 15.247(b)(3)		Complied b)	Conducted
	IC: RSS-Gen 6.12	IC: RSS-247 5.4(d)			
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05	FCC: Section 15.247(e)		Complied c)	Conducted
	IC: -	IC: RSS-247 5.2(b)			
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05	FCC: Section 15.247(d)	9.8 dB 2483.500 MHz, AV, Horizontal, Tx 2480 MHz	Complied d) e)	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2)
	IC: RSS-Gen 6.13	IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT has no AC mains.

*2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05 8.5 and 8.6.

a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)

b) Refer to APPENDIX 1 (data of Maximum Peak Output Power)

c) Refer to APPENDIX 1 (data of Power Density)

d) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

e) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the wireless transmitter regardless of input voltage.

Instead of a new battery, DC power supply was used for the test. That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Bandwidth	IC: RSS-Gen 6.7	IC: -	N/A	Complied a)	Conducted

*a) Refer to Appendix 1 (data of Antenna port conducted test)

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Shonan EMC Lab.

Item	Frequency range	Uncertainty (+/-)				
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4 SAC / SR	No. 5,6,8 SR
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	2.9 dB	2.8 dB	2.9 dB	2.9 dB	2.9 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.0 dB	3.0 dB	3.1 dB	-	-
	30 MHz-200 MHz	4.6 dB	4.6 dB	4.7 dB	-	-
	200 MHz-1 GHz	6.0 dB	6.0 dB	6.1 dB	-	-
	1 GHz-6 GHz	4.8 dB	4.8 dB	4.8 dB	-	-
	6 GHz-18 GHz	5.4 dB	5.4 dB	5.4 dB	-	-
	18 GHz-40 GHz	5.6 dB	5.6 dB	5.6 dB	-	-
Radiated emission (Measurement distance: 1 m)	1 GHz-18 GHz	5.7 dB	5.7 dB	5.7 dB	-	-
	18 GHz-40 GHz	5.9 dB	5.9 dB	5.9 dB	-	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	0.48 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	0.66 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	0.47 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	0.64 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	0.90 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.04 dB
Spurious emission (Conducted) below 1GHz	1.8 dB
Spurious emission (Conducted) 1 GHz-3 GHz	1.7 dB
Spurious emission (Conducted) 3 GHz-18 GHz	2.5 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.5 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.7 dB
Bandwidth Measurement	1.01 %
Duty cycle and Time Measurement	0.012 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.
1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN
Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401
JAB Accreditation No. RTL02610
FCC Test Firm Registration Number: 839876

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test data, Test instruments, and Test set up


Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Mode	Frequency	Remarks*
Transmitting (Tx), Bluetooth Low Energy (BT LE)	2402 MHz, 2440 MHz, 2480 MHz	PRBS9
*Power of the EUT was set by the software as follows; - Power Setting: Fixed - Software: BLE RF Test Version 9.9 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.		

4.2 Configuration and peripherals

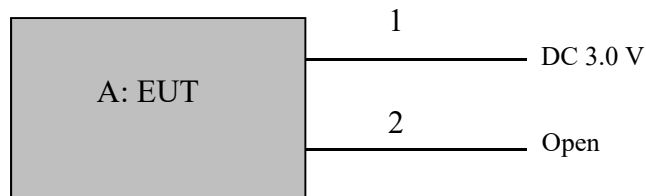

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Watch	GG-B100	52 *1) 54 *2)	CASIO COMPUTER CO., LTD.	EUT

*1) Used for Antenna Terminal conducted test

*2) Used for Radiated Emission test

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	0.1 + 1.5	Unshielded	Unshielded	*3)
2	Signal Cable	0.1	Unshielded	Unshielded	*4)

*3) Cable for test operation

*4) Cable for system reset during the development, not used for the product

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	<u>11.12.2.5.2</u> RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (Linear voltage) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on ANSI C63.10-2013.


Figure 2: Test Setup

Below 1 GHz

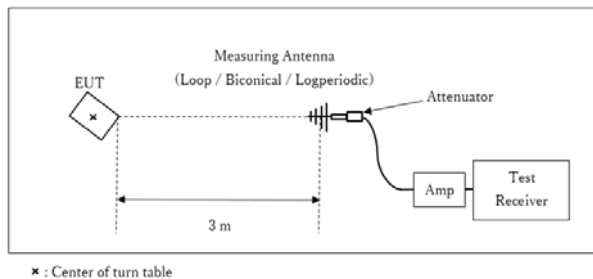

Test Distance: 3 m

1 GHz – 13 GHz

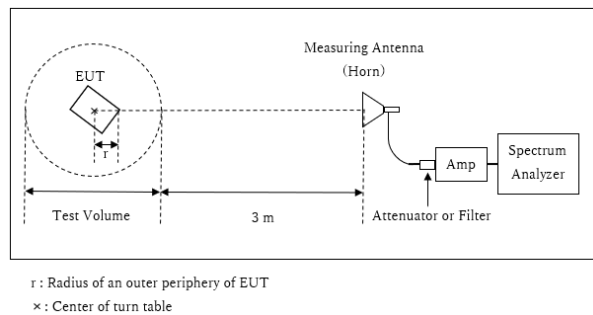

Distance Factor: $20 \times \log (3.98 \text{ m} / 3.0 \text{ m}) = 2.46 \text{ dB}$


* Test Distance: $(3 + \text{Test Volume} / 2) - r = 3.98 \text{ m}$

Test Volume : 2.0 m

(Test Volume has been calibrated based on CISPR 16-1-4.)

r = 0.02 m

13 GHz - 26.5 GHz

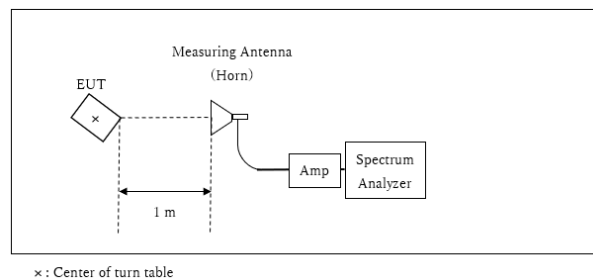

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$

*Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Antenna polarization	Carrier	Spurious (Below 1 GHz)	Spurious (1 GHz -13 GHz)	Spurious (13 GHz -26.5 GHz)
Horizontal	Y	X	Y	X
Vertical	X	X	X	X

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz

Test data : APPENDIX

Test result : Pass

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6 dB Bandwidth	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/ Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6 dB Bandwidth	3 kHz	9.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
*1) Peak hold was applied as Worst-case measurement. *2) Reference data *3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013". *4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)							

The test results and limit are rounded off to two decimals place, so some differences might be observed.
 The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX
Test result : Pass


APPENDIX 1: Test data

6 dB Bandwidth and 99 % Occupied Bandwidth

Report No. 12562011S-A
Test place Shonan EMC Lab. No.2 Shielded Room
Date December 2, 2018
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Kazuya Noda
Mode Tx

Mode	Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6 dB Bandwidth [MHz]
BT LE	2402	1470.6	0.858	> 0.5000
	2440	1170.8	0.732	> 0.5000
	2480	1185.3	0.741	> 0.5000

BT LE

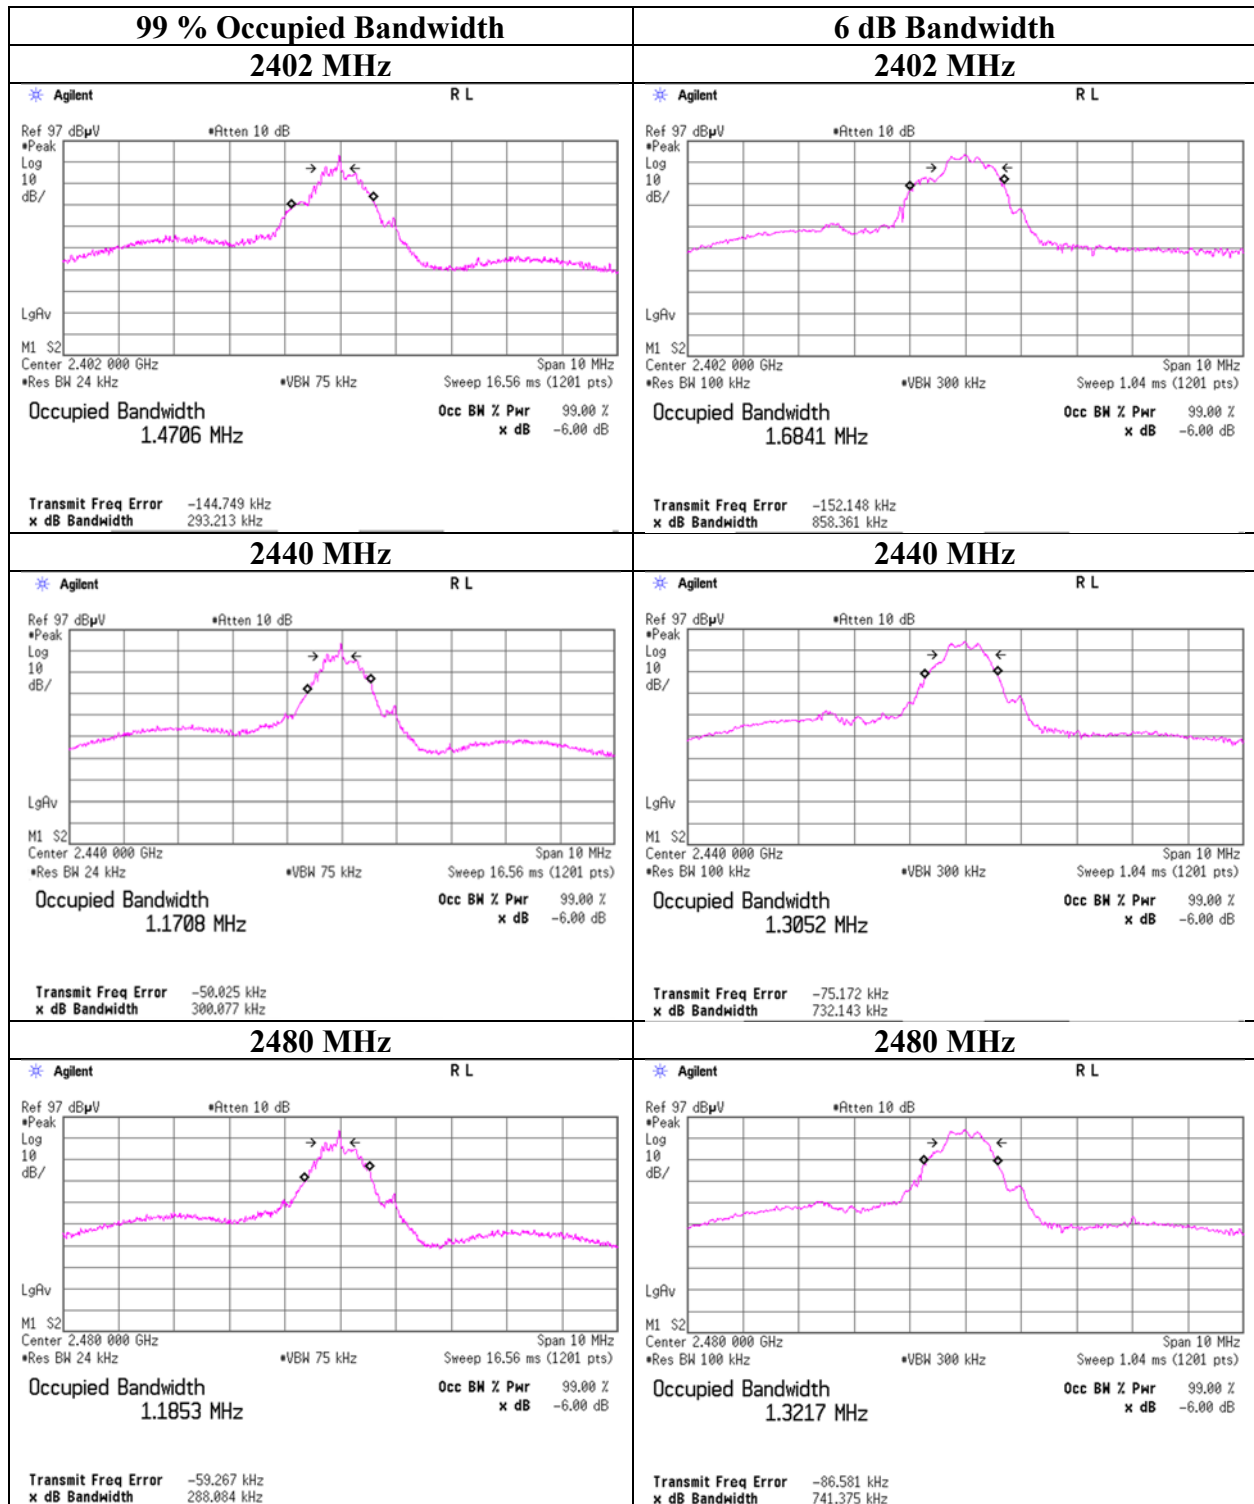

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Maximum Peak Output Power

Report No. 12562011S-A
Test place Shonan EMC Lab. No.5 Shielded Room
Date December 7, 2018
Temperature / Humidity 25 deg. C / 47 % RH
Engineer Kenichi Adachi
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2402	-14.72	1.92	9.82	-2.98	0.50	30.00	1000	32.98	2.50	-0.48	0.90	36.02	4000	36.50
2440	-14.29	1.94	9.82	-2.53	0.56	30.00	1000	32.53	2.50	-0.03	0.99	36.02	4000	36.05
2480	-14.31	1.95	9.82	-2.54	0.56	30.00	1000	32.54	2.50	-0.04	0.99	36.02	4000	36.06

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

*The equipment and cables were not used for factor 0 dB of the data sheets.

Average Output Power (Reference data for RF Exposure / SAR testing)

Report No. 12562011S-A
Test place Shonan EMC Lab. No.5 Shielded Room
Date December 7, 2018
Temperature / Humidity 25 deg. C / 47 % RH
Engineer Kenichi Adachi
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-17.79	1.92	9.82	-6.05	0.25	0.85	-5.20	0.30
2440	-17.27	1.94	9.82	-5.51	0.28	0.85	-4.66	0.34
2480	-17.34	1.95	9.82	-5.57	0.28	0.85	-4.72	0.34

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.

Duty Factor Calculation sheet

Report No.	12562011S-A
Test place	Shonan EMC Lab. No.2 Shielded Room
Date	December 2, 2018
Temperature / Humidity	22 deg. C / 35 % RH
Engineer	Kazuya Noda
Mode	Tx

BT LE

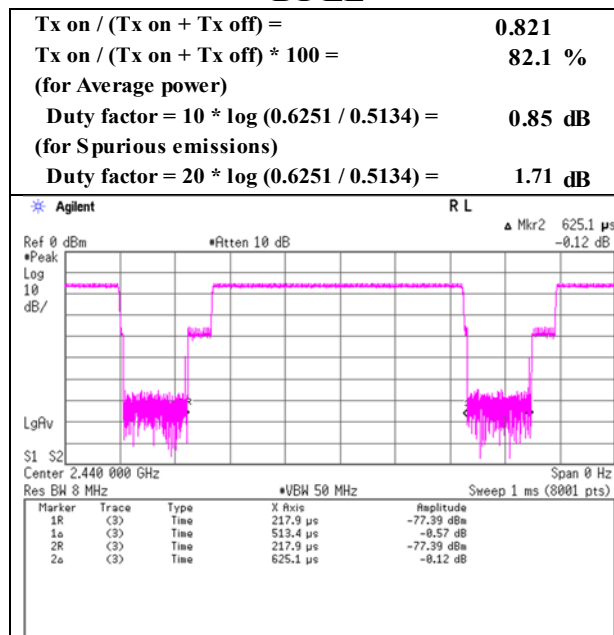

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Report No. 12562011S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber 2 2 2
Date December 2, 2018 December 14, 2018 November 29, 2018
Temperature / Humidity 22 deg. C / 43 % RH 24 deg. C / 31 % RH 21 deg. C / 43 % RH
Engineer Kazuya Noda Shiro Kobayashi Shiro Kobayashi
(30 MHz - 1 GHz, 18 GHz - 26.5 GHz) (1 GHz - 2.8 GHz) (2.8 GHz - 18 GHz)
Mode Tx BT LE, 2402 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	77.128	QP	22.89	6.32	7.84	31.89	0.00	5.16	40.00	34.8	118	2	
Hori.	194.505	QP	22.64	16.53	8.72	31.79	0.00	16.10	43.50	27.4	100	359	
Hori.	877.182	QP	22.24	21.91	9.01	31.01	0.00	22.15	46.00	23.8	100	4	
Hori.	946.714	QP	22.13	21.94	9.29	30.58	0.00	22.78	46.00	23.2	100	1	
Hori.	2390.000	PK	46.34	27.91	14.07	39.46	2.46	51.32	73.90	22.5	115	298	
Hori.	4804.000	PK	50.00	31.31	6.53	39.50	2.46	50.80	73.90	23.1	125	353	
Hori.	7206.000	PK	45.43	36.77	7.58	39.29	2.46	52.95	73.90	20.9	150	0	Floor Noise
Hori.	7206.000	AV	35.99	36.77	7.58	39.29	2.46	43.51	53.90	10.3	150	0	Floor Noise
Vert.	45.283	QP	23.17	12.88	7.10	31.91	0.00	11.24	40.00	28.7	100	215	
Vert.	71.857	QP	27.52	6.38	7.39	31.90	0.00	9.39	40.00	30.6	100	177	
Vert.	167.795	QP	22.62	15.53	8.70	31.81	0.00	15.04	43.50	28.4	100	15	
Vert.	702.925	QP	21.58	19.84	8.28	31.59	0.00	18.11	46.00	27.8	100	357	
Vert.	2390.000	PK	46.50	27.91	14.07	39.46	2.46	51.48	73.90	22.4	115	11	
Vert.	4804.000	PK	49.41	31.31	6.53	39.50	2.46	50.21	73.90	23.6	109	357	
Vert.	7206.000	PK	45.60	36.77	7.58	39.29	2.46	53.12	73.90	20.7	150	0	Floor Noise
Vert.	7206.000	AV	35.97	36.77	7.58	39.29	2.46	43.49	53.90	10.4	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.98\text{ m} / 3.0\text{ m}) = 2.46\text{ dB}$

13 GHz - 26.5 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	35.13	27.91	14.07	39.46	1.71	2.46	41.82	53.90	12.0	*1)
Hori.	4804.000	AV	40.33	31.31	6.53	39.50	1.71	2.46	42.84	53.90	11.0	
Vert.	2390.000	AV	35.53	27.91	14.07	39.46	1.71	2.46	42.22	53.90	11.6	*1)
Vert.	4804.000	AV	39.73	31.31	6.53	39.50	1.71	2.46	42.24	53.90	11.6	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.98\text{ m} / 3.0\text{ m}) = 2.46\text{ dB}$

13 GHz - 26.5 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Duty factor Calculation chart" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	72.57	27.90	14.08	39.46	2.46	77.55	-	-	Carreir
Hori.	2399.717	PK	41.88	27.91	14.08	39.46	2.46	46.87	57.55	10.6	
Hori.	2400.000	PK	39.94	27.91	14.08	39.46	2.46	44.93	57.55	12.6	
Vert.	2402.000	PK	70.83	27.90	14.08	39.46	2.46	75.81	-	-	Carreir
Vert.	2398.853	PK	40.05	27.91	14.08	39.46	2.46	45.04	55.81	10.7	
Vert.	2400.000	PK	40.30	27.91	14.08	39.46	2.46	45.29	55.81	10.5	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.98\text{ m} / 3.0\text{ m}) = 2.46\text{ dB}$

13 GHz - 26.5 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12562011S-A
Test place	Shonan EMC Lab.
Semi Anechoic Chamber	2
Date	December 14, 2018
Temperature / Humidity	24 deg. C / 31 % RH
Engineer	Shiro Kobayashi
	(1 GHz – 2.8 GHz)
Mode	Tx BT LE, 2402 MHz

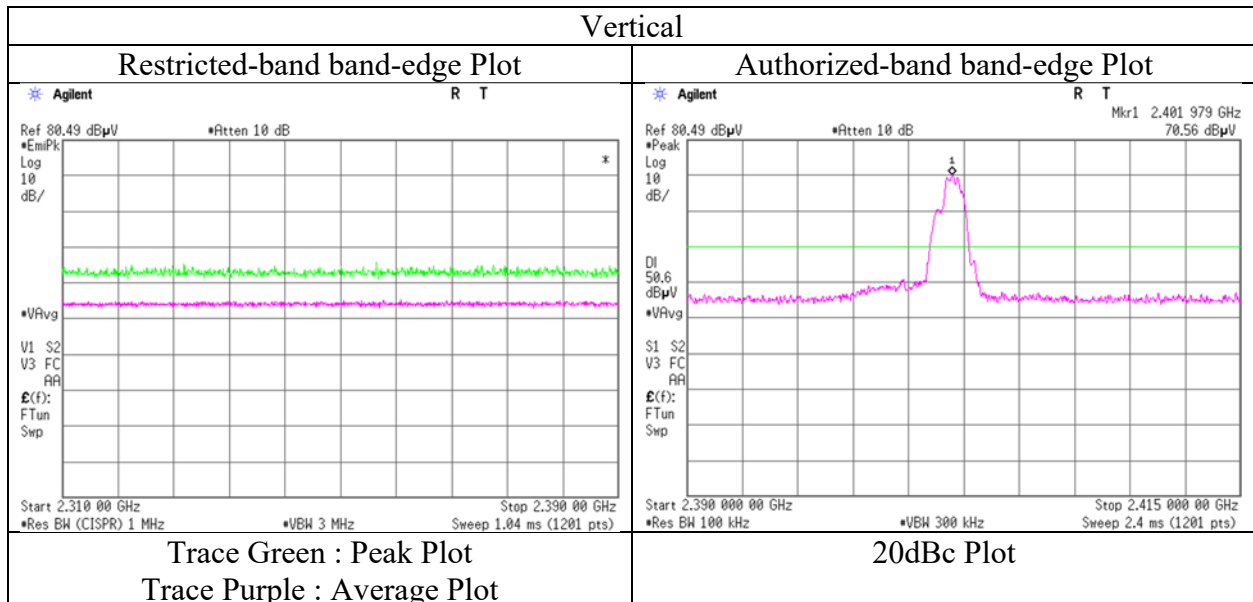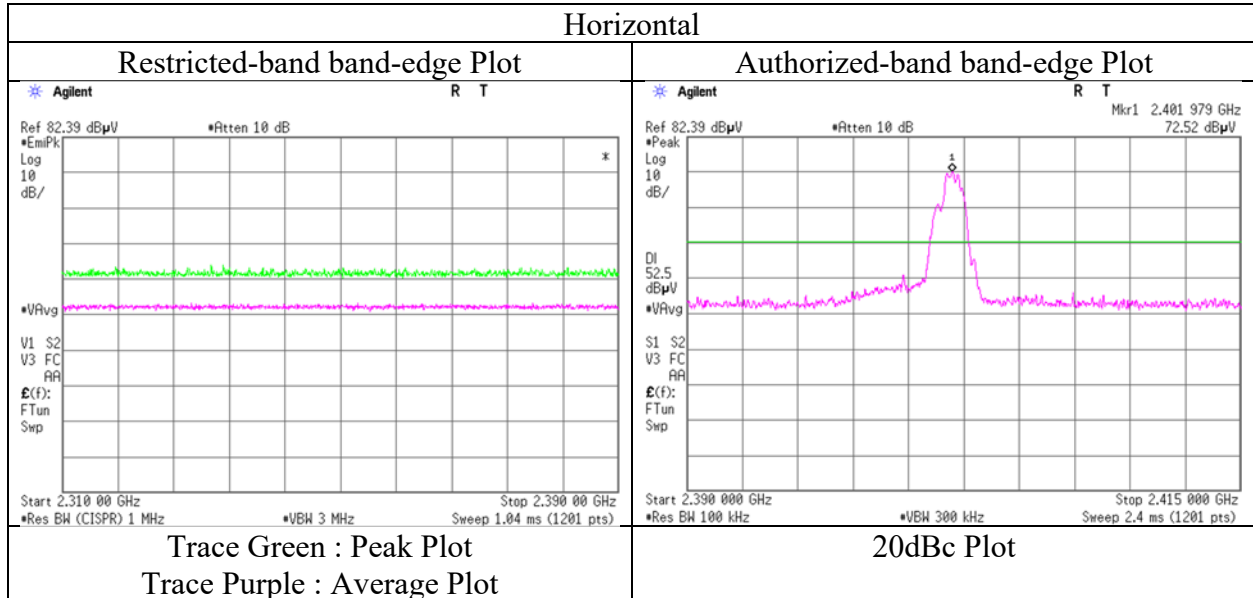

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No.	12562011S-A	
Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	2	2
Date	December 2, 2018	November 29, 2018
Temperature / Humidity	22 deg. C / 43 % RH	21 deg. C / 43 % RH
Engineer	Kazuya Noda	Shiro Kobayashi
	(30 MHz - 1 GHz,	(1 GHz - 18 GHz)
	18 GHz - 26.5 GHz)	
Mode	Tx BT LE, 2440 MHz	

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	76.797	QP	22.92	6.31	7.81	31.89	0.00	5.15	40.00	34.8	112	3	
Hori.	189.077	QP	22.65	16.49	8.70	31.79	0.00	16.05	43.50	27.4	100	4	
Hori.	881.703	QP	22.33	21.93	9.03	30.99	0.00	22.30	46.00	23.7	100	358	
Hori.	945.210	QP	22.27	21.93	9.28	30.59	0.00	22.89	46.00	23.1	100	2	
Hori.	4880.000	PK	48.14	31.15	6.56	39.50	2.46	48.81	73.90	25.1	107	344	
Hori.	7320.000	PK	45.64	36.84	7.64	39.35	2.46	53.23	73.90	20.7	150	0	Floor Noise
Hori.	7320.000	AV	35.93	36.84	7.64	39.35	2.46	43.52	53.90	10.4	150	0	Floor Noise
Vert.	44.078	QP	23.21	13.33	7.07	31.92	0.00	11.69	40.00	28.3	100	211	
Vert.	71.934	QP	27.38	6.38	7.40	31.90	0.00	9.26	40.00	30.7	100	169	
Vert.	167.103	QP	22.67	15.50	8.69	31.81	0.00	15.05	43.50	28.4	100	11	
Vert.	726.624	QP	21.43	20.09	8.38	31.54	0.00	18.36	46.00	27.6	100	359	
Vert.	4880.000	PK	48.67	31.15	6.56	39.50	2.46	49.34	73.90	24.6	165	332	
Vert.	7320.000	PK	45.04	36.84	7.64	39.35	2.46	52.63	73.90	21.3	150	0	Floor Noise
Vert.	7320.000	AV	36.05	36.84	7.64	39.35	2.46	43.64	53.90	10.3	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.98\text{ m} / 3.0\text{ m}) = 2.46\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4880.000	AV	39.51	31.15	6.56	39.50	1.71	2.46	41.89	53.90	12.0	
Vert.	4880.000	AV	40.13	31.15	6.56	39.50	1.71	2.46	42.51	53.90	11.4	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.98\text{ m} / 3.0\text{ m}) = 2.46\text{ dB}$

13 GHz - 26.5GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Duty factor Calculation chart" sheet.

Radiated Spurious Emission

Report No. 12562011S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber 2 2 2
Date December 2, 2018 December 14, 2018 November 29, 2018
Temperature / Humidity 22 deg. C / 43 % RH 24 deg. C / 31 % RH 21 deg. C / 43 % RH
Engineer Kazuya Noda Shiro Kobayashi Shiro Kobayashi
(30 MHz - 1 GHz, 18 GHz - 26.5 GHz) (1 GHz - 2.8 GHz) (2.8 GHz - 18 GHz)
Mode Tx BT LE, 2480 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	78.026	QP	23.01	6.29	7.91	31.89	0.00	5.32	40.00	34.6	113	355	
Hori.	193.661	QP	22.81	16.60	8.72	31.79	0.00	16.34	43.50	27.1	100	6	
Hori.	855.032	QP	22.32	21.69	8.91	31.11	0.00	21.81	46.00	24.1	100	1	
Hori.	949.255	QP	22.15	21.96	9.30	30.56	0.00	22.85	46.00	23.1	100	2	
Hori.	2483.500	PK	48.19	27.67	14.14	39.46	2.46	53.00	73.90	20.9	163	282	
Hori.	4960.000	PK	48.62	31.33	6.61	39.50	2.46	49.52	73.90	24.4	113	327	
Hori.	7440.000	PK	45.58	36.97	7.69	39.42	2.46	53.28	73.90	20.6	150	0	Floor Noise
Hori.	7440.000	AV	36.38	36.97	7.69	39.42	2.46	44.08	53.90	9.8	150	0	Floor Noise
Vert.	45.011	QP	23.34	12.99	7.10	31.91	0.00	11.52	40.00	28.4	100	218	
Vert.	71.852	QP	27.00	6.38	7.39	31.90	0.00	8.87	40.00	31.1	100	145	
Vert.	160.236	QP	22.67	15.14	8.66	31.82	0.00	14.65	43.50	28.8	100	16	
Vert.	716.463	QP	21.47	20.07	8.34	31.56	0.00	18.32	46.00	27.6	100	358	
Vert.	2483.500	PK	48.16	27.67	14.14	39.46	2.46	52.97	73.90	20.9	118	15	
Vert.	4960.000	PK	48.04	31.33	6.61	39.50	2.46	48.94	73.90	25.0	268	324	
Vert.	7440.000	PK	45.87	36.97	7.69	39.42	2.46	53.57	73.90	20.3	150	0	Floor Noise
Vert.	7440.000	AV	36.30	36.97	7.69	39.42	2.46	44.00	53.90	9.9	150	0	Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.98\text{ m} / 3.0\text{ m}) = 2.46\text{ dB}$

13 GHz - 26.5 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	37.57	27.67	14.14	39.46	1.71	2.46	44.09	53.90	9.8	*1)
Hori.	4960.000	AV	40.06	31.33	6.61	39.50	1.71	2.46	42.67	53.90	11.2	
Vert.	2483.500	AV	37.09	27.67	14.14	39.46	1.71	2.46	43.61	53.90	10.2	*1)
Vert.	4960.000	AV	39.47	31.33	6.61	39.50	1.71	2.46	42.08	53.90	11.8	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.98\text{ m} / 3.0\text{ m}) = 2.46\text{ dB}$

13 GHz - 26.5 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Duty factor Calculation chart" sheet.

*1) Not out of band emission (Leakage Power)

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12562011S-A
Test place	Shonan EMC Lab.
Semi Anechoic Chamber	2
Date	December 14, 2018
Temperature / Humidity	24 deg. C / 31 % RH
Engineer	Shiro Kobayashi
	(1 GHz – 2.8 GHz)
Mode	Tx BT LE, 2480 MHz

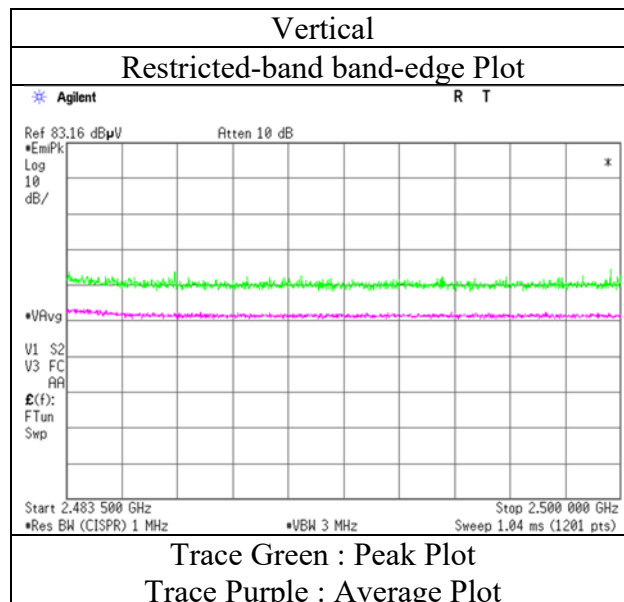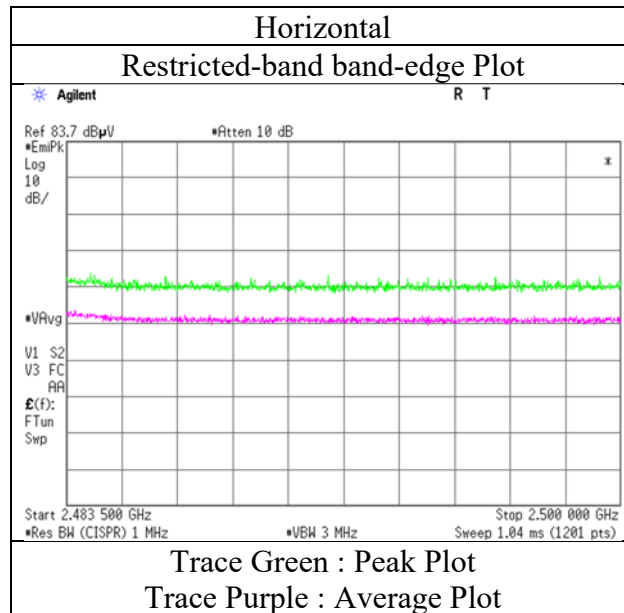


* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission **(Plot data, Worst case)**


Report No.	12562011S-A	
Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	2	2
Date	December 2, 2018	November 29, 2018
Temperature / Humidity	22 deg. C / 43 % RH	21 deg. C / 43 % RH
Engineer	Kazuya Noda	Shiro Kobayashi
	(30 MHz - 1 GHz,	(1 GHz - 18 GHz)
	18 GHz - 26.5 GHz)	
Mode	Tx BT LE, 2440 MHz	

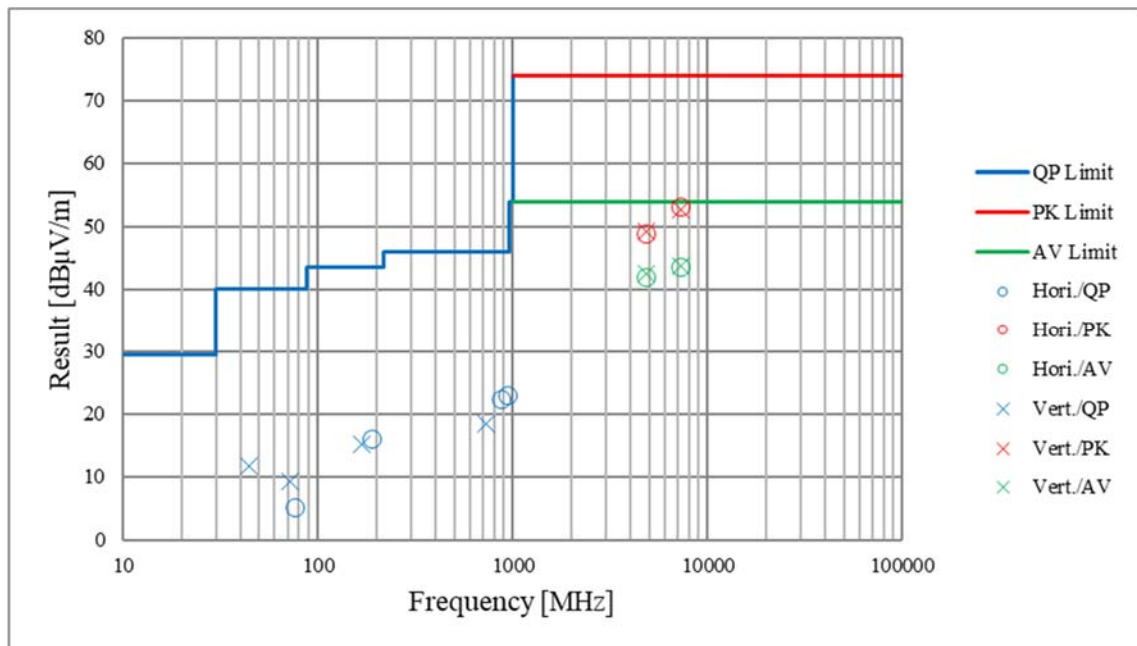

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Report No. 12562011S-A
Test place Shonan EMC Lab. No.2 Shielded Room
Date December 2, 2018
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Kazuya Noda
Mode Tx BT LE 2402 MHz

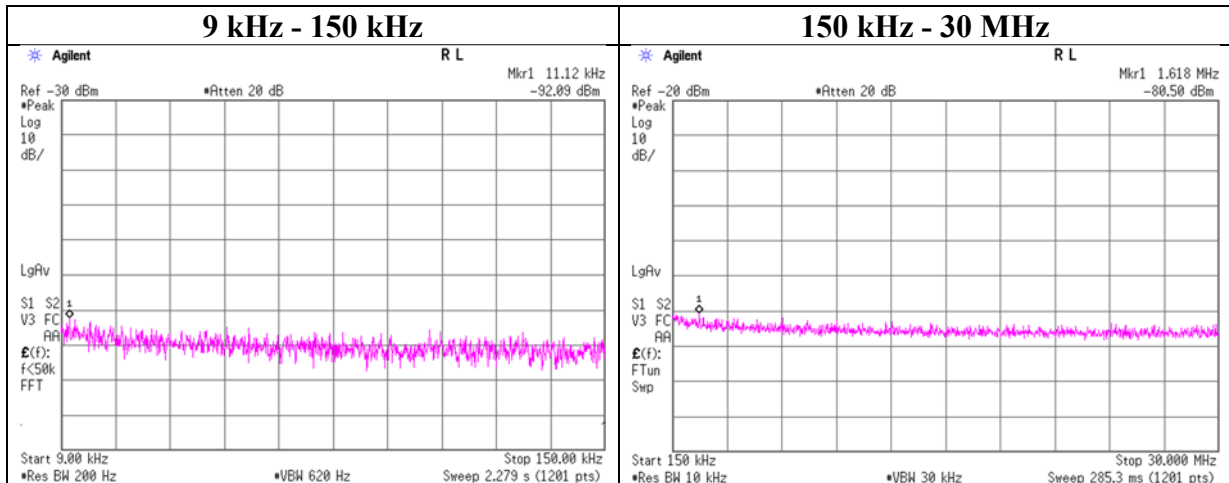

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.12	-92.1	0.02	9.7	2.5	1	-79.8	300	6.0	-18.6	46.6	65.2	
1618.00	-80.5	0.02	9.7	2.5	1	-68.2	30	6.0	13.0	23.4	10.4	


$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$

N: Number of output

Conducted Spurious Emission

Report No. 12562011S-A
Test place Shonan EMC Lab. No.2 Shielded Room
Date December 2, 2018
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Kazuya Noda
Mode Tx BT LE 2440 MHz

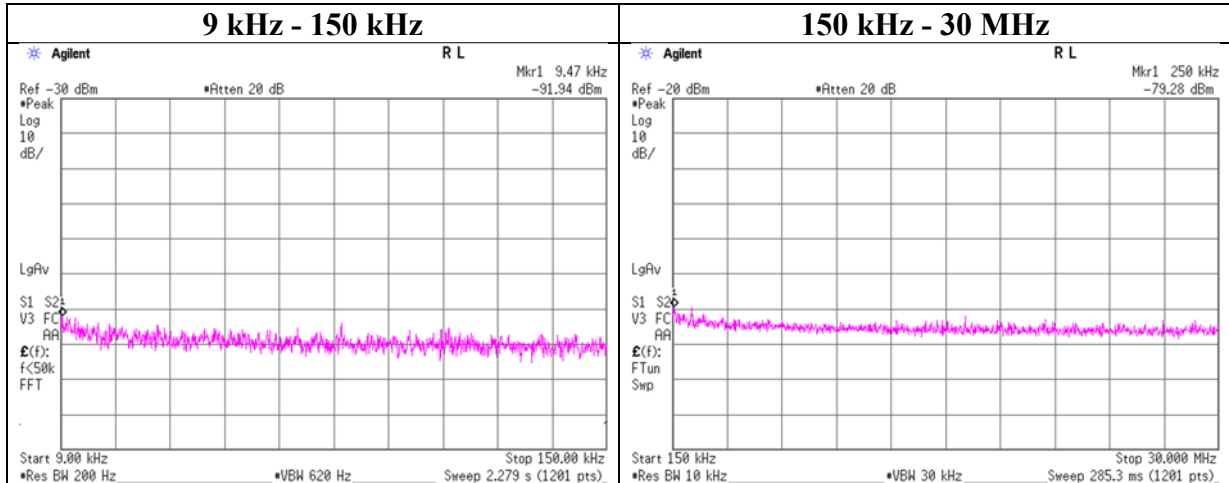

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
9.47	-91.9	0.02	9.7	2.5	1	-79.7	300	6.0	-18.4	48.0	66.4	
250.00	-79.3	0.02	9.7	2.5	1	-67.0	300	6.0	-5.8	19.6	25.4	


$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

Conducted Spurious Emission

Report No. 12562011S-A
Test place Shonan EMC Lab. No.2 Shielded Room
Date December 2, 2018
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Kazuya Noda
Mode Tx BT LE 2480 MHz

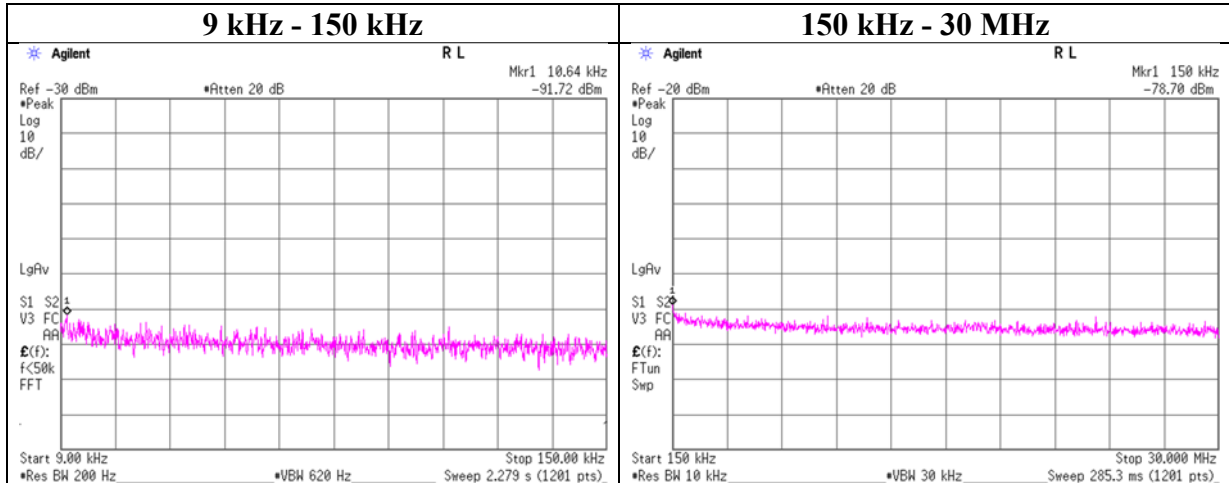

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.64	-91.7	0.02	9.7	2.5	1	-79.5	300	6.0	-18.2	47.0	65.2	
150.00	-78.7	0.02	9.7	2.5	1	-66.4	300	6.0	-5.2	24.0	29.2	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

Power Density

Report No. 12562011S-A
Test place Shonan EMC Lab. No.2 Shielded Room
Date December 2, 2018
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Kazuya Noda
Mode Tx BT LE

Freq.	Reading	Cable Loss	Atten. Loss	Result	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dBm]	[dBm]	[dB]
2402.00	-25.98	1.92	9.82	-14.24	8.00	22.24
2440.00	-25.65	1.94	9.82	-13.89	8.00	21.89
2480.00	-25.65	1.95	9.82	-13.88	8.00	21.88

Sample Calculation:


Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.


Power Density

BT LE


2402 MHz

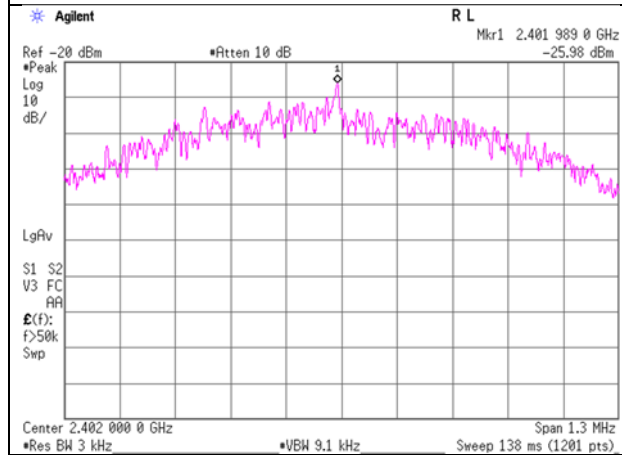

2440 MHz

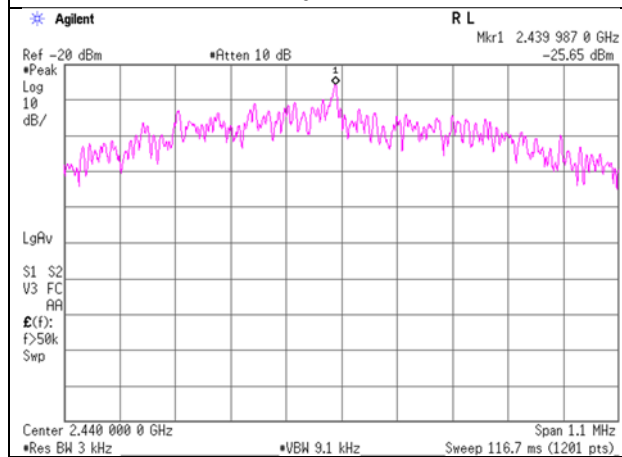

2480 MHz

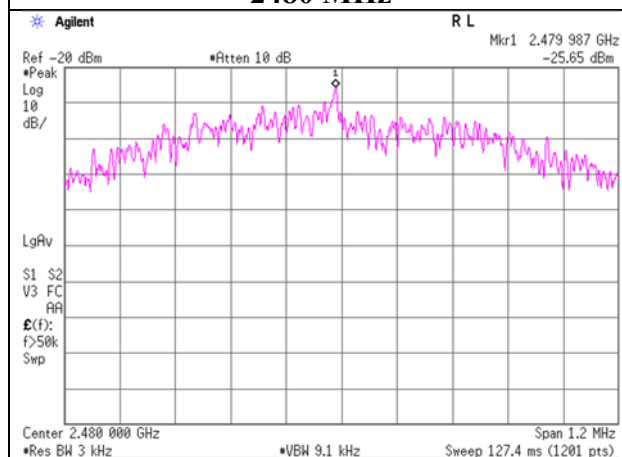

APPENDIX 2: Test instruments

Test Instruments [1/2]

Local ID	Test Name	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Due Date	Calibration Interval (Month)
KTS-07	AT	145111	Digital Tester	SANWA	PC500	7019232	2018/10/17	2019/10/31	12
SAT10-14	AT	154591	Attenuator	Weinschel Corp.	54A-10	81595	2018/4/20	2019/4/30	12
SCC-G32	AT	145183	Coaxial Cable	Junkosha	MWX241-02000KMSK MS	OCT-09-13-005	2018/11/25	2019/11/30	12
SOS-04	AT	146292	Humidity Indicator	A&D	AD-5681	4061512	2018/12/5	2019/12/31	12
SOS-10	AT	146319	Humidity Indicator	A&D	AD-5681	4064561	2018/10/25	2019/10/31	12
SPM-07	AT	146247	Power Meter	AGILENT	8990B	MY5100272	2018/7/13	2019/7/31	12
SPSS-04	AT	146310	Power sensor	AGILENT	N1923A	MY5326009	2018/7/13	2019/7/31	12
SSA-02	AT,RE	145800	Spectrum Analyzer	AGILENT	E4448A	MY48250106	2018/3/5	2019/3/31	12
STS-02	AT,RE	145793	Digital Hitester	HIOKI	3805-50	80997819	2018/3/8	2019/3/31	12
COTS-SEMI-5	RE	170932	EMI Software	TSJ	TEPTO-DV3(RE,CE,ME,PE)	-	-	-	-
KSA-08	RE	145089	Spectrum Analyzer	AGILENT	E4446A	MY46180525	2018/10/7	2019/10/31	12
SAEC-02(NSA)	RE	145563	Semi-Anechoic Chamber	TDK	SAEC-02(NSA)	2	2018/5/31	2019/5/31	12
SAEC-02(SVSWR)	RE	145598	Semi-Anechoic Chamber	TDK	SAEC-02(SVSWR)	2	2018/7/15	2019/7/31	12
SAF-02	RE	145004	Pre Amplifier	SONOMA	310N	290212	2018/2/16	2019/2/28	12
SAF-04	RE	145127	Pre Amplifier	Toyo Corporation	TPA0118-36	2072554	2018/6/26	2019/6/30	12
SAF-08	RE	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2018/3/27	2019/3/31	12
SAT10-05	RE	145136	Attenuator(above1GHz)	AGILENT	8493C-010	74864	2018/11/25	2019/11/30	12
SAT3-11	RE	150921	Attenuator	JFW	50HF-003N	-	2018/2/22	2019/2/28	12
SAT6-02	RE	145045	Attenuator	JFW	50HF-006N	-	2018/2/16	2019/2/28	12
SBA-02	RE	145022	Biconical Antenna	Schwarzbeck	BBA9106	91032665	2018/6/5	2019/6/30	12
SCC-B1/B3/B5/B7/B8/B13/SRSE-02	RE	144975	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/TOYO	8D2W/12DSF A/141PE/141PE/141PE/141P	-/0901-270(RF Selector)	2018/4/9	2019/4/30	12
SCC-B2/B4/B6/B7/B8/B13/SRSE-02	RE	144976	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/TOYO	8D2W/12DSF A/141PE/141PE/141PE/141P	-/0901-270(RF Selector)	2018/4/7	2019/4/30	12
SCC-G33	RE	145184	Coaxial Cable	Junkosha	MWX241-01000KMSK MS	-	2018/4/20	2019/4/30	12
SCC-G40	RE	166491	Coaxial Cable	Junkosha	MWX221-01000NFSN MS/B	1612S005	2018/1/29	2019/1/31	12
SCC-G41	RE	151617	Coaxial Cable	Junkosha	MWX221-01000NFSN MS/B	1612S006	2018/1/29	2019/1/31	12

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Test Instruments [2/2]

Local ID	Test Name	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Due Date	Calibration Interval (Month)
SCC-G43	RE	156380	Coaxial Cable	HUBER+SUNER	SUCOFLEX_104 E	SN MY 13406/4E	2018/7/10	2019/7/31	12
SCC-G44	RE	168300	Coaxial Cable	HUBER+SUNER	SUCOFLEX 104	800070/4A	2018/3/28	2019/3/31	12
SCC-G45	RE	168301	Coaxial Cable	HUBER+SUNER	SUCOFLEX 102 E	800137/2E A	2018/3/28	2019/3/31	12
SFL-18	RE	145305	Highpass Filter	MICRO-TRONICS	HPM50111	119	2018/4/20	2019/4/30	12
SHA-02	RE	145384	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-726	2018/7/23	2019/7/31	12
SHA-04	RE	145512	Horn Antenna	ETS LINDGREN	Sep-60	LM3640	2018/7/23	2019/7/31	12
SJM-09	RE	145336	Measure	PROMART	SEN1935	-	-	-	-
SLA-06	RE	145528	Logperiodic Antenna	Schwarzbeck	VUSLP9111B	195	2018/6/5	2019/6/30	12
SOS-03	RE	146317	Humidity Indicator	A&D	AD-5681	4063325	2018/10/25	2019/10/31	12
STR-07	RE	146209	Test Receiver	Rohde & Schwarz	ESU26	100484	2018/9/26	2019/9/30	12

*Hyphens for Last Calibration Date, Calibration Due Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item: RE: Radiated Emission test
AT: Antenna Terminal Conducted test