




Shenzhen UnionTrust Quality and Technology Co., Ltd.

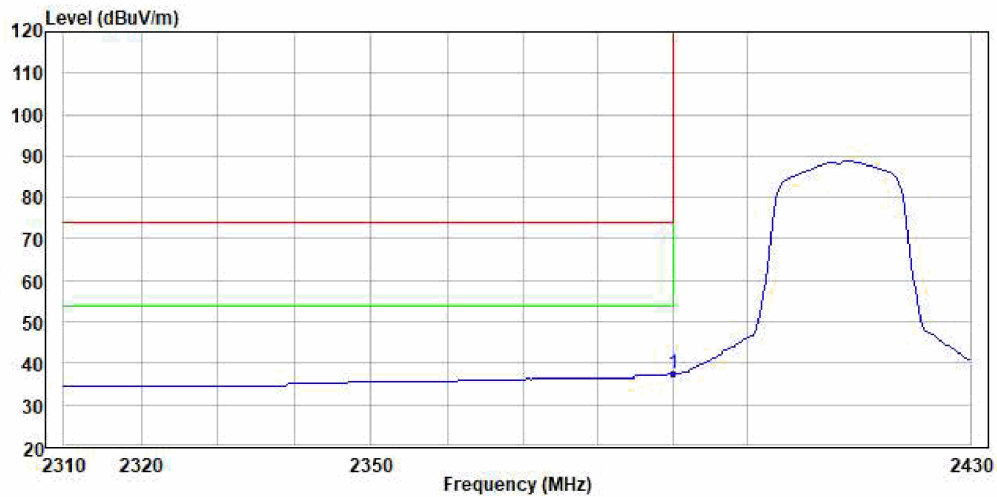


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_ANT2_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	37.54	36.04	31.55	10.00	7.35	47.40	54.00	-16.46	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

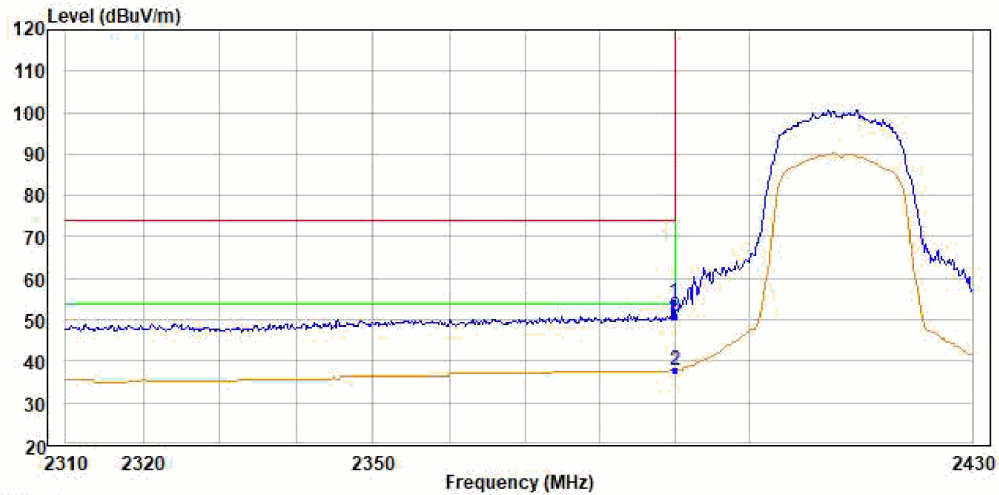

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_ANT2_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PK	2389.719	54.32	52.82	31.55	10.00	7.35	47.40	74.00	-19.68	Peak
2 PP	2390.000	38.04	36.54	31.55	10.00	7.35	47.40	54.00	-15.96	Average
3	2390.000	50.68	49.18	31.55	10.00	7.35	47.40	74.00	-23.32	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PK	2389.719	54.32	52.82	31.55	10.00	7.35	47.40	74.00	-19.68	Peak
2 PP	2390.000	38.04	36.54	31.55	10.00	7.35	47.40	54.00	-15.96	Average
3	2390.000	50.68	49.18	31.55	10.00	7.35	47.40	74.00	-23.32	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

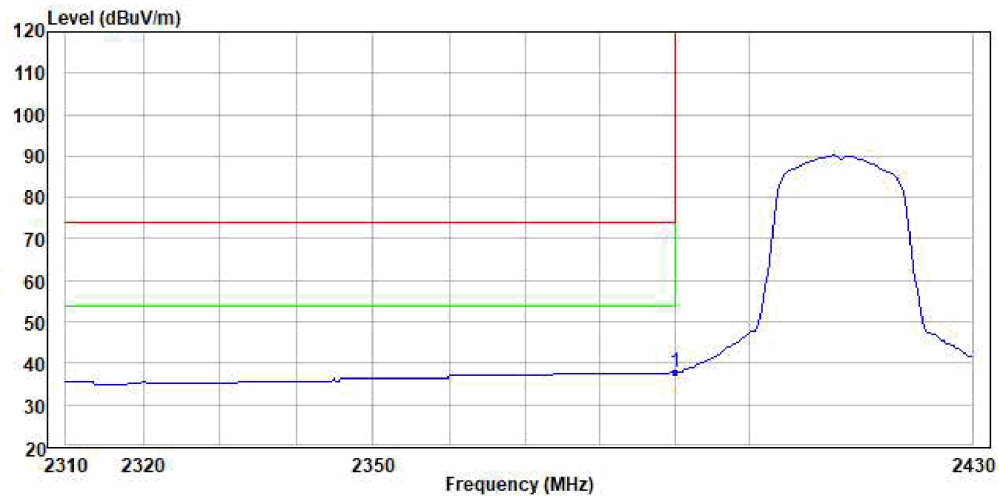


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_ANT2_2412
Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2390.000	38.04	36.54	31.55	10.00	7.35	47.40	54.00	-15.96	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

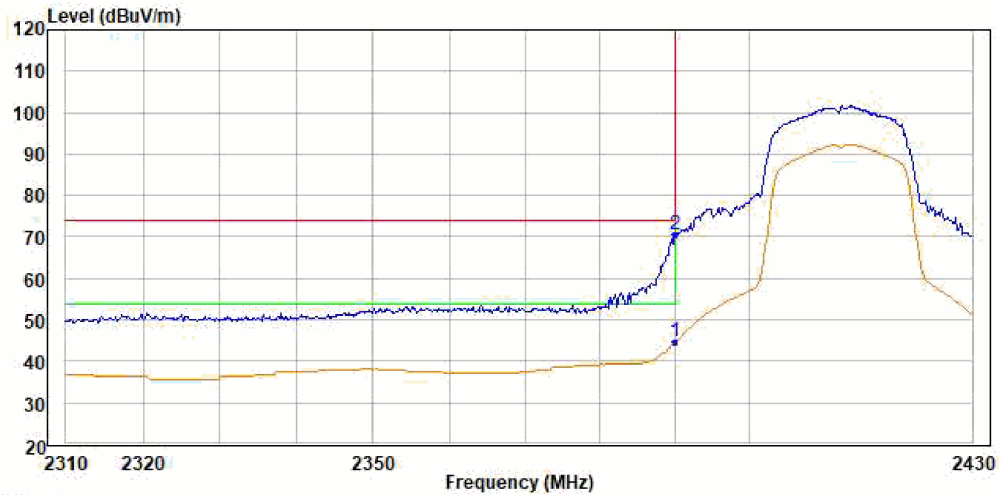

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_ANT1+2_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 AV	2390.000	44.76	43.26	31.55	10.00	7.35	47.40	54.00	-9.24	Average
2 PP	2390.000	70.59	69.09	31.55	10.00	7.35	47.40	74.00	-3.41	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 AV	2390.000	44.76	43.26	31.55	10.00	7.35	47.40	54.00	-9.24	Average
2 PP	2390.000	70.59	69.09	31.55	10.00	7.35	47.40	74.00	-3.41	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

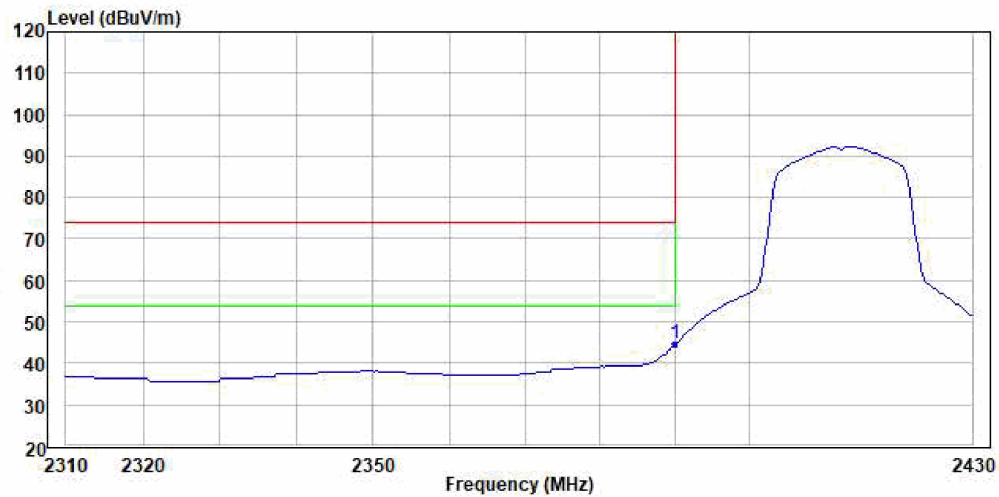


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_ANT1+2_2412
Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2390.000	44.76	43.26	31.55	10.00	7.35	47.40	54.00	-9.24	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

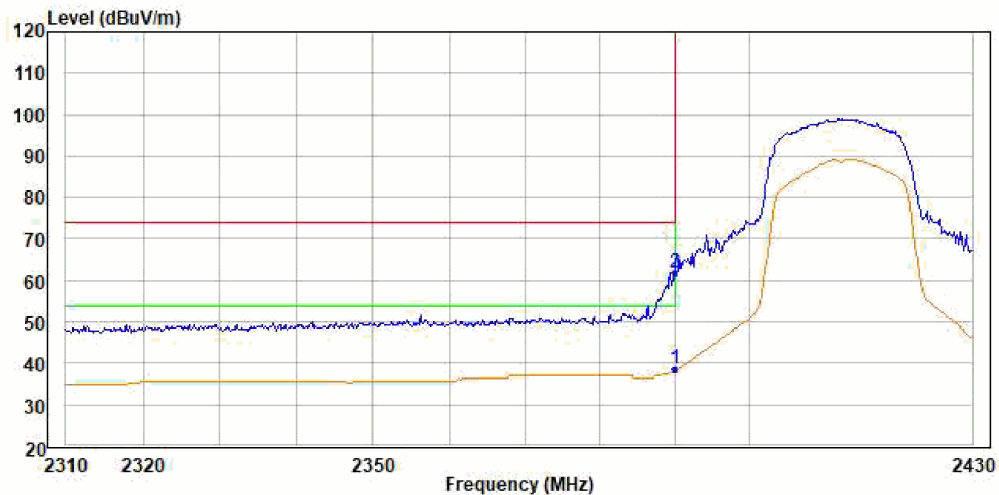

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_ANT1+2_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 AV	2390.000	38.51	37.01	31.55	10.00	7.35	47.40	54.00	-15.49	Average
2 PP	2390.000	61.71	60.21	31.55	10.00	7.35	47.40	74.00	-12.29	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 AV	2390.000	38.51	37.01	31.55	10.00	7.35	47.40	54.00	-15.49	Average
2 PP	2390.000	61.71	60.21	31.55	10.00	7.35	47.40	74.00	-12.29	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

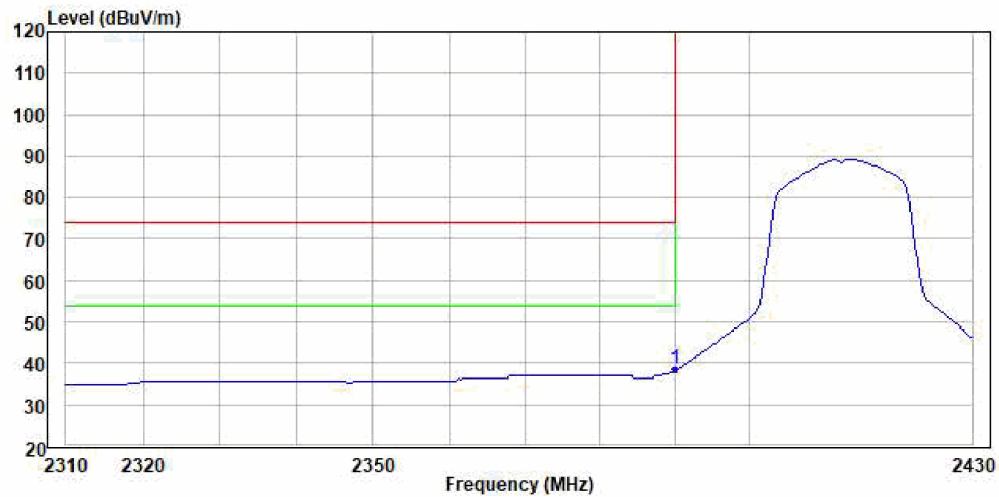


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_ANT1+2_2412
Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2390.000	38.51	37.01	31.55	10.00	7.35	47.40	54.00	-15.49	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

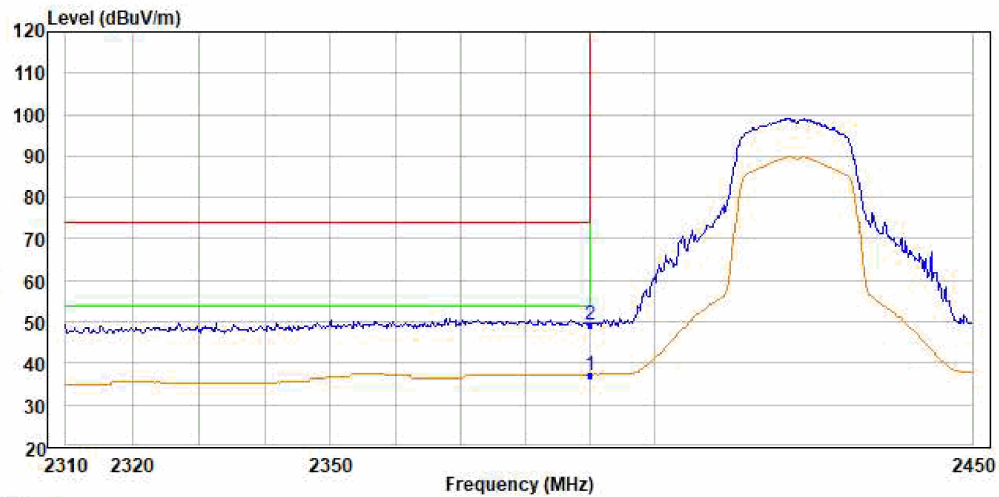

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_ANT1+2_2422
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	37.02	35.52	31.55	10.00	7.35	47.40	54.00	-16.98	Average
2 PK	2390.000	49.38	47.88	31.55	10.00	7.35	47.40	74.00	-24.62	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2390.000	37.02	35.52	31.55	10.00	7.35	47.40	54.00	-16.98	Average
2 PK	2390.000	49.38	47.88	31.55	10.00	7.35	47.40	74.00	-24.62	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

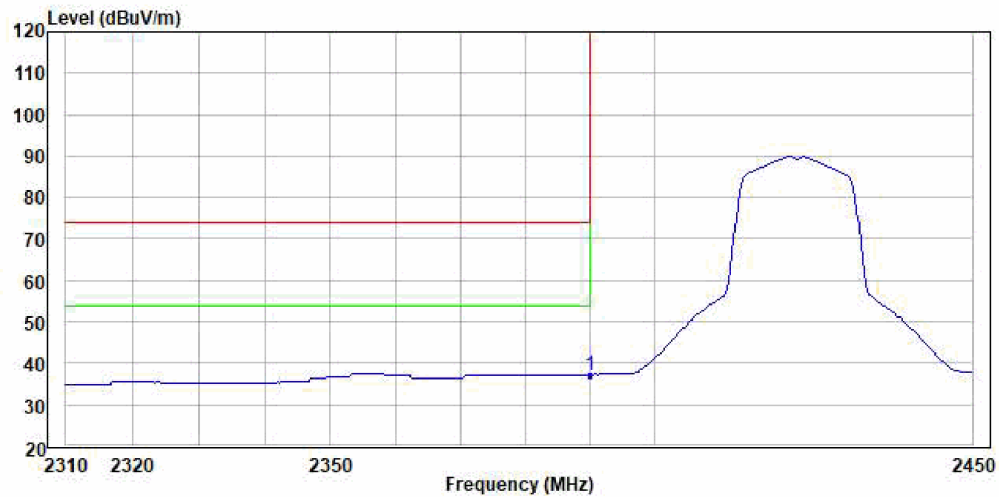


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_ANT1+2_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	37.02	35.52	31.55	10.00	7.35	47.40	54.00	-16.98	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

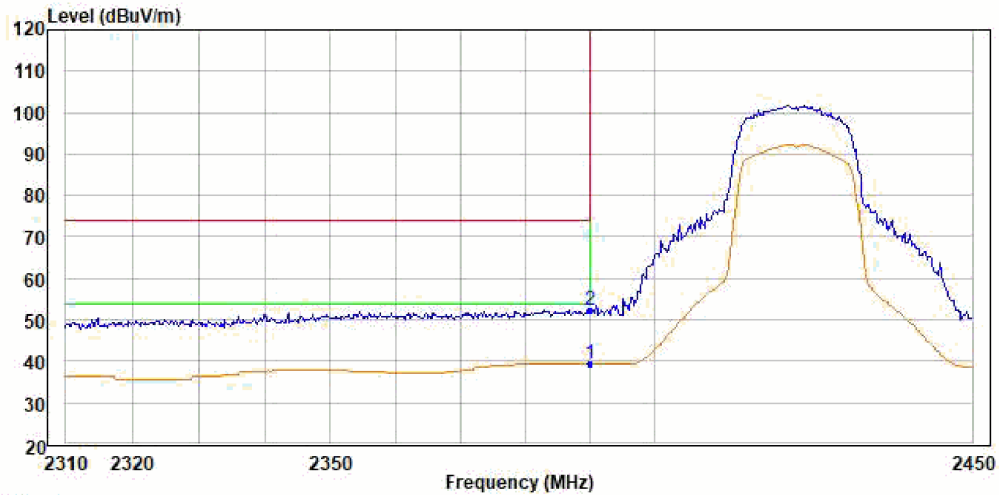

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_ANT1+2_2422
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	39.38	37.88	31.55	10.00	7.35	47.40	54.00	-14.62	Average
2 PK	2390.000	52.49	50.99	31.55	10.00	7.35	47.40	74.00	-21.51	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2390.000	39.38	37.88	31.55	10.00	7.35	47.40	54.00	-14.62	Average
2 PK	2390.000	52.49	50.99	31.55	10.00	7.35	47.40	74.00	-21.51	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

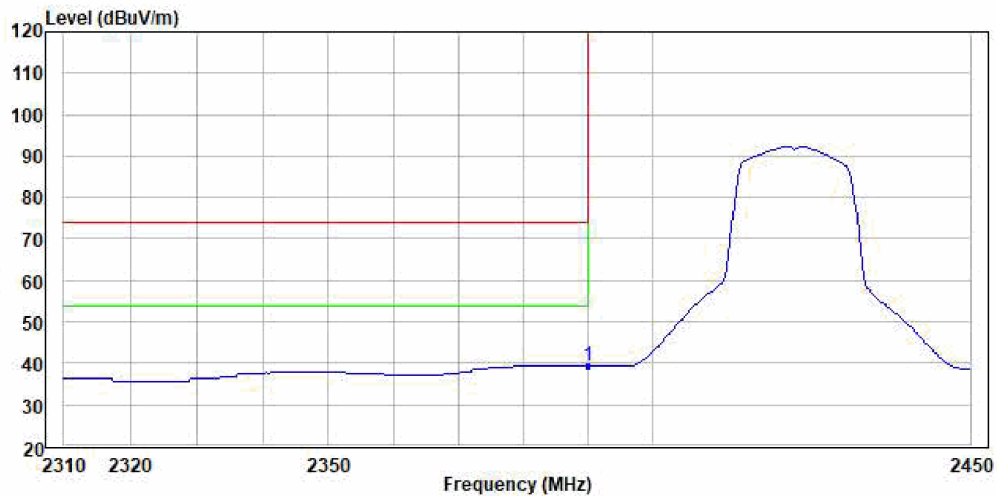


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_ANT1+2_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	39.38	37.88	31.55	10.00	7.35	47.40	54.00	-14.62	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

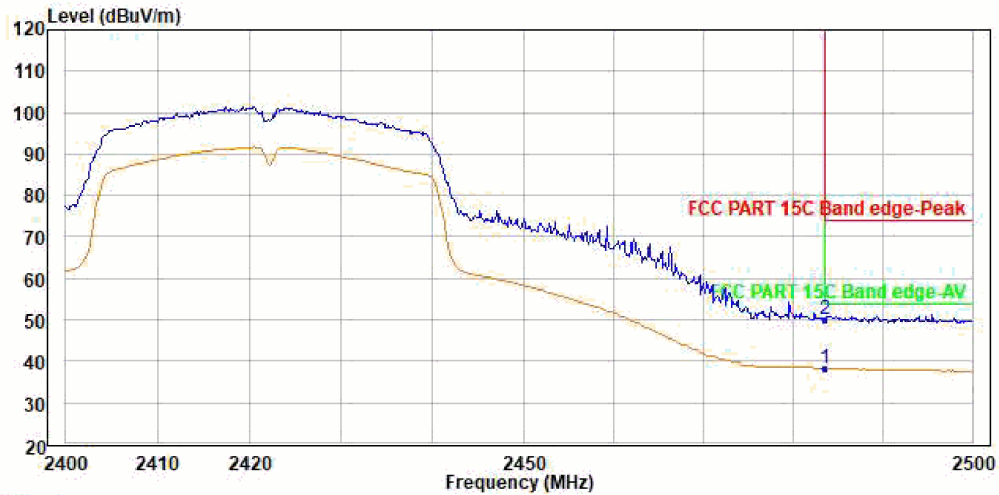

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_ANT1+2_2452
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	38.29	36.54	31.68	10.00	7.47	47.40	54.00	-15.71	Average
2 PK	2483.500	50.19	48.44	31.68	10.00	7.47	47.40	74.00	-23.81	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2483.500	38.29	36.54	31.68	10.00	7.47	47.40	54.00	-15.71	Average
2 PK	2483.500	50.19	48.44	31.68	10.00	7.47	47.40	74.00	-23.81	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

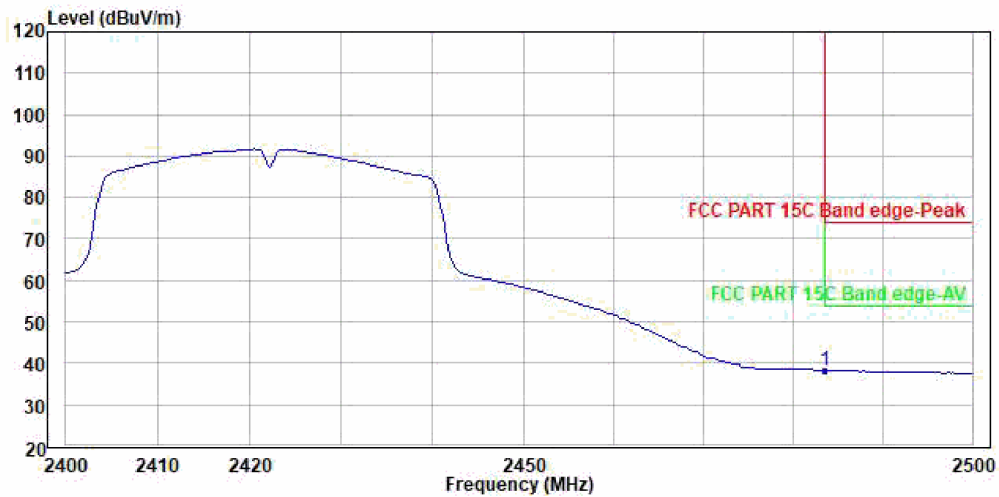


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_ANT1+2_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	38.29	36.54	31.68	10.00	7.47	47.40	54.00	-15.71	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

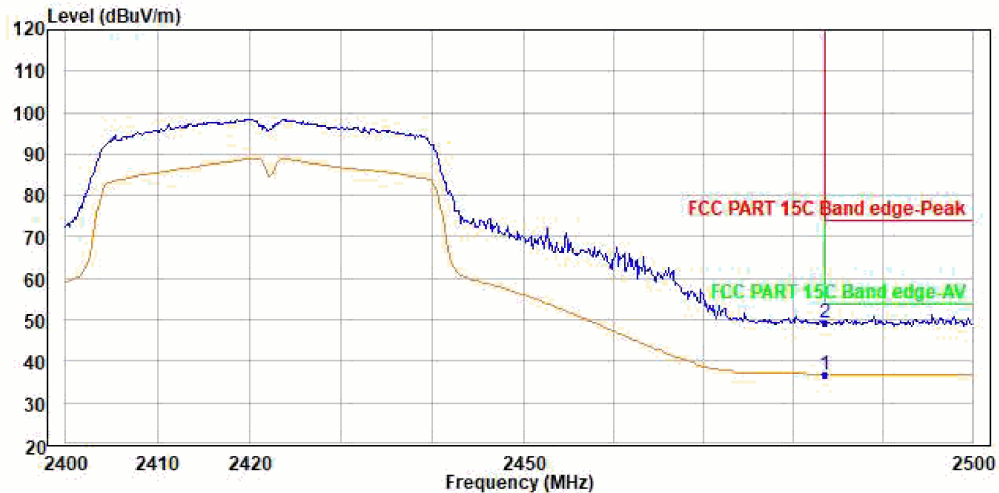

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_ANT1+2_2452
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	36.71	34.96	31.68	10.00	7.47	47.40	54.00	-17.29	Average
2 PK	2483.500	49.42	47.67	31.68	10.00	7.47	47.40	74.00	-24.58	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2483.500	36.71	34.96	31.68	10.00	7.47	47.40	54.00	-17.29	Average
2 PK	2483.500	49.42	47.67	31.68	10.00	7.47	47.40	74.00	-24.58	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

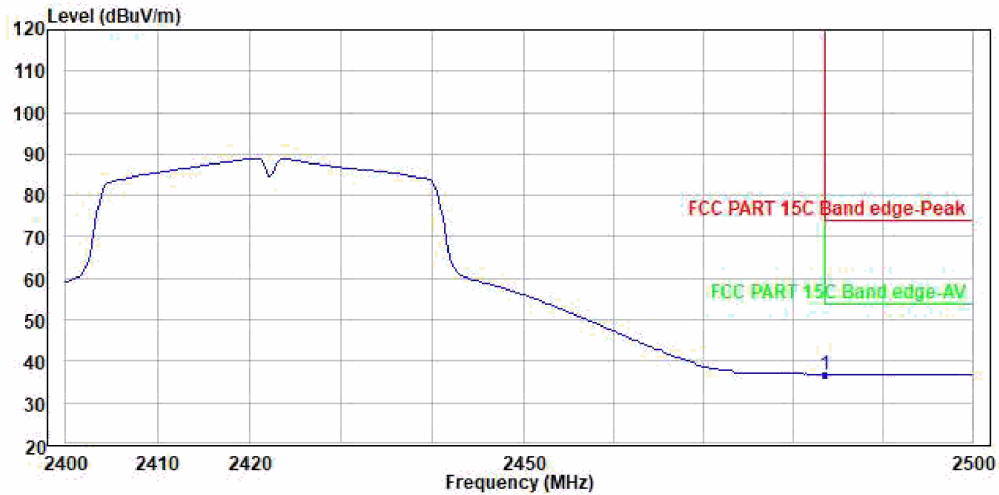


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_ANT1+2_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	36.71	34.96	31.68	10.00	7.47	47.40	54.00	-17.29	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

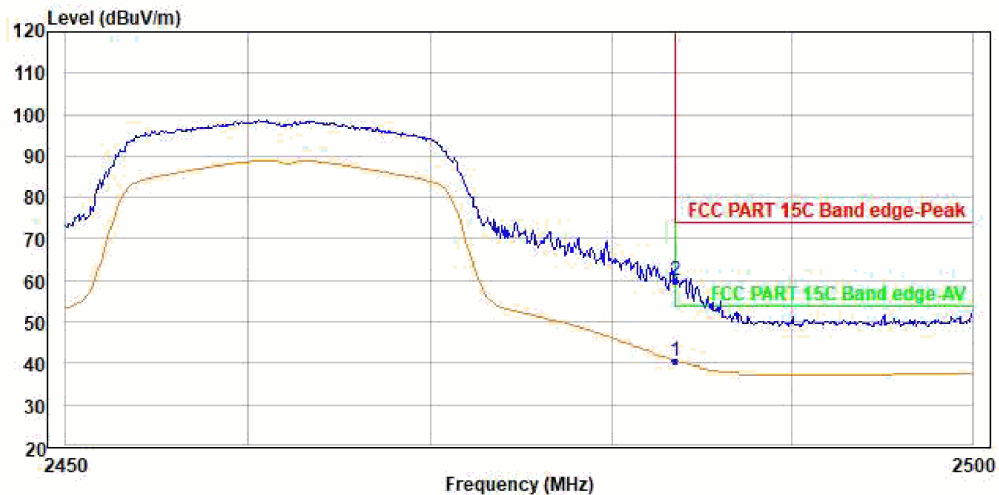

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_ANT1+2_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	40.42	38.67	31.68	10.00	7.47	47.40	54.00	-13.58	Average
2 PK	2483.500	60.01	58.26	31.68	10.00	7.47	47.40	74.00	-13.99	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2483.500	40.42	38.67	31.68	10.00	7.47	47.40	54.00	-13.58	Average
2 PK	2483.500	60.01	58.26	31.68	10.00	7.47	47.40	74.00	-13.99	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

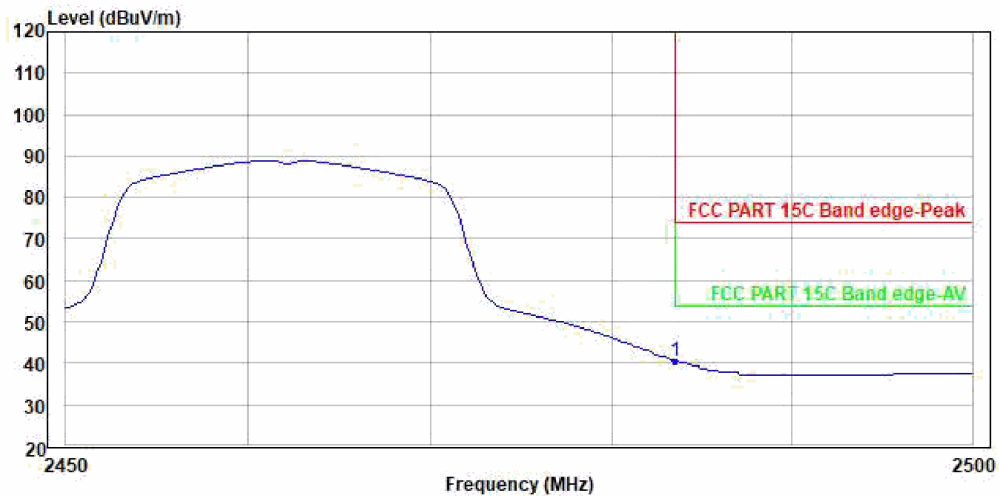


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_ANT1+2_2462
Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2483.500	40.42	38.67	31.68	10.00	7.47	47.40	54.00	-13.58	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

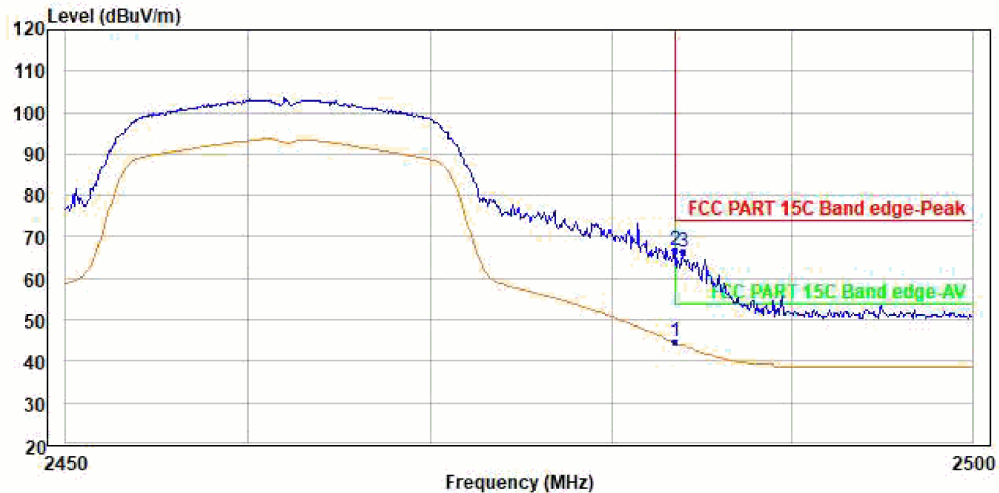

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_ANT1+2_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	AV 2483.500	44.55	42.80	31.68	10.00	7.47	47.40	54.00	-9.45	Average
2	PP 2483.500	66.62	64.87	31.68	10.00	7.47	47.40	74.00	-7.38	Peak
3	2483.918	66.31	64.56	31.68	10.00	7.47	47.40	74.00	-7.69	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1	AV 2483.500	44.55	42.80	31.68	10.00	7.47	47.40	54.00	-9.45	Average
2	PP 2483.500	66.62	64.87	31.68	10.00	7.47	47.40	74.00	-7.38	Peak
3	2483.918	66.31	64.56	31.68	10.00	7.47	47.40	74.00	-7.69	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

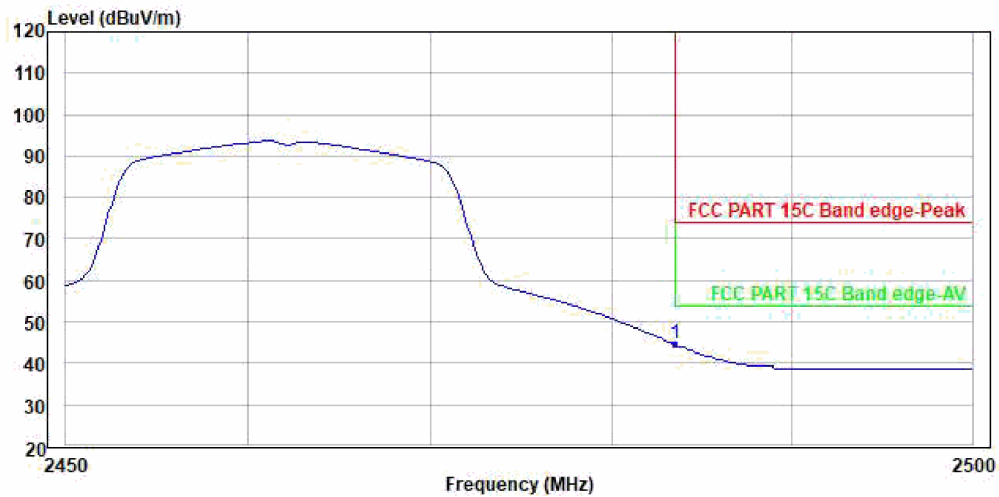


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_ANT1+2_2462
Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2483.500	44.55	42.80	31.68	10.00	7.47	47.40	54.00	-9.45	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

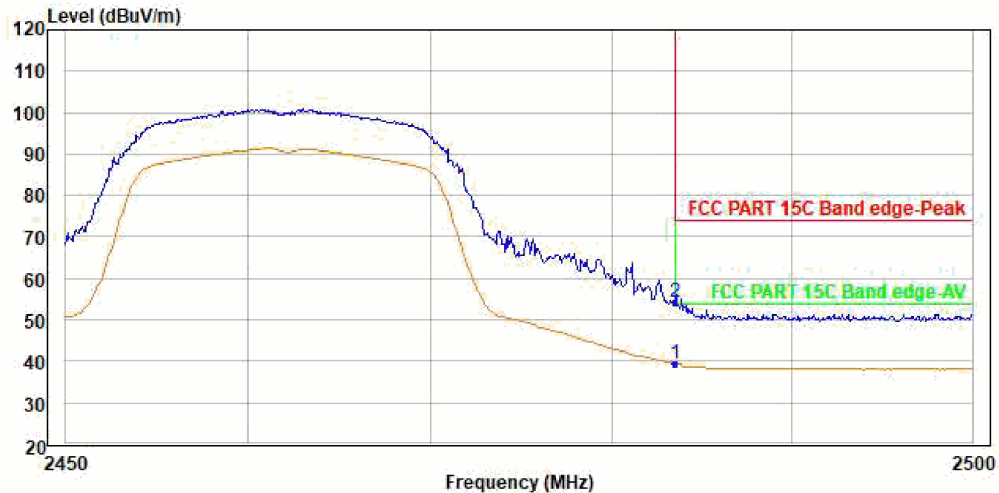

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_ANT2_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	39.21	37.46	31.68	10.00	7.47	47.40	54.00	-14.79	Average
2 PK	2483.500	54.10	52.35	31.68	10.00	7.47	47.40	74.00	-19.90	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2483.500	39.21	37.46	31.68	10.00	7.47	47.40	54.00	-14.79	Average
2 PK	2483.500	54.10	52.35	31.68	10.00	7.47	47.40	74.00	-19.90	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

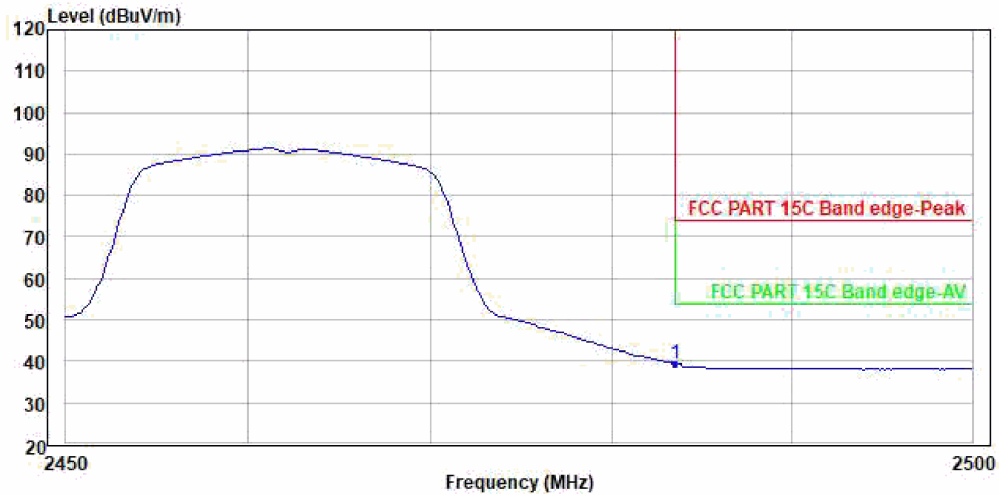


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_ANT2_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	39.21	37.46	31.68	10.00	7.47	47.40	54.00	-14.79	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

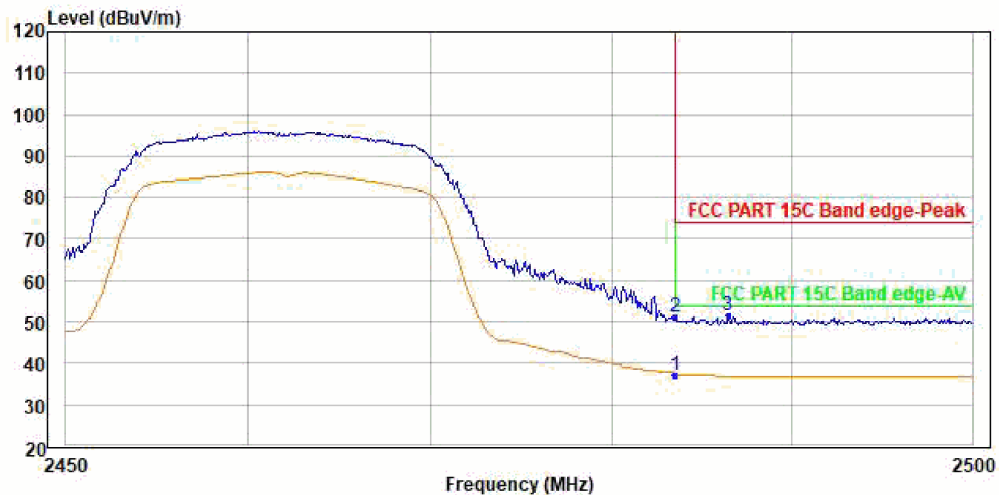

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_ANT2_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	37.27	35.52	31.68	10.00	7.47	47.40	54.00	-16.73	Average
2	2483.500	51.18	49.43	31.68	10.00	7.47	47.40	74.00	-22.82	Peak
3 PK	2486.423	51.66	49.90	31.68	10.00	7.48	47.40	74.00	-22.34	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2483.500	37.27	35.52	31.68	10.00	7.47	47.40	54.00	-16.73	Average
2	2483.500	51.18	49.43	31.68	10.00	7.47	47.40	74.00	-22.82	Peak
3 PK	2486.423	51.66	49.90	31.68	10.00	7.48	47.40	74.00	-22.34	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

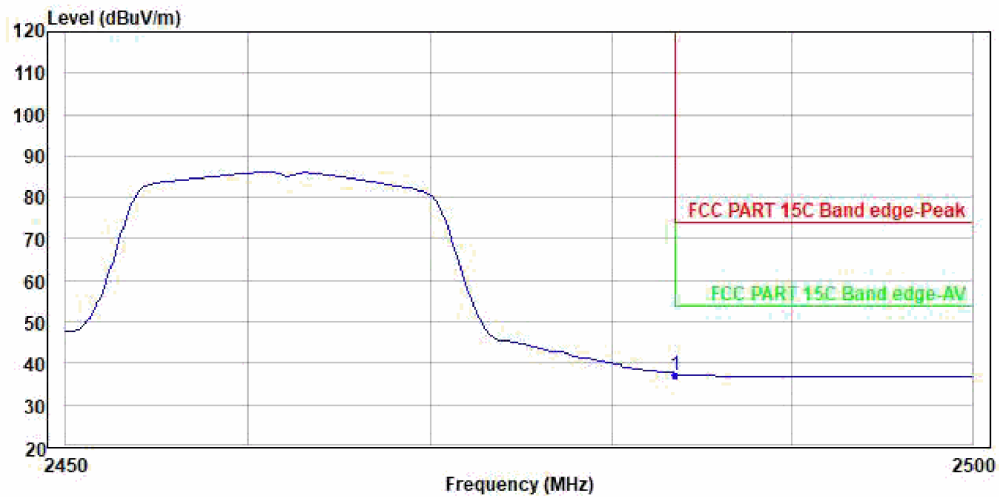


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_ANT2_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	37.27	35.52	31.68	10.00	7.47	47.40	54.00	-16.73	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

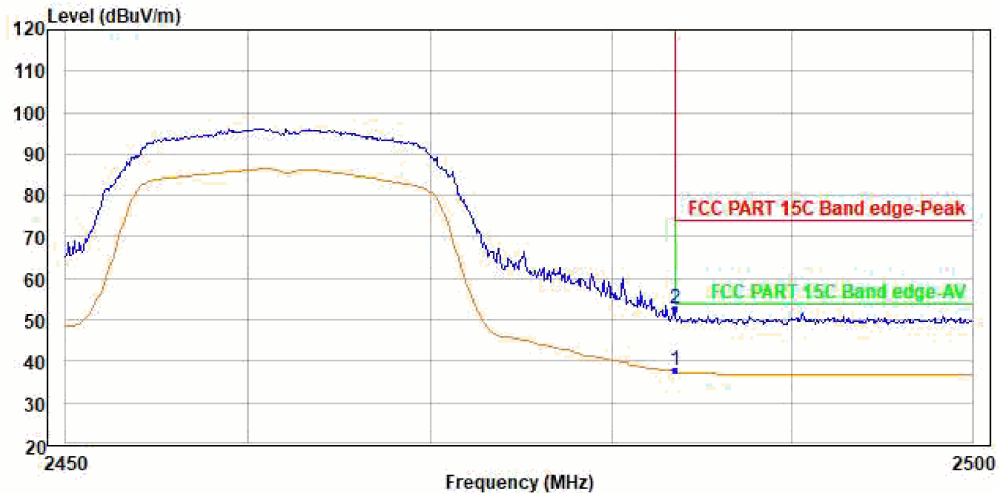

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_ANT1_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	37.79	36.04	31.68	10.00	7.47	47.40	54.00	-16.21	Average
2 PK	2483.500	52.67	50.92	31.68	10.00	7.47	47.40	74.00	-21.33	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2483.500	37.79	36.04	31.68	10.00	7.47	47.40	54.00	-16.21	Average
2 PK	2483.500	52.67	50.92	31.68	10.00	7.47	47.40	74.00	-21.33	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

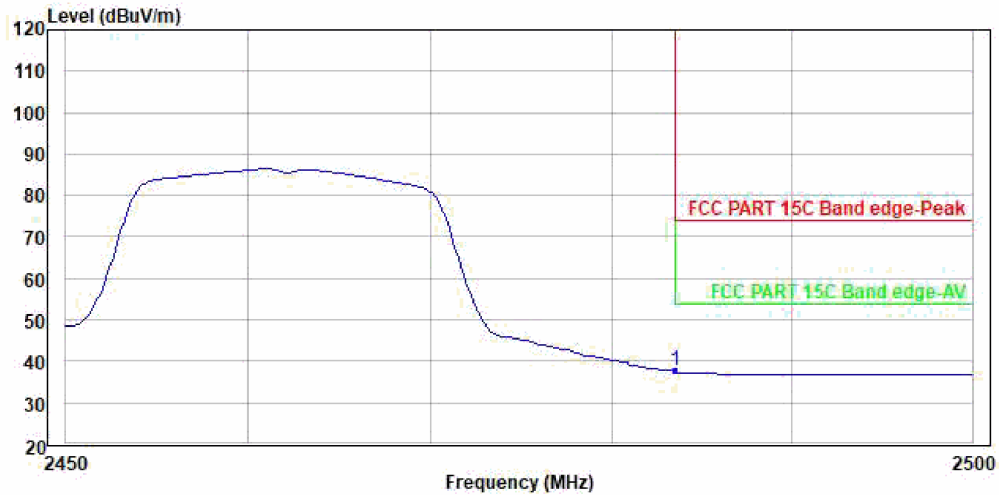


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_ANT1_2462
Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2483.500	37.79	36.04	31.68	10.00	7.47	47.40	54.00	-16.21	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

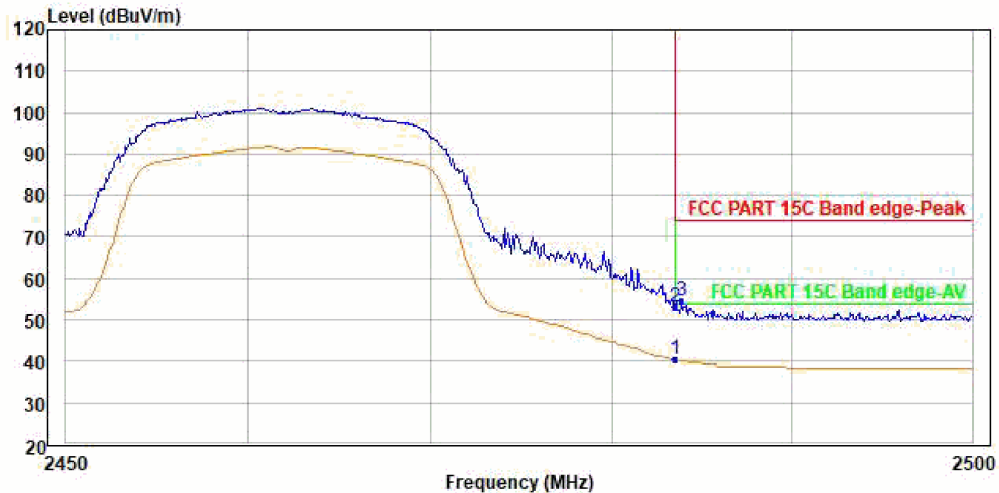

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_ANT1_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	40.42	38.67	31.68	10.00	7.47	47.40	54.00	-13.58	Average
2	2483.500	53.06	51.31	31.68	10.00	7.47	47.40	74.00	-20.94	Peak
3 PK	2483.868	54.78	53.03	31.68	10.00	7.47	47.40	74.00	-19.22	Peak

Condition: 3m
EUT :
Mode :
Note :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dbuv/m	dbuv	dB/m	dB	dB	dB	dbuv/m	dB	
1 PP	2483.500	40.42	38.67	31.68	10.00	7.47	47.40	54.00	-13.58	Average
2	2483.500	53.06	51.31	31.68	10.00	7.47	47.40	74.00	-20.94	Peak
3 PK	2483.868	54.78	53.03	31.68	10.00	7.47	47.40	74.00	-19.22	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

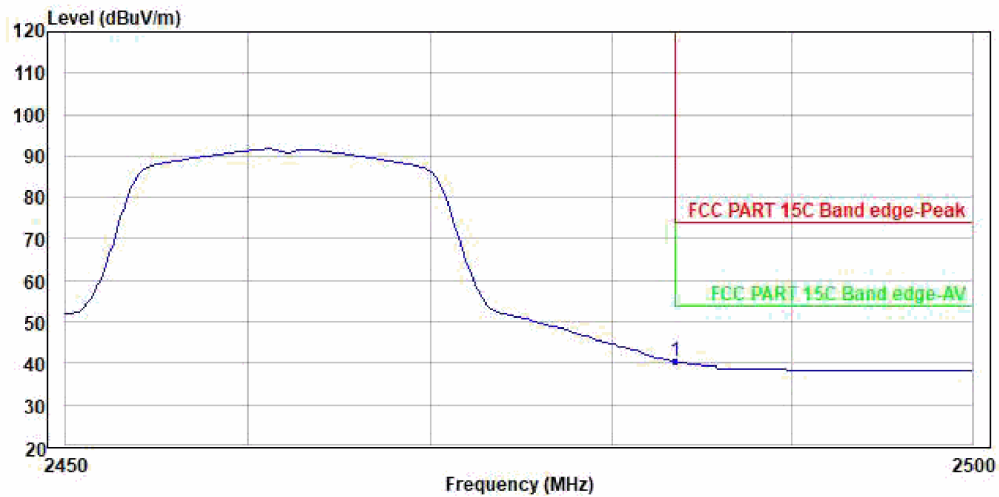


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_ANT1_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	40.42	38.67	31.68	10.00	7.47	47.40	54.00	-13.58	Average

Appendix A.2: Test Results of Radiated Spurious Emissions for Lora + 2.4G WIFI + LTE



Shenzhen UnionTrust Quality and Technology Co., Ltd.

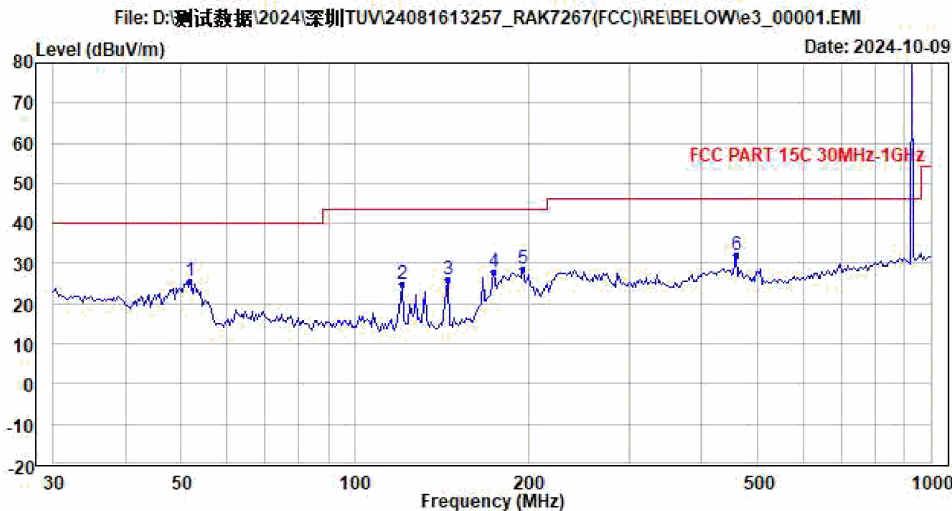


Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.4(C)/59.6(%)
Press : 100.0kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : DC_12V
Test Engineer : Bowie
Test Mode : Test Mode1: Lora_925.1MHz+WiFi+Band2_1880MHz
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	51.900	25.74	40.18	13.66	0.80	0.00	28.90	40.00	-14.26	Peak
2	120.612	24.93	40.34	12.38	1.13	0.00	28.92	43.50	-18.57	Peak
3	144.790	26.13	41.05	12.80	1.22	0.00	28.94	43.50	-17.37	Peak
4	173.815	27.89	39.25	16.28	1.33	0.00	28.97	43.50	-15.61	Peak
5	195.870	28.58	39.76	16.41	1.41	0.00	29.00	43.50	-14.92	Peak
6 PP	458.399	31.93	35.83	23.40	1.99	0.00	29.29	46.00	-14.07	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

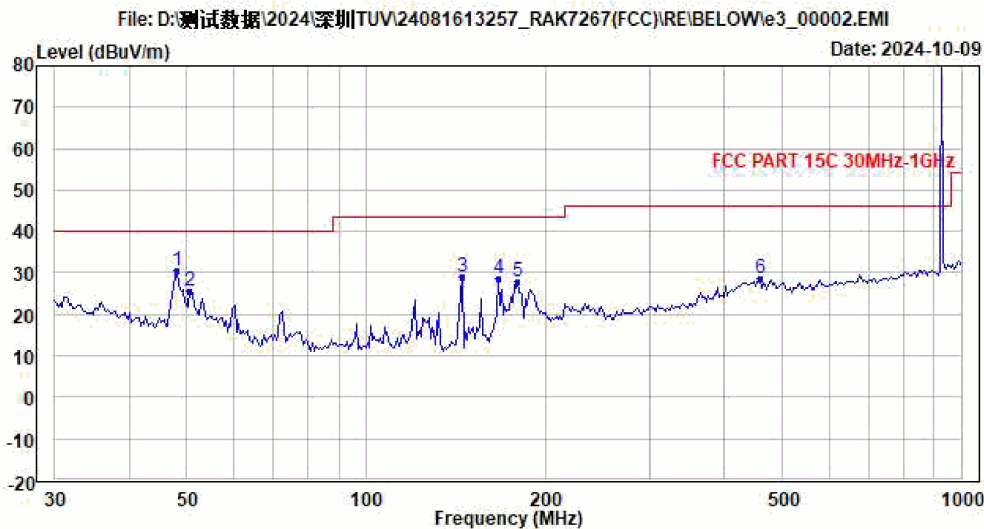


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/59.6(%)
Press : 100.0kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : DC_12V
Test Engineer : Bowie
Test Mode : Test Mode1: Lora_925.1MHz+WiFi+Band2_1880MHz
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	48.039	30.58	43.77	14.90	0.81	0.00	28.90	40.00	-9.42	Peak
2	50.461	25.71	39.46	14.36	0.79	0.00	28.90	40.00	-14.29	Peak
3	144.790	29.17	44.09	12.80	1.22	0.00	28.94	43.50	-14.33	Peak
4	166.639	28.81	41.39	15.09	1.30	0.00	28.97	43.50	-14.69	Peak
5	180.030	27.74	39.57	15.80	1.35	0.00	28.98	43.50	-15.76	Peak
6	458.399	28.76	32.66	23.40	1.99	0.00	29.29	46.00	-17.24	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

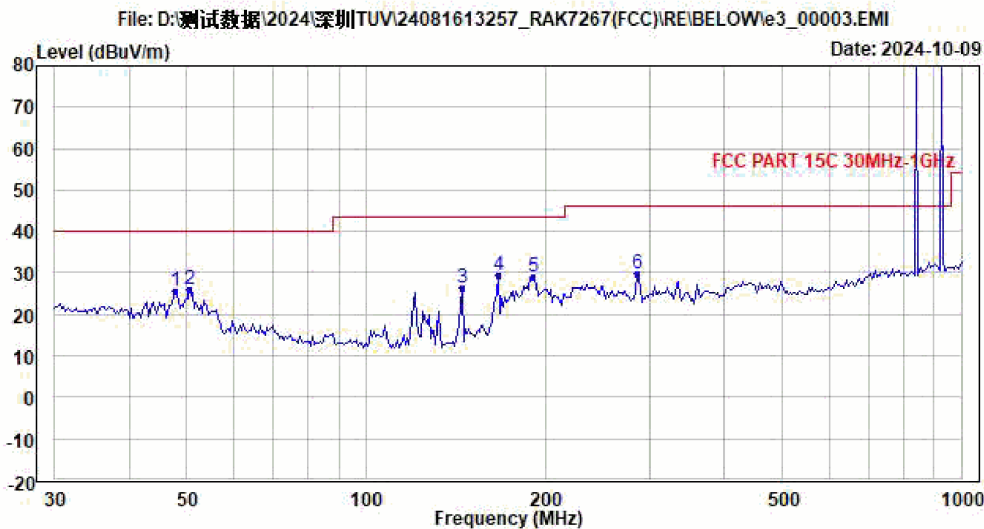


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/59.6(%)
Press : 100.0kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : DC_12V
Test Engineer : Bowie
Test Mode : Test Mode2: Lora_925.1MHz+WiFi+Band5_836.5MHz
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	47.703	25.48	38.58	14.99	0.81	0.00	28.90	40.00	-14.52	Peak
2 PP	50.461	25.97	39.72	14.36	0.79	0.00	28.90	40.00	-14.03	Peak
3	144.790	26.38	41.30	12.80	1.22	0.00	28.94	43.50	-17.12	Peak
4	166.639	29.33	41.91	15.09	1.30	0.00	28.97	43.50	-14.17	Peak
5	190.441	29.18	40.94	15.84	1.39	0.00	28.99	43.50	-14.32	Peak
6	286.265	29.77	39.19	18.05	1.62	0.00	29.09	46.00	-16.23	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

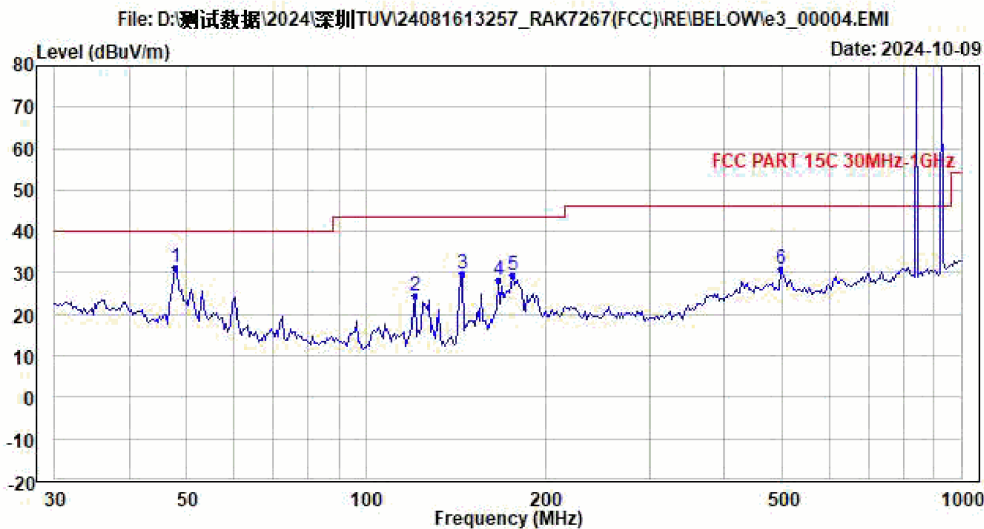


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/59.6(%)
Press : 100.0kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : DC_12V
Test Engineer : Bowie
Test Mode : Test Mode2: Lora_925.1MHz+WiFi+Band5_836.5MHz
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	47.703	31.20	44.30	14.99	0.81	0.00	28.90	40.00	-8.80	Peak
2	120.612	24.64	40.05	12.38	1.13	0.00	28.92	43.50	-18.86	Peak
3	144.790	29.69	44.61	12.80	1.22	0.00	28.94	43.50	-13.81	Peak
4	166.639	28.41	40.99	15.09	1.30	0.00	28.97	43.50	-15.09	Peak
5	176.275	29.52	41.06	16.10	1.34	0.00	28.98	43.50	-13.98	Peak
6	498.730	30.76	33.30	24.75	2.06	0.00	29.35	46.00	-15.24	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

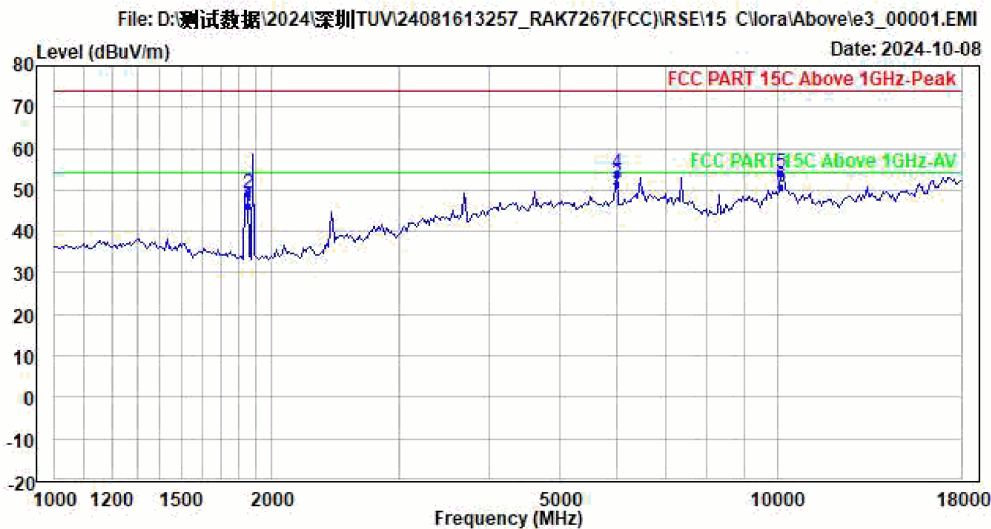


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC_120V/60Hz
Test Engineer : Bowie
Test Mode : TM1: Lora_925.1Mhz+WiFi+LTE_B2
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	1847.783	46.10	56.38	30.53	6.44	0.00	47.25	54.00	-7.90	Average
2	1847.783	49.24	59.52	30.53	6.44	0.00	47.25	74.00	-24.76	Peak
3	PP 5988.431	51.31	50.52	35.99	9.81	0.00	45.01	54.00	-2.69	Average
4	PK 5988.431	54.20	53.41	35.99	9.81	0.00	45.01	74.00	-19.80	Peak
5	10144.500	53.97	49.65	39.03	11.99	0.00	46.70	74.00	-20.03	Peak
6	10144.500	50.79	46.47	39.03	11.99	0.00	46.70	54.00	-3.21	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

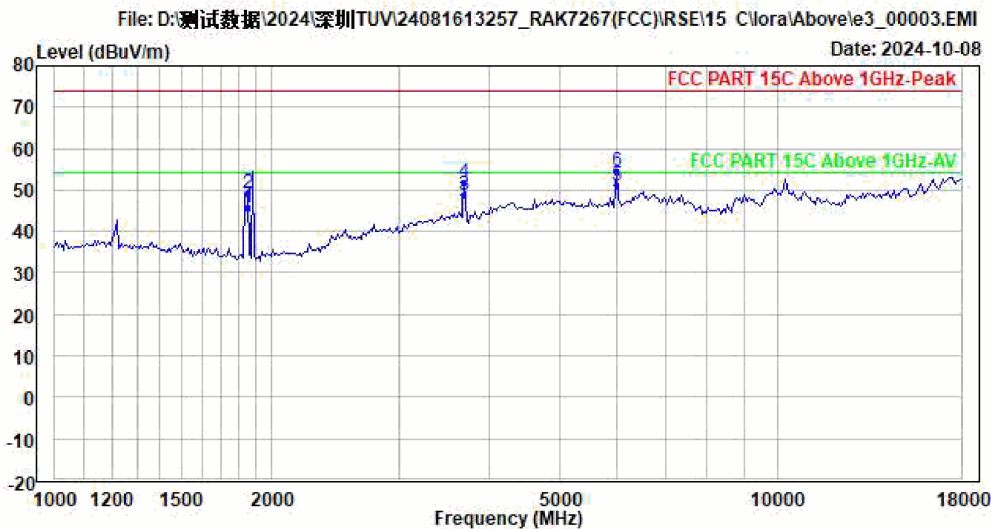


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC_120V/60Hz
Test Engineer : Bowie
Test Mode : TM1: Lora_925.1Mhz+WiFi+LTE_B2
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBUV/m	dBuV	dB/m	dB	dB	dB	dBUV/m	dB	
1	1847.783	45.88	56.16	30.53	6.44	0.00	47.25	54.00	-8.12	Average
2	1847.783	49.17	59.45	30.53	6.44	0.00	47.25	74.00	-24.83	Peak
3	3681.329	48.68	51.38	34.78	8.73	0.00	46.21	54.00	-5.32	Average
4	3681.329	51.95	54.65	34.78	8.73	0.00	46.21	74.00	-22.05	Peak
5 PP	5988.431	51.24	50.45	35.99	9.81	0.00	45.01	54.00	-2.76	Average
6 PK	5988.431	54.41	53.62	35.99	9.81	0.00	45.01	74.00	-19.59	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

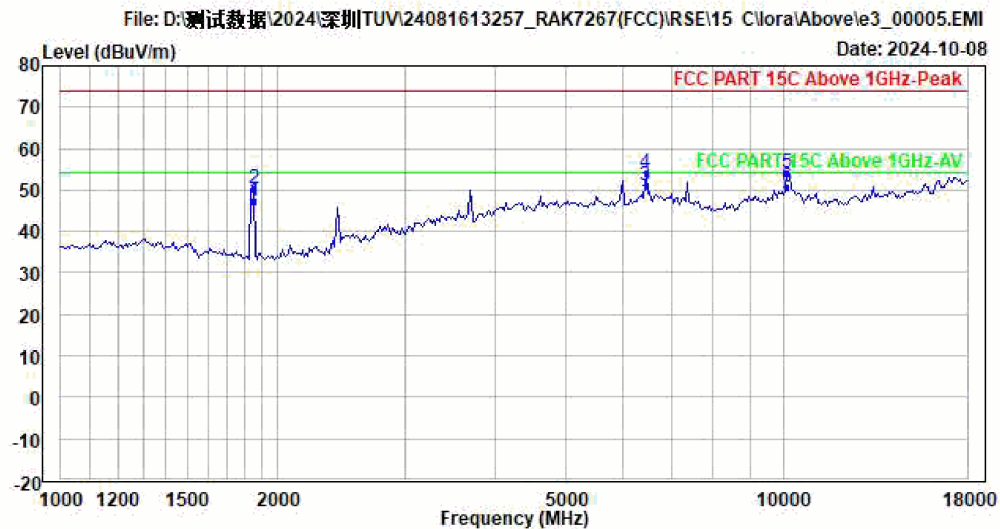


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC_120V/60Hz
Test Engineer : Bowie
Test Mode : TM2: Lora_925.1Mhz+WiFi+LTE_B5
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	1847.783	47.34	57.62	30.53	6.44	0.00	47.25	54.00	-6.66	Average
2	1847.783	50.24	60.52	30.53	6.44	0.00	47.25	74.00	-23.76	Peak
3	PP 6456.773	51.16	49.68	36.64	10.02	0.00	45.18	54.00	-2.84	Average
4	PK 6456.773	54.19	52.71	36.64	10.02	0.00	45.18	74.00	-19.81	Peak
5	10144.500	53.97	49.65	39.03	11.99	0.00	46.70	74.00	-20.03	Peak
6	10144.500	50.77	46.45	39.03	11.99	0.00	46.70	54.00	-3.23	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

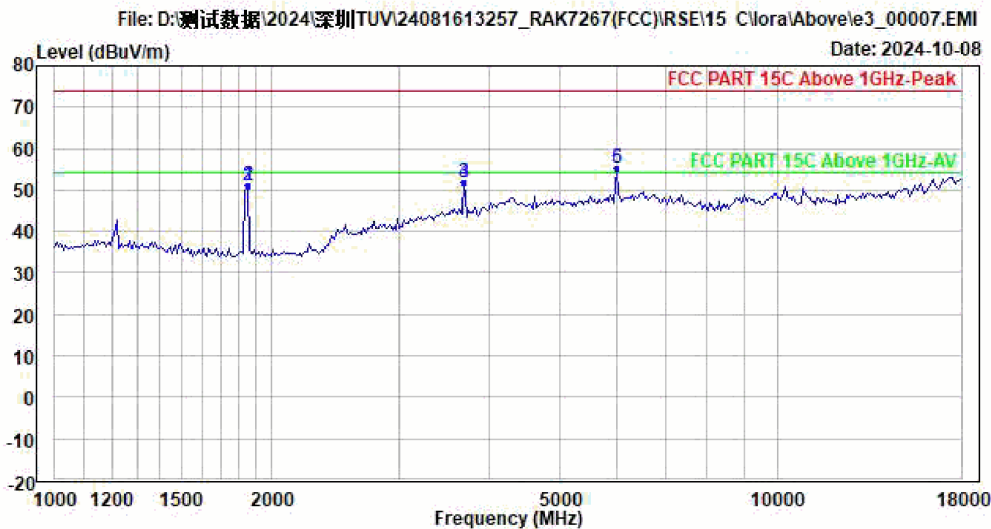

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)
Press : 100.2kpa
Product : WisGate Soho Pro
Model No. : RAK7267
Power Rating : AC_120V/60Hz
Test Engineer : Bowie
Test Mode : TM2: Lora_925.1Mhz+WiFi+LTE_B5
Remark :

	Freq	Level	Read Level	Ant Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBUV/m	dBUV	dB/m	dB	dB	dB	dBUV/m	dB	
1	1847.783	51.18	61.46	30.53	6.44	0.00	47.25	74.00	-22.82	Peak
2	1847.783	51.18	61.46	30.53	6.44	0.00	47.25	74.00	-22.82	Peak
3	3681.329	51.95	54.65	34.78	8.73	0.00	46.21	74.00	-22.05	Peak
4	3681.329	51.95	54.65	34.78	8.73	0.00	46.21	74.00	-22.05	Peak
5 PP	5988.431	55.41	54.62	35.99	9.81	0.00	45.01	74.00	-18.59	Peak
6	5988.431	55.41	54.62	35.99	9.81	0.00	45.01	74.00	-18.59	Peak