


Application Information	
AltVersion	6.245.351
TotalTime	4m 17s 934ms
AdditionalInfor	NULL
Model	E5216
Manufacturer: Shenzhen Hilmtrum Technology Co., Ltd	
Address: Building A, Wisdom Plaza, o. 4008 Qiaoxiang Road, Gaofa Community, Shale Street, Nanshan District, Shenzhen, China	
Antenna Max. Peak Gain	-0.05

ANT




Passive Test For BT											
Freq (MHz)	Eff1 (%)	Eff1 (dB)	Gain (dBi)	Gain (dBd)	DBTS (%)	DBTS (%)	Max (dB)	Min (dB)	Directivity (dBi)	Isomax (3dB)	AttB (dB)
2400	31.41	-5.03	-0.05	-2.2	0	0	-0.05	-14.84	5.03	0	46.86
2410	29.14	-5.36	-0.34	-2.49	0	0	-0.34	-14.41	5.36	0	46.9
2420	25.66	-5.91	-0.89	-3.04	0	0	-0.89	-16.78	5.91	0	47.28
2430	28.02	-5.53	-0.57	-2.72	0	0	-0.57	-19.4	5.53	0	46.18
2440	23.53	-6.28	-1.35	-3.5	0	0	-1.35	-23.37	6.28	0	47.18
2450	25.01	-6.02	-1.09	-3.24	0	0	-1.09	-25.21	6.02	0	46.85
2460	26.26	-5.8	-0.89	-3.04	0	0	-0.89	-20.87	5.8	0	47.72
2470	18.57	-7.31	-2.25	-4.4	0	0	-2.25	-18.54	7.31	0	47.96
2480	21.2	-6.74	-1.49	-3.64	0	0	-1.49	-20.18	6.74	0	47.56
2490	17.74	-7.51	-2.17	-4.32	0	0	-2.17	-24.05	7.51	0	47.05
2500	17.73	-7.51	-2.15	-4.3	0	0	-2.15	-23.72	7.51	0	46.63


2400.00MHz - 2500.00MHz Gain

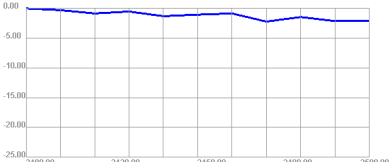


2400.00MHz - 2500.00MHz Efficiency

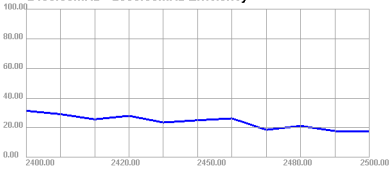


2400.000MHz




2400.000MHz H




2400.000MHz E1




2400.000MHz E2




2450.000MHz




2450.000MHz H




2450.000MHz E1




2450.000MHz E2




2500.000MHz



2500.000MHz H



2500.000MHz E1



2500.000MHz E2

