



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM170200069902  
Page: 1 of 195

## **TEST REPORT**

**Application No.:** SZEM1702000699CR  
**Applicant:** Creative Labs Pte. Ltd.  
**Address of Applicant:** 31 International Business Park #03-01 CREATIVE RESOURCE SINGAPORE 609921  
**Manufacturer:** Creative Labs Pte. Ltd.  
**Address of Manufacturer:** 31 International Business Park #03-01 CREATIVE RESOURCE SINGAPORE 609921  
**Equipment Under Test (EUT):**  
**EUT Name:** Creative X-Fi Sonic Carrier  
**Model No.:** MF8235  
**Trade mark:** CREATIVE  
**FCC ID:** IBAMF8235  
**Standards:** 47 CFR Part 15, Subpart C (2016)  
**Date of Receipt:** 2017-02-07  
**Date of Test:** 2017-02-16 to 2017-02-22  
**Date of Issue:** 2017-03-28

|                      |              |
|----------------------|--------------|
| <b>Test Result :</b> | <b>Pass*</b> |
|----------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2017-03-28 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |   |                    |
|--------------------------|--|---|--------------------|
| Authorized for issue by: |  |   |                    |
| Tested By                |  |    |                    |
|                          |  | Benson Wang /Project Engineer   | 2017-03-22<br>Date |
| Checked By               |  |  |                    |
|                          |  | Eric Fu /Reviewer   | 2017-03-28<br>Date |



## 2 Test Summary

| Radio Spectrum Technical Requirement   |                                  |        |  |        |
|--|----------------------------------|--------|--|--------|
| Item   | Standard                         | Method | Requirement                                    | Result |
| Antenna Requirement  | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.203 & 15.247(c)   | Pass   |
| Other requirements<br>Frequency Hopping<br>Spread Spectrum<br>System Hopping<br>Sequence | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h) | Pass   |

| Radio Spectrum Matter Part                            |                                  |  |   |        |
|---|----------------------------------|--|---|--------|
| Item  | Standard                         | Method                                 | Requirement                               | Result |
| Conducted Disturbance at AC Power Line (150kHz-30MHz) | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.2         | 47 CFR Part 15, Subpart C 15.207          | Pass   |
| 20dB Bandwidth  | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.7       | 47 CFR Part 15, Subpart C 15.247(a)(1)    | Pass   |
| Conducted Peak Output Power                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.5       | 47 CFR Part 15, Subpart C 15.247(b)(1)    | Pass   |
| Carrier Frequencies Separation                        | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.2       | 47 CFR Part 15, Subpart C 15.247a(1)      | Pass   |
| Hopping Channel Number                                | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.3       | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | Pass   |
| Dwell Time  | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.4       | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | Pass   |
| Conducted Spurious Emissions                          | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.8       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Radiated Spurious Emissions                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Emissions which fall in the restricted bands | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.10.5      | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Conducted Band Edges Measurement                      | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.6       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |



### 3 Contents

|  | Page |
|--|------|
| 1 COVER PAGE .....   | 1    |
| 2 TEST SUMMARY .....   | 3    |
| 3 CONTENTS .....   | 4    |
| 4 GENERAL INFORMATION .....  | 6    |
| 4.1 DETAILS OF E.U.T. ....   | 6    |
| 4.2 DESCRIPTION OF SUPPORT UNITS .....   | 6    |
| 4.3 MEASUREMENT UNCERTAINTY .....  | 7    |
| 4.4 TEST LOCATION .....  | 8    |
| 4.5 TEST FACILITY .....  | 8    |
| 4.6 DEVIATION FROM STANDARDS .....   | 8    |
| 4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....                                       | 8    |
| 5 EQUIPMENT LIST .....   | 9    |
| 6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....   | 11   |
| 6.1 ANTENNA REQUIREMENT .....  | 11   |
| 6.1.1 Test Requirement: .....  | 11   |
| 6.1.2 Conclusion .....   | 11   |
| 6.2 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM HOPPING SEQUENCE ..... | 12   |
| 6.2.1 Test Requirement: .....  | 12   |
| 6.2.2 Conclusion .....   | 12   |
| 7 RADIO SPECTRUM MATTER TEST RESULTS .....   | 14   |
| 7.1 CONDUCTED DISTURBANCE AT AC POWER LINE(150kHz-30MHz) .....                         | 14   |
| 7.1.1 E.U.T. Operation .....   | 15   |
| 7.1.2 Test Setup Diagram .....   | 15   |
| 7.1.3 Measurement Data .....   | 15   |
| 7.2 20dB BANDWIDTH .....   | 20   |
| 7.2.1 E.U.T. Operation .....   | 20   |
| 7.2.2 Test Setup Diagram .....   | 20   |
| 7.2.3 Measurement Data .....   | 20   |
| 7.3 CONDUCTED PEAK OUTPUT POWER .....  | 21   |
| 7.3.1 E.U.T. Operation .....   | 21   |
| 7.3.2 Test Setup Diagram .....   | 21   |
| 7.3.3 Measurement Data .....   | 21   |
| 7.4 CARRIER FREQUENCIES SEPARATION .....   | 22   |
| 7.4.1 E.U.T. Operation .....   | 22   |
| 7.4.2 Test Setup Diagram .....   | 22   |
| 7.4.3 Measurement Data .....   | 22   |
| 7.5 HOPPING CHANNEL NUMBER .....   | 23   |
| 7.5.1 E.U.T. Operation .....   | 23   |
| 7.5.2 Test Setup Diagram .....   | 23   |
| 7.5.3 Measurement Data .....   | 23   |
| 7.6 DWELL TIME .....   | 24   |
| 7.6.1 E.U.T. Operation .....   | 24   |
| 7.6.2 Test Setup Diagram .....   | 24   |
| 7.6.3 Measurement Data .....   | 24   |
| 7.7 CONDUCTED SPURIOUS EMISSIONS .....   | 25   |



|        |  |         |
|--------|--|---------|
| 7.7.1  | E.U.T. Operation.....  | 25      |
| 7.7.2  | Test Setup Diagram.....  | 25      |
| 7.7.3  | Measurement Data.....  | 25      |
| 7.8    | RADIATED SPURIOUS EMISSIONS .....                                    | 26      |
| 7.8.1  | E.U.T. Operation.....  | 27      |
| 7.8.2  | Test Setup Diagram.....  | 27      |
| 7.8.3  | Measurement Data.....  | 28      |
|        | Transmitter Emission above 1GHz.....                                 | 35      |
| 7.9    | RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....           | 41      |
| 7.9.1  | E.U.T. Operation.....  | 41      |
| 7.9.2  | Test Setup Diagram.....  | 42      |
| 7.9.3  | Measurement Data.....  | 43      |
| 7.10   | CONDUCTED BAND EDGES MEASUREMENT .....                               | 52      |
| 7.10.1 | E.U.T. Operation .....   | 52      |
| 7.10.2 | Test Setup Diagram.....  | 52      |
| 7.10.3 | Measurement Data .....   | 52      |
| 8      | PHOTOGRAPHS.....   | 53      |
| 8.1    | CONDUCTED DISTURBANCE AT AC POWER LINE(150kHz-30MHz) TEST SETUP..... | 53      |
| 8.2    | RADIATED SPURIOUS EMISSIONS TEST SETUP.....                          | 54      |
| 8.3    | EUT CONSTRUCTIONAL DETAILS .....                                     | 55      |
| 9      | APPENDIX.....  | 56      |
| 9.1    | APPENDIX 15.247 .....  | 56      |
| 9.1.1  | BM880 15.247.....  | 56      |
| 9.1.2  | CDW-B18821A-00 BT 15.247.....  | 126-195 |



## 4 General Information

### 4.1 Details of E.U.T.

|                       |   |
|-----------------------|---|
| Power supply:         | AC 120V/60Hz  |
| Cable:                | AC cable for MF8235: 162cm unshielded with one ferrite core   |
| Operation Frequency:  | 2402MHz~2480MHz   |
| Bluetooth Version:    | V 4.1 single mode +EDR (BM880)<br>V 4.0 Dual mode +EDR (CDW-B18821A-00)<br>This report is for BT Classics |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS)   |
| Modulation Type:      | GFSK, $\pi/4$ DQPSK, 8DPSK  |
| Number of Channel:    | 79  |
| Hopping Channel Type: | Adaptive Frequency Hopping systems  |
| Sample Type:          | Fixed production  |
| Antenna Type:         | PIFA  |
| Antenna Gain:         | 3dBi  |

### 4.2 Description of Support Units

The EUT has been tested as an independent unit.



#### 4.3 Measurement Uncertainty

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | 7.25 x 10 <sup>-8</sup> |
| 2   | Timeout                         | 2s                      |
| 3   | Duty cycle                      | 0.37%                   |
| 4   | Occupied Bandwidth              | 3%                      |
| 5   | RF conducted power              | 0.75dB                  |
| 6   | RF power density                | 2.84dB                  |
| 7   | Conducted Spurious emissions    | 0.75dB                  |
| 8   | RF Radiated power               | 4.5dB (below 1GHz)      |
|     |                                 | 4.8dB (above 1GHz)      |
| 9   | Radiated Spurious emission test | 4.5dB (30MHz-1GHz)      |
|     |                                 | 4.8dB (1GHz-18GHz)      |
| 10  | Temperature test                | 1 °C                    |
| 11  | Humidity test                   | 3%                      |
| 12  | Supply voltages                 | 1.5%                    |
| 13  | Time                            | 3%                      |



#### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None





## 5 Equipment List

| Conducted Disturbance at AC Power Line(150kHz-30MHz) |                                    |                 |              |            |              |
|--|------------------------------------|-----------------|--------------|------------|--------------|
| Equipment  | Manufacturer                       | Model No        | Inventory No | Cal Date   | Cal Due Date |
| Shielding Room                                       | ZhongYu Electron                   | GB-88           | SEM001-06    | 2016-05-13 | 2017-05-13   |
| LISN   | Rohde & Schwarz                    | ENV216          | SEM007-01    | 2016-10-09 | 2017-10-09   |
| LISN   | ETS-LINDGREN                       | 3816/2          | SEM007-02    | 2016-04-25 | 2017-04-25   |
| 8 Line ISN   | Fischer Custom Communications Inc. | FCC-TLISN-T8-02 | EMC0120      | 2016-09-28 | 2017-09-28   |
| 4 Line ISN   | Fischer Custom Communications Inc. | FCC-TLISN-T4-02 | EMC0121      | 2016-09-28 | 2017-09-28   |
| 2 Line ISN   | Fischer Custom                     | FCC-TLISN-T2-02 | EMC0122      | 2016-09-28 | 2017-09-28   |

| Conducted RF      |                 |          |              |            |              |
|-------------------|-----------------|----------|--------------|------------|--------------|
| Equipment         | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply   | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator  | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter       | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |

| RE in Chamber                     |                          |                   |               |                           |                               |
|-----------------------------------|--------------------------|-------------------|---------------|---------------------------|-------------------------------|
| Test Equipment                    | Manufacturer             | Model No.         | Inventory No. | Cal. Date<br>(yyyy-mm-dd) | Cal. Due date<br>(yyyy-mm-dd) |
| 3m Semi-Anechoic Chamber          | AUDIX                    | N/A               | SEM001-02     | 2016-05-13                | 2017-05-13                    |
| EXA Spectrum Analyzer             | Agilent Technologies Inc | N9010A            | SEM004-09     | 2016-07-19                | 2017-07-19                    |
| BiConiLog Antenna<br>(26-3000MHz) | ETS-Lindgren             | 3142C             | SEM003-02     | 2014-11-15                | 2017-11-15                    |
| Amplifier<br>(0.1-1300MHz)        | HP                       | 8447D             | SEM005-02     | 2016-10-09                | 2017-10-09                    |
| Horn Antenna<br>(1-18GHz)         | Rohde & Schwarz          | HF907             | SEM003-07     | 2015-06-14                | 2018-06-14                    |
| Horn Antenna<br>(18-26GHz)        | ETS-Lindgren             | 3160              | SEM003-12     | 2014-11-24                | 2017-11-24                    |
| Horn Antenna(26GHz-40GHz)         | A.H.Systems, inc.        | SAS-573           | SEM003-13     | 2015-02-12                | 2018-02-12                    |
| Low Noise Amplifier               | Black Diamond Series     | BDLNA-0118-352810 | SEM005-05     | 2016-10-09                | 2017-10-09                    |
| Band filter                       | Amindeon                 | Asi 3314          | SEM023-01     | N/A                       | N/A                           |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170200069902

Page: 10 of 195

| <b>RE in Chamber</b>               |                      |                  |                      |                                   |                                       |
|------------------------------------|----------------------|------------------|----------------------|-----------------------------------|---------------------------------------|
| <b>Test Equipment</b>              | <b>Manufacturer</b>  | <b>Model No.</b> | <b>Inventory No.</b> | <b>Cal. Date<br/>(yyyy-mm-dd)</b> | <b>Cal. Due date<br/>(yyyy-mm-dd)</b> |
| 10m Semi-Anechoic Chamber          | SAEMC                | FSAC1018         | SEM001-03            | 2016-05-13                        | 2017-05-13                            |
| EMI Test Receiver<br>(9k-7GHz)     | Rohde & Schwarz      | ESR              | SEM004-03            | 2016-04-25                        | 2017-04-25                            |
| Trilog-Broadband Antenna(30M-1GHz) | Schwarzbeck          | VULB9168         | SEM003-18            | 2016-06-29                        | 2019-06-29                            |
| Pre-amplifier                      | Sonoma Instrument Co | 310N             | SEM005-03            | 2016-07-06                        | 2017-07-06                            |
| Loop Antenna                       | ETS-Lindgren         | 6502             | SEM003-08            | 2015-08-14                        | 2018-08-14                            |

| <b>General used equipment</b>   |   |                 |                     |                 |                     |
|---------------------------------|---|-----------------|---------------------|-----------------|---------------------|
| <b>Equipment</b>                | <b>Manufacturer</b>                       | <b>Model No</b> | <b>Inventory No</b> | <b>Cal Date</b> | <b>Cal Due Date</b> |
| Humidity/ Temperature Indicator | Shanghai Meteorological Industry Factory  | ZJ1-2B          | SEM002-03           | 2016-10-12      | 2017-10-12          |
| Humidity/ Temperature Indicator | Shanghai Meteorological Industry Factory  | ZJ1-2B          | SEM002-04           | 2016-10-12      | 2017-10-12          |
| Humidity/ Temperature Indicator | Mingle                                    | N/A             | SEM002-08           | 2016-10-12      | 2017-10-12          |
| Barometer                       | Changchun Meteorological Industry Factory | DYM3            | SEM002-01           | 2016-05-18      | 2017-05-18          |

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

#### 6.1.2 Conclusion


Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna(BM880,CDW-B18821A-00)

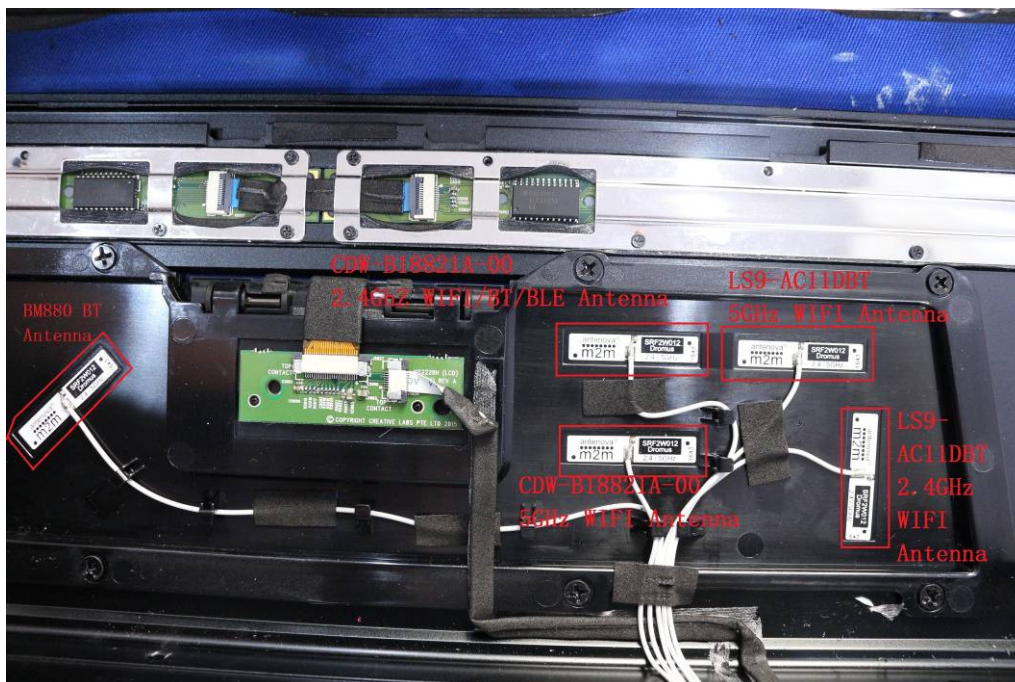

The antenna uses a unique coupling to the intentional radiator and no consideration of replacement..  
The best case gain of the antenna is 3dBi.

## 6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

### 6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

### 6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.


- > Number of shift register stages: 9
- > Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- > Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

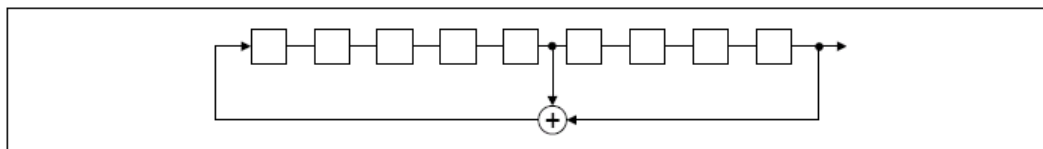

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

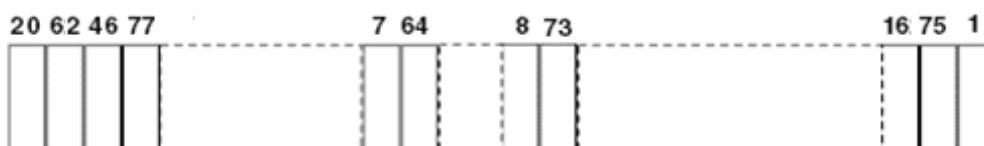



Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individ



## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Disturbance at AC Power Line(150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz) | Conducted limit(dBμV) |           |
|----------------------------|-----------------------|-----------|
|                            | Quasi-peak            | Average   |
| 0.15-0.5                   | 66 to 56*             | 56 to 46* |
| 0.5-5                      | 56                    | 46        |
| 5-30                       | 60                    | 50        |

\*Decreases with the logarithm of the frequency.



### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar


a: BT TX (BM880): keep the EUT transmitting mode.

Pretest these mode to find the worst case: h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.  
 (Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.)

The worst case for final test: a: BT TX (BM880): keep the EUT transmitting mode.  
 h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.  
 (Through Pre-scan, find the DH1 of data type and GFSK modulation at the lowest channel is the worst case.)

Only the worst case is recorded in the report.


### 7.1.2 Test Setup Diagram

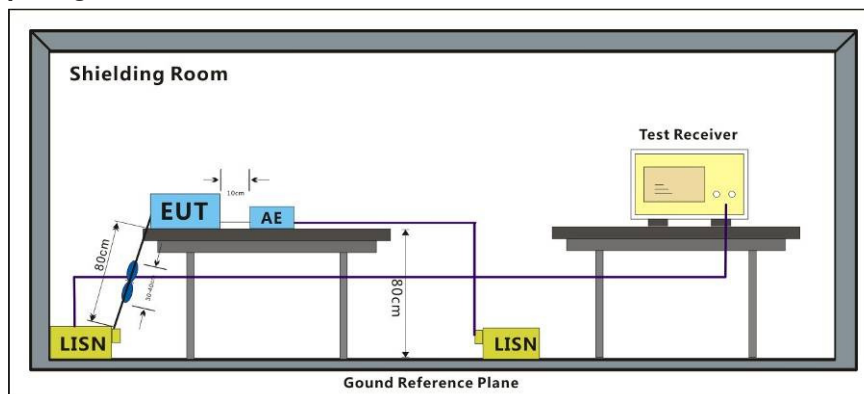

### 7.1.3 Measurement Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Mode:a; Line:Live Line

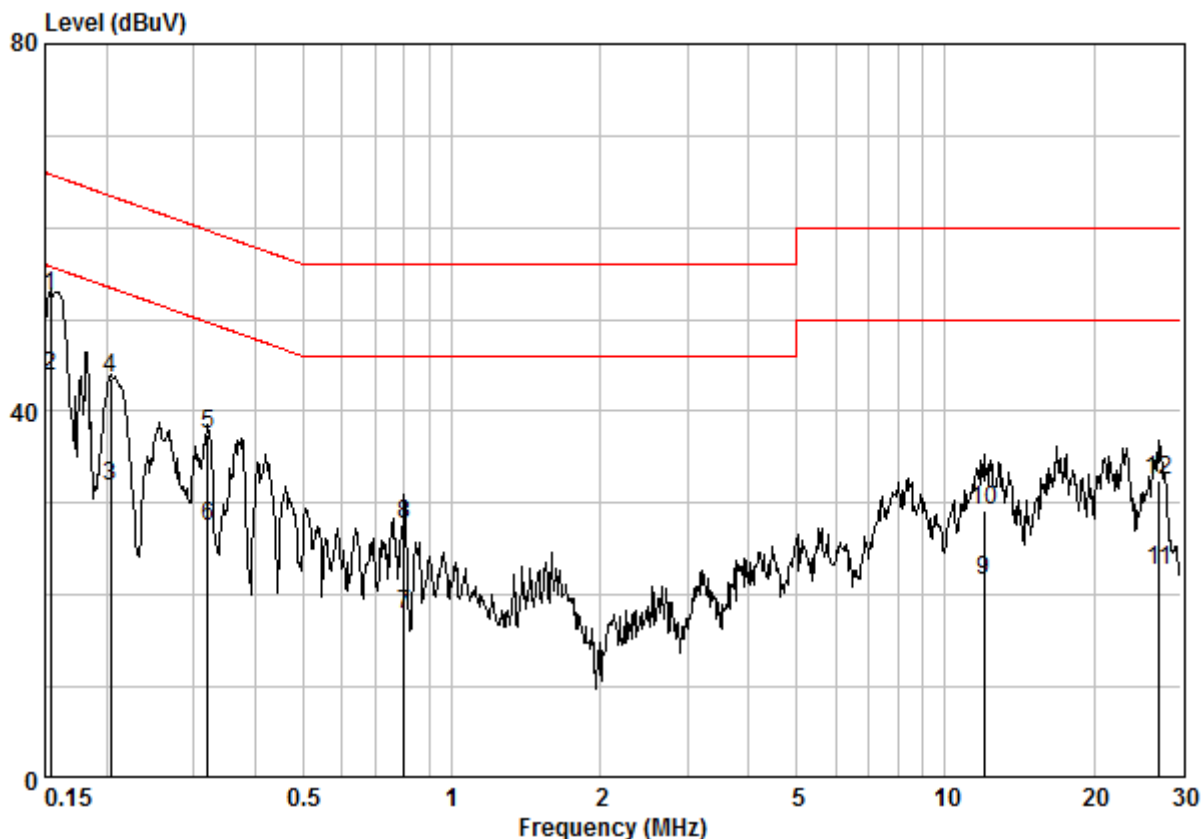


Site : Shielding Room  
Condition : CE LINE  
Job No. : 00699CR  
Test Mode : a

|    | Freq    | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|----|---------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz     | dB         | dB          | dBuV       | dBuV  | dBuV       | dB         |         |
| 1  | 0.15403 | 0.02       | 9.64        | 42.78      | 52.44 | 65.78      | -13.34     | QP      |
| 2  | 0.15403 | 0.02       | 9.64        | 34.22      | 43.88 | 55.78      | -11.90     | AVERAGE |
| 3  | 0.20396 | 0.02       | 9.64        | 22.27      | 31.93 | 53.45      | -21.51     | AVERAGE |
| 4  | 0.20396 | 0.02       | 9.64        | 33.93      | 43.59 | 63.45      | -19.86     | QP      |
| 5  | 0.31999 | 0.02       | 9.64        | 27.82      | 37.48 | 59.71      | -22.23     | QP      |
| 6  | 0.31999 | 0.02       | 9.64        | 17.71      | 27.37 | 49.71      | -22.34     | AVERAGE |
| 7  | 0.80023 | 0.03       | 9.65        | 8.29       | 17.97 | 46.00      | -28.03     | AVERAGE |
| 8  | 0.80023 | 0.03       | 9.65        | 18.06      | 27.73 | 56.00      | -28.27     | QP      |
| 9  | 11.996  | 0.15       | 9.90        | 11.63      | 21.68 | 50.00      | -28.32     | AVERAGE |
| 10 | 11.996  | 0.15       | 9.90        | 19.16      | 29.21 | 60.00      | -30.79     | QP      |
| 11 | 27.127  | 0.15       | 10.40       | 12.19      | 22.75 | 50.00      | -27.25     | AVERAGE |
| 12 | 27.127  | 0.15       | 10.40       | 22.03      | 32.58 | 60.00      | -27.42     | QP      |




Mode:a; Line:Neutral Line

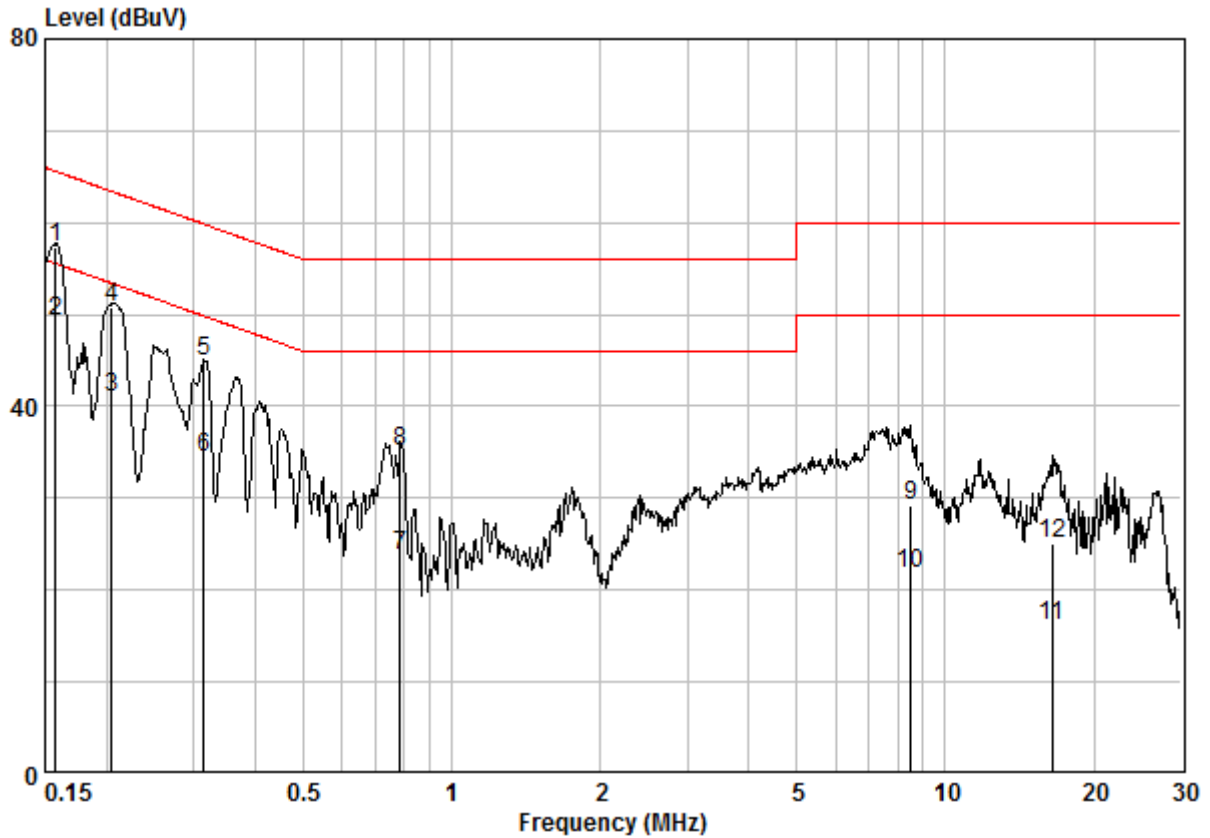

Site : Shielding Room  
Condition : CE NEUTRAL  
Job No. : 00699CR  
Test Mode : a

|    | Freq    | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|----|---------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz     | dB         | dB          | dBuV       | dBuV  | dBuV       | dB         |         |
| 1  | 0.15733 | 0.02       | 9.64        | 47.73      | 57.39 | 65.60      | -8.22      | QP      |
| 2  | 0.15733 | 0.02       | 9.64        | 39.59      | 49.24 | 55.60      | -6.36      | AVERAGE |
| 3  | 0.20505 | 0.02       | 9.63        | 31.26      | 40.91 | 53.40      | -12.49     | AVERAGE |
| 4  | 0.20505 | 0.02       | 9.63        | 41.03      | 50.68 | 63.40      | -12.72     | QP      |
| 5  | 0.31495 | 0.02       | 9.63        | 35.16      | 44.81 | 59.84      | -15.03     | QP      |
| 6  | 0.31495 | 0.02       | 9.63        | 24.88      | 34.53 | 49.84      | -15.31     | AVERAGE |
| 7  | 0.78761 | 0.03       | 9.64        | 14.04      | 23.71 | 46.00      | -22.29     | AVERAGE |
| 8  | 0.78761 | 0.03       | 9.64        | 25.40      | 35.07 | 56.00      | -20.93     | QP      |
| 9  | 8.501   | 0.11       | 9.81        | 19.31      | 29.23 | 60.00      | -30.77     | QP      |
| 10 | 8.501   | 0.11       | 9.81        | 11.90      | 21.82 | 50.00      | -28.18     | AVERAGE |
| 11 | 16.486  | 0.16       | 10.04       | 5.86       | 16.07 | 50.00      | -33.93     | AVERAGE |
| 12 | 16.486  | 0.16       | 10.04       | 14.85      | 25.05 | 60.00      | -34.95     | QP      |


Mode:h; Line:Live Line

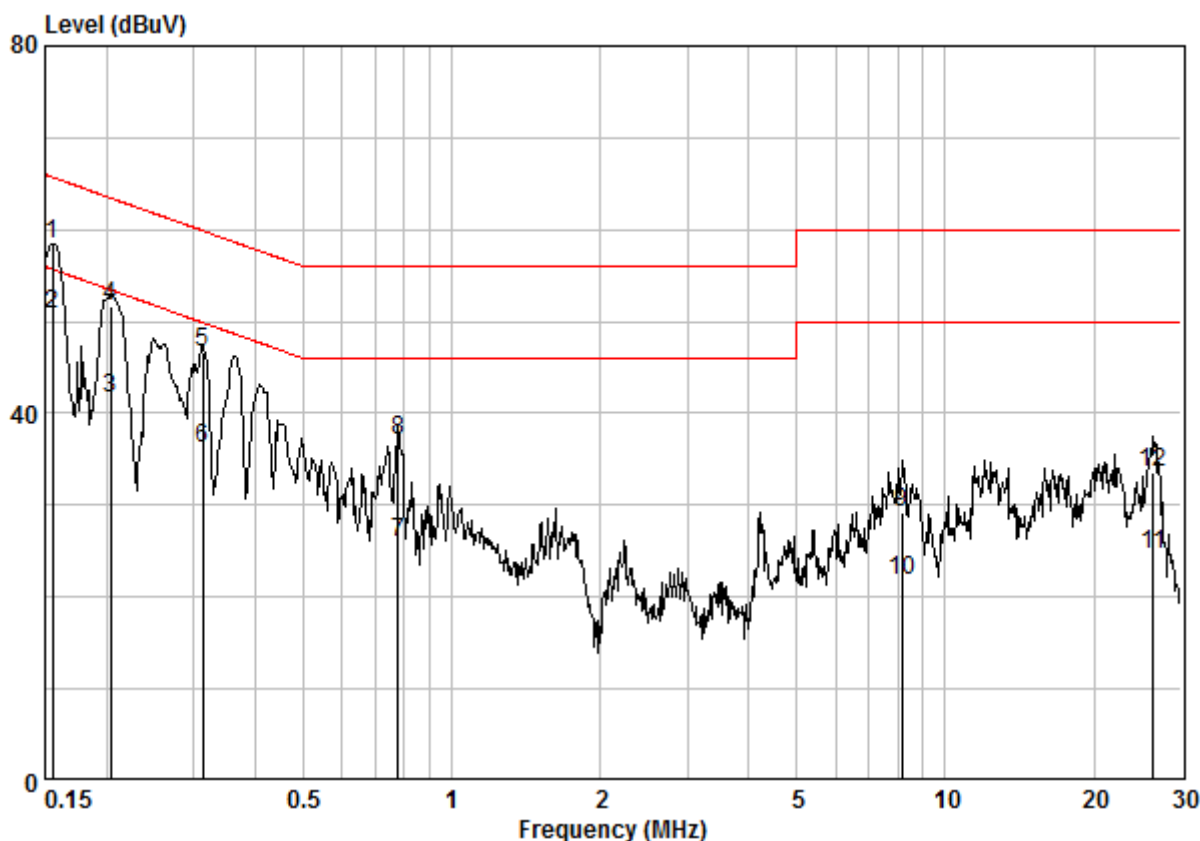

Site : Shielding Room  
Condition : CE LINE  
Job No. : 00699CR  
Test Mode : h

|    | Freq    | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|----|---------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz     | dB         | dB          | dBuV       | dBuV  | dBuV       | dB         |         |
| 1  | 0.15567 | 0.02       | 9.64        | 48.75      | 58.41 | 65.69      | -7.29      | QP      |
| 2  | 0.15567 | 0.02       | 9.64        | 41.19      | 50.85 | 55.69      | -4.85      | AVERAGE |
| 3  | 0.20396 | 0.02       | 9.64        | 32.05      | 41.71 | 53.45      | -11.74     | AVERAGE |
| 4  | 0.20396 | 0.02       | 9.64        | 41.92      | 51.58 | 63.45      | -11.87     | QP      |
| 5  | 0.31328 | 0.02       | 9.64        | 37.01      | 46.67 | 59.88      | -13.21     | QP      |
| 6  | 0.31328 | 0.02       | 9.64        | 26.57      | 36.23 | 49.88      | -13.65     | AVERAGE |
| 7  | 0.77931 | 0.03       | 9.65        | 16.26      | 25.94 | 46.00      | -20.06     | AVERAGE |
| 8  | 0.77931 | 0.03       | 9.65        | 27.39      | 37.07 | 56.00      | -18.93     | QP      |
| 9  | 8.148   | 0.10       | 9.81        | 19.24      | 29.16 | 60.00      | -30.84     | QP      |
| 10 | 8.148   | 0.10       | 9.81        | 11.87      | 21.79 | 50.00      | -28.21     | AVERAGE |
| 11 | 26.418  | 0.16       | 10.37       | 14.19      | 24.72 | 50.00      | -25.28     | AVERAGE |
| 12 | 26.418  | 0.16       | 10.37       | 23.01      | 33.54 | 60.00      | -26.46     | QP      |

Mode:h; Line:Neutral Line

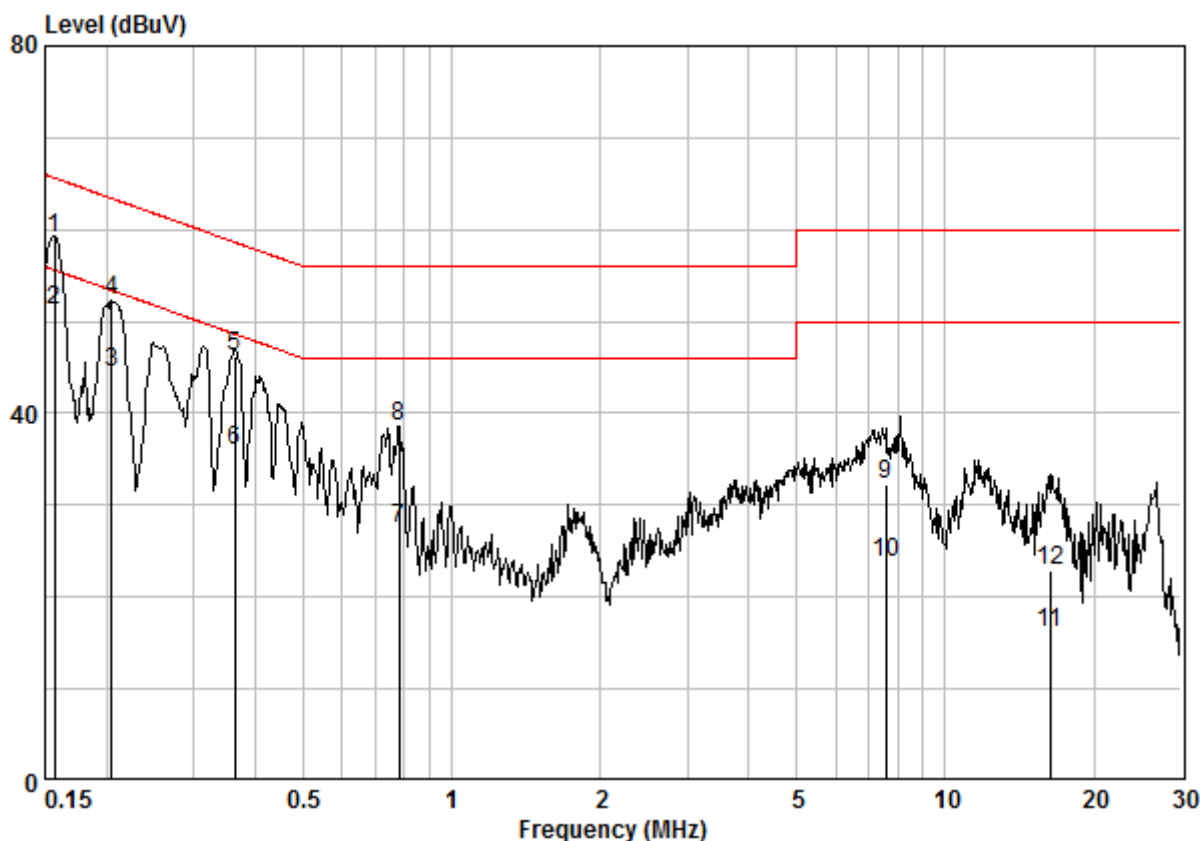

Site : Shielding Room  
Condition : CE NEUTRAL  
Job No. : 00699CR  
Test Mode : h

|    | Freq    | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|----|---------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz     | dB         | dB          | dBuV       | dBuV  | dBuV       | dB         |         |
| 1  | 0.15649 | 0.02       | 9.64        | 49.52      | 59.18 | 65.65      | -6.47      | QP      |
| 2  | 0.15649 | 0.02       | 9.64        | 41.52      | 51.18 | 55.65      | -4.47      | AVERAGE |
| 3  | 0.20505 | 0.02       | 9.63        | 34.73      | 44.38 | 53.40      | -9.02      | AVERAGE |
| 4  | 0.20505 | 0.02       | 9.63        | 42.68      | 52.33 | 63.40      | -11.08     | QP      |
| 5  | 0.36338 | 0.02       | 9.63        | 36.46      | 46.11 | 58.65      | -12.54     | QP      |
| 6  | 0.36338 | 0.02       | 9.63        | 26.34      | 35.99 | 48.65      | -12.66     | AVERAGE |
| 7  | 0.78345 | 0.03       | 9.64        | 17.75      | 27.41 | 46.00      | -18.59     | AVERAGE |
| 8  | 0.78345 | 0.03       | 9.64        | 28.83      | 38.49 | 56.00      | -17.51     | QP      |
| 9  | 7.566   | 0.09       | 9.78        | 22.33      | 32.20 | 60.00      | -27.80     | QP      |
| 10 | 7.566   | 0.09       | 9.78        | 13.87      | 23.75 | 50.00      | -26.25     | AVERAGE |
| 11 | 16.312  | 0.16       | 10.04       | 5.86       | 16.06 | 50.00      | -33.94     | AVERAGE |
| 12 | 16.312  | 0.16       | 10.04       | 12.73      | 22.93 | 60.00      | -37.07     | QP      |

## 7.2 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7

### 7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:  
 a: BT TX (BM880): keep the EUT transmitting mode.  
 h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

The worst case for final test:  
 a: BT TX (BM880): keep the EUT transmitting mode.  
 h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

(Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.)

### 7.2.2 Test Setup Diagram

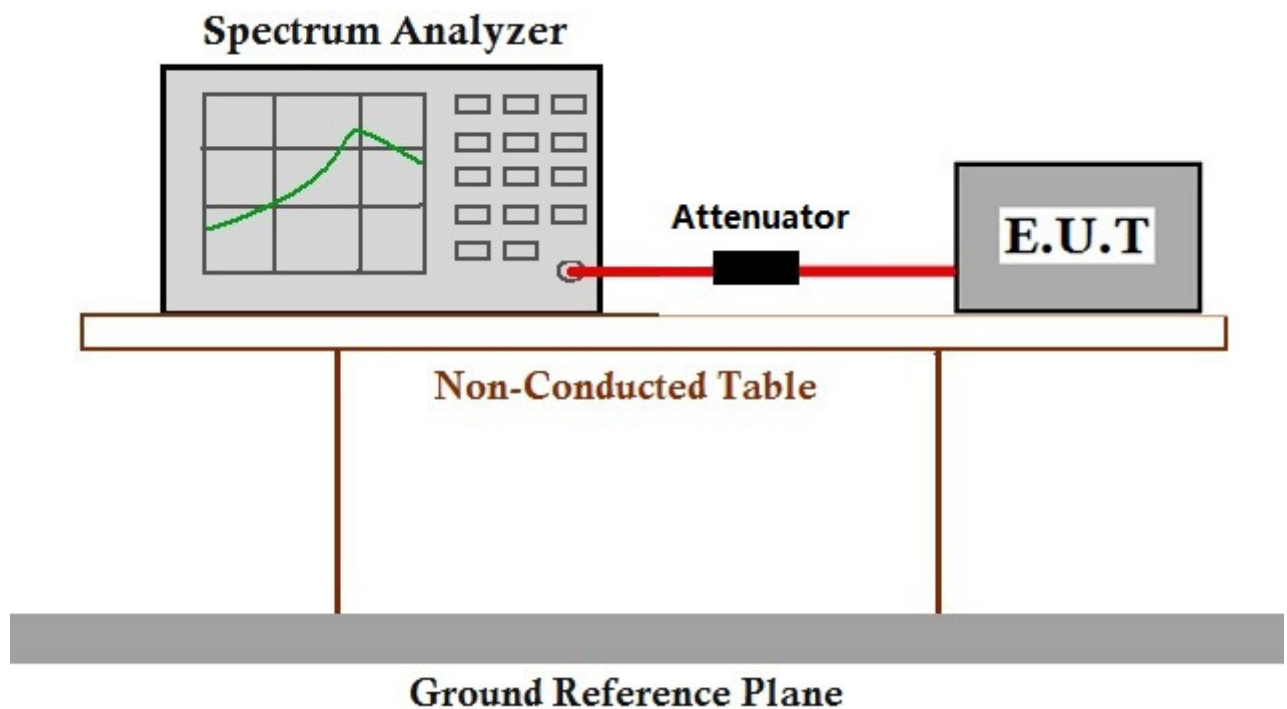

### 7.2.3 Measurement Data

The detailed test data see: Appendix 15.247

### 7.3 Conducted Peak Output Power

|                  |  |
|------------------|--|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247(b)(1)         |
| Test Method:     | ANSI C63.10 (2013) Section 7.8.5               |
| Limit:           | 0.125W for all other frequency hopping systems |

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:


- a: BT TX (BM880): keep the EUT transmitting mode.
- h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

The worst case for final test:

- a: BT TX (BM880): keep the EUT transmitting mode.
- h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

(Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.)

#### 7.3.2 Test Setup Diagram

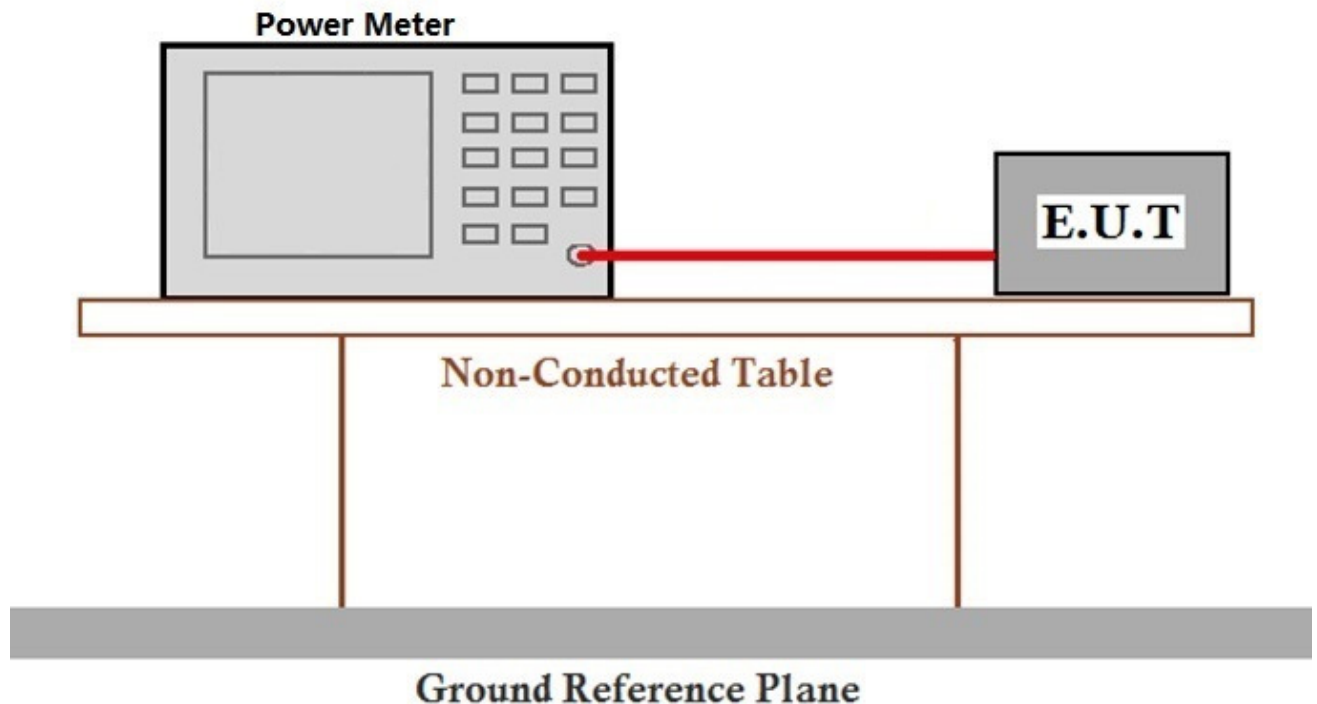

#### 7.3.3 Measurement Data

The detailed test data see: Appendix 15.247

## 7.4 Carrier Frequencies Separation

|                  |  |
|------------------|--|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247a(1)   |
| Test Method:     | ANSI C63.10 (2013) Section 7.8.2   |
| Limit:           | 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W |

### 7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:  
a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

The worst case for final test:  
a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

(Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.)

### 7.4.2 Test Setup Diagram

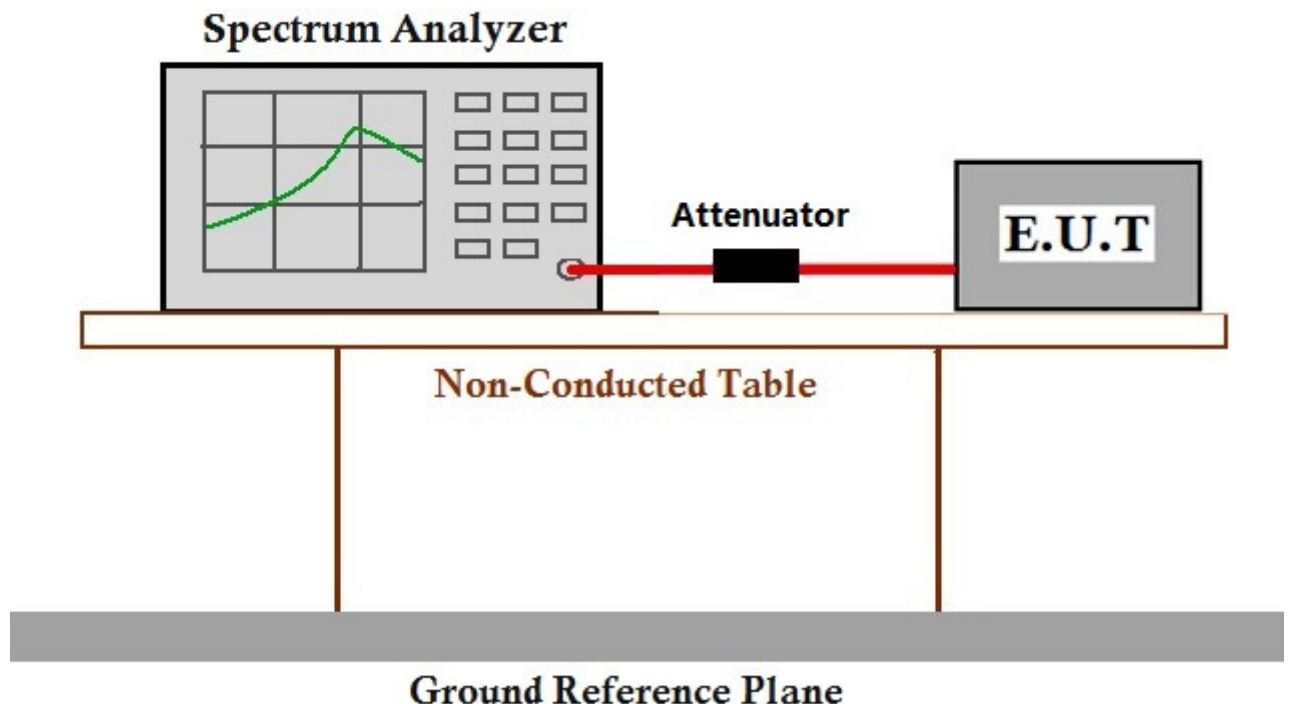

### 7.4.3 Measurement Data

The detailed test data see: Appendix 15.247

## 7.5 Hopping Channel Number

|                  |   |
|------------------|---|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247a(1)(iii) |
| Test Method:     | ANSI C63.10 (2013) Section 7.8.3          |
| Limit:           | At least 15 channels                      |

### 7.5.1 E.U.T. Operation

Operating Environment:

|              |         |           |         |                       |           |
|--------------|---------|-----------|---------|-----------------------|-----------|
| Temperature: | 23.0 °C | Humidity: | 56 % RH | Atmospheric Pressure: | 1020 mbar |
|--------------|---------|-----------|---------|-----------------------|-----------|


Pretest these mode to find the worst case:

|  |
|--|
| a: BT TX (BM880): keep the EUT transmitting mode.          |
| h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode. |

The worst case for final test:

|  |
|--|
| a: BT TX (BM880): keep the EUT transmitting mode.          |
| h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode. |
| (Hopping transmitting with all kind of modulation)         |

### 7.5.2 Test Setup Diagram

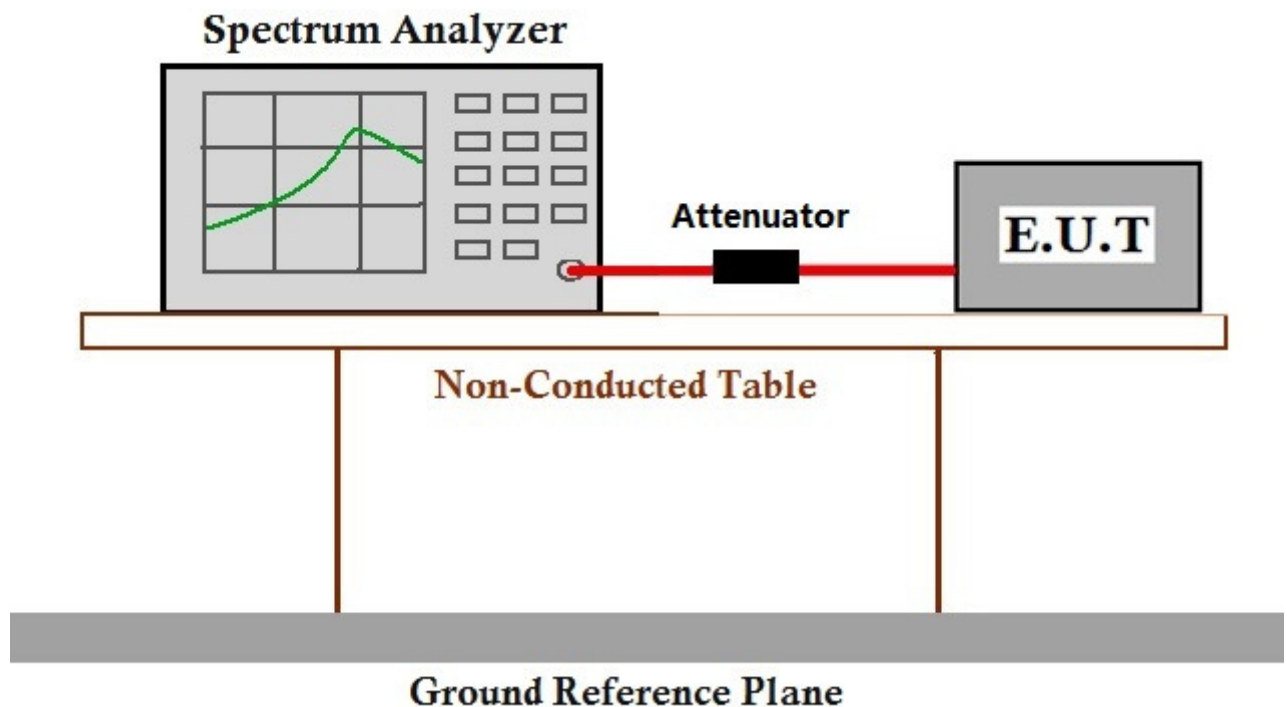

### 7.5.3 Measurement Data

The detailed test data see: Appendix 15.247



## 7.6 Dwell Time

|                  |   |
|------------------|---|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247a(1)(iii) |
| Test Method:     | ANSI C63.10 (2013) Section 7.8.4          |
| Limit:           | 0.4S within a period of 0.4S              |

### 7.6.1 E.U.T. Operation

Operating Environment:

|              |         |           |         |                       |           |
|--------------|---------|-----------|---------|-----------------------|-----------|
| Temperature: | 23.0 °C | Humidity: | 56 % RH | Atmospheric Pressure: | 1020 mbar |
|--------------|---------|-----------|---------|-----------------------|-----------|


Pretest these mode to find the worst case:

|  |
|--|
| a: BT TX (BM880): keep the EUT transmitting mode.          |
| h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode. |

The worst case for final test:

|   |
|---|
| a: BT TX (BM880): keep the EUT transmitting mode.                             |
| h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.                    |
| (Hopping transmitting with all kind of modulation and all kind of data type.) |

### 7.6.2 Test Setup Diagram

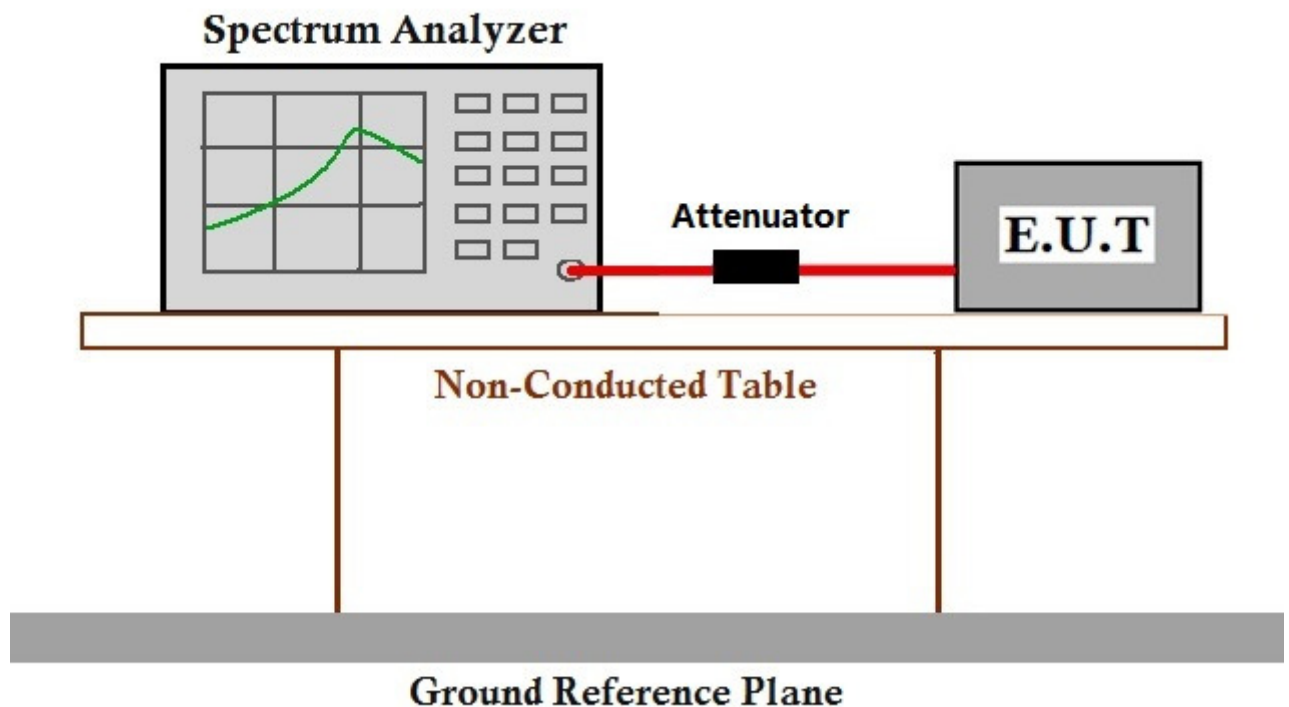

### 7.6.3 Measurement Data

The detailed test data see: Appendix 15.247



## 7.7 Conducted Spurious Emissions

|                  |   |
|------------------|---|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247(d)   |
| Test Method:     | ANSI C63.10 (2013) Section 7.8.8  |
| Limit:           | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |

### 7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:  
a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

The worst case for final test:  
a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.  
(Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.)

### 7.7.2 Test Setup Diagram

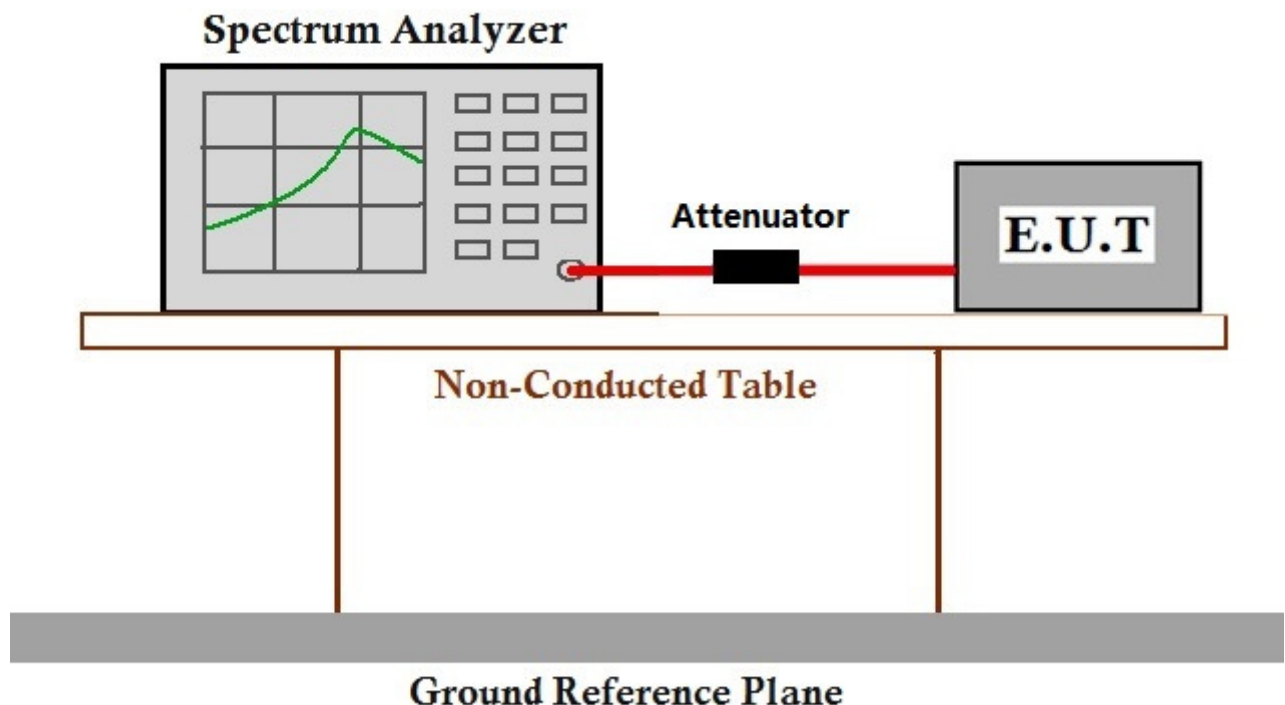

### 7.7.3 Measurement Data

The detailed test data see: Appendix 15.247



## 7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 10m

Limit:

| Frequency   | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|---|-------------------------------------|-------------------|------------|-----------------------------|
| 0.009MHz-0.490MHz   | 2400/F(kHz)                         | -                 | -          | 300                         |
| 0.490MHz-1.705MHz   | 24000/F(kHz)                        | -                 | -          | 30                          |
| 1.705MHz-30MHz  | 30                                  | -                 | -          | 30                          |
| 30MHz-88MHz   | 100                                 | 40.0              | Quasi-peak | 3                           |
| 88MHz-216MHz  | 150                                 | 43.5              | Quasi-peak | 3                           |
| 216MHz-960MHz   | 200                                 | 46.0              | Quasi-peak | 3                           |
| 960MHz-1GHz   | 500                                 | 54.0              | Quasi-peak | 3                           |
| Above 1GHz  | 500                                 | 54.0              | Average    | 3                           |
| Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                     |                   |            |                             |

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C      Humidity: 54 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:

- a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

The worst case for final test:




- a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

(Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.

For below 1GHz part, through pre-scan, the worst case is the lowest channel.

Only the worst case is recorded in the report.)

### 7.8.2 Test Setup Diagram

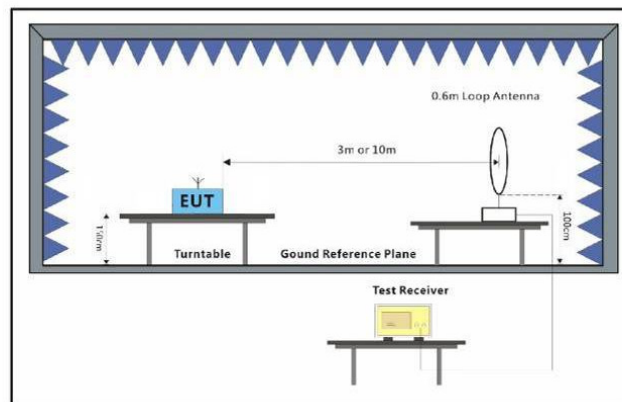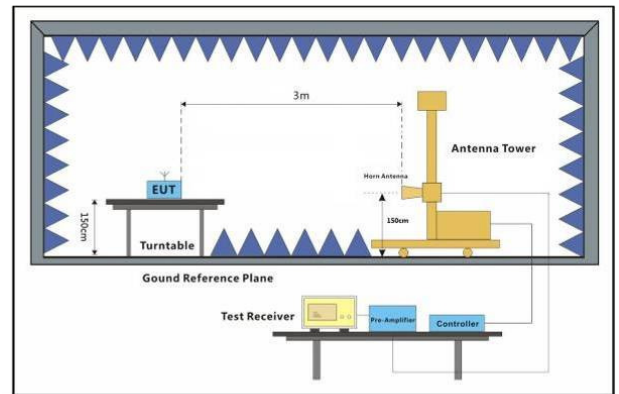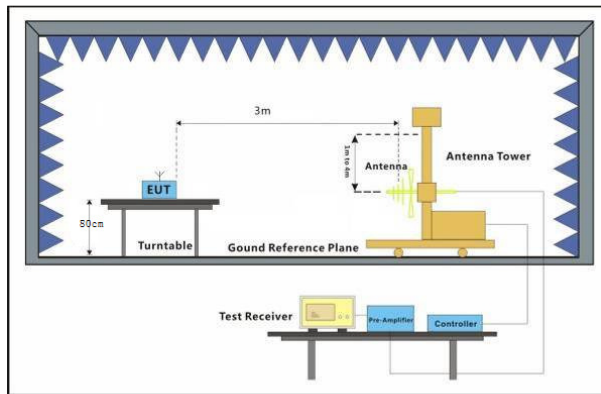



### **7.8.3 Measurement Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



### Radiated Emission below 1GHz

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

$L_3$ : Level @ 3m distance. Unit: uV/m;

$L_{10}$ : Level @ 10m distance. Unit: uV/m;

$D_3$ : 3m distance. Unit: m

$D_{10}$ : 10m distance. Unit: m

The level at 3m test distance is below:

Mode a:

| Frequency (MHz) | Level 10m (dBuV/m) @ | Level @ 10m (uV/m) @ | Level @ 3m (uV/m) | Level @ 3m (dBuV/m) | Limit @ 3m (dBuV/m) | Margin (dB) | Ant. Polarization |
|-----------------|----------------------|----------------------|-------------------|---------------------|---------------------|-------------|-------------------|
| 34.76           | 24.25                | 16.31                | 54.37             | 34.71               | 40.00               | -5.29       | V                 |
| 56.20           | 24.91                | 17.60                | 58.66             | 35.37               | 40.00               | -4.63       | V                 |
| 270.37          | 31.68                | 38.37                | 127.90            | 42.14               | 46.00               | -3.86       | V                 |
| 295.15          | 31.82                | 38.99                | 129.98            | 42.28               | 46.00               | -3.72       | V                 |
| 319.50          | 32.52                | 42.27                | 140.89            | 42.98               | 46.00               | -3.02       | V                 |
| 369.40          | 31.36                | 36.98                | 123.28            | 41.82               | 46.00               | -4.18       | V                 |
| 34.76           | 24.12                | 16.07                | 53.56             | 34.58               | 40.00               | -5.42       | H                 |
| 52.41           | 25.34                | 18.49                | 61.64             | 35.80               | 40.00               | -4.20       | H                 |
| 166.07          | 27.87                | 24.75                | 82.49             | 38.33               | 43.50               | -5.17       | H                 |
| 270.37          | 32.36                | 41.50                | 138.32            | 42.82               | 46.00               | -3.18       | H                 |
| 451.14          | 30.01                | 31.66                | 105.53            | 40.47               | 46.00               | -5.53       | H                 |
| 737.07          | 28.41                | 26.33                | 87.78             | 38.87               | 46.00               | -7.13       | H                 |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**


Report No.: SZEM170200069902

Page: 30 of 195

Mode h:

| Frequency (MHz) | Level @ 10m (dBuV/m) | Level @ 10m (uV/m) | Level @ 3m (uV/m) | Level @ 3m (dBuV/m) | Limit @ 3m (dBuV/m) | Margin (dB) | Ant. Polarization |
|-----------------|----------------------|--------------------|-------------------|---------------------|---------------------|-------------|-------------------|
| 49.53           | 26.23                | 20.49              | 68.29             | 36.69               | 40.00               | -3.31       | V                 |
| 73.10           | 25.65                | 19.16              | 63.88             | 36.11               | 40.00               | -3.89       | V                 |
| 129.47          | 28.63                | 27.01              | 90.03             | 39.09               | 43.50               | -4.41       | V                 |
| 270.37          | 29.59                | 30.16              | 100.55            | 40.05               | 46.00               | -5.95       | V                 |
| 295.15          | 31.81                | 38.95              | 129.83            | 42.27               | 46.00               | -3.73       | V                 |
| 451.14          | 28.39                | 26.27              | 87.57             | 38.85               | 46.00               | -7.15       | V                 |
| 34.76           | 26.43                | 20.97              | 69.88             | 36.89               | 40.00               | -3.11       | H                 |
| 73.10           | 24.97                | 17.72              | 59.07             | 35.43               | 40.00               | -4.57       | H                 |
| 150.01          | 22.38                | 13.15              | 43.84             | 32.84               | 43.50               | -10.66      | H                 |
| 270.37          | 26.08                | 20.14              | 67.12             | 36.54               | 46.00               | -9.46       | H                 |
| 451.14          | 26.39                | 20.87              | 69.56             | 36.85               | 46.00               | -9.15       | H                 |
| 566.62          | 29.28                | 29.11              | 97.02             | 39.74               | 46.00               | -6.26       | H                 |

|                 |   |          |
|-----------------|---|----------|
| 30MHz~1GHz (QP) |   |          |
| Test mode:      | a | Vertical |

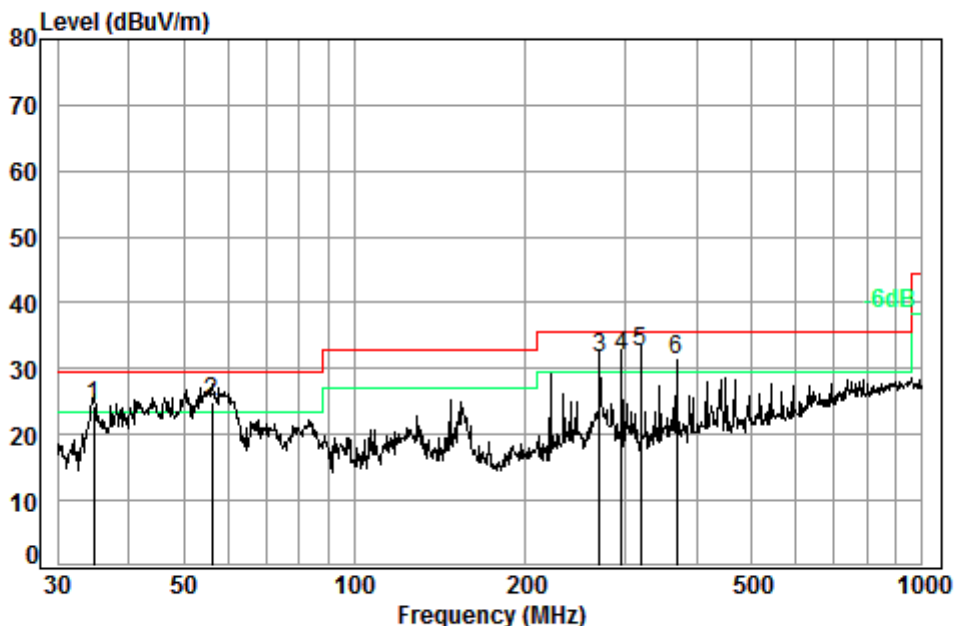

Condition: 10m VERTICAL


Job No. : 00699CR

Test Mode: a

|      | Freq   | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit |
|------|--------|------------|------------|---------------|------------|--------|------------|------------|
|      | MHz    | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 34.76  | 6.70       | 12.63      | 32.98         | 37.90      | 24.25  | 29.50      | -5.25      |
| 2    | 56.20  | 7.00       | 12.28      | 32.97         | 38.60      | 24.91  | 29.50      | -4.59      |
| 3    | 270.37 | 7.95       | 11.86      | 32.63         | 44.50      | 31.68  | 35.60      | -3.92      |
| 4    | 295.15 | 8.04       | 12.54      | 32.60         | 43.84      | 31.82  | 35.60      | -3.78      |
| 5 pp | 319.50 | 8.10       | 13.22      | 32.60         | 43.80      | 32.52  | 35.60      | -3.08      |
| 6    | 369.40 | 8.30       | 14.27      | 32.60         | 41.39      | 31.36  | 35.60      | -4.24      |



|            |   |            |
|------------|---|------------|
| Test mode: | a | Horizontal |
|------------|---|------------|

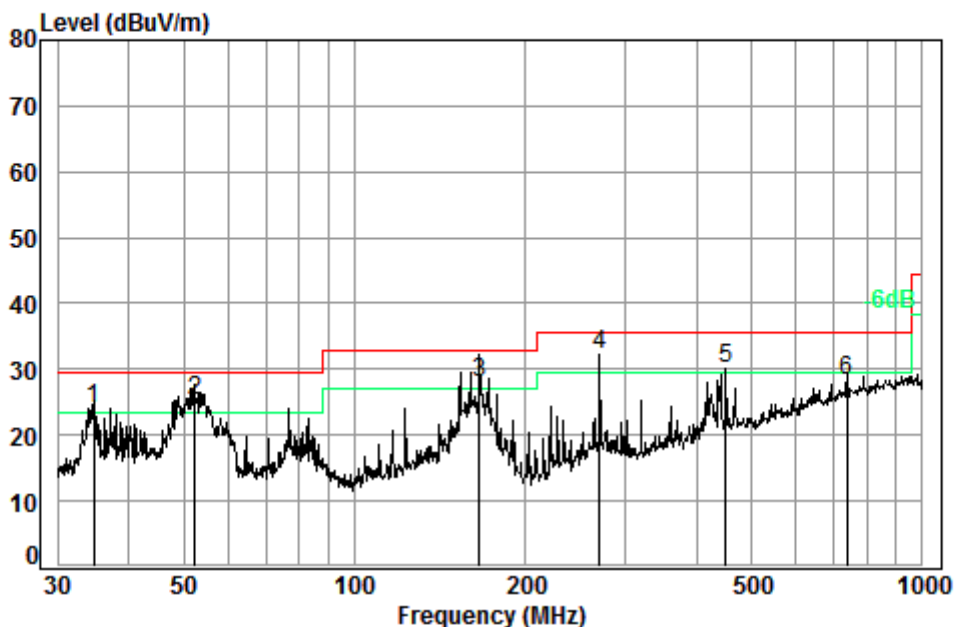

Condition: 10m HORIZONTAL

Job No. : 00699CR


Test Mode: a

|      | Freq   | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit |
|------|--------|------------|------------|---------------------|------------|--------|------------|------------|
|      | MHz    | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 34.76  | 6.70       | 12.63      | 32.98               | 37.77      | 24.12  | 29.50      | -5.38      |
| 2 qp | 52.41  | 6.95       | 12.58      | 32.99               | 38.80      | 25.34  | 29.50      | -4.16      |
| 3    | 166.07 | 7.50       | 12.79      | 32.73               | 40.31      | 27.87  | 33.00      | -5.13      |
| 4 pp | 270.37 | 7.95       | 11.86      | 32.63               | 45.18      | 32.36  | 35.60      | -3.24      |
| 5    | 451.14 | 8.43       | 16.19      | 32.60               | 37.99      | 30.01  | 35.60      | -5.59      |
| 6    | 737.07 | 9.20       | 20.61      | 32.60               | 31.20      | 28.41  | 35.60      | -7.19      |





|                 |   |          |
|-----------------|---|----------|
| 30MHz~1GHz (QP) |   |          |
| Test mode:      | h | Vertical |

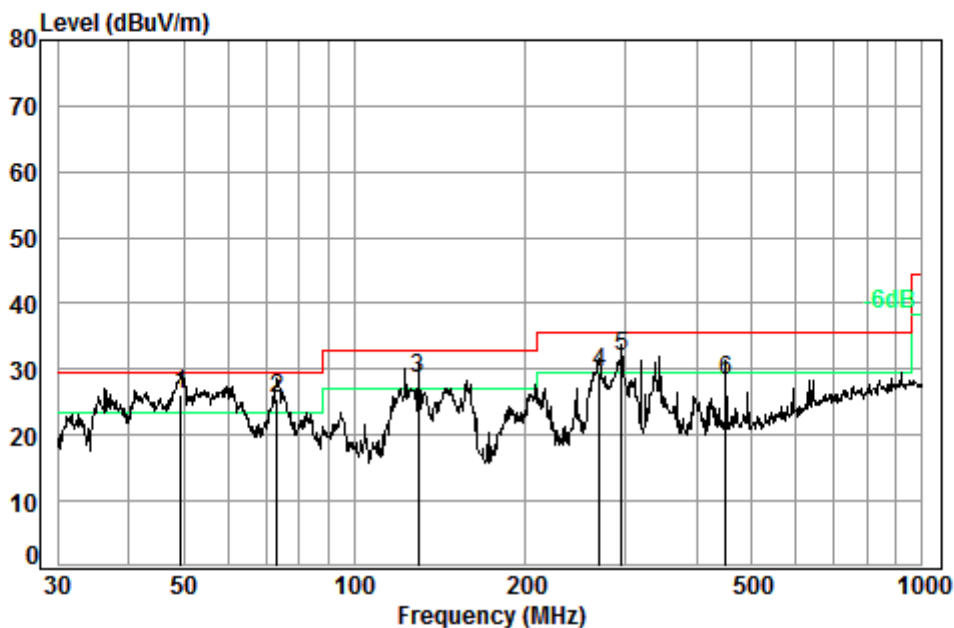

Condition: 10m VERTICAL


Job No. : 00699CR

Test Mode: h

|      |        | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |
|------|--------|-------|--------|--------|-------|--------|--------|-------|
|      | Freq   | Loss  | Factor | Factor | Level | Level  | Line   | Limit |
|      | MHz    | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |
| 1 pp | 49.53  | 6.89  | 12.79  | 33.00  | 39.55 | 26.23  | 29.50  | -3.27 |
| 2    | 73.10  | 6.96  | 9.57   | 32.89  | 42.01 | 25.65  | 29.50  | -3.85 |
| 3    | 129.47 | 7.35  | 12.00  | 32.76  | 42.04 | 28.63  | 33.00  | -4.37 |
| 4    | 270.37 | 7.95  | 11.86  | 32.63  | 42.41 | 29.59  | 35.60  | -6.01 |
| 5    | 295.15 | 8.04  | 12.54  | 32.60  | 43.83 | 31.81  | 35.60  | -3.79 |
| 6    | 451.14 | 8.43  | 16.19  | 32.60  | 36.37 | 28.39  | 35.60  | -7.21 |



|            |   |            |
|------------|---|------------|
| Test mode: | h | Horizontal |
|------------|---|------------|

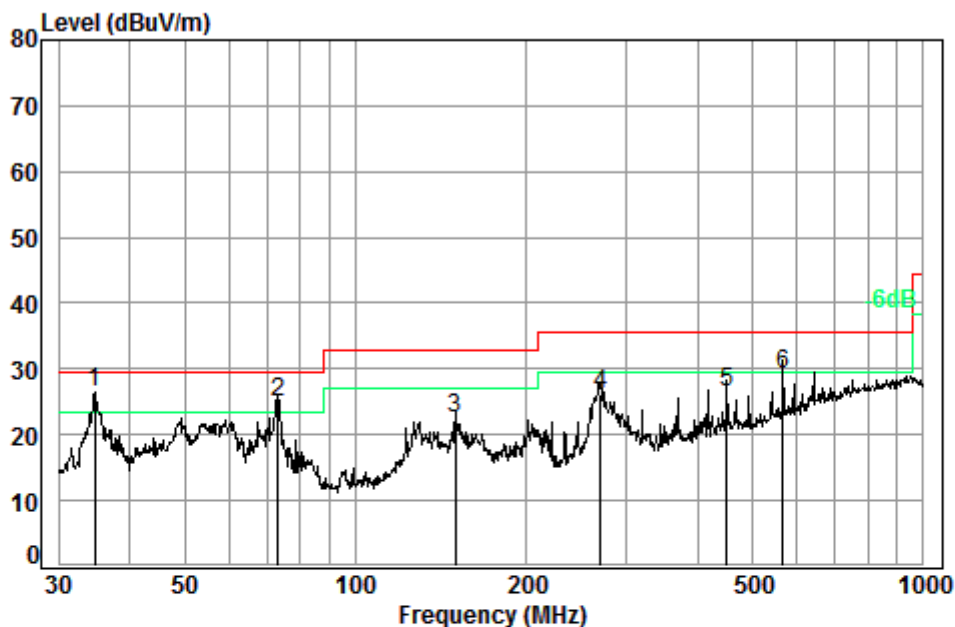

Condition: 10m HORIZONTAL

Job No. : 00699CR

Test Mode: h

|      |        | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |
|------|--------|-------|--------|--------|-------|--------|--------|--------|
|      | Freq   | Loss  | Factor | Factor | Level | Level  | Line   | Limit  |
|      | MHz    | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1 pp | 34.76  | 6.70  | 12.63  | 32.98  | 40.08 | 26.43  | 29.50  | -3.07  |
| 2    | 73.10  | 6.96  | 9.57   | 32.89  | 41.33 | 24.97  | 29.50  | -4.53  |
| 3    | 150.01 | 7.45  | 13.41  | 32.74  | 34.26 | 22.38  | 33.00  | -10.62 |
| 4    | 270.37 | 7.95  | 11.86  | 32.63  | 38.90 | 26.08  | 35.60  | -9.52  |
| 5    | 451.14 | 8.43  | 16.19  | 32.60  | 34.37 | 26.39  | 35.60  | -9.21  |
| 6    | 566.62 | 8.82  | 18.03  | 32.60  | 35.03 | 29.28  | 35.60  | -6.32  |



**Transmitter Emission above 1GHz**

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3808.951           | 32.91                        | 7.74                  | 37.98               | 44.37                      | 47.04             | 74                | -26.96                |
| 4804.000           | 34.10                        | 8.87                  | 38.40               | 41.65                      | 46.22             | 74                | -27.78                |
| 5836.872           | 34.29                        | 10.10                 | 38.33               | 45.07                      | 51.13             | 74                | -22.87                |
| 7206.000           | 35.60                        | 10.68                 | 37.11               | 42.31                      | 51.48             | 74                | -22.52                |
| 9608.000           | 37.10                        | 12.50                 | 35.10               | 37.96                      | 52.46             | 74                | -21.54                |
| 12261.500          | 37.70                        | 14.34                 | 36.23               | 37.44                      | 53.25             | 74                | -20.75                |

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3711.030           | 32.55                        | 7.71                  | 37.97               | 44.77                      | 47.06             | 74                | -26.94                |
| 4804.000           | 34.10                        | 8.87                  | 38.40               | 41.71                      | 46.28             | 74                | -27.72                |
| 5820.005           | 34.25                        | 10.06                 | 38.34               | 44.61                      | 50.58             | 74                | -23.42                |
| 7206.000           | 35.60                        | 10.68                 | 37.11               | 42.08                      | 51.25             | 74                | -22.75                |
| 9608.000           | 37.10                        | 12.50                 | 35.10               | 37.91                      | 52.41             | 74                | -21.59                |
| 12120.390          | 37.66                        | 14.46                 | 35.89               | 36.99                      | 53.22             | 74                | -20.78                |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170200069902

Page: 36 of 195

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:middle

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3831.060           | 32.93                        | 7.75                  | 37.98               | 46.36                      | 49.06             | 74                | -24.94                |
| 4882.000           | 34.18                        | 8.98                  | 38.44               | 42.67                      | 47.39             | 74                | -26.61                |
| 6078.201           | 34.74                        | 10.46                 | 38.22               | 44.41                      | 51.39             | 74                | -22.61                |
| 7323.000           | 35.54                        | 10.72                 | 37.01               | 42.49                      | 51.74             | 74                | -22.26                |
| 9764.000           | 37.10                        | 12.58                 | 35.02               | 38.23                      | 52.89             | 74                | -21.11                |
| 12067.890          | 37.63                        | 14.50                 | 35.76               | 37.05                      | 53.42             | 74                | -20.58                |

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:middle

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 4030.070           | 33.18                        | 7.85                  | 38.02               | 44.89                      | 47.90             | 74                | -26.10                |
| 4882.000           | 34.18                        | 8.98                  | 38.44               | 42.74                      | 47.46             | 74                | -26.54                |
| 6069.413           | 34.74                        | 10.47                 | 38.23               | 45.42                      | 52.40             | 74                | -21.60                |
| 7323.000           | 35.54                        | 10.72                 | 37.01               | 42.13                      | 51.38             | 74                | -22.62                |
| 9764.000           | 37.10                        | 12.58                 | 35.02               | 37.77                      | 52.43             | 74                | -21.57                |
| 12067.890          | 37.63                        | 14.50                 | 35.76               | 37.46                      | 53.83             | 74                | -20.17                |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170200069902

Page: 37 of 195

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3831.060           | 32.93                        | 7.75                  | 37.98               | 44.73                      | 47.43             | 74                | -26.57                |
| 4960.000           | 34.26                        | 9.09                  | 38.48               | 42.90                      | 47.77             | 74                | -26.23                |
| 6311.218           | 34.80                        | 10.16                 | 37.99               | 44.40                      | 51.37             | 74                | -22.63                |
| 7440.000           | 35.60                        | 10.77                 | 36.90               | 41.71                      | 51.18             | 74                | -22.82                |
| 9920.000           | 37.22                        | 12.67                 | 34.94               | 37.95                      | 52.90             | 74                | -21.10                |
| 12332.670          | 37.70                        | 14.29                 | 36.40               | 38.01                      | 53.60             | 74                | -20.40                |

Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:High

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3858.877           | 32.96                        | 7.76                  | 37.99               | 45.33                      | 48.06             | 74                | -25.94                |
| 4960.000           | 34.26                        | 9.09                  | 38.48               | 42.40                      | 47.27             | 74                | -26.73                |
| 6148.967           | 34.77                        | 10.37                 | 38.15               | 44.33                      | 51.32             | 74                | -22.68                |
| 7440.000           | 35.60                        | 10.77                 | 36.90               | 41.47                      | 50.94             | 74                | -23.06                |
| 9920.000           | 37.22                        | 12.67                 | 34.94               | 37.74                      | 52.69             | 74                | -21.31                |
| 12120.390          | 37.66                        | 14.46                 | 35.89               | 36.93                      | 53.16             | 74                | -20.84                |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170200069902

Page: 38 of 195

Mode:h; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3579.190           | 32.43                        | 7.66                  | 37.96               | 44.86                      | 46.99             | 74                | -27.01                |
| 4804.000           | 34.16                        | 8.87                  | 38.40               | 42.60                      | 47.23             | 74                | -26.77                |
| 5930.516           | 34.66                        | 10.37                 | 38.31               | 43.30                      | 50.02             | 74                | -23.98                |
| 7206.000           | 36.42                        | 10.68                 | 37.11               | 41.78                      | 51.77             | 74                | -22.23                |
| 9608.000           | 37.52                        | 12.50                 | 35.10               | 37.81                      | 52.73             | 74                | -21.27                |
| 12155.510          | 38.69                        | 14.43                 | 35.97               | 35.98                      | 53.13             | 74                | -20.87                |

Mode:h; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3831.060           | 33.15                        | 7.75                  | 37.98               | 44.45                      | 47.37             | 74                | -26.63                |
| 4804.000           | 34.16                        | 8.87                  | 38.40               | 41.63                      | 46.26             | 74                | -27.74                |
| 5769.698           | 34.57                        | 9.91                  | 38.35               | 43.95                      | 50.08             | 74                | -23.92                |
| 7206.000           | 36.42                        | 10.68                 | 37.11               | 41.65                      | 51.64             | 74                | -22.36                |
| 9608.000           | 37.52                        | 12.50                 | 35.10               | 37.30                      | 52.22             | 74                | -21.78                |
| 12067.890          | 38.64                        | 14.50                 | 35.76               | 35.98                      | 53.36             | 74                | -20.64                |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170200069902

Page: 39 of 195

Mode:h; Polarization:Horizontal; Modulation Type:GFSK; Channel:middle

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3615.625           | 32.54                        | 7.67                  | 37.96               | 44.11                      | 46.36             | 74                | -27.64                |
| 4882.000           | 34.30                        | 8.98                  | 38.44               | 41.40                      | 46.24             | 74                | -27.76                |
| 5939.103           | 34.66                        | 10.39                 | 38.31               | 43.59                      | 50.33             | 74                | -23.67                |
| 7323.000           | 36.37                        | 10.72                 | 37.01               | 41.22                      | 51.30             | 74                | -22.70                |
| 9764.000           | 37.55                        | 12.58                 | 35.02               | 37.38                      | 52.49             | 74                | -21.51                |
| 12085.370          | 38.65                        | 14.49                 | 35.80               | 36.08                      | 53.42             | 74                | -20.58                |

Mode:h; Polarization:Vertical; Modulation Type:GFSK; Channel:middle

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3786.970           | 33.03                        | 7.74                  | 37.98               | 43.65                      | 46.44             | 74                | -27.56                |
| 4882.000           | 34.30                        | 8.98                  | 38.44               | 42.05                      | 46.89             | 74                | -27.11                |
| 6193.614           | 34.86                        | 10.31                 | 38.11               | 43.23                      | 50.29             | 74                | -23.71                |
| 7323.000           | 36.37                        | 10.72                 | 37.01               | 41.24                      | 51.32             | 74                | -22.68                |
| 9764.000           | 37.55                        | 12.58                 | 35.02               | 37.60                      | 52.71             | 74                | -21.29                |
| 12279.260          | 38.77                        | 14.33                 | 36.27               | 36.42                      | 53.25             | 74                | -20.75                |



Mode:h; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3842.163           | 33.18                        | 7.76                  | 37.98               | 44.02                      | 46.98             | 74                | -27.02                |
| 4960.000           | 34.43                        | 9.09                  | 38.48               | 42.47                      | 47.51             | 74                | -26.49                |
| 6166.787           | 34.84                        | 10.34                 | 38.13               | 43.49                      | 50.54             | 74                | -23.46                |
| 7440.000           | 36.32                        | 10.77                 | 36.90               | 40.90                      | 51.09             | 74                | -22.91                |
| 9920.000           | 37.58                        | 12.67                 | 34.94               | 37.23                      | 52.54             | 74                | -21.46                |
| 12190.740          | 38.72                        | 14.40                 | 36.06               | 36.14                      | 53.20             | 74                | -20.80                |

Mode:h; Polarization:Vertical; Modulation Type:GFSK; Channel:High

| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Gain (dB) | Reading<br>Level<br>(dBmV) | Level<br>(dBmV/m) | Limit<br>(dBmV/m) | Over<br>limit<br>(dB) |
|--------------------|------------------------------|-----------------------|---------------------|----------------------------|-------------------|-------------------|-----------------------|
| 3842.163           | 33.18                        | 7.76                  | 37.98               | 44.81                      | 47.77             | 74                | -26.23                |
| 4960.000           | 34.43                        | 9.09                  | 38.48               | 42.39                      | 47.43             | 74                | -26.57                |
| 6069.413           | 34.76                        | 10.47                 | 38.23               | 43.68                      | 50.68             | 74                | -23.32                |
| 7440.000           | 36.32                        | 10.77                 | 36.90               | 40.83                      | 51.02             | 74                | -22.98                |
| 9920.000           | 37.58                        | 12.67                 | 34.94               | 36.84                      | 52.15             | 74                | -21.85                |
| 12102.870          | 38.66                        | 14.47                 | 35.85               | 36.33                      | 53.61             | 74                | -20.39                |

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.





## 7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209  
Test Method: ANSI C63.10 (2013) Section 6.10.5  
Measurement Distance: 3m

| Frequency     | Limit (dBuV/m @3m) | Remark           |
|---------------|--------------------|------------------|
| 30MHz-88MHz   | 40.0               | Quasi-peak Value |
| 88MHz-216MHz  | 43.5               | Quasi-peak Value |
| 216MHz-960MHz | 46.0               | Quasi-peak Value |
| 960MHz-1GHz   | 54.0               | Quasi-peak Value |
| Above 1GHz    | 54.0               | Average Value    |
|               | 74.0               | Peak Value       |

### 7.9.1 E.U.T. Operation




Operating Environment:

Temperature: 24.0 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:  
a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

The worst case for final test:  
a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.  
(Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Only the worst case is recorded in the report.)

### 7.9.2 Test Setup Diagram

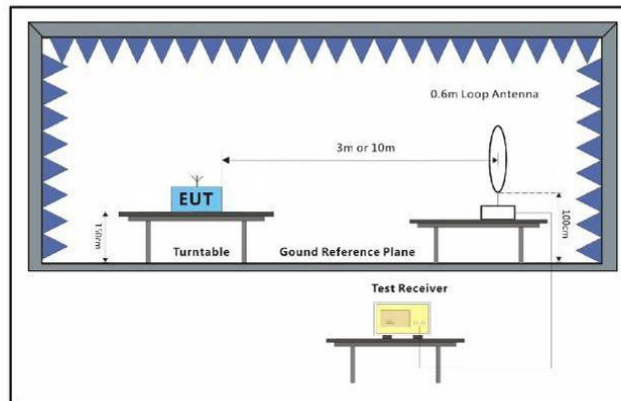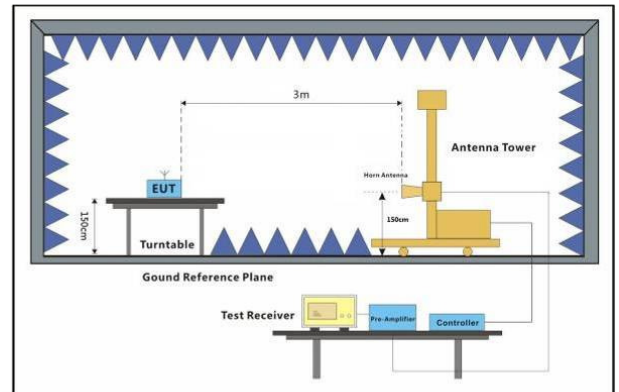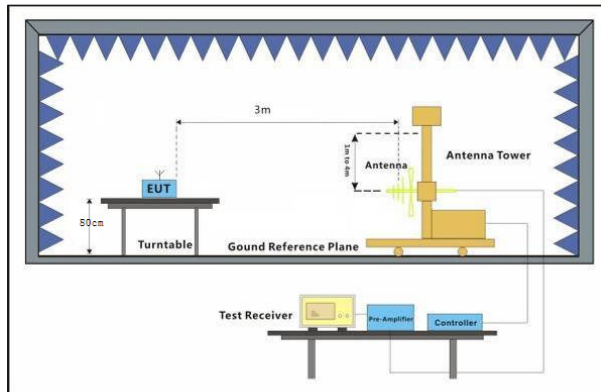




### **7.9.3 Measurement Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

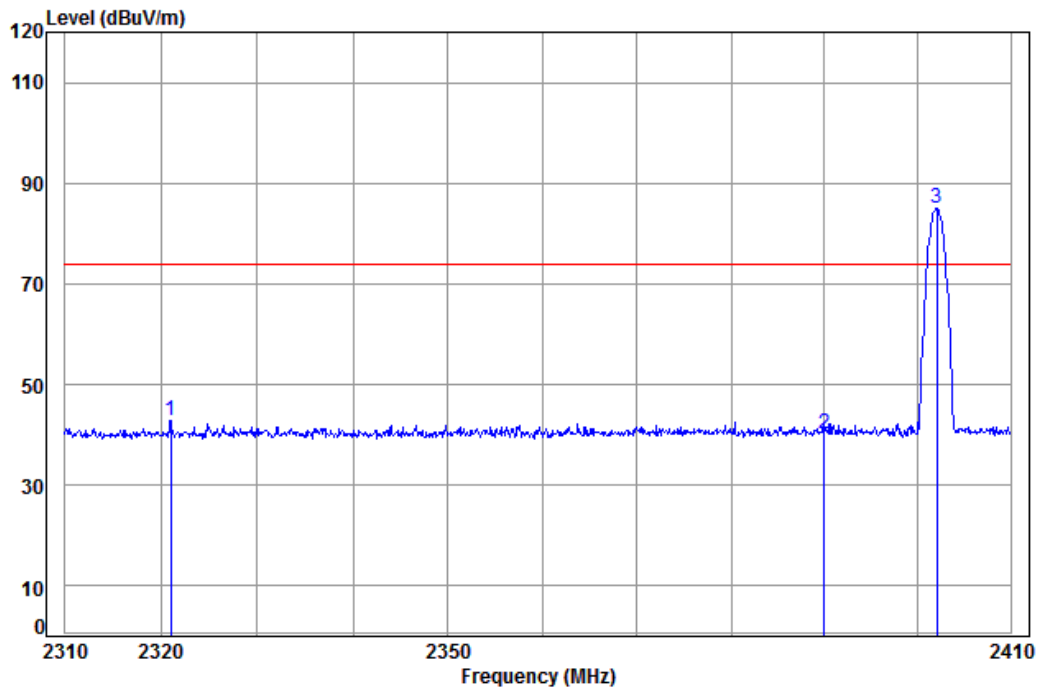


Condition: 3m HORIZONTAL  
Job No: : BM880  
Mode: : 2402 Band edge  
: BT

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|------|----------|------------|------------|---------------|------------|--------|------------|------------|--------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1    | 2320.990 | 5.28       | 28.37      | 37.97         | 47.29      | 42.97  | 74.00      | -31.03     |        |
| 2    | 2390.000 | 5.34       | 28.57      | 37.96         | 44.32      | 40.27  | 74.00      | -33.73     |        |
| 3 pp | 2402.047 | 5.35       | 28.61      | 37.96         | 88.89      | 84.89  | 74.00      | 10.89      |        |



Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

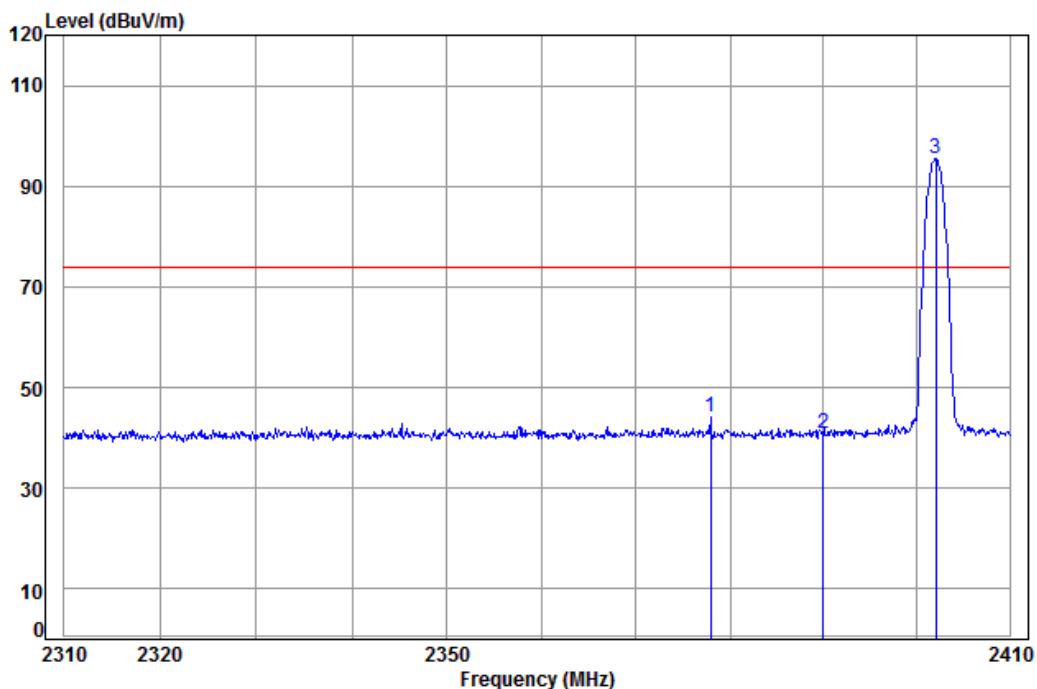


Condition: 3m VERTICAL  
Job No: : BM880  
Mode: : 2402 Band edge  
: BT

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|------|----------|------------|------------|---------------|------------|--------|------------|------------|--------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1    | 2377.941 | 5.33       | 28.54      | 37.96         | 48.32      | 44.23  | 74.00      | -29.77     |        |
| 2    | 2390.000 | 5.34       | 28.57      | 37.96         | 44.86      | 40.81  | 74.00      | -33.19     |        |
| 3 pp | 2402.047 | 5.35       | 28.61      | 37.96         | 99.41      | 95.41  | 74.00      | 21.41      |        |



Mode:a; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

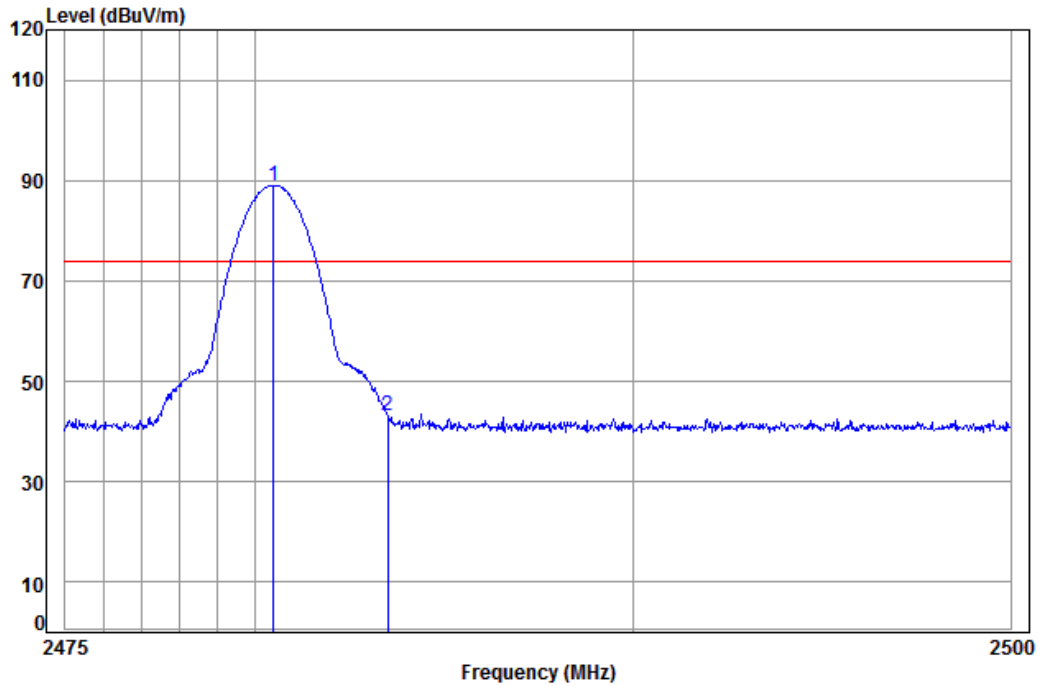


Condition: 3m HORIZONTAL  
Job No: : BM880  
Mode: : 2480 Band edge  
: BT

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|
|      | Freq     | Loss  | Factor | Factor | Level | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1 pp | 2480.479 | 5.41  | 28.97  | 37.95  | 92.61 | 89.04  | 74.00  | 15.04  |
| 2    | 2483.500 | 5.41  | 28.98  | 37.95  | 46.86 | 43.30  | 74.00  | -30.70 |



Mode:a; Polarization:Vertical; Modulation Type:GFSK; Channel:High

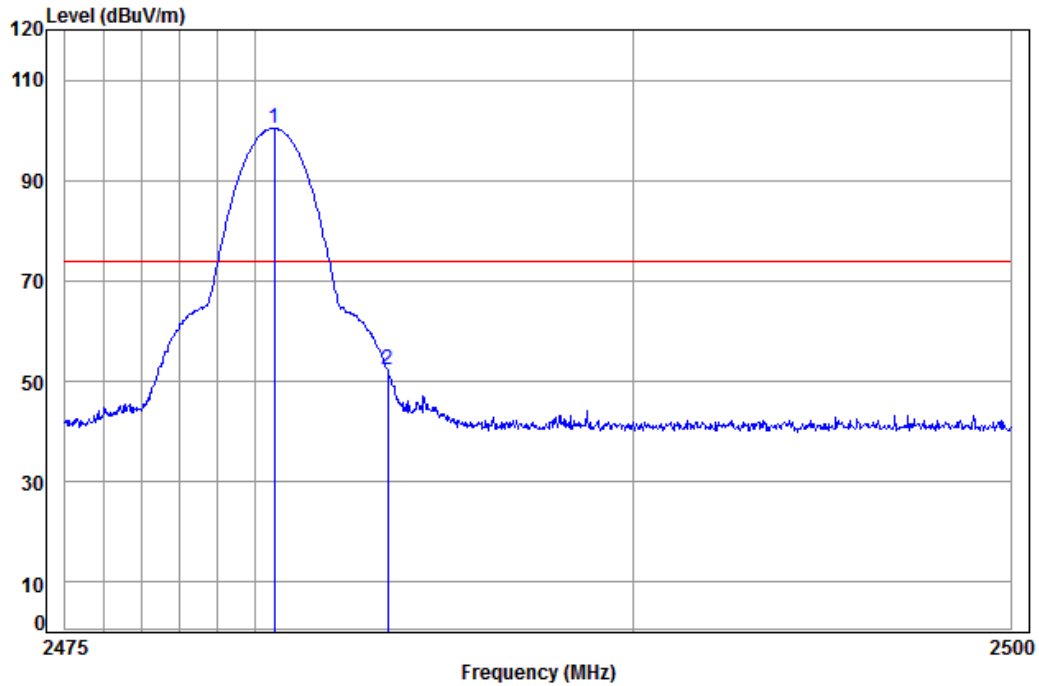


Condition: 3m VERTICAL  
Job No: : BM880  
Mode: : 2480 Band edge  
: BT

|      |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |        |
|------|----------|-------|--------|--------|--------|--------|--------|--------|
|      | Freq     | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |
| 1 pp | 2480.503 | 5.41  | 28.97  | 37.95  | 103.93 | 100.36 | 74.00  | 26.36  |
| 2    | 2483.500 | 5.41  | 28.98  | 37.95  | 55.92  | 52.36  | 74.00  | -21.64 |





Mode:h; Polarization:Horizontal; Modulation Type:GFSK; Channel:Low

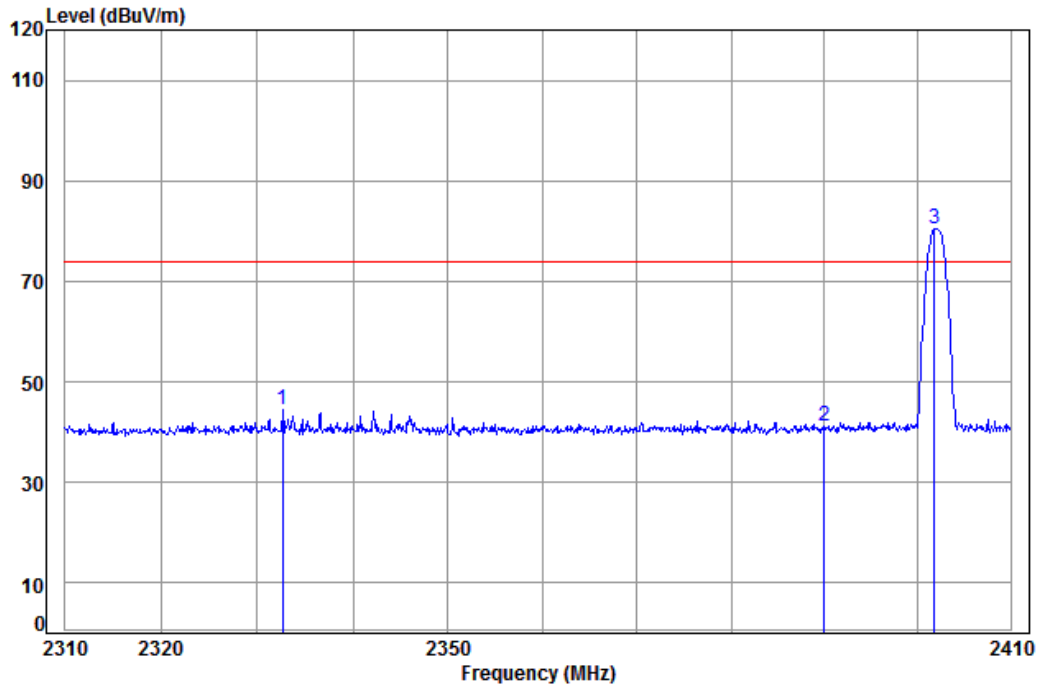

Condition: 3m HORIZONTAL

Job No: : RTL8821AU chipset


Mode: : 2402 Bandedge

: BT

|      | Freq     | Cable<br>Loss | Ant<br>Factor | Preamp<br>Factor | Read<br>Level | Level  | Limit  | Over   | Remark |
|------|----------|---------------|---------------|------------------|---------------|--------|--------|--------|--------|
|      | MHz      | dB            | dB/m          | dB               | dBuV          | dBuV/m | dBuV/m | dB     |        |
| 1    | 2332.626 | 5.29          | 28.40         | 37.97            | 48.74         | 44.46  | 74.00  | -29.54 |        |
| 2    | 2390.000 | 5.34          | 28.57         | 37.96            | 45.27         | 41.22  | 74.00  | -32.78 |        |
| 3 pp | 2401.843 | 5.35          | 28.61         | 37.96            | 84.38         | 80.38  | 74.00  | 6.38   |        |



Mode:h; Polarization:Vertical; Modulation Type:GFSK; Channel:Low

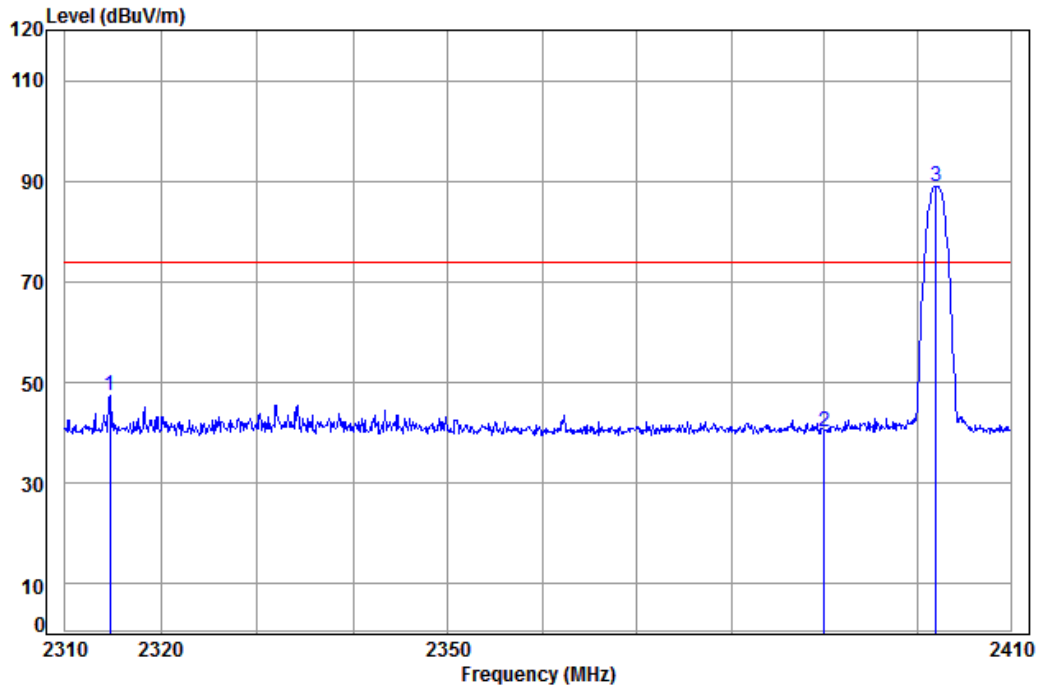

Condition: 3m VERTICAL

Job No: : RTL8821AU chipset


Mode: : 2402 Bandedge

: BT

|      | Freq     | Cable<br>Loss | Ant<br>Factor | Preamp<br>Factor | Read<br>Level | Level  | Limit  | Over   | Remark |
|------|----------|---------------|---------------|------------------|---------------|--------|--------|--------|--------|
|      | MHz      | dB            | dB/m          | dB               | dBuV          | dBuV/m | dBuV/m | dB     |        |
| 1    | 2314.606 | 5.28          | 28.35         | 37.97            | 51.91         | 47.57  | 74.00  | -26.43 |        |
| 2    | 2390.000 | 5.34          | 28.57         | 37.96            | 44.31         | 40.26  | 74.00  | -33.74 |        |
| 3 pp | 2401.945 | 5.35          | 28.61         | 37.96            | 92.95         | 88.95  | 74.00  | 14.95  |        |




Mode:h; Polarization:Horizontal; Modulation Type:GFSK; Channel:High

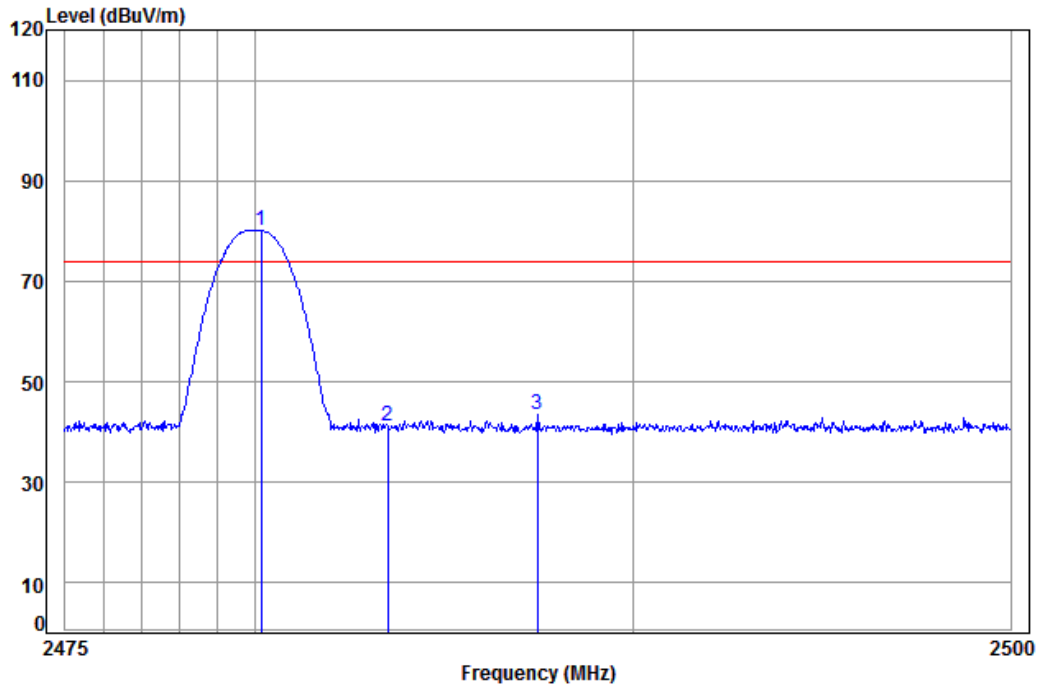

Condition: 3m HORIZONTAL  
Job No: : RTL8821AU chipset  
Mode: : 2480 Bandedge  
: BT

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|------|----------|------------|------------|---------------|------------|--------|------------|------------|--------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 pp | 2480.154 | 5.41       | 28.97      | 37.95         | 83.68      | 80.11  | 74.00      | 6.11       |        |
| 2    | 2483.500 | 5.41       | 28.98      | 37.95         | 44.77      | 41.21  | 74.00      | -32.79     |        |
| 3    | 2487.469 | 5.41       | 29.00      | 37.95         | 46.96      | 43.42  | 74.00      | -30.58     |        |

Mode:h; Polarization:Vertical; Modulation Type:GFSK; Channel:High

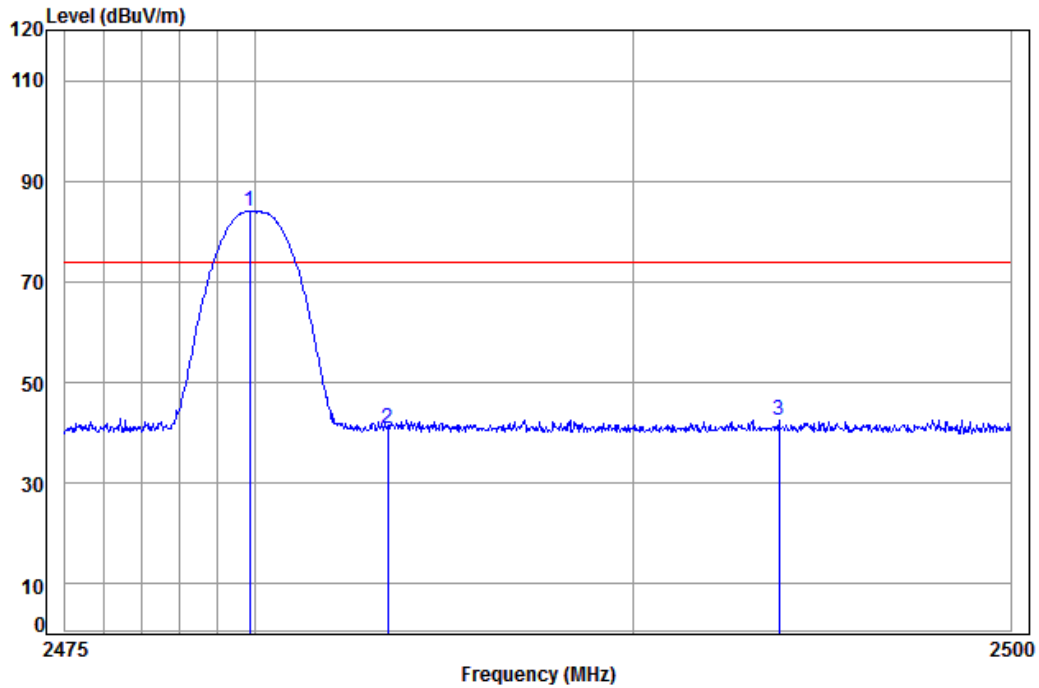

Condition: 3m VERTICAL

Job No: : RTL8821AU chipset

Mode: : 2480 Bandedge

: BT

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit  | Over   | Remark |
|------|----------|------------|------------|---------------|------------|--------|--------|--------|--------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1 pp | 2479.855 | 5.41       | 28.97      | 37.95         | 87.61      | 84.04  | 74.00  | 10.04  |        |
| 2    | 2483.500 | 5.41       | 28.98      | 37.95         | 44.30      | 40.74  | 74.00  | -33.26 |        |
| 3    | 2493.852 | 5.42       | 29.03      | 37.95         | 46.15      | 42.65  | 74.00  | -31.35 |        |

## 7.10 Conducted Band Edges Measurement

|                  |   |
|------------------|---|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247(d)   |
| Test Method:     | ANSI C63.10 (2013) Section 7.8.6  |
| Limit:           | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |

### 7.10.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:  
a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.

The worst case for final test:  
a: BT TX (BM880): keep the EUT transmitting mode.  
h: BT TX (CDW-B18821A-00): keep the EUT transmitting mode.  
(Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.)

### 7.10.2 Test Setup Diagram

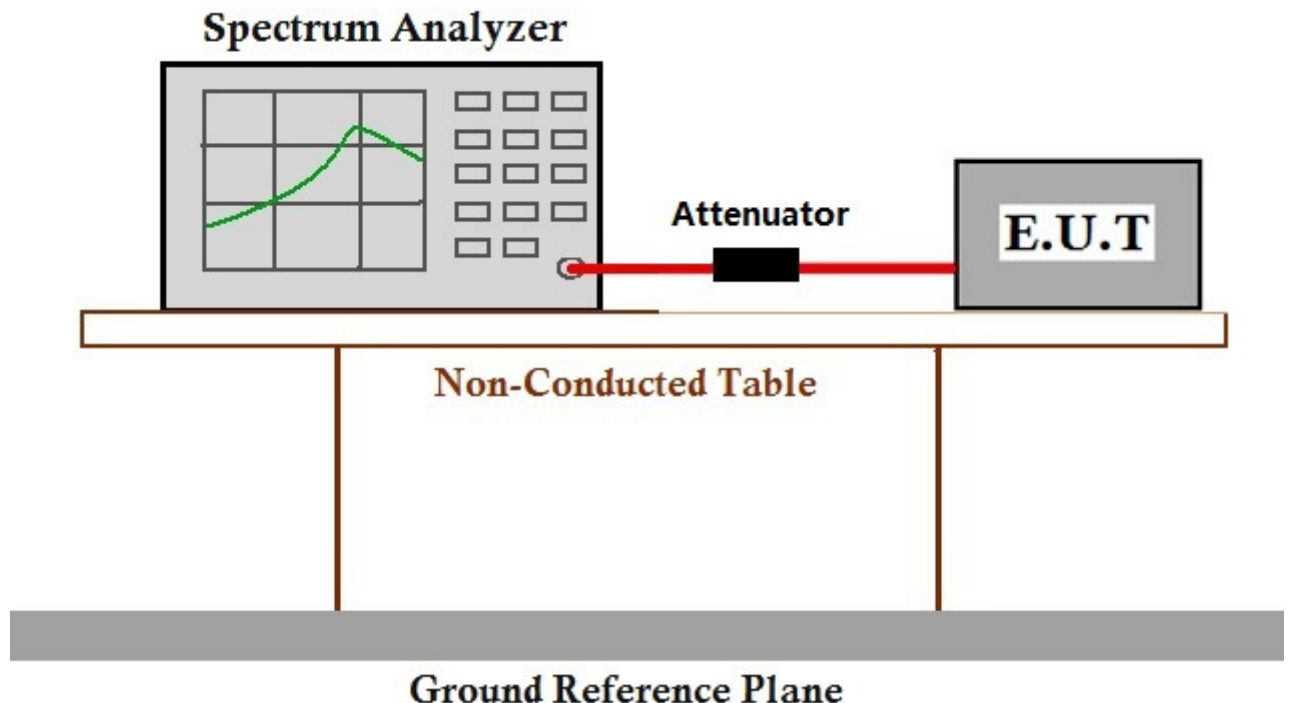

### 7.10.3 Measurement Data

The detailed test data see: Appendix 15.247


## 8 Photographs

### 8.1 Conducted Disturbance at AC Power Line(150kHz-30MHz) Test Setup





## 8.2 Radiated Spurious Emissions Test Setup

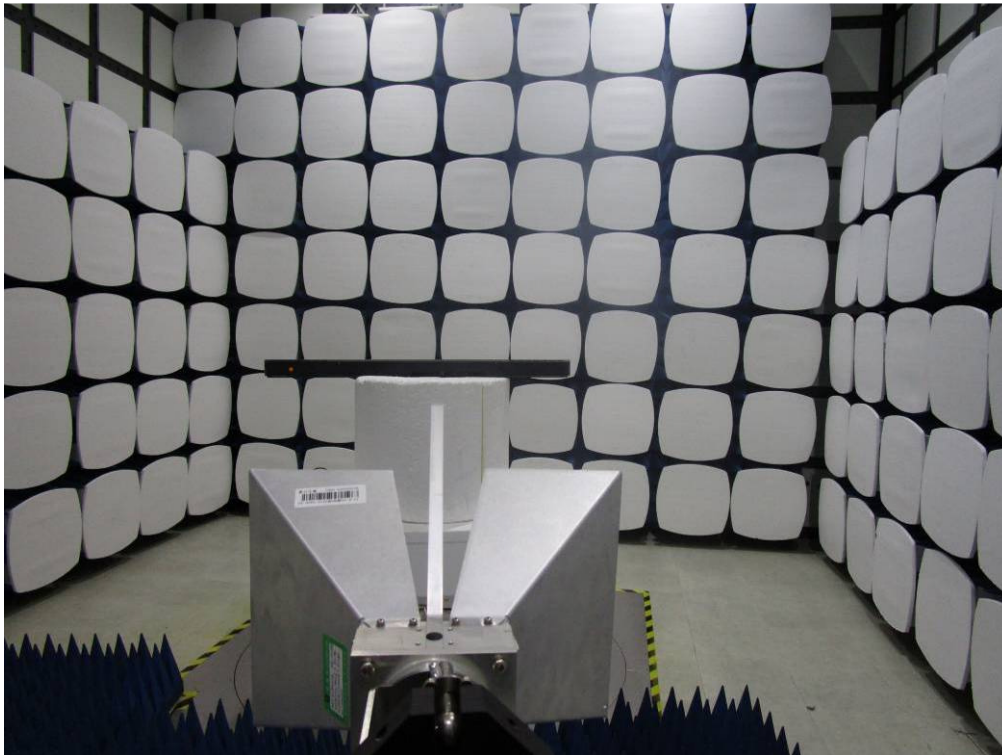





### **8.3 EUT Constructional Details**

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1702000699CR.




## 9 Appendix


### 9.1 Appendix 15.247


#### 9.1.1 BM880 15.247


##### 1.20 dB Bandwidth

| Test Mode | Test Channel | EBW[MHz] | Limit[MHz] | Verdict |
|-----------|--------------|----------|------------|---------|
| DH5       | 2402         | 0.946    | ---        | PASS    |
| DH5       | 2441         | 0.946    | ---        | PASS    |
| DH5       | 2480         | 0.948    | ---        | PASS    |
| 2DH5      | 2402         | 1.224    | ---        | PASS    |
| 2DH5      | 2441         | 1.222    | ---        | PASS    |
| 2DH5      | 2480         | 1.216    | ---        | PASS    |
| 3DH5      | 2402         | 1.256    | ---        | PASS    |
| 3DH5      | 2441         | 1.248    | ---        | PASS    |
| 3DH5      | 2480         | 1.258    | ---        | PASS    |

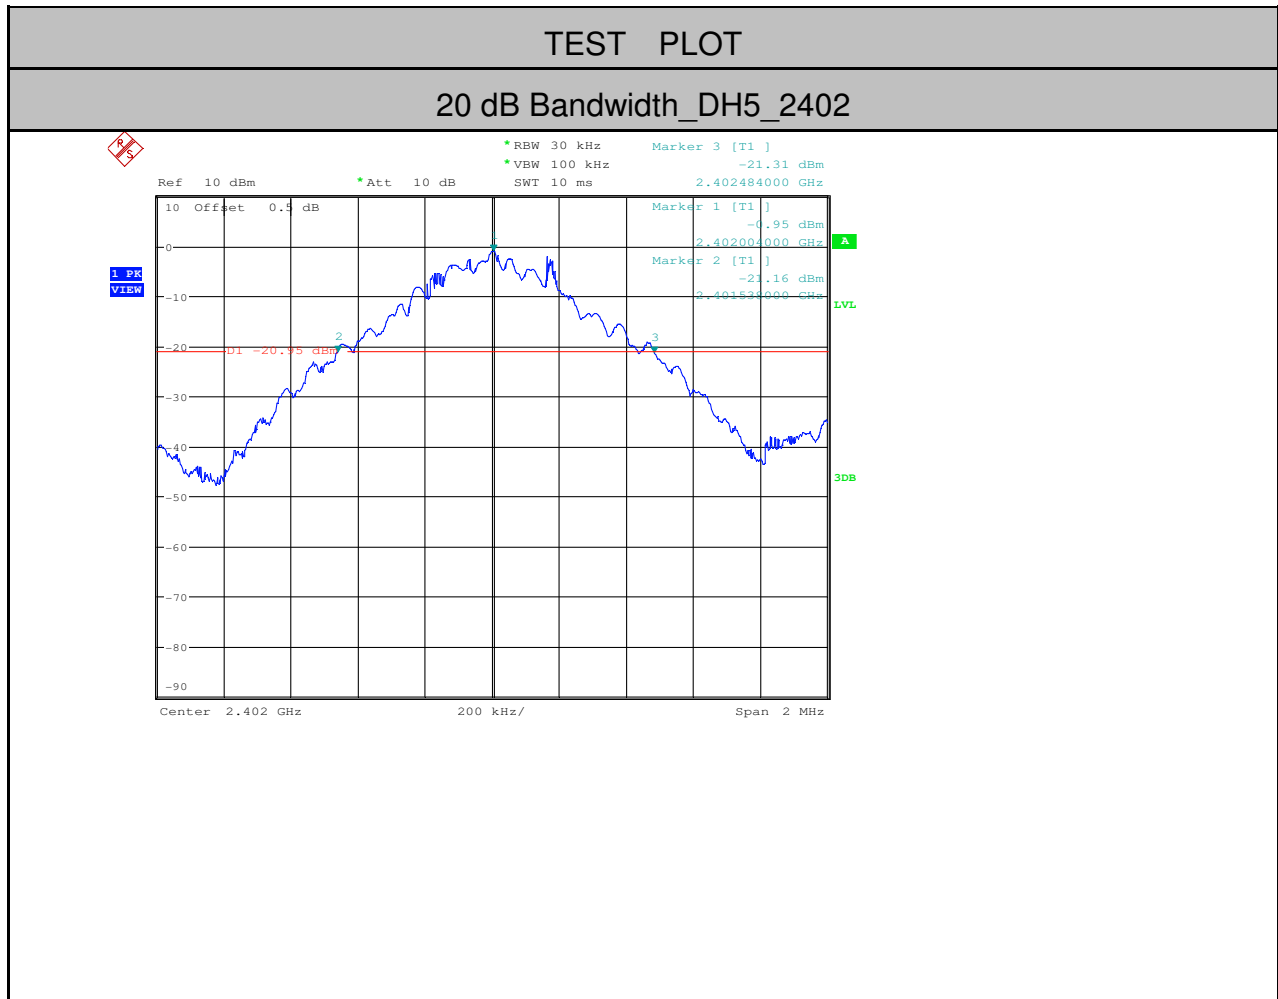

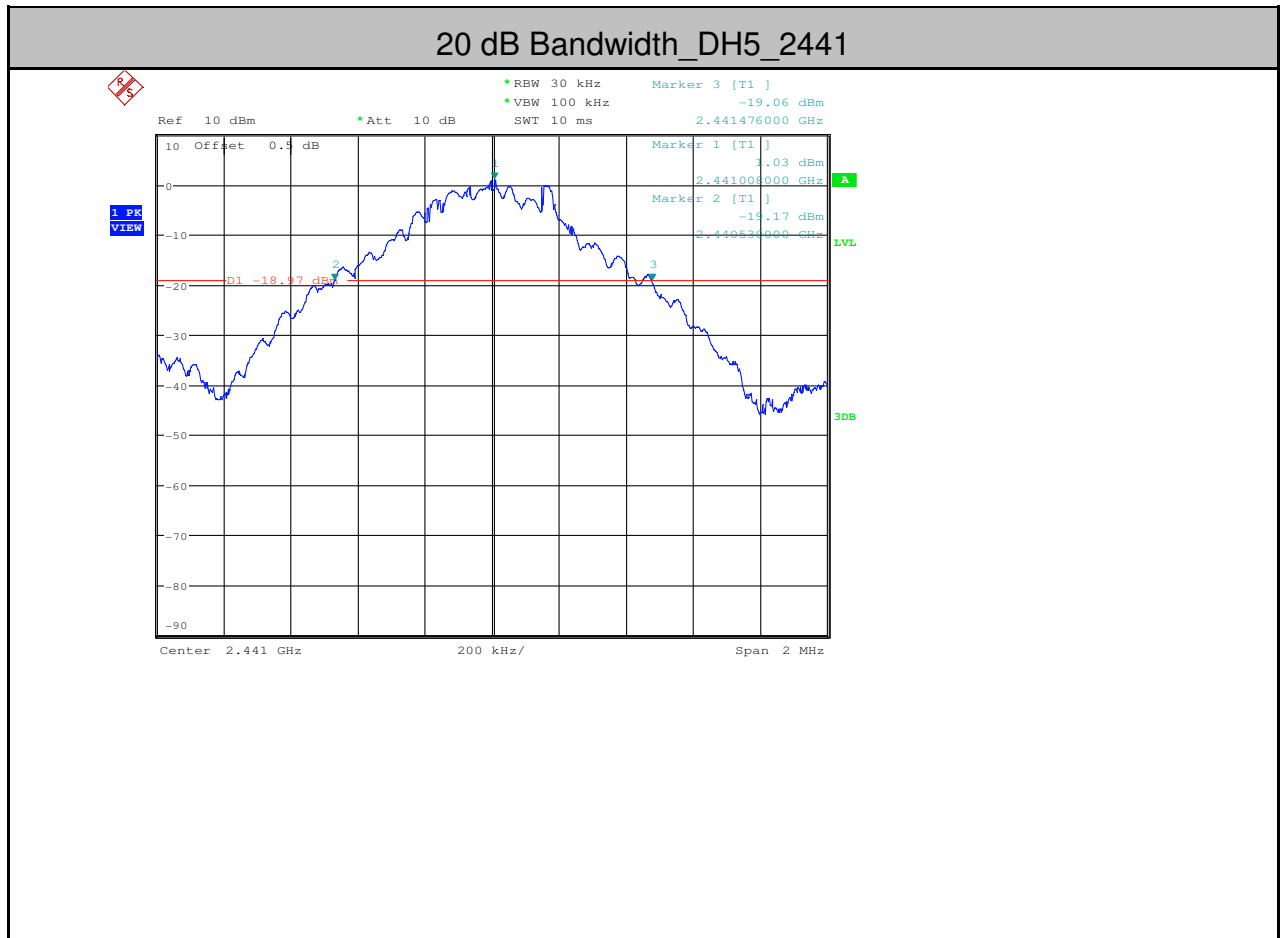


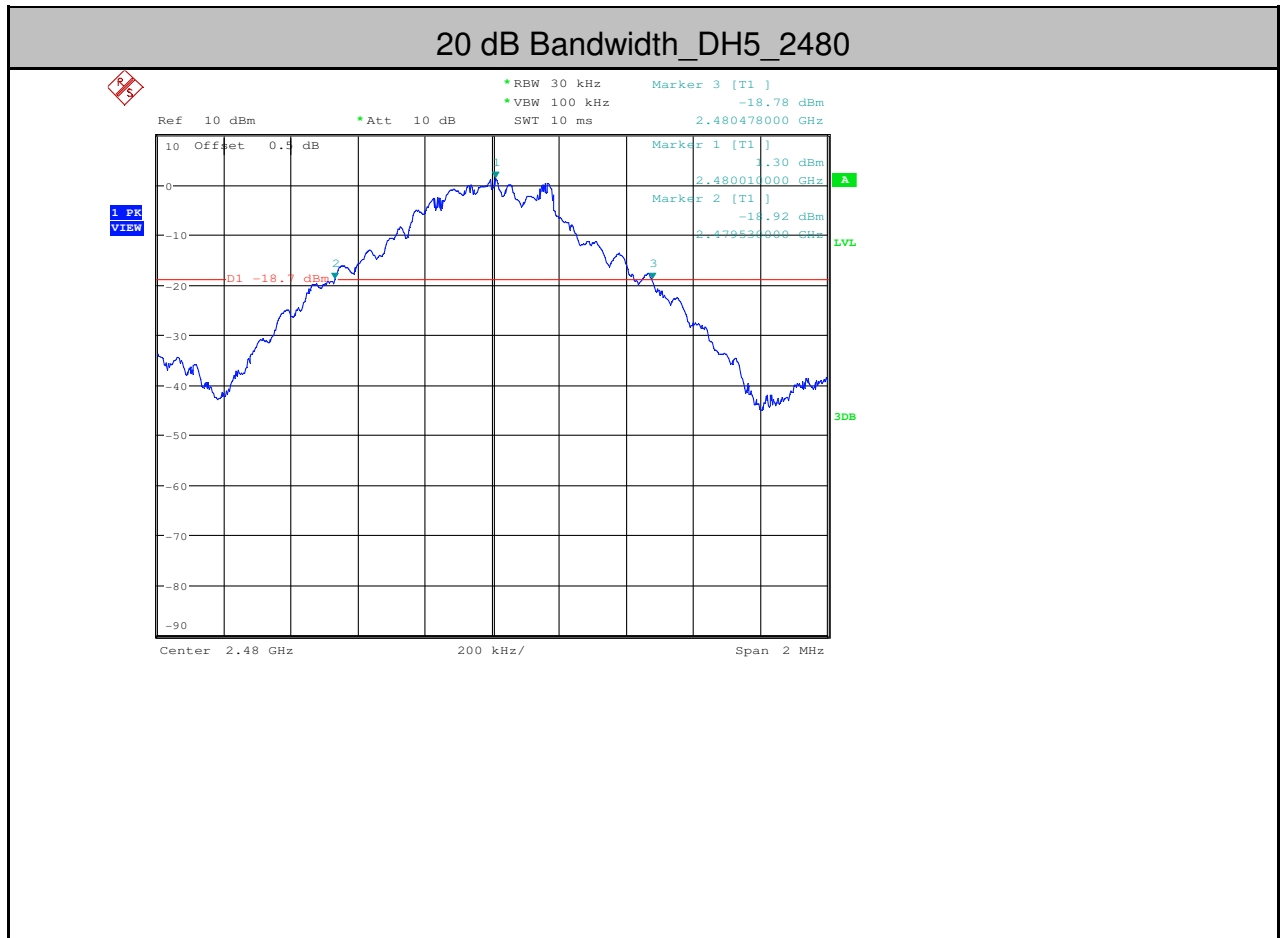

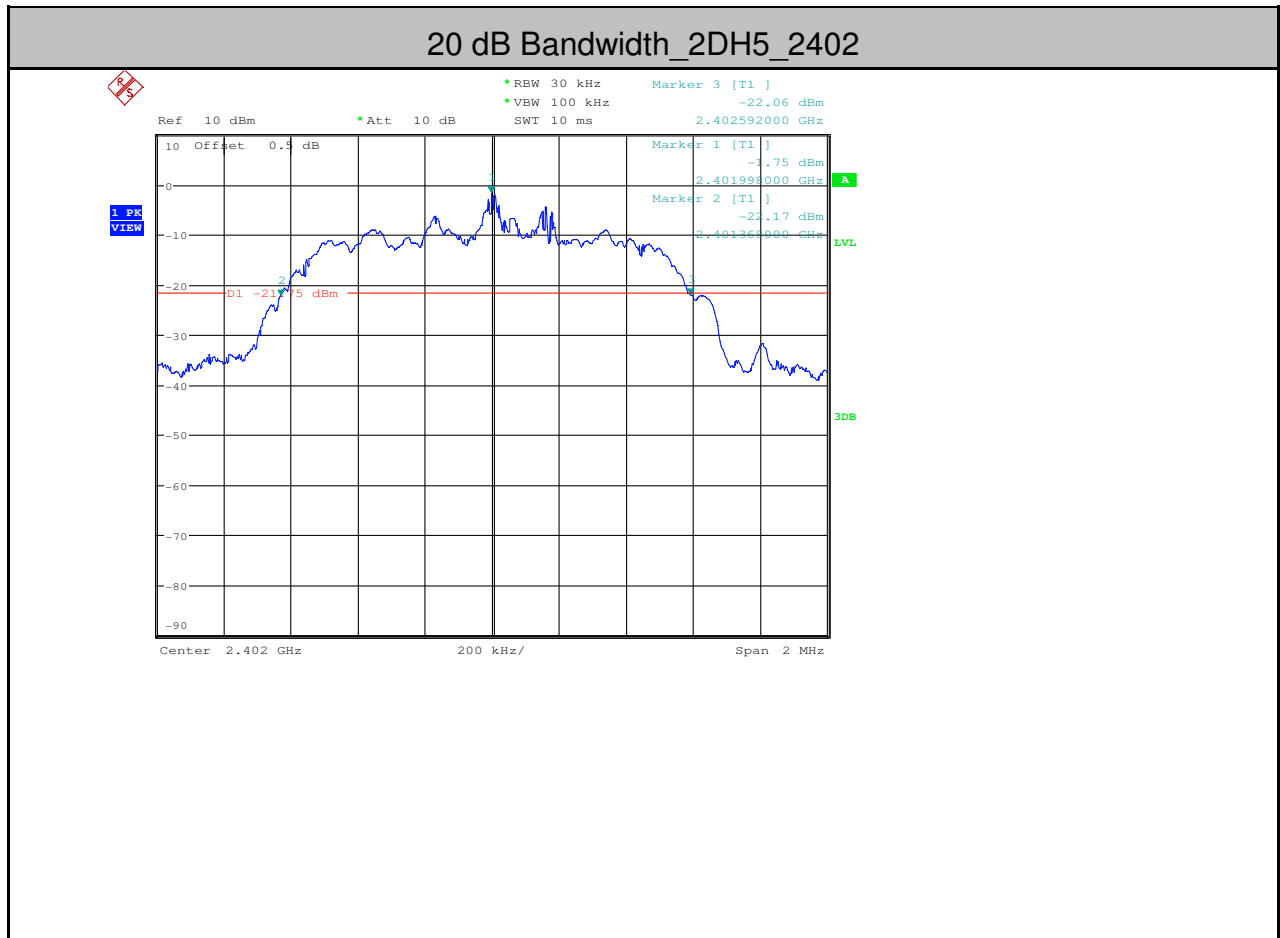






This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

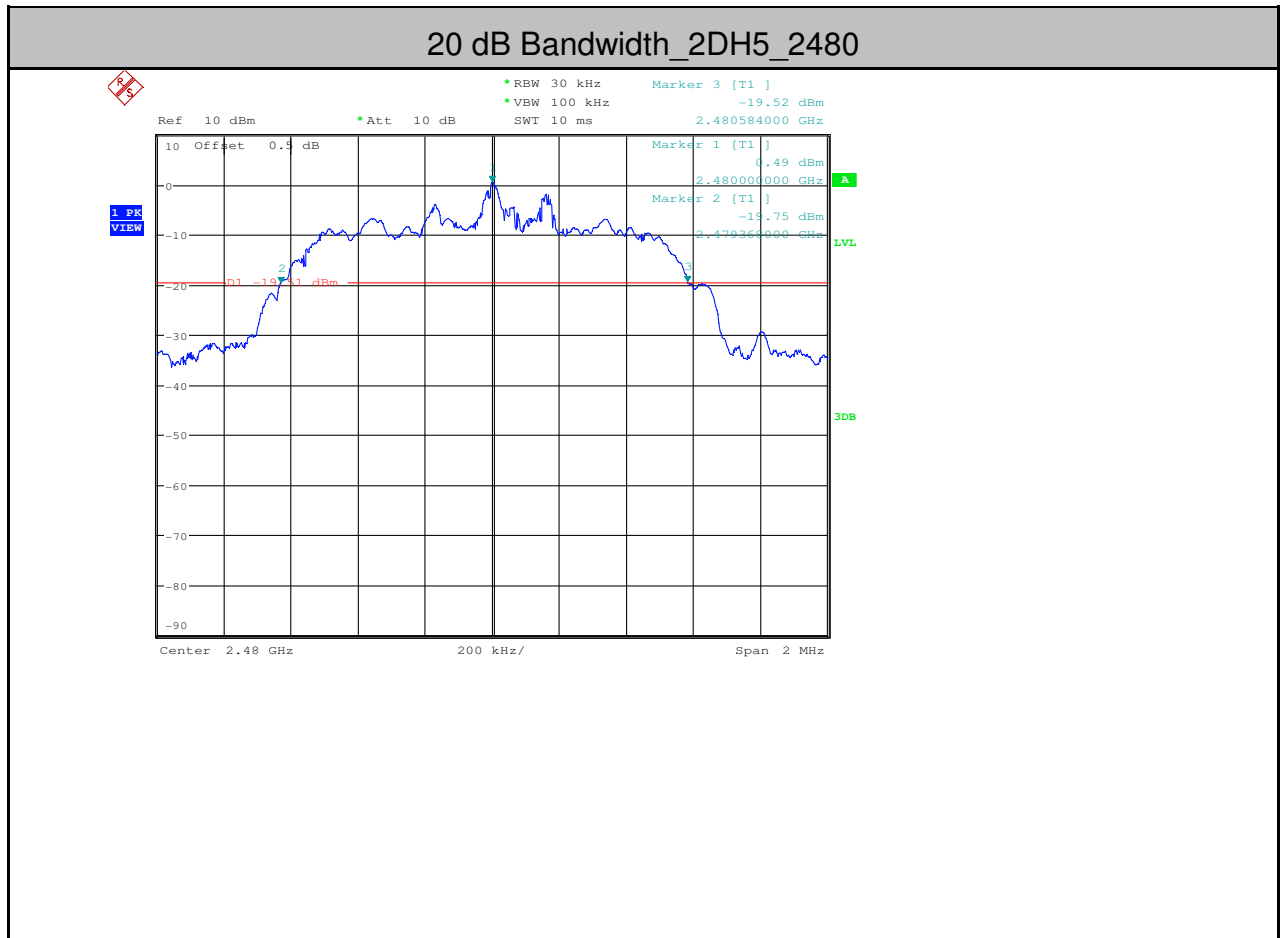



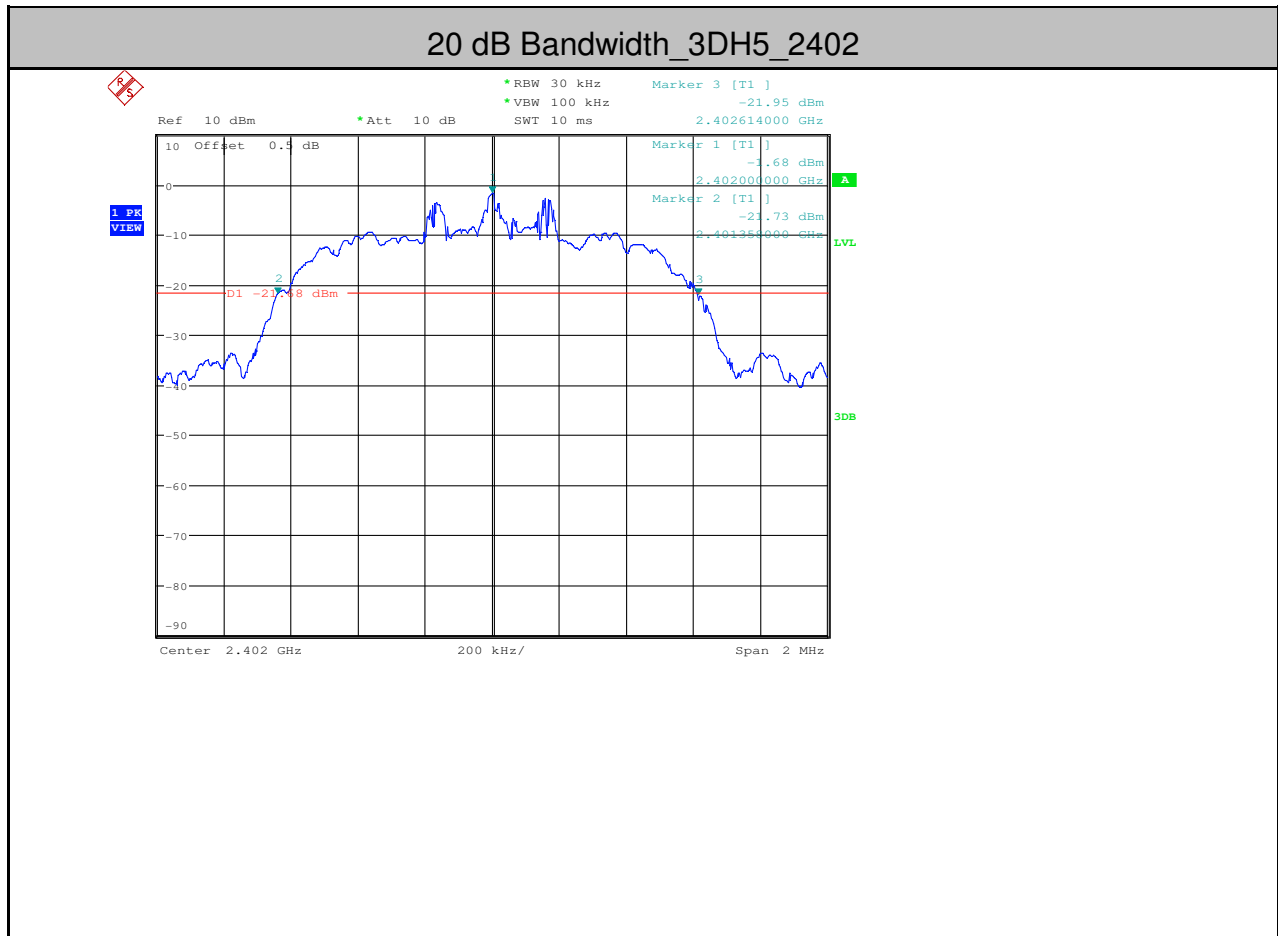

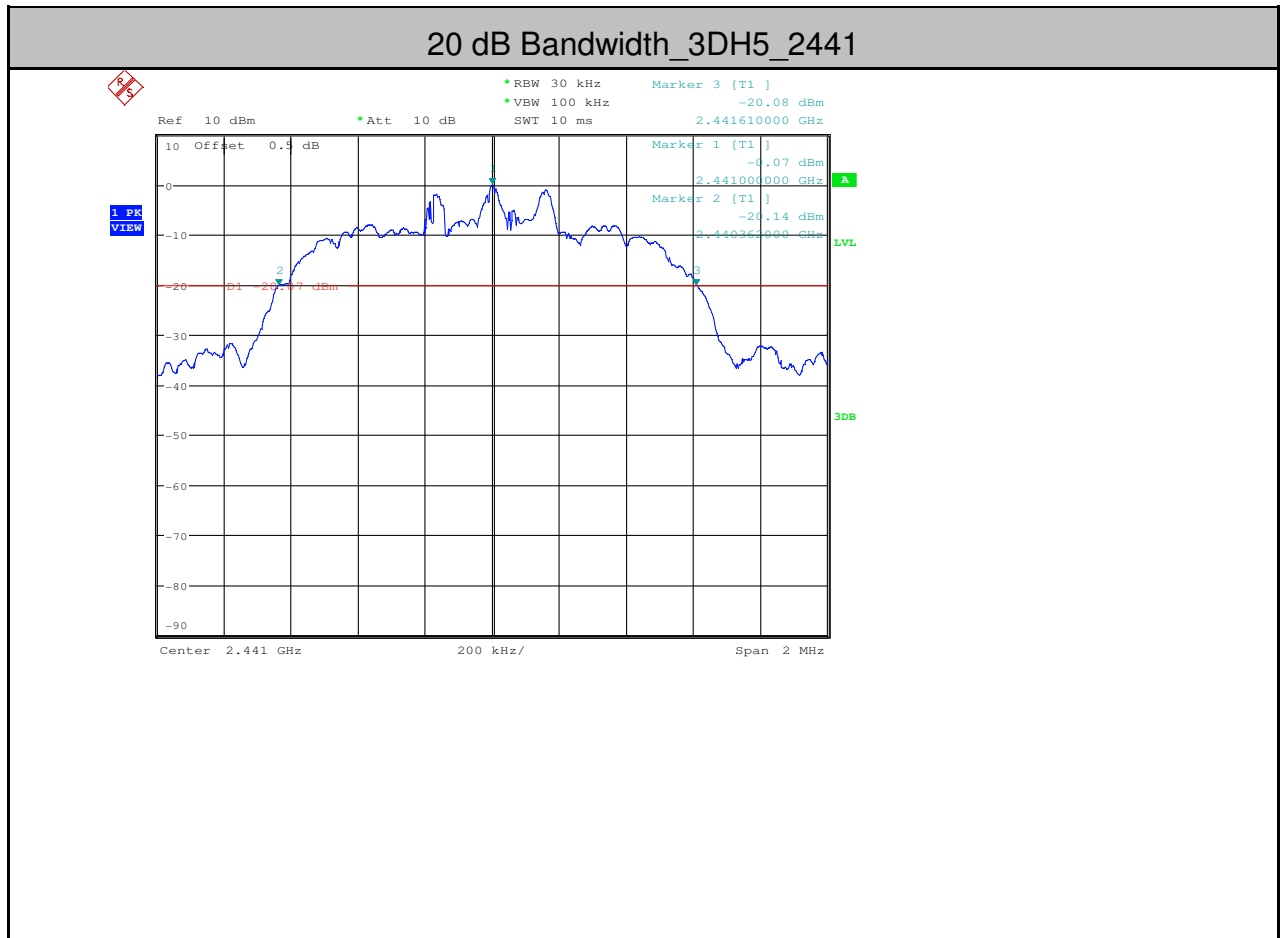


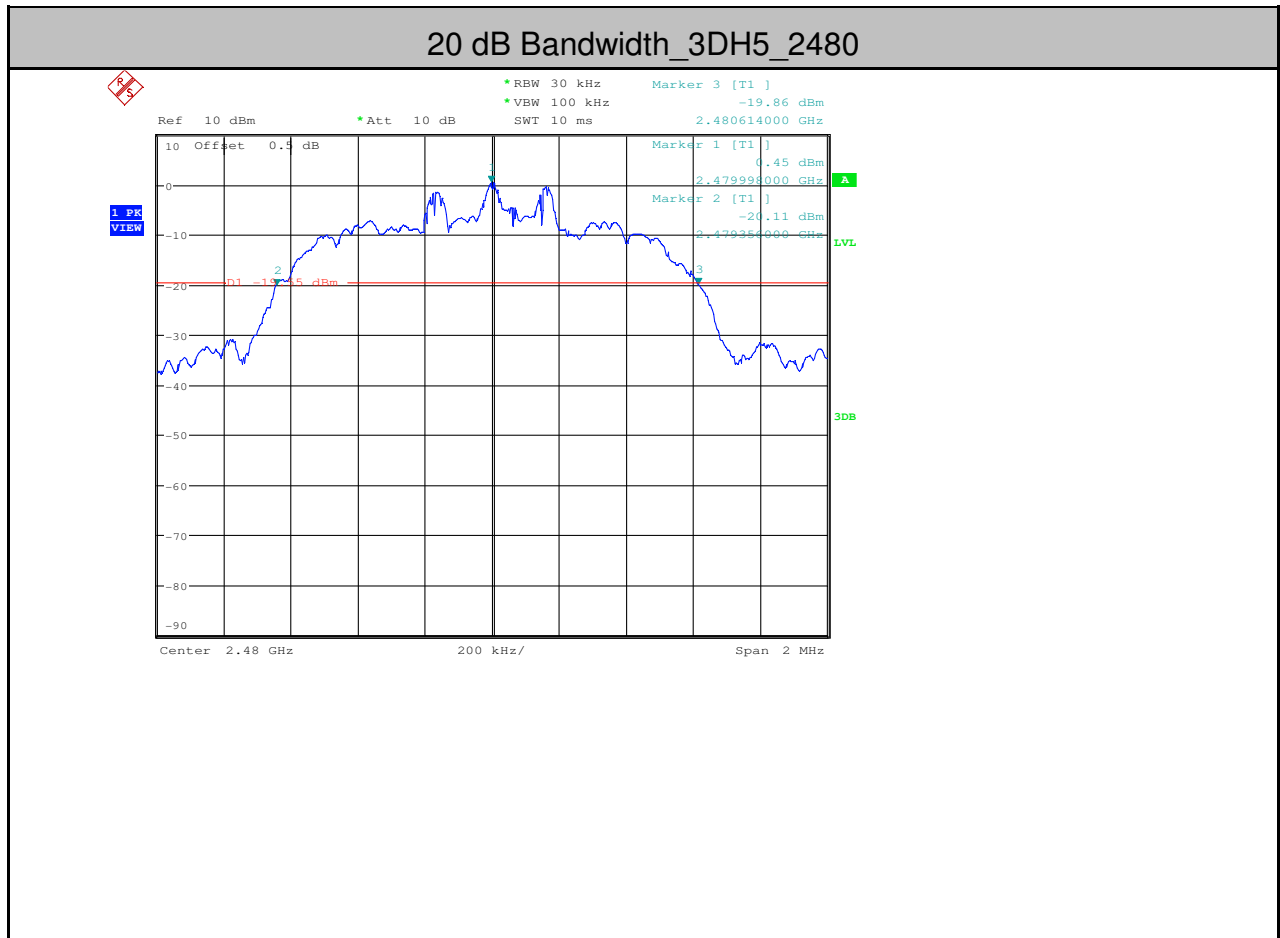




### 3. Conducted Peak Output Power


| Test Mode | Test Channel | Power[dBm] | Limit[dBm] | Verdict |
|-----------|--------------|------------|------------|---------|
| DH5       | 2402         | 1.19       | <20.97     | PASS    |
| DH5       | 2441         | 3.11       | <20.97     | PASS    |
| DH5       | 2480         | 3.58       | <20.97     | PASS    |
| 2DH5      | 2402         | 1.68       | <20.97     | PASS    |
| 2DH5      | 2441         | 3.23       | <20.97     | PASS    |
| 2DH5      | 2480         | 3.67       | <20.97     | PASS    |
| 3DH5      | 2402         | 2.15       | <20.97     | PASS    |
| 3DH5      | 2441         | 3.63       | <20.97     | PASS    |
| 3DH5      | 2480         | 3.97       | <20.97     | PASS    |

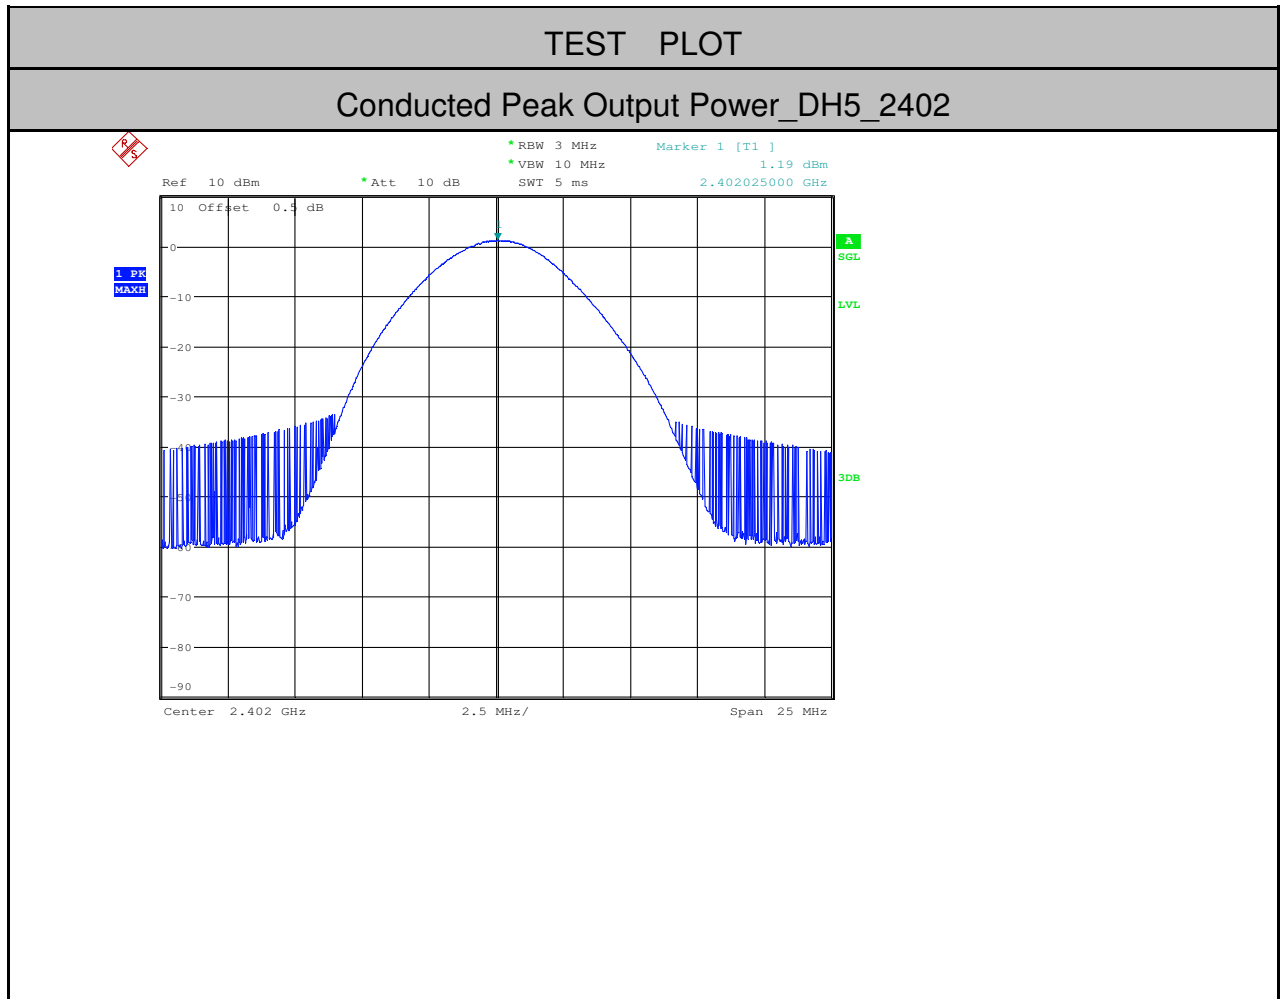

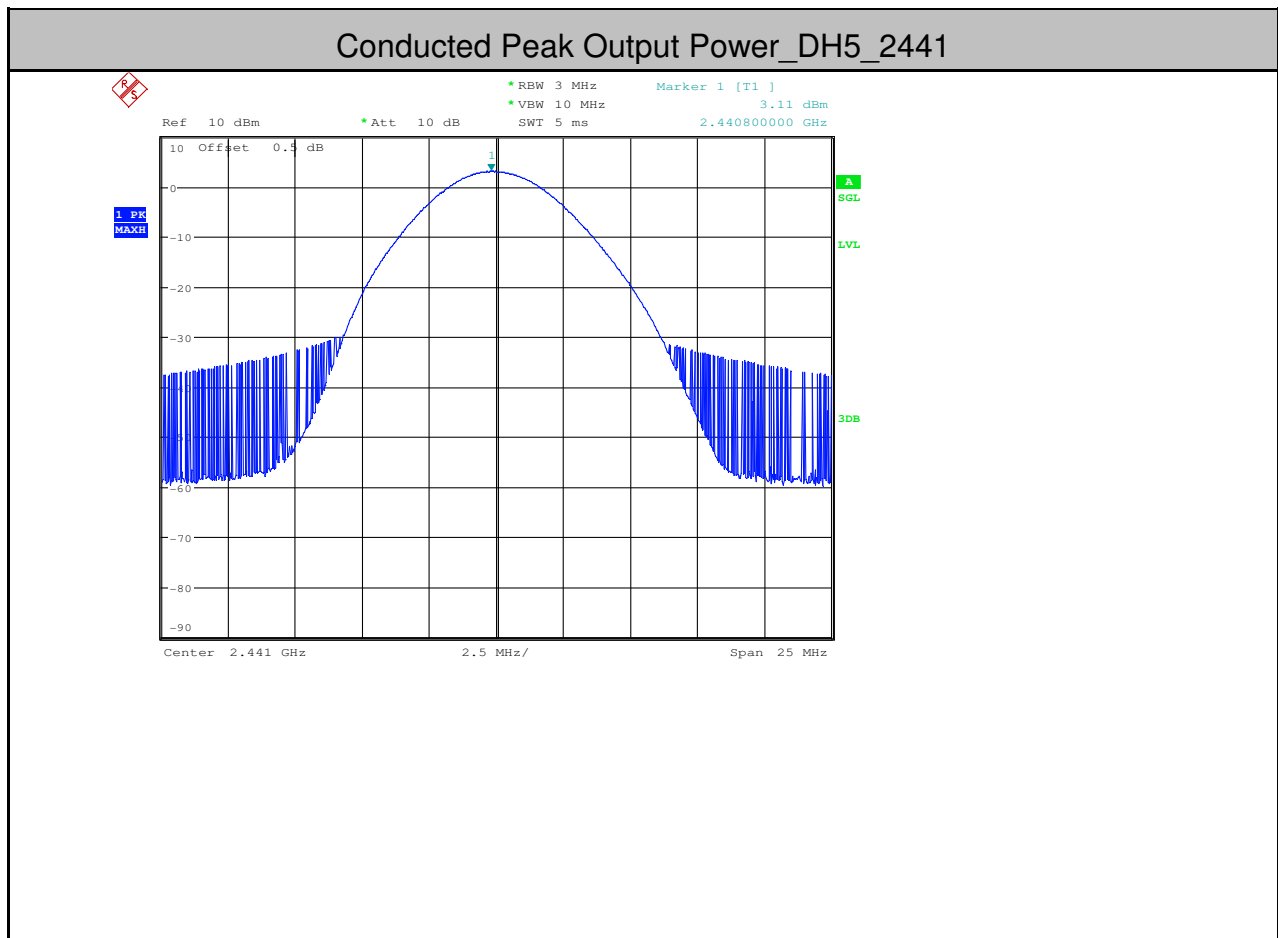




Conducted Peak Output Power\_DH5\_2480

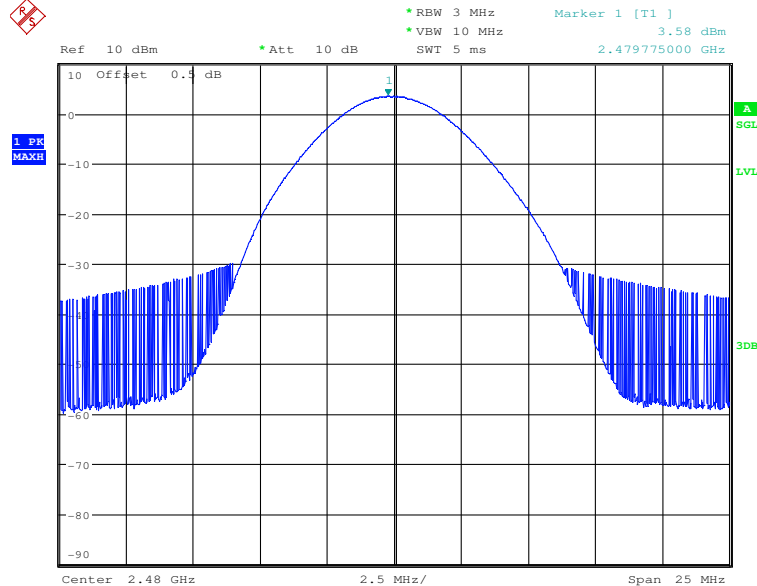




### Conducted Peak Output Power\_2DH5\_2402

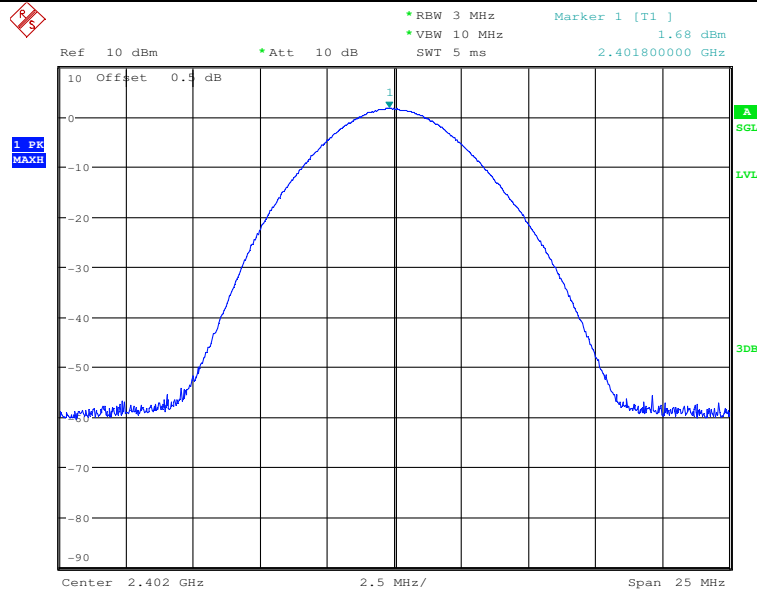






### Conducted Peak Output Power\_2DH5\_2441

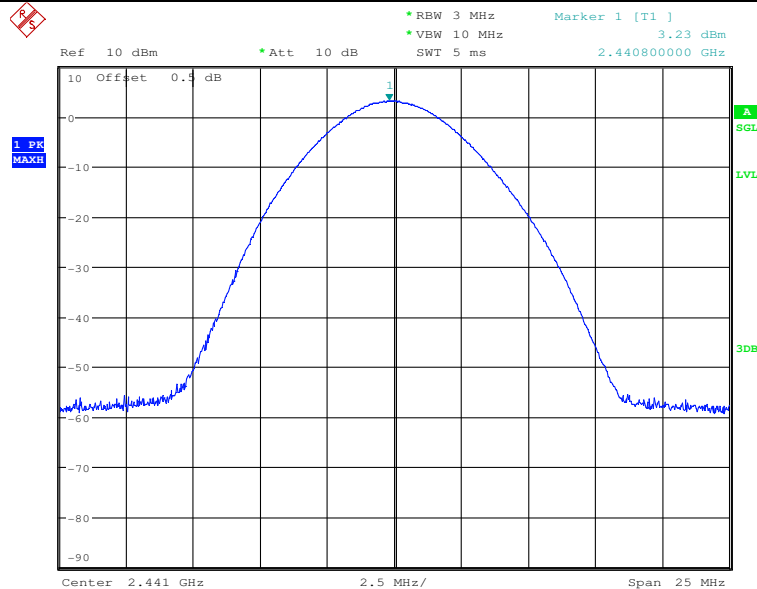




### Conducted Peak Output Power\_2DH5\_2480

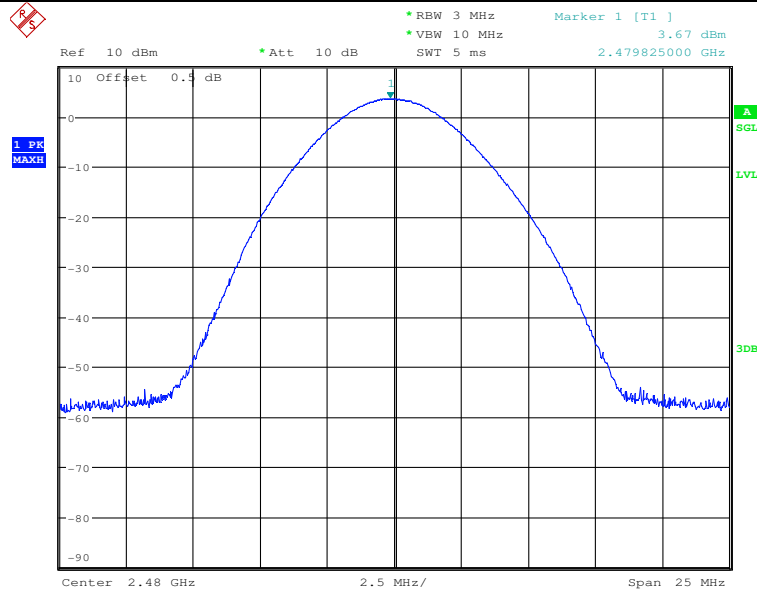




### Conducted Peak Output Power\_3DH5\_2402

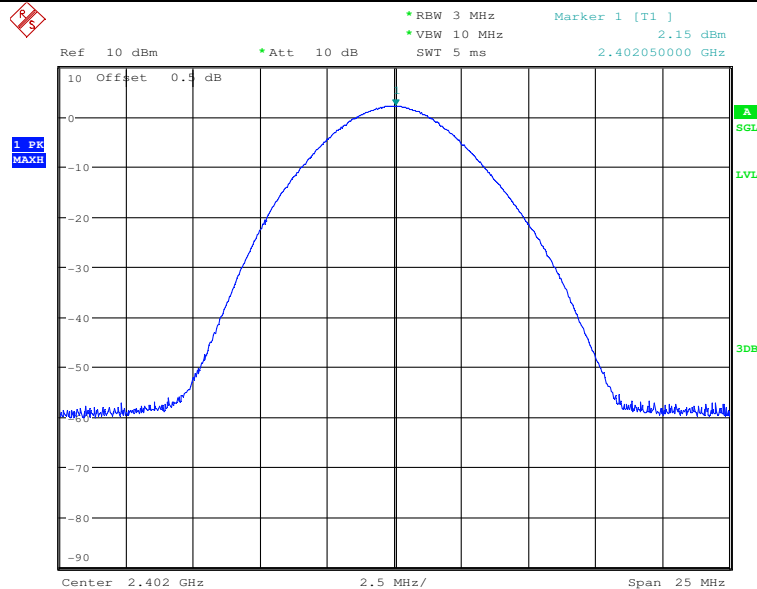




### Conducted Peak Output Power\_3DH5\_2441

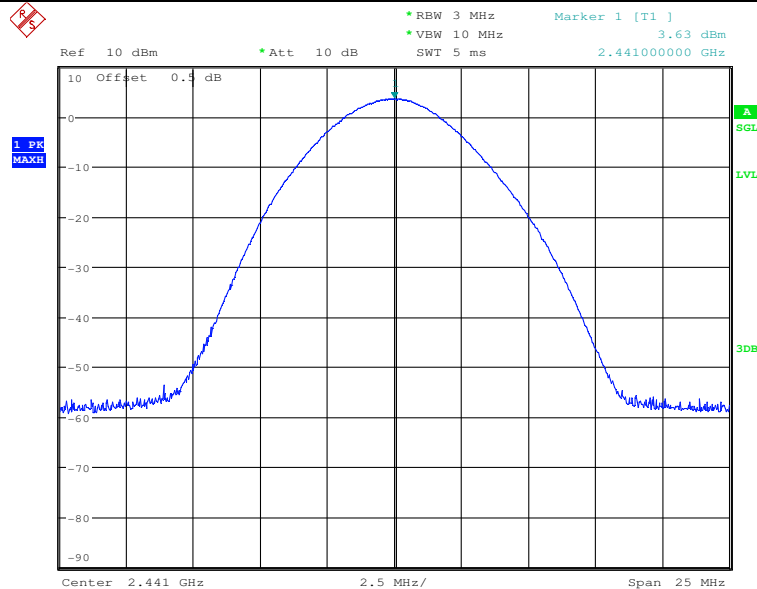




### Conducted Peak Output Power\_3DH5\_2480

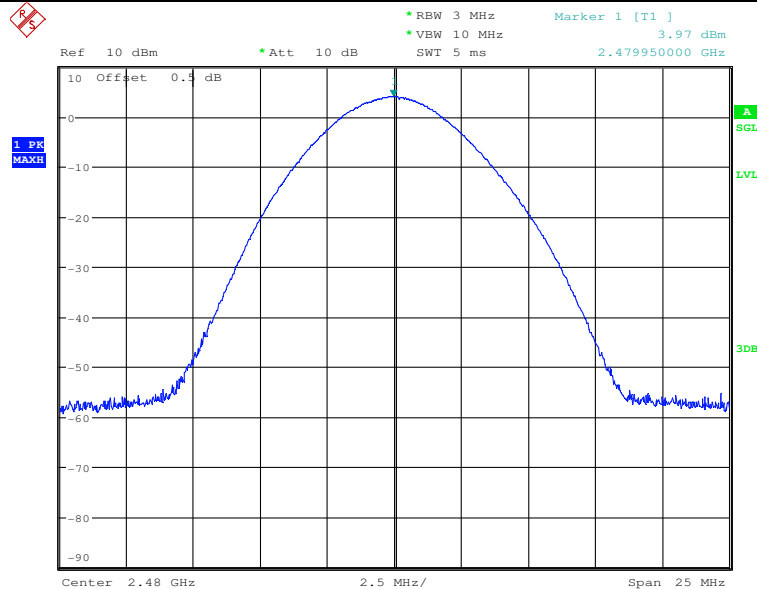




#### 4.Carrier Frequency Separation

| Test Mode | Test Channel | Result[MHz] | Limit[MHz]   | Verdict |
|-----------|--------------|-------------|--------------|---------|
| DH5       | 2441         | 0.999       | $\geq 0.632$ | PASS    |
| 2DH5      | 2441         | 1.005       | $\geq 0.816$ | PASS    |
| 3DH5      | 2441         | 1.008       | $\geq 0.839$ | PASS    |

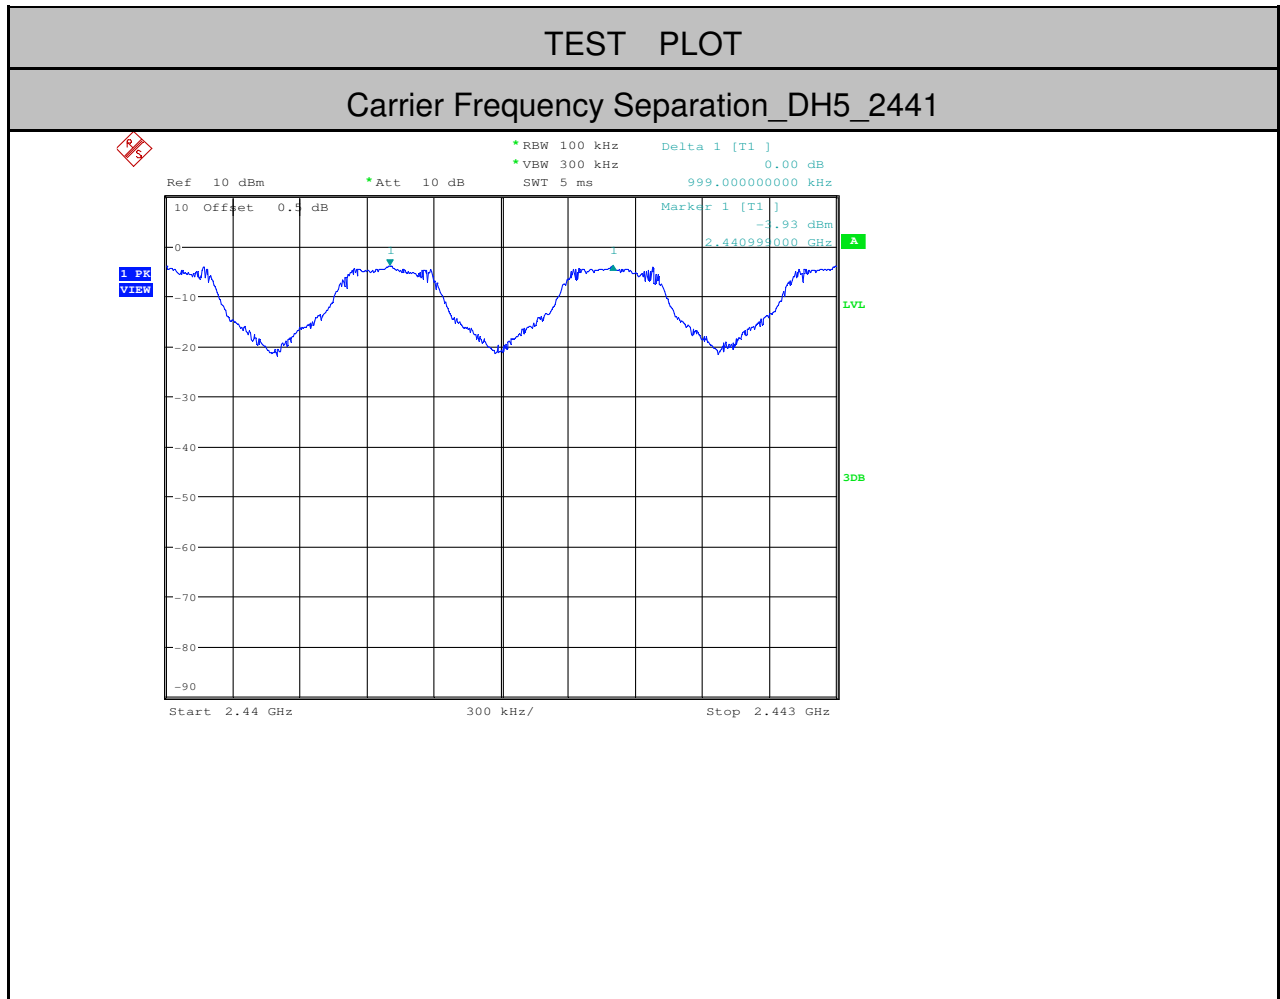




Carrier Frequency Separation\_2DH5\_2441

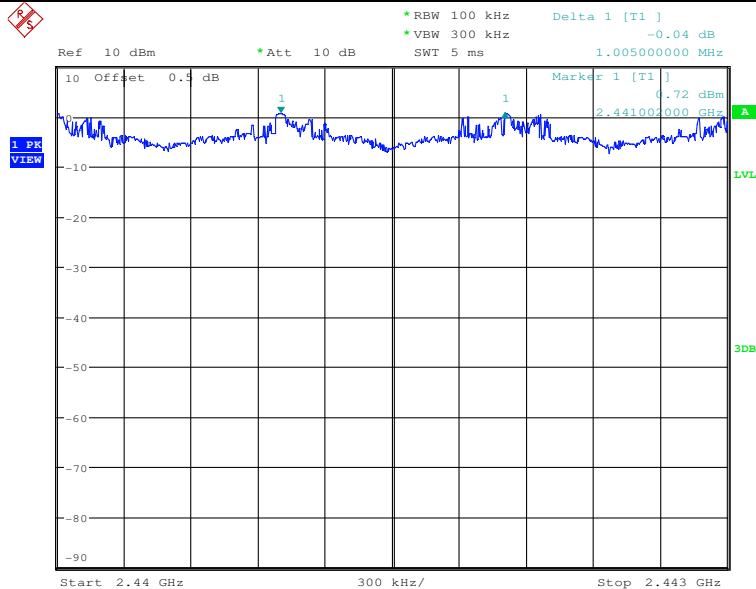





Carrier Frequency Separation\_3DH5\_2441

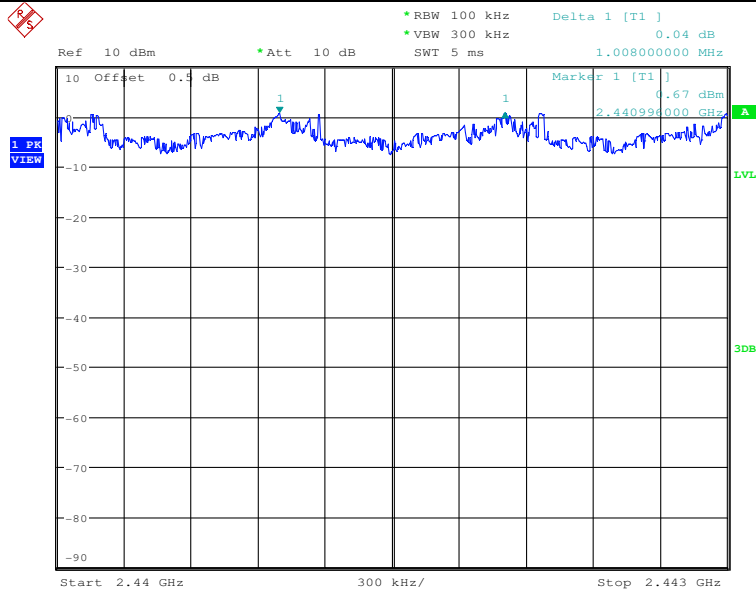





## 5.Dwell Time

| Test Mode | Test Channel | Burst Width[ms/hop/ch] | Total Hops[hop*ch] | Dwell Time[s] | Limit[s] | Verdict |
|-----------|--------------|------------------------|--------------------|---------------|----------|---------|
| DH1       | 2402         | 0.39                   | 320                | 0.125         | <0.4     | PASS    |
| DH3       | 2402         | 1.65                   | 160                | 0.264         | <0.4     | PASS    |
| DH5       | 2402         | 2.9                    | 100                | 0.290         | <0.4     | PASS    |
| 2DH1      | 2402         | 0.41                   | 320                | 0.131         | <0.4     | PASS    |
| 2DH3      | 2402         | 1.67                   | 150                | 0.251         | <0.4     | PASS    |
| 2DH5      | 2402         | 2.9                    | 110                | 0.319         | <0.4     | PASS    |
| 3DH1      | 2402         | 0.4                    | 290                | 0.116         | <0.4     | PASS    |
| 3DH3      | 2402         | 1.66                   | 160                | 0.266         | <0.4     | PASS    |
| 3DH5      | 2402         | 2.9                    | 110                | 0.319         | <0.4     | PASS    |





TEST PLOT


Dwell Time\_DH1\_2402

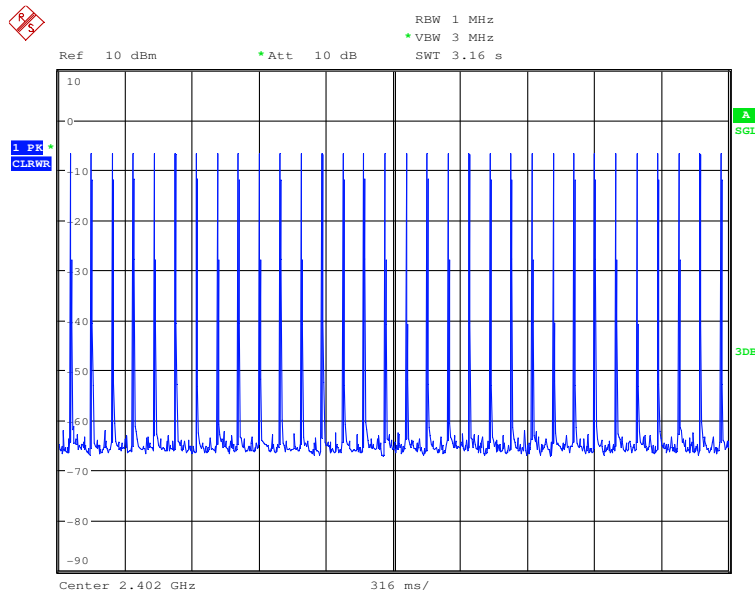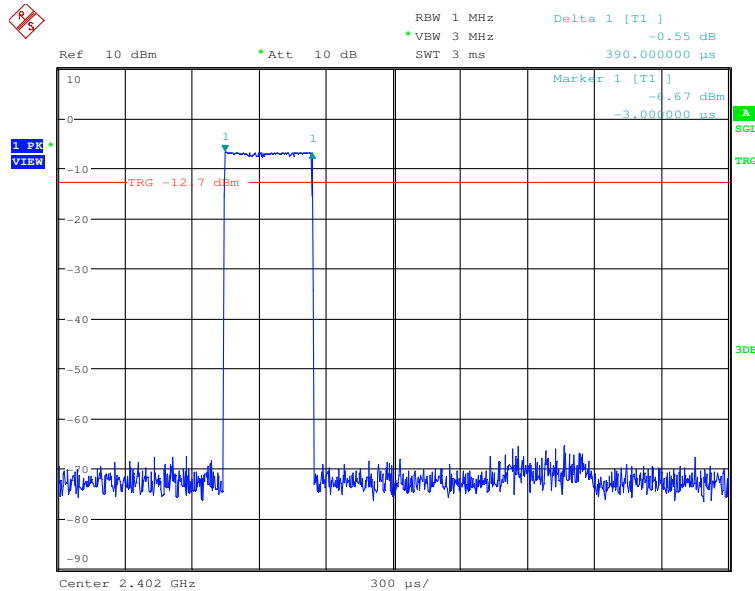




Dwell Time\_DH3\_2402

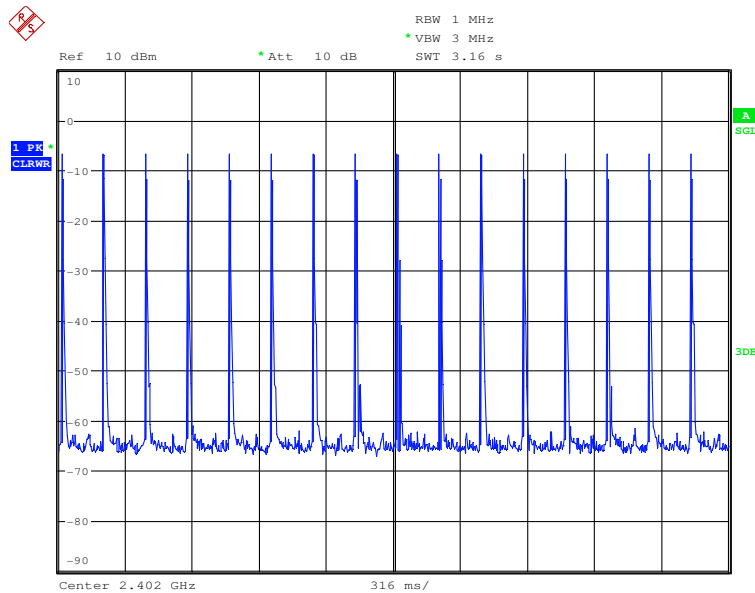
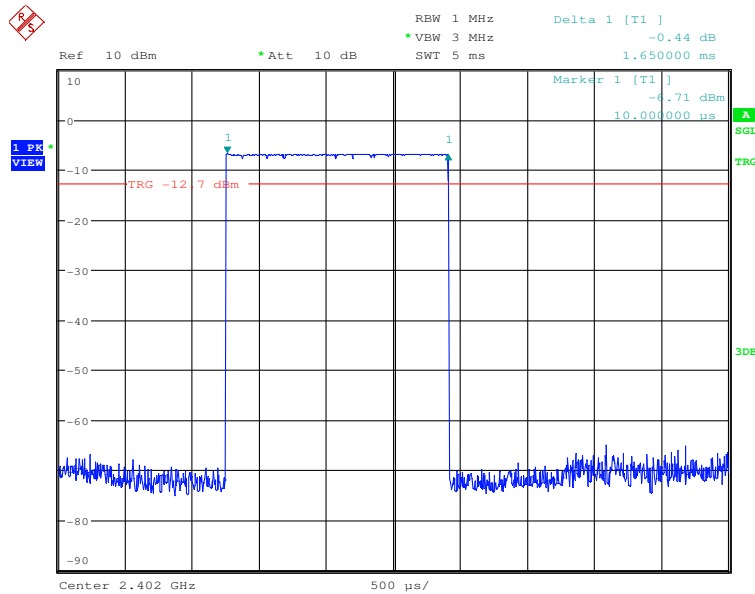


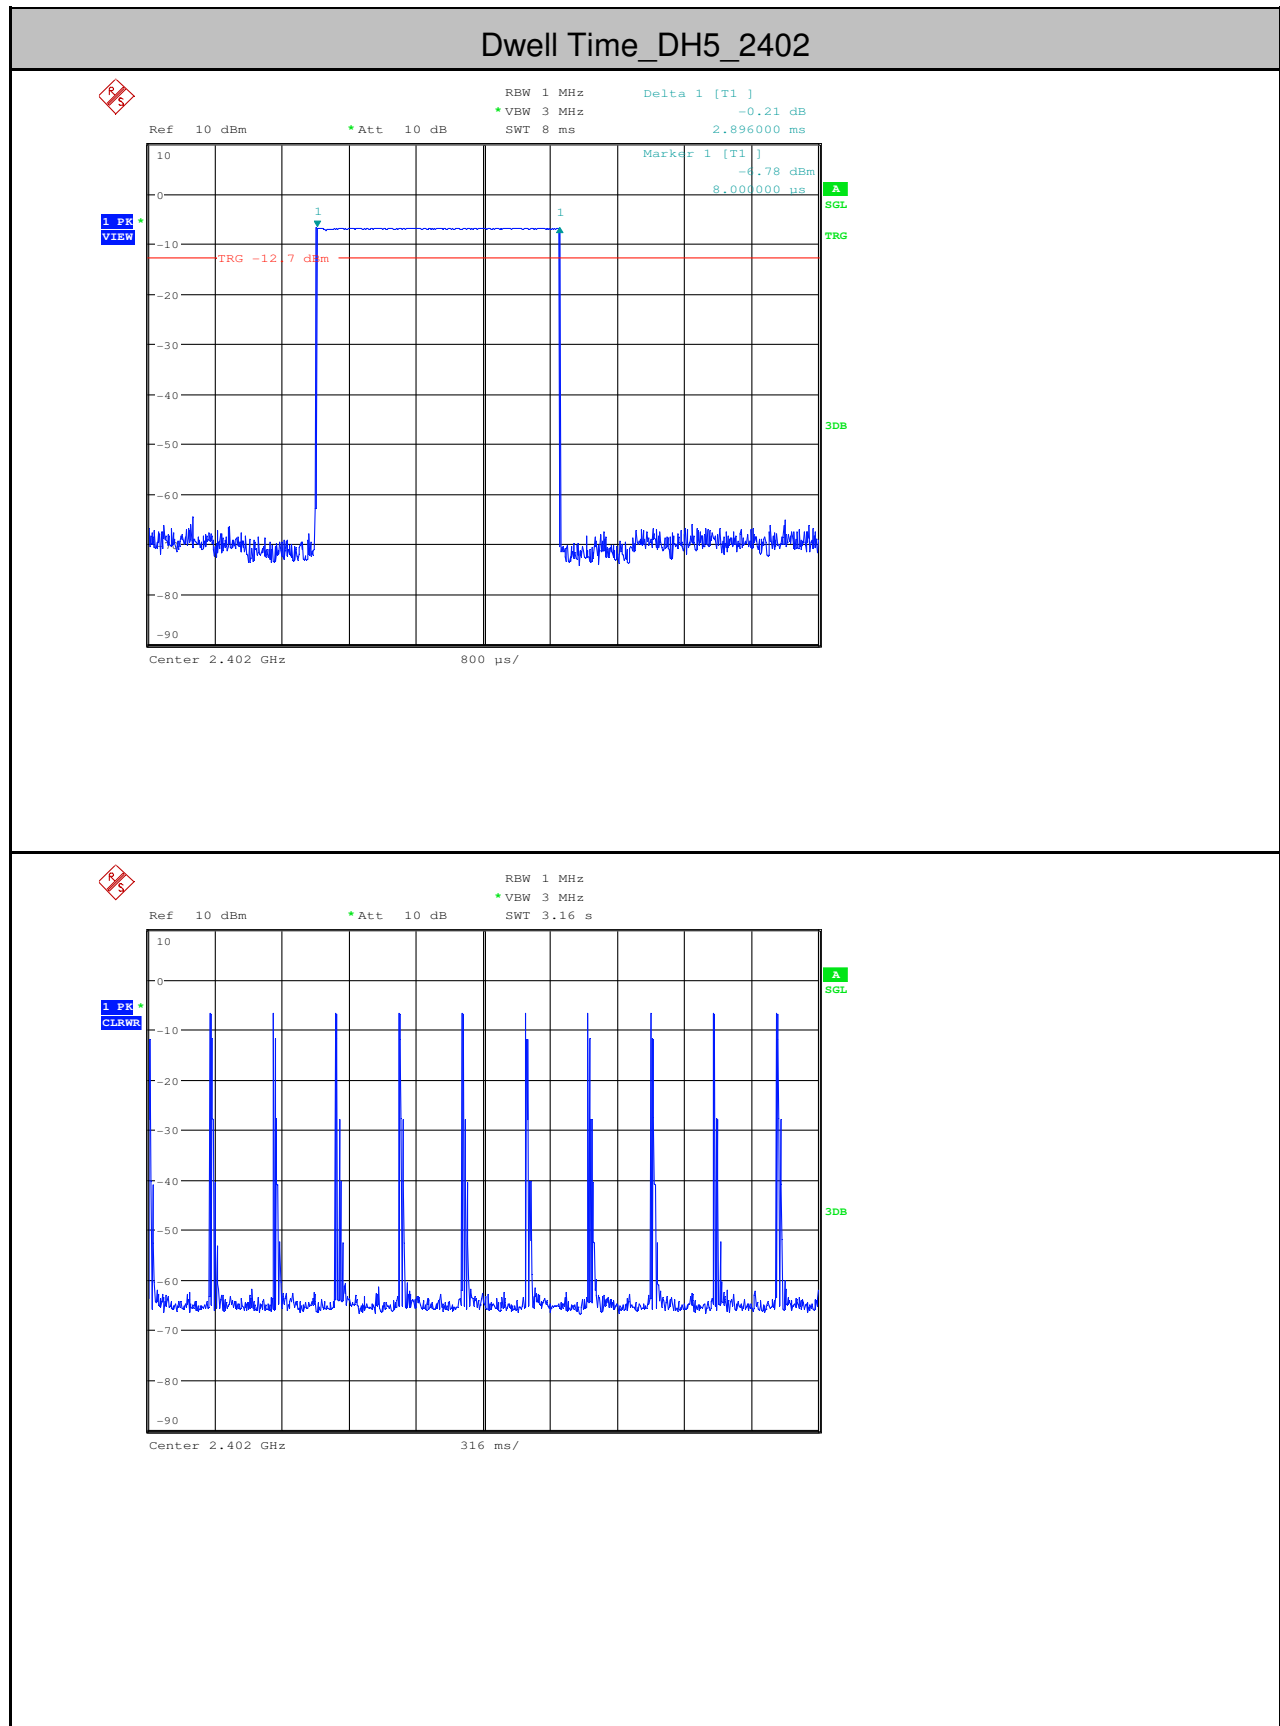

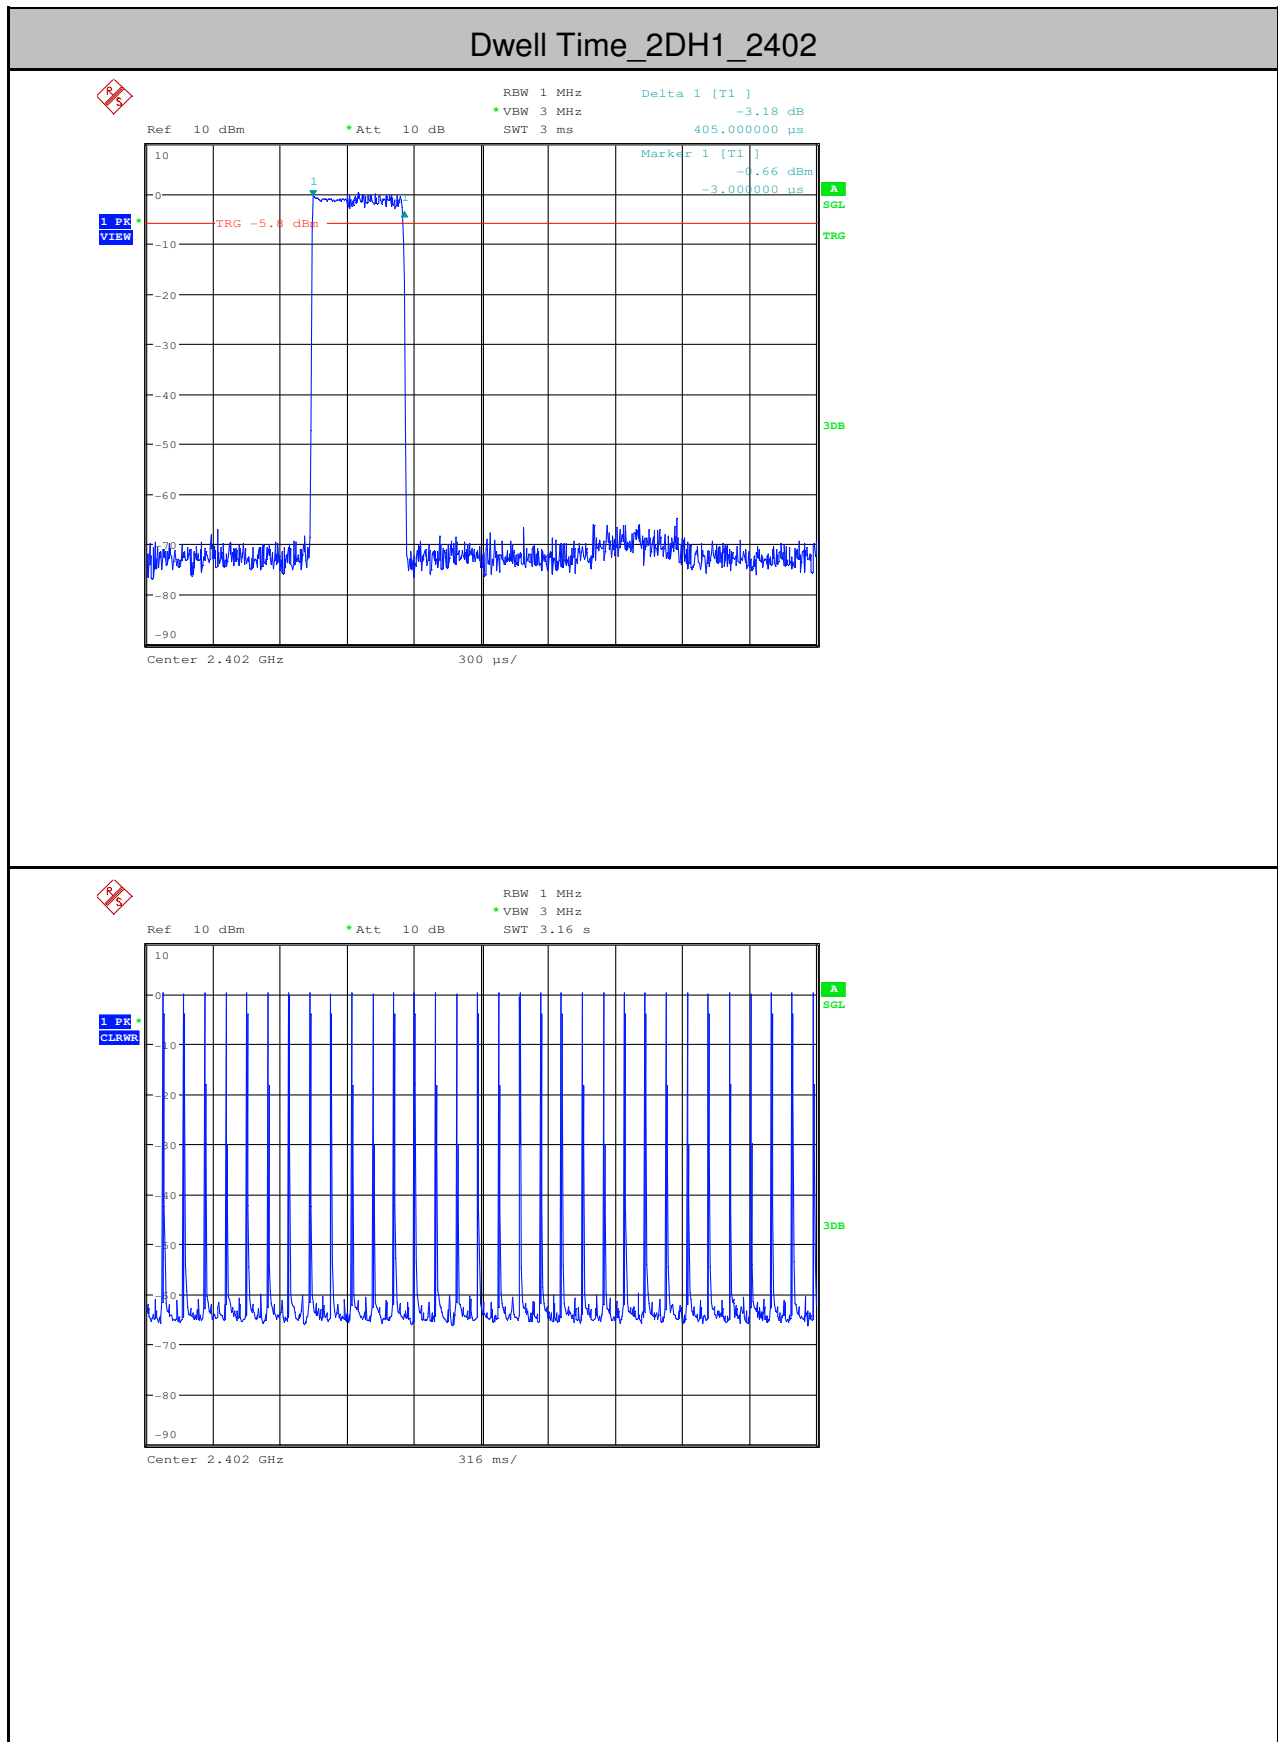





Dwell Time\_2DH3\_2402

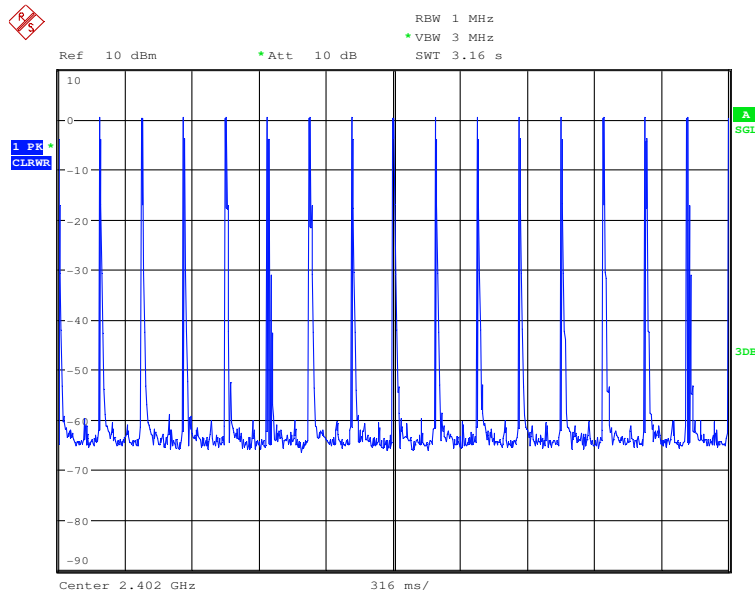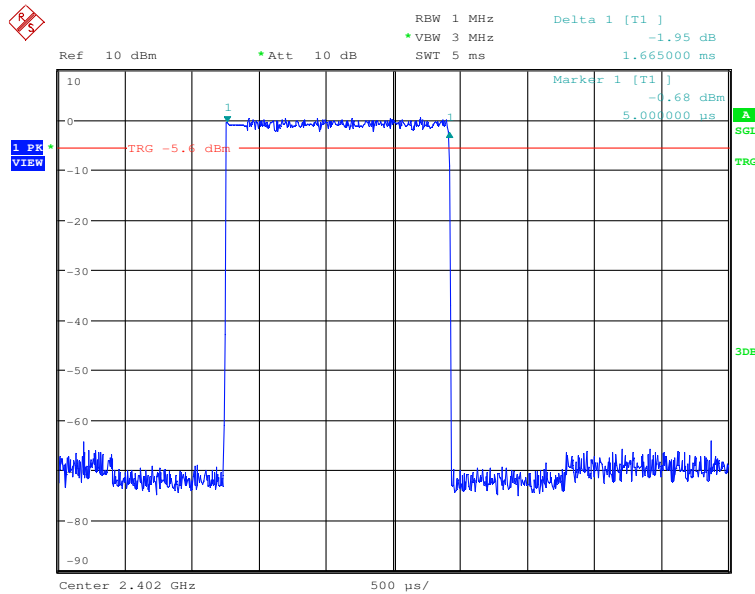





Dwell Time\_2DH5\_2402

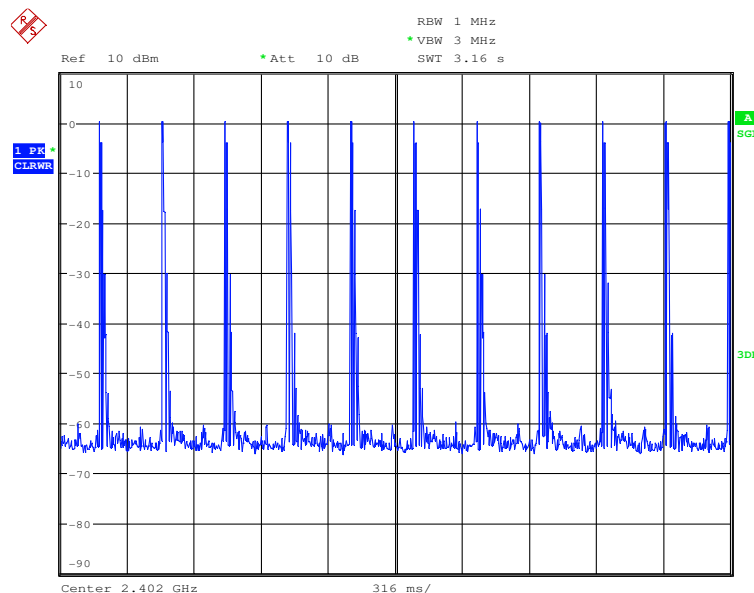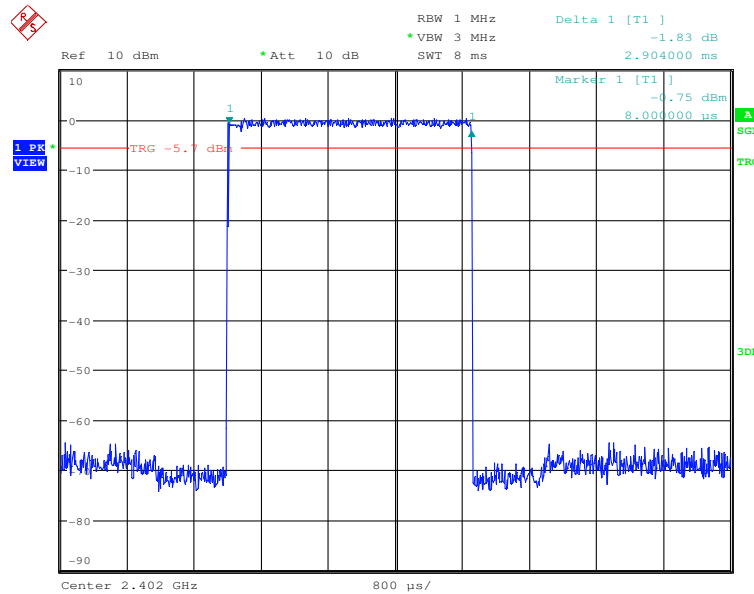







Dwell Time\_3DH1\_2402

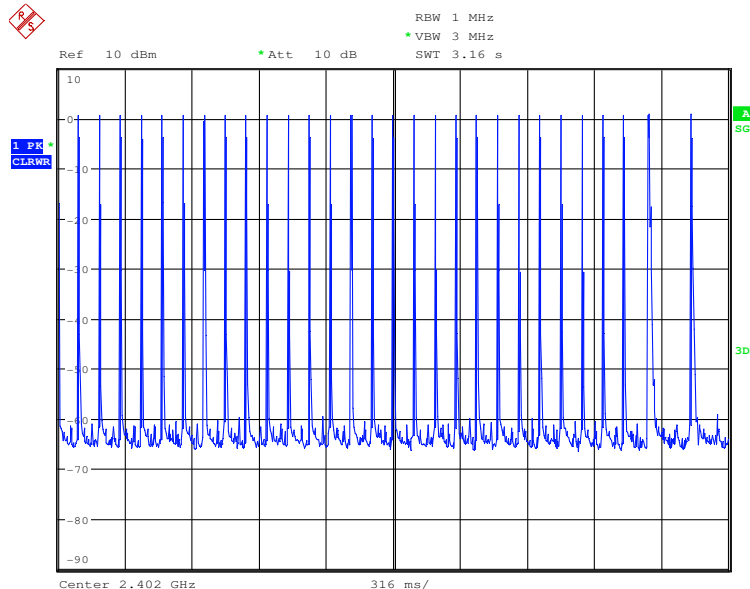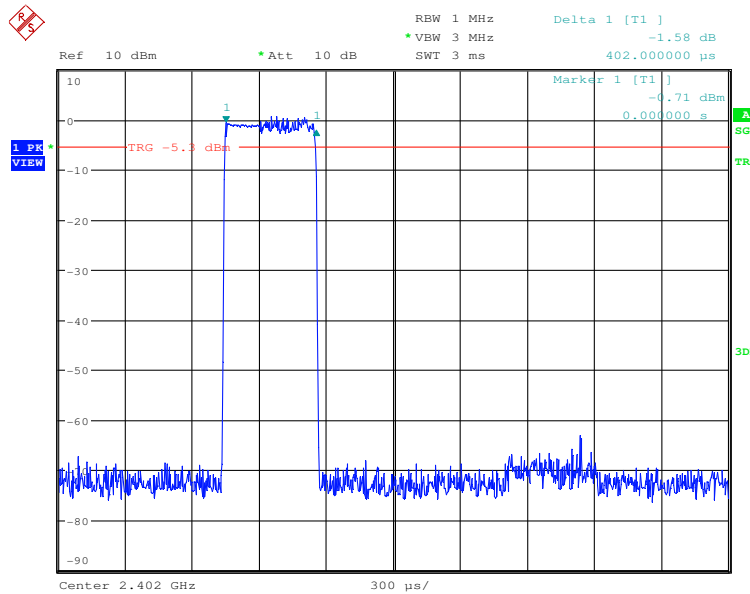





Dwell Time\_3DH3\_2402

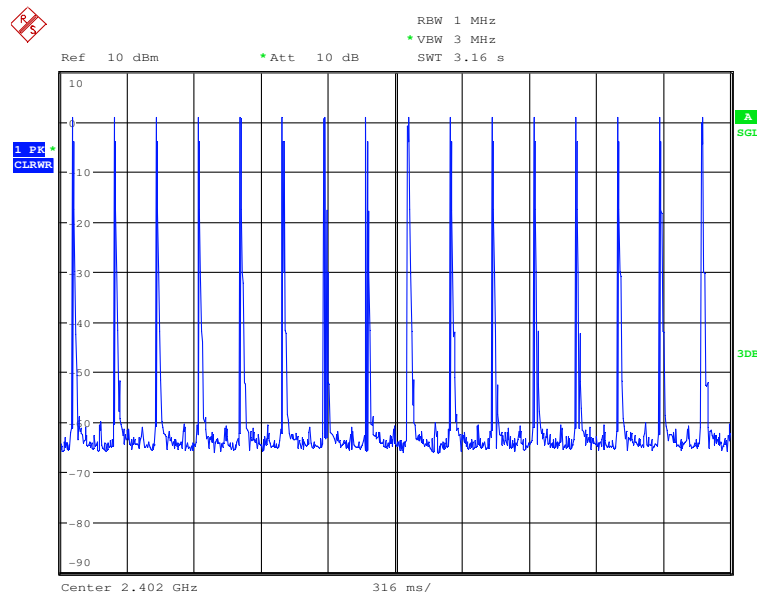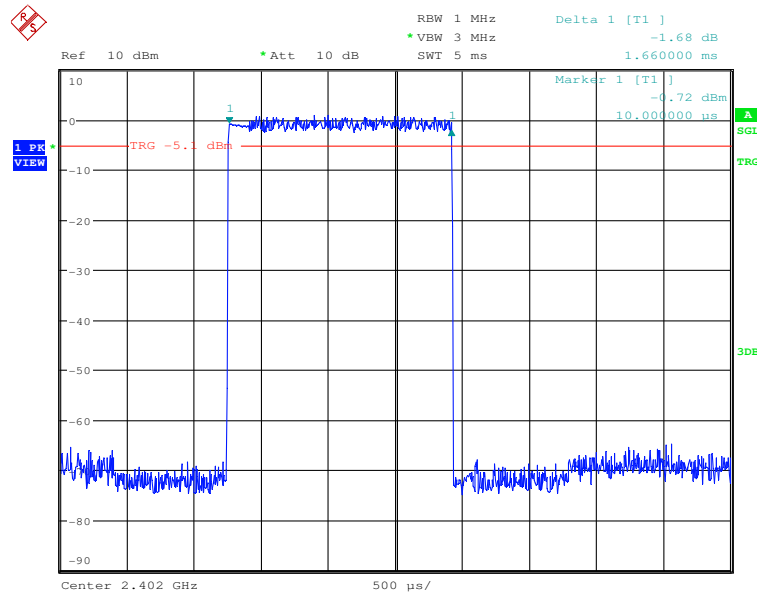




Dwell Time\_3DH5\_2402

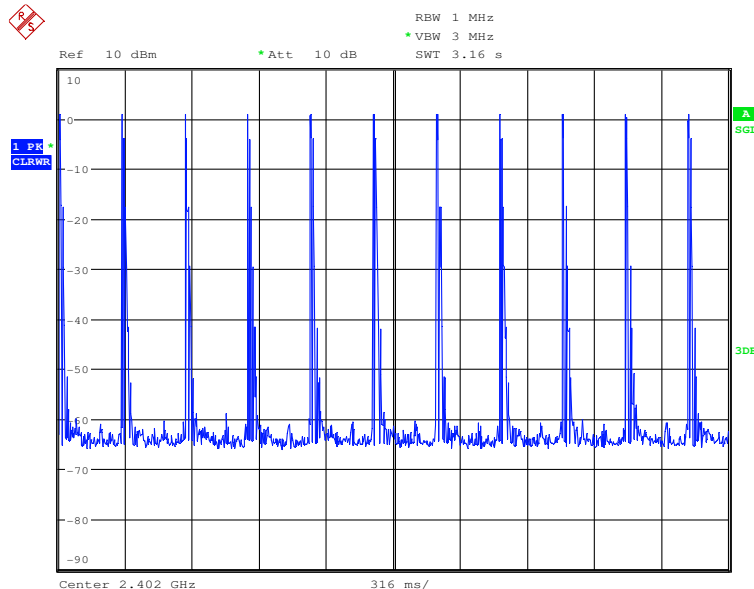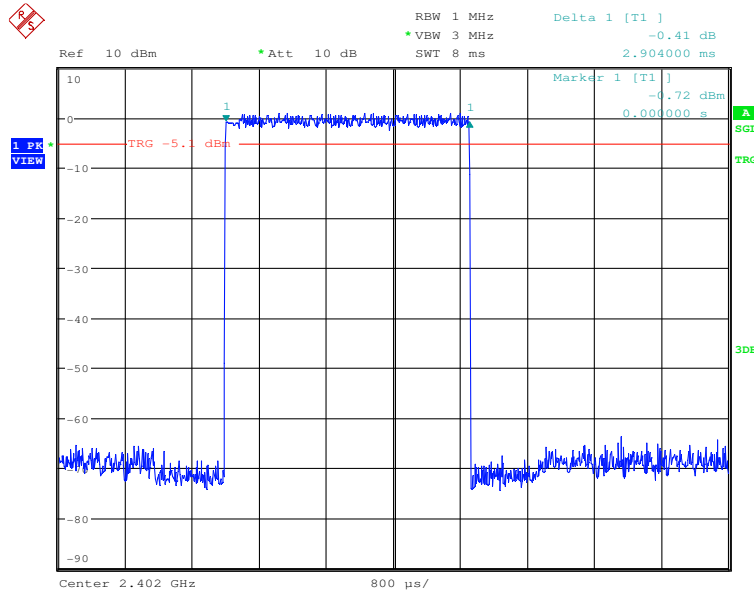




## 6.Hopping Channel Number

| Test Mode | Test Channel | Number of Hopping Channel[N] | Limit[N]  | Verdict |
|-----------|--------------|------------------------------|-----------|---------|
| DH5       | 2402         | 79                           | $\geq 15$ | PASS    |
| 2DH5      | 2402         | 79                           | $\geq 15$ | PASS    |
| 3DH5      | 2402         | 79                           | $\geq 15$ | PASS    |

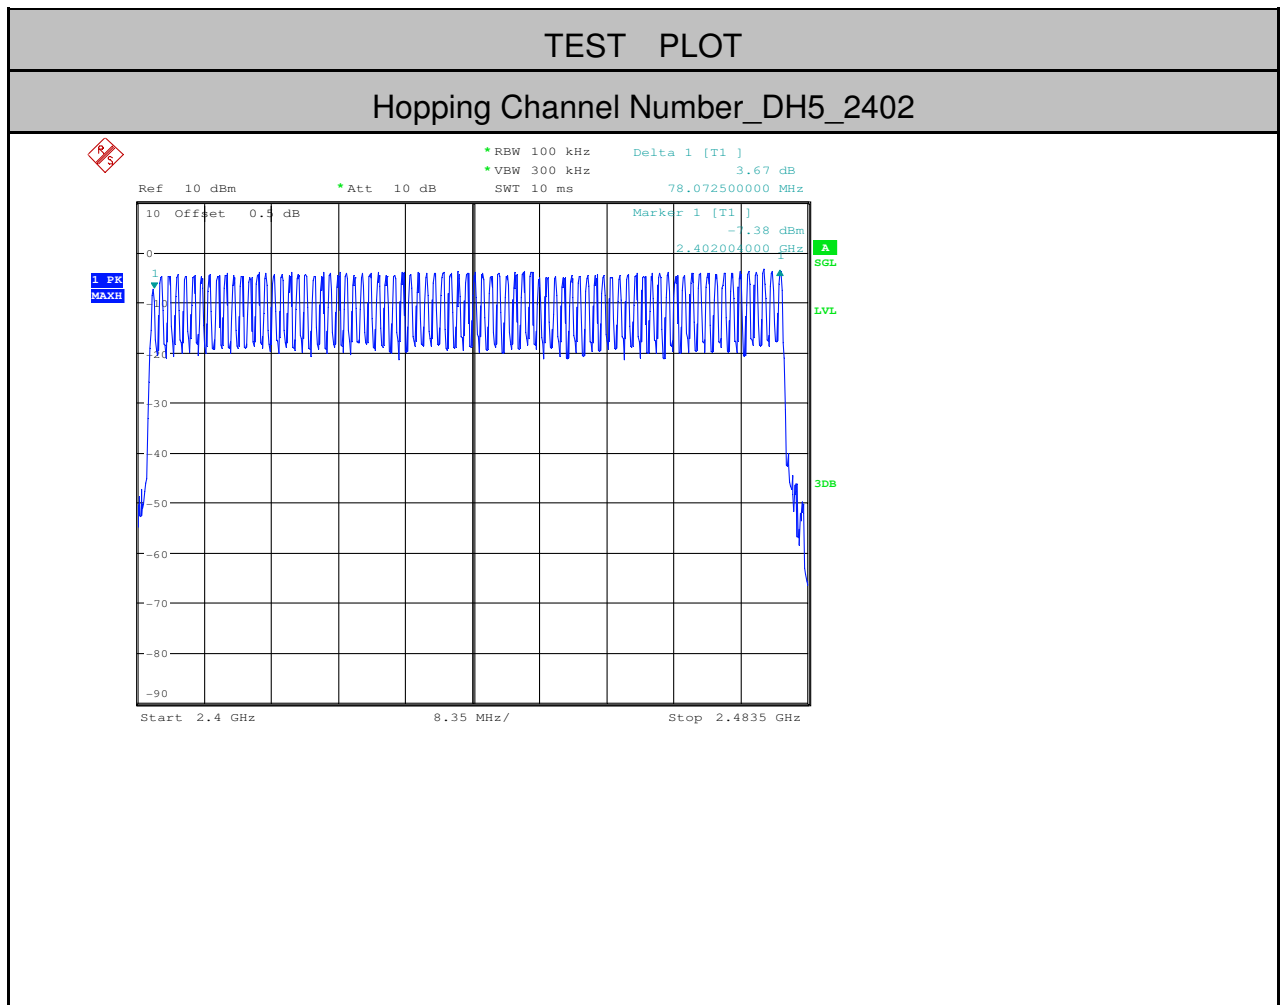




Hopping Channel Number\_2DH5\_2402

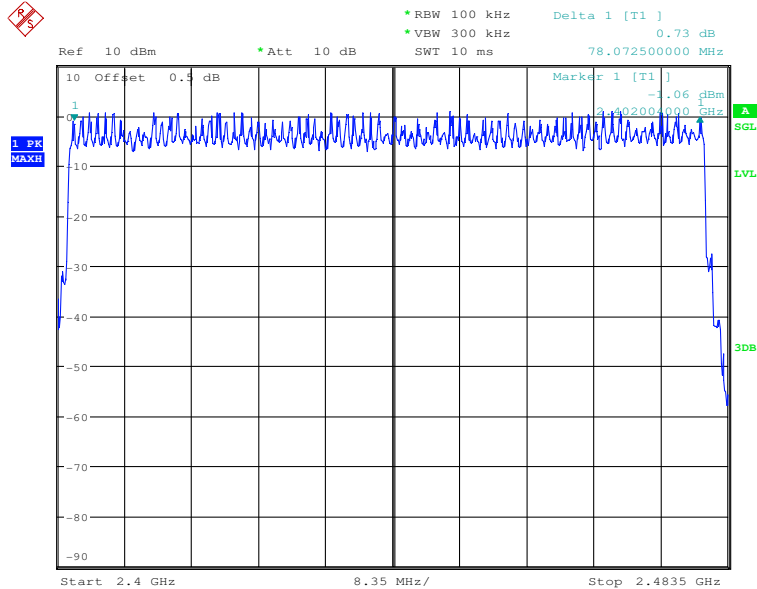




### Hopping Channel Number\_3DH5\_2402

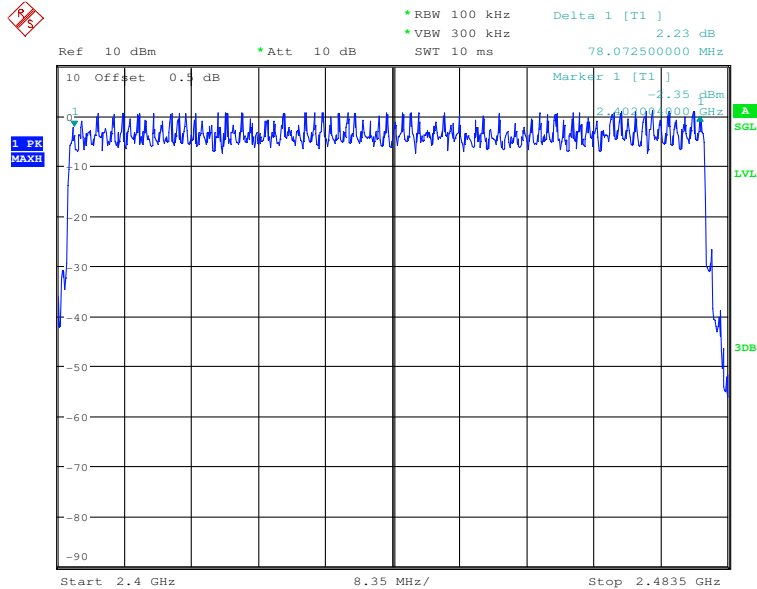

## 7. Band-edge for RF Conducted Emissions


| Test Mode | Test Channel | Hopping | Carrier Power[dBm] | Max. Spurious Level [dBm] | Limit[dBm] | Verdict |
|-----------|--------------|---------|--------------------|---------------------------|------------|---------|
| DH5       | 2402         | Off     | 0.150              | -64.098                   | <-19.85    | PASS    |
| DH5       | 2480         | Off     | 2.430              | -56.348                   | <-17.57    | PASS    |
| 2DH5      | 2402         | Off     | -0.890             | -66.190                   | <-20.89    | PASS    |
| 2DH5      | 2480         | Off     | 1.300              | -57.752                   | <-18.7     | PASS    |
| 3DH5      | 2402         | Off     | -1.390             | -65.626                   | <-21.39    | PASS    |
| 3DH5      | 2480         | Off     | 1.300              | -54.987                   | <-18.7     | PASS    |
| DH5       | 2402         | On      | -4.850             | -55.416                   | <-24.85    | PASS    |
| DH5       | 2480         | On      | -4.130             | -64.126                   | <-24.13    | PASS    |
| 2DH5      | 2402         | On      | -0.660             | -51.330                   | <-20.66    | PASS    |
| 2DH5      | 2480         | On      | 0.440              | -60.247                   | <-19.56    | PASS    |
| 3DH5      | 2402         | On      | -0.900             | -52.220                   | <-20.9     | PASS    |
| 3DH5      | 2480         | On      | 1.130              | -55.977                   | <-18.87    | PASS    |



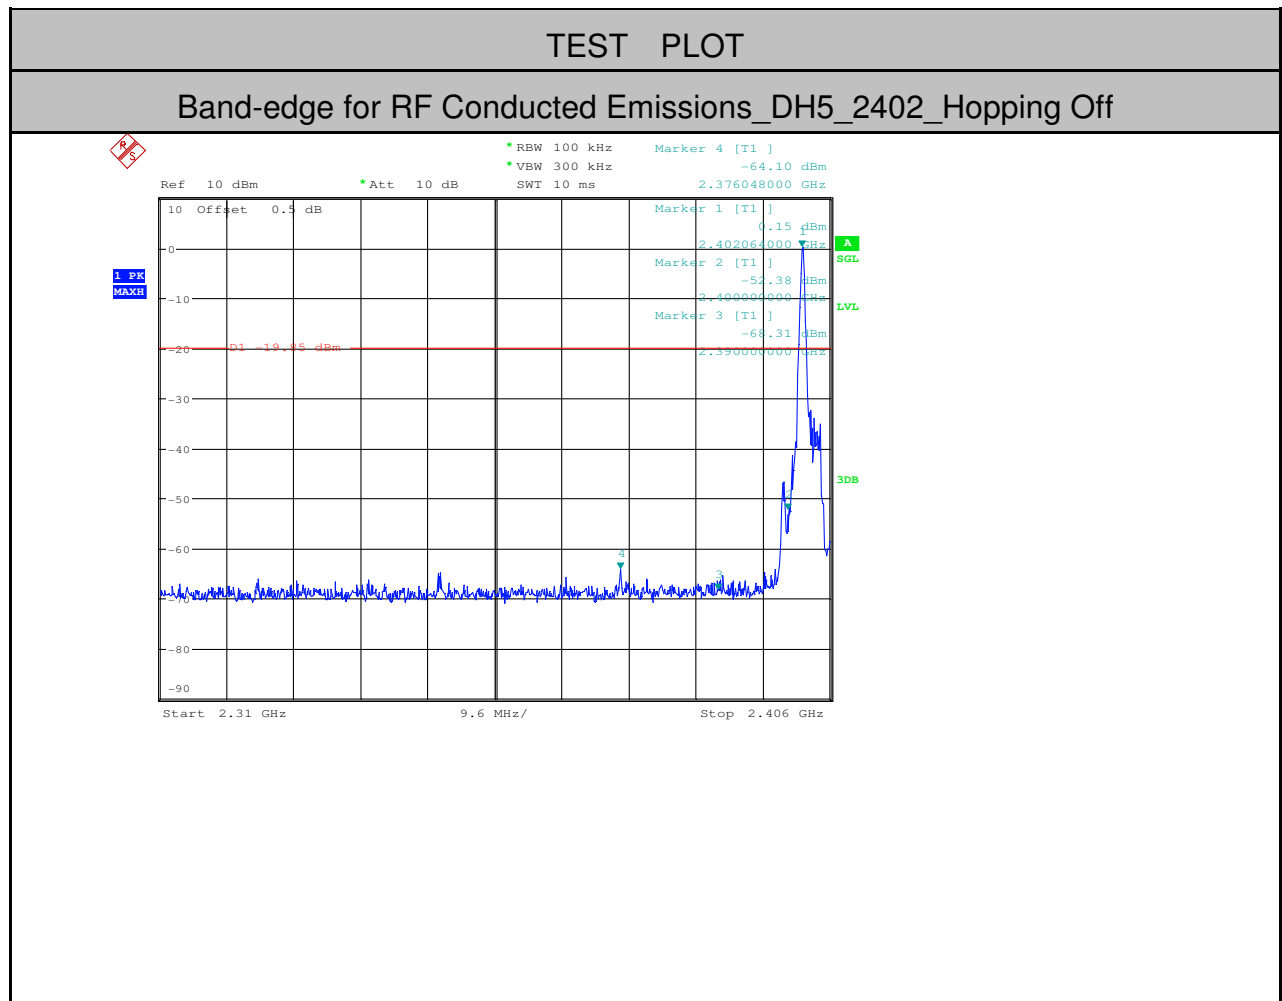





Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping Off

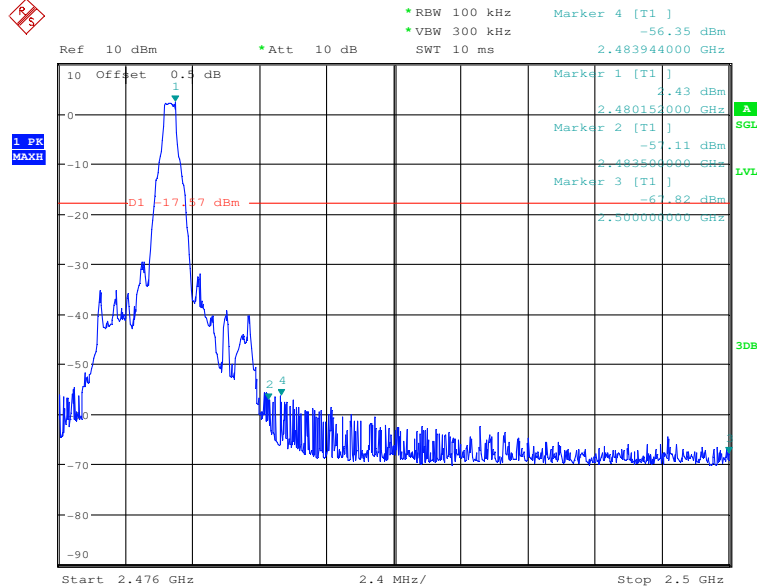




Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping Off

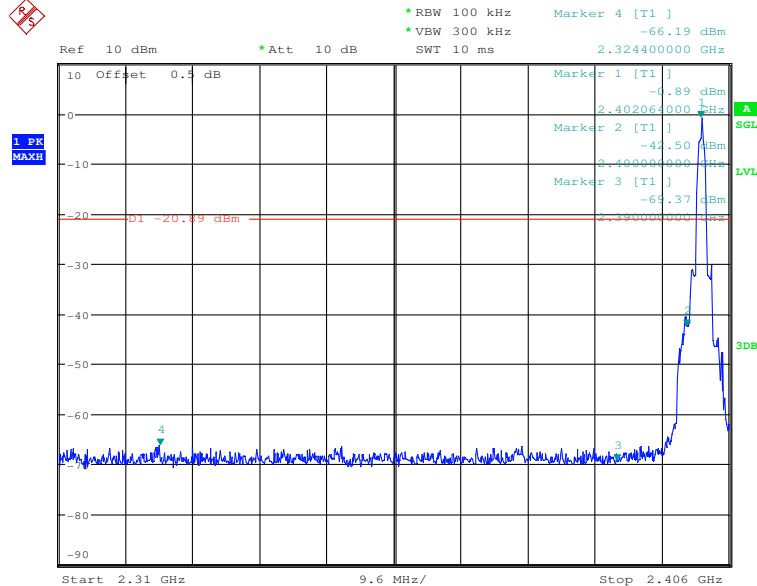

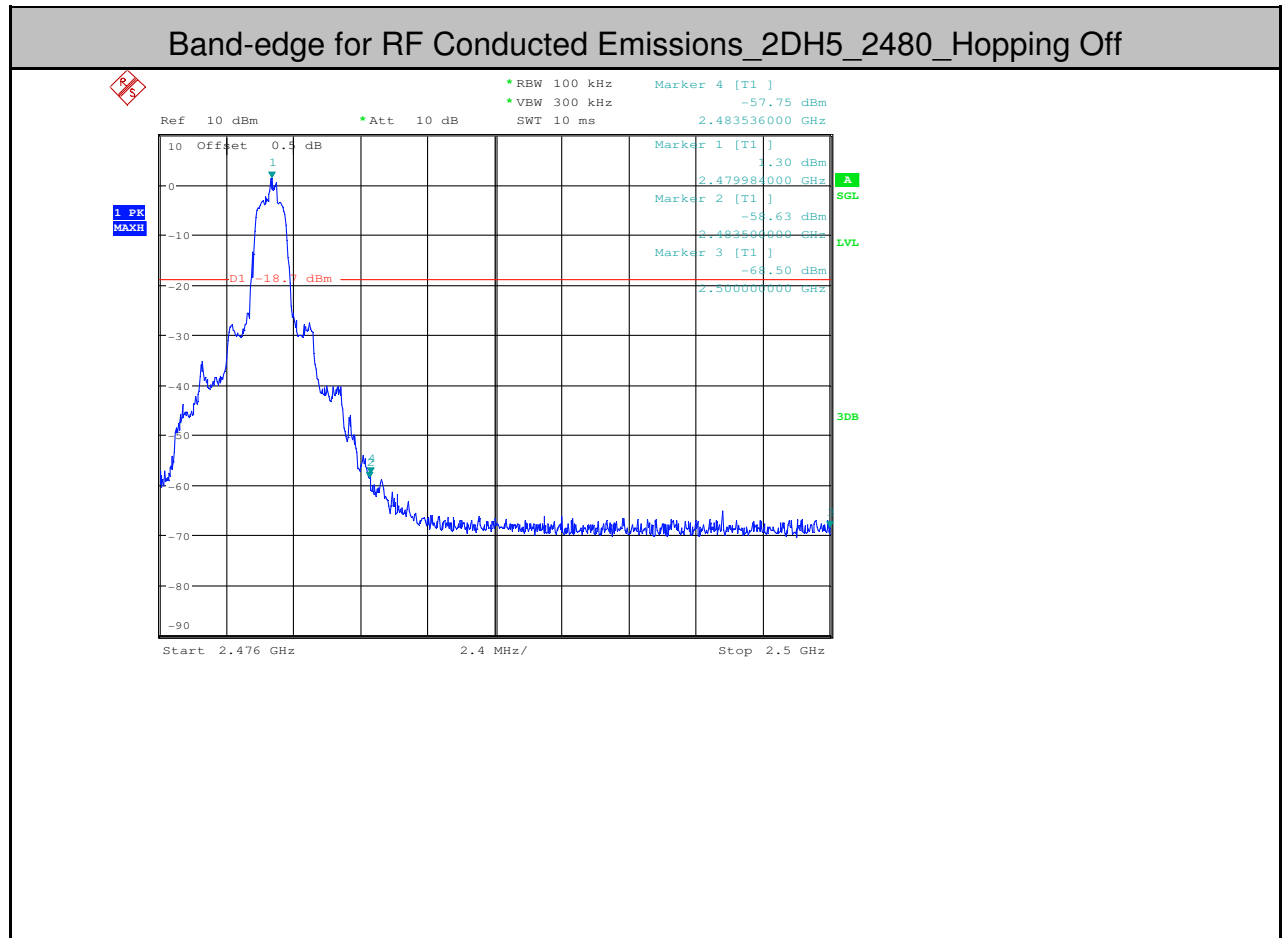




Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping Off

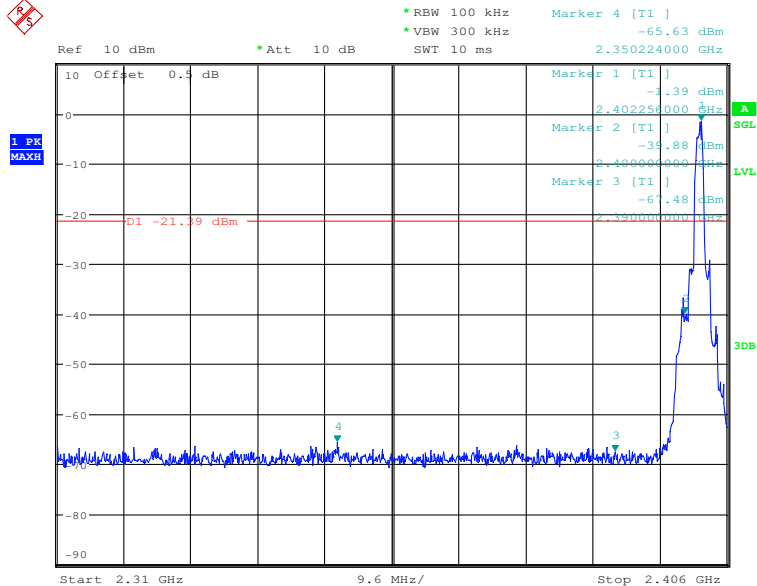






Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping On

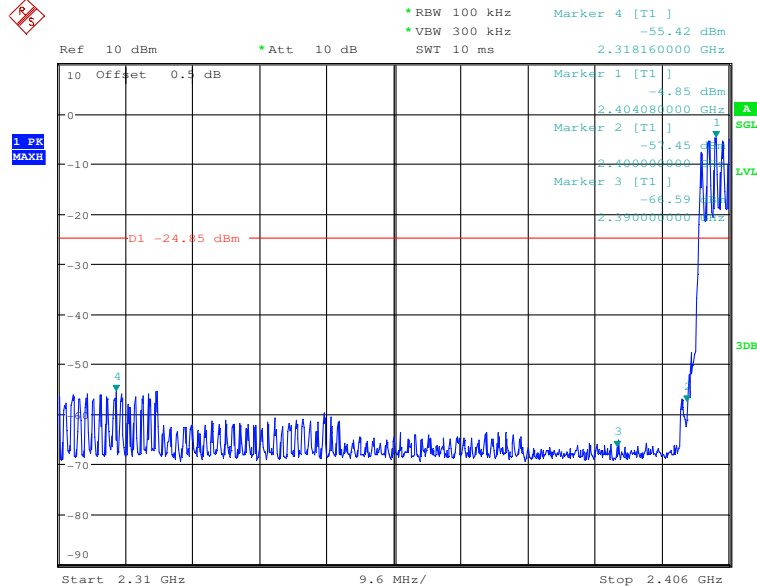




Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping On

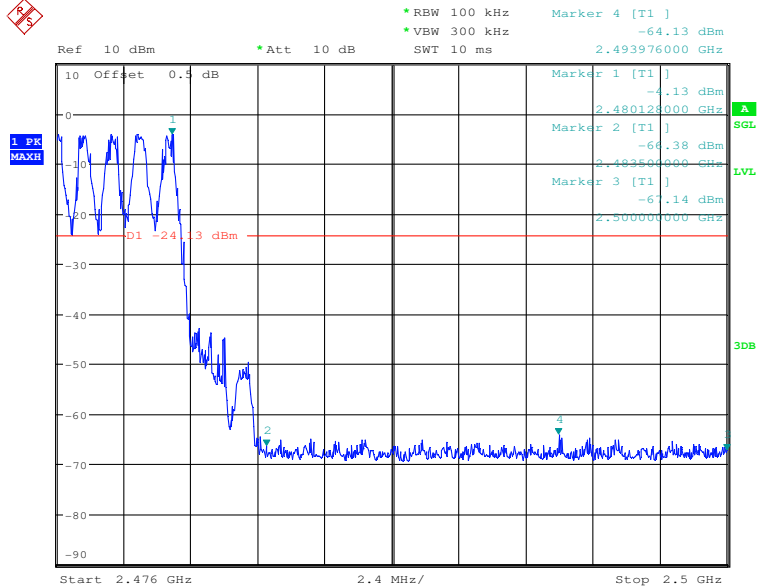






Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping On

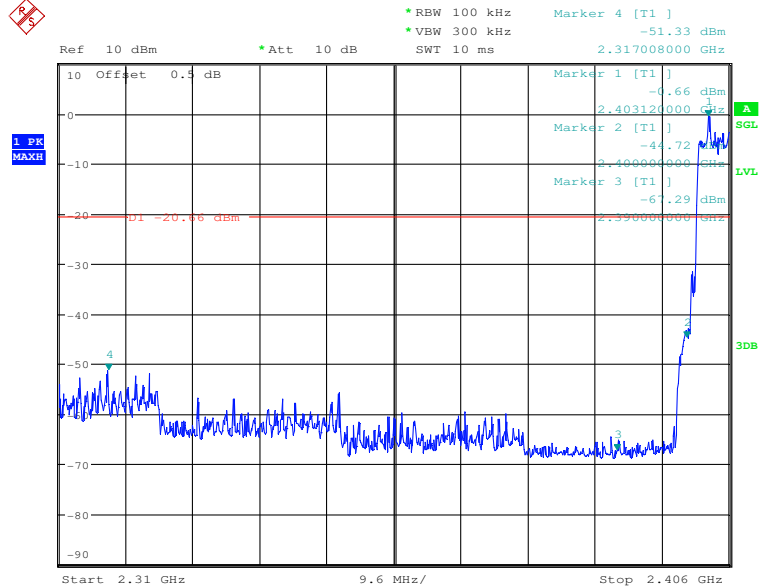




Band-edge for RF Conducted Emissions\_2DH5\_2480\_Hopping On

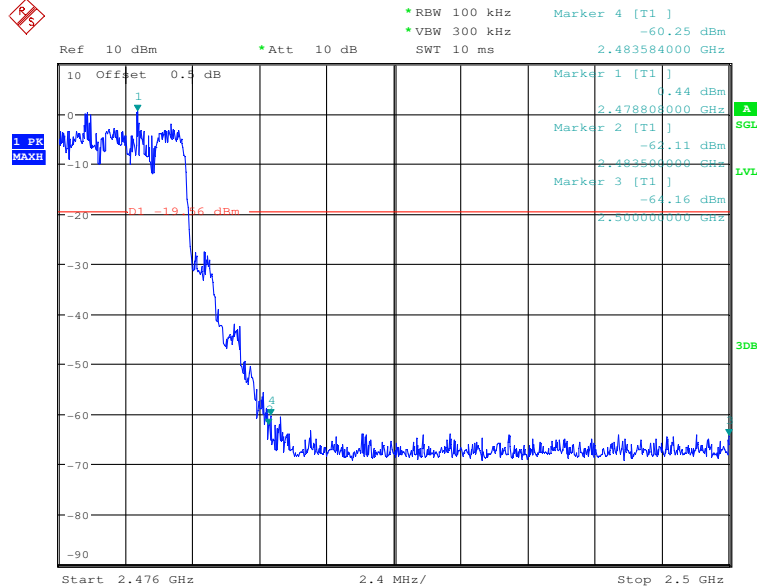




Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping On

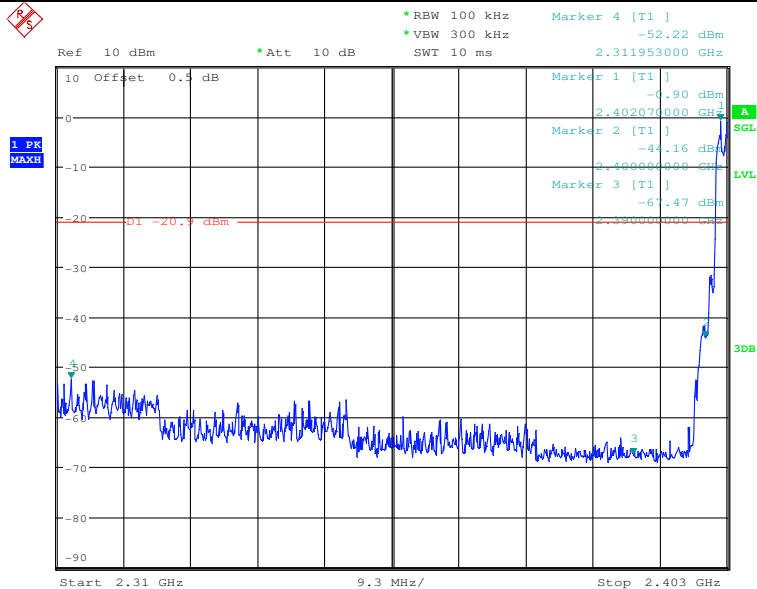




Band-edge for RF Conducted Emissions\_3DH5\_2480\_Hopping On

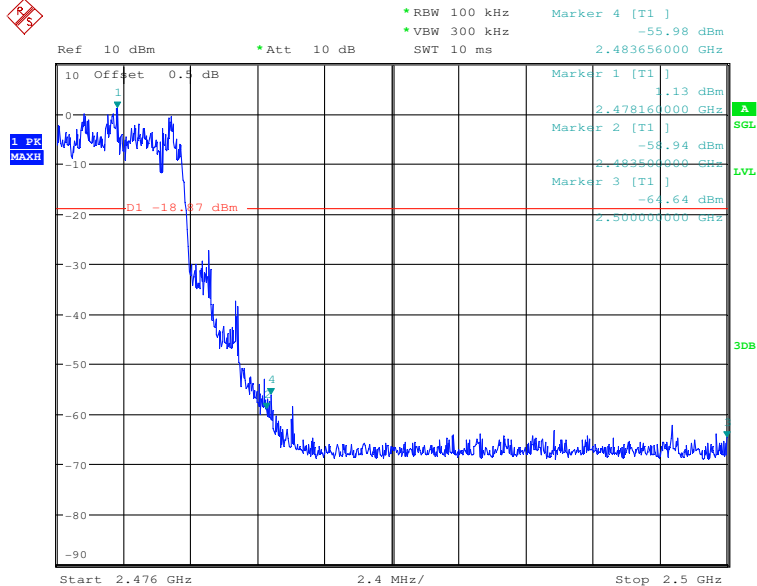


## 8.RF Conducted Spurious Emissions

| Test Mode | Test Channel | StartFre [MHz] | StopFre [MHz] | RBW [kHz] | VBW [kHz] | Pref [dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|-----------|--------------|----------------|---------------|-----------|-----------|------------|------------------|-------------|---------|
| DH5       | 2402         | 30             | 10000         | 1000      | 3000      | 0.27       | -44.250          | <-19.73     | PASS    |
| DH5       | 2402         | 10000          | 25000         | 1000      | 3000      | 0.27       | -58.090          | <-19.73     | PASS    |
| DH5       | 2441         | 30             | 10000         | 1000      | 3000      | 2.3        | -45.440          | <-17.7      | PASS    |
| DH5       | 2441         | 10000          | 25000         | 1000      | 3000      | 2.3        | -58.800          | <-17.7      | PASS    |
| DH5       | 2480         | 30             | 10000         | 1000      | 3000      | 2.77       | -44.670          | <-17.23     | PASS    |
| DH5       | 2480         | 10000          | 25000         | 1000      | 3000      | 2.77       | -61.170          | <-17.23     | PASS    |
| 2DH5      | 2402         | 30             | 10000         | 1000      | 3000      | -0.87      | -44.610          | <-20.87     | PASS    |
| 2DH5      | 2402         | 10000          | 25000         | 1000      | 3000      | -0.87      | -63.200          | <-20.87     | PASS    |
| 2DH5      | 2441         | 30             | 10000         | 1000      | 3000      | 0.8        | -47.610          | <-19.2      | PASS    |
| 2DH5      | 2441         | 10000          | 25000         | 1000      | 3000      | 0.8        | -65.330          | <-19.2      | PASS    |
| 2DH5      | 2480         | 30             | 10000         | 1000      | 3000      | 1.24       | -46.600          | <-18.76     | PASS    |
| 2DH5      | 2480         | 10000          | 25000         | 1000      | 3000      | 1.24       | -65.660          | <-18.76     | PASS    |
| 3DH5      | 2402         | 30             | 10000         | 1000      | 3000      | -0.85      | -45.400          | <-20.85     | PASS    |
| 3DH5      | 2402         | 10000          | 25000         | 1000      | 3000      | -0.85      | -63.660          | <-20.85     | PASS    |
| 3DH5      | 2441         | 30             | 10000         | 1000      | 3000      | 0.86       | -47.090          | <-19.14     | PASS    |
| 3DH5      | 2441         | 10000          | 25000         | 1000      | 3000      | 0.86       | -64.730          | <-19.14     | PASS    |
| 3DH5      | 2480         | 30             | 10000         | 1000      | 3000      | 1.48       | -46.360          | <-18.52     | PASS    |
| 3DH5      | 2480         | 10000          | 25000         | 1000      | 3000      | 1.48       | -65.460          | <-18.52     | PASS    |

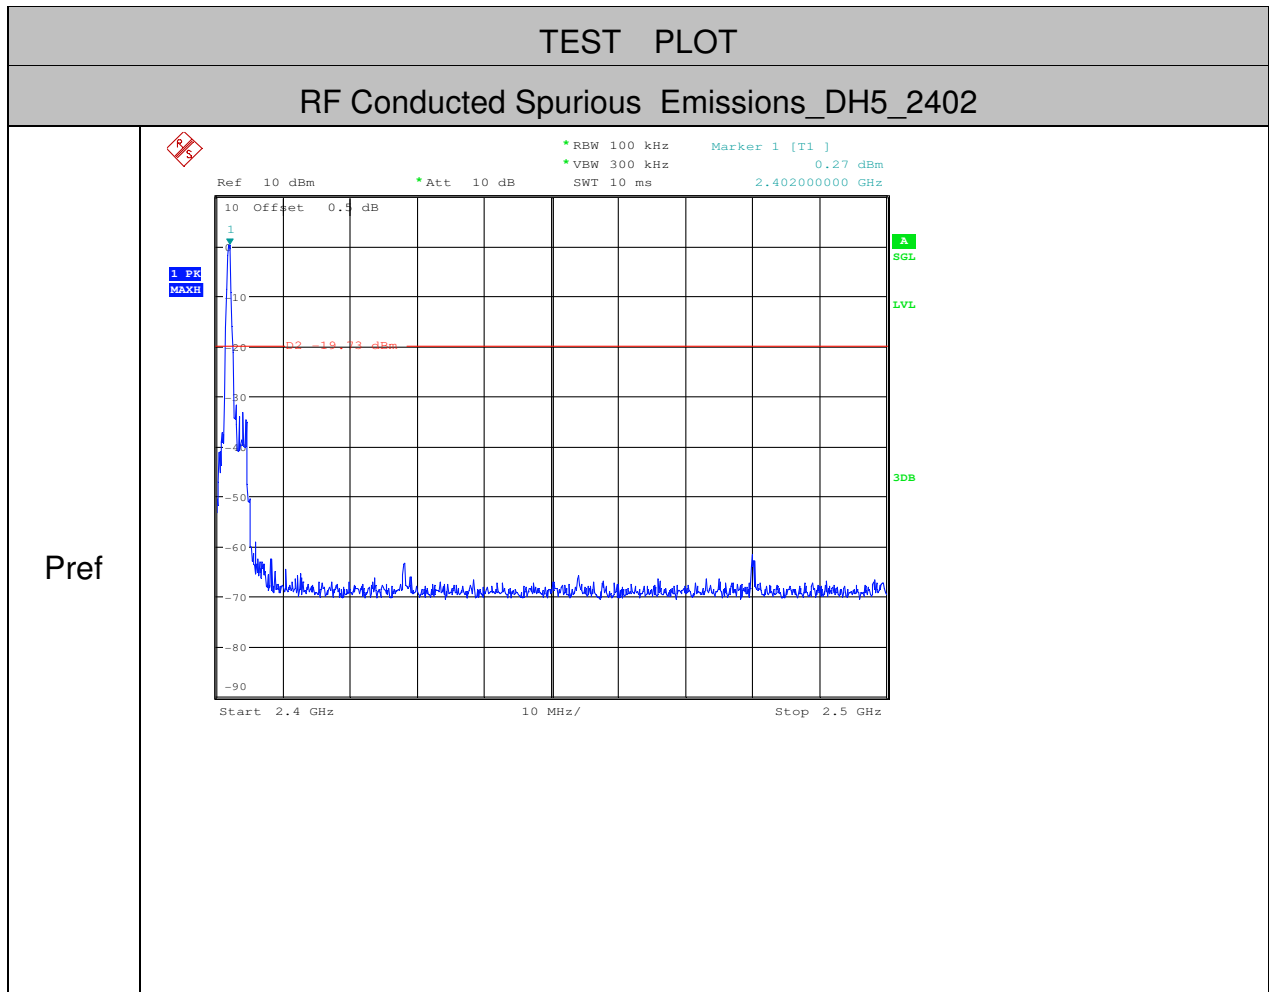




CSE\_1

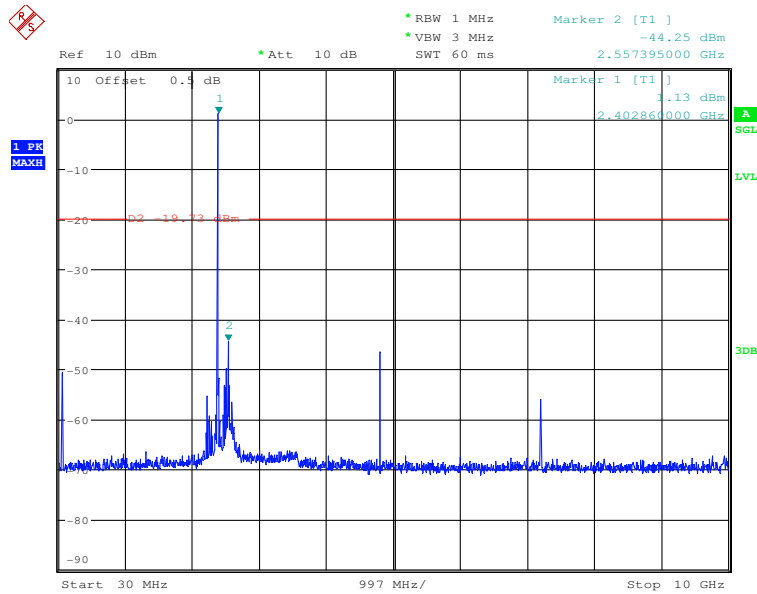


CSE\_2

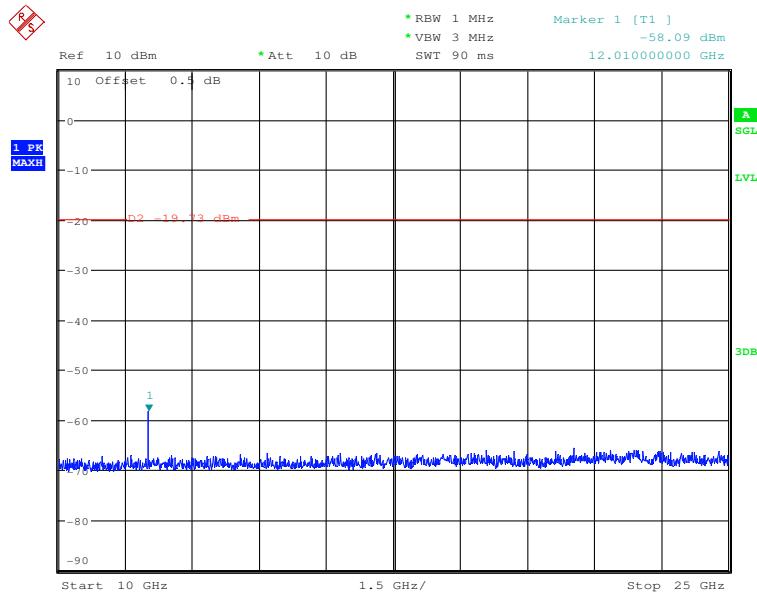



RF Conducted Spurious Emissions\_DH5\_2441


Pref

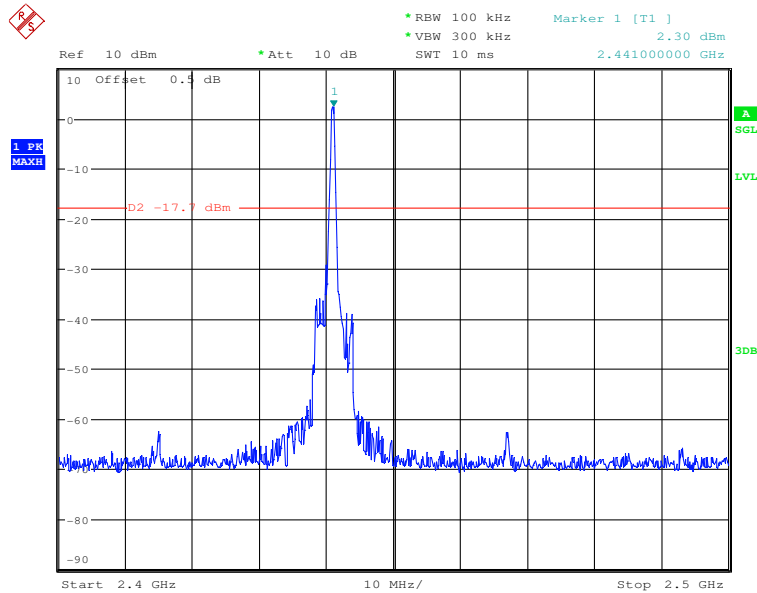






CSE\_1

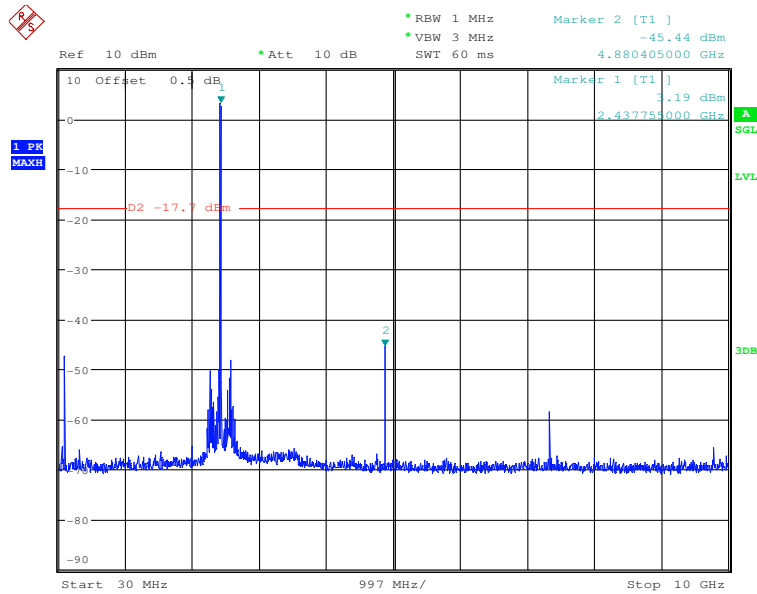


CSE\_2

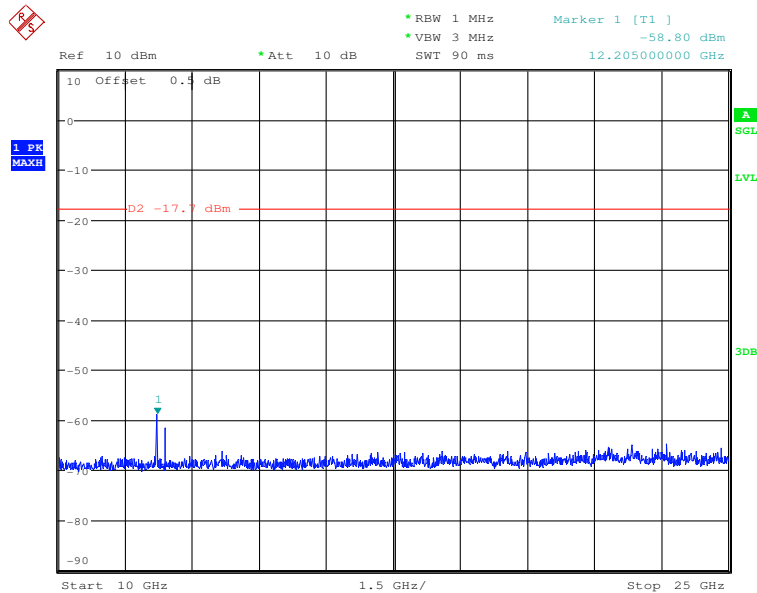




RF Conducted Spurious Emissions\_DH5\_2480

Pref

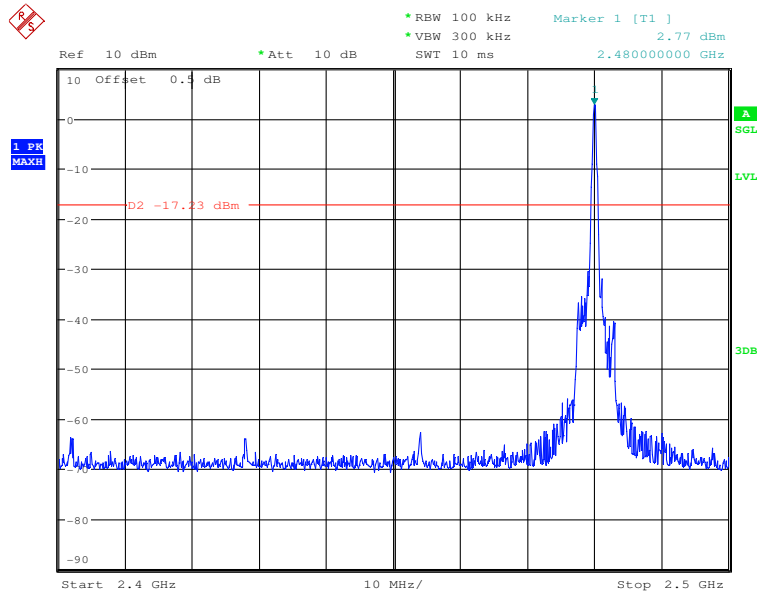




CSE\_1

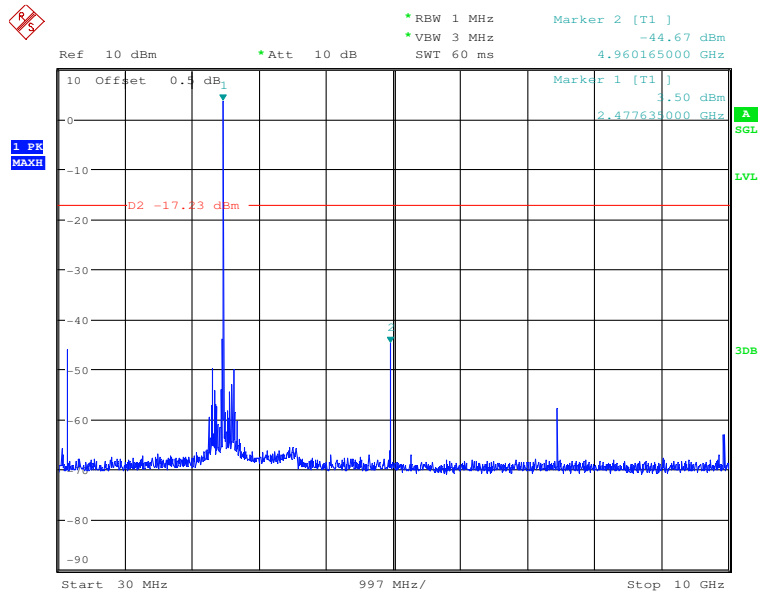


CSE\_2

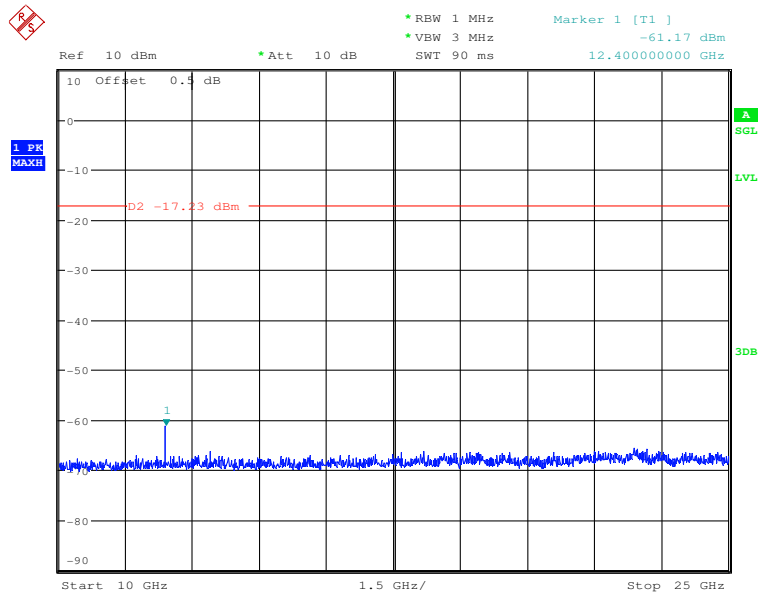




RF Conducted Spurious Emissions\_2DH5\_2402

Pref

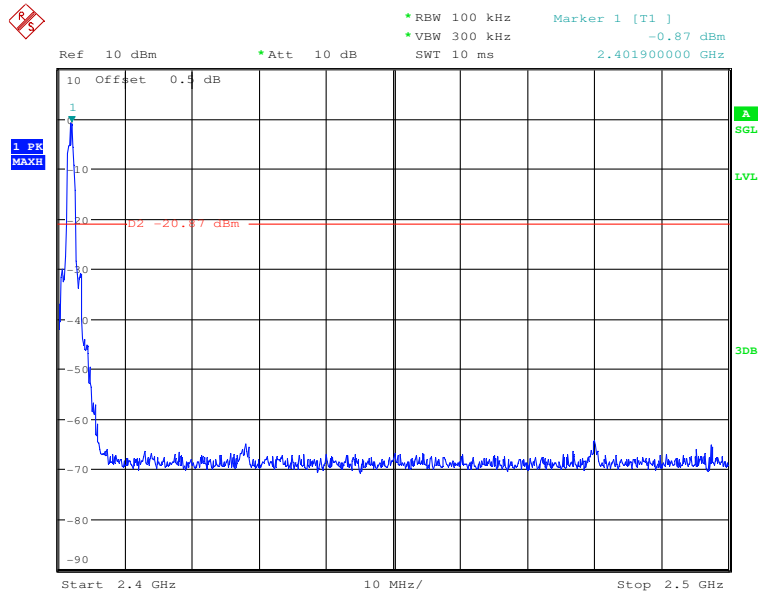




CSE\_1

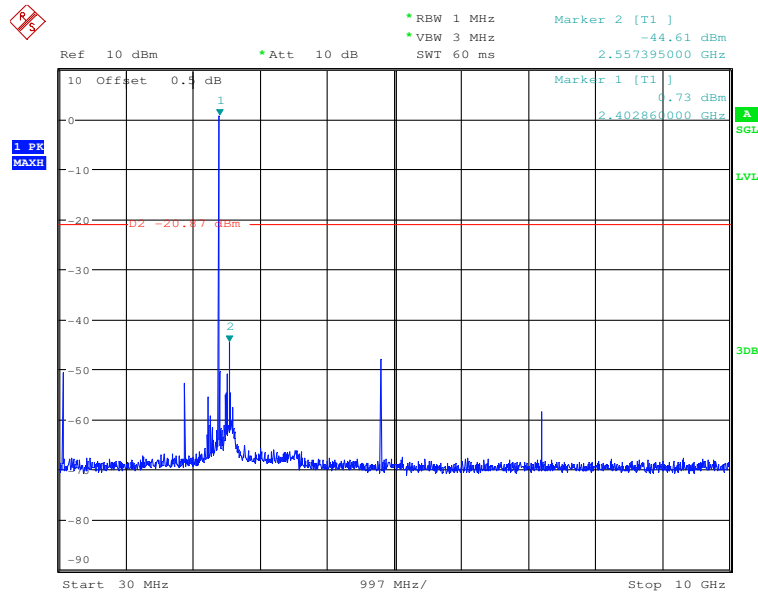


CSE\_2

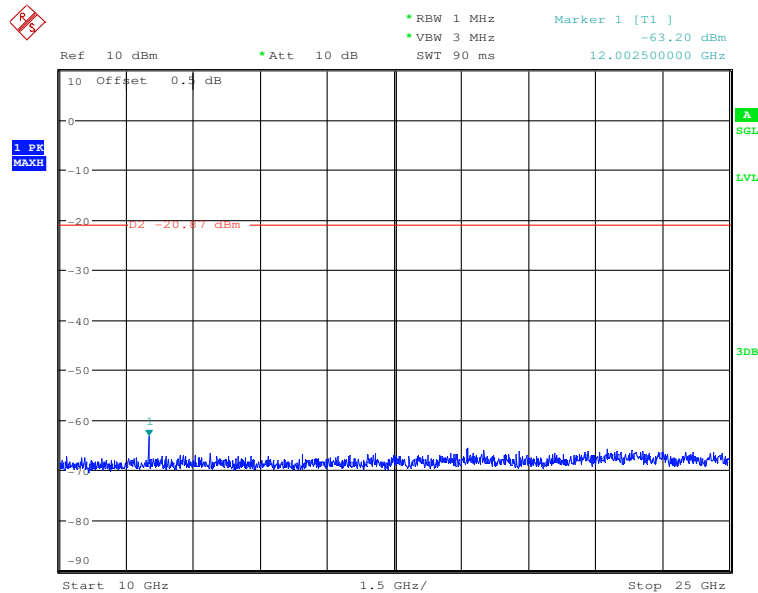




RF Conducted Spurious Emissions\_2DH5\_2441

Pref

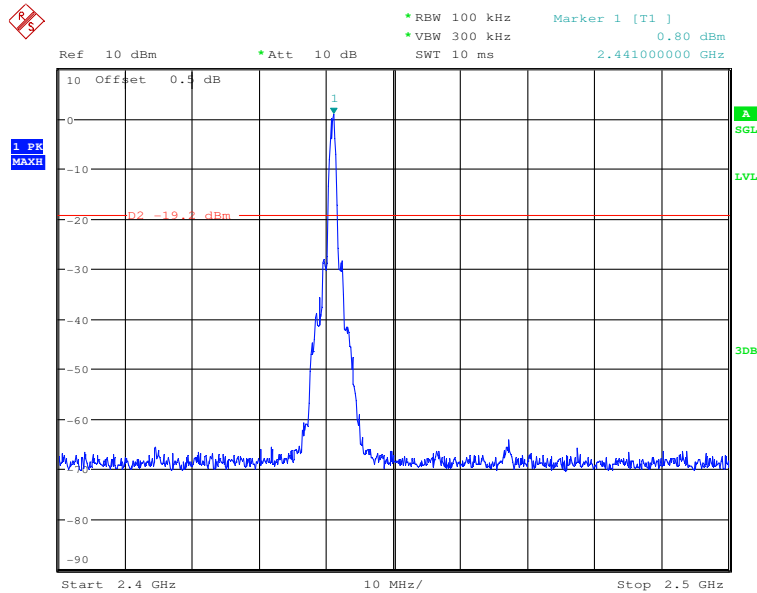




CSE\_1

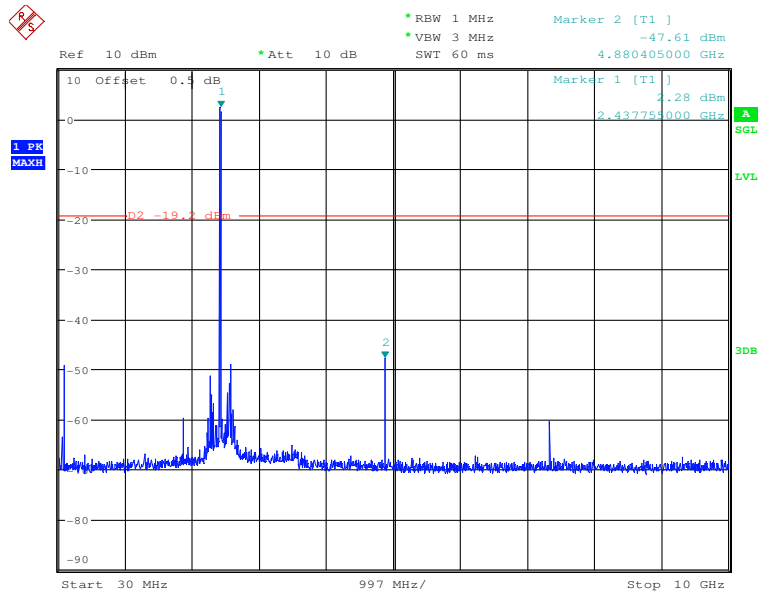


CSE\_2

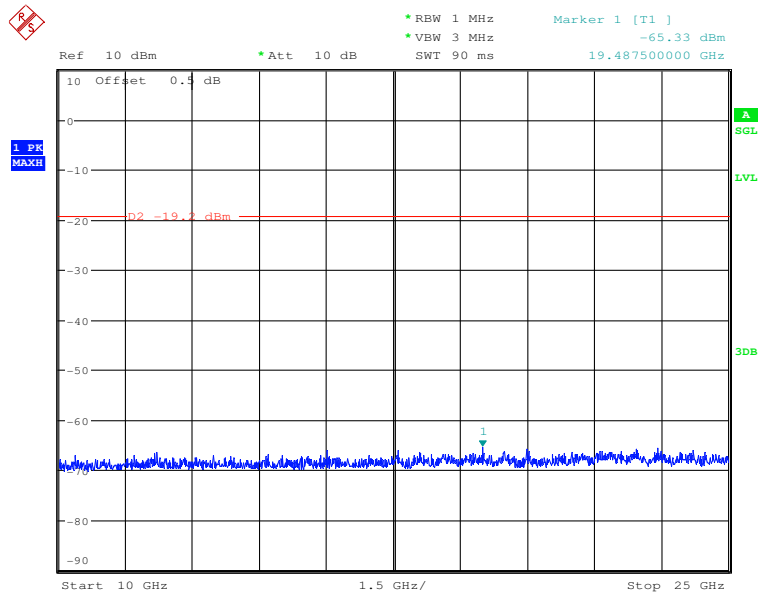



RF Conducted Spurious Emissions\_2DH5\_2480


Pref

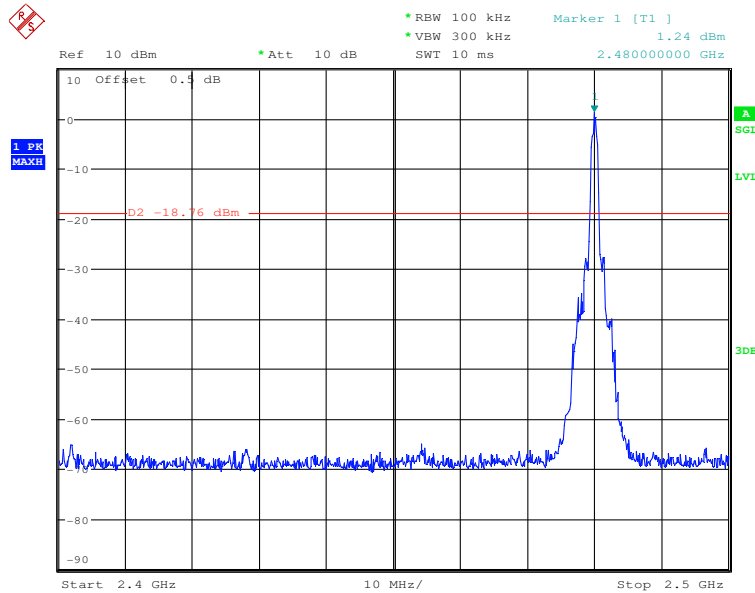






CSE\_1

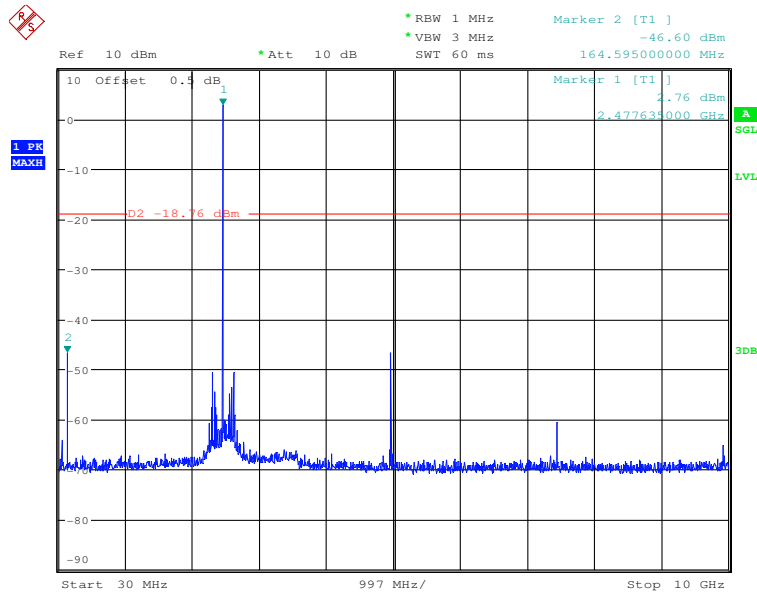


CSE\_2

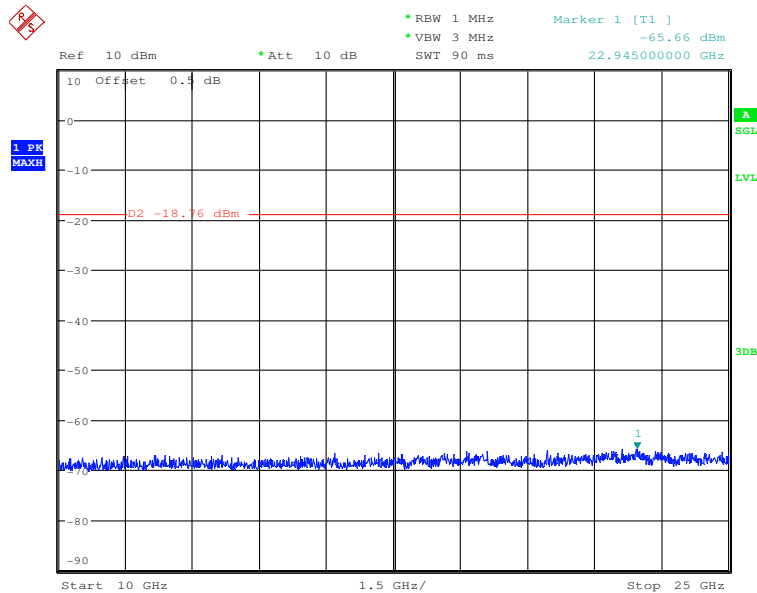




RF Conducted Spurious Emissions\_3DH5\_2402

Pref

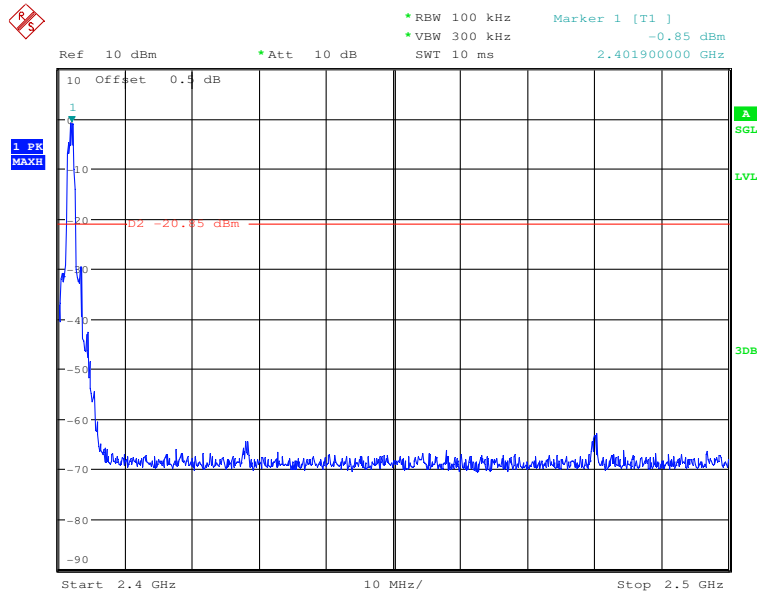


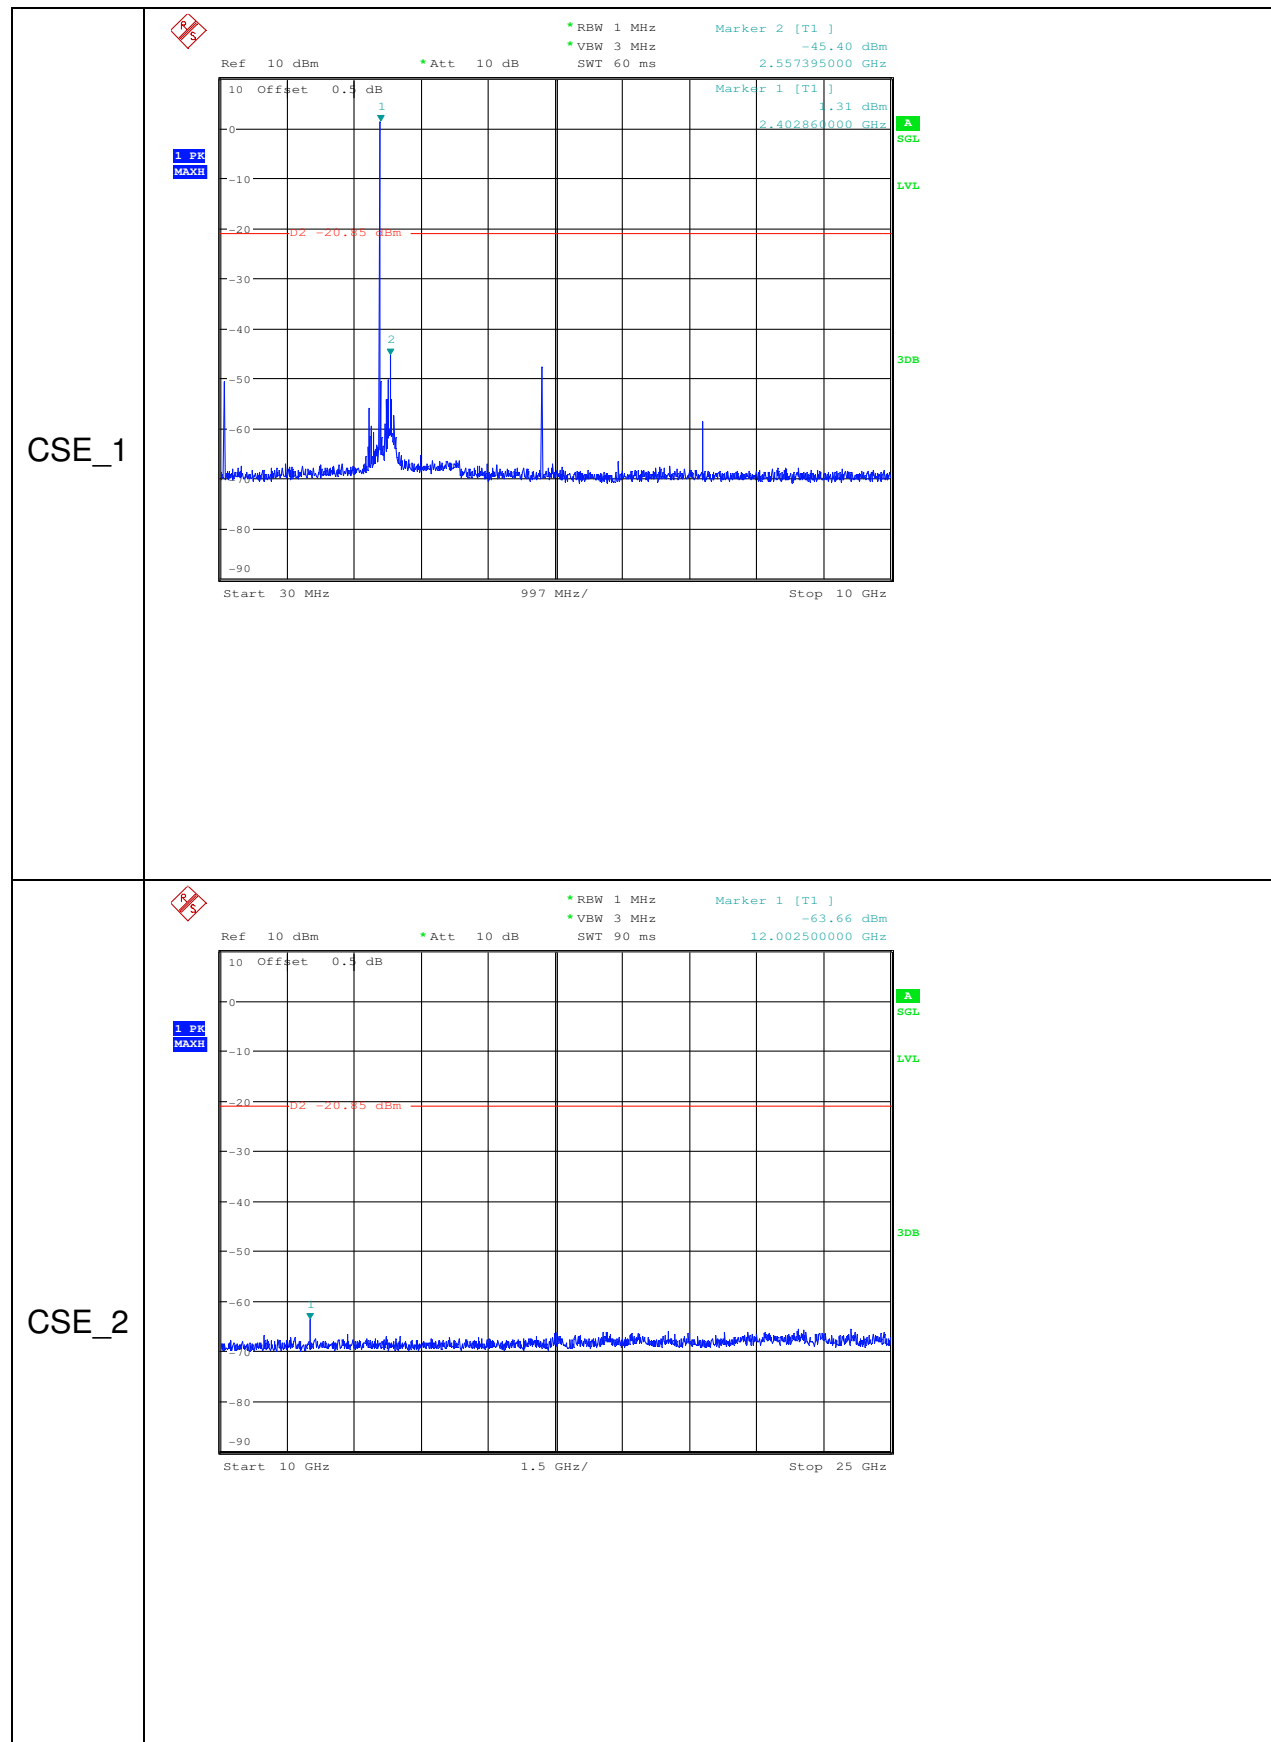




RF Conducted Spurious Emissions\_3DH5\_2441

Pref

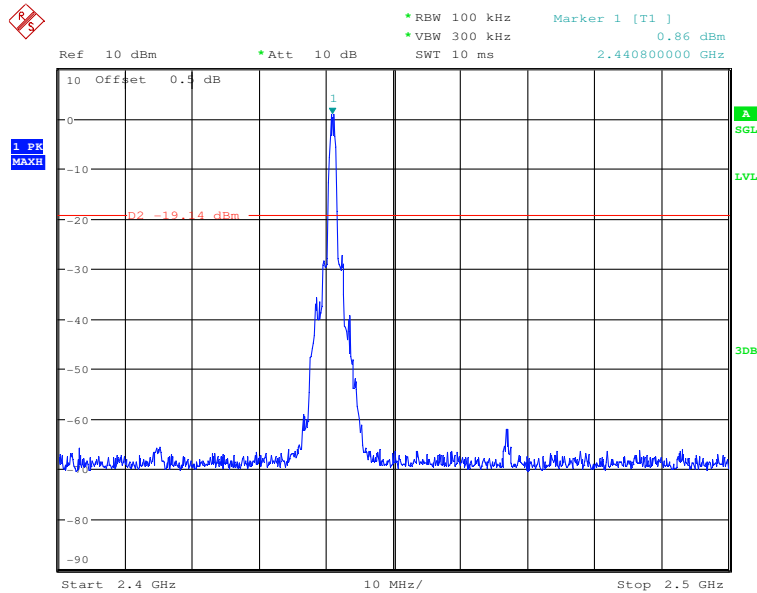




CSE\_1

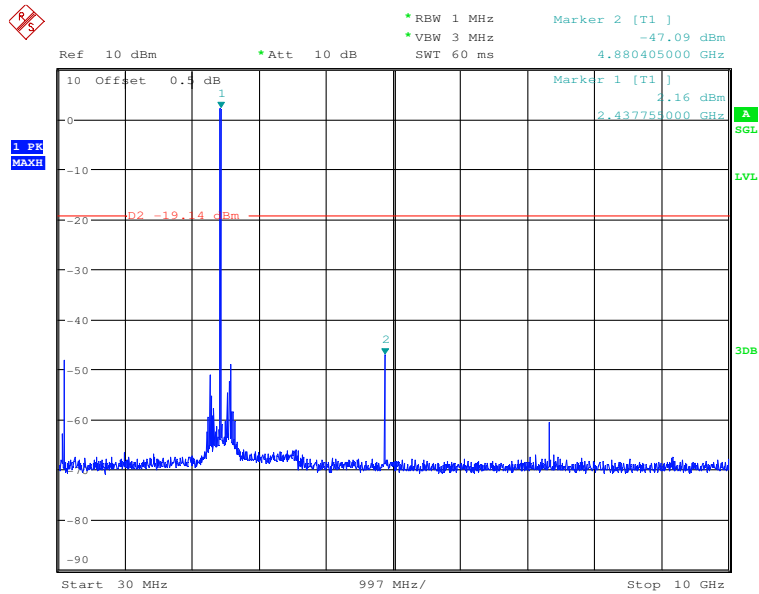


CSE\_2

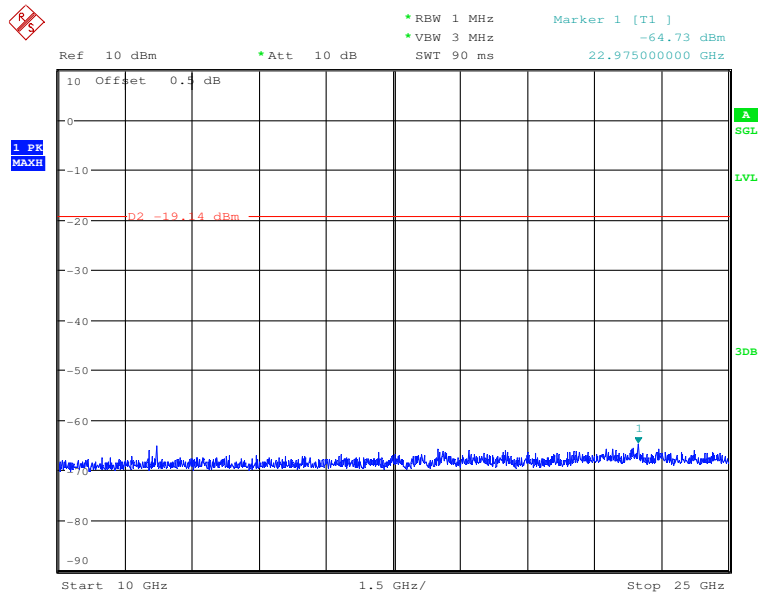




RF Conducted Spurious Emissions\_3DH5\_2480

Pref

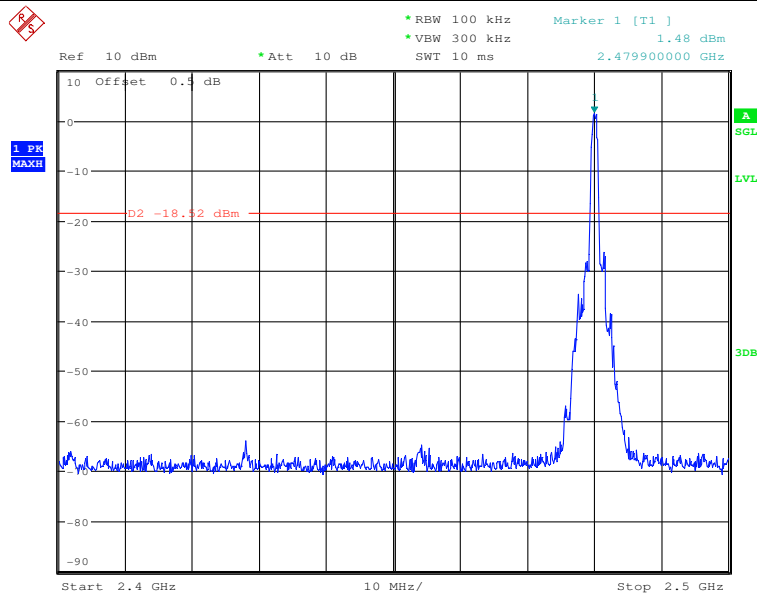




CSE\_1

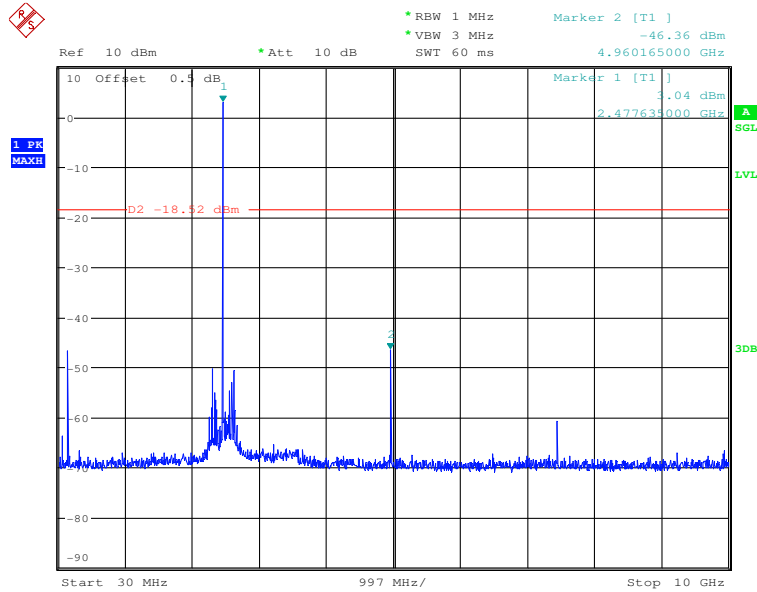

CSE\_2

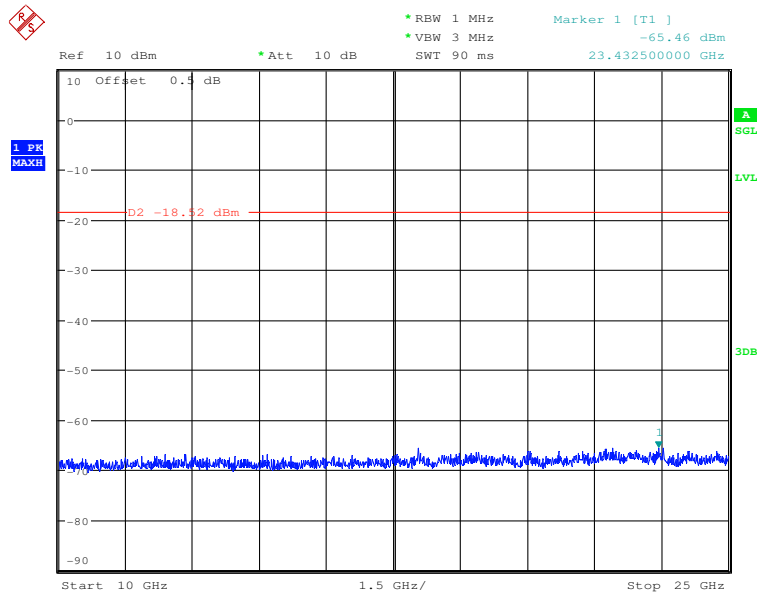





9.1.2 CDW-B18821A-00 BT 15.247


1.20 dB Bandwidth


| Test Mode | Test Channel | EBW[MHz] | Limit[MHz] | Verdict |
|-----------|--------------|----------|------------|---------|
| DH5       | 2402         | 1.120    | ---        | PASS    |
| DH5       | 2441         | 1.114    | ---        | PASS    |
| DH5       | 2480         | 1.120    | ---        | PASS    |
| 2DH5      | 2402         | 1.382    | ---        | PASS    |
| 2DH5      | 2441         | 1.384    | ---        | PASS    |
| 2DH5      | 2480         | 1.386    | ---        | PASS    |
| 3DH5      | 2402         | 1.416    | ---        | PASS    |
| 3DH5      | 2441         | 1.414    | ---        | PASS    |
| 3DH5      | 2480         | 1.418    | ---        | PASS    |




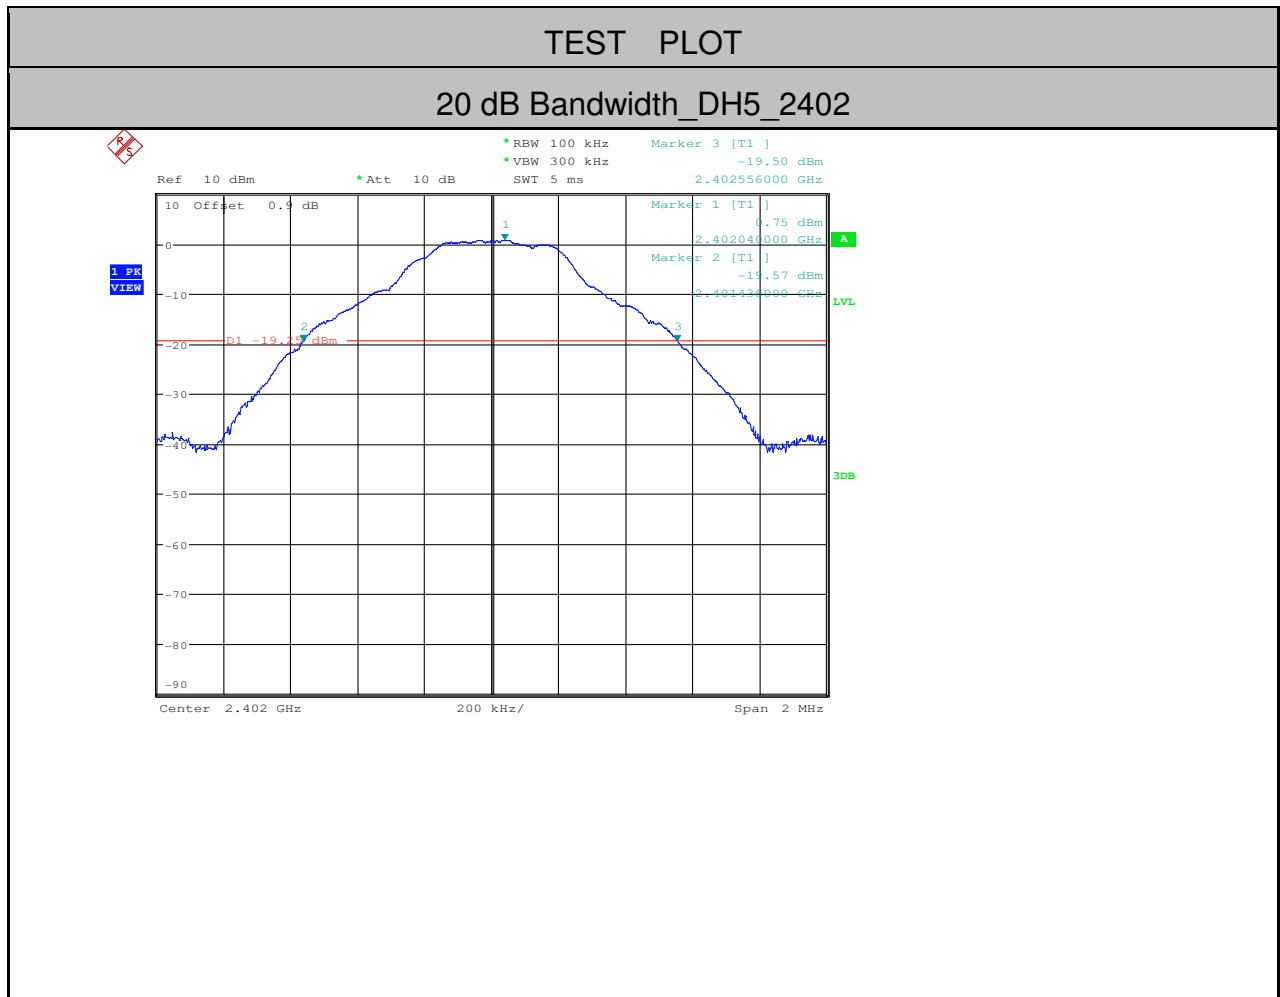


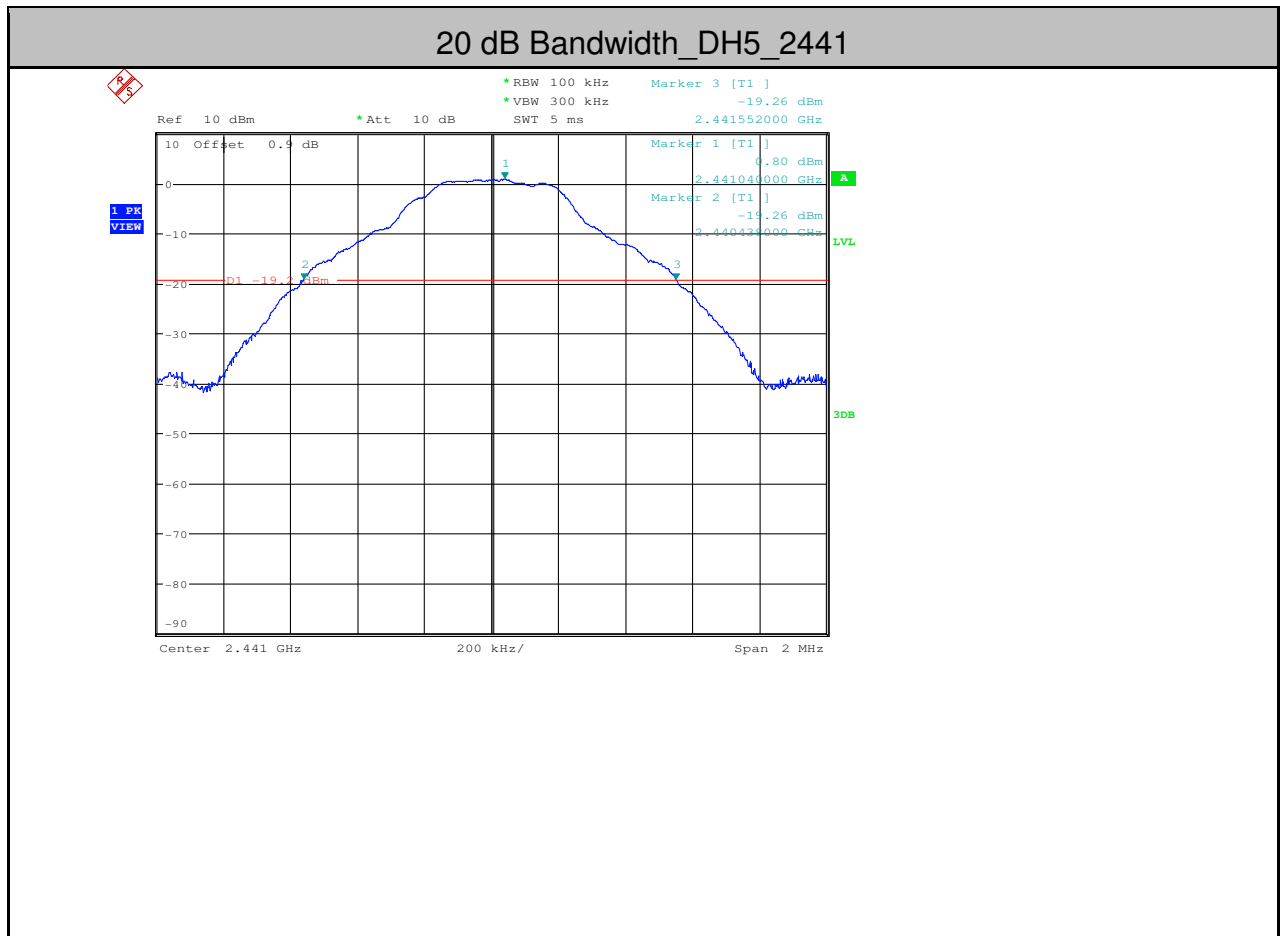


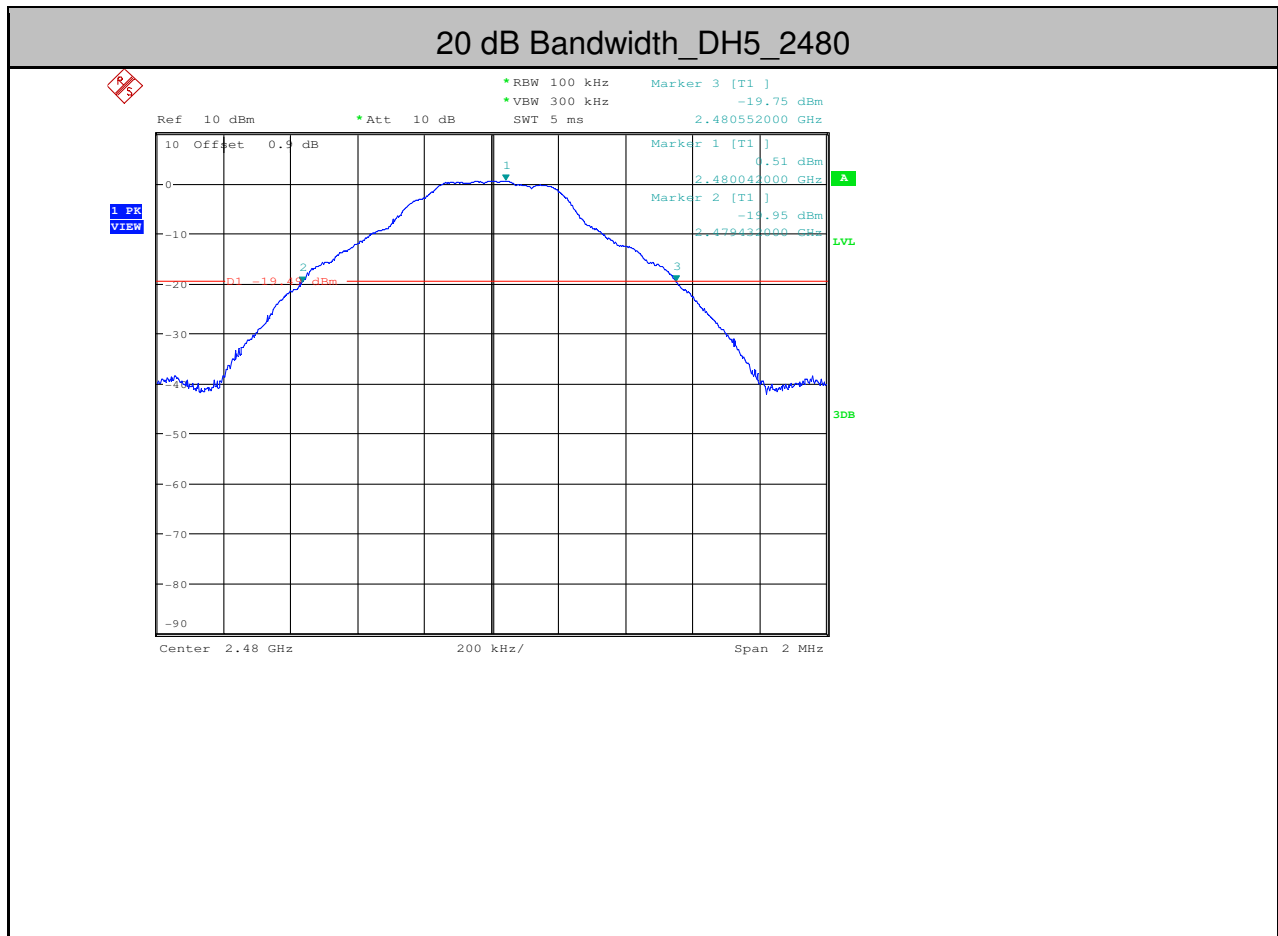


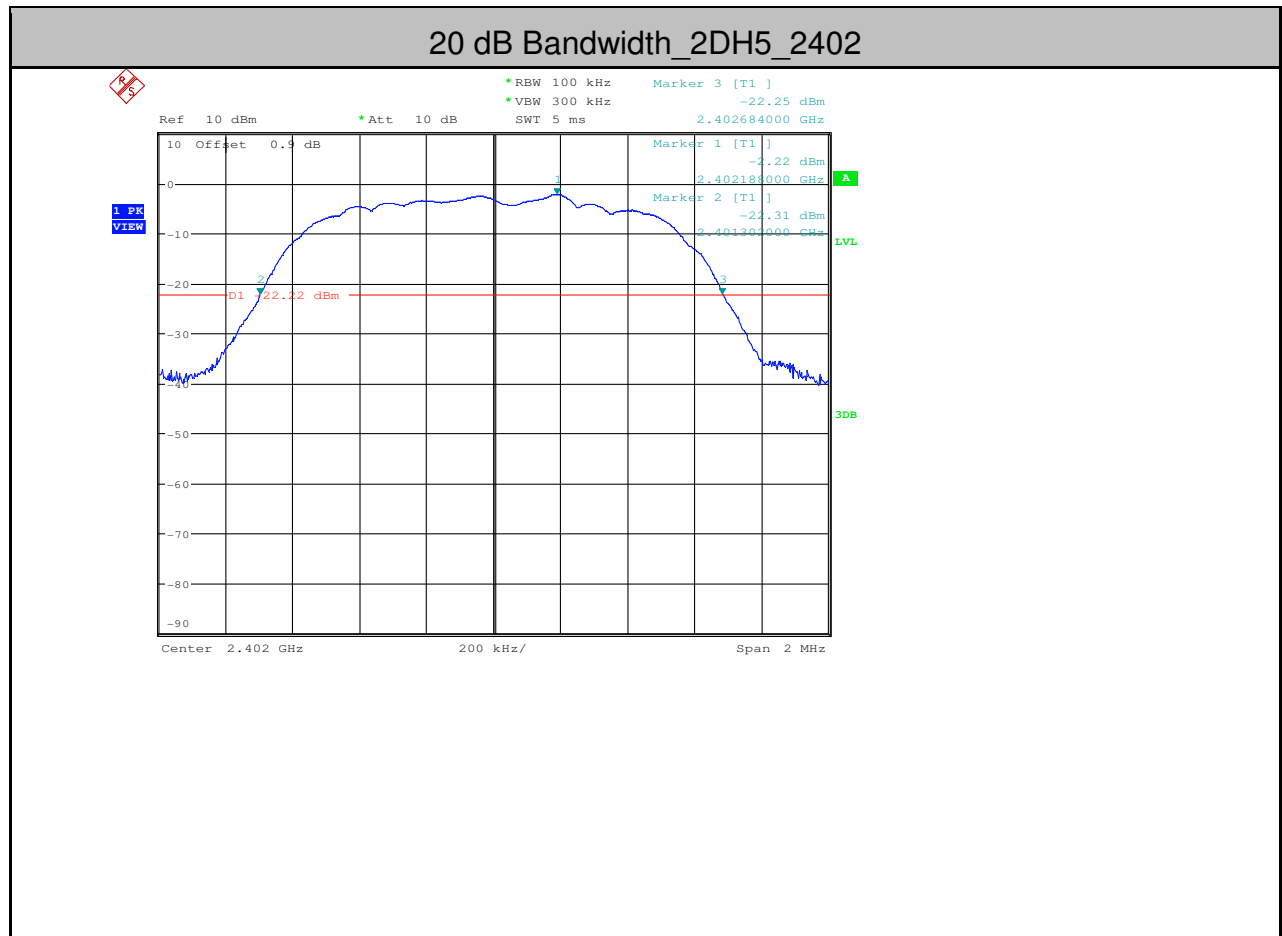

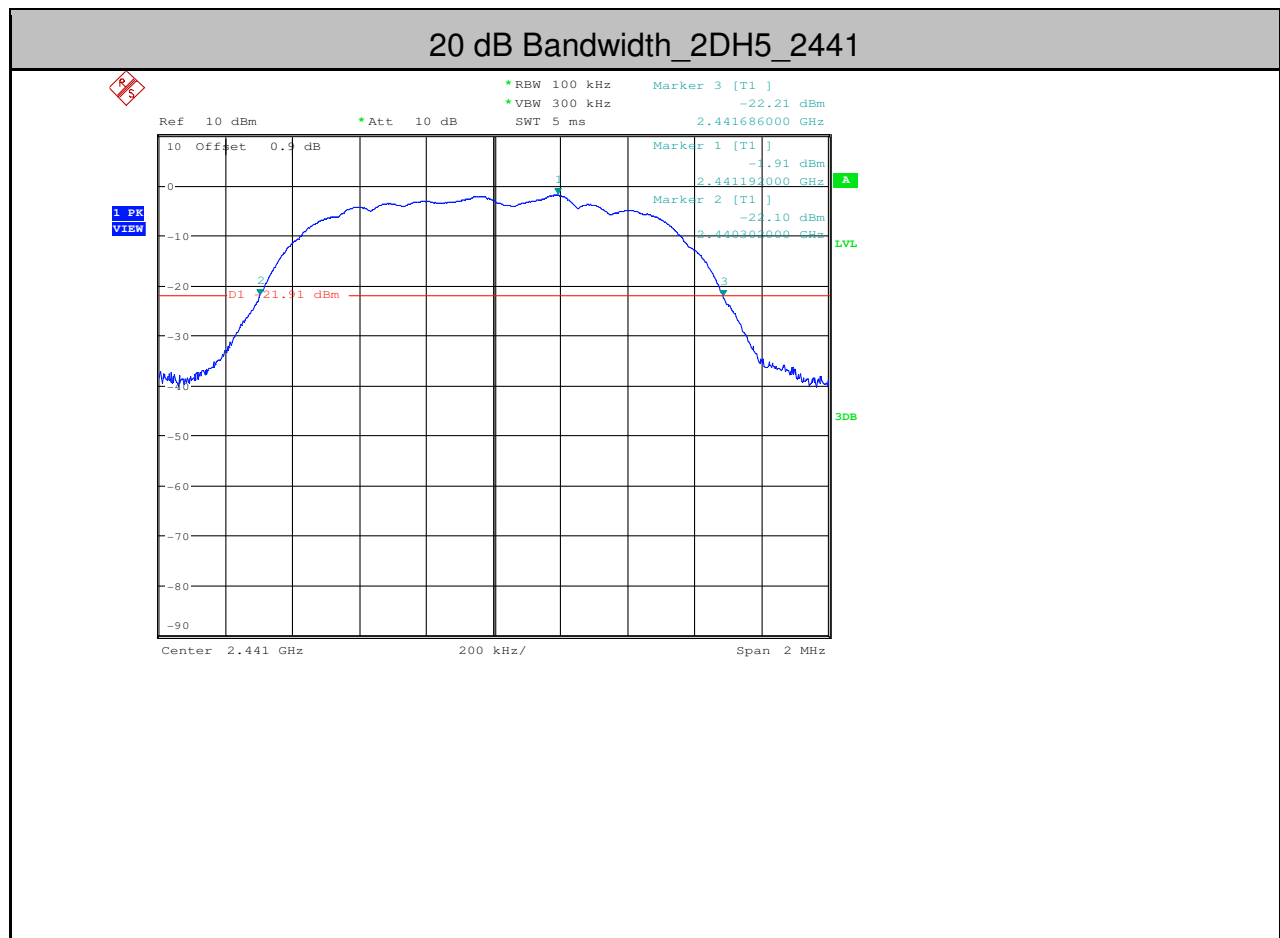


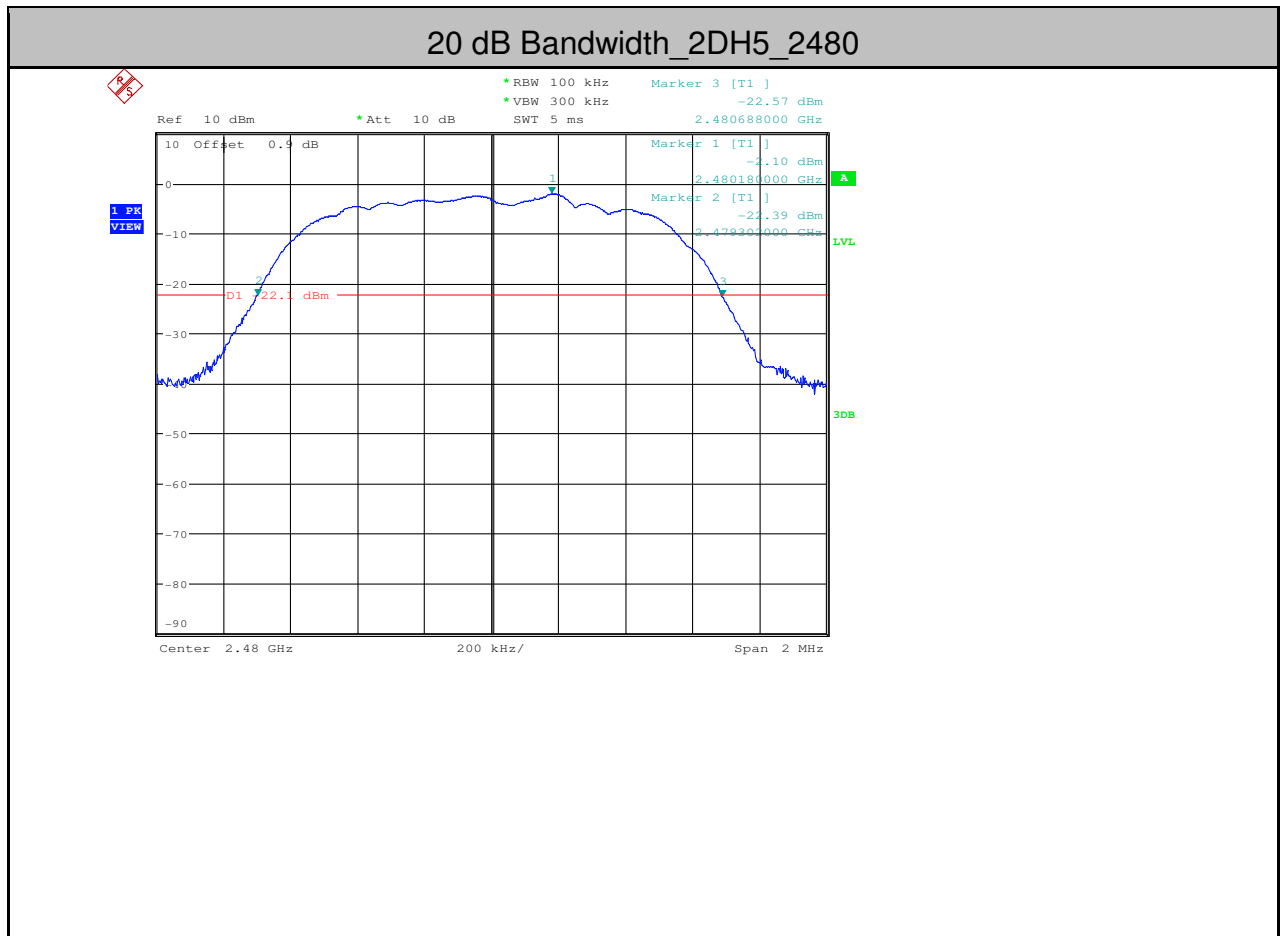

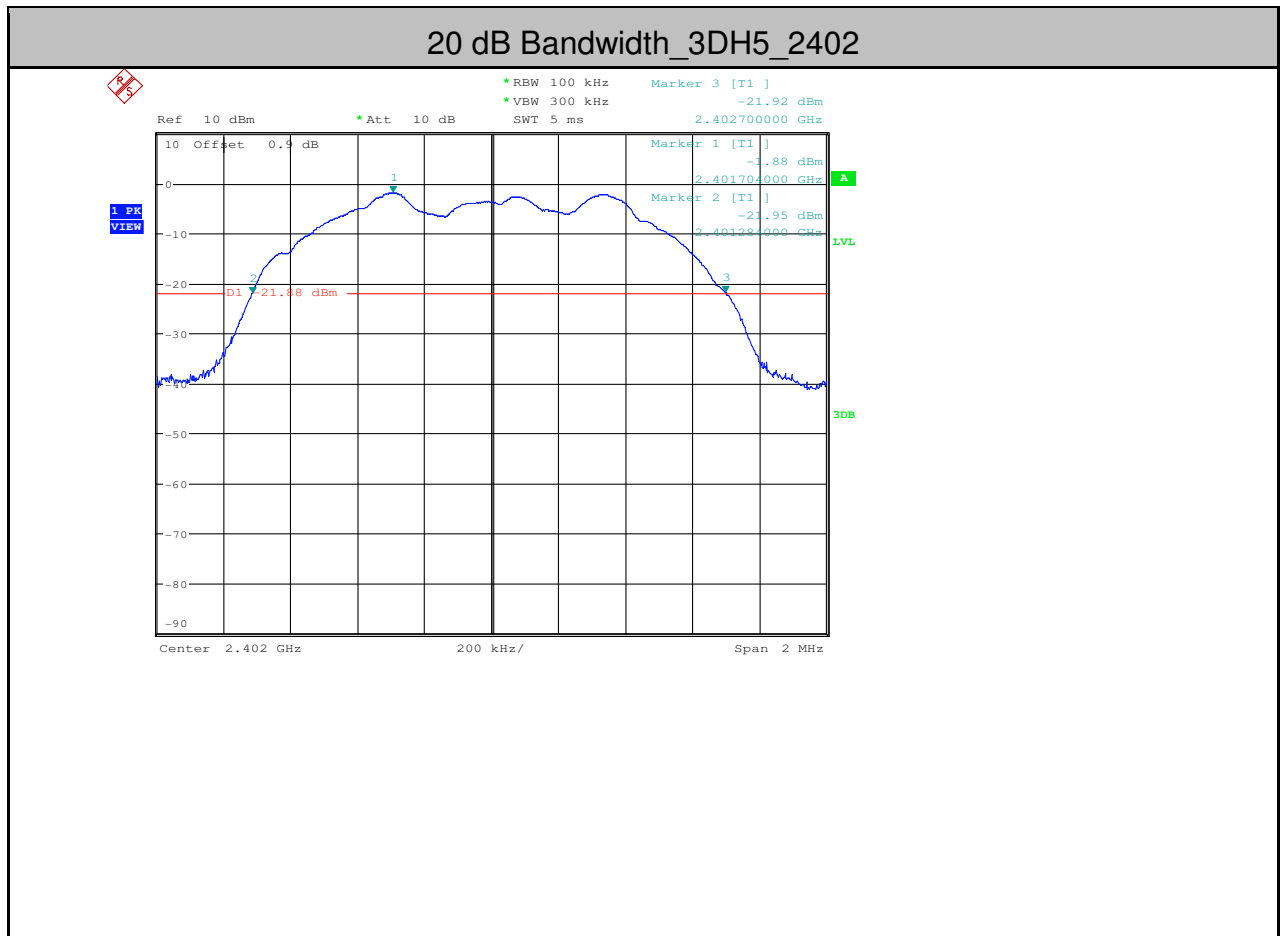

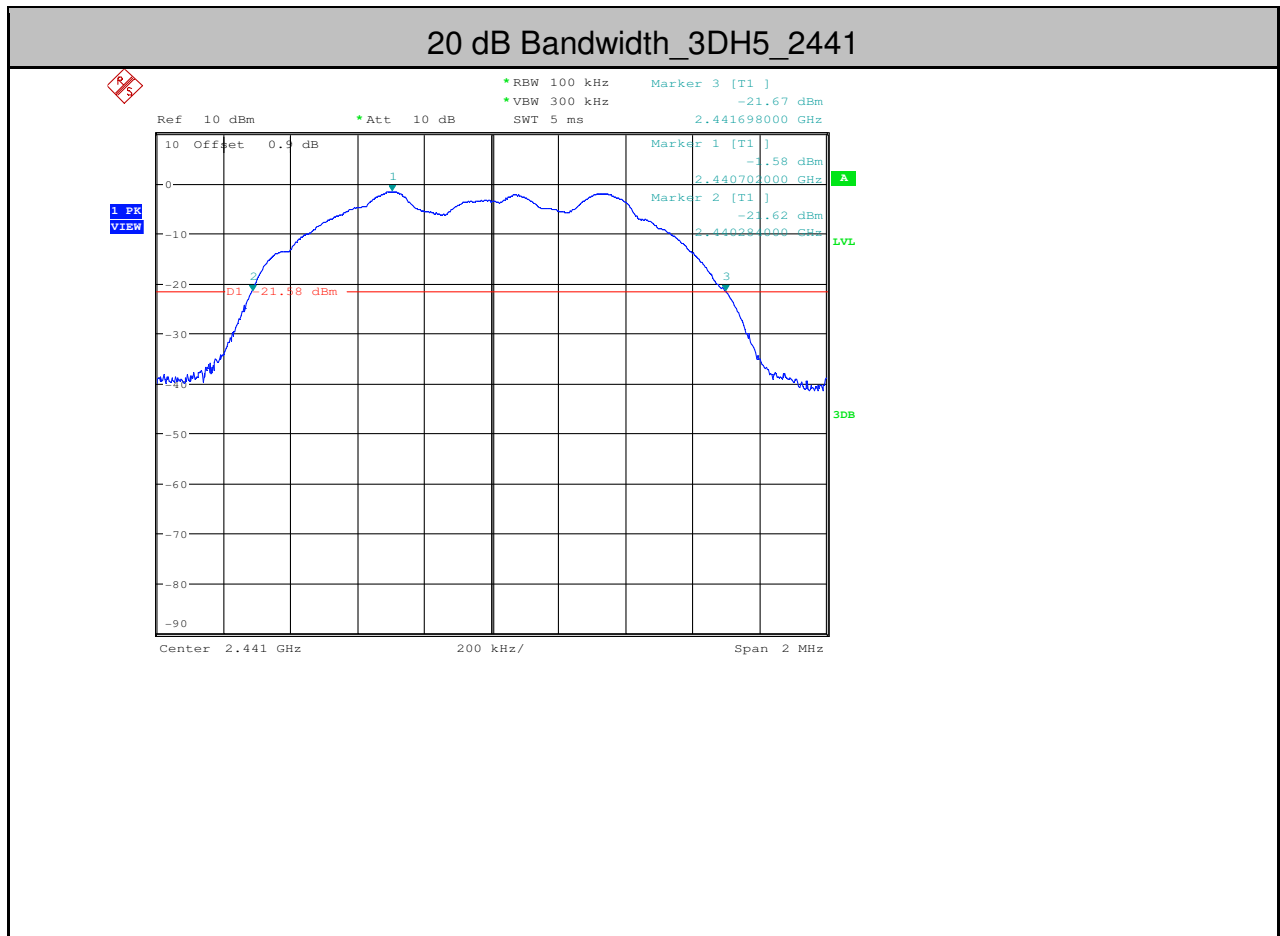




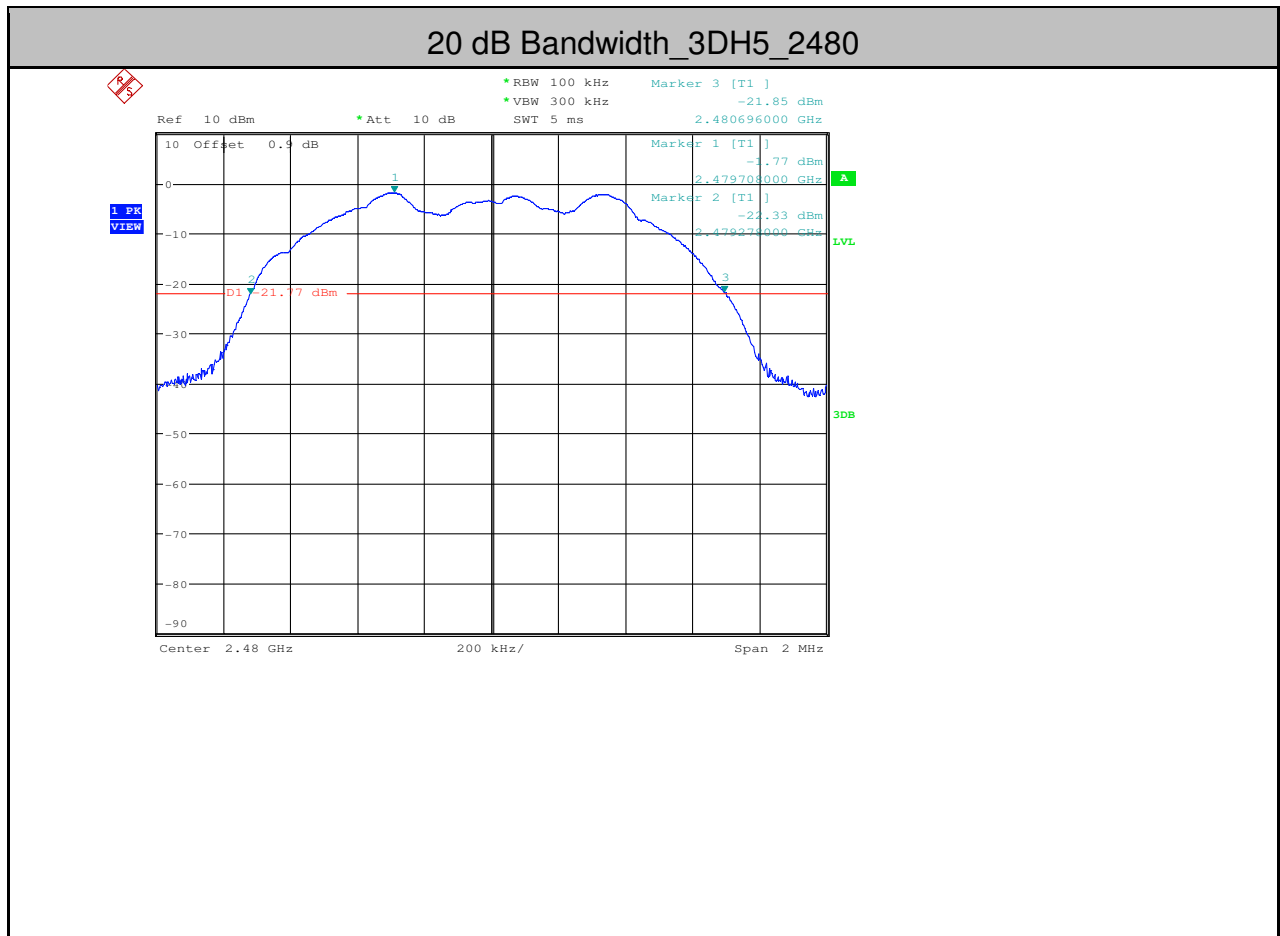




### 3. Conducted Peak Output Power

| Test Mode | Test Channel | Power[dBm] | Limit[dBm] | Verdict |
|-----------|--------------|------------|------------|---------|
| DH5       | 2402         | 2.35       | <20.97     | PASS    |
| DH5       | 2441         | 2.38       | <20.97     | PASS    |
| DH5       | 2480         | 2.03       | <20.97     | PASS    |
| 2DH5      | 2402         | 3.30       | <20.97     | PASS    |
| 2DH5      | 2441         | 3.54       | <20.97     | PASS    |
| 2DH5      | 2480         | 3.26       | <20.97     | PASS    |
| 3DH5      | 2402         | 3.40       | <20.97     | PASS    |
| 3DH5      | 2441         | 3.69       | <20.97     | PASS    |
| 3DH5      | 2480         | 3.50       | <20.97     | PASS    |

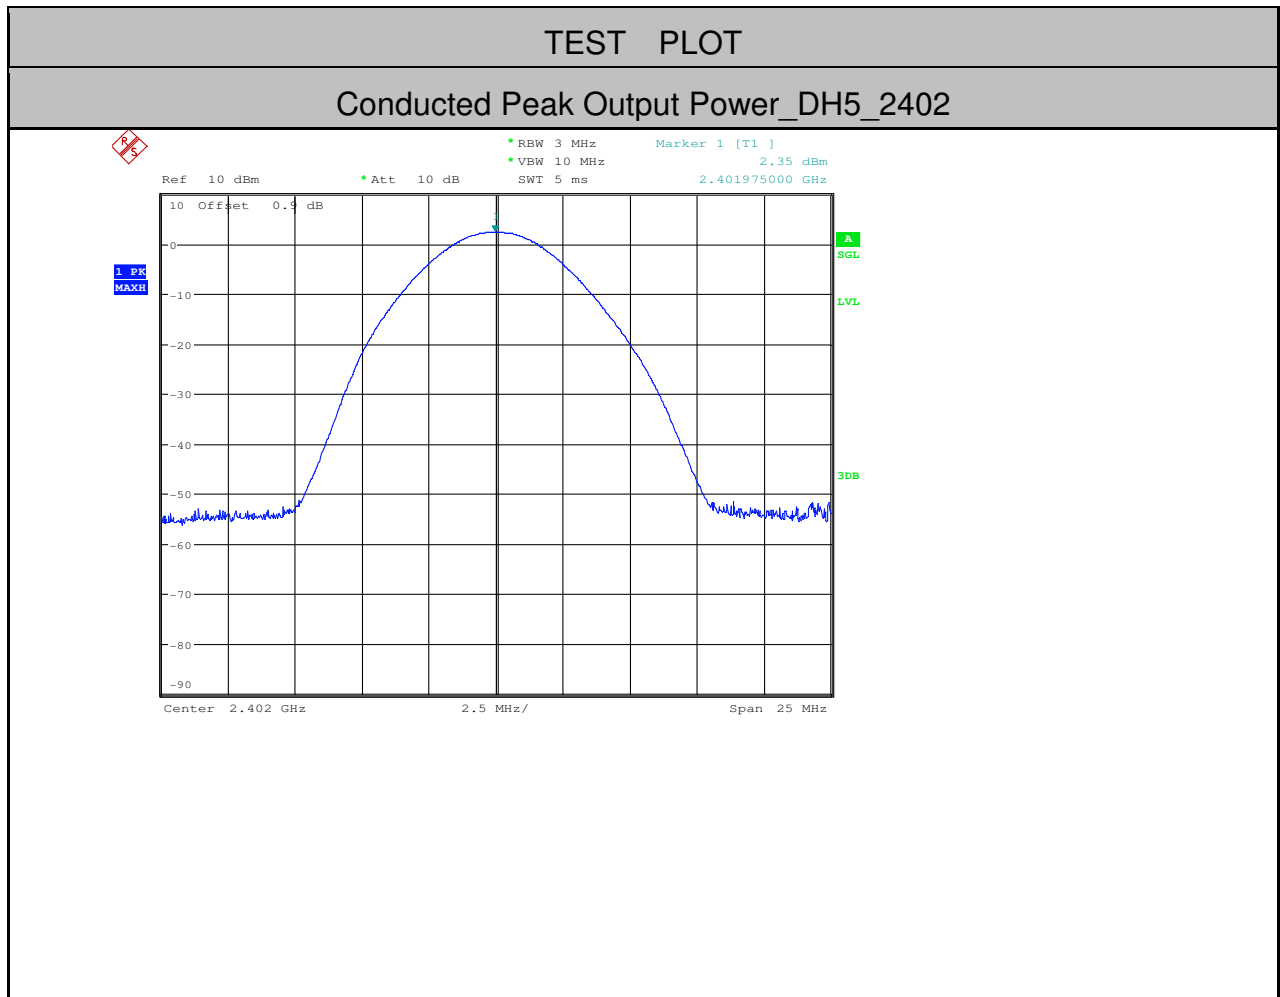




Conducted Peak Output Power\_DH5\_2441

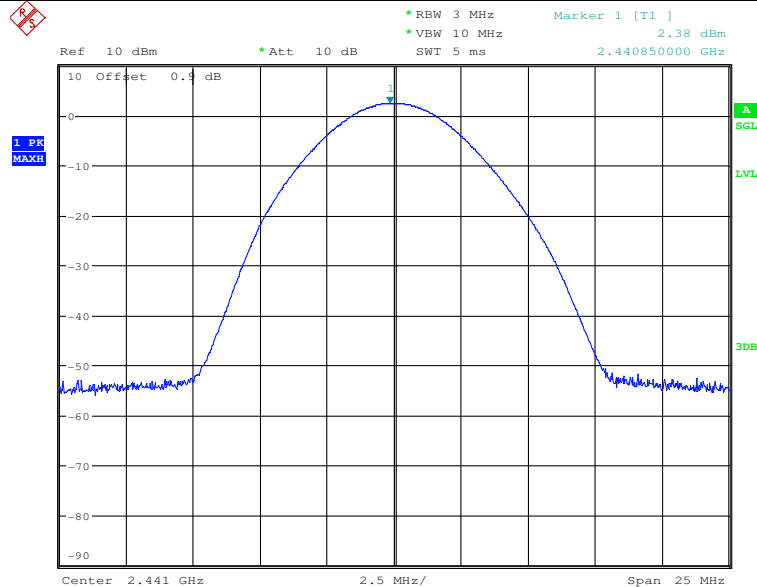




### Conducted Peak Output Power\_DH5\_2480

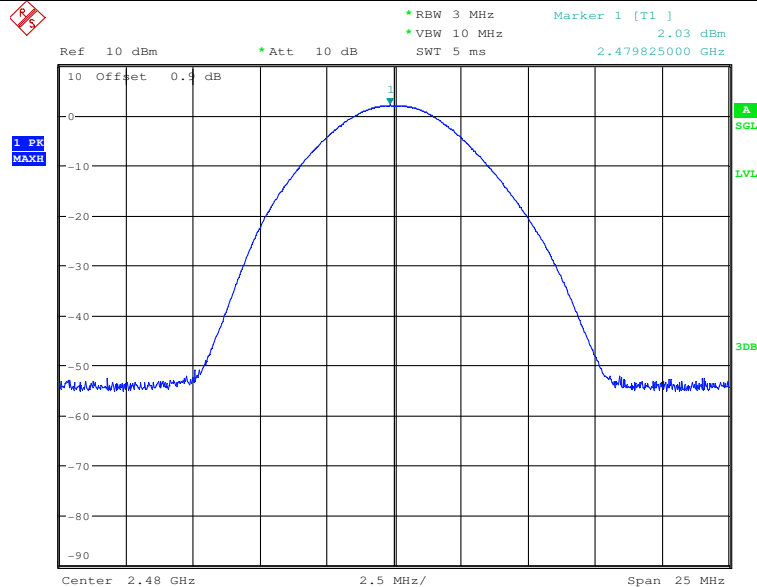





### Conducted Peak Output Power\_2DH5\_2402

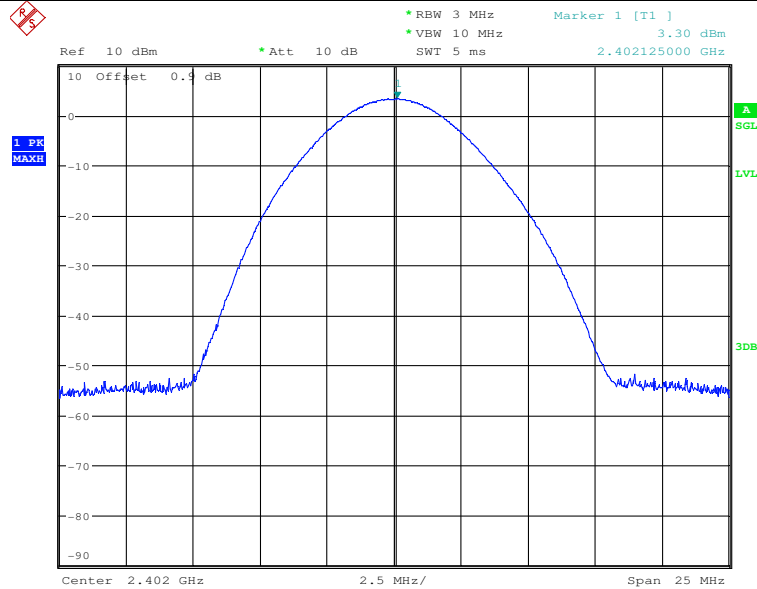



### Conducted Peak Output Power\_2DH5\_2441

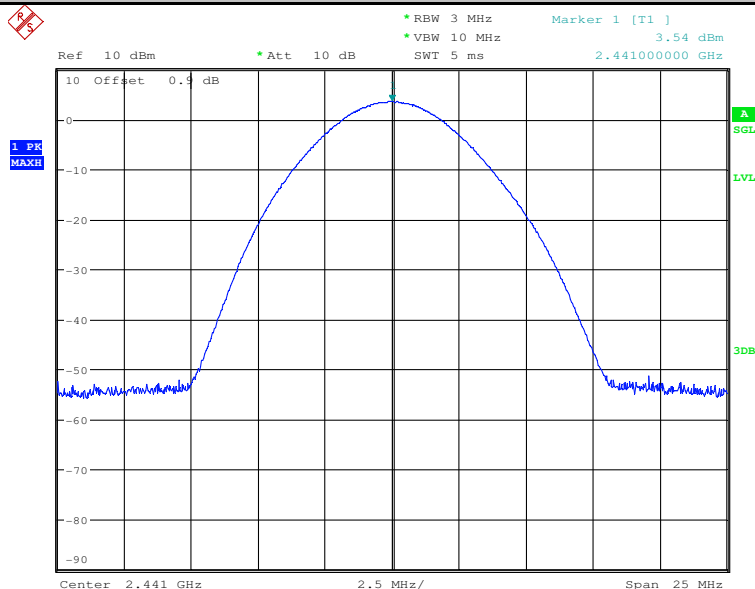


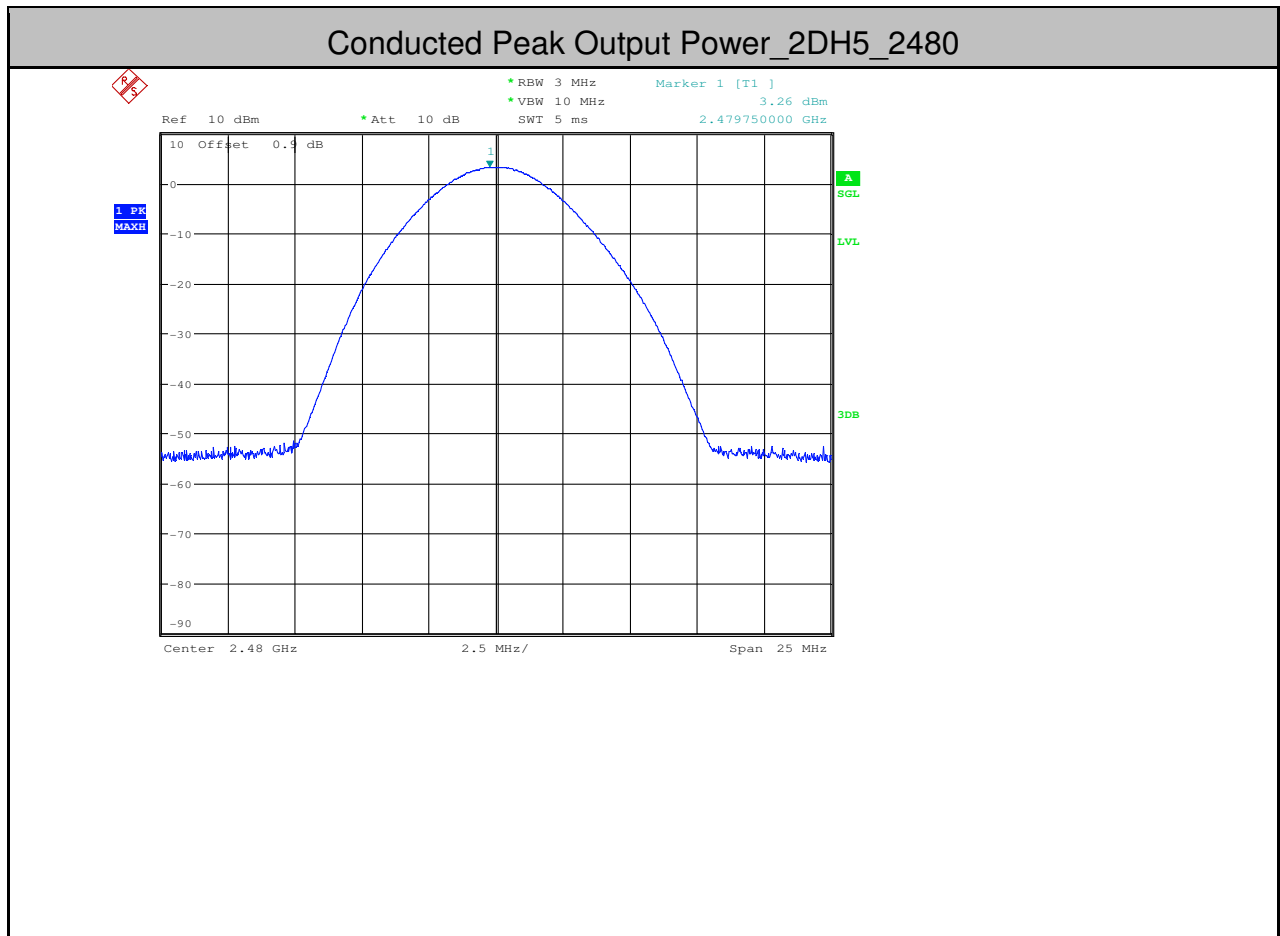






### Conducted Peak Output Power\_3DH5\_2402

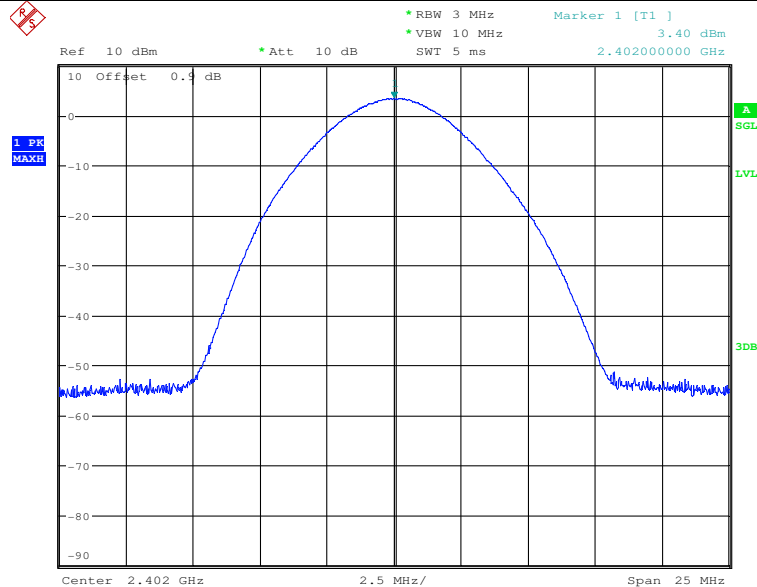




### Conducted Peak Output Power\_3DH5\_2441

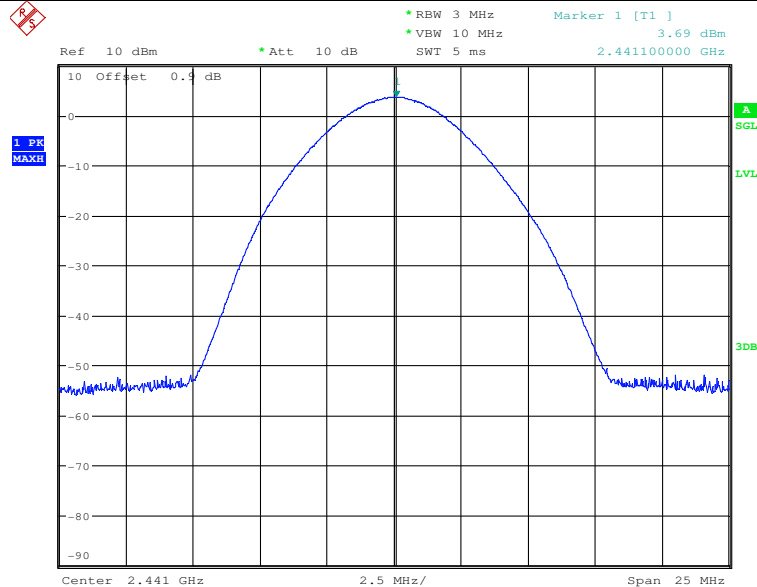




### Conducted Peak Output Power\_3DH5\_2480

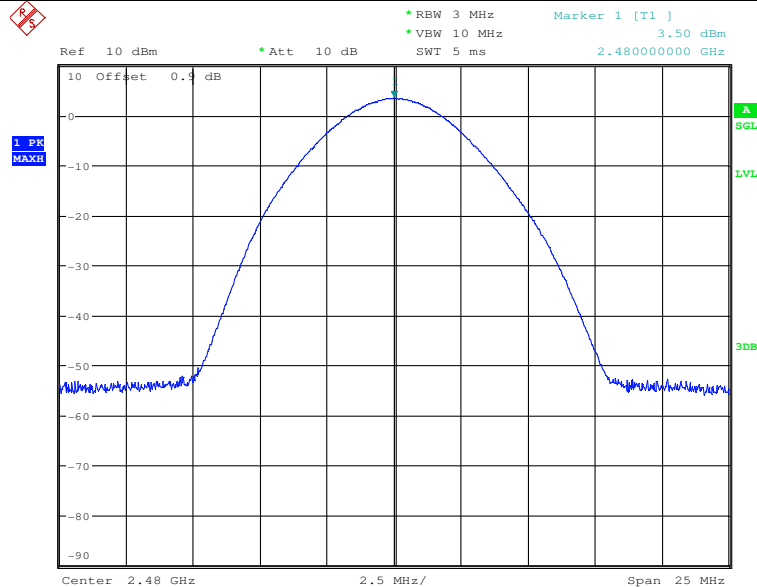




#### 4.Carrier Frequency Separation

| Test Mode | Test Channel | Result[MHz] | Limit[MHz]   | Verdict |
|-----------|--------------|-------------|--------------|---------|
| DH5       | 2441         | 0.996       | $\geq 0.747$ | PASS    |
| 2DH5      | 2441         | 1.011       | $\geq 0.924$ | PASS    |
| 3DH5      | 2441         | 0.999       | $\geq 0.945$ | PASS    |

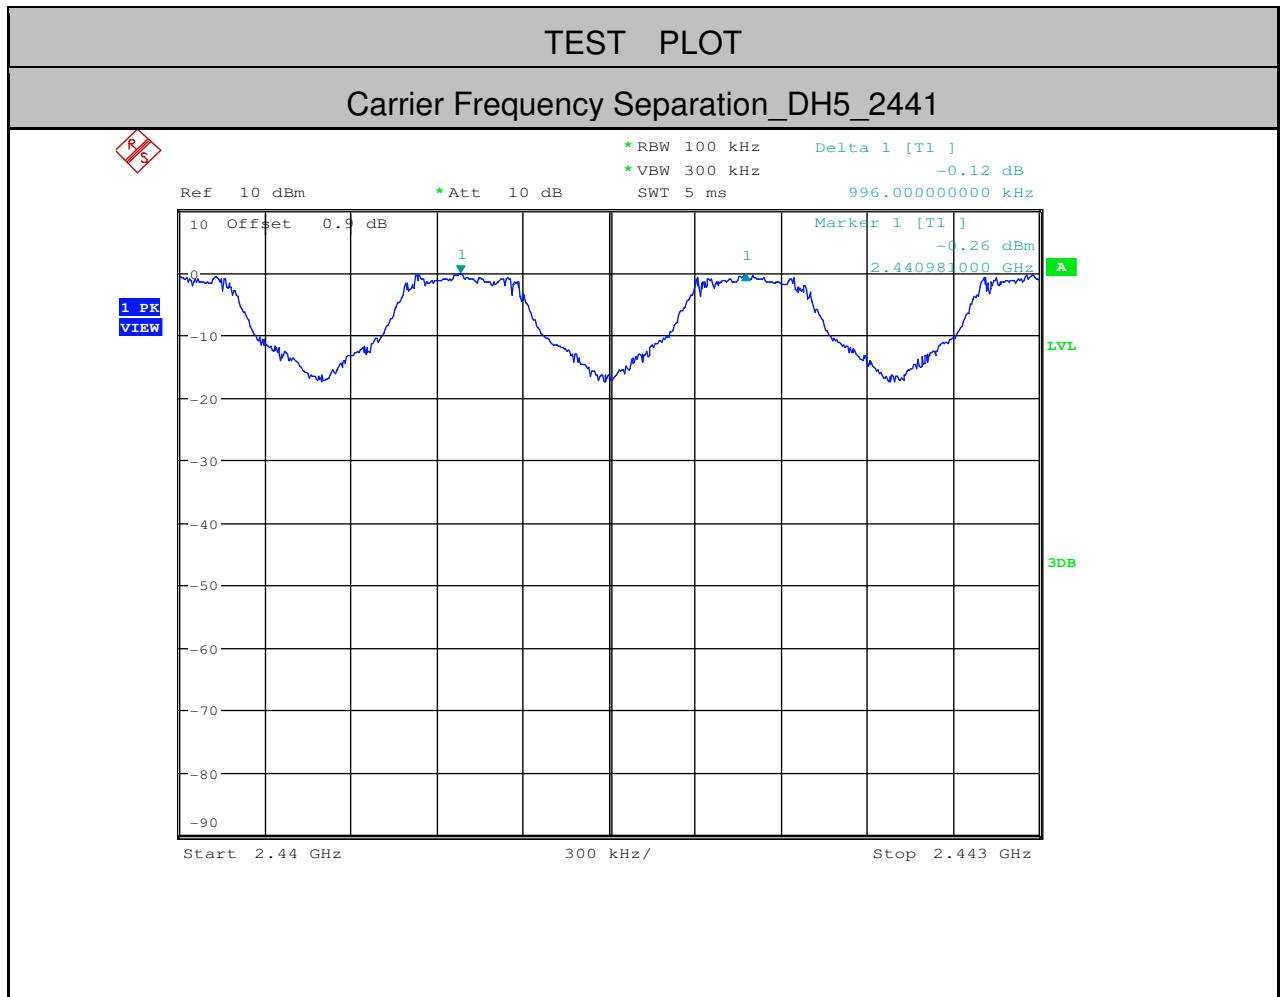




Carrier Frequency Separation\_2DH5\_2441

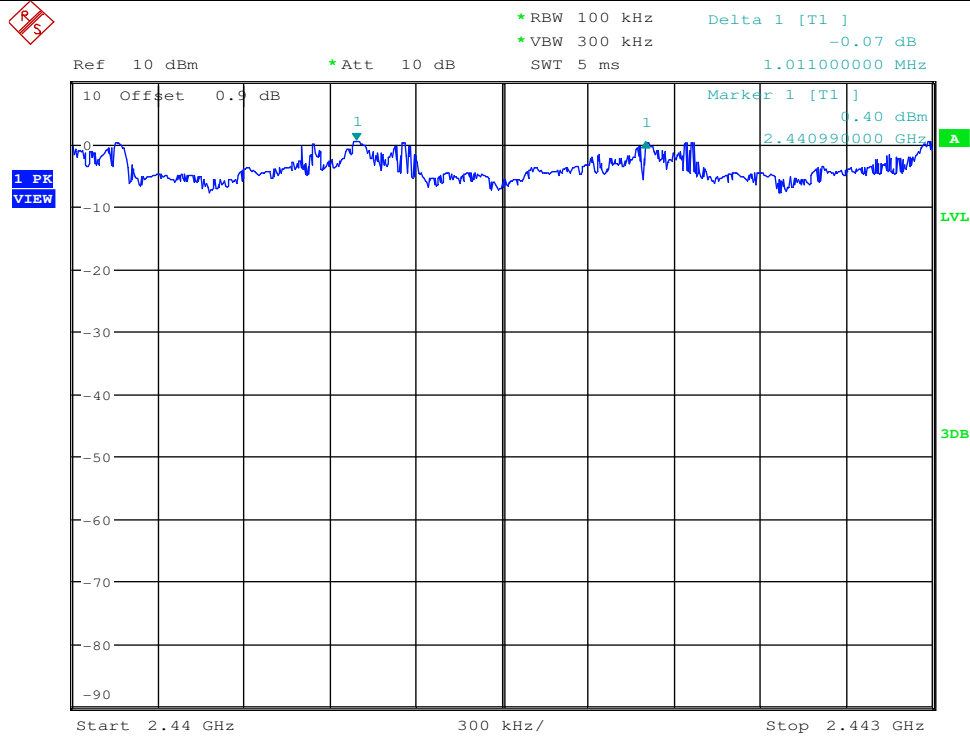




Carrier Frequency Separation\_3DH5\_2441

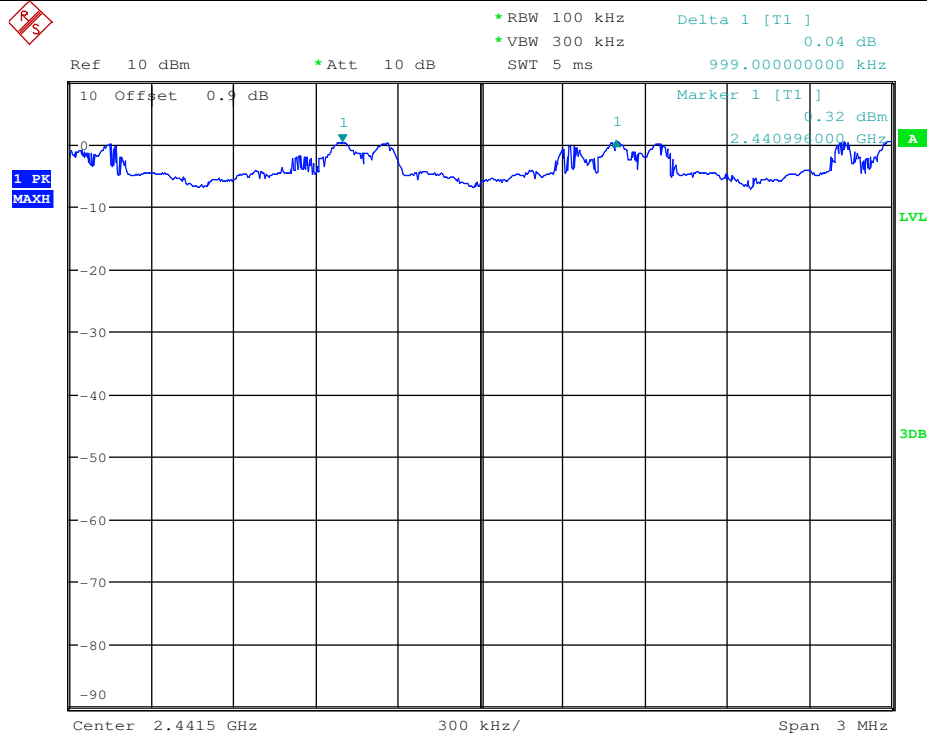

## 5.Dwell Time



| Test Mode | Test Channel | Burst Width[ms/hop/ch] | Total Hops[hop*ch] | Dwell Time[s] | Limit[s] | Verdict |
|-----------|--------------|------------------------|--------------------|---------------|----------|---------|
| DH1       | 2402         | 0.39                   | 320                | 0.125         | <0.4     | PASS    |
| DH3       | 2402         | 1.65                   | 140                | 0.231         | <0.4     | PASS    |
| DH5       | 2402         | 2.9                    | 110                | 0.319         | <0.4     | PASS    |
| 2DH1      | 2402         | 0.4                    | 320                | 0.128         | <0.4     | PASS    |
| 2DH3      | 2402         | 1.66                   | 190                | 0.315         | <0.4     | PASS    |
| 2DH5      | 2402         | 2.9                    | 70                 | 0.203         | <0.4     | PASS    |
| 3DH1      | 2402         | 0.4                    | 320                | 0.128         | <0.4     | PASS    |
| 3DH3      | 2402         | 1.66                   | 190                | 0.315         | <0.4     | PASS    |
| 3DH5      | 2402         | 2.9                    | 100                | 0.290         | <0.4     | PASS    |



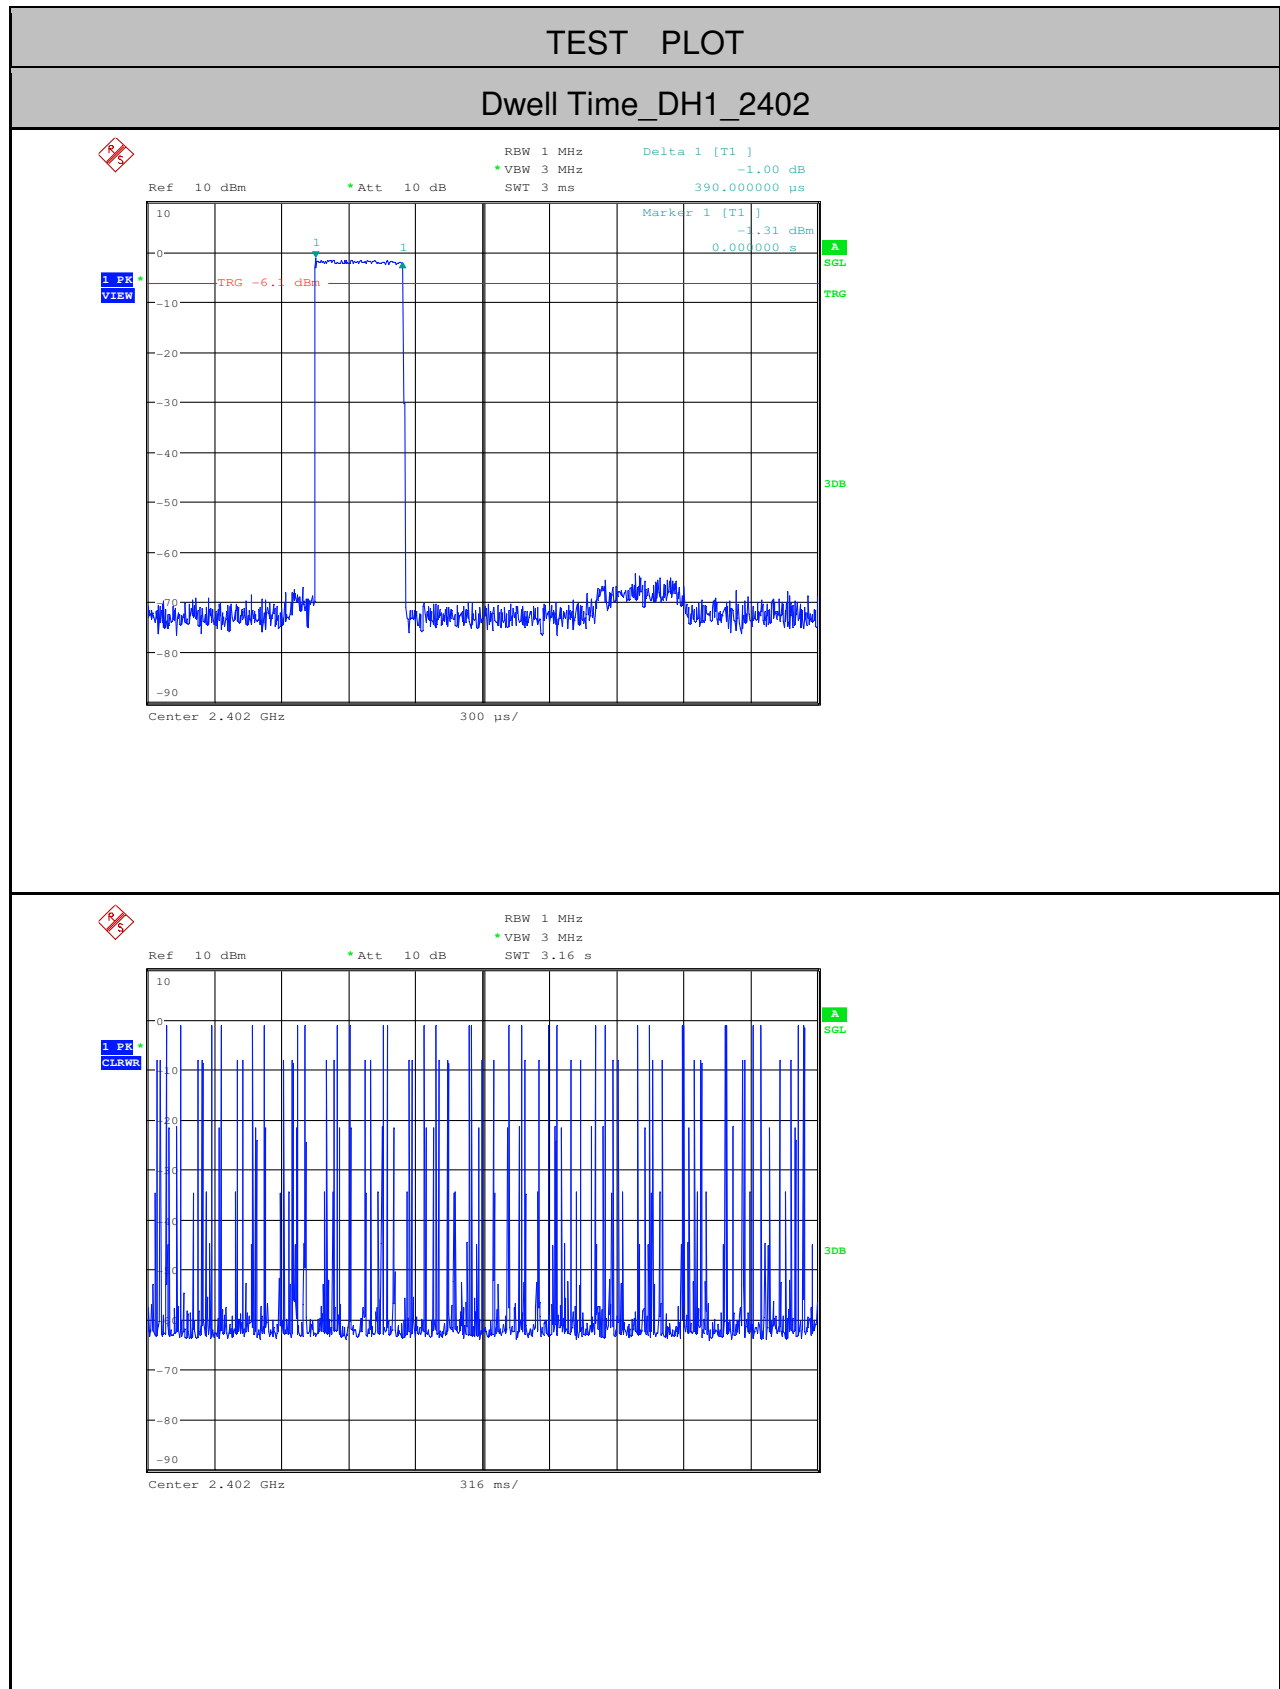





Dwell Time\_DH3\_2402

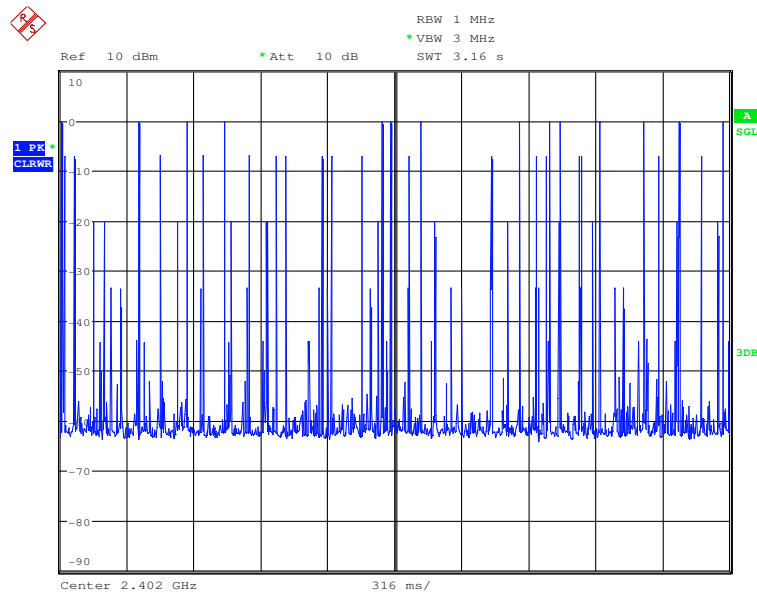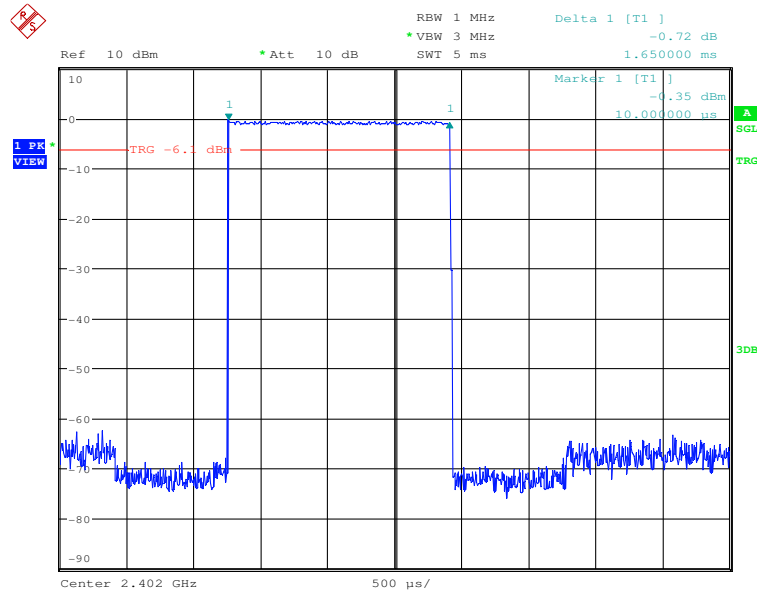





Dwell Time\_DH5\_2402

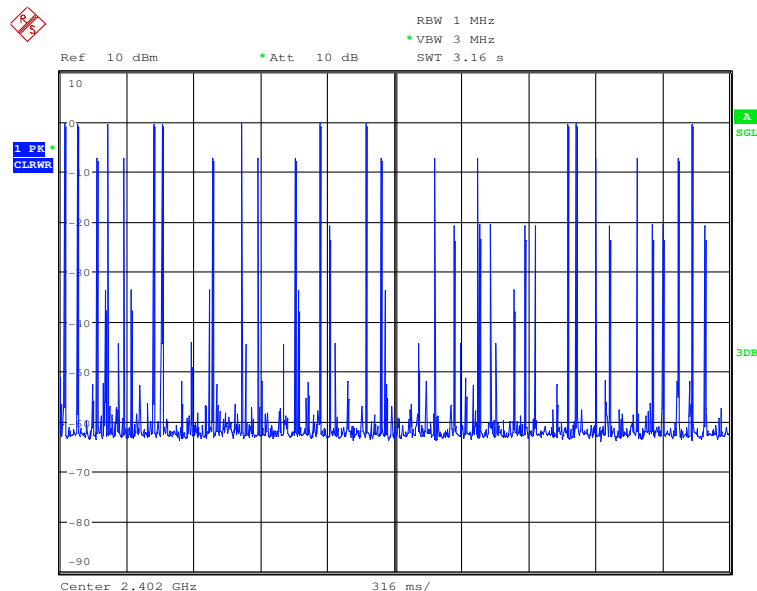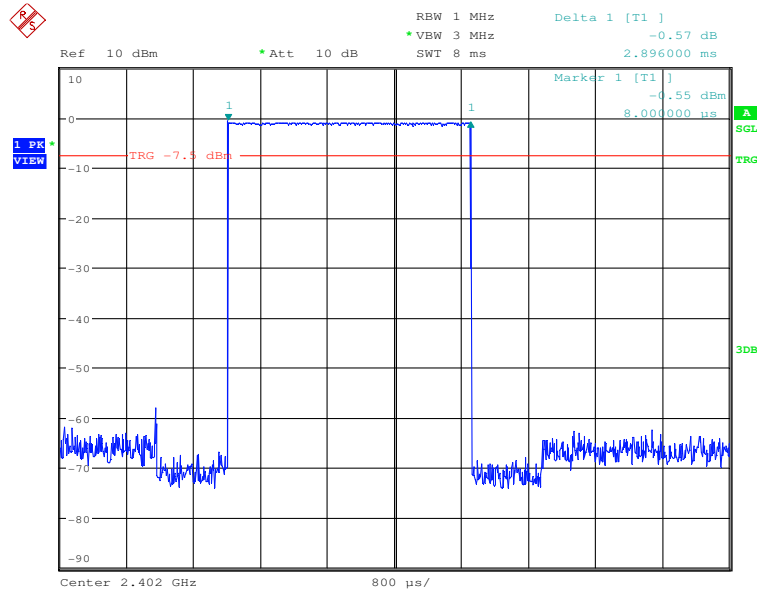





Dwell Time\_2DH1\_2402

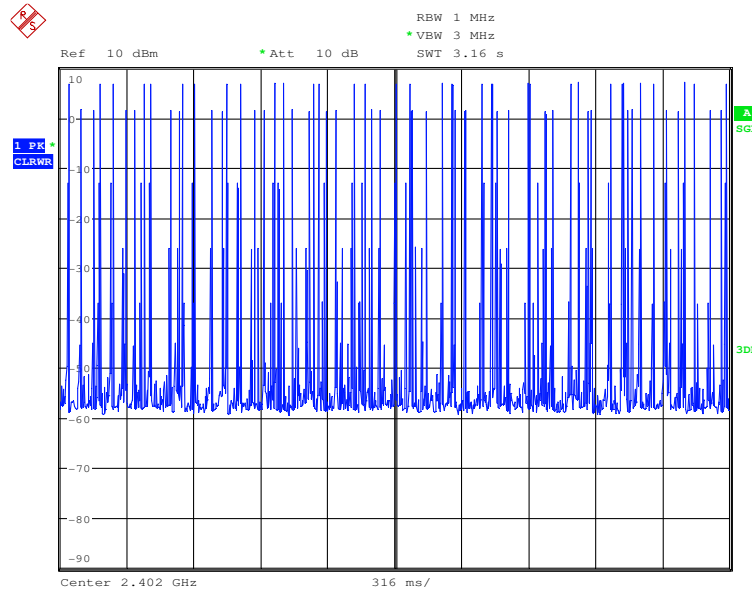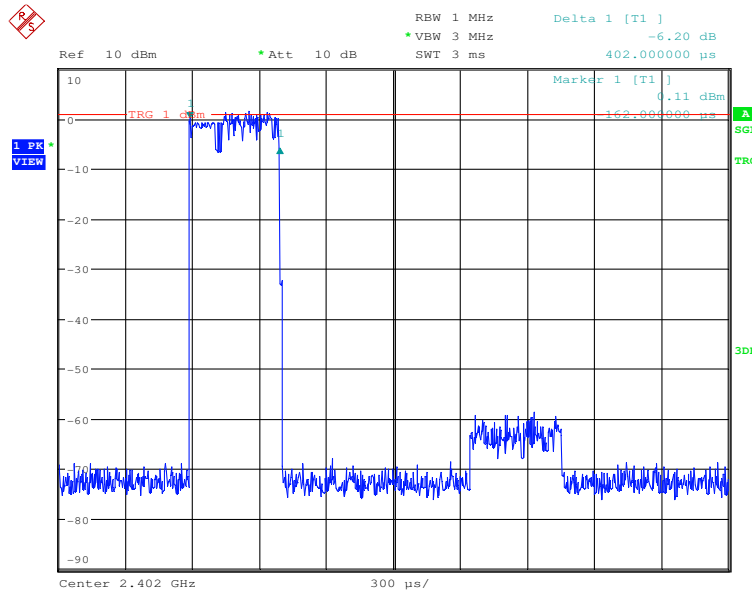





Dwell Time\_2DH3\_2402

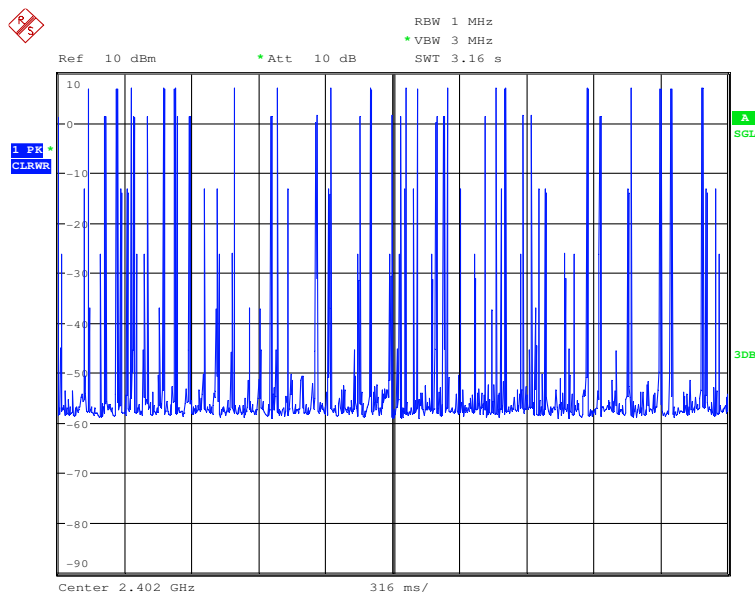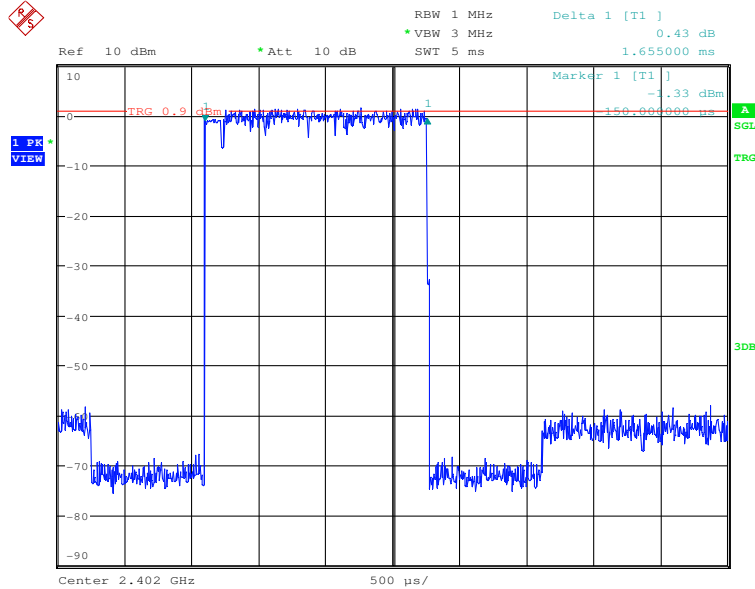





Dwell Time\_2DH5\_2402

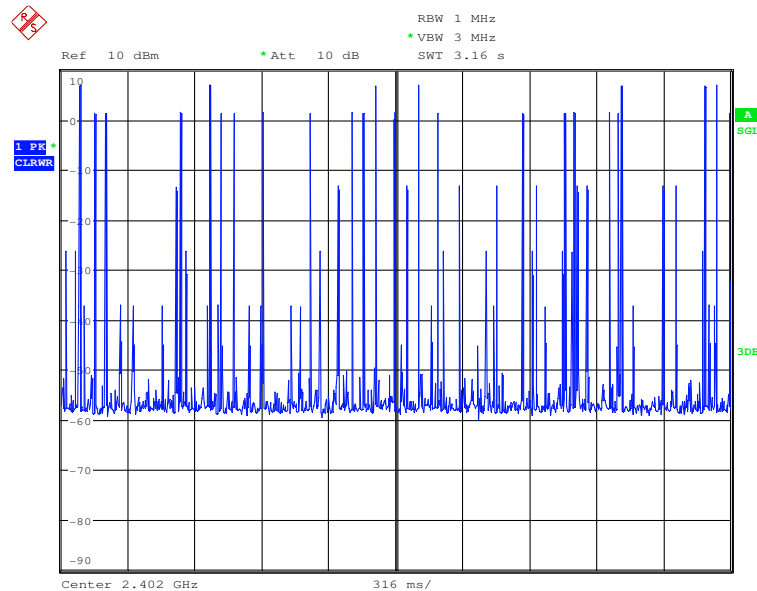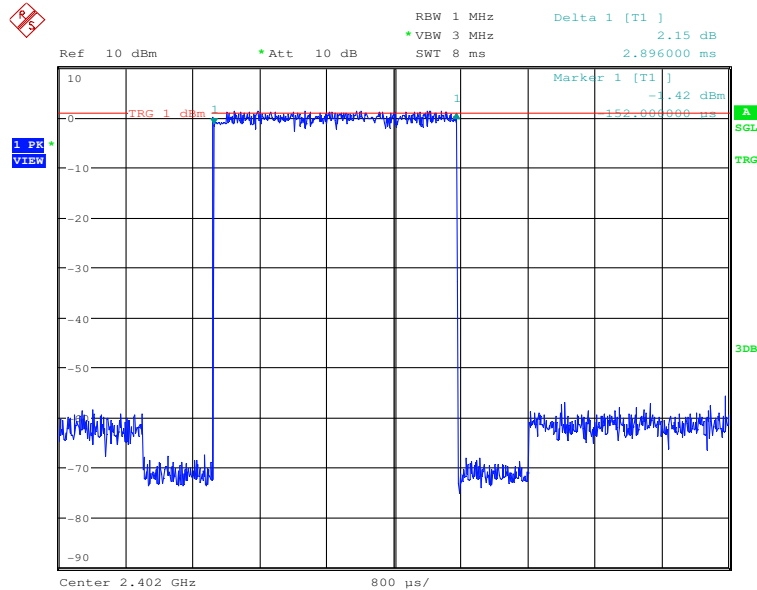





Dwell Time\_3DH1\_2402

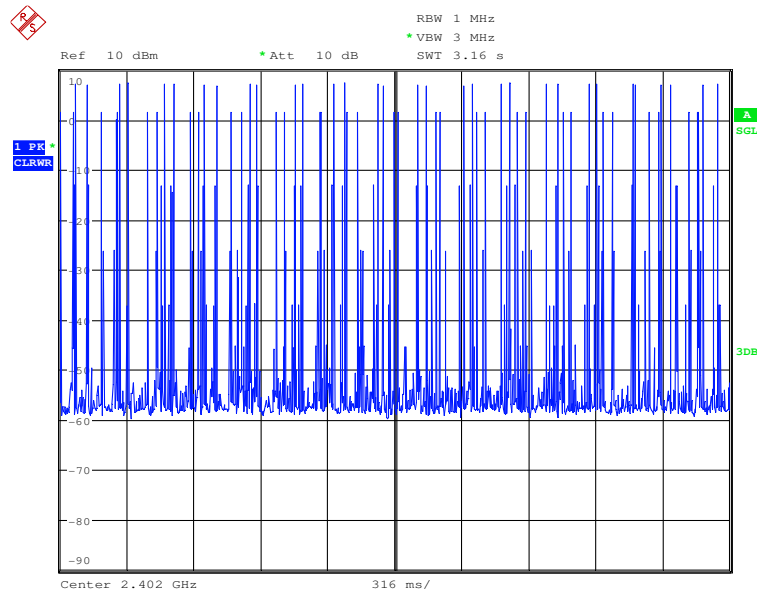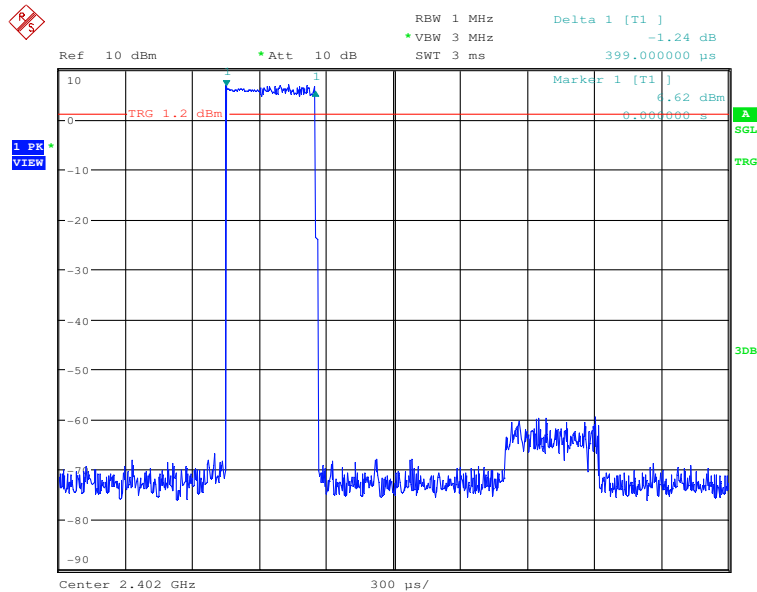





Dwell Time\_3DH3\_2402

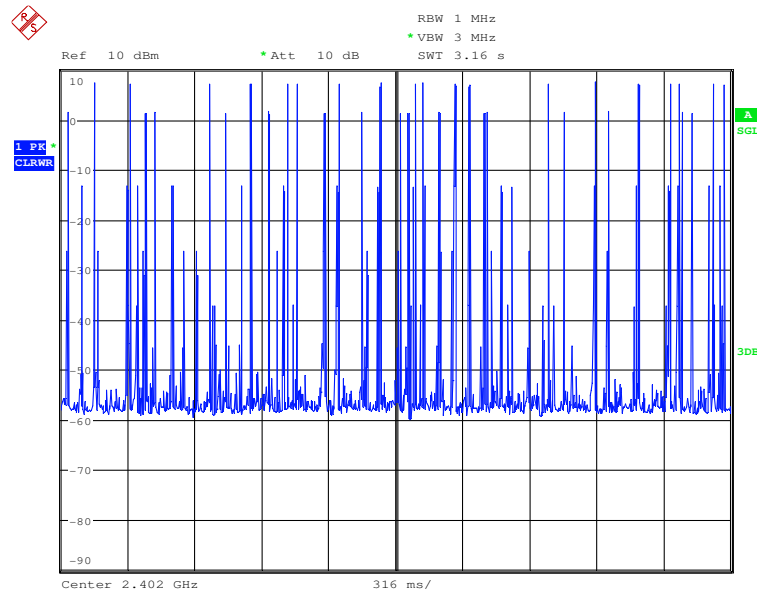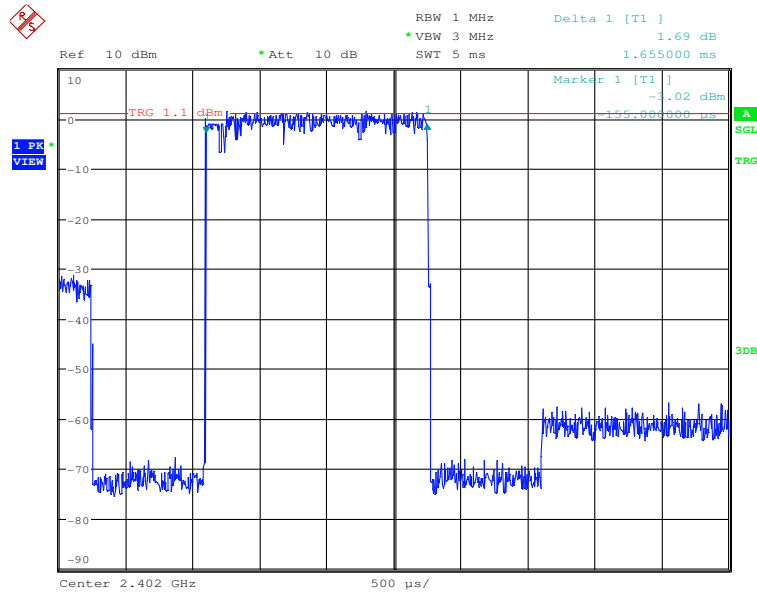






Dwell Time\_3DH5\_2402

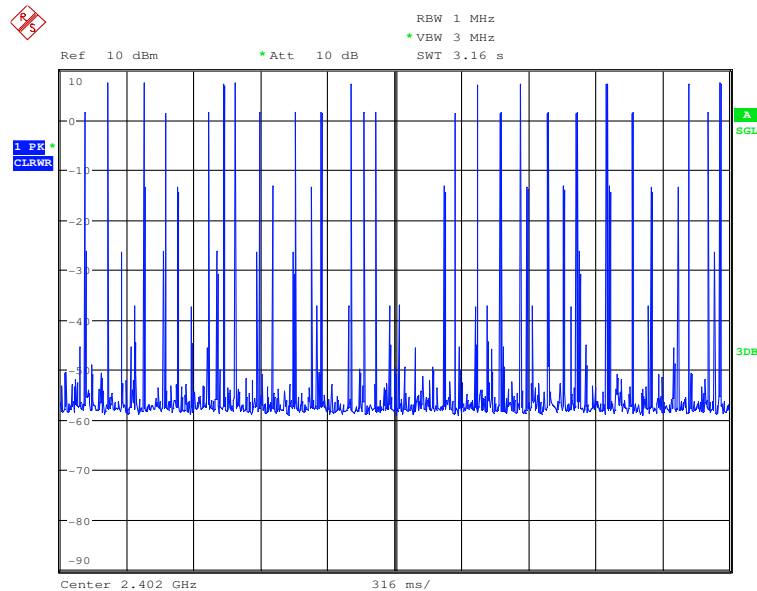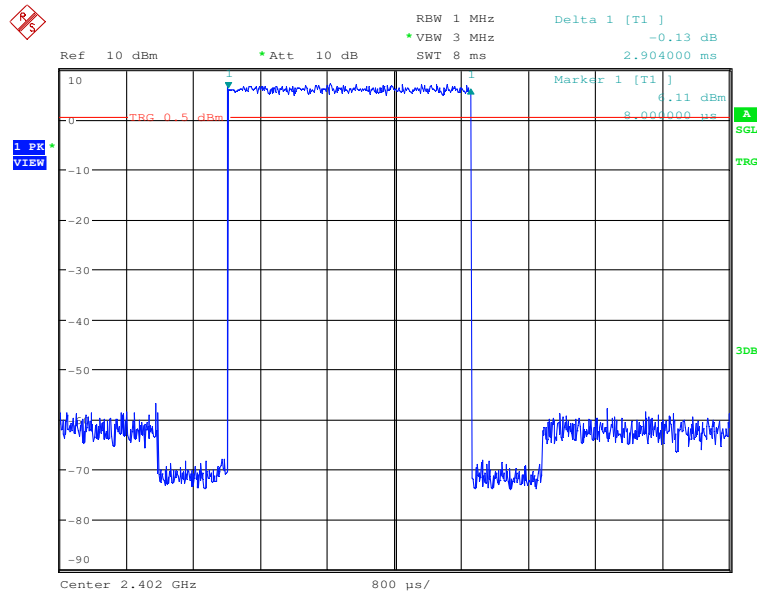




## 6.Hopping Channel Number

| Test Mode | Test Channel | Number of Hopping Channel[N] | Limit[N]  | Verdict |
|-----------|--------------|------------------------------|-----------|---------|
| DH5       | 2402         | 79                           | $\geq 15$ | PASS    |
| 2DH5      | 2402         | 79                           | $\geq 15$ | PASS    |
| 3DH5      | 2402         | 79                           | $\geq 15$ | PASS    |

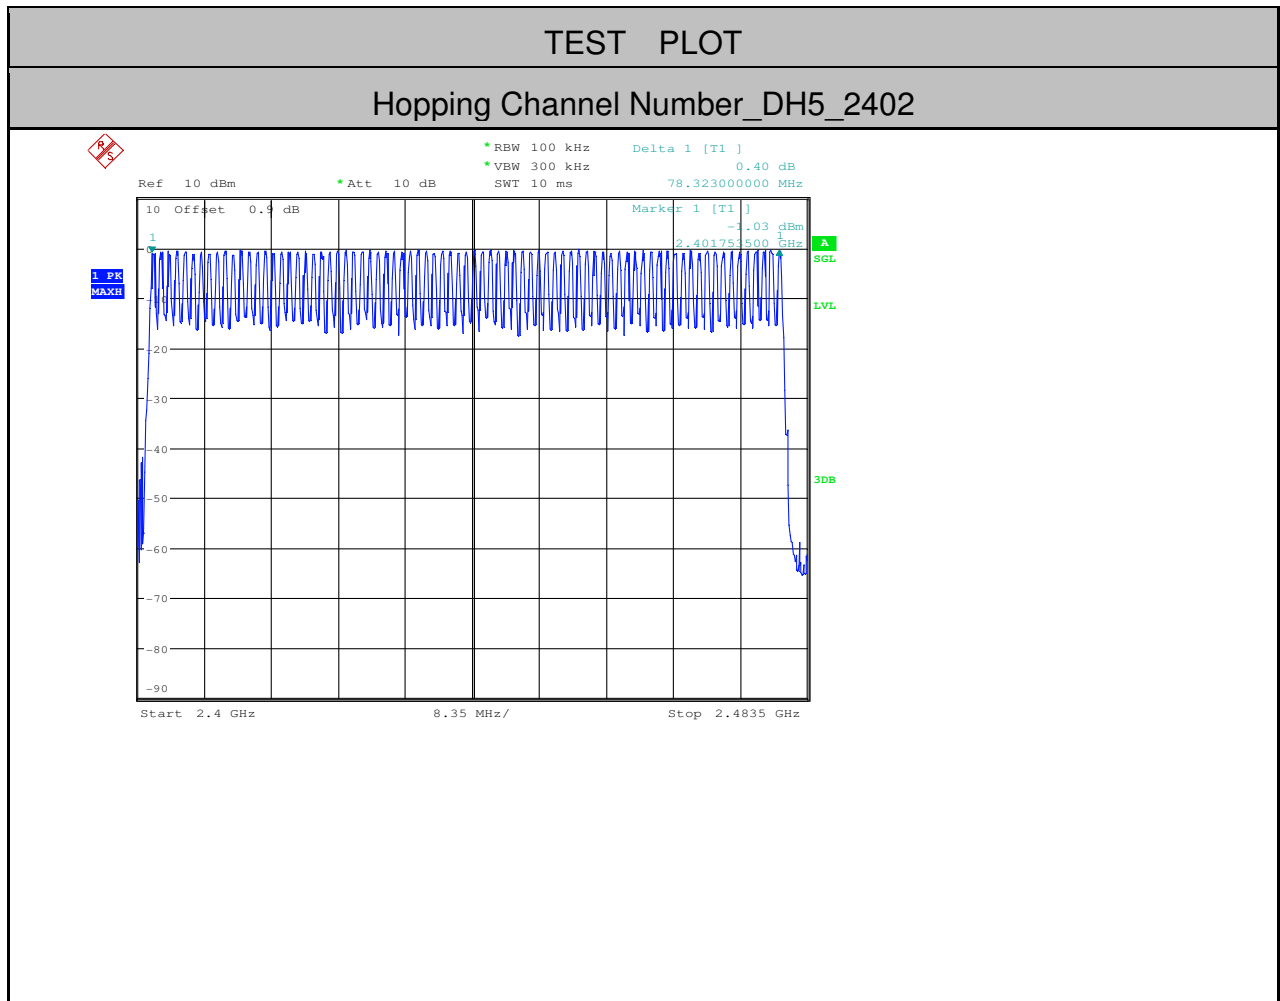




Hopping Channel Number\_2DH5\_2402

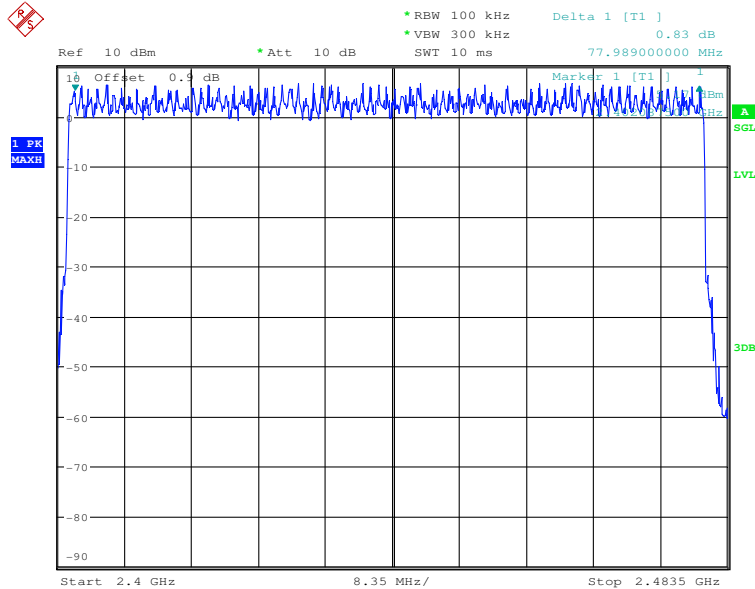



Hopping Channel Number\_3DH5\_2402

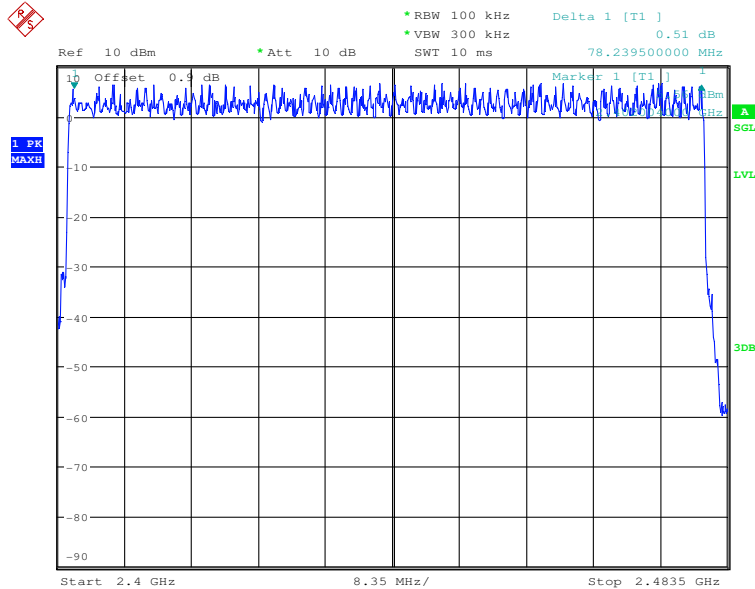


## 7. Band-edge for RF Conducted Emissions

| Test Mode | Test Channel | Hopping | Carrier Power[dBm] | Max. Spurious Level [dBm] | Limit[dBm] | Verdict |
|-----------|--------------|---------|--------------------|---------------------------|------------|---------|
| DH5       | 2402         | On      | -0.690             | -61.440                   | <-20.69    | PASS    |
| DH5       | 2402         | Off     | 1.080              | -59.843                   | <-18.92    | PASS    |
| DH5       | 2480         | On      | -0.820             | -62.030                   | <-20.82    | PASS    |
| DH5       | 2480         | Off     | 0.440              | -62.376                   | <-19.56    | PASS    |
| 2DH5      | 2402         | On      | 6.080              | -57.875                   | <-13.92    | PASS    |
| 2DH5      | 2402         | Off     | -2.060             | -62.383                   | <-22.06    | PASS    |
| 2DH5      | 2480         | On      | 6.460              | -57.879                   | <-13.54    | PASS    |
| 2DH5      | 2480         | Off     | -2.270             | -63.895                   | <-22.27    | PASS    |
| 3DH5      | 2402         | On      | 5.520              | -57.802                   | <-14.48    | PASS    |
| 3DH5      | 2402         | Off     | -1.940             | -62.856                   | <-21.94    | PASS    |
| 3DH5      | 2480         | On      | 5.530              | -58.921                   | <-14.47    | PASS    |
| 3DH5      | 2480         | Off     | -1.880             | -62.995                   | <-21.88    | PASS    |




TEST PLOT

Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping On

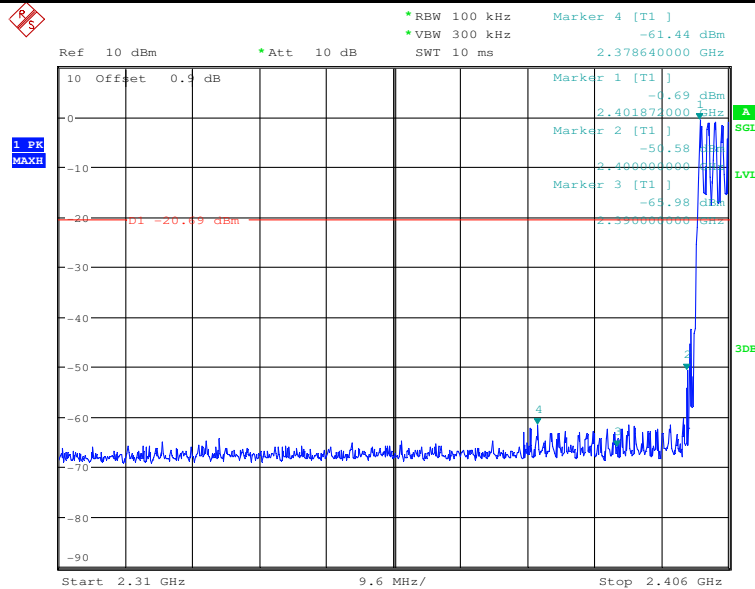




Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping Off

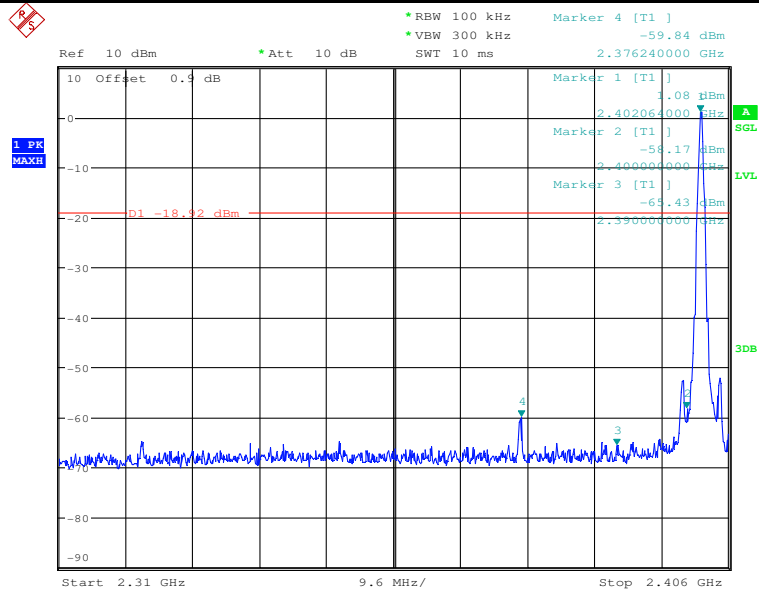






Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping On

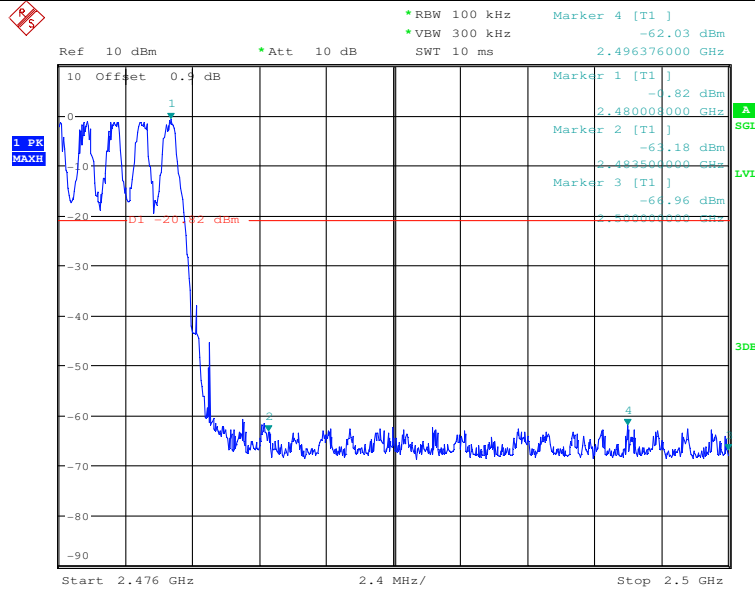


### Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping Off

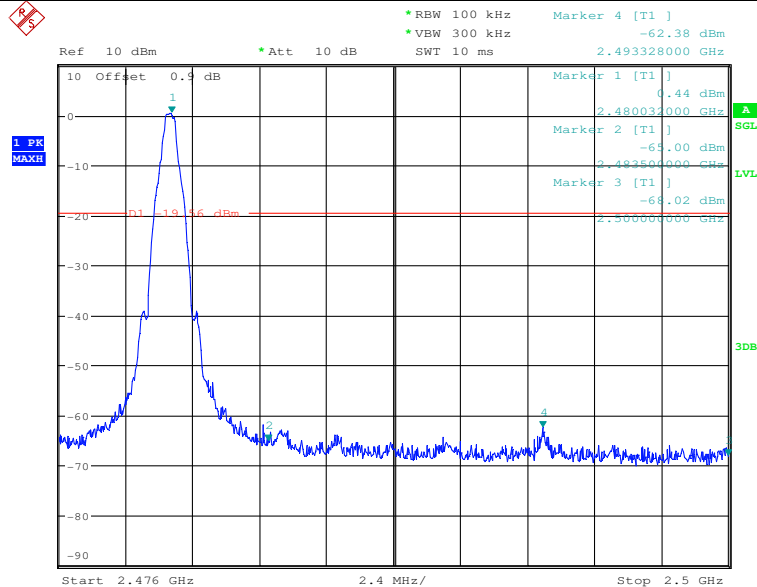




Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping On

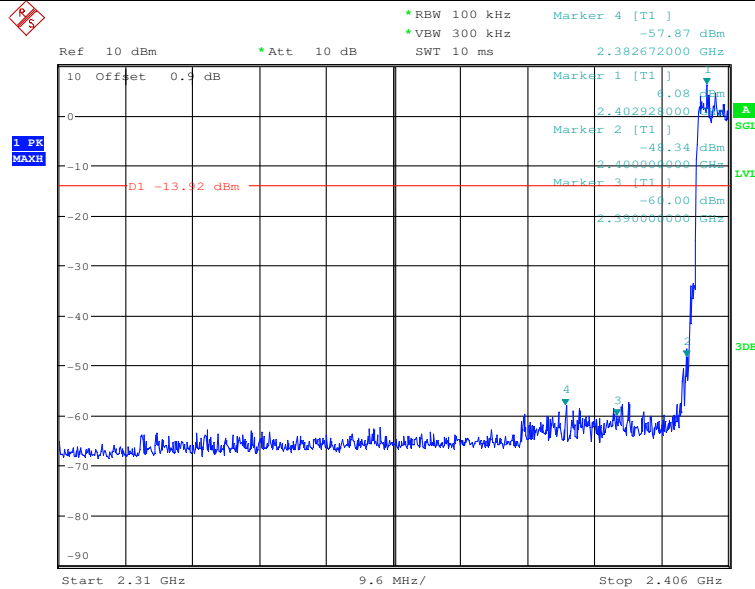




Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping Off

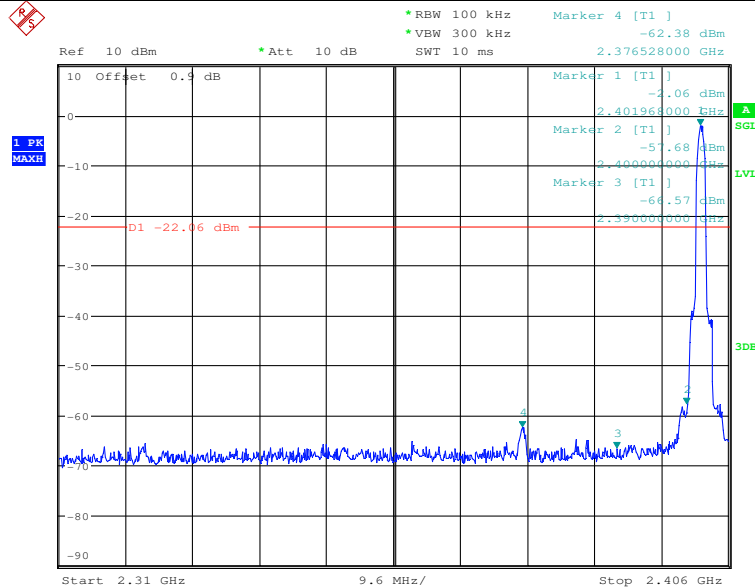






Band-edge for RF Conducted Emissions\_2DH5\_2480\_Hopping Off

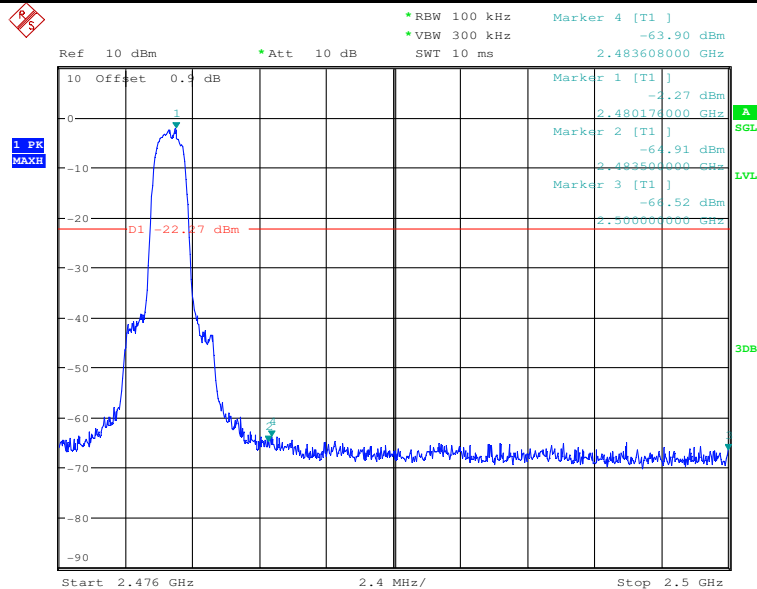




Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping On

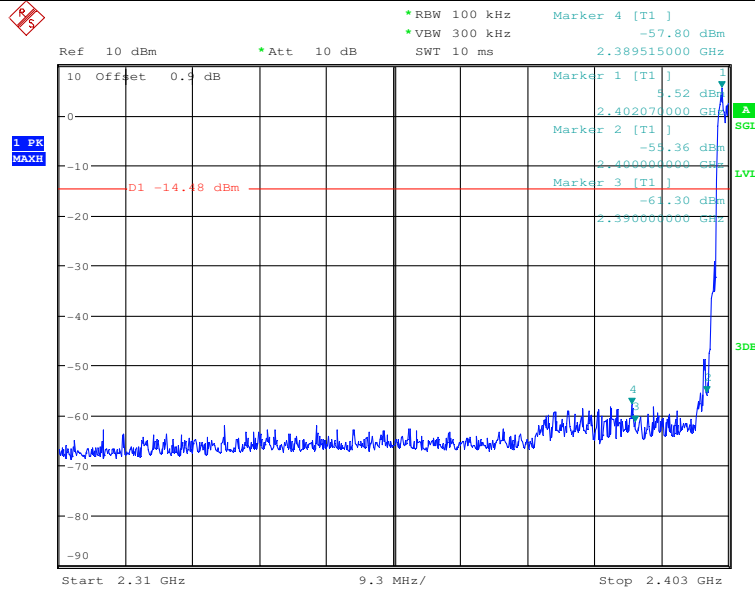




Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping Off

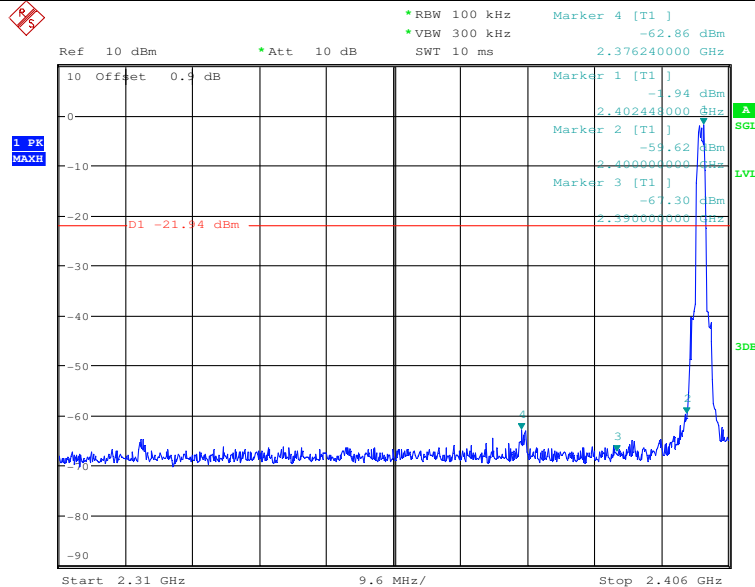






Band-edge for RF Conducted Emissions\_3DH5\_2480\_Hopping On

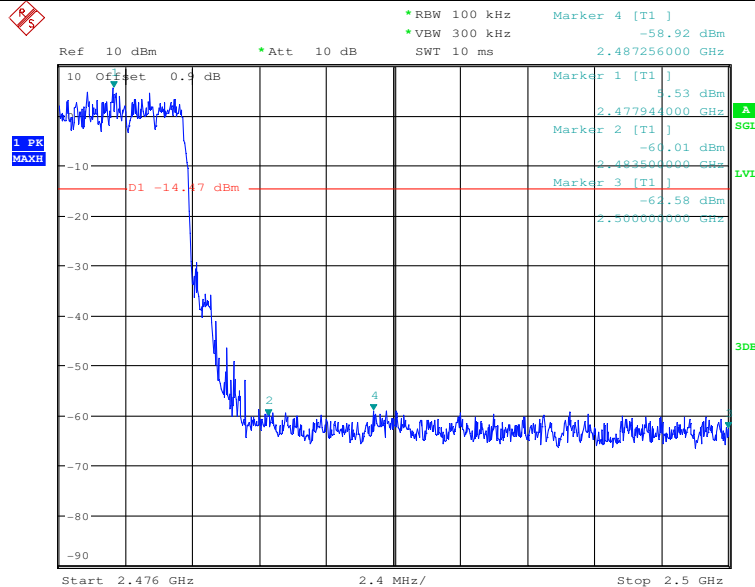

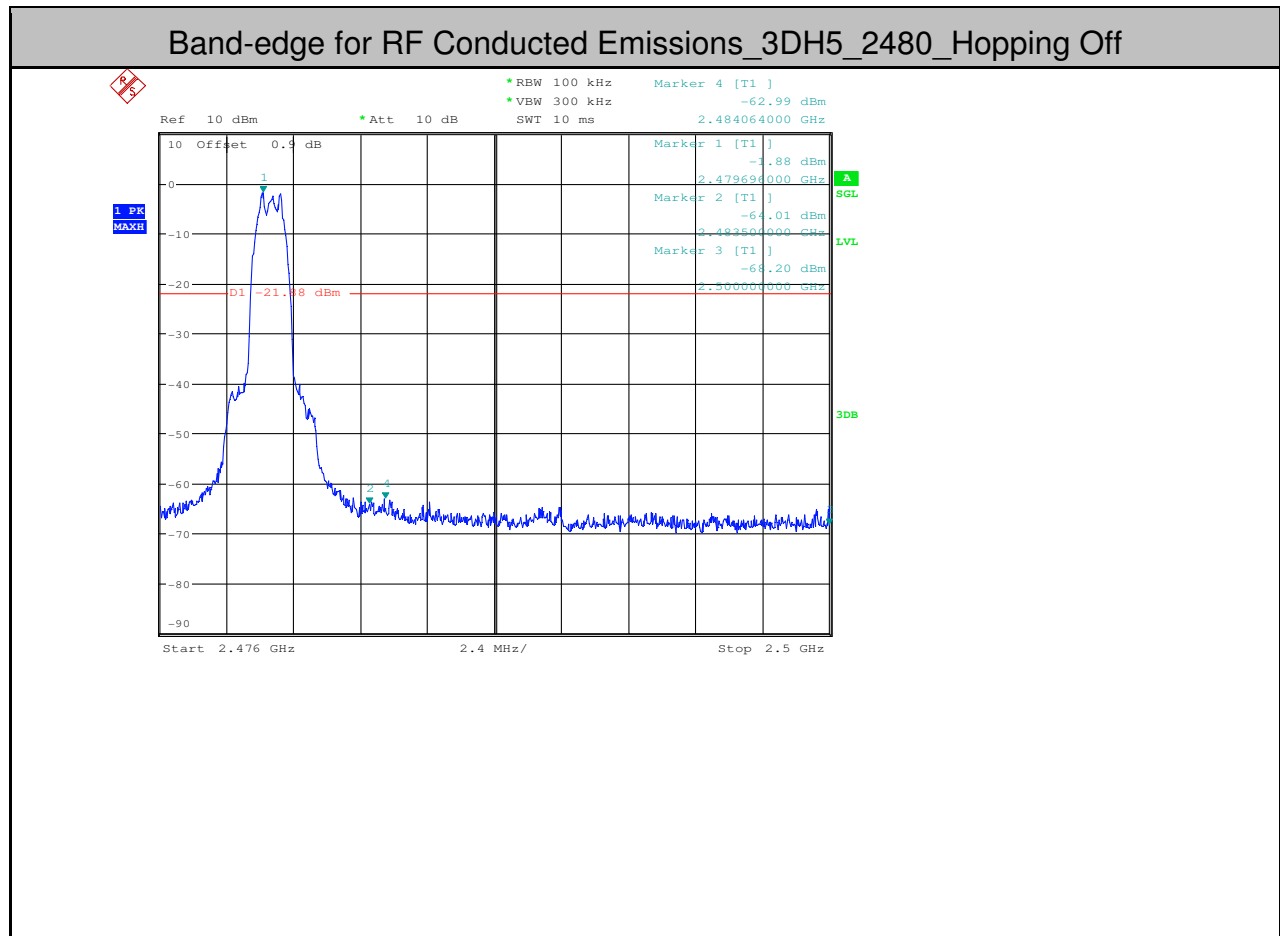

**Remark:**

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.

### 8.RF Conducted Spurious Emissions

| Test Mode | Test Channel | StartFre [MHz] | StopFre [MHz] | RBW [kHz] | VBW [kHz] | Pref [dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|-----------|--------------|----------------|---------------|-----------|-----------|------------|------------------|-------------|---------|
| DH5       | 2402         | 30             | 10000         | 1000      | 3000      | 1.03       | -48.060          | <-18.97     | PASS    |
| DH5       | 2402         | 10000          | 25000         | 1000      | 3000      | 1.03       | -65.060          | <-18.97     | PASS    |
| DH5       | 2441         | 30             | 10000         | 1000      | 3000      | 1.15       | -49.030          | <-18.85     | PASS    |
| DH5       | 2441         | 10000          | 25000         | 1000      | 3000      | 1.15       | -65.100          | <-18.85     | PASS    |
| DH5       | 2480         | 30             | 10000         | 1000      | 3000      | 1.06       | -49.210          | <-18.94     | PASS    |
| DH5       | 2480         | 10000          | 25000         | 1000      | 3000      | 1.06       | -64.930          | <-18.94     | PASS    |
| 2DH5      | 2402         | 30             | 10000         | 1000      | 3000      | -1.92      | -47.420          | <-21.92     | PASS    |
| 2DH5      | 2402         | 10000          | 25000         | 1000      | 3000      | -1.92      | -64.430          | <-21.92     | PASS    |
| 2DH5      | 2441         | 30             | 10000         | 1000      | 3000      | -1.75      | -48.170          | <-21.75     | PASS    |
| 2DH5      | 2441         | 10000          | 25000         | 1000      | 3000      | -1.75      | -64.840          | <-21.75     | PASS    |
| 2DH5      | 2480         | 30             | 10000         | 1000      | 3000      | -1.98      | -48.390          | <-21.98     | PASS    |
| 2DH5      | 2480         | 10000          | 25000         | 1000      | 3000      | -1.98      | -65.130          | <-21.98     | PASS    |
| 3DH5      | 2402         | 30             | 10000         | 1000      | 3000      | -1.89      | -48.160          | <-21.89     | PASS    |
| 3DH5      | 2402         | 10000          | 25000         | 1000      | 3000      | -1.89      | -64.780          | <-21.89     | PASS    |
| 3DH5      | 2441         | 30             | 10000         | 1000      | 3000      | -1.63      | -47.930          | <-21.63     | PASS    |
| 3DH5      | 2441         | 10000          | 25000         | 1000      | 3000      | -1.63      | -65.270          | <-21.63     | PASS    |
| 3DH5      | 2480         | 30             | 10000         | 1000      | 3000      | -1.82      | -47.550          | <-21.82     | PASS    |
| 3DH5      | 2480         | 10000          | 25000         | 1000      | 3000      | -1.82      | -65.140          | <-21.82     | PASS    |


**Remark:**

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.

# TEST PLOT


## RF Conducted Spurious Emissions\_DH5\_2402

Pref

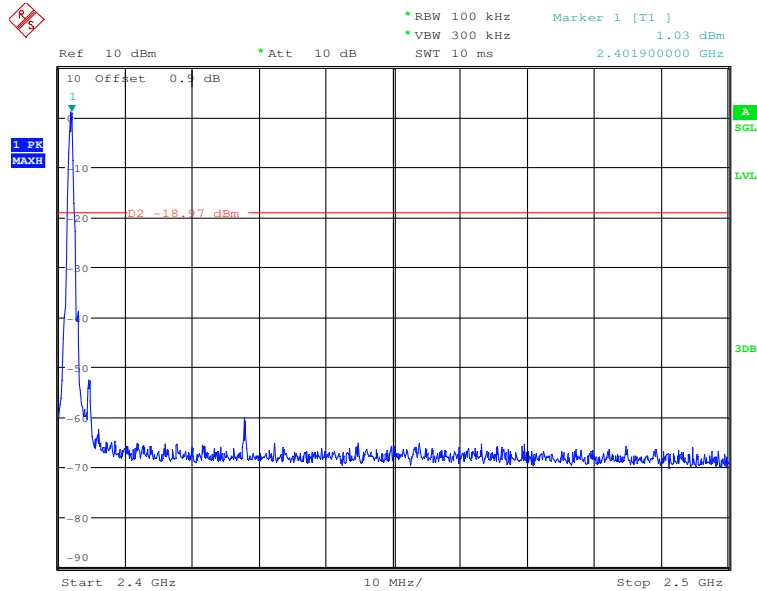




CSE\_1

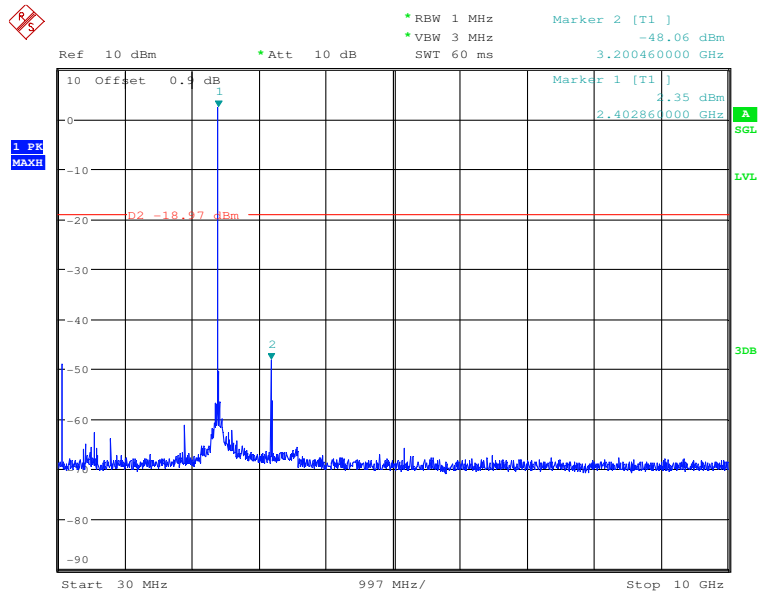


CSE\_2

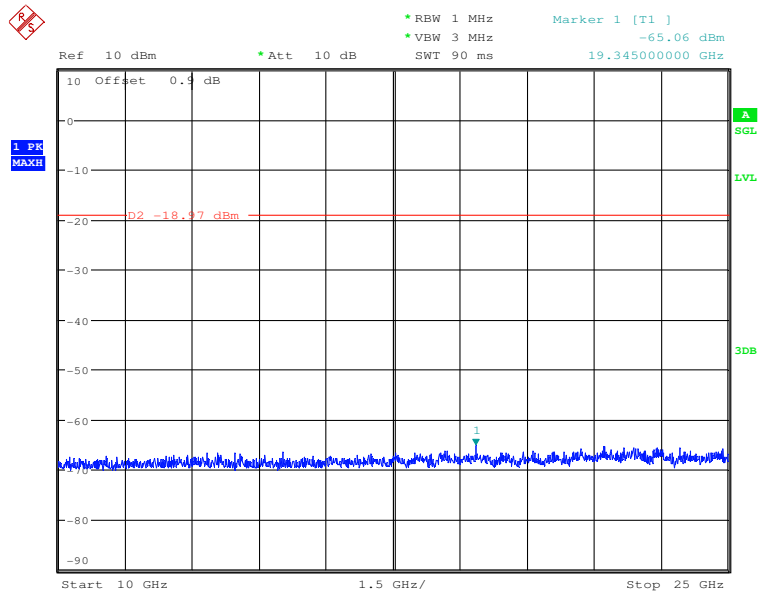




RF Conducted Spurious Emissions\_DH5\_2441

Pref

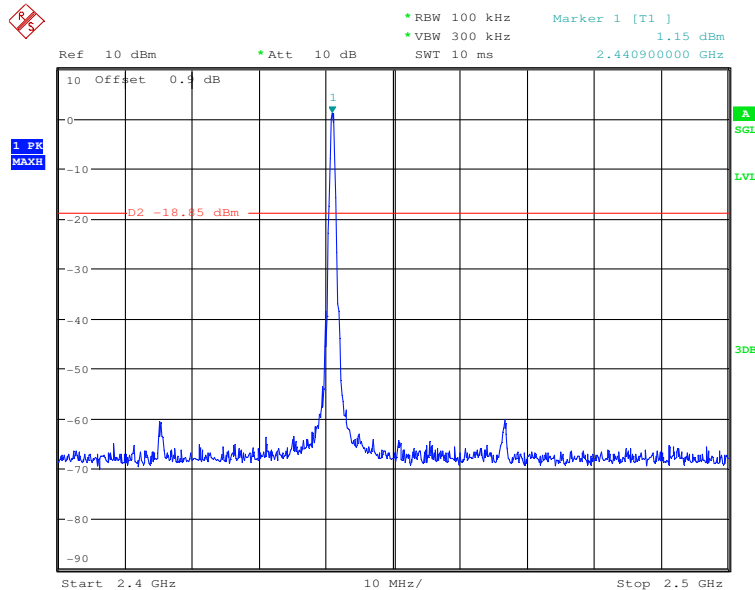




CSE\_1

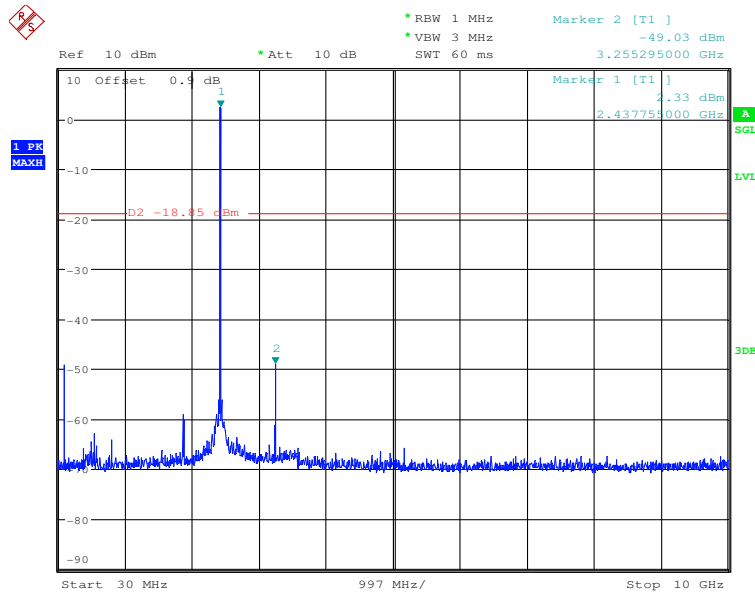


CSE\_2

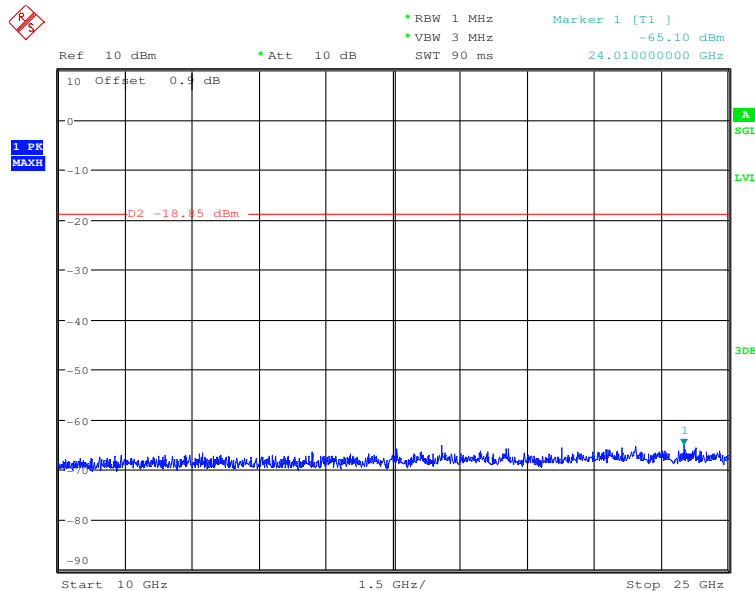



RF Conducted Spurious Emissions\_DH5\_2480


Pref

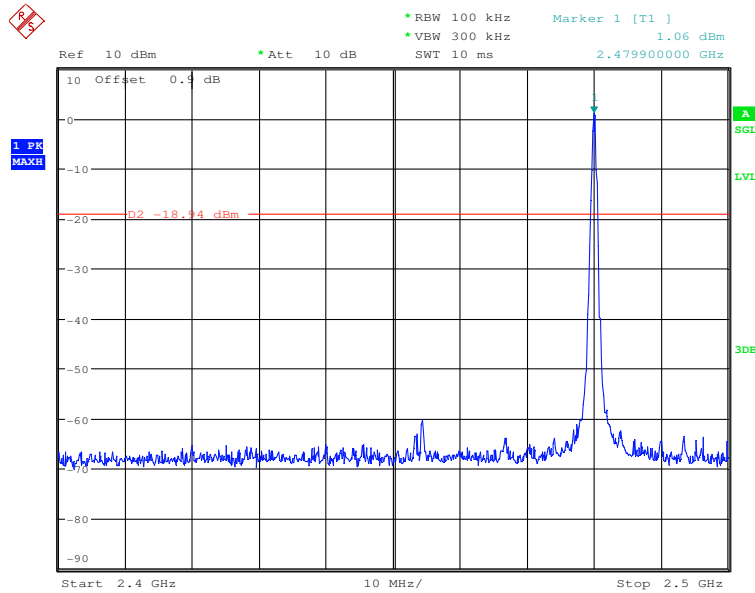






CSE\_1

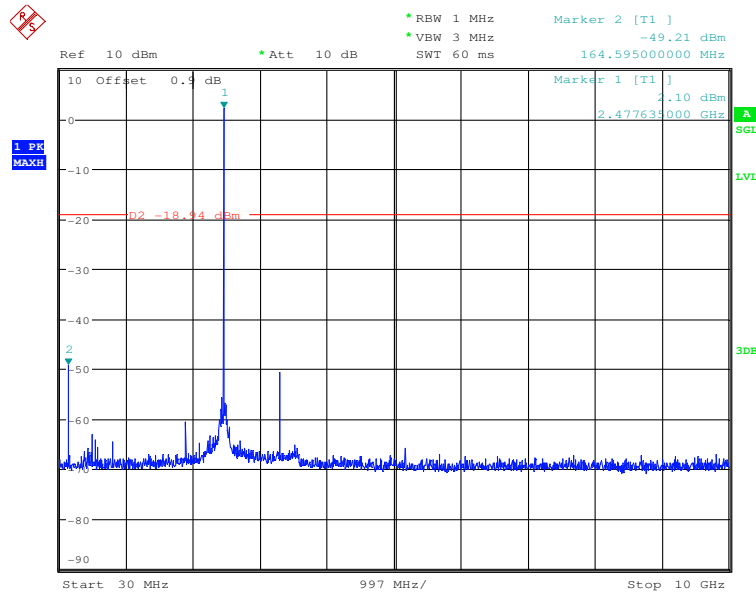


CSE\_2

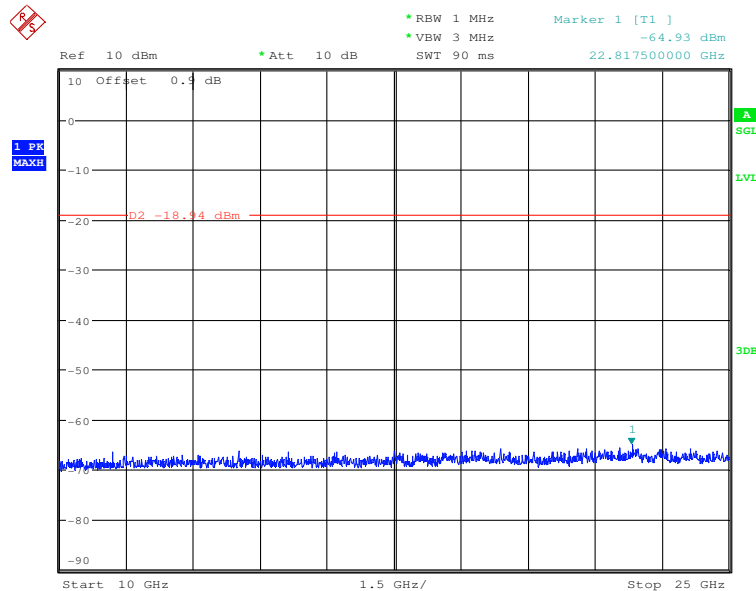




RF Conducted Spurious Emissions\_2DH5\_2402

Pref

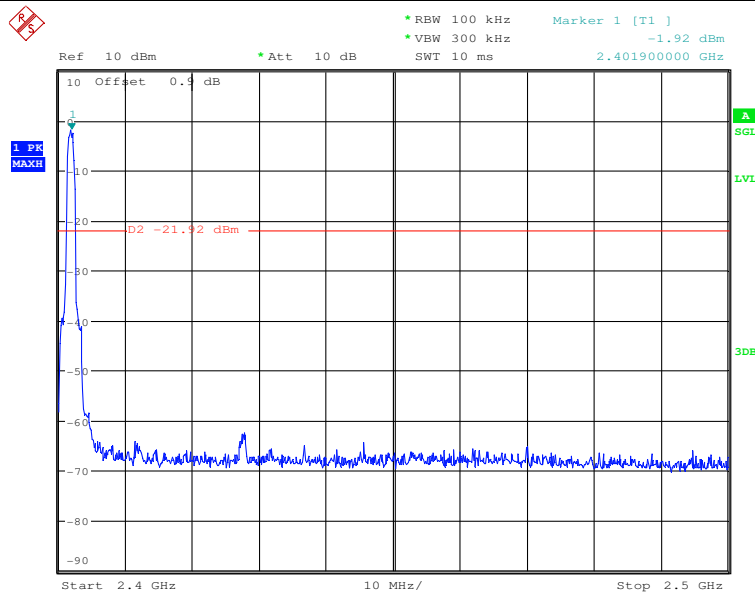




CSE\_1

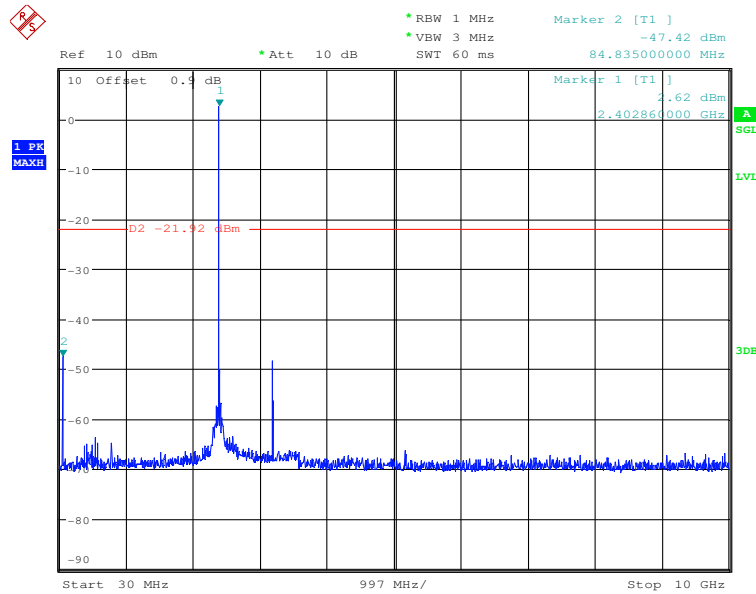


CSE\_2

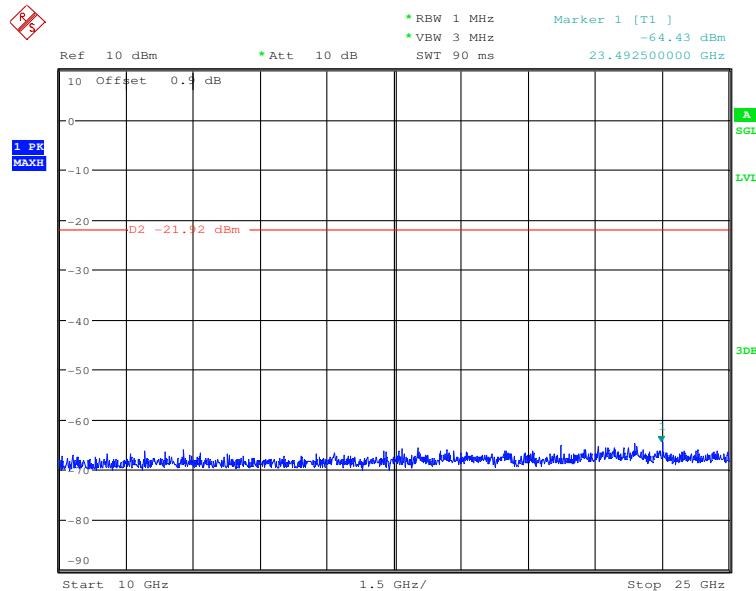




RF Conducted Spurious Emissions\_2DH5\_2441

Pref

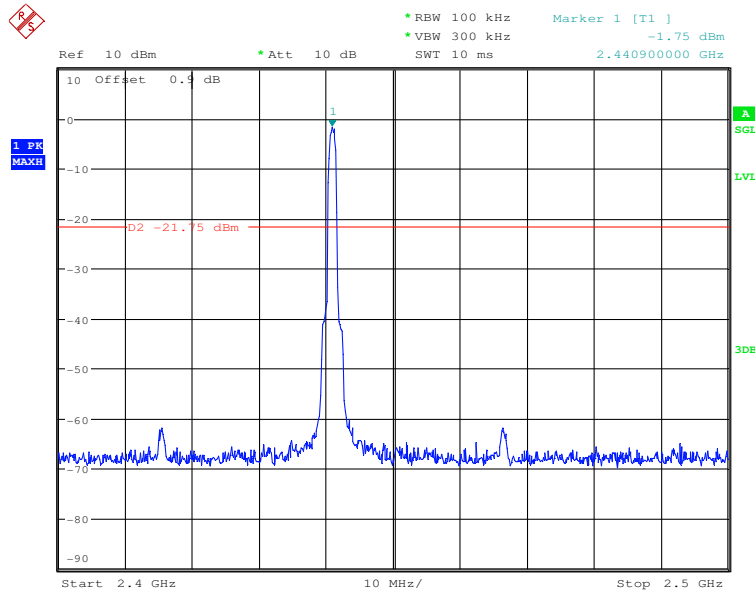




CSE\_1

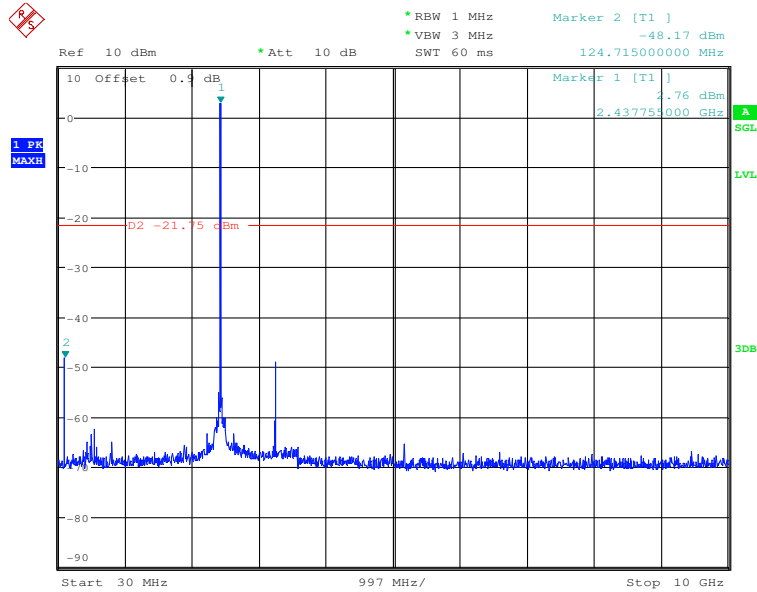


CSE\_2

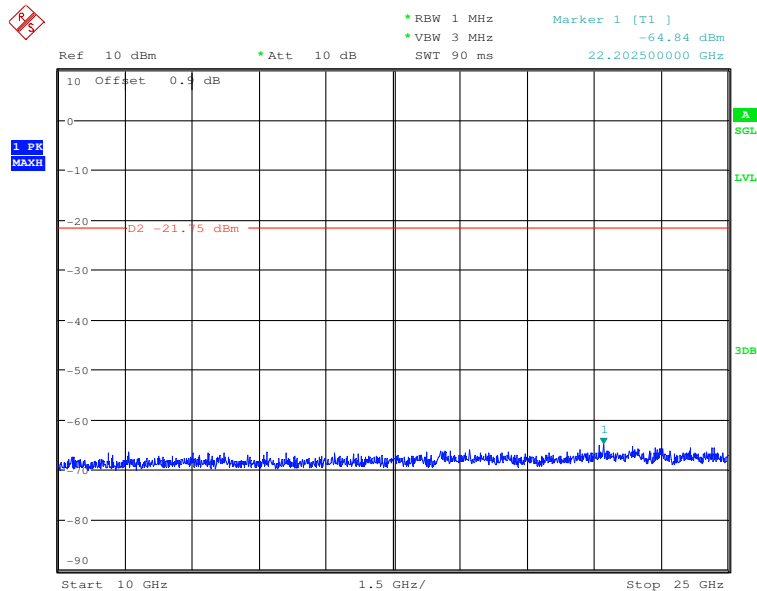




RF Conducted Spurious Emissions\_2DH5\_2480

Pref

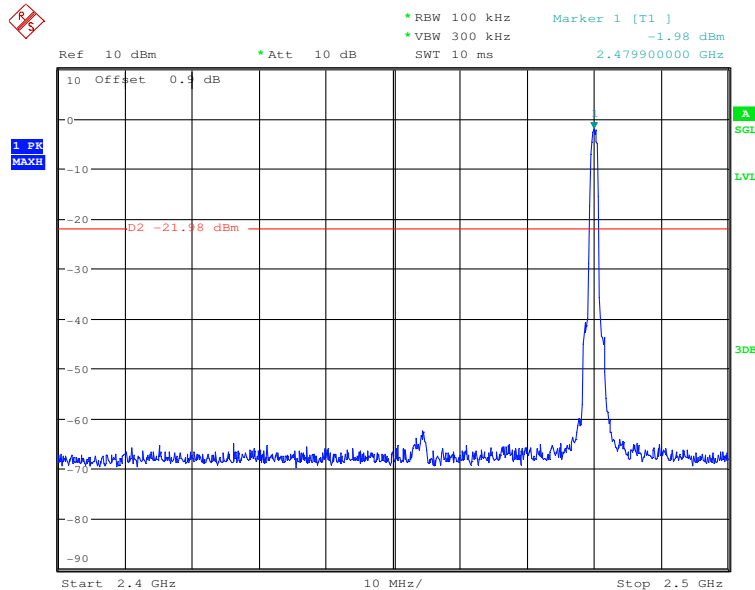




CSE\_1

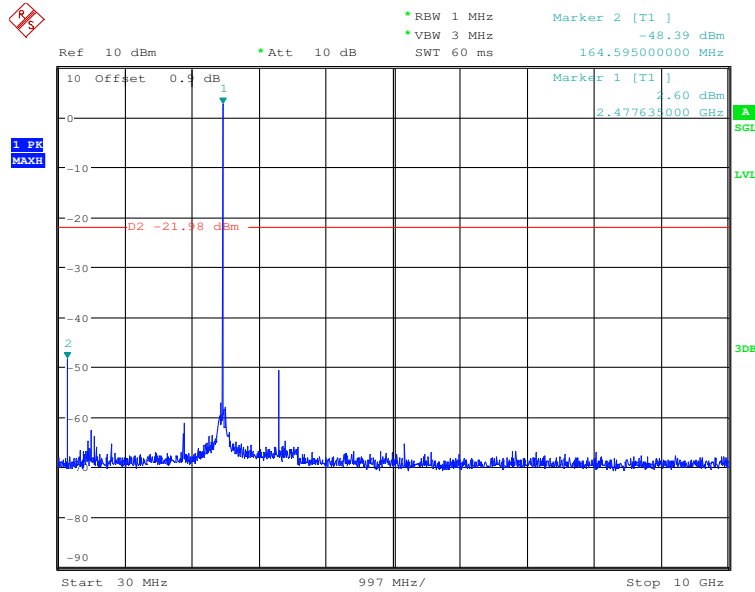


CSE\_2

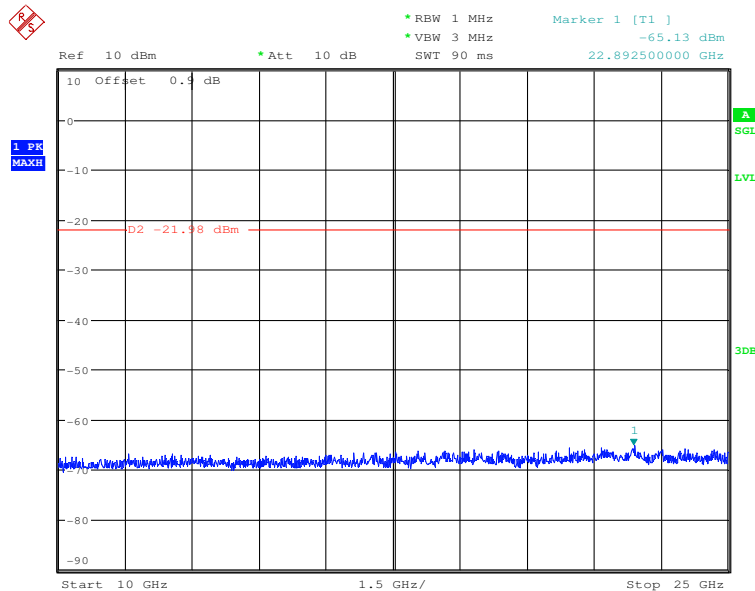



RF Conducted Spurious Emissions\_3DH5\_2402


Pref

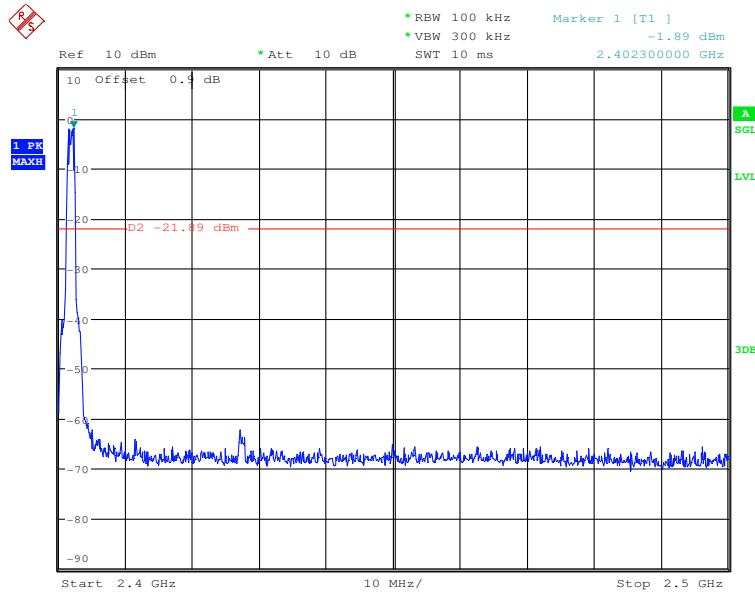






CSE\_1

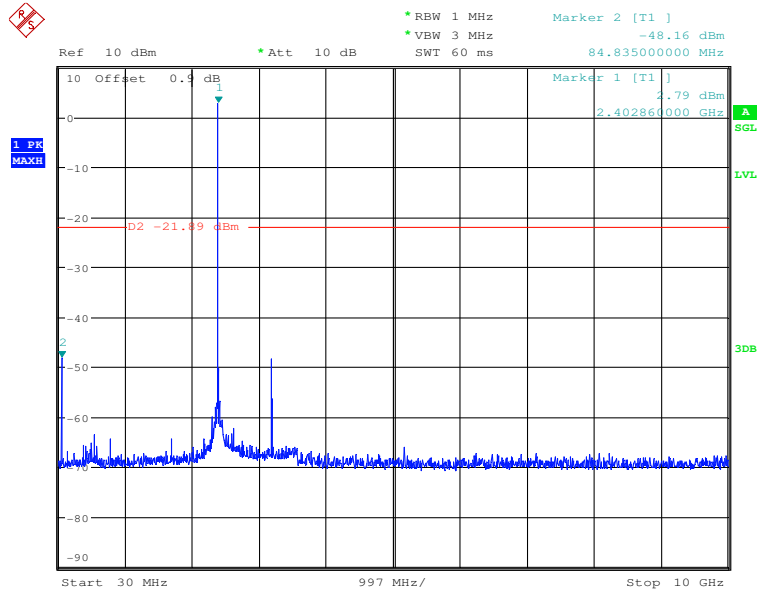


CSE\_2

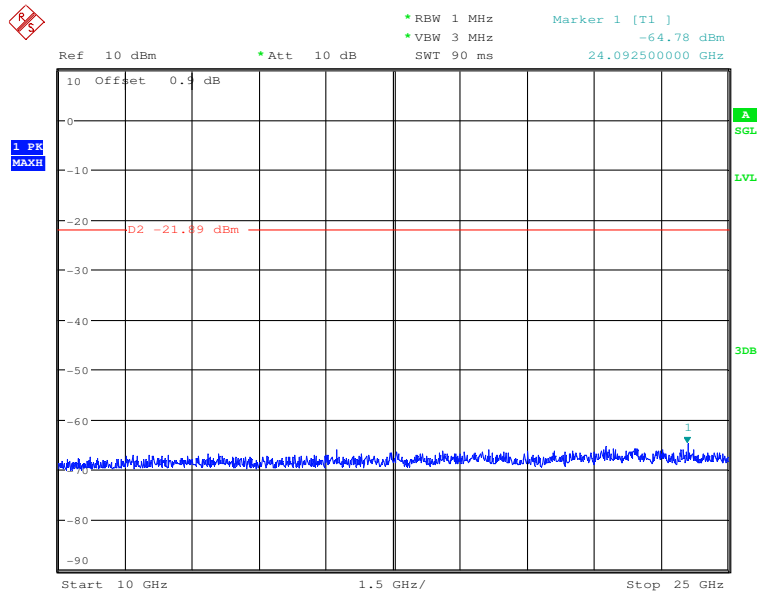


## RF Conducted Spurious Emissions\_3DH5\_2441

Pref

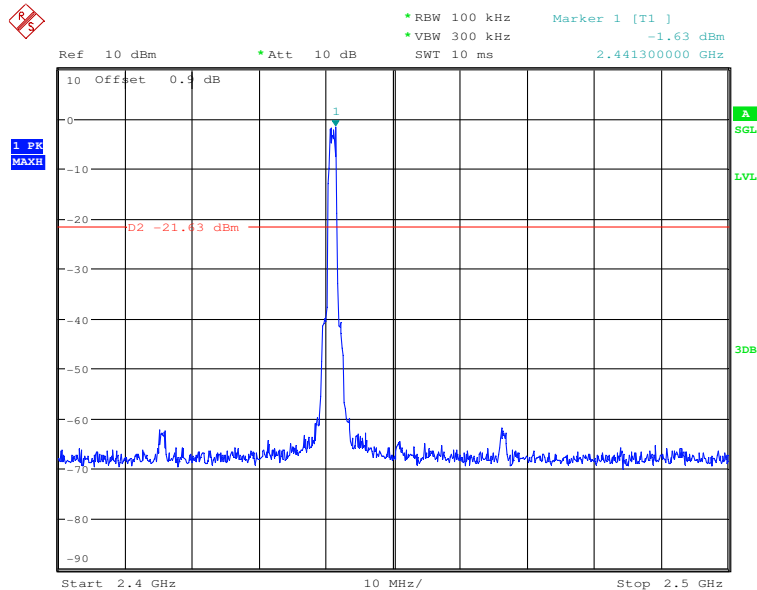




CSE\_1

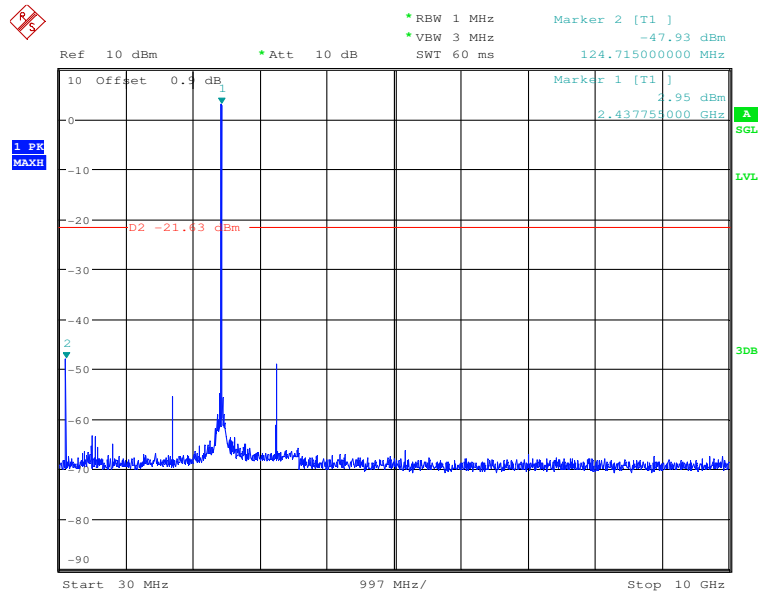


CSE\_2

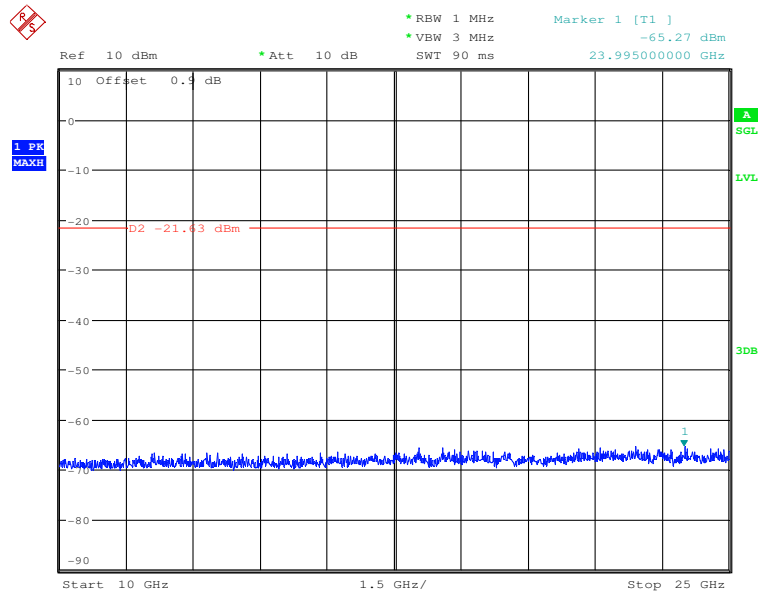




RF Conducted Spurious Emissions\_3DH5\_2480

Pref

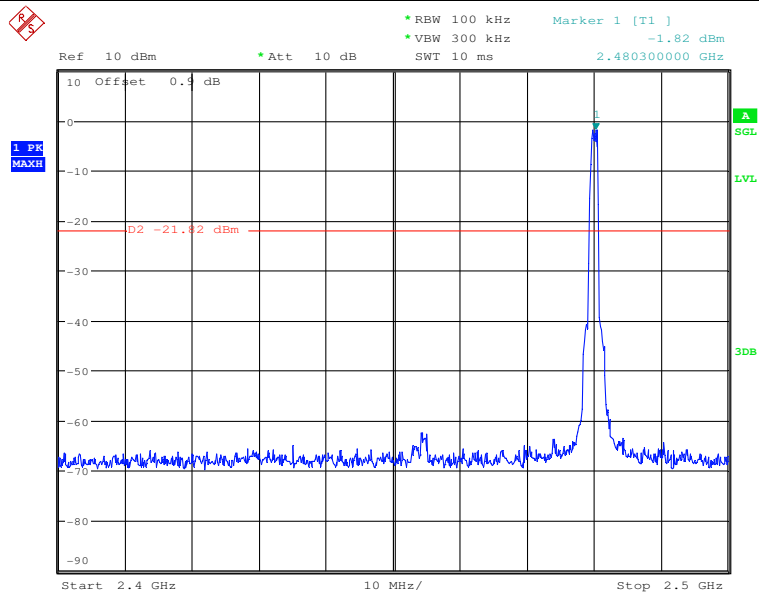



CSE\_1

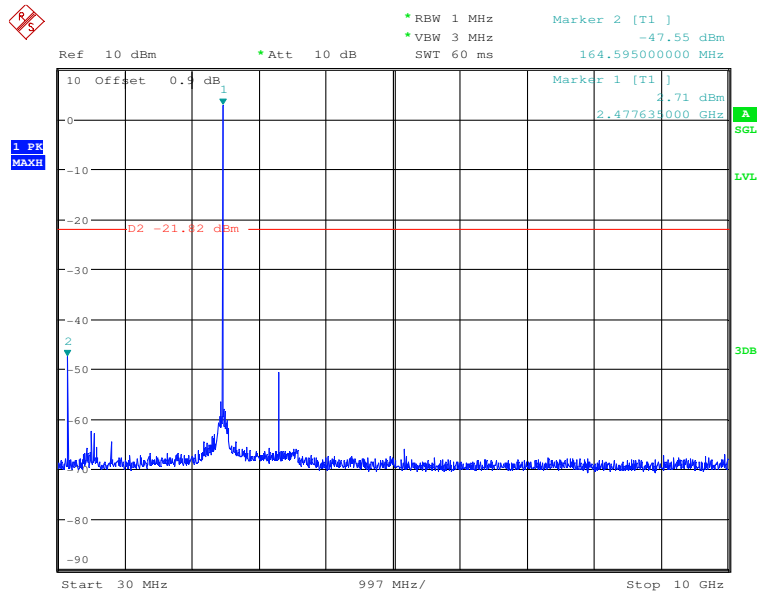

CSE\_2

