



Report No.: FCC 1911024 File Reference No.: 2019-11-12

Applicant: Dongguan Jiasheng Enterprise Co., Ltd.

Product: Bluetooth motion detector

Model No.: N/A

Trademark: T900 (C05)

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: November 12, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1911024 Page 2 of 49

Date: 2019-11-12



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 49

Report No.: FCC1911024

Date: 2019-11-12



Test Report Conclusion

Content

| 1.0 | General Details | 4 |
|------|-------------------------------------|----|
| 1.1 | Test Lab Details. | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 4 |
| 1.5 | Test Duration. | 4 |
| 1.6 | Test Uncertainty. | 4 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment | 6 |
| 3.0 | Technical Details | 7 |
| 3.1 | Summary of Test Results. | 7 |
| 3.2 | Test Standards. | 7 |
| 4.0 | EUT Modification. | 7 |
| 5.0 | Power Line Conducted Emission Test. | 8 |
| 5.1 | Schematics of the Test. | 8 |
| 5.2 | Test Method and Test Procedure. | 8 |
| 5.3 | Configuration of the EUT. | 8 |
| 5.4 | EUT Operating Condition. | 9 |
| 5.5 | Conducted Emission Limit. | 9 |
| 5.6 | Test Result. | 9 |
| 6.0 | Radiated Emission test. | 12 |
| 5.1 | Test Method and Test Procedure. | 12 |
| 5.2 | Configuration of the EUT. | 12 |
| 6.3 | EUT Operation Condition. | 12 |
| 6.4 | Radiated Emission Limit. | 13 |
| 7.0 | 6dB Bandwidth Measurement Bandwidth | 22 |
| 8.0 | Maximum Peak Output Power | 28 |
| 9.0 | Power Spectral Density Measurement. | 29 |
| 10.0 | Out of Band Measurement. | 34 |
| 11.0 | Antenna Requirement. | 41 |
| 12.0 | FCC ID Label. | 42 |
| 13.0 | Photo of Test Setup and EUT View. | 43 |

Date: 2019-11-12



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: Dongguan Jiasheng Enterprise Co., Ltd.

Address: Tongsha New Industrial Park, Tongsha Community, Dongcheng District, Dongguan

Telephone: --Fax: ---

1.3 Description of EUT

Product: Bluetooth motion detector

Manufacturer: Dongguan Jiasheng Enterprise Co., Ltd.

Address: Tongsha New Industrial Park, Tongsha Community, Dongcheng District,

Dongguan

Brand Name: N/A
Additional Brand Name: N/A

Model Number: T900 (C05)

Additional Model Number: N/A

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

Rating: Built-in 3.7V Li-ion battery

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2019-11-04 to 2019-11-12

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1911024 Page 5 of 49

Date: 2019-11-12



Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry lang The sample tested by

Print Name: Terry Tang

Page 6 of 49 Report No.: FCC1911024

Date: 2019-11-12



| 2.0 Test Equipment | | | | | |
|--------------------|------------------|--------------|--------------|--------------|------------|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2019-06-21 | 2020-06-20 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100294 | 2019-06-21 | 2020-06-20 |
| TWO Line-V-NETW | R&S | EZH3-Z5 | 100253 | 2019-06-21 | 2020-06-20 |
| Impuls-Begrenzer | R&S | ESH3-Z2 | 100281 | 2019-06-21 | 2020-06-20 |
| Loop Antenna | EMCO | 6507 | 00078608 | 2020-06-20 | 2020-06-20 |
| Spectrum | R&S | FSIQ26 | 100292 | 2019-06-21 | 2020-06-20 |
| Horn Antenna | A-INFO | LB-180400-KF | J211060660 | 2019-06-21 | 2020-06-20 |
| Horn Antenna | R&S | BBHA 9120D | 9120D-631 | 2018-07-09 | 2021-07-08 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2019-08-22 | 2020-08-21 |
| Power sensor | Anritsu | MA2491A | 32263 | 2019-08-22 | 2020-08-21 |
| Bilog Antenna | Schwarebeck | VULB9163 | 9163/340 | 2018-07-04 | 2021-07-03 |
| 9*6*6 Anechoic | | | N/A | 2018-02-07 | 2021-02-06 |
| EMI Test Receiver | RS | ESVB | 826156/011 | 2019-06-21 | 2020-06-20 |
| EMI Test Receiver | RS | ESH3 | 860904/006 | 2019-06-21 | 2020-06-20 |
| Spectrum | HP/Agilent | ESA-L1500A | US37451154 | 2019-06-21 | 2020-06-20 |
| Spectrum | HP/Agilent | E4407B | MY50441392 | 2019-06-21 | 2020-06-20 |
| Spectrum | RS | FSP | 1164.4391.38 | 2019-01-20 | 2020-01-19 |
| RF Cable | RF Cable Zhengdi | | | 2019-06-21 | 2020-06-20 |
| RF Cable | Zhengdi | 7m | | 2019-06-21 | 2020-06-20 |
| RF Switch | EM | EMSW18 | 060391 | 2019-06-21 | 2020-06-20 |
| Pre-Amplifier | Schwarebeck | BBV9743 | #218 | 2019-06-21 | 2020-06-20 |
| Pre-Amplifier | HP/Agilent | 8449B | 3008A00160 | 2019-06-21 | 2020-06-20 |
| LISN | SCHAFFNER | NNB42 | 00012 | 2019-01-08 | 2020-01-07 |

Report No.: FCC1911024

Date: 2019-11-12



3.0 **Technical Details**

3.1 **Summary of test results**

| Standard | Test Type | Result | Notes |
|---|--|--------|----------|
| FCC Part 15, Paragraph 15.107 & 15.207 | Conducted Emission Test | PASS | Complies |
| FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit | Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz | PASS | Complies |
| FCC Part 15, Paragraph 15.247(b) | Maximum peak output power Limit: max. 30dBm | PASS | Complies |
| FCC Part 15, Paragraph 15.109,15.205 & 15.209 | Transmitter Radiated Emission Limit: Table 15.209 | PASS | Complies |
| FCC Part 15, Paragraph 15.247(e) | Power Spectral Density Limit: max. 8dBm | PASS | Complies |
| FCC Part 15, Paragraph 15.247(d) | Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209 | PASS | Complies |

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 49


Report No.: FCC1911024

Date: 2019-11-12



5.Power Line Conducted Emission Test

5.1 Schematics of the test

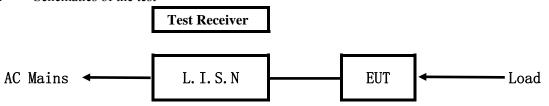


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 500hm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

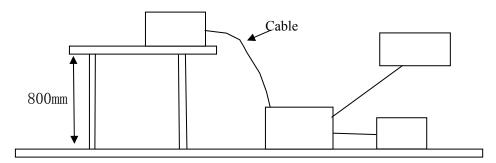

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

| Devi | | Manufacturer | Model | FCC ID |
|------|----------------------------|---|--------------|------------|
| ce | | | | |
| Blu | uetooth motion detector | Dongguan Jiasheng Enterprise Co., Ltd. | T900 (C05) | 2AUY5-T900 |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1911024 Page 9 of 49

Date: 2019-11-12



B. Internal Device

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
| | | | |

C. Peripherals

| Device | Manufacturer | Model | Rating |
|--------------|--------------|-------------------|----------------------------------|
| Power Supply | SOY | ES538A-U050300XYC | Input: 100-240V~, 50/60Hz, 0.5A; |
| | | | Output: DC5V, 3A |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

| Frequency | Class A Lim | its (dB µ V) | Class B Limits (dB µ V) | | | |
|------------------|------------------|---------------|-------------------------|---------------|--|--|
| (MHz) | Quasi-peak Level | Average Level | Quasi-peak Level | Average Level | | |
| $0.15 \sim 0.50$ | 79.0 | 66.0 | 66.0~56.0* | 56.0~46.0* | | |
| $0.50 \sim 5.00$ | 73.0 | 60.0 | 56.0 | 46.0 | | |
| 5.00 ~ 30.00 | 73.0 | 60.0 | 60.0 | 5 .0 | | |

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2019-11-12



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

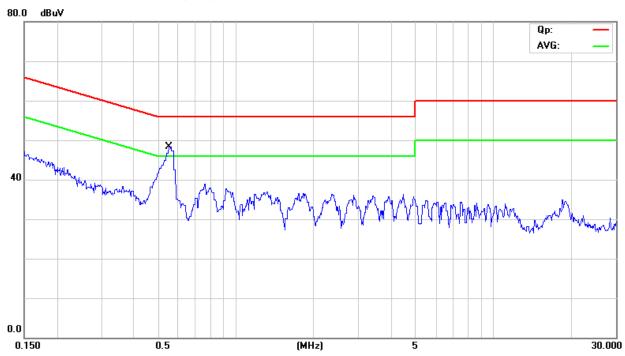

| No. Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit Over | | | |
|---------|--------|------------------|-------------------|------------------|------------|--------|----------|---------|
| | MHz | dBu∨ | dB | dBu∀ | dBu∨ | dB | Detector | Comment |
| 1 | 0.5561 | 35.10 | 9.77 | 44.87 | 56.00 | -11.13 | QP | |
| 2 * | 0.5561 | 27.10 | 9.77 | 36.87 | 46.00 | -9.13 | AVG | |

Date: 2019-11-12



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

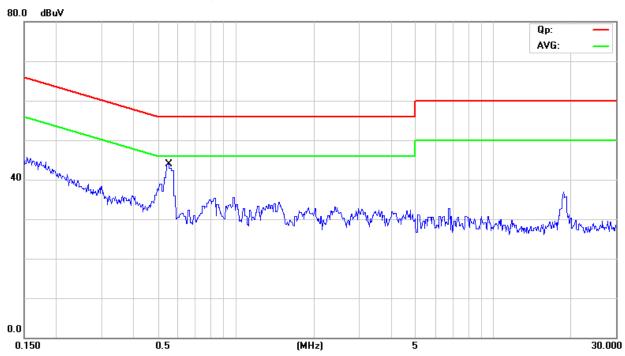

| No. Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | | |
|---------|--------|------------------|-------------------|------------------|-------|--------|----------|---------|
| | MHz | dBu∀ | dB | dBu∀ | dBu∀ | dB | Detector | Comment |
| 1 | 0.5524 | 29.70 | 9.77 | 39.47 | 56.00 | -16.53 | QP | |
| 2 * | 0.5524 | 20.80 | 9.77 | 30.57 | 46.00 | -15.43 | AVG | |

Report No.: FCC1911024 Page 12 of 49


Date: 2019-11-12



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

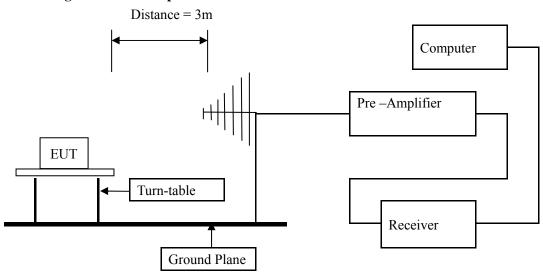

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1911024 Page 13 of 49

Date: 2019-11-12



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m) |
|-----------------------|--------------|-------------------------------|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. Battery fully charged

Report No.: FCC1911024

Date: 2019-11-12



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data


Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

FCC_FCC Part 15B Class B 30MHz-1GHz

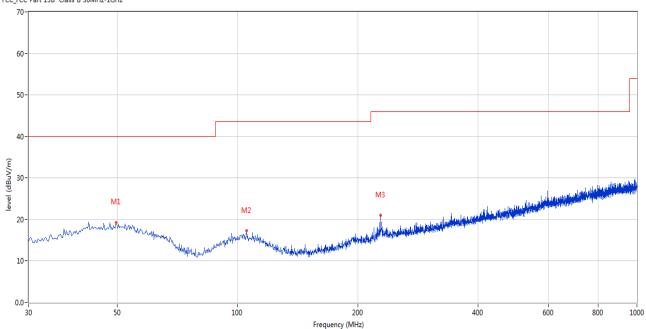

| No. | Frequency | Results | Factor (dB) | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|-------------|----------|------------|----------|--------|--------|-----|---------|
| | (MHz) | (dBuV/m) | | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 49.638 | 19.28 | -11.32 | 40.0 | -20.72 | Peak | 360.00 | 200 | Н | Pass |
| 2 | 105.399 | 17.27 | -13.25 | 43.5 | -26.23 | Peak | 359.00 | 100 | Н | Pass |
| 3 | 228.315 | 20.98 | -12.75 | 46.0 | -25.02 | Peak | 44.00 | 100 | Н | Pass |

Report No.: FCC1911024 Page 15 of 49

Date: 2019-11-12



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data


Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

Test Figure:

FCC_FCC Part 15B Class B 30MHz-1GHz

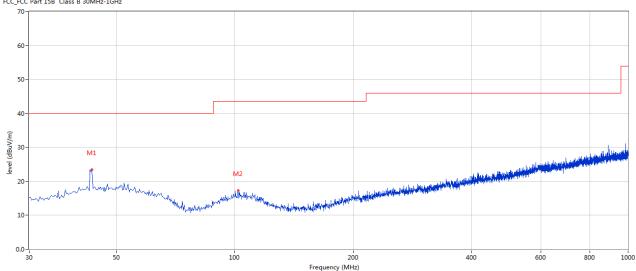

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 43.334 | 23.41 | -11.49 | 40.0 | -16.59 | Peak | 360.00 | 200 | V | Pass |
| 2 | 102.004 | 17.29 | -13.42 | 43.5 | -26.21 | Peak | 0.00 | 200 | V | Pass |

Report No.: FCC1911024 Page 16 of 49

Date: 2019-11-12




Test Figures above 1GHz:

Please refer to the following test plots for details:

Low Channel: Vertical

FCC_FCC Part 15B Class B 1GHz-18GHz - 2

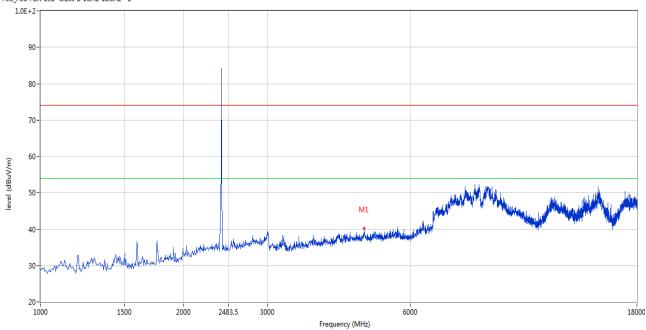


| No. | Frequency | Results | Factor (dB) | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|-------------|----------|------------|----------|-------|--------|-----|---------|
| | (MHz) | (dBuV/m) | | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 4802.799 | 40.33 | 3.12 | 54.0 | -13.67 | Peak | 3.00 | 100 | V | Pass |

Report No.: FCC1911024 Page 17 of 49

Date: 2019-11-12



Low Channel: Horizontal

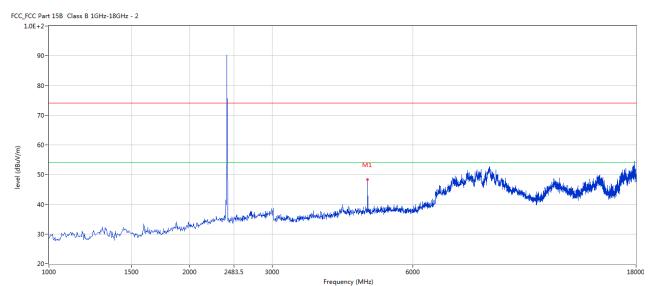


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4802.799 | 48.37 | 3.12 | 54.0 | -5.63 | Peak | 240.00 | 100 | Н | Pass |

Report No.: FCC1911024 Page 18 of 49

Date: 2019-11-12



Middle Channel: Vertical

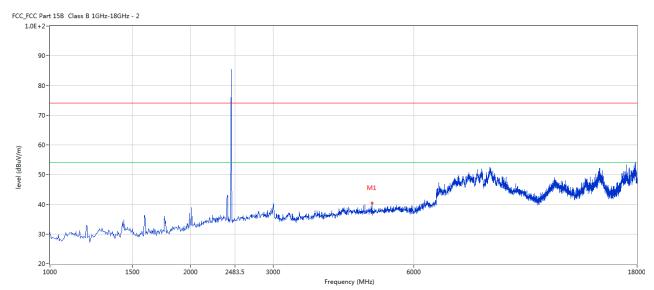


| No | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4879.280 | 40.51 | 3.20 | 54.0 | -13.49 | Peak | 360.00 | 100 | V | Pass |

Report No.: FCC1911024 Page 19 of 49

Date: 2019-11-12



Middle Channel: Horizontal

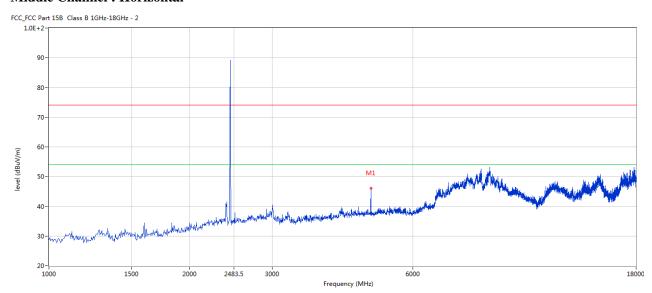


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4879.280 | 46.18 | 3.20 | 54.0 | -7.82 | Peak | 237.00 | 100 | Н | Pass |

Report No.: FCC1911024 Page 20 of 49

Date: 2019-11-12



High Channel: Vertical

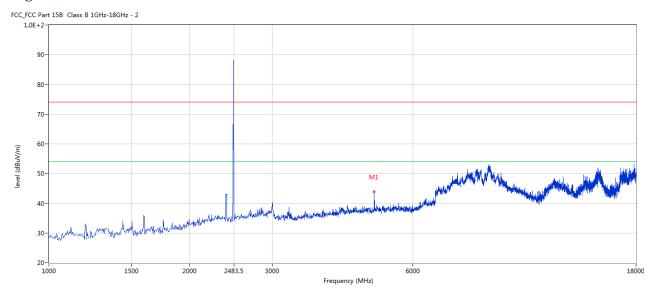


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4960.010 | 43.91 | 3.36 | 54.0 | -10.09 | Peak | 360.00 | 100 | V | Pass |

Report No.: FCC1911024 Page 21 of 49

Date: 2019-11-12



High Channel: Horizontal

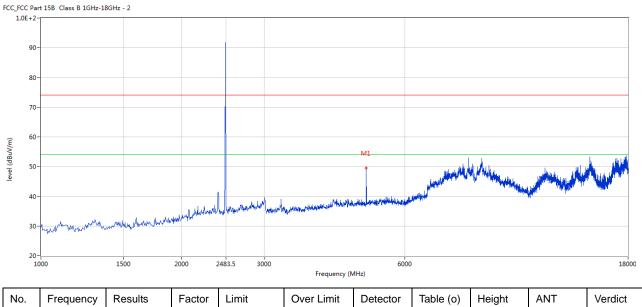

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|-----|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 4960.010 | 50.57 | 3.36 | 74.0 | -23.43 | Peak | 240.00 | 100 | Н | Pass |

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Page 22 of 49


Report No.: FCC1911024

Date: 2019-11-12



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 23 of 49 Report No.: FCC1911024

Date: 2019-11-12



6dB BW

| EUT | | Bluetooth moti | Model | | TS | 900 (C05) | |
|-------------|----------|----------------|--------------|-----------------|------------------------|-------------|------------|
| Mode | | Keep Trans | Input Voltag | e | | DC3.7V | |
| Temperature | | 24 deg. C, | | Humidity 5 | | 56% RH | |
| Channel | | | | andwidth Hz) | Minimum Limit (kHz) | | Pass/ Fail |
| Low | Low 2402 | | 739 | | | 0.5 | Pass |
| Middle 2440 | | 2440 | 7 | 33 | | 0.5 | Pass |
| High | | 2480 | 7 | 33 | | 0.5 | Pass |


Report No.: FCC1911024 Page 24 of 49

Date: 2019-11-12



Test Figure:

1. Condition: Low Channel

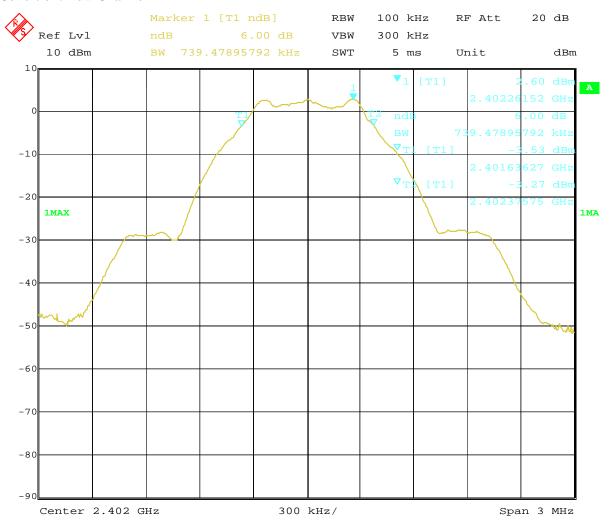


Date: 8.NOV.2019 08:19:45

Report No.: FCC1911024 Page 25 of 49

Date: 2019-11-12



2. Condition: Middle Channel

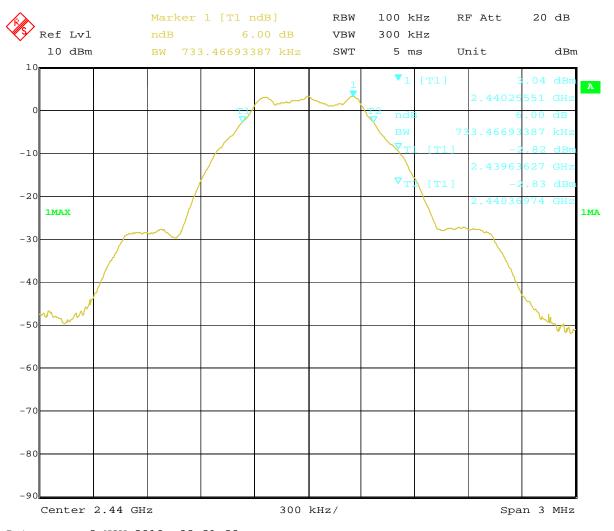

Date: 8.NOV.2019 08:21:29

Report No.: FCC1911024 Page 26 of 49

Date: 2019-11-12



3. High Channel

Date:



Report No.: FCC1911024


Date: 2019-11-12



Page 27 of 49

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: FCC1911024 Page 28 of 49

Date: 2019-11-12



8.4Test Results

| EUT | | Bluetooth motion | n detector | Model | | T900 (C0 | 05) |
|-----------|---------------------|-------------------|------------|---------------------|--------|---------------------|------------|
| Mode | | Keep Transmitting | | Input Voltage | DC3.7V | | I |
| Temperatu | mperature 24 deg. (| | Ξ, | , Humidity | | 56% RF | H |
| Channel | Cl | nannel Frequency | Мах | x. Power Output (dB | m) | Peak Power Limit | Pass/ Fail |
| Chamer | | (MHz) | | Peak | | (dBm) | |
| Low | | 2402 | | 3.53 | | 30 | Pass |
| Middle | | 2440 | | 3.53 | | 30 | Pass |
| High | | 2480 | | 3.52 | | 30 | Pass |

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator


Report No.: FCC1911024 Page 29 of 49

Date: 2019-11-12



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No.: FCC1911024 Page 30 of 49

Date: 2019-11-12



9.4Test Result

| EUT | | Blueto | ooth motion d | letector | Model | T90 | 0 (C05) |
|---------------|-------------|------------------|-----------------------|--------------------|--------------------------|---------------------------|--------------|
| Mode | | Ke | ep Transmitt | ing | Input Voltage | D | C3.7V |
| Temperat | Temperature | | 24 deg. C, | g. C, Hur | | 56 | 5% RH |
| Channel | Re | Power ading (Bm) | Cable Loss (dB) | Final Po Densit | wer Spectral ty (dBm) | Maximum Limit (dBm) | Pass/ Fail |
| т. | | (22 | 0.2 | | (12 | 0 | D |
| Low Middle | | | 0.2 | -6.12 -6.18 | | 8 | Pass Pass |
| High | | 6.57 | 0.2 | | -6.37 | 8 | Pass |

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss


Report No.: FCC1911024 Page 31 of 49

Date: 2019-11-12



Test Figure:

1. Condition: Low Channel

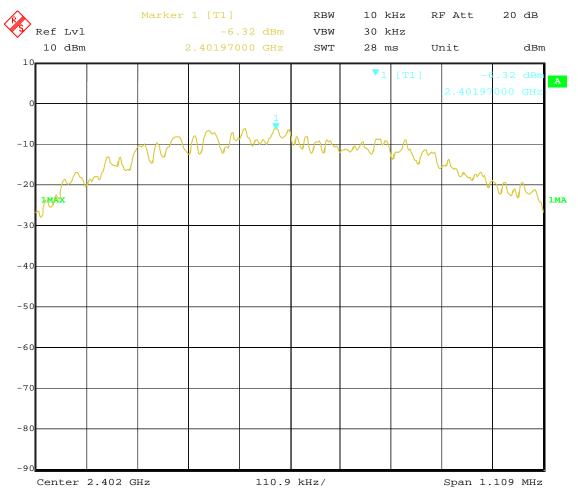


Date: 8.NOV.2019 08:27:33

Report No.: FCC1911024 Page 32 of 49

Date: 2019-11-12



2. Condition: Middle Channel

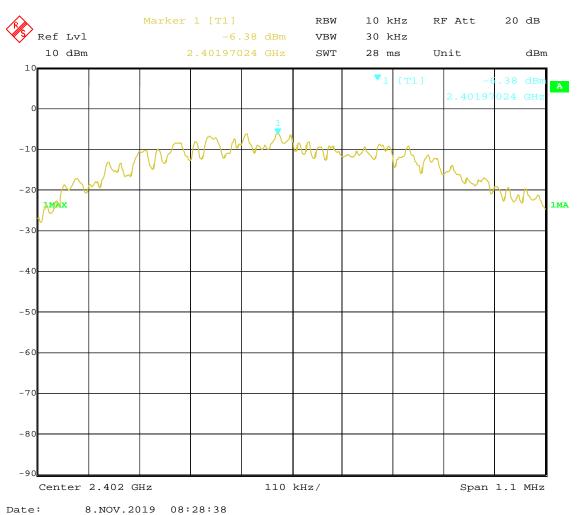


Report No.: FCC1911024 Page 33 of 49

Date: 2019-11-12



3. High Channel

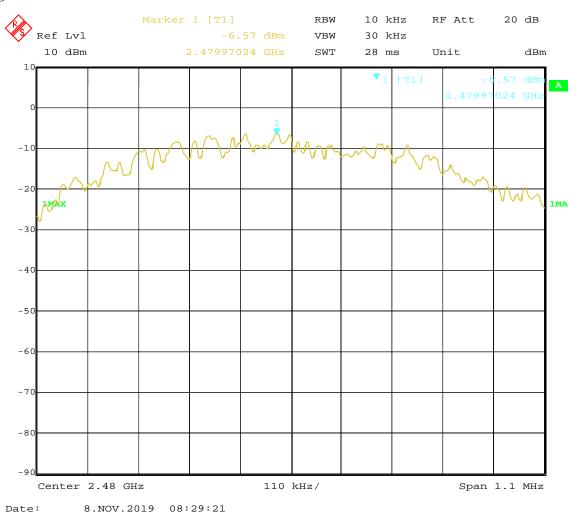


Report No.: FCC1911024 Page 34 of 49

Date: 2019-11-12



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Report No.: FCC1911024 Page 35 of 49


Date: 2019-11-12



10.4 Band-edge Measurement

| EUT | Bluetooth motion detector | Model | T900 (C05) |
|--------------|---------------------------|---------------|--------------|
| Mode | Keep Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

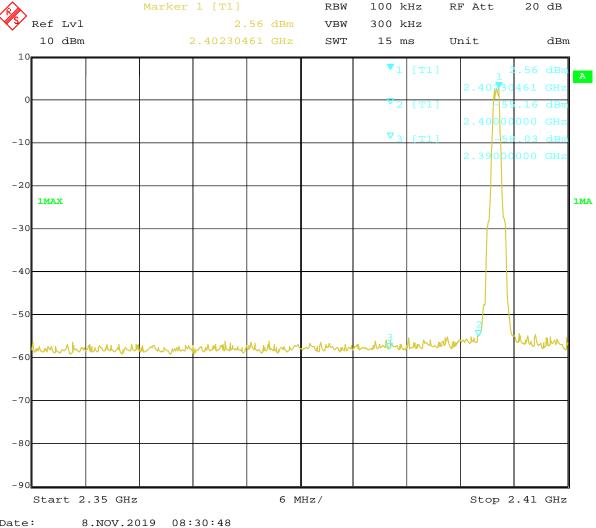

bate: 8.NOV.2019 08:30:48

Note: The Max. FS in Restrict Band are measured in conventional method.

Report No.: FCC1911024 Page 36 of 49


Date: 2019-11-12



10.4 Band-edge Measurement

| EUT | Bluetooth motion detector | Model | T900 (C05) |
|--------------|---------------------------|---------------|--------------|
| Mode | Keeping Transmitting | Input Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

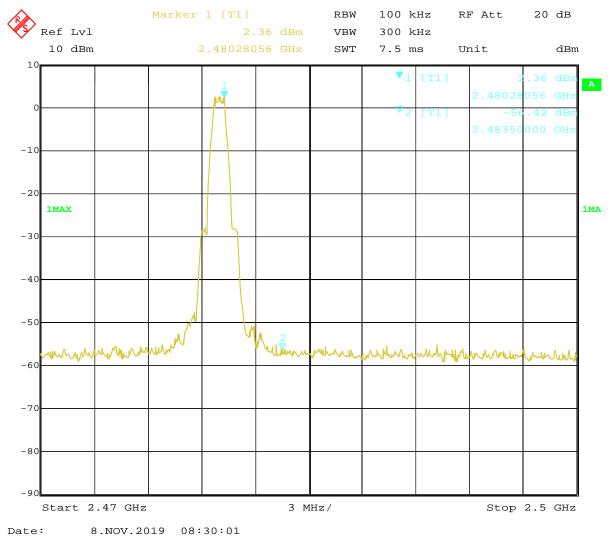

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 37 of 49 Report No.: FCC1911024

Date: 2019-11-12



10.4 Restrict Band Measurement

| | EUT | | Bluetooth motion detector | | | Mod | Model | | T900 (C05) | | | | | |
|------|--|--------------------|---------------------------|---------|----------|---------------|----------|-----------|--------------|-----|---------------|--|--|--|
| Mode | | Keep Transmitting | | | Input Vo | Input Voltage | | DC3.7V | | | | | | |
| Γ | [em | perature | | 24 deg. | C, | Humi | Humidity | | 56% RH | | | | | |
| - | Гest | Result: | | Pass | | | | | | | | | | |
| | | 15B Class B 1GHz-1 | 8GHz - 2 | | | | | | | | | | | |
| 1.0 | DE+2- | | | | | | | | | | | | | |
| | 90- | | | | | | | | | | | | | |
| | 80- | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | 70- | | | | | | | | | + | | | | |
| | 60- | | | | | | | | , | | | | | |
| | | | | | | | | | | | $\overline{}$ | | | |
| | 50- | | | | | | | M1 | | | | | | |
| | 40- | | | | | | | | | | | | | |
| | any formation to be present the string which are all formations the formation to be the string which are all the string t | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | 20- 235 | 20- | | | | | | | | | | | | |
| | | | | | | Frequency (N | 1Hz) | | | | | | | |
| No |). <u> </u> | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict | | | |
| | | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | | | | |
| 1 | | 2390 | 41.88 | -3.53 | 54.0 | -12.12 | Peak | 227.00 | 100 | Н | Pass | | | |

Report No.: FCC1911024 Page 38 of 49

Date: 2019-11-12



10.4 Restrict Band Measurement

| | EUT Mode | | Γ Bluetooth motion detector | | r | Model Input Voltage | | T900 (C05) | | | | | | |
|----------------|-------------|--|-----------------------------|------------|----------|---------------------|----------|--------------|------------|--|---------|--|--|--|
| | | | Keep Transmitting | | | | | Inj | DC3.7V | | | | | |
| , | Tem | nperature | | 24 deg. C, | | I | Humidity | | | 56% RH | | | | |
| | Tes | t Result: | | Pas | SS | | | | | | | | | |
| | | t 15B Class B 1GHz-1 | 8GHz - 2 | | | • | | • | | | | | | |
| 1 | .0E+2- | | | | | | | | | | | | | |
| | 90- | | | | | | | | | | | | | |
| | 80- | | | | | | | | | \cap | | | | |
| | 00- | | | | | | | | | | | | | |
| | 70- | | | | | | | | | + | | | | |
| • | 60- | | | | | | | | | | | | | |
| level (dBuV/m) | | | | | | | | | , | / | | | | |
| level (c | 50- | | | | | | | M1 | The second | , | | | | |
| | 40- | | | | | | | | | | | | | |
| | | may be decided and the contract of the contrac | | | | | | | | | | | | |
| | 30- | | | | | | | | | | | | | |
| | 20 - 23 | 2350 241 | | | | | | | | | | | | |
| | | 2350 Frequency (MHz) | | | | | | | | | | | | |
| N | 0. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict | | | |
| | | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | | | | |
| 1 | | 2390.145 | 43.87 | -3.53 | 54.0 | -10.13 | Peak | 153.00 | 100 | V | Pass | | | |

Report No.: FCC1911024 Page 39 of 49

Date: 2019-11-12



10.4 Restrict Band Measurement

| | EUT | Bluetooth motion detector | | | M | Model | | T900 (C05) | | | | |
|----------------|-------------------------|--|----------------------------|----------------------------------|------------------------|---|-----------|--------------|-----|---------|--|--|
| | Mode | Kee | Keep Transmitting | | | Input Voltage | DC3.7V | | | | | |
| Te | mperature | | 24 deg. | C, | Hur | nidity | 56% RH | | | | | |
| Te | est Result: | | Pass | | | | | | | | | |
| CC_FCC | Part 15B Class B 1GHz-1 | .8GHz - 2 | | | | | | | | | | |
| ġ | 00- | | | | | | | | | | | |
| 7 | 70- | | | | | | | | | | | |
| (E) | 50- | | | | | | | | | | | |
| level (dBuV/m) | 50- | | | | | | | | | | | |
| 4 | 10 - | The William Control of the Control o | Handaday da ay salad has d | ing Managala Africa Haras Agrana | ahdahampandah | han maka ka jir ji wan ka ji ji ji ji ji ji ji ji | M | | | | | |
| ; | 30- | | | | | | | | | | | |
| 2 | 20- 2470 | | | | 2483.5 Frequency (N | ЛНz) | | | | 2500 | | |
| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict | | |
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | | | |
| 1 | 2483.5 | 50.25 | -3.57 | 54.0 | -3.75 | Peak | 241.00 | 100 | Н | Pass | | |

Page 40 of 49

Report No.: FCC1911024

Date: 2019-11-12



10.4 Restrict Band Measurement

| | EUT | | Bluetooth motion detector Keep Transmitting | | Mode | el | T900 (C05) | | | | | | |
|----------------|------------|------------------------------|--|------------|---------------|--|--|-----------|--------|-----|---------|--|--|
| N | | Mode | | | Input Voltage | | DC3.7V | | | | | | |
| - | Гет | perature | | 24 deg. C, | | | ity | 56% RH | | | | | |
| | Test | t Result: | | Pass | | | | | | | | | |
| | CC Part | t 15B Class B 1GHz-1 | 8GHz - 2 | | | | | | | | | | |
| 1. | | | | | | | | | | | | | |
| | 90- | | | | | | | | | | | | |
| | 80- | | | / | | | | | | | | | |
| | 70- | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| nV/m) | 60- | | | | | | | | | | | | |
| level (dBuV/m) | 50- | | | | | \rightarrow | | | | | | | |
| _ | 40- | | | | | And the second | | | | | | | |
| | | jaran Maranasan da kalandari | and the district of the same | | | The same of the sa | many of the contract of the second of the se | | | | | | |
| | 30- | | | | | | | | | | | | |
| | 20 - 24 | 70 | | | | 2483.5 | | | | | 2500 | | |
| | | | | | | Frequency (I | MHz) | | | | | | |
| No | Э. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict | | |
| | | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | | | |
| | | 2483.5 | 50.34 | -3.57 | 54.0 | -3.66 | Peak | 356.00 | 100 | V | Pass | | |

Note: The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Date: 2019-11-12



Page 41 of 49

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Ceramic antenna used. The maximum gain of the antennas is 2.0dBi.

Report No.: FCC1911024 Page 42 of 49

Date: 2019-11-12




12.0 FCC ID Label

FCC ID: 2AUY5-T900

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

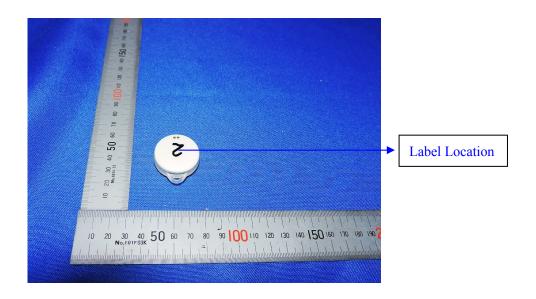


Report No.: FCC1911024 Page 43 of 49

Date: 2019-11-12



13.0 Photo of testing

Conducted Emission Test Setup:

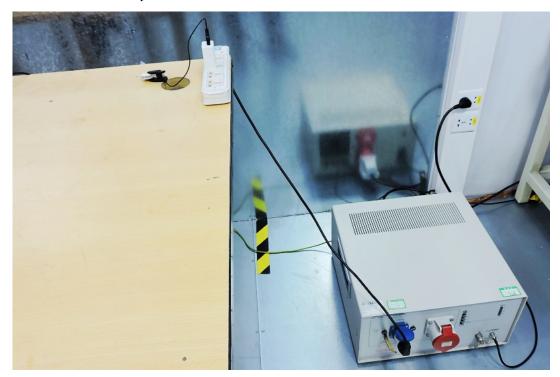

Page 44 of 49

Report No.: FCC1911024

Date: 2019-11-12



Radiated Emission Test Setup:





Date: 2019-11-12



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-11-12



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2019-11-12



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2019-11-12



Photographs - EUT



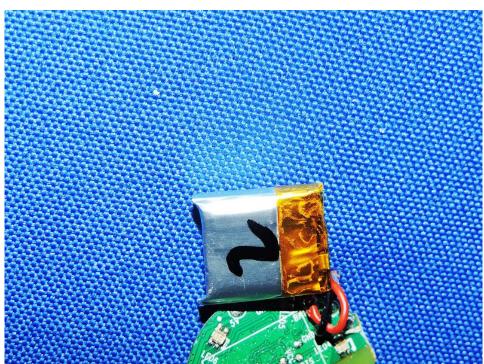


The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2019-11-12



Photographs - EUT

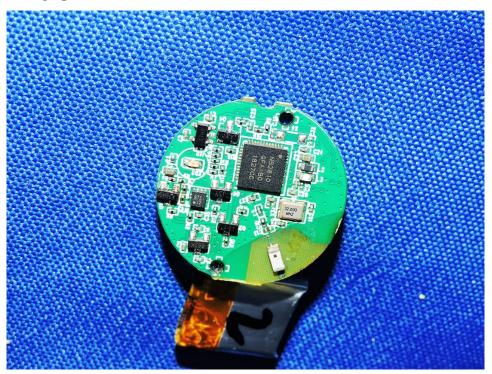

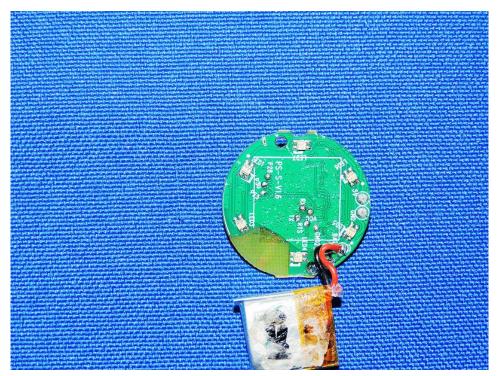

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any