



TESTING LABORATORY
CERTIFICATE # 4821.01



FCC PART 15.247

TEST REPORT

For

Winner Wave Limited

Unit 1615 Peninsula Tower, 538 Castle Peak Road, Lai Chi Kok Kowloon, Hong Kong

FCC ID: 2ADFS-B10-R01-LR01

| | |
|--|---|
| Report Type: Original Report | Product Type: EZCast Pro/QuattroPod |
| Report Number: | <u>RSZ201210001-00A</u> |
| Report Date: | <u>2021-03-12</u> |
| Reviewed By: | <u>Jimmy Xiao</u> <u>RF Engineer</u> |
| Prepared By: | Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn |

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

| | |
|---|------------|
| GENERAL INFORMATION..... | .3 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | .3 |
| OBJECTIVE | .3 |
| TEST METHODOLOGY | .3 |
| MEASUREMENT UNCERTAINTY..... | .4 |
| TEST FACILITY | .4 |
| SYSTEM TEST CONFIGURATION..... | .5 |
| DESCRIPTION OF TEST CONFIGURATION | .5 |
| EUT EXERCISE SOFTWARE | .5 |
| SPECIAL ACCESSORIES..... | .5 |
| EQUIPMENT MODIFICATIONS | .5 |
| SUPPORT EQUIPMENT LIST AND DETAILS | .5 |
| EXTERNAL I/O CABLE..... | .5 |
| BLOCK DIAGRAM OF TEST SETUP | .6 |
| SUMMARY OF TEST RESULTS..... | .7 |
| TEST EQUIPMENT LIST | .8 |
| FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)..... | .9 |
| APPLICABLE STANDARD | .9 |
| RESULT | .9 |
| FCC §15.203 – ANTENNA REQUIREMENT..... | .11 |
| APPLICABLE STANDARD | .11 |
| ANTENNA CONNECTOR CONSTRUCTION | .11 |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS | .12 |
| APPLICABLE STANDARD | .12 |
| EUT SETUP | .12 |
| EMI TEST RECEIVER SETUP..... | .12 |
| TEST PROCEDURE | .12 |
| CORRECTED FACTOR & MARGIN CALCULATION | .13 |
| TEST DATA | .13 |
| FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS..... | .16 |
| APPLICABLE STANDARD | .16 |
| EUT SETUP | .16 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | .17 |
| TEST PROCEDURE | .17 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | .17 |
| TEST DATA | .17 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|-----------------------------|---|
| Product | EZCast Pro/QuattroPod |
| Tested Model | R01 |
| Multiple Model | LR01, B10 |
| Model Differences | Refer to the DoS letter |
| Frequency Range | Bluetooth: 2402~2480MHz |
| Peak Conducted Output Power | Bluetooth:6.07dBm |
| Modulation Technique | Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Antenna Specification | 3.05dBi |
| Voltage Range | DC 5.0V from adapter |
| Date of Test | 2020-12-19 to 2021-02-07 |
| Sample serial number | RSZ201210001-RF-S1 (Assigned by BACL, Shenzhen) |
| Received date | 2020-12-10 |
| Sample/EUT Status | Good condition |
| Adapter information | Model: ICP12-050-2000B Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2.0A, 10.0W |

Note: According to the test data in the part 15B report, the worst case is model R01, so model R01 was chosen for the test.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

| Parameter | Uncertainty | |
|------------------------------------|--------------------------|--------------------|
| Occupied Channel Bandwidth | ±5% | |
| RF Output Power with Power meter | ±0.73dB | |
| RF conducted test with spectrum | ±1.6dB | |
| AC Power Lines Conducted Emissions | ±1.95dB | |
| Emissions, Radiated | Below 1GHz Above 1GHz | ±4.75dB ±4.88dB |
| Temperature | ±1°C | |
| Humidity | ±6% | |
| Supply voltages | ±0.4% | |

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“Bluetooth MP Tool” * exercise software was made to the EUT tested and the power level is 28*. The software and power level is provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

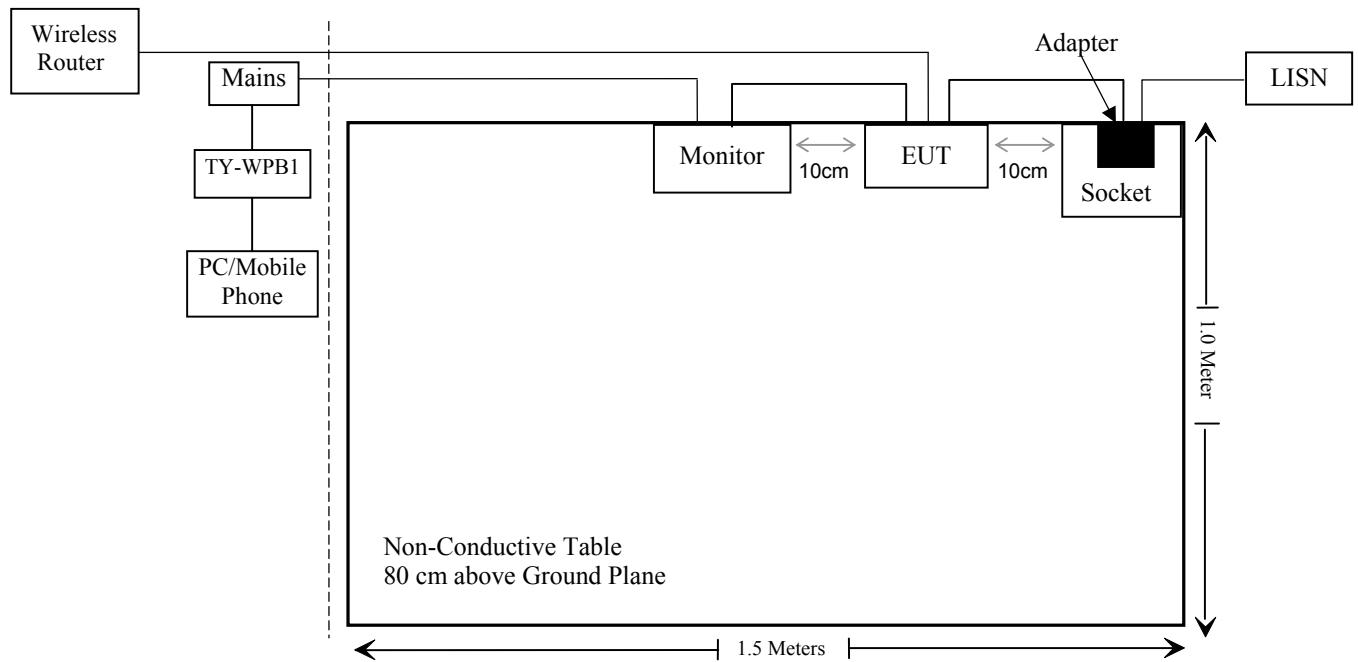
No modification was made to the EUT tested.

Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|-----------------------|-----------------|---------------------------|-----------------|
| BULL | Socket | GN-212 | A37209315081183 |
| SAMSUNG | Monitor | S24E390HL | ZZFRH4ZMB01718J |
| DELL | PC | Latitude E5430 | JG3NLV1 |
| Apple | Mobile Phone | ML6N2CH/A | ML6N2CH/A |
| Panasonic Corporation | EZCast Pro | TY-WPB1 | TY-WPB1 |
| SAGEM | Wireless Router | SAGEM F@ST™ 2604 White | 2604 |

External I/O Cable

| Cable Description | Length (m) | From Port | To |
|-----------------------------------|------------|-----------|--------|
| Unshielded Un-detachable AC Cable | 1.0 | Socket | LISN |
| Unshielded Detachable DC Cable | 1.0 | Adapter | EUT |
| Unshielded Detachable AC Cable | 1.0 | Monitor | Mains |
| Unshielded Detachable HDMI Cable | 1.0 | Monitor | EUT |
| Unshielded Detachable RJ45 Cable | 10.0 | EUT | Router |

Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|-------------------------------|-----------------------------------|-------------|
| §15.247 (i), §2.1091 | Maximum Permissible Exposure(MPE) | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207(a) | AC Line Conducted Emissions | Compliance |
| §15.205, §15.209 & §15.247(d) | Radiated Emissions | Compliance |
| §15.247(a)(1) | 20 dB Emission Bandwidth | Compliance* |
| §15.247(a)(1) | Channel Separation Test | Compliance* |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliance* |
| §15.247(a)(1)(iii) | Quantity of hopping channel Test | Compliance* |
| §15.247(b)(1) | Peak Output Power Measurement | Compliance* |
| §15.247(d) | Band edges | Compliance* |

Compliance*: The EUT has the same Bluetooth and Wi-Fi modular with the device (FCC ID: 2ADFSTYWPR1).

Please refer to the declaration letter for the details. So the conducted test was refer to the report RSZ200717003-00A which was tested by Bay Area Compliance Laboratories Corp. (Shenzhen) on 2020-09-11.

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------------|-------------------------|------------------------|------------------|----------------------|
| Conducted Emissions Test | | | | | |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101120 | 2020/7/9 | 2021/7/8 |
| Rohde & Schwarz | LISN | ENV216 | 101613 | 2020/1/22 | 2021/1/21 |
| Rohde & Schwarz | Transient Limitor | ESH3Z2 | DE25985 | 2020/11/29 | 2021/11/28 |
| Unknown | CE Cable | CE Cable | UF A210B-1-0720-504504 | 2020/11/29 | 2021/11/28 |
| Rohde & Schwarz | CE Test software | EMC 32 | V8.53.0 | NCR | NCR |
| Radiated Emission Test | | | | | |
| R&S | EMI Test Receiver | ESR3 | 102455 | 2020/08/04 | 2021/08/03 |
| Sonoma instrument | Pre-amplifier | 310 N | 186238 | 2020/08/04 | 2021/08/03 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-2 | 2020/12/22 | 2023/12/21 |
| Unknown | Cable 2 | RF Cable 2 | F-03-EM197 | 2020/11/29 | 2021/11/28 |
| Unknown | Cable | Chamber Cable 1 | F-03-EM236 | 2020/11/29 | 2021/11/28 |
| Rohde & Schwarz | Auto test software | EMC 32 | V9.10 | NCR | NCR |
| Rohde & Schwarz | Spectrum Analyzer | FSV40-N | 102259 | 2020/7/22 | 2021/7/21 |
| COM-POWER | Pre-amplifier | PA-122 | 181919 | 2020/11/29 | 2021/11/28 |
| Quinstar | Amplifier | QLW-18405536-J0 | 15964001002 | 2020/11/29 | 2021/11/28 |
| Sunol Sciences | Horn Antenna | DRH-118 | A052604 | 2017/12/22 | 2020/12/21 |
| Insulated Wire Inc. | RF Cable | SPS-2503-3150 | 02222010 | 2020/11/29 | 2021/11/28 |
| Unknown | RF Cable | W1101-EQ1 OUT | F-19-EM005 | 2020/11/29 | 2021/11/28 |
| SNSD | Band Reject filter | BSF2402-2480MN-0898-001 | 2.4G filter | 2020/04/20 | 2021/04/20 |
| Ducommun Technologies | Horn antenna | ARH-4223-02 | 1007726-02 1304 | 2020/12/06 | 2023/12/05 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure | | | | |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (Minutes) |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

| Frequency (MHz) | Antenna Gain | | Maximum Tune Up Conducted Power | | Evaluation Distance (cm) | Power Density (mW/cm ²) | MPE Limit (mW/cm ²) |
|--------------------|--------------|-----------|------------------------------------|-------|--------------------------------|---|------------------------------------|
| | (dBi) | (numeric) | (dBm) | (mW) | | | |
| 2402-2480 | 3.05 | 2.02 | 6.5 | 4.47 | 20 | 0.002 | 1 |
| 5150-5250 | 4.42 | 2.77 | 12.0 | 15.85 | 20 | 0.009 | 1 |
| 5725-5850 | 4.42 | 2.77 | 12.5 | 17.78 | 20 | 0.010 | 1 |

Note:

- 1) To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.
- 2) Bluetooth and 5GHz Wi-Fi can transmit simultaneously for this device.
- 3) Simultaneous transmitting consideration:

The ratio=MPE_{DSS}/limit+MPE_{NII}/limit=0.002+0.010=0.012<1.0, so simultaneous exposure is not required.

Result: Pass

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an internal PCB antenna arrangement for Bluetooth which was permanently attached and the antenna gain is 3.05dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Pass

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup



Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

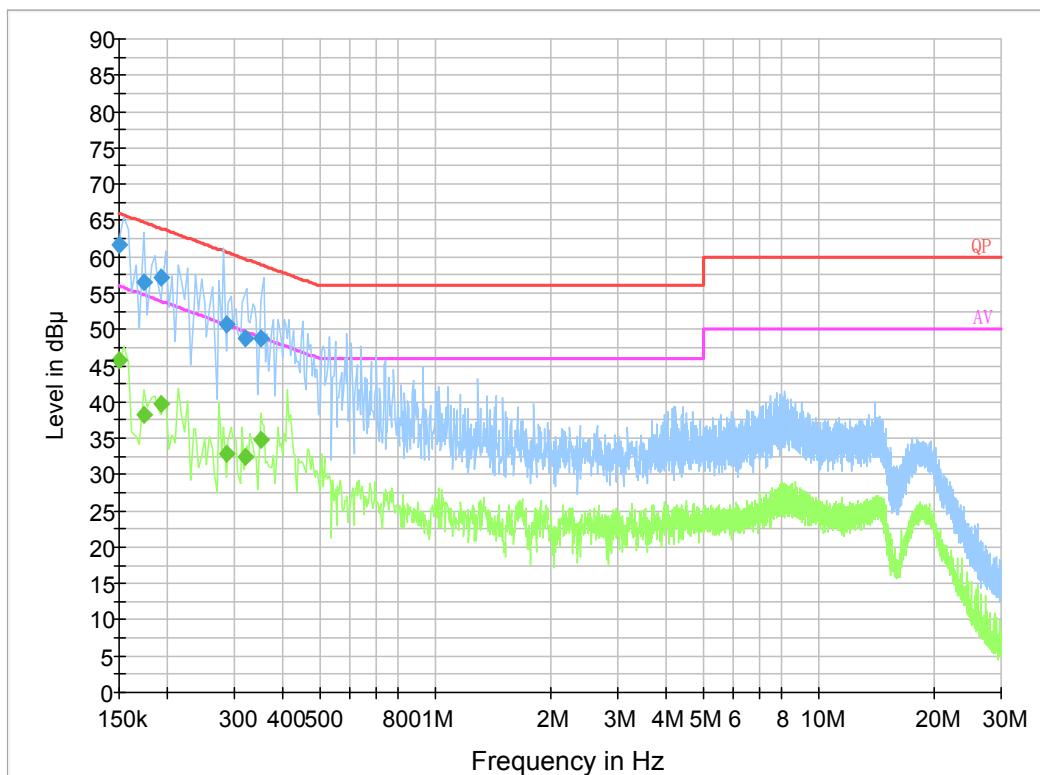
Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 65 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Haiguo Li on 2020-12-30.

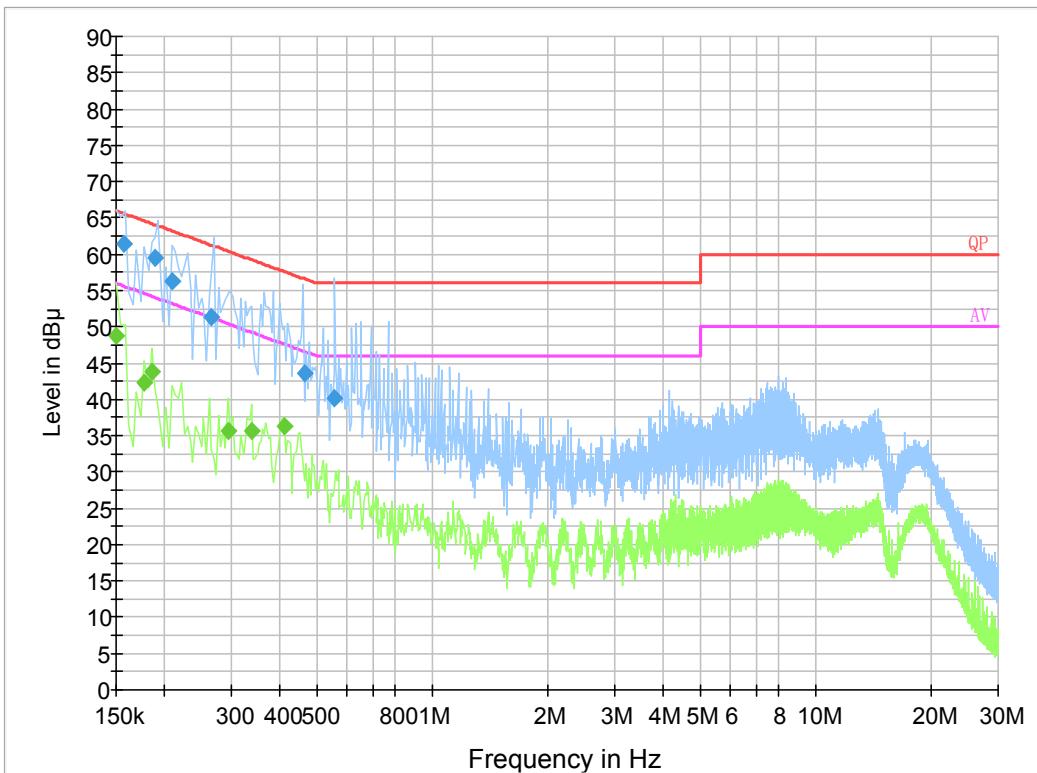
EUT operation mode: Transmitting

AC 120V/60 Hz, Line**Final Result 1**

| Frequency (MHz) | QuasiPeak (dB μ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|------------------------|-----------------|------|------------|-------------|--------------------|
| 0.150000 | 61.7 | 0.200 | L1 | 19.8 | 4.3 | 66.0 |
| 0.173500 | 56.4 | 9.000 | L1 | 19.9 | 8.4 | 64.8 |
| 0.193500 | 57.1 | 9.000 | L1 | 19.8 | 6.8 | 63.9 |
| 0.285500 | 50.7 | 9.000 | L1 | 19.7 | 10.0 | 60.7 |
| 0.321170 | 48.7 | 9.000 | L1 | 19.8 | 11.0 | 59.7 |
| 0.352630 | 48.7 | 9.000 | L1 | 19.9 | 10.2 | 58.9 |

Final Result 2

| Frequency (MHz) | Average (dB μ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|----------------------|-----------------|------|------------|-------------|--------------------|
| 0.150000 | 45.8 | 9.000 | L1 | 19.8 | 10.2 | 56.0 |
| 0.173500 | 38.3 | 9.000 | L1 | 19.9 | 16.5 | 54.8 |
| 0.193500 | 39.7 | 9.000 | L1 | 19.8 | 14.2 | 53.9 |
| 0.285500 | 32.9 | 9.000 | L1 | 19.7 | 17.8 | 50.7 |
| 0.321170 | 32.5 | 9.000 | L1 | 19.8 | 17.2 | 49.7 |
| 0.352630 | 34.8 | 9.000 | L1 | 19.9 | 14.1 | 48.9 |

AC 120V/60 Hz, Neutral**Final Result 1**

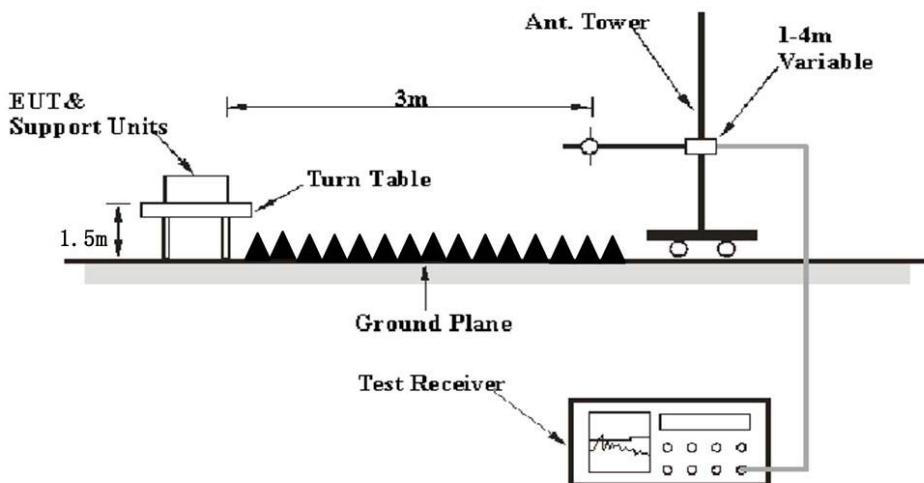
| Frequency (MHz) | QuasiPeak (dB μ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|------------------------|-----------------|------|------------|-------------|--------------------|
| 0.157500 | 61.4 | 9.000 | N | 19.8 | 4.2 | 65.6 |
| 0.189500 | 59.4 | 9.000 | N | 19.8 | 4.7 | 64.1 |
| 0.209500 | 56.2 | 9.000 | N | 19.8 | 7.0 | 63.2 |
| 0.265500 | 51.3 | 9.000 | N | 19.7 | 10.0 | 61.3 |
| 0.467070 | 43.6 | 9.000 | N | 19.8 | 13.0 | 56.6 |
| 0.557630 | 40.3 | 9.000 | N | 19.8 | 15.7 | 56.0 |

Final Result 2

| Frequency (MHz) | Average (dB μ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|----------------------|-----------------|------|------------|-------------|--------------------|
| 0.150000 | 48.7 | 9.000 | N | 19.8 | 7.3 | 56.0 |
| 0.178000 | 42.4 | 9.000 | N | 19.8 | 12.2 | 54.6 |
| 0.186000 | 43.8 | 9.000 | N | 19.8 | 10.4 | 54.2 |
| 0.294000 | 35.6 | 9.000 | N | 19.7 | 14.8 | 50.4 |
| 0.338000 | 35.6 | 9.000 | N | 19.8 | 13.7 | 49.3 |
| 0.414000 | 36.3 | 9.000 | N | 19.8 | 11.3 | 47.6 |

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | 120 kHz | QP |
| Above 1 GHz | 1 MHz | 3 MHz | / | PK |
| | 1 MHz | 10 Hz | / | Average |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

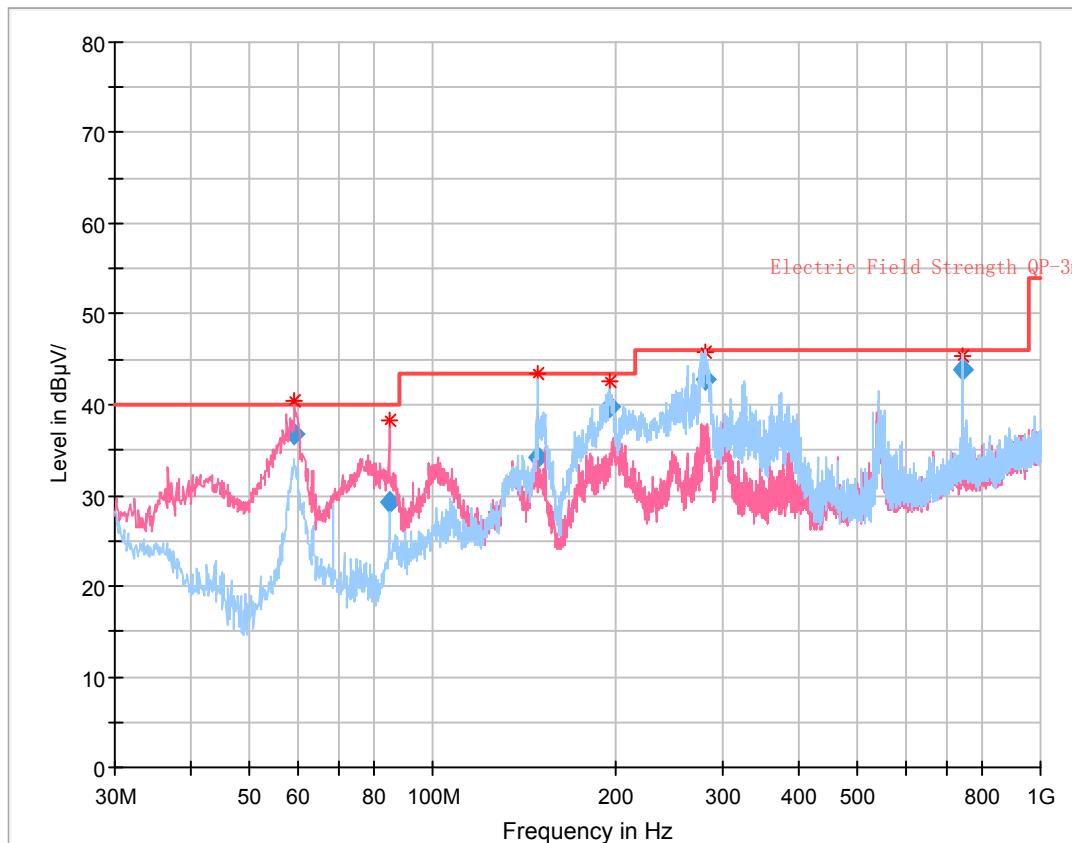
| | |
|--------------------|-----------------|
| Temperature: | 21~32.2°C |
| Relative Humidity: | 52~55% |
| ATM Pressure: | 100.7~101.0 kPa |

The testing was performed by Kirlroy Deng on 2021-02-07 for below 1GHz and by Leven Gan on 2020-12-19 for above 1GHz.

EUT operation mode: Transmitting

30 MHz~1 GHz:

(The worst case is 5.2G Wi-Fi 802.11n-HT20 Mode, Middle Channel +Bluetooth 8DPSK, high channel)

**Final Result**

| Frequency (MHz) | QuasiPeak (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------------|----------------------|-------------|-------------|-----|---------------|------------|
| 59.362500 | 36.88 | 40.00 | 3.12 | 117.0 | V | 307.0 | -10.5 |
| 84.845750 | 29.34 | 40.00 | 10.66 | 106.0 | V | 0.0 | -10.6 |
| 148.505750 | 34.28 | 43.50 | 9.22 | 222.0 | H | 334.0 | -5.3 |
| 195.372000 | 39.75 | 43.50 | 3.75 | 198.0 | H | 255.0 | -5.6 |
| 280.747875 | 42.89 | 46.00 | 3.11 | 126.0 | H | 0.0 | -4.6 |
| 742.479625 | 43.78 | 46.00 | 2.22 | 113.0 | H | 61.0 | 5.3 |

1 GHz - 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is in 8DPSK Mode)

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB/m) | Corrected Amplitude (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|---------------------------|-------------------------|------------|---------------------|---------------|----------------|-------------------------------|--|-------------------------|----------------|
| | Reading (dB μ V) | PK/QP/Ave. | | Height (m) | Polar (H/V) | | | | |
| Low Channel (2402 MHz) | | | | | | | | | |
| 2352.42 | 28.84 | PK | 302 | 1.3 | H | 31.77 | 60.61 | 74 | 13.39 |
| 2352.42 | 13.82 | Ave. | 302 | 1.3 | H | 31.77 | 45.59 | 54 | 8.41 |
| 2493.38 | 28.86 | PK | 238 | 2.2 | H | 32.13 | 60.99 | 74 | 13.01 |
| 2493.38 | 13.85 | Ave. | 238 | 2.2 | H | 32.13 | 45.98 | 54 | 8.02 |
| 4804.00 | 46.96 | PK | 299 | 2.1 | H | 6.28 | 53.24 | 74 | 20.76 |
| 4804.00 | 37.24 | Ave. | 299 | 2.1 | H | 6.28 | 43.52 | 54 | 10.48 |
| Middle Channel (2441 MHz) | | | | | | | | | |
| 4882.00 | 48.48 | PK | 153 | 1.8 | H | 6.76 | 55.24 | 74 | 18.76 |
| 4882.00 | 38.68 | Ave. | 153 | 1.8 | H | 6.76 | 45.44 | 54 | 8.56 |
| High Channel (2480 MHz) | | | | | | | | | |
| 2357.46 | 28.87 | PK | 302 | 2.1 | H | 31.77 | 60.64 | 74 | 13.36 |
| 2357.46 | 13.84 | Ave. | 302 | 2.1 | H | 31.77 | 45.61 | 54 | 8.39 |
| 2495.32 | 28.93 | PK | 89 | 1.6 | H | 32.13 | 61.06 | 74 | 12.94 |
| 2495.32 | 13.89 | Ave. | 89 | 1.6 | H | 32.13 | 46.02 | 54 | 7.98 |
| 4960.00 | 49.58 | PK | 113 | 1.9 | H | 6.80 | 56.38 | 74 | 17.62 |
| 4960.00 | 40.90 | Ave. | 113 | 1.9 | H | 6.80 | 47.70 | 54 | 6.30 |

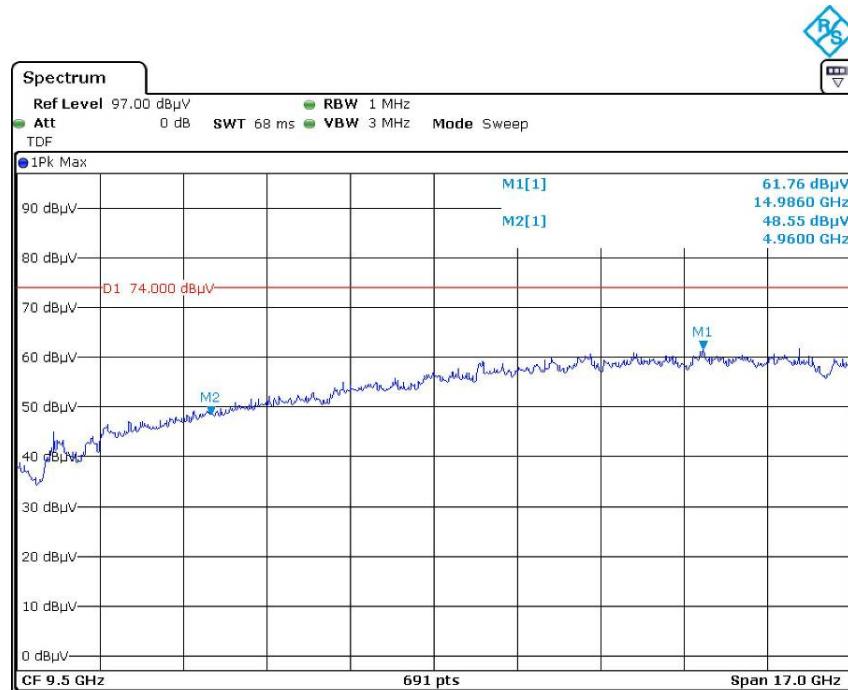
Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

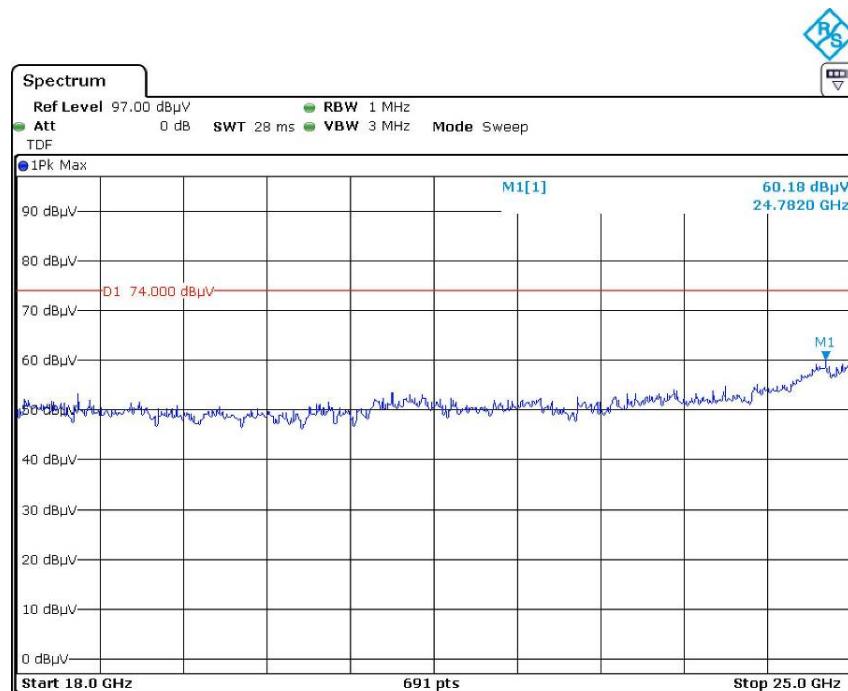
Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

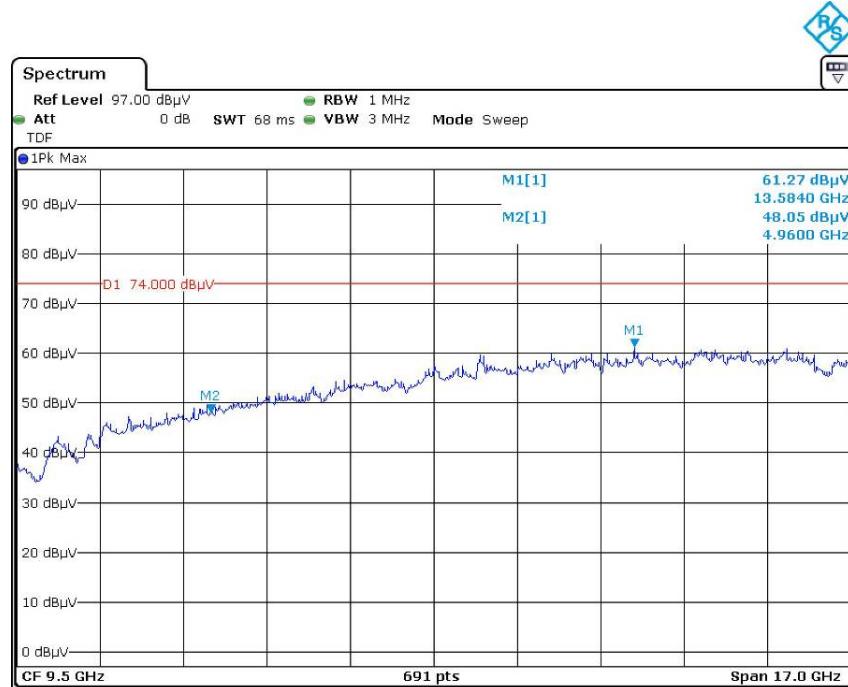
The other spurious emission which is 20dB to the limit was not recorded.

**Pre-scan with High channel Peak
Horizontal**

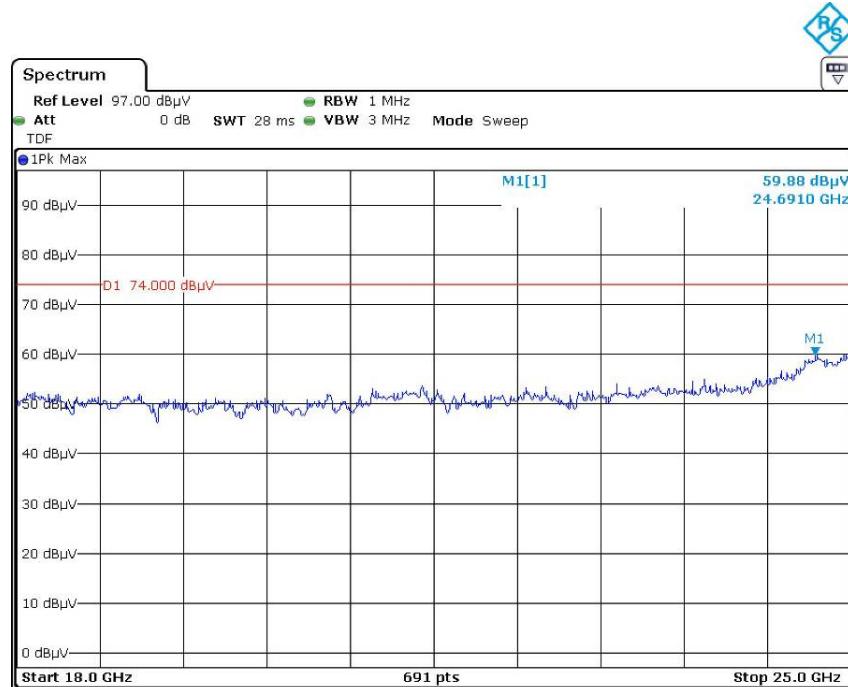
Date: 19.DEC.2020 05:00:51



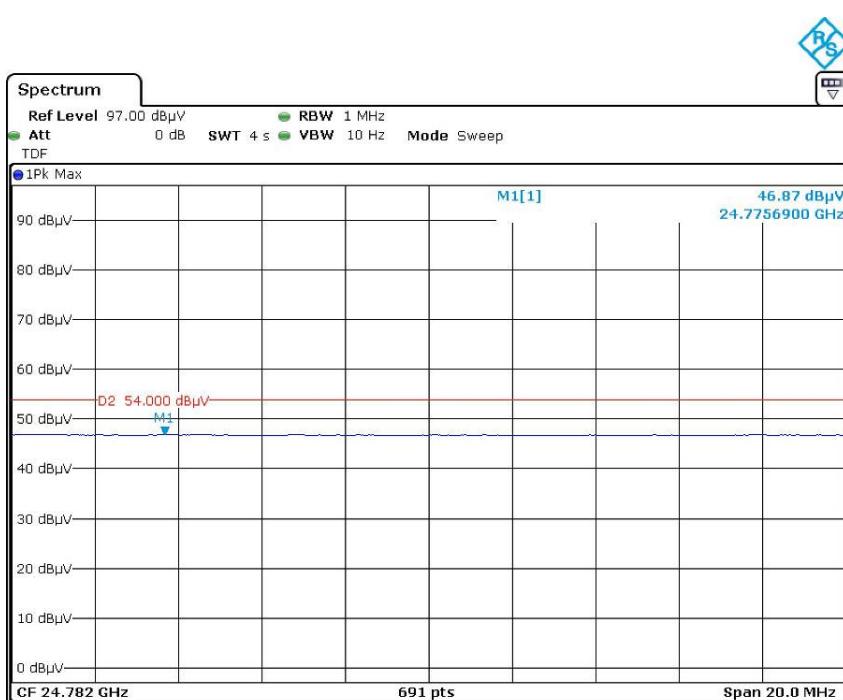
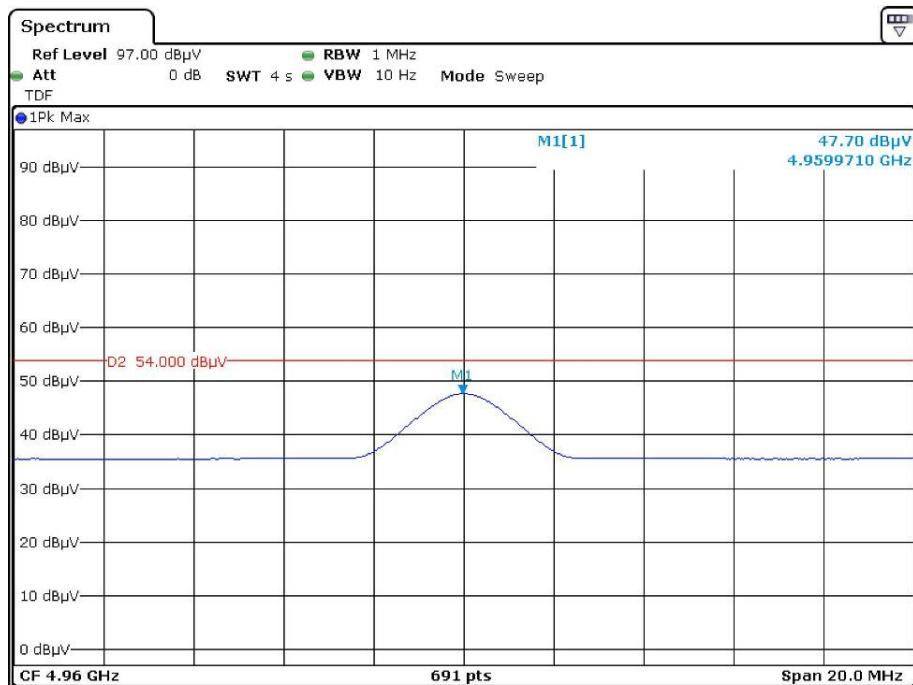
Date: 19.DEC.2020 05:45:19

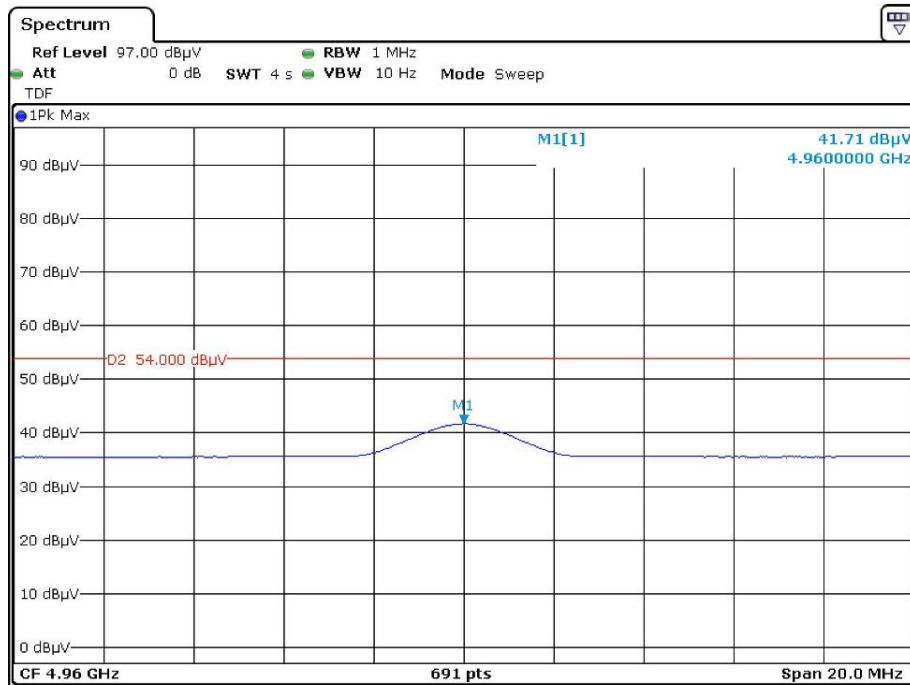
Vertical

Date: 19.DEC.2020 05:08:22

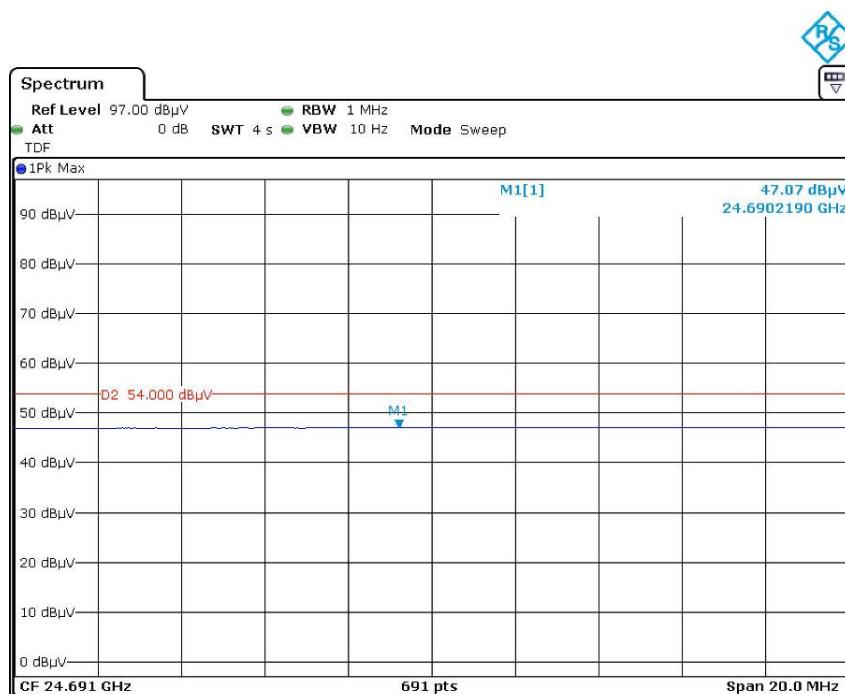


Date: 19.DEC.2020 05:53:46

**Average
Horizontal**

Vertical

Date: 19.DEC.2020 05:11:29



Date: 19.DEC.2020 05:57:31

******* END OF REPORT *******