

HunterDouglas

Installation • Operation • Care



Duette® and Applause® Honeycomb Shades

PowerView® Gen 3
Automation



CONTENTS

GETTING STARTED 1

Product View..... 1

Tools and Fasteners Needed 2

INSTALLATION3

Installation Overview..... 3

STEP 1: Mount the Installation Brackets..... 3

Mount the Installation Brackets — Inside Mount..... 4

Mount the Installation Brackets — Outside Mount..... 7

Mount the Installation Brackets — End Mount..... 9

STEP 2: Mount the Battery Wand (If Applicable) 10

STEP 3: Install the Shade..... 12

STEP 4: Connect the Power Source..... 13

Testing the Shade 19

Attach Magnetic Hold-Down Brackets (Optional)..... 20

OPERATION22

Operating the PowerView® App and Gen 3 Remote..... 22

Resetting the Shade 26

Level the Rail(s) 27

TROUBLESHOOTING28

CARE..... 34

Removing the Shade..... 34

Cleaning Procedures 34


DECLARATIONS.....36

CHILD SAFETY37

WARRANTY38

Questions?
Call Hunter Douglas Consumer Support at **(800) 789-0331**.

Product View

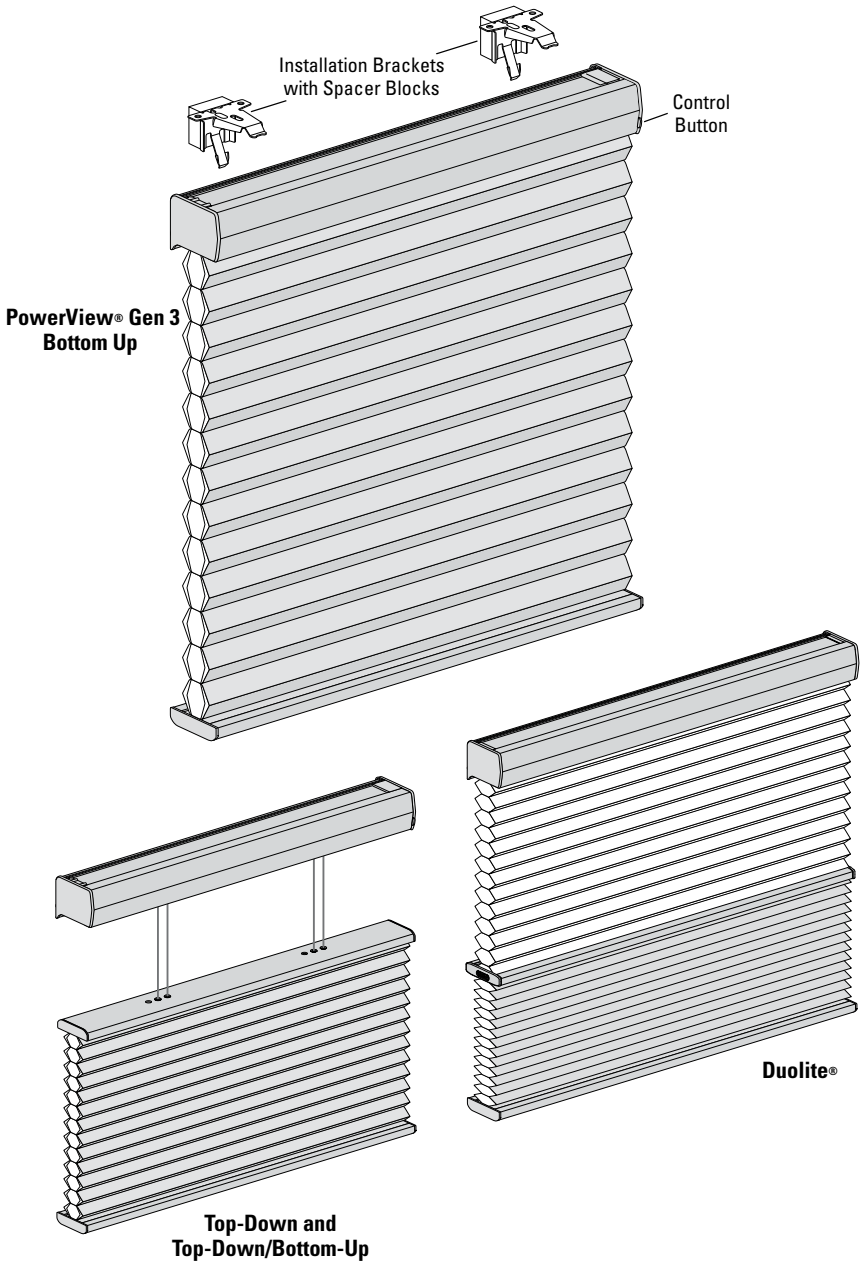

GETTING STARTED

Thank you for purchasing Hunter Douglas Duette® and Applause® Honeycomb Shades with PowerView® Gen 3 Automation. With proper installation, operation, and care, your new shades will provide years of beauty and performance.

Please thoroughly review this instruction booklet and the enclosed packing list before beginning the installation.

Tools and Fasteners Needed

- ¼" Hex, Flat blade, and Phillips screwdrivers
- Level (laser level is recommended)
- Measuring tape and pencil
- Power drill, ⅜" drill bit, and ¼" hex driver

In addition, you will need fasteners designed to work with your specific mounting surface(s).

- **#6 Hex Head Screws (Provided).** Two 1½" screws are provided per installation bracket.
- **Longer #6 Hex Head Screws (Not Provided).** If using spacer blocks, use #6 screws long enough for a secure attachment.
- **#6 Flat Head Screws (Provided).** If end mounting the shade, use two 1½" screws per installation bracket.
- **Speed Nuts and Screws (Provided).** Extension brackets come with speed nuts and screws.
- **Drywall Anchor (Not Provided).** Use drywall anchors when mounting into drywall.



**#6 x 1½"
Hex Head Screw**
(Provided)



**Longer #6 Hex Head Screw
for Use
with Spacer Blocks**
(Not Provided)



**#6 Flat Head Screw
for Use
with End Mounts**
(Provided)



Speed Nut and Screw
(Two Provided
with Each
Extension Bracket)

Installation Overview


To install your shade, you will need to perform the following four steps:

- STEP 1:** Mount the Installation Brackets
- STEP 2:** Mount the Battery Wand, If Applicable
- STEP 3:** Install the Shade
- STEP 4:** Connect the Power Source

STEP 1: Mount the Installation Brackets


- Your order will include the correct number of installation brackets for your shade width, as shown in the table.
- There are two sizes of installation brackets, one for 3⁄8" and 3⁄4" pleat sizes and a larger one for the 1 1⁄4" pleat size.
- For end mounts, two brackets are used up to the maximum width of 72".

Shade Width	Brackets Required
12" – 36"	2
36 7⁄8" – 72"	3
72 1⁄2" – 108"	4
108 5⁄8" – 144"	5
144 3⁄8" – 174"	6

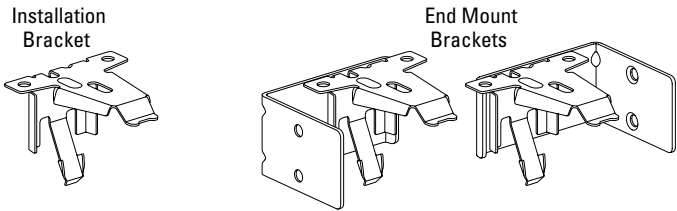

IMPORTANT: A 1⁄2" spacer block is required for shades using an attached battery wand; two 1⁄2" spacer blocks are required for shades using a headrail-mounted rechargeable battery wand. The spacer blocks are pre-attached to the back of the installation bracket.


- Should the spacer block become detached, reattach it.
- Insert the legs of the installation bracket into the tabs on the spacer block.
- Rotate the installation bracket back, as shown, to snap it in place.

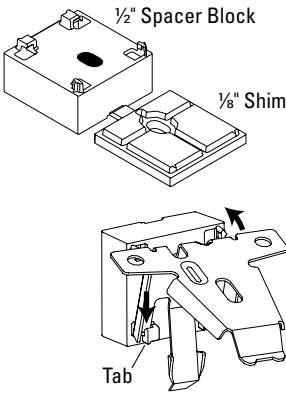

INSTALLATION

Mounting Types and Window Terminology

If the installation brackets are mounted correctly, the rest of the installation process follows easily. To prepare for this important first step, review the mounting types and basic window terminology illustrated below.

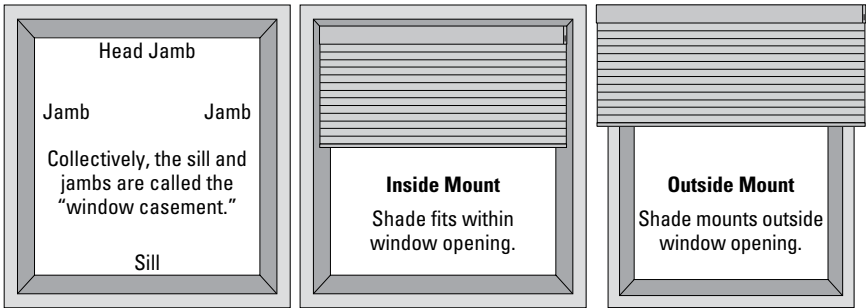


■ Refer to the appropriate page below based on your order:

- **Inside Mount** — below
- **Outside Mount** — Page 7
- **End Mount** — Page 9





Mount the Installation Brackets — Inside Mount


■ Mark 2" in from each jamb for bracket location.

- If more than two installation brackets came with your order, space additional bracket(s) evenly between the two end brackets and mark their location. **Allow a minimum of 15" between the brackets on the right-side motor end for the battery wand/rechargeable battery wand.** Mount into wood whenever possible.

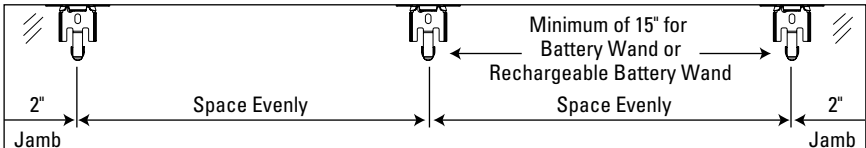

- Center the brackets on your marks, then mark each of the screw holes.
- Mounting depths vary depending on the fabric pleat size. See the following chart for minimum and fully recessed depth requirements (measured from the front of the sill to the back of the installation bracket).
- Mark both winged screw holes with shallow mounting depths.
- Mark the center screw hole when depth permits. The center hole requires 1½".

Mounting Depth Requirements								
Pleat Size:	 Battery Wand High Mount Bracket (Standard)		 Battery Wand Low Mount Bracket (Optional)		 Headrail- Mounted Rechargeable Battery Wand (Optional)		 Satellite Battery Pack/ Rechargeable Battery Wand, C-Size Battery Wand, 18V DC Power Supply, 16 Shade DC Power Supply	
	3⁄8", 3⁄4"	1¼"	3⁄8", 3⁄4"	1¼"	3⁄8", 3⁄4"	1¼"	3⁄8", 3⁄4"	1¼"
Minimum casement depth: Inside Mount	1"	1"	1"	1"	1¼"	1¼"	½"	½"
Minimum casement depth: End Mount	1¾"	1¾"	1¾"	1¾"	2"	2"	1¼"	1¼"
Minimum casement depth: Flush Mount	2¾"	3½"	2⅝"	3⅜"	3⅞"	3¾"	2¼"	3⅞"
Minimum mounting surface height: Outside Mount	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"	1¼"

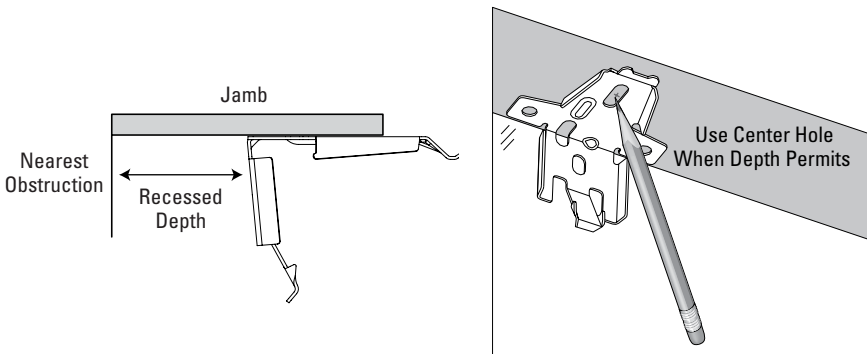



INSTALLATION

- Drill the screw holes using a $\frac{3}{32}$ " drill bit.

CAUTION: Use drywall anchors when mounting into drywall.

- Use a level to check that the mounting surface is level. Shim the brackets if necessary.
- Attach the installation brackets using the screws provided.


IMPORTANT: The front edges of the installation brackets *must* be level and aligned. If mounting to a heavily textured surface, shim the brackets, if needed.



Proceed to "STEP 2: Mount the Battery Wand (If Applicable)" on page 10.



Mount the Installation Brackets — Outside Mount

- Center the headrail over the window opening at the desired height. Use a pencil to lightly mark the wall at each end of the headrail.
 - Alternatively, measure the width of the headrail and use that width to mark the headrail end points over the window opening.
- Mark 2" from each end of the headrail.
 - If more than two installation brackets came with your order, space additional bracket(s) evenly between the two end brackets and mark their location. **Allow a minimum of 15" between the brackets on the right-side motor end for the battery wand/rechargeable battery wand.** Mount into wood whenever possible.

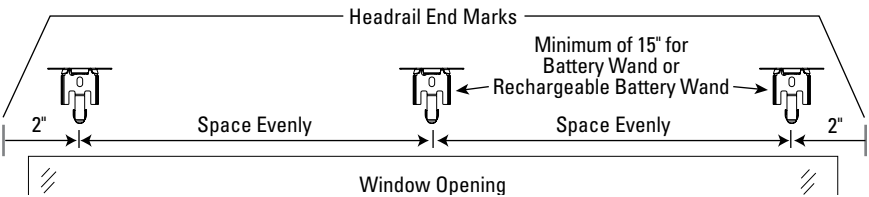

- Center the brackets on your marks, then mark each of the screw holes.
 - A minimum of 1¼" flat vertical surface is required to mount the brackets.
 - The top of the installation brackets or extension brackets should be at the desired shade height. The brackets should be level and aligned.
 - When using extension brackets, mark two screw holes per bracket.

CAUTION: The rear of the brackets *must* be flush against a flat mounting surface. *Do not* mount brackets on curved molding.





- Drill the screw holes using a 3/32" drill bit.

CAUTION: Use drywall anchors when mounting into drywall.

INSTALLATION



- Attach the installation or extension brackets using the screws provided.

IMPORTANT: The front edges of the brackets *must* be level and aligned to each other.



- If using spacer blocks, attach the spacer block/installation bracket assembly to a flat vertical mounting surface with a #6 mounting screw long enough for a secure installation.


- Use one ½" spacer block per installation bracket to provide clearance required for standard battery wand.
- Use two ½" spacer blocks per installation bracket to provide clearance required for rechargeable battery wand.



- A maximum of 1½" of spacer blocks per installation bracket is recommended. Spacer blocks and shims may be stacked.
- The top of the spacer blocks should be at the desired shade height.

CAUTION: Use drywall anchors when mounting into drywall.

- If using extension brackets, attach an installation bracket to the underside of each extension bracket using the provided screws and speed nuts.

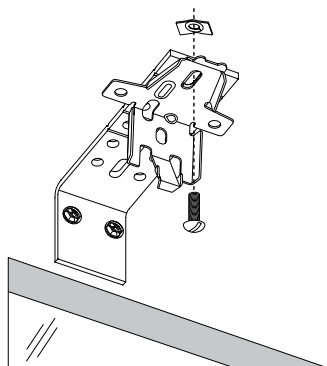

Proceed to "STEP 2: Mount the Battery Wand (If Applicable)" on page 10.

Mount the Installation Brackets — End Mount

End mount the headrail when conventional mounting techniques will not work — for example, in an arched window opening.

- Position the end mount brackets so that the top of the attached installation brackets are at the ordered height of the shade.

CAUTION: Both brackets *must* be installed at the same depth and height.

- Mark both screw holes for each end mount bracket.

- The mounting surface *must* be vertical and flat, not part of an arched curve.

IMPORTANT: Add $\frac{1}{2}$ " to the following minimum mounting depths if a battery wand is used; add $\frac{3}{4}$ " to the following minimum mounting depths if a rechargeable battery wand is used.



- Minimum mounting depth is $1\frac{1}{4}$ " for $\frac{3}{8}$ " and $\frac{3}{4}$ " pleat sizes and 2" for the $1\frac{1}{4}$ " pleat size. Minimum mounting depth for a fully recessed end mount is $2\frac{3}{8}$ " for $\frac{3}{8}$ " and $\frac{3}{4}$ " pleat sizes and 3" for the $1\frac{1}{4}$ " pleat size.

- Drill the screw holes using a $\frac{3}{32}$ " drill bit.

- Attach the end mount installation brackets using the flat head screws provided.

CAUTION: Drywall mounting is not recommended.

IMPORTANT: For instructions on installing an arch over a rectangular shade, see the *Installation, Operation, and Care* instructions that came with your arch shade.

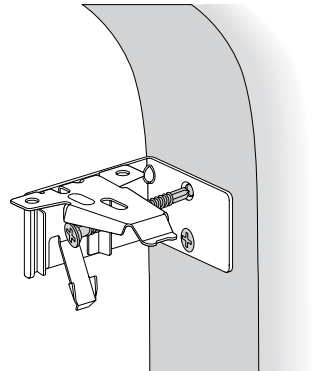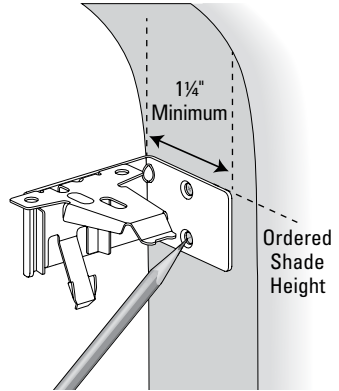

Proceed to "STEP 2: Mount the Battery Wand (If Applicable)" on page 10.

INSTALLATION

STEP 2: Mount the Battery Wand (If Applicable)

- Refer to the appropriate page based on your order.
 - For a battery wand, see below.
 - For a headrail-mounted rechargeable battery wand, see page 11.
 - For any other power options, the shade is installed first, see page 12.


Battery Wand

Install the Battery Wand Clips

- Hook the battery wand clip onto the back channel of the headrail.

IMPORTANT: Position the clip so that the battery wand will be between installation brackets.


- Rotate the clip down until it snaps into place.

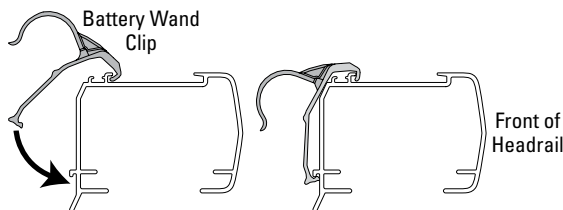

Battery Wand Clips

High Mount
(Standard)


Low Mount
(Optional)



Mount the Battery Wand into the Battery Wand Clip


- Align the battery wand with its socket toward the right-side motor end cap.
- Push the battery wand straight up into the battery wand clip until it snaps into place. Check to make sure the battery wand is secure.

CAUTION: Be sure the cable does not become pinched by the battery wand clip during installation. Damage or overheating of components could result.

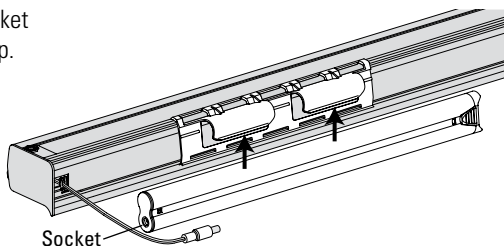

Plug the Power Cable into the Battery Wand

- On the back of the headrail, connect the power cable (coming from the shade) into the socket on the battery wand.

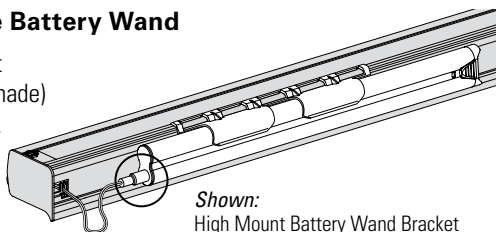


Proceed to "STEP 3: Install the Shade" on page 12.

Headrail-Mounted Rechargeable Battery Wand

Install the Rechargeable Battery Wand Clips

- Hook the clip onto the back channel of the headrail.

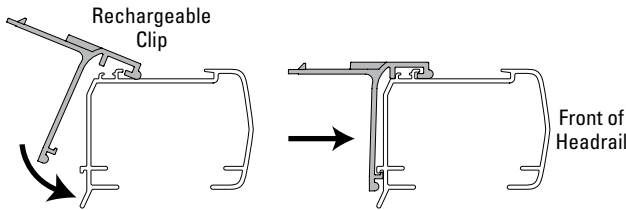


IMPORTANT: Position the clip so that the battery wand will be between installation brackets.

- Rotate the clip down and press the middle of the clip until it snaps into place.

Mount the Rechargeable Battery Mount into the Rechargeable Clips

- From the back of the shade headrail, connect the power cable from the motor side into the socket on the rechargeable battery mount.
- Align the slots in the battery mount with the battery wand clips.
- Push the battery mount onto the battery wand clips until it snaps into place. Check to make sure the battery mount is secure.

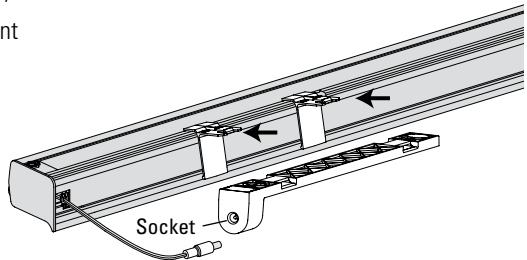

CAUTION: Be sure the cable does not become pinched by the battery wand clips during installation. Damage or overheating of components could result.

NOTE: *Do not* install the rechargeable battery wand into the battery mount before installing the shade. See “STEP 4: Connect the Power Source” on page 13 for instructions on inserting the battery wand into the battery mount.

Proceed to “STEP 3: Install the Shade” on page 12.




INSTALLATION

STEP 3: Install the Shade

Mount the Headrail

CAUTION: Be sure no cables are pinched by the brackets or headrail during installation; damage or overheating of components could result.

- Fit the front channel on top of the headrail onto the front lip of the installation brackets.
- Push the headrail up and back until it snaps into place.
 - Check that the bottom of the headrail is snapped into the base of each bracket.
 - Check that the front lip of each bracket is in the front channel of the headrail.
- If any brackets are not installed correctly, release the shade and reinstall. See “Removing the Shade” on page 36.

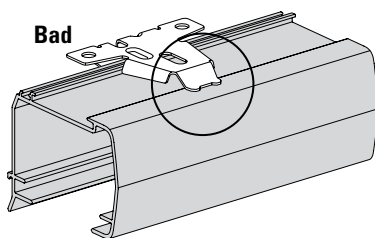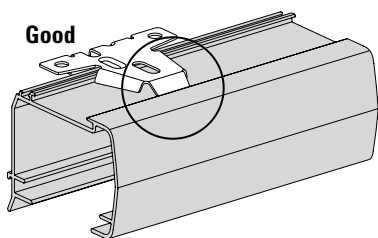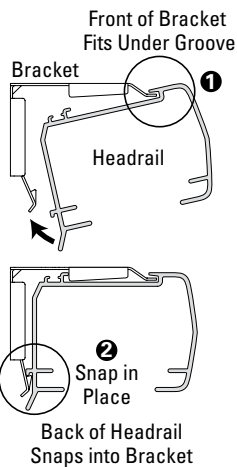

Proceed to “STEP 4: Connect the Power Source” on page 13.

STEP 4: Connect the Power Source


NOTE: When power is connected to the motor, the LED under the control button housing will flash blue to indicate the shade is ready for operation.

- Refer to the appropriate page based on your order.
 - For an optional satellite battery pack, see below.
 - For an optional headrail-mounted rechargeable battery wand, see page 14.
 - For an optional satellite-mounted rechargeable battery wand, see page 15.
 - For an optional 18V DC Power Supply, see page 16.
 - For an optional 18V DC Power Supply with daisy-chain connections, see page 17.
 - For any other Hunter Douglas power options, see the instructions that came with the unit.

Satellite Battery Pack


Mount the Wall Mount Bracket

- Decide where you want to attach the wall mount bracket. A satellite battery pack may be mounted in any orientation.
 - Make sure the provided cable is long enough to connect the satellite battery pack and the shade.
- Mark the screw holes.
- Drill the screw holes using a $\frac{3}{32}$ " drill bit.
- Remove the backing from the double-sided tape. Press the bracket into place.
- Attach the bracket using the screws provided.




Mount the Satellite Battery Pack

- Position the battery wand so the power cable is easily connected to the socket.
- Snap the battery wand into the bracket.

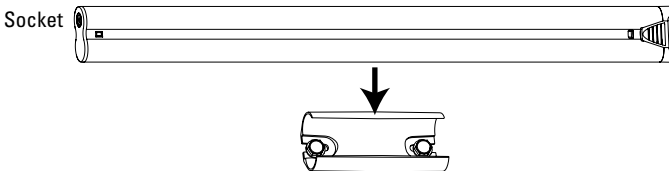


- Install the battery wand cover with the slot aligned to the socket in the battery wand.

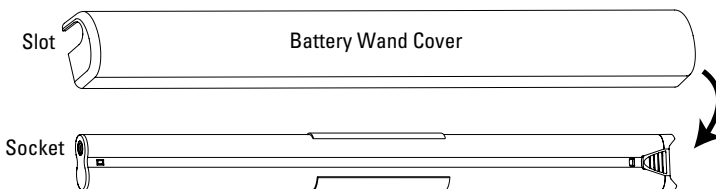

INSTALLATION

- Plug the power cable from the shade into the satellite battery pack cable.
- Plug the other end of the satellite battery pack cable into the socket in the battery wand.

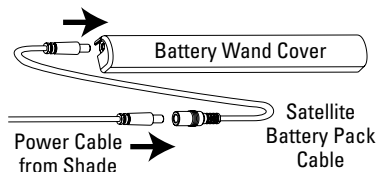

- Secure the satellite battery pack cable using wire retainers (not supplied). If hiding the cable behind the shade, make sure it does not impede the operation of the shade.

Proceed to "Testing the Shade" on page 19.

Headrail-Mounted Rechargeable Battery Wand


Insert the Rechargeable Battery Wand into the Battery Mount

NOTE: The rechargeable battery wand ships fully charged, so it is ready to install out of the package.

- Match the direction of the arrow on the underside of the battery wand with the arrow on the battery mount.



- Insert the nose of the battery wand into the cavity of the battery mount.



- Push the battery wand flush into the mount until the battery snaps into place.


CAUTION: Failing to insert wand properly may cause it to fall out of the mount, posing an injury risk and potentially damaging the wand. Additionally, when mounting on a door, closing the door with excess force may cause battery wand to dislodge from the mount, also posing an injury risk and possibly damaging the wand.

Proceed to "Testing the Shade" on page 19.

Satellite-Mounted Rechargeable Battery Wand

Install the Rechargeable Battery Mount

- Decide where you want to install the rechargeable battery mount. This may be mounted behind the headrail, or in any desired location near the window covering. A satellite battery mount may be installed in any orientation.
- Make sure the provided cable is long enough to connect the satellite battery mount and the shade.

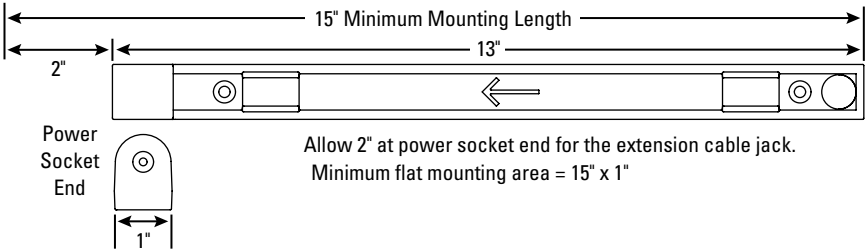


CAUTION: The rear of the battery mount *must* be flush against a flat mounting surface. *Do not* install brackets on curved molding.

- Mark the screw holes.
- Drill the screw holes using a $\frac{3}{32}$ " drill bit.
- Attach the battery mount using the screws provided.

CAUTION: Only use the screws provided with the battery mount, designed so that the screws will install flush with the mount. Protrusion of the screws could result in either the battery wand not attaching properly causing a failure to connect, or the wand falling out of the mount. *Do not* over-tighten.

- Connect the power cable from the motor side into the power socket on the rechargeable battery mount.

NOTE: With longer extension cables, wire retainers (not supplied) are recommended to secure the cable.

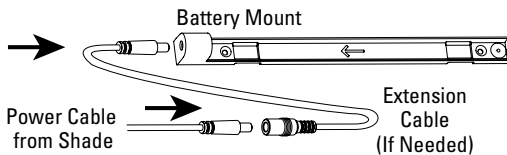


INSTALLATION

Insert the Battery Wand into the Battery Mount

NOTE: The rechargeable battery wand ships fully charged, so it is ready to install out of the package.

- Match the direction of the arrow on the underside of the battery wand with the arrow on the battery mount.

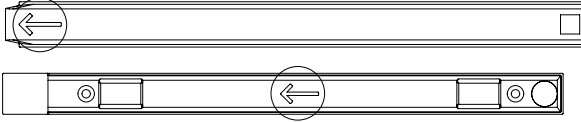

- Insert the nose of the battery wand into the cavity of the battery mount.



- Push the battery wand flush into the mount until the battery snaps into place.


CAUTION: Failing to insert wand properly may cause it to fall out of the mount, posing an injury risk and potentially damaging the wand. Additionally, when mounting on a door, closing the door with excess force may cause battery wand to dislodge from the mount, also posing an injury risk and possibly damaging the wand.

Proceed to “Testing the Shade” on page 19.

18V DC Power Supply

NOTE: When power is connected to the motor, a blue LED inside the control button housing will flash to indicate the shade is ready for operation.

- Plug the power cable from the shade motor into the extension cable.
- Plug the other end of the extension cable into the 18V DC power supply.
- Plug the 18V DC power supply into a power source.

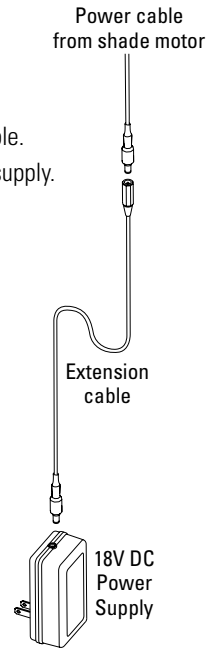


INSTALLATION

18V DC Power Supply with Daisy-Chain Connections

NOTE: The daisy-chain feature is *only* available with the 18V DC Power Supply option. Refer to this section if you have an 18V Power Supply with daisy-chain connections.

The daisy-chain feature allows up to three PowerView® Gen 3 automated shades to be powered by a single 18V DC Power Supply. However, each shade can operate independently.

- Route the power cables from each shade to the Y Adapter using extension cables (if necessary).
- Plug an extension cable into the Y Adapter and the 18V DC Power Supply. A two-shade configuration is shown below.

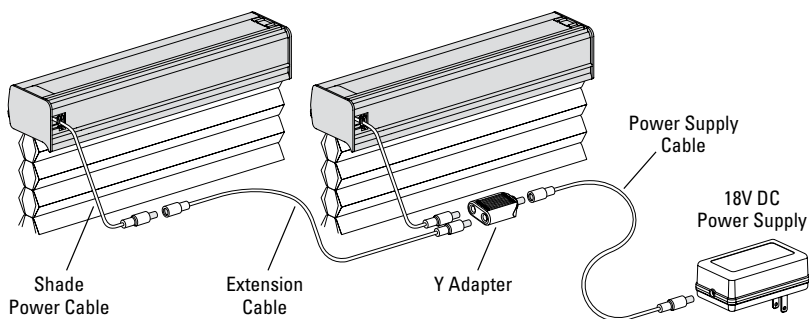

- Plug the 18V DC Power Supply into a standard outlet.
- An additional Y Adapter and two additional extension cables are used for three shades.

Proceed to “Testing the Shade” on page 19.

Testing the Shade


Use the control button to test the shade and ensure that the motor and power source are working correctly.

CAUTION: When raising the shade for the first time, observe how the fabric stacks. It should stack evenly. Immediately stop the shade if the bottom rail is not level or the shade starts to rub against either window jamb. See “Level the Rail(s)” on page 29.

■ Press the control button on the bottom of the right-side end cap to test operation. If the shade does not operate, see “Troubleshooting” on page 30.

- Press the button to alternately lower, stop, and raise the shade.

The control button can also be used with the PowerView App for advanced shade functions and home access. Open the app, press and hold the control button to see a list of available functions. See “Operating the PowerView® App and Gen 3 Remote” on page 24.



NOTE: With Top-Down/Bottom-Up and Duolite® shades, the control button will alternately lower the bottom rail, lower the middle rail, raise the middle rail, and raise the bottom rail.

Proceed to “Attach Magnetic Hold-Down Brackets (Optional)” on page 20 or “Operating the PowerView® App and Gen 3 Remote” on page 24.


INSTALLATION

Attach Magnetic Hold-Down Brackets (Optional)

Hold-down brackets provide stability and prevent swaying by securing the bottom rail, for example on French door applications. Hold-down brackets can only be used on outside mount shades.

Check the Magnet Polarity



- Place the magnetic hold-down bracket near one end of the bottom rail.
 - The magnet should attract to the magnet that is already in the bottom rail.
 - If the magnet in the bracket is repelled by the magnet in the rail, reverse the polarity of the magnet as described in "Reverse Bracket Magnet Polarity (If Needed)".



Reverse Bracket Magnet Polarity (If Needed)

The magnet within the magnetic bracket must be attracted to the magnet located within the bottom rail. In the event that they repel each other, the magnet within the magnetic bracket can be removed and flipped.

- To remove the magnet, hold a small steel flat blade screw- driver up to the magnet in the bracket and pull the magnet out with the screwdriver.
- Then flip the magnet over and place it back into the bracket.





Mark the Bracket Location

- Lower the shade to the closed position.
- Mark the location on the door where the bracket will be placed.



For Shades with 1¼" Fabric ONLY: Attach the Spacer to the Bracket

- Slide the bracket onto the bracket spacer.



- Attach the Bracket

- Drill the pilot hole using a $\frac{3}{32}$ " drill bit
- Attach the bracket (and spacer assembly, for shades with 1¼" fabric) using the screw provided.




IMPORTANT: Do not over-torque the screw.

INSTALLATION

For Shades with $\frac{3}{4}$ " Fabric ONLY:

- Mark the Position for the Second Pilot Hole
 - Slide the bracket cover over the bracket



- Mark for the second pilot hole.
- Drill the pilot hole using a $\frac{3}{32}$ " drill bit



$\frac{3}{4}$ "





$1\frac{1}{4}$ "

Install the Bracket Cover

- Slide the bracket cover over the magnetic hold-down bracket.
- Attach the cover using the screw provided.

IMPORTANT: Do not over-torque the screw.



Place and Attach Second Bracket

Repeat the process from “Check the Magnet Polarity” on page 5 to install the second magnetic hold-down bracket.



IMPORTANT: Make sure the bottom rail is level when marking the second bracket location.

Final Adjustments

Verify that the bottom rail is level.



Proceed to
“Operating the PowerView® App and Gen 3 Remote” on page 24.

OPERATION

Operating the PowerView® App and Gen 3 Remote


Syncing and Programming Your Remote

- Activate the remote by pulling both plastic tabs from the back battery compartment.
- Download the PowerView® App for your smartphone or tablet at hdpvapp.com.
- Open the PowerView App and follow the steps to set up your new shades and remote.
- Use the PowerView App to program and manage your PowerView Gen 3 remote(s) as accessories.
- For more details, refer to the digital [PowerView Gen 3 Automation Remote Control Guide](#).

Basic Operation

- Wake up the remote by picking it up or pressing ■ STOP.
- Press group number(s) 1, 2, 3, 4, 5, and/or 6 to select one or more groups. Selected group numbers light up white on the remote.
- Press selected group number(s) 1, 2, 3, 4, 5 and/or 6 a second time to deselect one or more groups. Deselected group numbers are not lit.

Bottom Up Shades

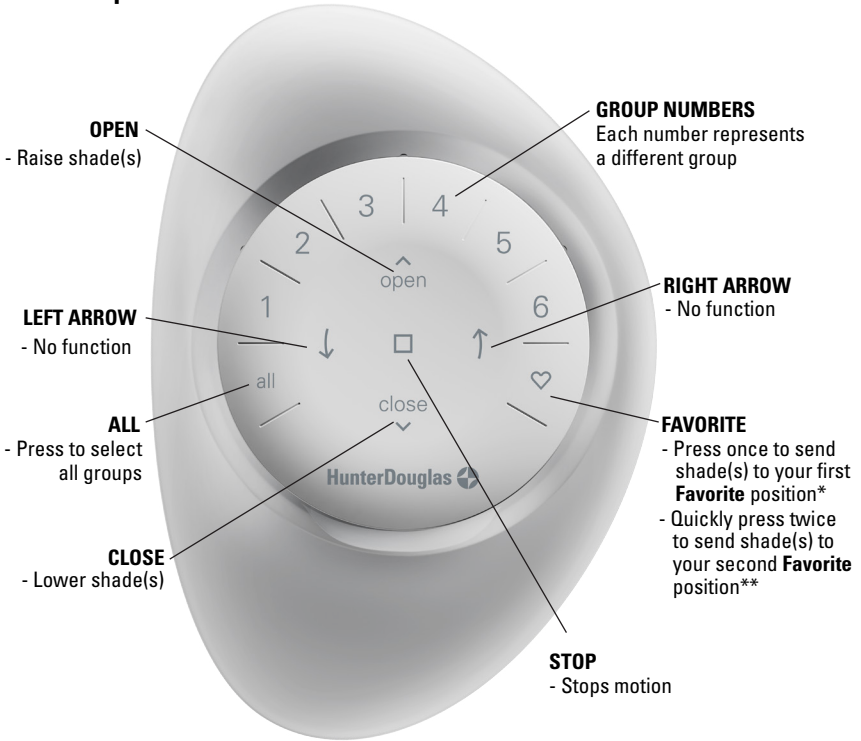


* The default first **Favorite** position is the front shade(s) at 50% open.

Both **Favorite positions can be updated in the PowerView® App > Shade Settings.

OPERATION

Top-Down/Bottom-Up and Duolite® Shades

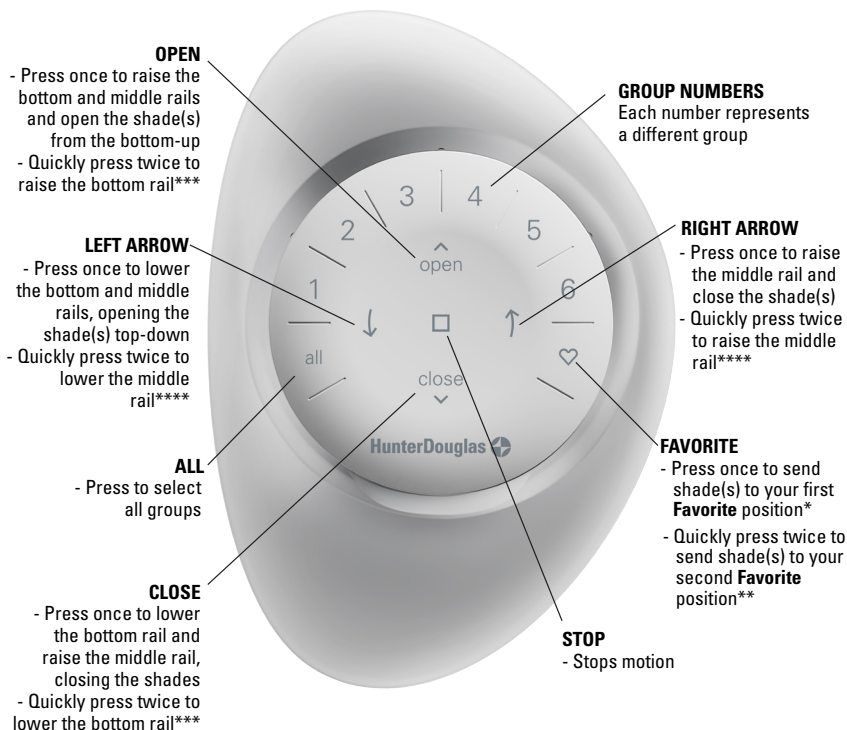


*The default first **Favorite** position is the shade(s) at 50% open.

Both **Favorite positions can be updated in the PowerView® App > Shade Settings.

***The middle rail will stay in its current position.

****The bottom rail will stay in its current position.

Top-Down Shades

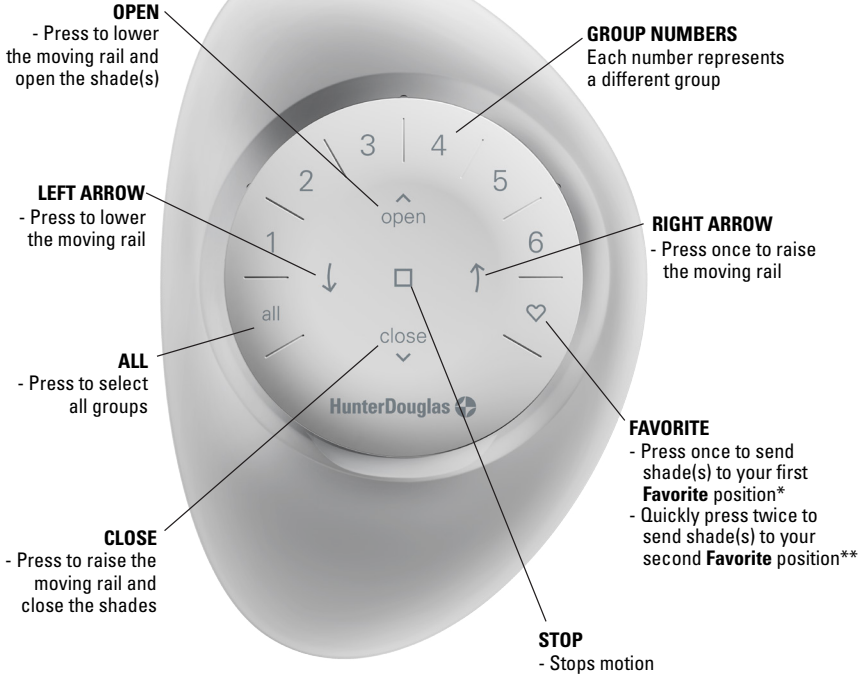

*The default first **Favorite** position is the shade(s) at 50% open.

Both **Favorite positions can be updated in the PowerView® App > Shade Settings.

OPERATION

Further Operation and Programming Information

PowerView® App

The PowerView® App is required to program PowerView Gen 3 shades, remotes, and gateways. The App is compatible with Apple® and Android™ smartphones and tablets. For more information regarding setup and operation using the PowerView App, refer to <https://help.hunterdouglas.com/s/powerview-gen-3-manuals>.

PowerView® Gen 3 Gateway

The PowerView® Gen 3 Gateway is used to control shades in larger projects as well as integrate PowerView Gen 3 shades with third-party integration systems. For information regarding programming of PowerView Gen 3 Gateways, refer to the [PowerView Gen 3 Automation Gateway Guide](#).

PowerView Gen 3 Remote

For more information regarding operation and programming of the PowerView Gen 3 Remote, refer to the digital [PowerView Gen 3 Automation Remote Control Guide](#).

Resetting the Shade

Calibration Reset

The calibration reset is used to recalibrate the shade's travel limits. This action is performed in the PowerView App.

- Select Calibrate Shade in the Advanced Options section of the Shade Settings menu in the PowerView App.
- The shade will touch off on end limits, then finish in the closed position. When the shade stops moving, calibration is complete.

Resetting Shade Programming


The PowerView App may be used to modify or reset any shade programming to PowerView Gen 3 Remotes, and Gateways. Shades may be added to or removed from Rooms in the App at any time. If necessary, shades may also be deleted from the PowerView App in the Advanced Options section of the Shade Settings menu.

Electronic Limit Adjustments

Electronic limits are set at the factory and normally do not require readjustment. For window treatments that may need additional adjustment or to set custom limit positions, go to Shade Settings in the PowerView App to adjust limits.

Level the Rail(s)

- Lift the bottom rail to locate the pockets on the underside of the rail.
 - With the middle rail on Top-Down/Bottom-Up shades, the pockets are on the top side of the rail.
 - See below for the middle rail adjustment on Duolite® shades.
- Gently pull down on the bottom rail (or up on the middle rail) to fully insert the $\frac{7}{64}$ " EasyAdjust™ key into the pocket. The key is fully inserted when the base of the key abuts to the pocket.
 - Lift up the rail slightly before turning the EasyAdjust key. Turn the key clockwise to raise that side of the rail, or counter-clockwise to lower it.
 - One quarter turn of the key equals approximately $\frac{1}{4}$ ".

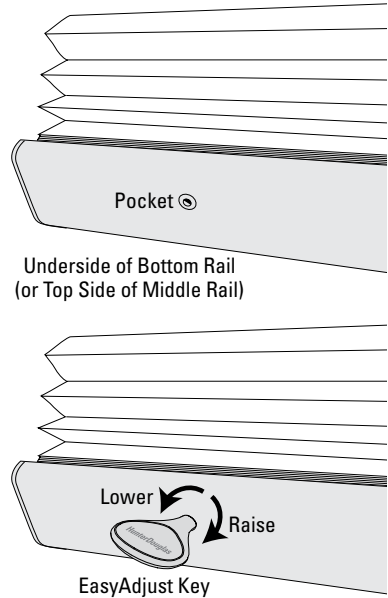

IMPORTANT: The EasyAdjust key must be fully inserted to avoid stripping the mechanism. *Do not* pull down on the rail while turning the key.


- If there are more than two pockets, adjust the outer pockets first. Then adjust inner pockets as necessary, to maintain equal tension across the rail. As pocket adjustments are made, it is recommended that the shade be raised and lowered to check that it is level.

Adjusting the Duolite Middle Rail

- Hex bolts are found at the ends of the exposed middle rail.
- Insert the Easy Adjust key so that its hex-shaped portion is about halfway into the pocket.
- Turn the key clockwise to raise that end of the rail or counter-clockwise to lower it.
 - One full turn of the key equals approximately $\frac{1}{8}$ ".

IMPORTANT: When adjusting bolts on one side, turn all the bolts at the other side in the same amount.

- On shades over 60" wide, there will be two hex pockets in the right end of the middle rail. Use the rear hex pocket to adjust the tension in the center cord after adjusting the outer cords to level the rail.
- Use the rear hex pocket to adjust the tension in the center cord after adjusting the outer cords to level the rail.

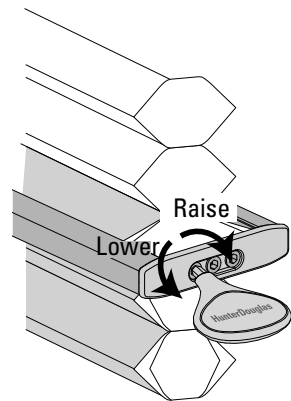

Troubleshooting

If your shade is not operating correctly:

- Review the [digital support guide](#) for your control device.
- Refer to the following troubleshooting procedures for specific solutions for your shade.


If questions remain, please contact Hunter Douglas Consumer Support at **(800) 789-0331**.



Problem	The shade will not fit into the installation brackets.
Solution	<p>If the shade has a battery wand, check that the wand is not interfering with the installation brackets.</p> <p>Check that the installation brackets are level and aligned. Adjust and/or shim to level, if necessary.</p> <p>Be sure the heads of the mounting screws are flush against the installation bracket.</p> <p>Make sure that the shade fabric is not caught between the installation bracket and the headrail.</p> <p>Check that the headrail is completely inserted into the installation brackets. See "STEP 3: Install the Shade" on page 12.</p>
Problem	The shade does not operate using the control button.
Solution	<p>Unplug the power cable from the motor, then plug it back in. A blue LED inside the control button housing should flash to indicate the motor has power.</p> <p>Check that the batteries in the battery wand, satellite battery pack, or C-size satellite battery wand are correctly inserted and fresh.</p> <p>Check that the power source is securely connected to the power cable and the cables are not pinched or caught in the headrail or installation brackets. If you have the rechargeable battery wand, check to see that the battery wand is correctly positioned in the mount.</p>

Problem	The shade is not responding to the PowerView® Gen 3 remote.
Solution	<p>IMPORTANT: A shade will not operate until it is joined to a group.</p> <p>Check that the correct group number is selected. The LED on that group number will light up. You can also check which group number the shade is joined to on the remote in the PowerView App. You can find this under MORE > ACCESSORIES in the app.</p> <p>Check if the batteries need to be replaced. If the batteries are completely drained, none of the lights will turn on. If the batteries are running low, the inner ring buttons (open, close, right arrow, left arrow, stop) light up RED. In either case, the batteries need to be replaced. The remote takes two CR2032 batteries.</p>
Problem	The shade is operating slowly or does not raise or lower completely.
Solution	<p>The batteries may be low in the battery wand, satellite battery pack, or C-size battery wand. Replace the batteries.</p> <p>Check that the power source is securely connected to the power cable and the cables are not pinched or caught in the headrail or installation brackets.</p> <p>Check that the fabric stacks up evenly into the headrail. If not, see “Level the Rail(s)” on page 29.</p> <p>The shade may need to be reset. Refer to “Resetting the Shade” on page 28.</p>
Problem	The shade raises or lowers unevenly or the bottom rail is uneven when fully raised.
Solution	<p>Lower the shade <u>completely</u> to allow it to “self-correct” skewing.</p> <p>Check that the headrail and installation brackets are level and aligned. Shim the installation brackets to level the headrail, if necessary.</p>
Problem	The shade limits need to be adjusted - top limit
Solution	See “Electronic Limit Adjustments” on page 28.
Problem	The shade limits need to be adjusted - bottom limit
Solution	See “Electronic Limit Adjustments” on page 28.

TROUBLESHOOTING

Problem	Batteries in the battery wand need to be replaced.
Solution	<p>Replace the batteries in the battery wand.</p> <p>Squeeze the cap latch to release the cap and remove the cap from the battery wand.</p> <p>Install the batteries according to the instructions on the battery wand label.</p> <p>Press the cap on until it latches.</p> <p>NOTE: Hunter Douglas recommends AA alkaline batteries for use with our battery-powered shades. These will provide more than one year of operation, depending on usage. Lithium and rechargeable batteries are not recommended.</p>
Problem	The battery is charged but the shade does not operate.
Solution	<p>If your rechargeable battery wand is charged but not working, it may be due to its physical location in your window. The rechargeable battery wand can operate in temperatures up to 176°F (80°C). If the temperature in your window exceeds this, its safety feature will shut the battery off temporarily. The battery will turn back on once the temperature lowers into the operable range.</p> <p>If you anticipate the rechargeable battery wand consistently exceeding this temperature limit, please reinstall in a location that avoids direct sunlight.</p>

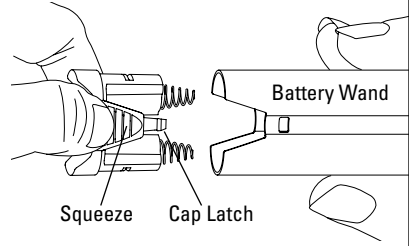

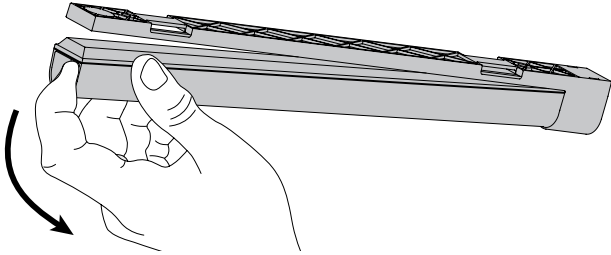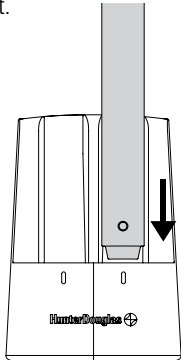
Problem	Rechargeable battery needs recharging.
Solution	<p>There are two methods for charging the rechargeable battery wand — the dual charging station or the single charger.</p> <p>CAUTION: The rechargeable battery wand can only be charged with these Hunter Douglas provided charging options. Attempting to charge battery wands with an alternative charger may result in permanent damage.</p> <p>Removing the Rechargeable Battery Wand from the Mount</p> <ul style="list-style-type: none"> ■ To safely remove the rechargeable battery wand from your shade, grasp the end of the battery wand that is furthest away from the power socket. ■ CAUTION: Grasp the wand firmly prior to removal. ■ Using the indentation on the end of the battery wand, use your index finger to pull the battery out of the mount. <p>NOTE: The mount should remain installed and plugged into the shade cable during this process. You will simply remove the wand from the mount.</p>  <p>Recharging Via the Dual Charging Station</p> <ul style="list-style-type: none"> ■ Plug the dual charging station into a standard AC outlet. ■ Insert the nose of the rechargeable battery wand into one of the slots of the dual charging station. ■ The battery will firmly snap into place. A red light indicator on the front of the charging station will turn on when the battery wand has been properly inserted and being charged. ■ Once the battery has been fully recharged, the red light indicator will turn green. Charging may take up to three hours, depending on your battery level. ■ Remove the battery wand from the charger. <p>(Continued on next page.)</p> 

Problem	Rechargeable battery needs recharging (continued)
Solution	<p data-bbox="224 201 602 363"><u>Recharging Via the Single Charger</u></p> <p data-bbox="224 250 589 363">Remove the rechargeable battery wand from the mount, or insert the single charger cable without removing from the shading.</p> <div data-bbox="632 212 956 526"></div> <ul data-bbox="224 375 951 591" style="list-style-type: none">■ Attach the plug adapter to the charger.■ Attach the female end of the charging cable to the charger, and the male end to the battery wand. If additional length is required to reach the battery, attach additional charging cables as needed.■ Insert and twist cables together to ensure they do not accidentally become unplugged during charging. <div data-bbox="288 574 767 1040"></div> <ul data-bbox="224 1062 692 1248" style="list-style-type: none">■ Plug the charger into a standard AC outlet.■ Plug the charging cable into the charging outlet on the rechargeable battery wand. The charging outlet is near the nose of the wand.■ A red light indicator confirms the battery wand is properly inserted and is charging. <p data-bbox="259 1256 951 1346">CAUTION: <i>Do not</i> attempt to plug the charging cable into the battery mount's power socket. Doing so will not only fail to charge the battery wand but could possibly cause damage to both the single charger and the battery mount.</p> <div data-bbox="713 1045 967 1240"></div> <ul data-bbox="224 1354 951 1451" style="list-style-type: none">■ Once the battery has been fully recharged, the red light indicator will turn green. Charging may take up to two hours, depending on your battery level.■ Remove the charging cable from the battery wand. <p data-bbox="224 1468 461 1492">(Continued on next page.)</p>

Problem	Rechargeable battery needs recharging (continued)
Solution	<p>Reinserting the Rechargeable Battery Wand into the Mount</p> <ul style="list-style-type: none">■ Match the direction of the arrow on the underside of the battery wand with the arrow on the battery mount.■ Insert the nose of the battery wand into the cavity of the battery mount.■ Push the battery wand flush into the mount until the battery snaps into place

Removing the Shade

- Lower the shade approximately 4".
- While holding the headrail, push back on the bottom tab of the installation bracket with a flat blade screwdriver to release the bottom edge of the headrail.
- After releasing the bottom edge, roll the back of the headrail down and out from the bracket.

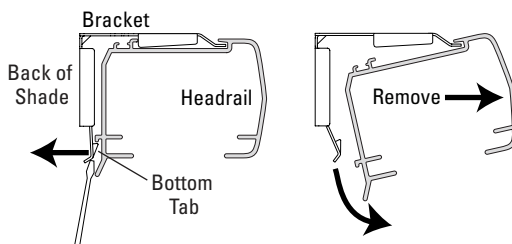

Cleaning Procedures

Hunter Douglas Duette® and Applause® Honeycomb Shades are made of anti-static, dust-resistant fabric which repels dirt and dust. For most honeycomb fabrics, the following cleaning options are available.

Dusting

- Regular light dusting with a feather duster is all the cleaning needed in most circumstances.

Vacuuming

CAUTION: Do not vacuum Elan® or Elan® Metallic fabrics.

- For deeper cleaning, vacuum gently with a brush attachment.

Compressed Air/Hair Dryer (Cool Setting)

- Use compressed air or a hair-dryer on a cool setting to blow dust and dirt off shades.

Spot-Cleaning

CAUTION: Do not spot-clean Alexa™, Commercial, Elan, Elan Metallic, Esprit™, India Silk™, Leela™, Macon™, Thea™, or Batiste fabrics.

- Prepare a solution of warm water and a mild detergent.
- Dampen a clean cloth in the solution and wring it out.
- Dab the spot with the dampened cloth until it is removed. Do not rub the fabric.
- Allow the shade to dry in the completely lowered (or closed) position.

Ultrasonic Cleaning

CAUTION: *Do not* ultrasonically clean Commercial, Batiste 1¼" Semi-Sheer, ClearView™ Sheer fabrics, or any room-darkening fabric.

- Specify that a mild detergent solution be used.

IMPORTANT: Never immerse the headrail into the solution.

- Dry the shade completely in the lowered (or closed) position.

Injection/Extraction Cleaning

This type of professional cleaning injects a cleaning solution into the fabric and extracts the dirty solution in the same motion.

- Use only the dry method of injection/extraction for Elan and Elan Metallic fabrics.
- If using injection/extraction for Alexa, Batiste Bamboo or Thea fabrics, specify water only; no chemicals.
- Leave shades in closed position (stacked) for at least 15 minutes after cleaning.

Headrail Cleaning

CAUTION: Never use abrasive cleaning methods or harsh chemicals.

- Dampen a soft, clean cloth in warm water and wring it out.
- Gently wipe the headrail to remove dirt and dust.

DECLARATIONS

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Consult the dealer or an experienced radio/tv technician for help.

Note: Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

ICES-003

This Class B digital apparatus complies with Canadian ICES-003.

- Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.
-

NMB-003

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

- L'utilisation de ce dispositif est autorisée seulement aux conditions suivantes : (1) il ne doit pas produire de brouillage et (2) l'utilisateur du dispositif doit être prêt à accepter tout brouillage radioélectrique reçu, même si ce brouillage est susceptible de compromettre le fonctionnement du dispositif.
-

CE Statement


Hunter Douglas Window Fashions, One Duette Way, Broomfield, CO 80020, USA

Hunter Douglas hereby declares that the PV34 is in compliance with the essential requirements and other relevant provisions of Electromagnetic Compatibility (EMC) Directive 2014/30/EU and Radio Equipment Directive (RED) 2014/53/EU. A copy of the DoC can be obtained online:

www.hunterdouglas.com/RFCertifications.



! WARNING/ ADVERTENCIA



Window Blind Cord
Can **STRANGLE**
Your Child. To

prevent strangulation, purchase
cordless products or products
with inaccessible cords.

La cuerda de la persiana puede
ESTRANGULAR a su niño. Para
evitar el estrangulamiento, com-
pre alternativas cuerda o prod-
uctos con cuerdas inaccesibles.

! WARNING

STRANGULATION HAZARD – Young
children can be strangled by cords.
Immediately remove this product if a cord
longer than 22 cm or a loop exceeding
44 cm around becomes accessible.

! MISE EN GARDE

RISQUE D'ÉTRANGLEMENT – Les
enfants en bas âge peuvent s'étrangler
avec des cordes. Enlevez immédiate-
ment ce produit si une corde mesurant
plus de 22 cm devient accessible ou si
le contour d'une boucle de plus de 44
cm devient accessible.

LIFETIME GUARANTEE

The Hunter Douglas® Lifetime Guarantee is an expression of our desire to provide a thoroughly satisfying experience when selecting, purchasing and living with your window fashion products. If you are not thoroughly satisfied, simply contact Hunter Douglas at **(800) 789-0331** or visit **hunterdouglas.com**. In support of this policy of consumer satisfaction, we offer our Lifetime Limited Warranty as described below.

COVERED

BY A LIFETIME LIMITED WARRANTY

- Hunter Douglas window fashion products are covered for defects in materials, workmanship or failure to operate for as long as the original retail purchaser owns the product (unless shorter periods are provided below).
- All internal mechanisms.
- Components and brackets.
- Fabric delamination.
- Operational cords for a full 7 years from the date of purchase.
- Repairs and/or replacements will be made with like or similar parts or products.
- Hunter Douglas motorization components are covered for 5 years from the date of purchase.

Hunter Douglas (or its licensed fabricator/distributor) will repair or replace the window fashion product or components found to be defective.

NOT COVERED

BY A LIFETIME LIMITED WARRANTY

- Any conditions caused by normal wear and tear.
- Abuse, accidents, misuse or alterations to the product.
- Exposure to the elements (sun damage, wind, water/moisture) and discoloration or fading over time.
- Failure to follow our instructions with respect to measurement, proper installation, cleaning or maintenance.
- Shipping charges, cost of removal and reinstallation.

TO OBTAIN WARRANTY SERVICE

1. Contact your original dealer (place of purchase) for warranty assistance.
2. Visit hunterdouglas.com for additional warranty information, frequently asked questions and access to service locations.
3. Contact Hunter Douglas at **(800) 789-0331** for technical support, certain parts free of charge, for assistance in obtaining warranty service or for further explanation of our warranty.

NOTE: In no event shall Hunter Douglas or its licensed fabricators/distributors be liable or responsible for incidental or consequential damages or for any other indirect damage, loss, cost or expense. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion or limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Different warranty periods and terms apply for commercial products and applications.

HunterDouglas 
hunterdouglas.com