

3.2X1.6X0.5 (mm) WiFi/Bluetooth Ceramic Chip Antenna Engineering Specification

1. Product Number

HLX321605A5



(1)Product Type	Chip Antenna
(2)Size Code	3.2x1.6x0.5mm
(3)Type Code	H2
(4)Packing	Plastic Packaging
(5)Frequency	2.45GHz

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2,
Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan
District, Shenzhen

Prepared by : JIEXI	Designed by : Jason	Checked by : Jason	Approved by : MR.FANG
TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification		DOCUMENT NO. YF3216H2X2G45	REV. B

2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *Bluetooth earphone systems
- *Hand-held devices when WiFi /Bluetooth functions are needed, e.g., Smart phone.
- *IEEE802.11 b/g/n
- *ZigBee
- *Wireless PCMCIA cards or USB dongle

4. Description

Yingfeng chip antenna series are specially designed for WiFi/Bluetooth applications. Based on yingfeng proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications (80 x 40 mm² ground plane)

5-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		3.2x1.6x0.5	mm
Working Frequency		2400~2500	MHz
VSWR		2 Max.	
Impedance		50	Ω
Polarization		Linear Polarization	
Gain	Peak	2.5 (typical)	dBi
	Efficiency	78 (typical)	%

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2,
Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street,
Baoan District, Shenzhen

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF3216H2) Engineering Specification


DOCUMENT
NO.

HLX321605A5


REV.
B

5-2. Return Loss & VSWR

Return Loss (S₁₁)

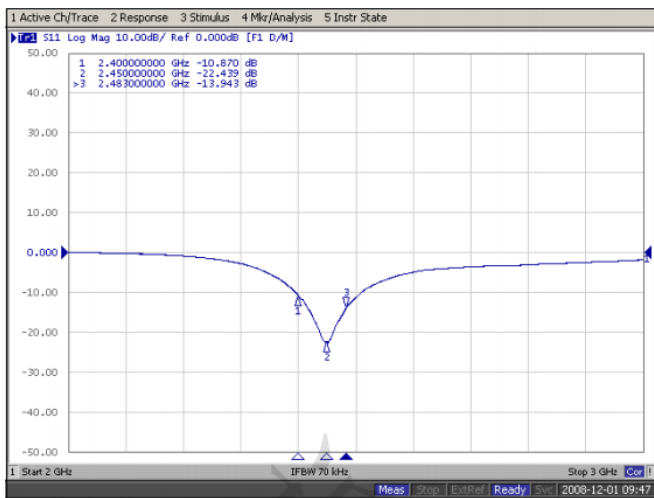


VSWR(S₁₁)

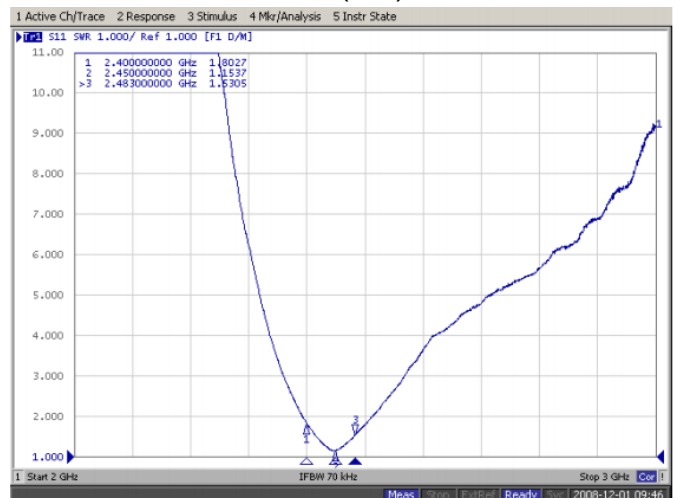

6. Antenna Dimensions & Test Board (unit: mm)

Dimension and Terminal Configuration

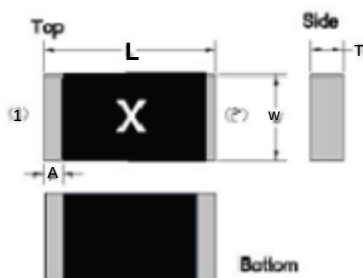

Dimension (mm)	
L	3.15±0.15
W	1.55±0.15
T	0.50±0.10
A	0.35±0.10

No.	Terminal Name
1	Feeding point
2	GND

b. Test Board with Antenna

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2, Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG


TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification

DOCUMENT NO.

HLX321605A5

REV.


B

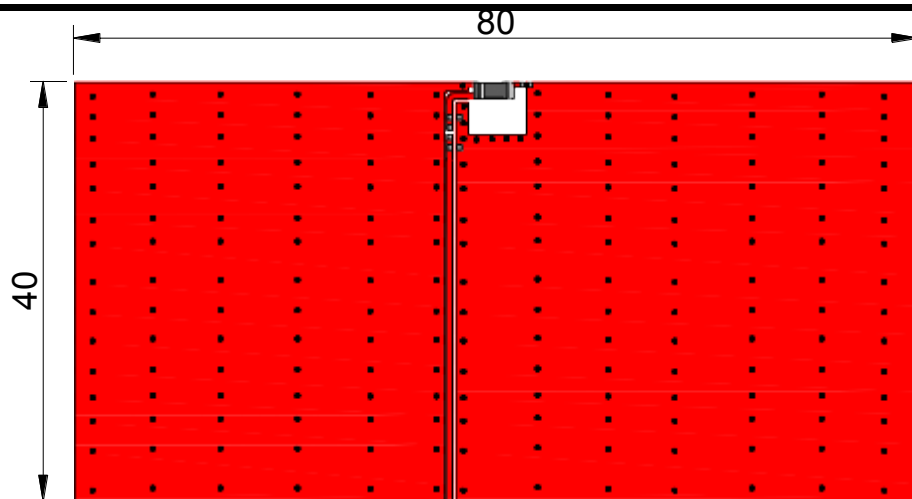

Unit: mm

7. Radiation Pattern (80 x 40 mm² ground plane)

7-1. 3D Gain Pattern @ 2442 MHz

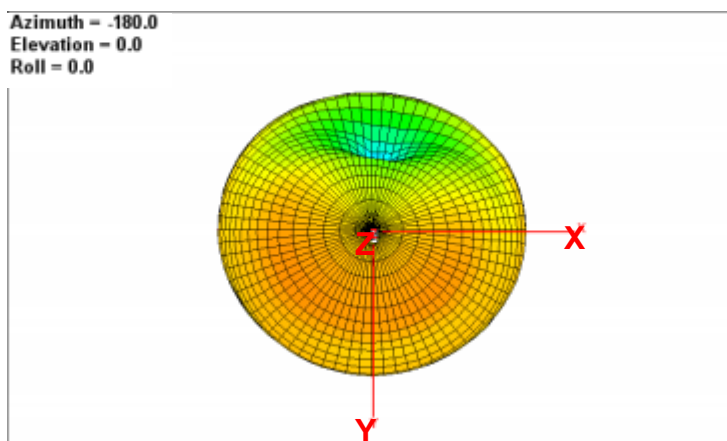

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2, Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG




TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification

DOCUMENT NO.

HLX321605A5

REV.

B

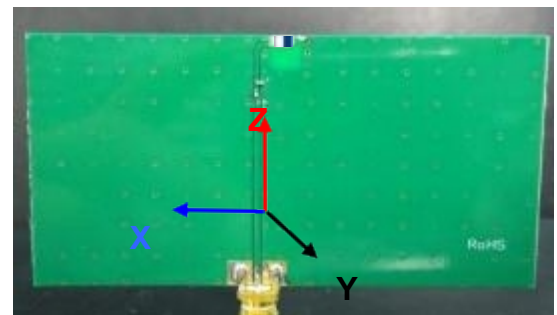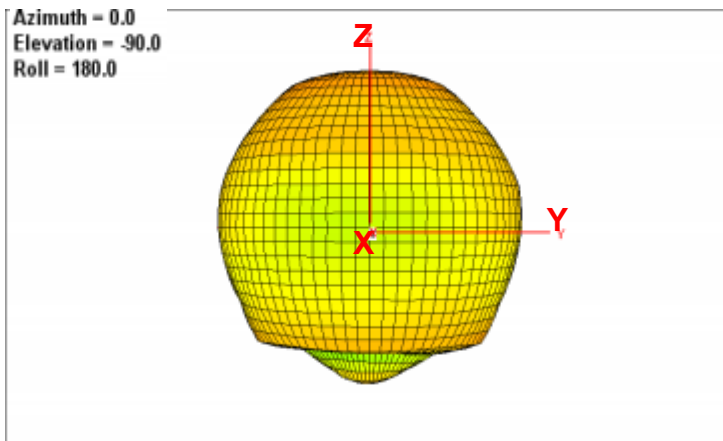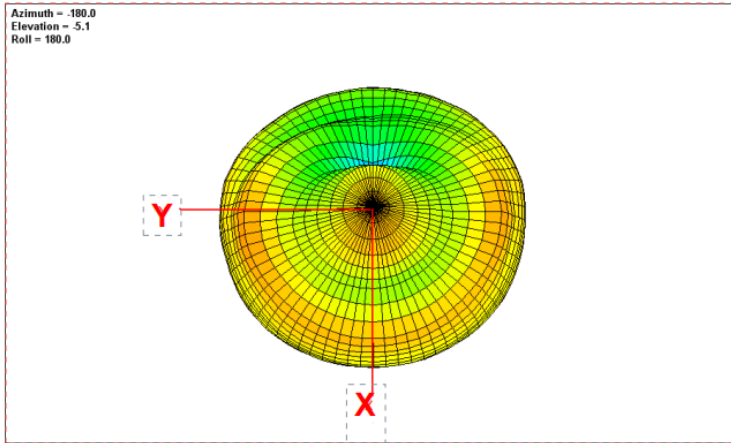

7-2. 3D Efficiency Table

Frequency(MHz)	2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
Efficiency (dB)	-1.4	-1.0	-0.9	-0.7	-0.7	-0.8	-0.9	-1.1	-1.2	-1.3	-1.4
Efficiency (%)	72.8	73.7	74.3	74.4	75.5	75.0	74.0	73.6	73.1	72.6	71.5
Gain (dBi)	2.1	2.2	2.3	2.4	2.5	2.5	2.4	1.8	1.7	1.6	1.4

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2, Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification


DOCUMENT NO.

HLX321605A5

REV.

B


7-3. 3D Efficiency vs. Frequency

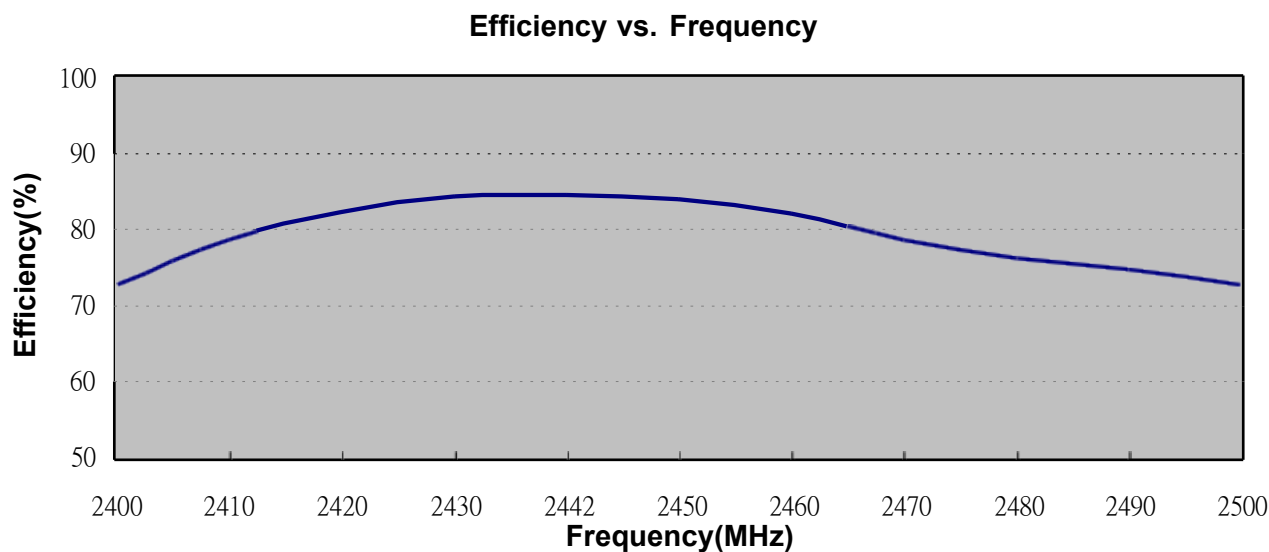

8. Layout Guide

a. Solder Land Pattern:

Land pattern for soldering (gray marking areas) is as shown below. Depending on Customer's requirement, matching circuit as shown below is also recommended.

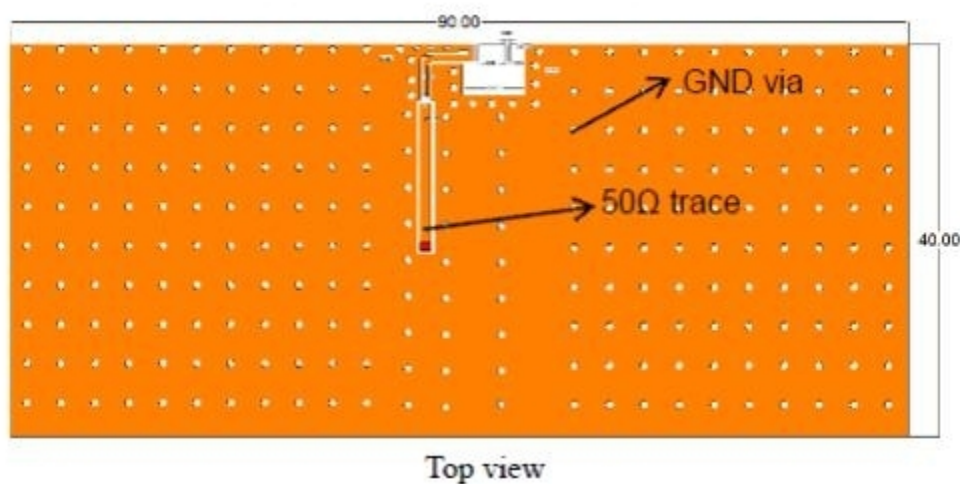

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2,
Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street,
Baoan District, Shenzhen

Prepared by : **JIEXI**

Designed by : **Jason**

Checked by : **Jason**


Approved by : **MR.FANG**

**TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF3216H2) Engineering Specification**

**DOCUMENT
NO.**

HLX321605A5

**REV.
B**

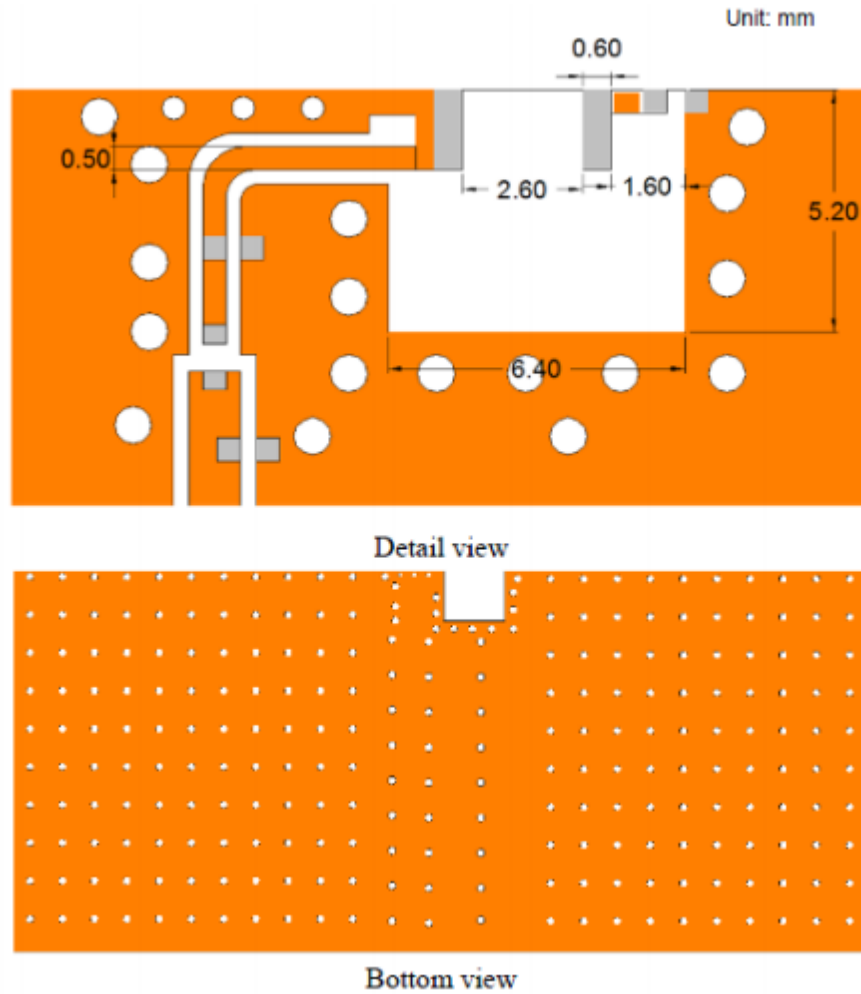


深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2,
Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan
District, Shenzhen

Prepared by : JIEXI	Designed by : Jason	Checked by : Jason	Approved by : MR.FANG
TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification	DOCUMENT NO.	HLX321605A5	REV.
			B


Frequency tuning

a. Chip antenna tuning scenario :

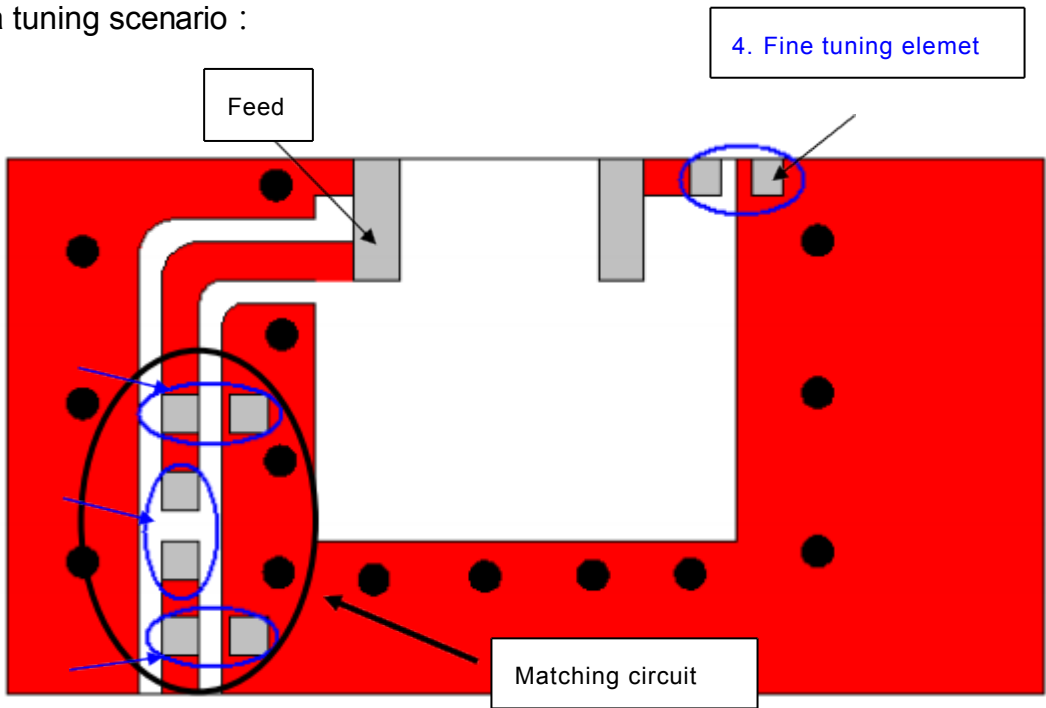

b. Matching circuit : (Center frequency is about 2442 MHz @ 80 x 40 mm² ground

e)

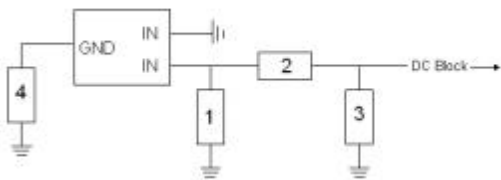

System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	1.2 pF*	Murata (0402)	±0.1 pF
2	10PF*	Murata(0402)	±0.5 PF
3	N/A*	-	-
Fine tuning element 4	1.5 pF*	Murata (0402)	±0.1 pF


*Typical reference values which may need to be changed when circuit boards or part vendors are different.

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2, Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen


Prepared by : JIEXI	Designed by : Jason	Checked by : Jason	Approved by : MR.FANG
TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification		DOCUMENT NO. HLX321605A5	REV. B

c. Fine tuning element vs. Center frequency

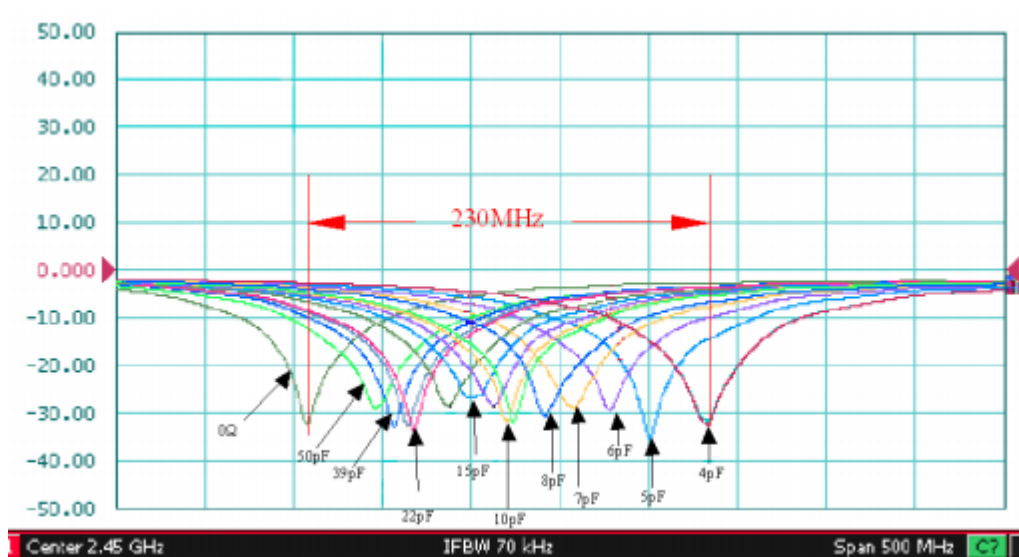

10. Soldering Conditions

a. Typical Soldering Profile for Lead-free Process

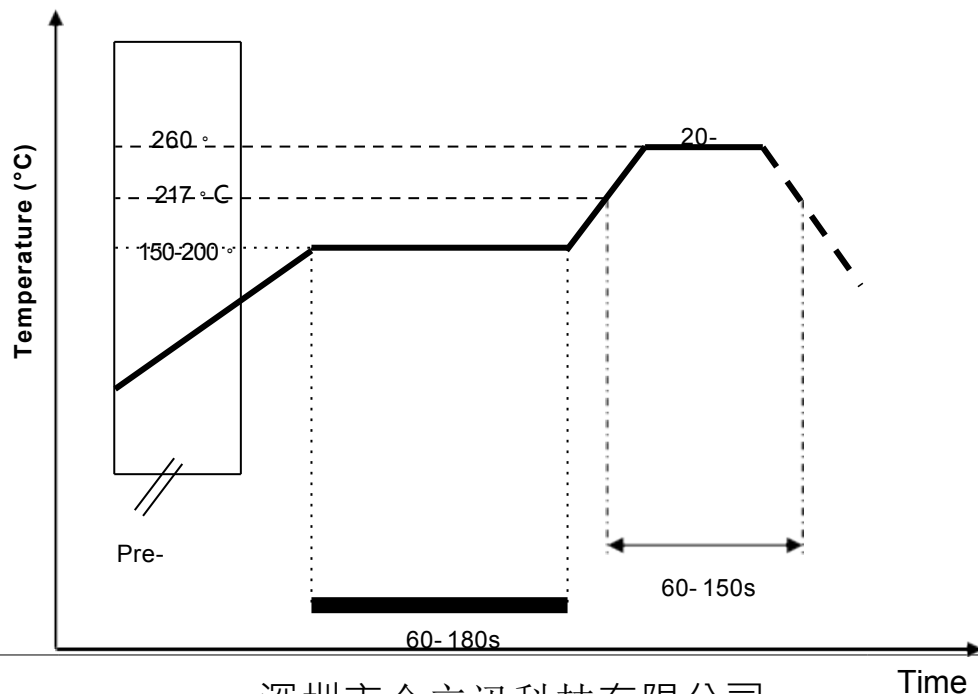

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2, Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen

Prepared by : JIEXI	Designed by : Jason	Checked by : Jason	Approved by : MR.FANG
TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification		DOCUMENT NO. HLX321605A5	REV. B

11. Packing

(1) Quantity/Reel: 6000 pcs/Reel:

Reel and Taping Specification

Reel Specification

The diagram shows a top view and a side view of a reel. The top view is a circle with a central hole of diameter ϕD and four outer holes of diameter ϕB . The distance from the center to the outer holes is A , and the distance between the outer holes is ϕC . The side view shows the reel's thickness W and the diameter of the central hole ϕD and the outer hole ϕM .

TYPE	SIZE		A	ϕB	ϕC	ϕD	W	ϕM
3216	7"	5K/Reel	2.0 $\pm$ 0.5	13.5 $\pm$ 1.0	21 $\pm$ 1.0	60 $\pm$ 1.0	11.5 $\pm$ 2.0	178 $\pm$ 2.0

Tapping Specification



The diagram shows a top view and a side view of a carrier tape. The top view shows a series of holes with diameter ϕD and pitch P . The distance from the center of the first hole to the center of the last hole is A . The distance from the center of the first hole to the center of the last hole is B . The distance from the center of the first hole to the center of the last hole is C . The distance from the center of the first hole to the center of the last hole is D . The distance from the center of the first hole to the center of the last hole is E . The distance from the center of the first hole to the center of the last hole is F . The distance from the center of the first hole to the center of the last hole is G . The distance from the center of the first hole to the center of the last hole is H . The distance from the center of the first hole to the center of the last hole is I . The side view shows the tape's thickness W and the height of the carrier I .

Packaging	Type	A	B	W	E	F	G	H	T	ϕD	P
Paper Type	3216	1.90 $\pm$ 0.20	3.50 $\pm$ 0.20	8.0 $\pm$ 0.20	1.75 $\pm$ 0.10	3.5 $\pm$ 0.05	4.0 $\pm$ 0.10	2.0 $\pm$ 0.05	0.75 $\pm$ 0.10	1.50 +0.10 -0	4.0 $\pm$ 0.1

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2, Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen

Prepared by : JIEXI	Designed by : Jason	Checked by : Jason	Approved by : MR.FANG
TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification		DOCUMENT NO.	HLX321605A5
			REV. B

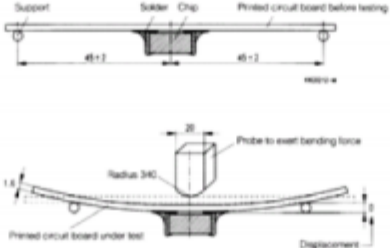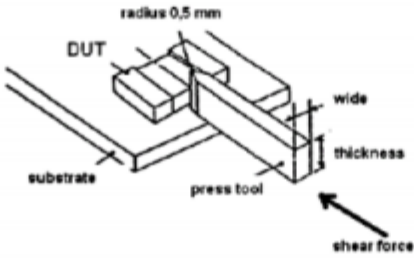Board Flex (SMD)	1. Mounting method: IR-Reflow. PCB Size (L:100 × W:40 × T:1.6mm) 2. Apply the load in direction of the arrow until bending reaches 2 mm. 	No Visible Damage.	AEC-Q200 005
Adhesion	Force of 1.8Kg for 60 seconds. 	No Visible Damage Magnification of 20X or greater may be employed for inspection of the mechanical integrity of the device body terminals and body/terminal junction.	AEC-Q200 006
Physical Dimension	Any applicable method using x10 magnification, micrometers, calipers, gauges, contour projectors, or other measuring equipment, capable of determining the actual specimen dimensions.	In accordance with specification.	JESD22 JB100
Vibration	5g's for 20 min., 12 cycles each of 3 orientations Note: Use 8"X5" PCB .031" thick 7 secure points on, one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.	No Visible Damage.	MIL-STD-202 Method 204
Mechanical Shock	Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks) Peak value: 1,500g's Duration: 0.5ms Velocity change: 15.4 ft/s Waveform: Half-sine	No Visible Damage.	MIL-STD-202 Method 213
Humidity Bias	1. Humidity: 85% R.H., Temperature: 85 ± 2 °C. 2. Time: 500 ± 24 hours. 3. Measurement at 24 ± 2hrs after test condition.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 Method 106

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2, Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan District, Shenzhen

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification

DOCUMENT NO.

HLX321605A5

REV.

B

Reliability Table

Test Item	Procedure	Requirements Ceramic Type	Remark (Reference)
Electrical Characterization		Fulfill the electrical specification	User Spec.
Thermal Shock	1. Preconditioning: 50 ± 10°C / 1 hr, then keep for 24 ± 1 hrs at room temp. 2. Initial measure: Spec: refer Initial spec. 3. Rapid change of temperature test: -30°C to +85°C; 100 cycles; 15 minutes at Lower category temperature; 15 minutes at Upper category temperature.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 107
Temperature Cycling	1. Initial measure: Spec: refer Initial spec. 2. 100 Cycles (-30°C to +85°C), Soak Mode=1 (2 Cycle/hours). 3. Measurement at 24 ± 2Hours after test condition.	No Visible Damage. Fulfill the electrical specification.	JESD22 JA104
High Temperature Exposure	1. Initial measure: Spec: refer Initial spec. 2. Unpowered; 500hours @ T=+85°C. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Low Temperature Storage	1. Initial measure: Spec: refer Initial spec. 2. Unpowered: 500hours @ T= -30°C. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Solderability (SMD Bottom Side)	Dipping method: a. Temperature: 235 ± 5°C b. Dipping time: 3 ± 0.5s	The solder should cover over 95% of the critical area of bottom side.	IEC 60384-21/22 4.10
Soldering Heat Resistance (RSH)	Preheating temperature: 150 ± 10°C. Preheating time: 1~2 min. Solder temperature: 260 ± 5°C. Dipping time: 5 ± 0.5s	No Visible Damage.	IEC 60384-21/22 4.10

深圳市合立讯科技有限公司

Shenzhen Helixun Technology Co., LTD. Address: 1905, Building 2,
Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Baoan
District, Shenzhen

Prepared by : JIEXI	Designed by : Jason	Checked by : Jason	Approved by : MR.FANG
TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF3216H2) Engineering Specification		DOCUMENT NO. HLX321605A5	REV. B