

惠州启泰电子科技有限公司

Manufacturer:Huizhou Qitai Electronic Technology Co., LTD

Address:Plant 1, No.17, Kekebei Road, Shiwan Town, Boluo County, Huizhou City
(Hongyang Changlong Zhichuang Park, Building 1, 7th Floor A Area)



SPECIFICATIONS SHEET

规格图面

CUSTOMER :

客户

摩菲

DESCRIPTION :

品名描述

Y.019.0035

CUSTOMER P/N :

客户品名

PART NUMBER :

制造商料号

DATE OF APPLICATION :

提出日期

2024-4-30

CLASSIFICATION OF SPEC. PRESENTATION. (Tick the relevant box "√")

规格图面提出区分

☐ New application 新规格

☒ New part is added to accepted specification 新产品规格追加记录

☐ Revision of accepted specification 既存规格图面变更

ACCEPTANCE STAMP (客户受领印)

APPROVAL BY

承认

CHECK BY

审查

PREPARE BY

制作

昆子奇

陈斌

ADDRESS : 3rd Floor, No. 181, Mingyue 2nd Road, Shiwan Town, Boluo County, Huizhou city

TELEPHONE : 0752-6668681

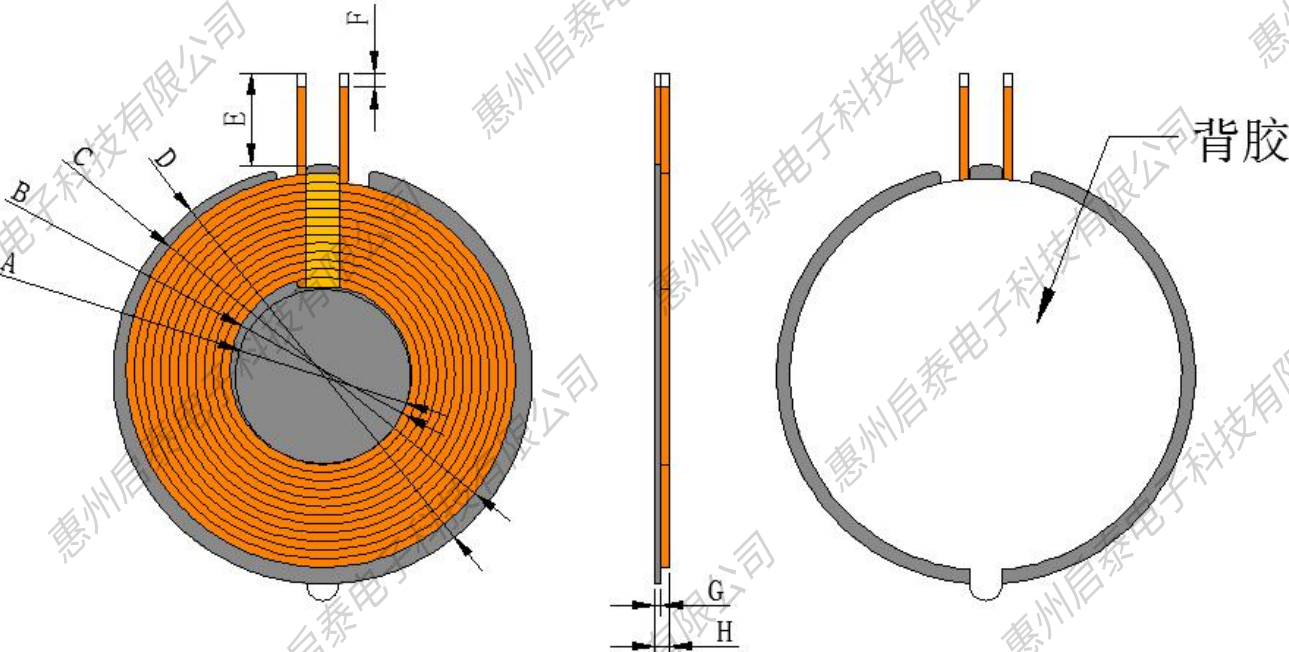
E-MAIL : 839689578@qq.com

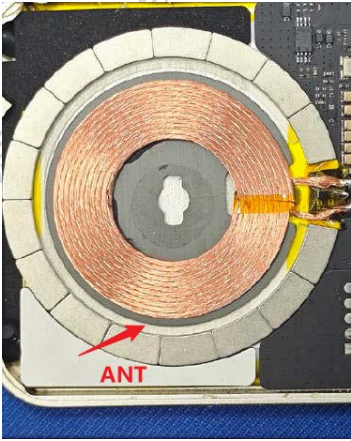
We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.

Address: Plant 1, No.17, Kekebei Road, Shiwan Town, Boluo County, Huizhou City
(Hongyang Changlong Zhichuang Park, Building 1, 7th Floor A Area)

Y. 019.0035

1 of 3

惠州启泰电子科技有限公司							
Huizhou Qitai Electronic Technology Co., LTD							
Specification 规格内容				CUSTOMER P/N : 客 户 品 名		摩菲	
				PART NUMBER : 制 造 商 料 号		Y.019.0035	
1. DIMENSIONS (外形尺寸) : (Unit: mm)							
单位 (Unit) : 毫米 (mm)							
							
A	B	C	D	E	F	G	H
19.4±0.3	20.5±0.5	39.5±1	42-42.5	10±1	2±1	0.65±0.1	1.7max
1. 背胶为白色双面胶。 2. 线圈贴合位置居中。 3. 总厚度不含离型纸。							
APPROVED BY 承 认	CHECKED BY 审 查	PREPARED BY 制 作		DATE 日期		PAGE 页 码	
昆子奇		陈斌		2024-4-30		2 of 3	

惠州启泰电子科技有限公司					
Huizhou Qitai Electronic Technology Co., LTD					
Specification 规格内容		CUSTOMER P/N : 客 户 品 名		摩菲	
		PART NUMBER : 制 造 商 料 号		Y. 019. 0035	
2. WINDING DETAILS(绕线详细说明) Coil1					
圈数 Turns	线径 Wire Dia	绕线方式疏/密 Wdg. Type Spred/Close	绕线方向 Wdg.Direction	相交 是/否 Intersect Yes/Not	
11TS	0.08*75P热风自粘线	密绕 (Close)	逆绕	是 (Yes)	
3. 电气特性 (ELECTRICAL CHARACTERISTICS) : 温度 TEMPERATURE:25±10℃,湿度 RELATIVE HUMIDITY:65±10%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
Coil 1					
1.	IND	S-F	7.8uh±10%	100kHz/V	UC2906A
2.	Q	S-F	60Min	100kHz/V	UC2906A
3.	DCR	S-F	55m Ω Max	100kHz/V	UC2906A
					
APPROVED BY 承 认	CHECKED BY 审 查	PREPARED BY 制 作	DATE 日期	PAGE 页 码	
昆子奇		陈璇	2024-4-30	3 of 3	