


TEST REPORT

Product : Harmony
Trade mark : 
Model/Type reference : Harmony
Serial Number : N/A
Report Number : EED32I00289401
FCC ID : 2AG5A-BRCHAR
Date of Issue : Dec. 07, 2016
Test Standards : 47 CFR Part 15 Subpart C (2015)
Test result : PASS

Prepared for:

BrandCharger Ltd

**Flat H, 7/F, Mai Luen Industrial Building 23 Kung Yip Street
Kwai Chung Hong Kong**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385**

Tested By:

Tom chen

Tom chen (Test Project)

Compiled by:

Kevin lan

Kevin lan (Project Engineer)

Reviewed by:

Kevin yang

Kevin yang (Reviewer)

Approved by:

Sheek Luo

Sheek Luo (Lab supervisor)

Date:

Dec. 07, 2016

Check No.: 2457575298



2 Version

Version No.	Date	Description
00	Dec. 07, 2016	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample and the sample information are provided by the client.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	10
7 EQUIPMENT LIST.....	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	13
Appendix A): 20dB Occupied Bandwidth.....	14
Appendix B): Carrier Frequency Separation.....	18
Appendix C): Dwell Time.....	22
Appendix D): Hopping Channel Number.....	26
Appendix E): Conducted Peak Output Power.....	28
Appendix F): Band-edge for RF Conducted Emissions.....	32
Appendix G): RF Conducted Spurious Emissions.....	37
Appendix H): Pseudorandom Frequency Hopping Sequence.....	44
Appendix I): Antenna Requirement.....	45
Appendix J): AC Power Line Conducted Emission.....	46
Appendix K): Restricted bands around fundamental frequency (Radiated).....	49
Appendix L): Radiated Spurious Emissions.....	58
PHOTOGRAPHS OF TEST SETUP.....	66
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	68

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

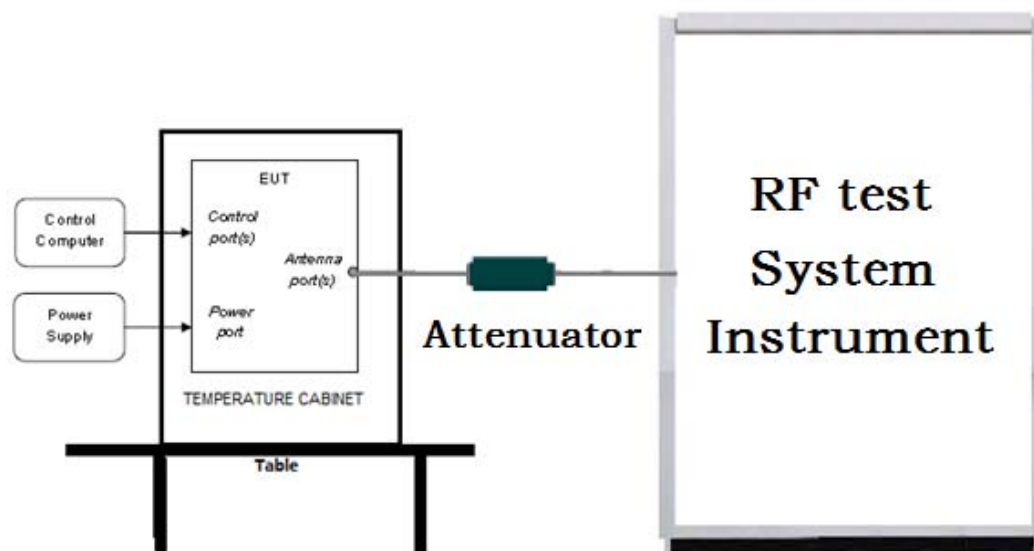

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

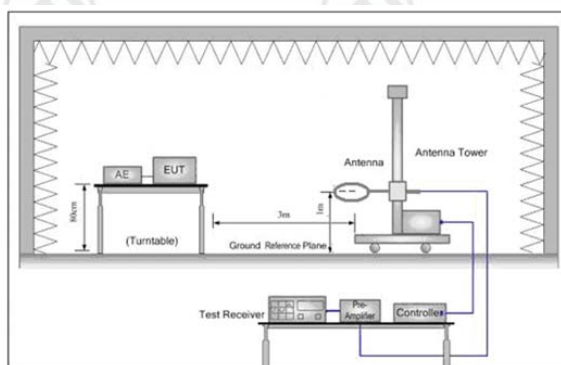


Figure 1. Below 30MHz

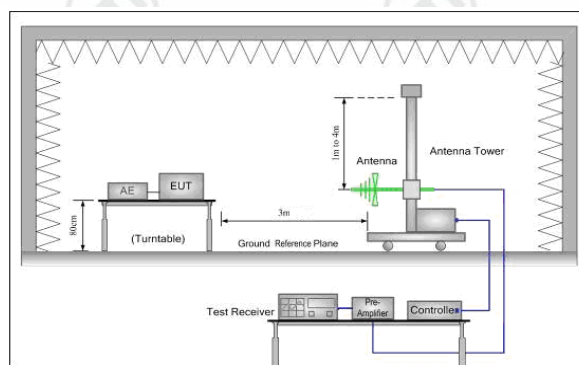


Figure 2. 30MHz to 1GHz


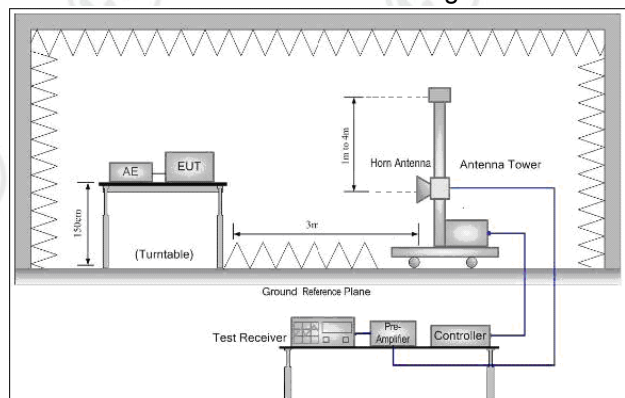


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

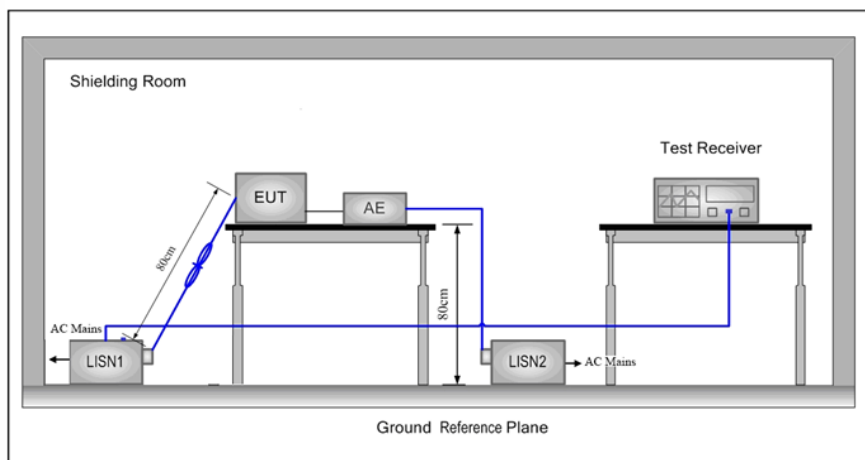

5.2 Test Environment

Operating Environment:	
Temperature:	22°C
Humidity:	55% RH
Atmospheric Pressure:	1010 mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	-5.650	-5.644	-5.641

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	-4.445	-4.440	-4.438
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	-4.049	-4.041	-4.034


Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	BrandCharger Ltd
Address of Applicant:	Flat H, 7/F, Mai Luen Industrial Building 23 Kung Yip Street Kwai Chung Hong Kong
Manufacturer:	CCA DESIGNING&MANUFACTURING LIMITED
Address of Manufacturer:	BLD 120-121TH, PINGHUAN IND.CITY PINGSHAN TOWN, SHENZHEN, 518118
Factory:	CCA DESIGNING&MANUFACTURING LIMITED
Address of Factory:	BLD 120-121TH, PINGHUAN IND.CITY PINGSHAN TOWN, SHENZHEN, 518118

6.2 General Description of EUT

Product Name:	Harmony
Model No.(EUT):	Harmony
Trade Mark:	
EUT Supports Radios application:	BT 4.2 Dual mode(2402MHz-2480MHz)
Power Supply:	3.7V 2000mAh(Lithium battery)
USB Line:	62.5(Unshielded)
Sample Received Date:	Nov. 09, 2016
Sample tested Date:	Nov. 09, 2016 to Dec. 05, 2016

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	BT 4.2 Dual mode(2402MHz-2480MHz)						
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)						
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK						
Number of Channel:	79						
Hopping Channel Type:	Adaptive Frequency Hopping systems						
Sample Type:	Portable production						
Antenna Type:	Chip Antenna						
Antenna Gain:	0.5dBi						
Test Power Grade:	NA						
Test Software of EUT:	(manufacturer declare) ACTsBTAPP_Index 7						
Test Voltage:	AC 120V/60Hz, AC 240V/50Hz						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz

6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Supplied by
USB Power Adapter	Apple	A1402	CTI

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-31-2017
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2017
PC-1	Lenovo	R4960d	---	04-01-2016	03-31-2017
power meter & power sensor	R&S	OSP120	101374	04-01-2016	03-31-2017
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-31-2017
BT&Wi-Fi Automatic test software	JS Tonscend	JS1120-2	---	04-01-2016	03-31-2017

Conducted disturbance Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-15-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
LISN	R&S	ENV216	100098	06-16-2016	06-15-2017
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-15-2017
Voltage Probe	R&S	ESH2-Z3	--	07-09-2014	07-07-2017
Current Probe	R&S	EZ17	100106	06-16-2016	06-15-2017
ISN	TESEQ GmbH	ISN T800	30297	01-29-2015	01-27-2017

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2016	05-22-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-04-2016	02-03-2017
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574	374	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
Multi device Controller	maturo	NCD/070/1071 1112	---	01-12-2016	01-11-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-31-2017
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Cable line	Fulai(7M)	SF106	5219/6A	01-12-2016	01-11-2017
Cable line	Fulai(6M)	SF106	5220/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5216/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5217/6A	01-12-2016	01-11-2017
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-12-2016	01-11-2017

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)


Appendix A): 20dB Occupied Bandwidth



Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9872	0.91641	PASS	Peak detector
GFSK	MCH	0.9890	0.91578	PASS	
GFSK	HCH	0.9888	0.91595	PASS	
$\pi/4$ DQPSK	LCH	1.291	1.1817	PASS	
$\pi/4$ DQPSK	MCH	1.297	1.1841	PASS	
$\pi/4$ DQPSK	HCH	1.293	1.1944	PASS	
8DPSK	LCH	1.288	1.1749	PASS	
8DPSK	MCH	1.283	1.1758	PASS	
8DPSK	HCH	1.295	1.1882	PASS	

Test Graph

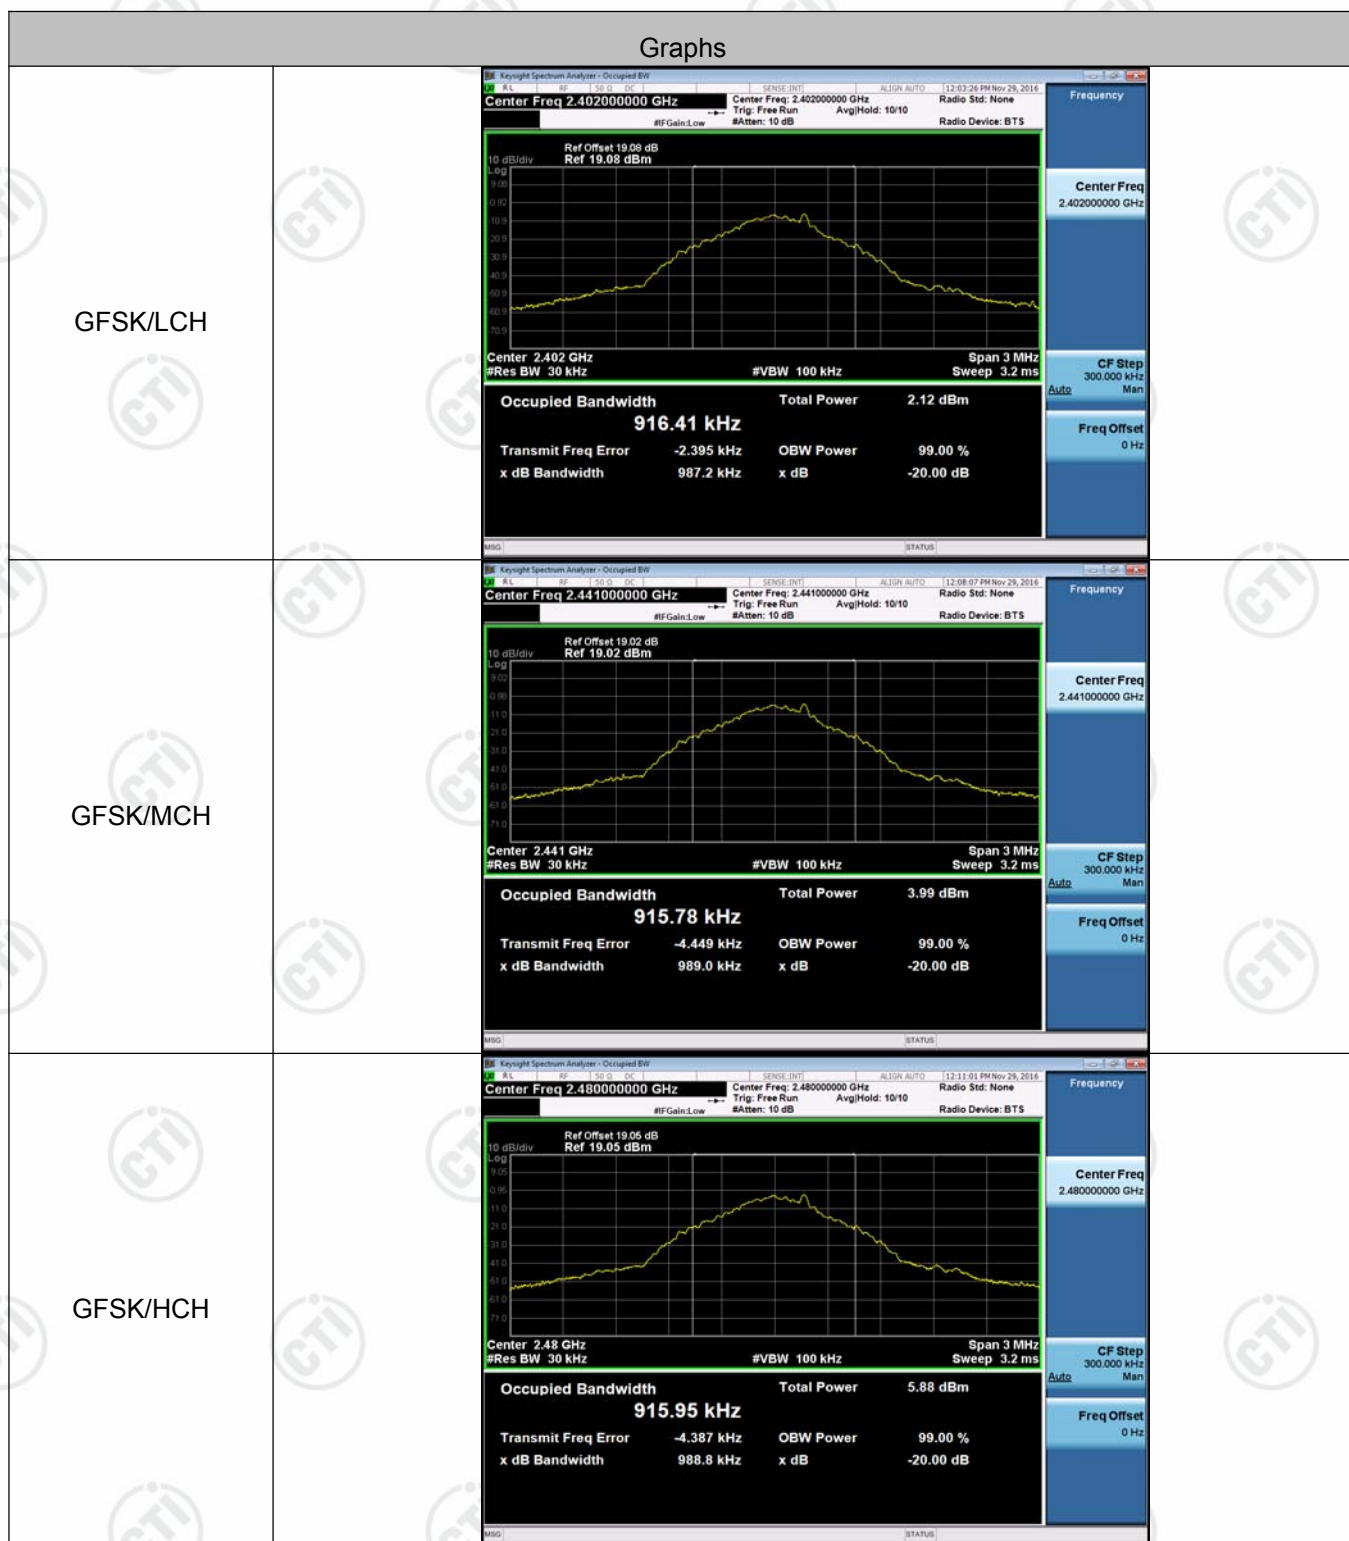
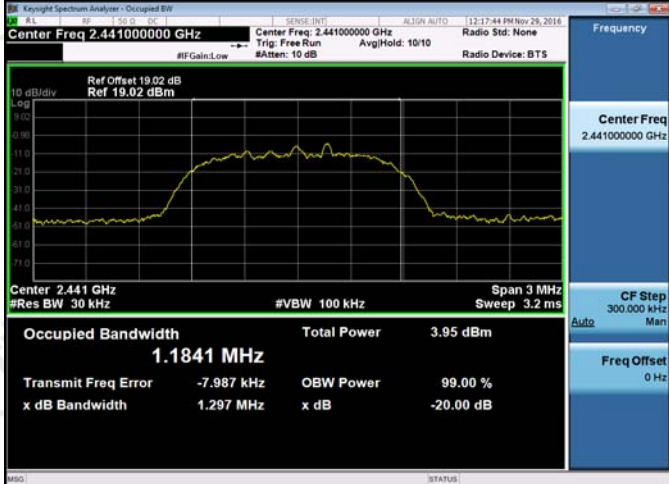
<p>$\pi/4$DQPSK/LCH</p>	 <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 1.1817 MHz</p> <p>Total Power 1.97 dBm</p> <p>Transmit Freq Error -8.023 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.291 MHz</p> <p>x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/MCH</p>	 <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 1.1841 MHz</p> <p>Total Power 3.95 dBm</p> <p>Transmit Freq Error -7.987 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.297 MHz</p> <p>x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/HCH</p>	 <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 1.1944 MHz</p> <p>Total Power 5.91 dBm</p> <p>Transmit Freq Error -6.758 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.293 MHz</p> <p>x dB -20.00 dB</p>

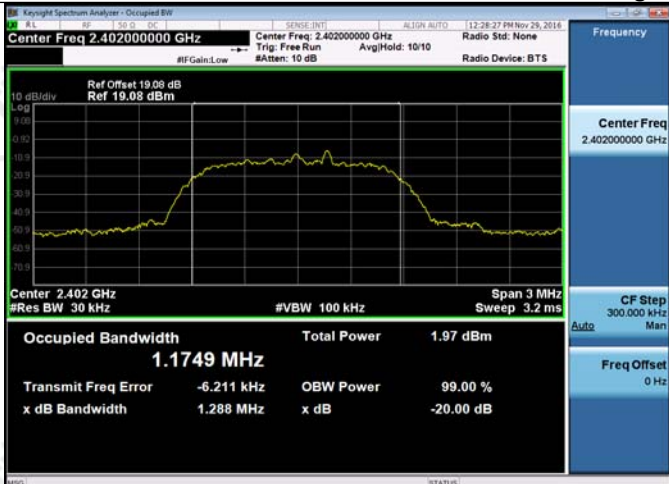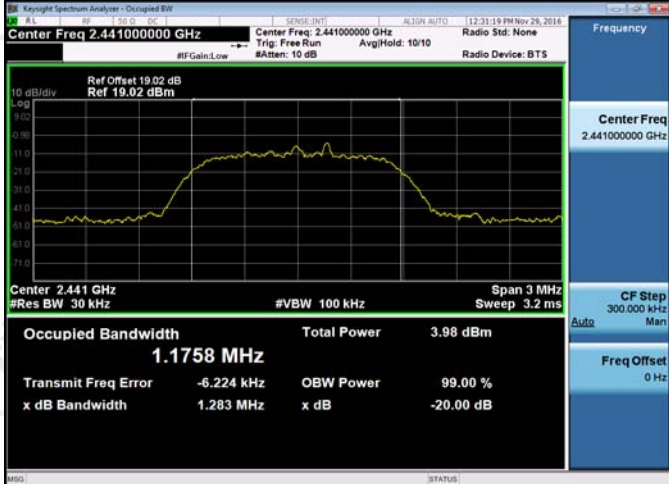
8DPSK/LCH	 <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 19.08 dB</p> <p>Ref: 19.08 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1749 MHz</p> <p>Total Power: 1.97 dBm</p> <p>Transmit Freq Error: -6.211 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.288 MHz</p> <p>x dB: -20.00 dB</p>
8DPSK/MCH	 <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 19.02 dB</p> <p>Ref: 19.02 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1758 MHz</p> <p>Total Power: 3.98 dBm</p> <p>Transmit Freq Error: -6.224 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.283 MHz</p> <p>x dB: -20.00 dB</p>
8DPSK/HCH	 <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 19.05 dB</p> <p>Ref: 19.05 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1882 MHz</p> <p>Total Power: 5.94 dBm</p> <p>Transmit Freq Error: -5.075 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.295 MHz</p> <p>x dB: -20.00 dB</p>




Appendix B): Carrier Frequency Separation




Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.010	PASS
GFSK	MCH	0.988	PASS
GFSK	HCH	1.084	PASS
$\pi/4$ DQPSK	LCH	0.962	PASS
$\pi/4$ DQPSK	MCH	1.024	PASS
$\pi/4$ DQPSK	HCH	1.080	PASS
8DPSK	LCH	0.994	PASS
8DPSK	MCH	1.110	PASS
8DPSK	HCH	0.996	PASS

Test Graph

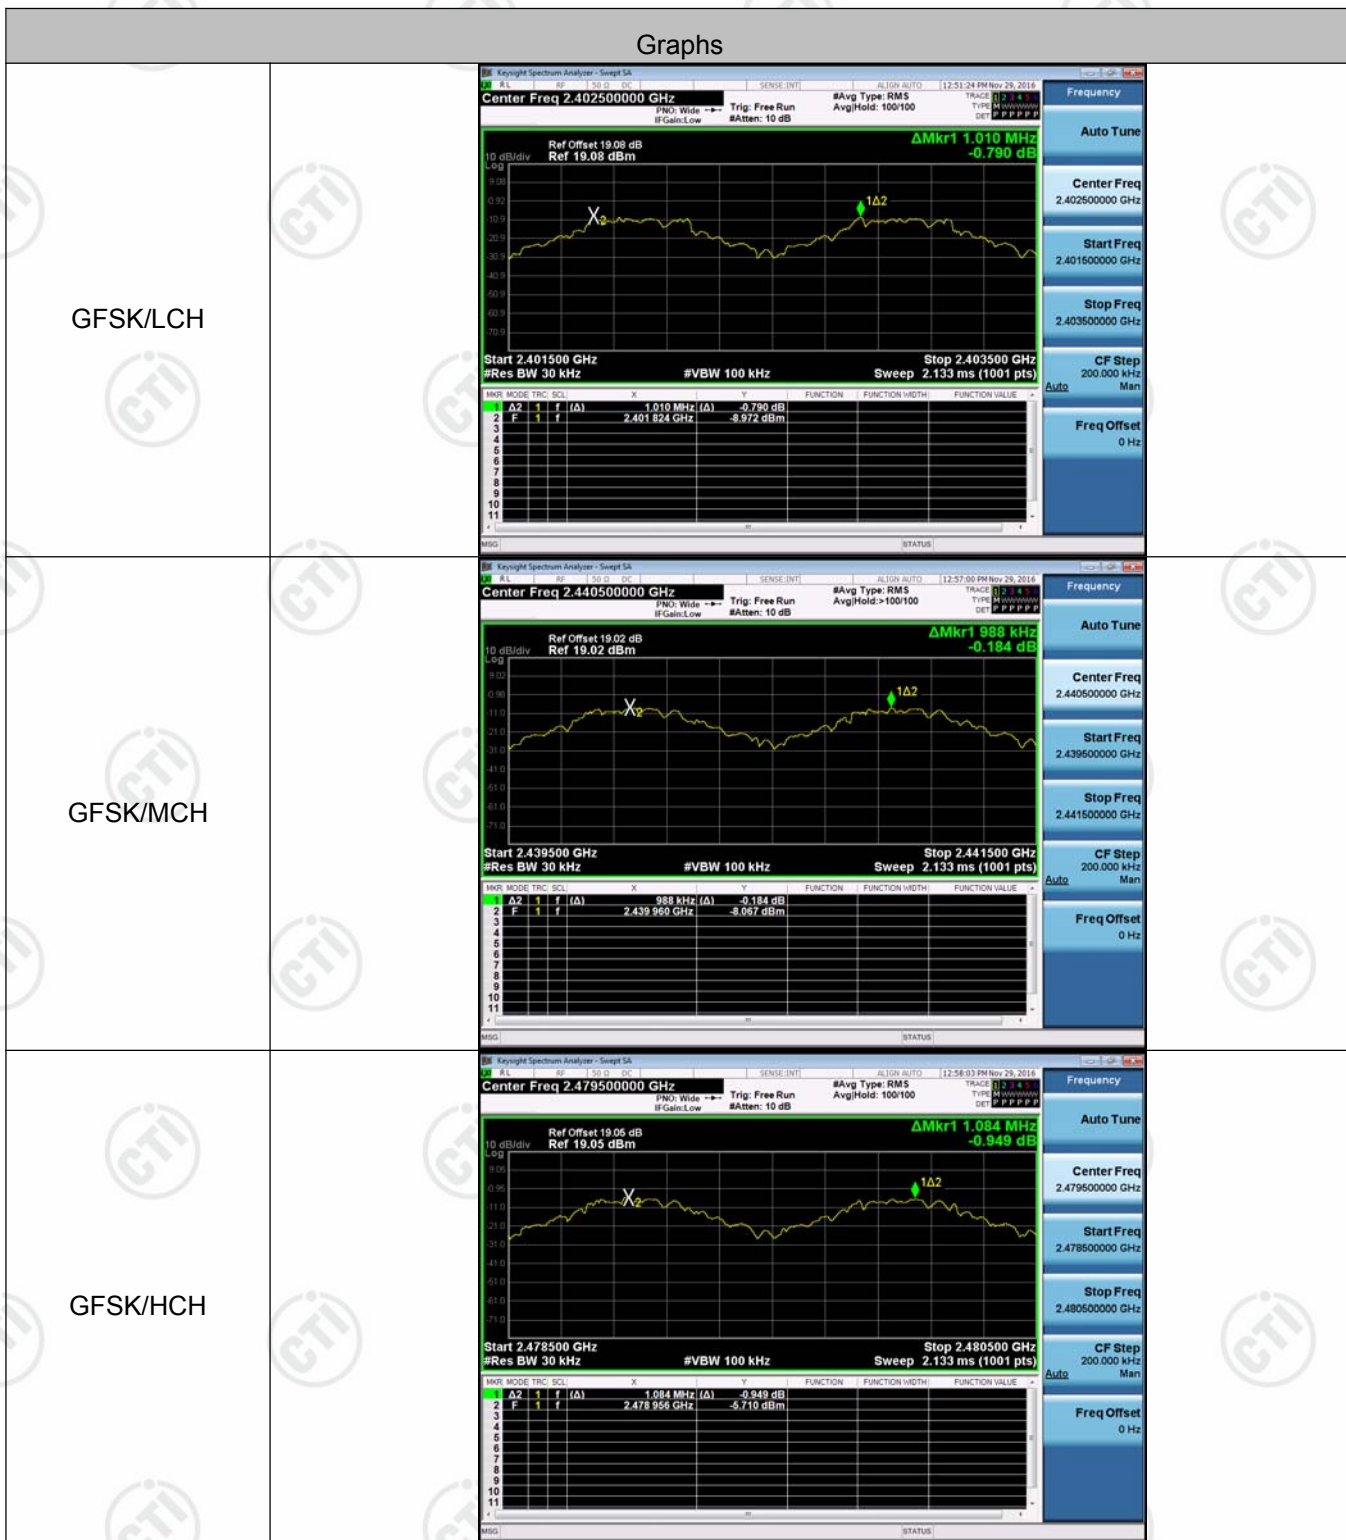
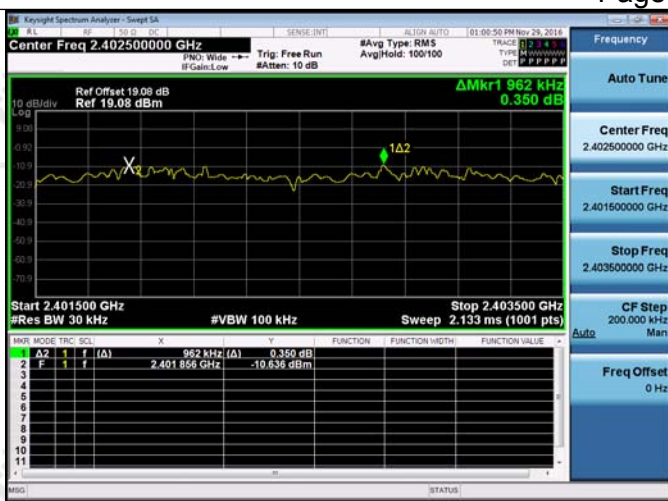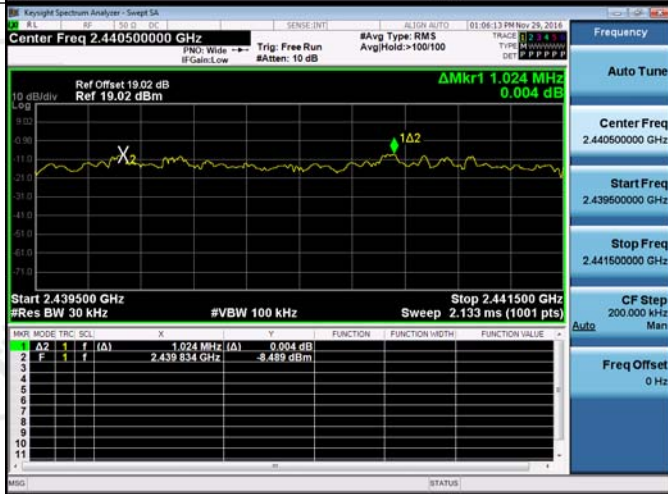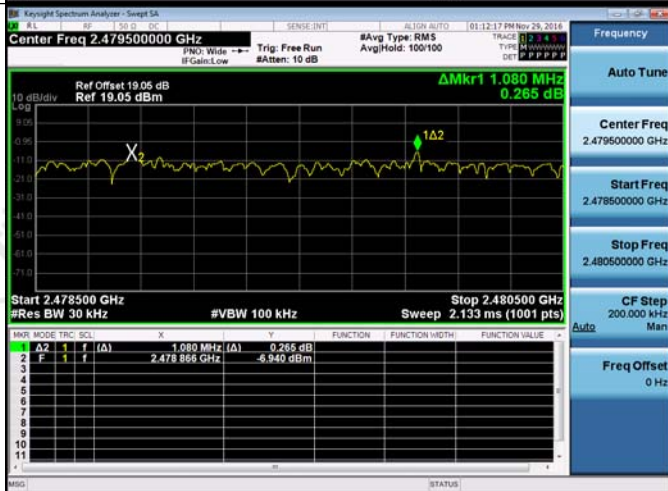
<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

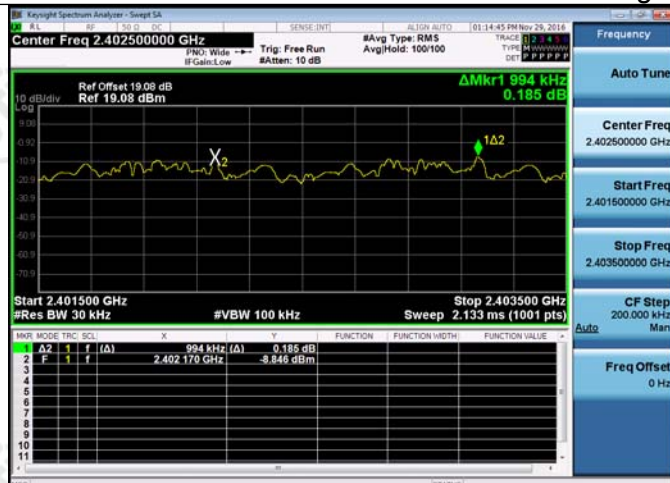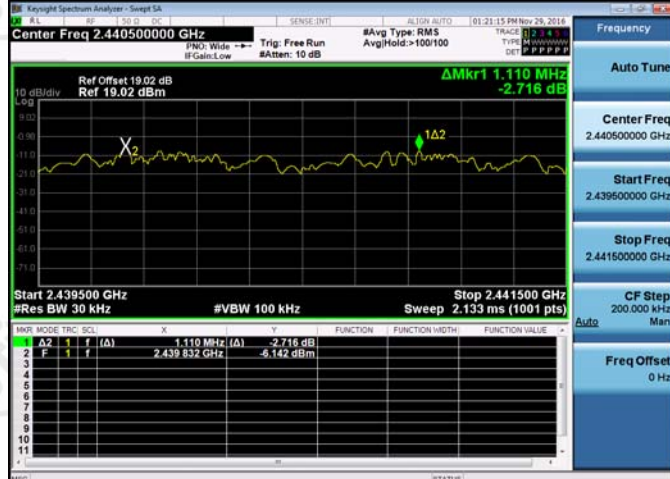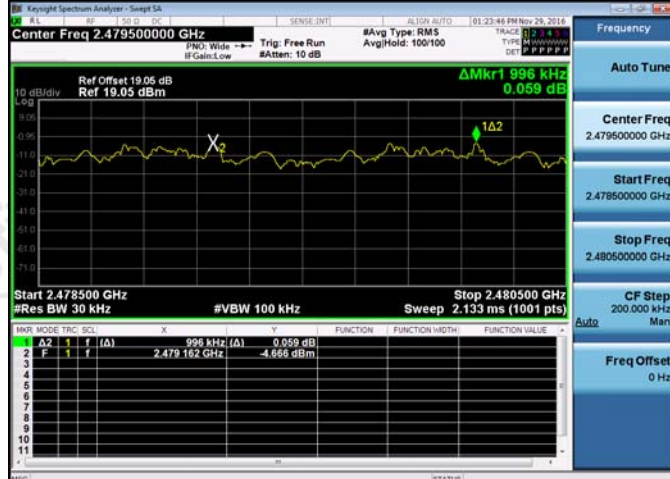8DPSK/LCH	 <p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>ΔMkr1 994 kHz 0.185 dB</p> <p>Start 2.401500 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Stop 2.403500 GHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION METH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>994 kHz (Δ)</td><td></td><td></td><td>0.185 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 170 GHz</td><td></td><td></td><td>-8.846 dBm</td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	994 kHz (Δ)			0.185 dB	2	F	1	f		2.402 170 GHz			-8.846 dBm
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	Δ2	1	f	(Δ)	994 kHz (Δ)			0.185 dB																				
2	F	1	f		2.402 170 GHz			-8.846 dBm																				
8DPSK/MCH	 <p>Center Freq 2.440500000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>ΔMkr1 1.110 MHz -2.716 dB</p> <p>Start 2.439500 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Stop 2.441500 GHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION METH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.110 MHz (Δ)</td><td></td><td></td><td>-2.716 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.439 832 GHz</td><td></td><td></td><td>-8.142 dBm</td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.110 MHz (Δ)			-2.716 dB	2	F	1	f		2.439 832 GHz			-8.142 dBm
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	Δ2	1	f	(Δ)	1.110 MHz (Δ)			-2.716 dB																				
2	F	1	f		2.439 832 GHz			-8.142 dBm																				
8DPSK/HCH	 <p>Center Freq 2.479500000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>ΔMkr1 996 kHz 0.099 dB</p> <p>Start 2.478500 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Stop 2.480500 GHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>NR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION METH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>996 kHz (Δ)</td><td></td><td></td><td>0.099 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.479 162 GHz</td><td></td><td></td><td>-4.666 dBm</td></tr></table>	NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	996 kHz (Δ)			0.099 dB	2	F	1	f		2.479 162 GHz			-4.666 dBm
NR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	Δ2	1	f	(Δ)	996 kHz (Δ)			0.099 dB																				
2	F	1	f		2.479 162 GHz			-4.666 dBm																				


Appendix C): Dwell Time

Result Table




Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.363533	320	0.116	0.64	PASS
GFSK	DH1	MCH	0.362266	320	0.116	0.64	PASS
GFSK	DH1	HCH	0.363534	320	0.116	0.64	PASS
GFSK	DH3	LCH	1.6188	160	0.259	0.89	PASS
GFSK	DH3	MCH	1.6188	160	0.259	0.89	PASS
GFSK	DH3	HCH	1.6188	160	0.259	0.89	PASS
GFSK	DH5	LCH	2.86774	106.7	0.306	0.93	PASS
GFSK	DH5	MCH	2.86773	106.7	0.306	0.93	PASS
GFSK	DH5	HCH	2.86774	106.7	0.306	0.93	PASS

Remark : All modes are tested, only the worst mode GFSK is reported.

Test Graph

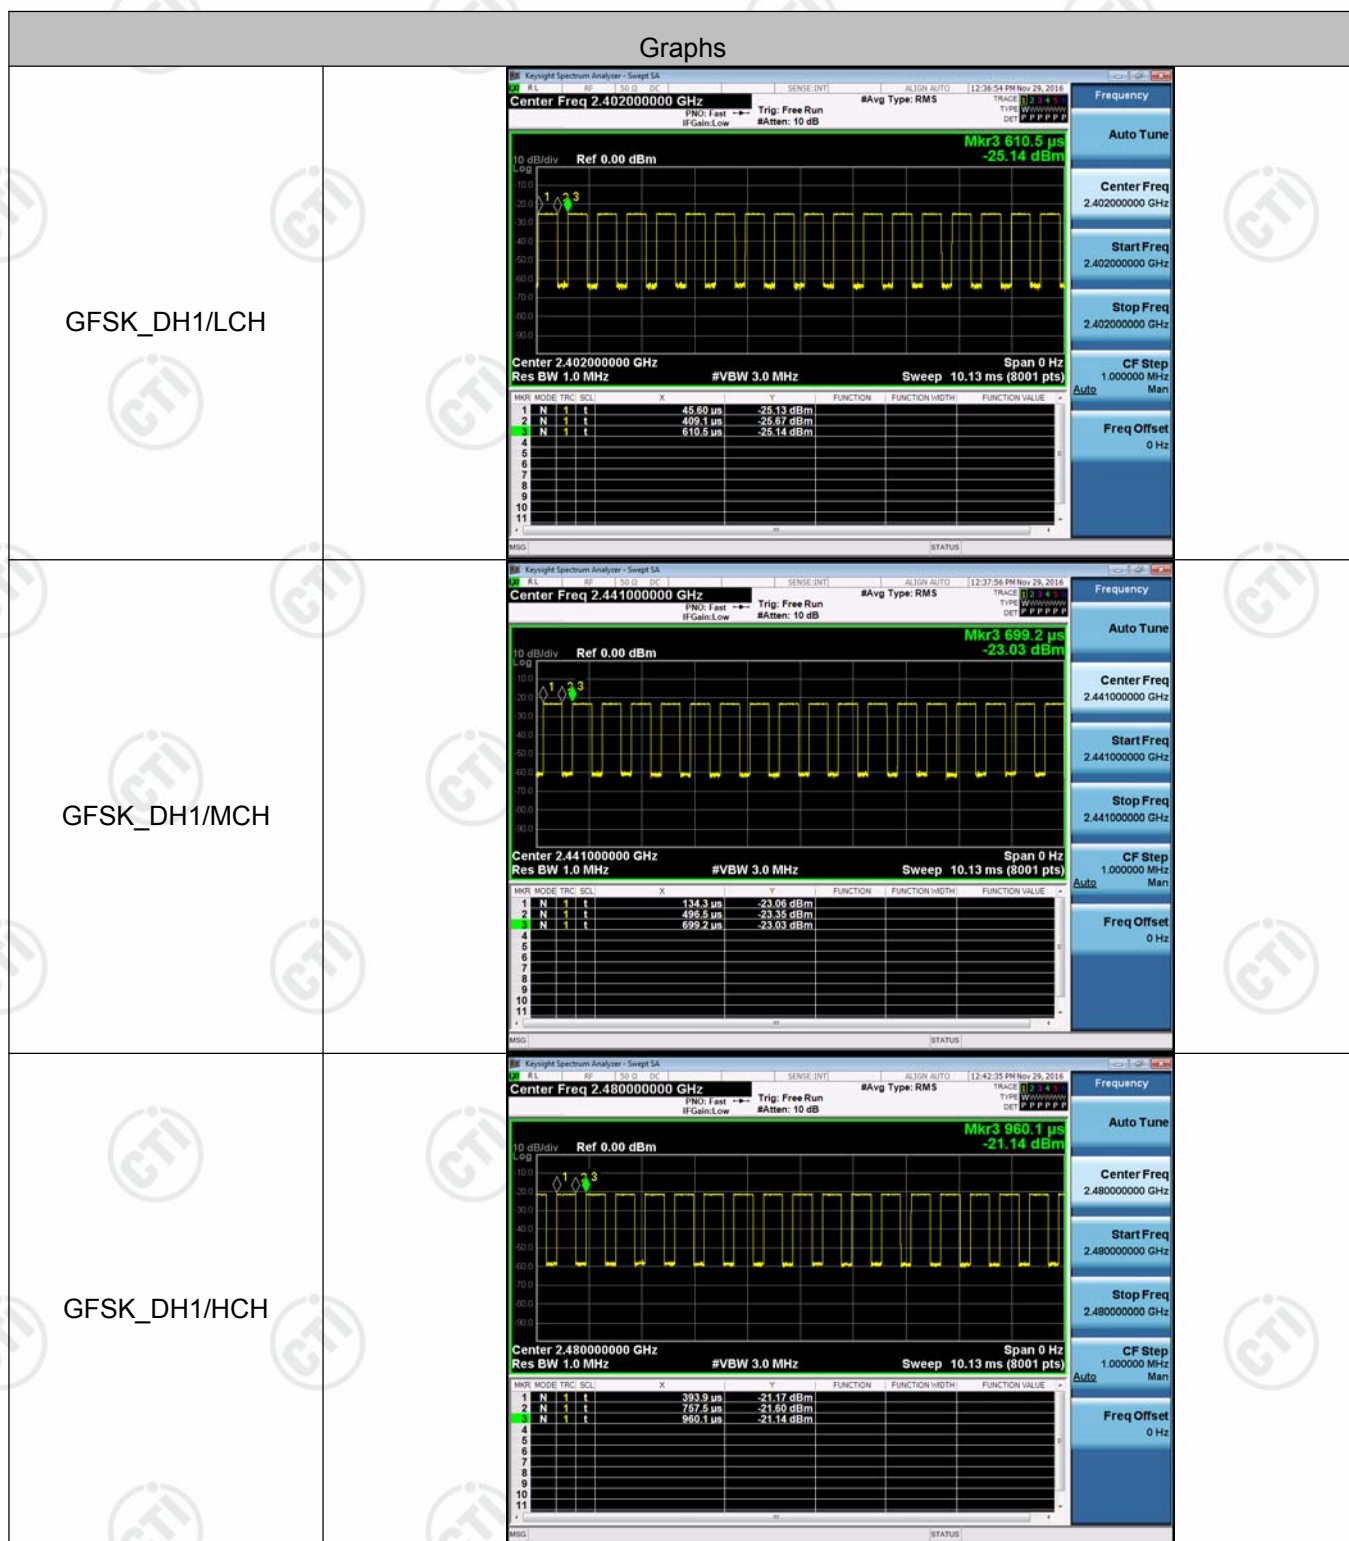

GFSK_DH3/LCH	<div><div>Keysight Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.402000000 GHz</div><div>Ref 0.00 dBm</div><div>Mkr3 3.210 ms -25.12 dBm</div><div>Center 2.402000000 GHz</div><div>Res BW 1.0 MHz</div><div>#VBW 3.0 MHz</div><div>Sweep 10.13 ms (8001 pts)</div><table><thead><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.388 ms</td><td>-25.12 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.007 ms</td><td>-25.14 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.210 ms</td><td>-25.12 dBm</td><td></td><td></td><td></td></tr></tbody></table></div>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.388 ms	-25.12 dBm				2	N	1	t	3.007 ms	-25.14 dBm				3	N	1	t	3.210 ms	-25.12 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.388 ms	-25.12 dBm																																
2	N	1	t	3.007 ms	-25.14 dBm																																
3	N	1	t	3.210 ms	-25.12 dBm																																
GFSK_DH3/MCH	<div><div>Keysight Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.441000000 GHz</div><div>Ref 0.00 dBm</div><div>Mkr3 3.504 ms -23.04 dBm</div><div>Center 2.441000000 GHz</div><div>Res BW 1.0 MHz</div><div>#VBW 3.0 MHz</div><div>Sweep 10.13 ms (8001 pts)</div><table><thead><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.682 ms</td><td>-23.05 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.301 ms</td><td>-23.10 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.504 ms</td><td>-23.04 dBm</td><td></td><td></td><td></td></tr></tbody></table></div>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.682 ms	-23.05 dBm				2	N	1	t	3.301 ms	-23.10 dBm				3	N	1	t	3.504 ms	-23.04 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.682 ms	-23.05 dBm																																
2	N	1	t	3.301 ms	-23.10 dBm																																
3	N	1	t	3.504 ms	-23.04 dBm																																
GFSK_DH3/HCH	<div><div>Keysight Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.480000000 GHz</div><div>Ref 0.00 dBm</div><div>Mkr3 3.586 ms -21.16 dBm</div><div>Center 2.480000000 GHz</div><div>Res BW 1.0 MHz</div><div>#VBW 3.0 MHz</div><div>Sweep 10.13 ms (8001 pts)</div><table><thead><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.704 ms</td><td>-21.15 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.383 ms</td><td>-21.29 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.586 ms</td><td>-21.16 dBm</td><td></td><td></td><td></td></tr></tbody></table></div>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.704 ms	-21.15 dBm				2	N	1	t	3.383 ms	-21.29 dBm				3	N	1	t	3.586 ms	-21.16 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.704 ms	-21.15 dBm																																
2	N	1	t	3.383 ms	-21.29 dBm																																
3	N	1	t	3.586 ms	-21.16 dBm																																

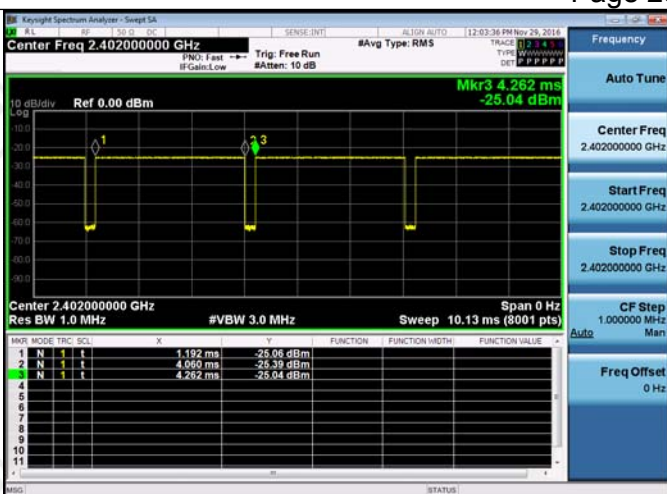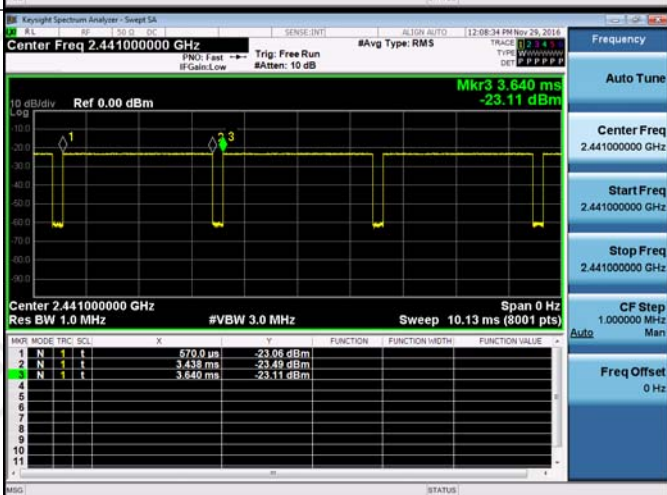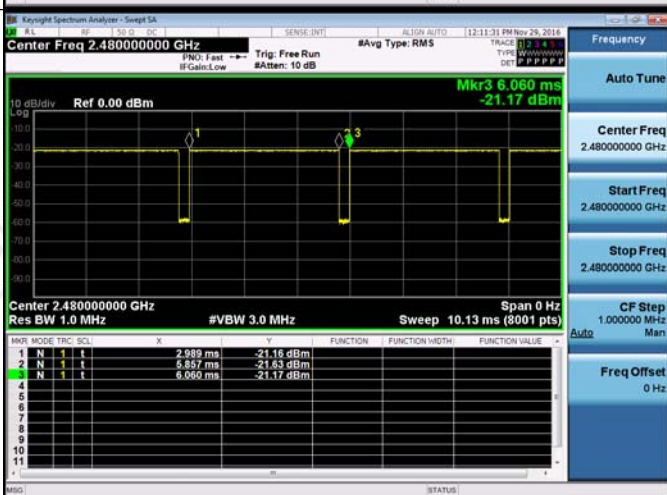
GFSK_DH5/LCH	 <p>Center Freq 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts)</p> <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.192 ms</td><td>-25.06 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.060 ms</td><td>-25.39 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.262 ms</td><td>-25.04 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.192 ms	-25.06 dBm				2	N	1	t	4.060 ms	-25.39 dBm				3	N	1	t	4.262 ms	-25.04 dBm			
Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.192 ms	-25.06 dBm																																
2	N	1	t	4.060 ms	-25.39 dBm																																
3	N	1	t	4.262 ms	-25.04 dBm																																
GFSK_DH5/MCH	 <p>Center Freq 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts)</p> <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>570.0 ms</td><td>-23.06 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.438 ms</td><td>-23.49 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.640 ms</td><td>-23.11 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	570.0 ms	-23.06 dBm				2	N	1	t	3.438 ms	-23.49 dBm				3	N	1	t	3.640 ms	-23.11 dBm			
Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	570.0 ms	-23.06 dBm																																
2	N	1	t	3.438 ms	-23.49 dBm																																
3	N	1	t	3.640 ms	-23.11 dBm																																
GFSK_DH5/HCH	 <p>Center Freq 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts)</p> <table><tr><th>Mkr</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>2.988 ms</td><td>-21.16 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>5.857 ms</td><td>-21.43 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>6.060 ms</td><td>-21.17 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	2.988 ms	-21.16 dBm				2	N	1	t	5.857 ms	-21.43 dBm				3	N	1	t	6.060 ms	-21.17 dBm			
Mkr	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	2.988 ms	-21.16 dBm																																
2	N	1	t	5.857 ms	-21.43 dBm																																
3	N	1	t	6.060 ms	-21.17 dBm																																

Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

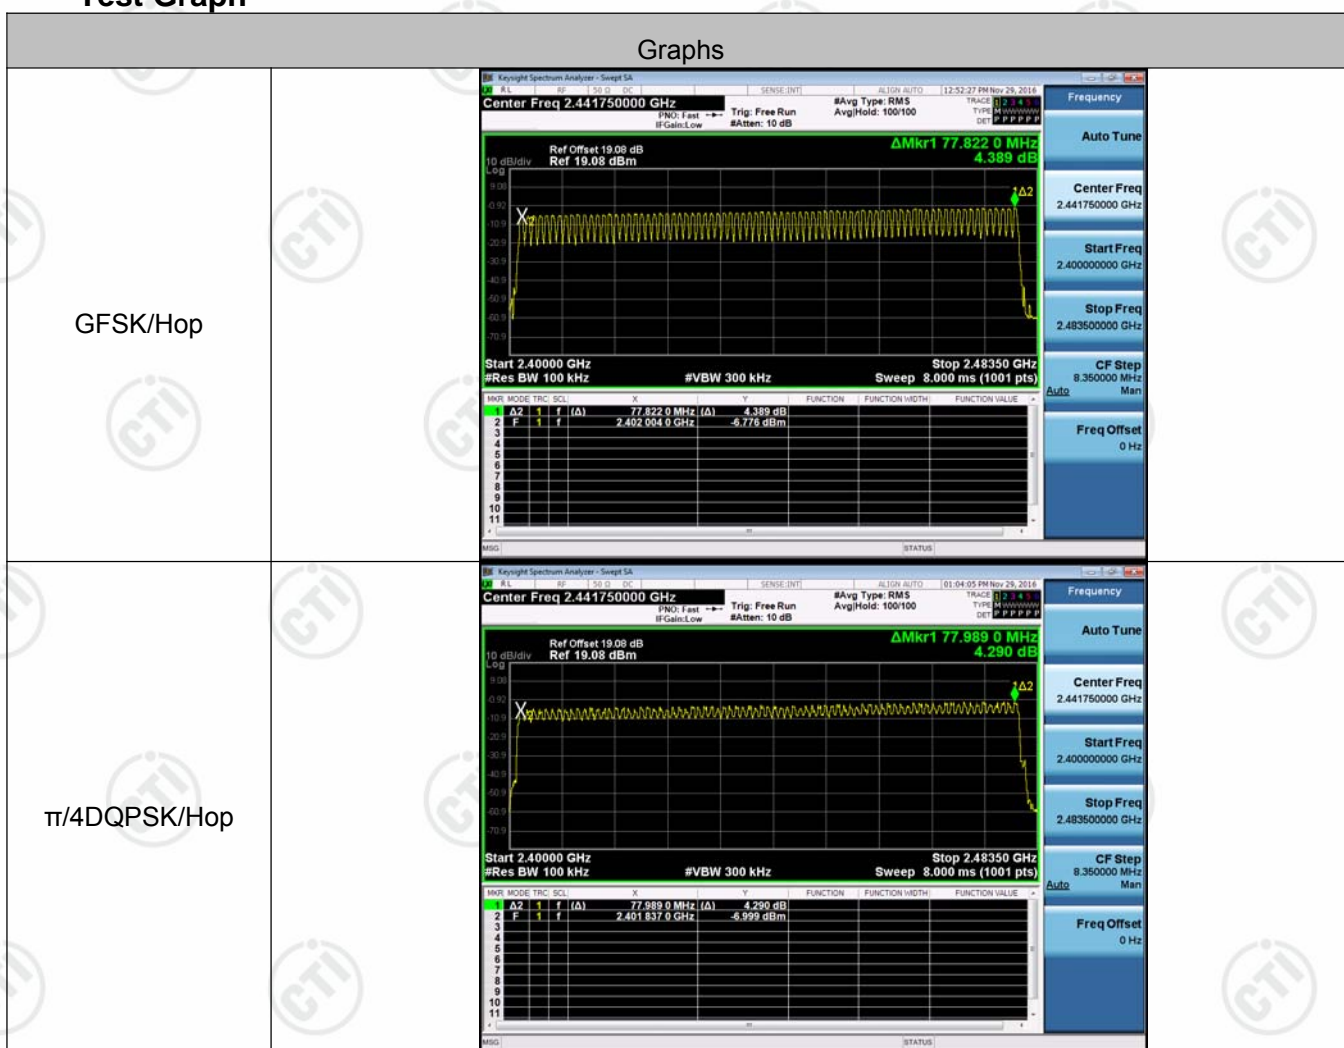

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441750000 GHz

Ref Offset: 19.08 dB
Ref 19.08 dBm

Start 2.40000 GHz
#Res BW 100 kHz

Stop 2.48350 GHz
Sweep 8.000 ms (1001 pts)

#Avg Type: RMS
AvgHold: 100/100

Trig: Free Run
#Att: 10 dB

Frequency

Auto Tune

Center Freq

2.441750000 GHz

Start Freq

2.400000000 GHz

Stop Freq

2.483500000 GHz

CF Stop

8.350000 MHz

Auto

Freq Offset

0 Hz

10 dB/div

0 dB

20 dB

40 dB

60 dB

80 dB

100 dB

120 dB

140 dB

160 dB

180 dB

200 dB

220 dB

240 dB

260 dB

280 dB

300 dB

320 dB

340 dB

360 dB

380 dB

400 dB

420 dB

440 dB

460 dB

480 dB

500 dB

520 dB

540 dB

560 dB

580 dB

600 dB

620 dB

640 dB

660 dB

680 dB

700 dB

720 dB

740 dB

760 dB

780 dB

800 dB

820 dB

840 dB

860 dB

880 dB

900 dB

920 dB

940 dB

960 dB

980 dB

1000 dB

1020 dB

1040 dB

1060 dB

1080 dB

1100 dB

1120 dB

1140 dB

1160 dB

1180 dB

1200 dB

1220 dB

1240 dB

1260 dB

1280 dB

1300 dB

1320 dB

1340 dB

1360 dB

1380 dB

1400 dB

1420 dB

1440 dB

1460 dB

1480 dB

1500 dB

1520 dB

1540 dB

1560 dB

1580 dB

1600 dB

1620 dB

1640 dB

1660 dB

1680 dB

1700 dB

1720 dB

1740 dB

1760 dB

1780 dB

1800 dB

1820 dB

1840 dB

1860 dB

1880 dB

1900 dB

1920 dB

1940 dB

1960 dB

1980 dB

2000 dB

2020 dB

2040 dB

2060 dB

2080 dB

2100 dB

2120 dB

2140 dB

2160 dB

2180 dB

2200 dB

2220 dB

2240 dB

2260 dB

2280 dB

2300 dB

2320 dB

2340 dB

2360 dB

2380 dB

2400 dB

2420 dB

2440 dB

2460 dB

2480 dB

2500 dB

2520 dB

2540 dB

2560 dB

2580 dB

2600 dB

2620 dB

2640 dB

2660 dB

2680 dB

2700 dB

2720 dB

2740 dB

2760 dB

2780 dB

2800 dB

2820 dB

2840 dB

2860 dB

2880 dB

2900 dB

2920 dB

2940 dB

2960 dB

2980 dB

3000 dB

3020 dB

3040 dB

3060 dB

3080 dB

3100 dB

3120 dB

3140 dB

3160 dB

3180 dB

3200 dB

3220 dB

3240 dB

3260 dB

3280 dB

3300 dB

3320 dB

3340 dB

3360 dB

3380 dB

3400 dB

3420 dB

3440 dB

3460 dB

3480 dB

3500 dB

3520 dB

3540 dB

3560 dB

3580 dB

3600 dB

3620 dB

3640 dB

3660 dB

3680 dB

3700 dB

3720 dB

3740 dB

3760 dB

3780 dB

3800 dB

3820 dB

3840 dB

3860 dB

3880 dB

3900 dB

3920 dB

3940 dB

3960 dB

3980 dB

4000 dB

4020 dB

4040 dB

4060 dB

4080 dB

4100 dB

4120 dB

4140 dB

4160 dB

4180 dB

4200 dB

4220 dB

4240 dB

4260 dB

4280 dB

4300 dB

4320 dB

4340 dB

4360 dB

4380 dB

4400 dB

4420 dB

4440 dB

4460 dB

4480 dB

4500 dB

4520 dB

4540 dB

4560 dB

4580 dB

4600 dB

4620 dB

4640 dB

4660 dB

4680 dB

4700 dB

4720 dB

4740 dB

4760 dB

4780 dB

4800 dB

4820 dB

4840 dB

4860 dB

4880 dB

4900 dB

4920 dB

4940 dB

4960 dB

4980 dB

5000 dB

5020 dB

5040 dB

5060 dB

5080 dB

5100 dB

5120 dB

5140 dB

5160 dB

5180 dB

5200 dB

5220 dB

5240 dB

5260 dB

5280 dB

5300 dB

5320 dB

5340 dB

5360 dB

5380 dB

5400 dB

5420 dB

5440 dB

5460 dB

5480 dB

5500 dB

5520 dB

5540 dB

5560 dB

5580 dB

5600 dB

5620 dB

5640 dB

5660 dB

5680 dB

5700 dB

5720 dB

5740 dB

5760 dB

5780 dB

5800 dB

5820 dB

5840 dB

5860 dB

5880 dB

5900 dB

5920 dB

5940 dB

5960 dB

5980 dB

6000 dB

6020 dB

6040 dB

6060 dB

6080 dB

6100 dB

6120 dB

6140 dB

6160 dB

6180 dB

6200 dB

6220 dB

6240 dB

6260 dB

6280 dB

6300 dB

6320 dB

6340 dB

6360 dB

6380 dB

6400 dB

6420 dB

6440 dB

6460 dB

6480 dB

6500 dB

6520 dB

6540 dB

6560 dB

6580 dB

6600 dB

6620 dB

6640 dB

6660 dB

6680 dB

6700 dB

6720 dB

6740 dB

6760 dB

6780 dB

6800 dB

6820 dB

6840 dB

6860 dB


6880 dB

Appendix E): Conducted Peak Output Power

Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	-5.641	PASS
GFSK	MCH	-3.748	PASS
GFSK	HCH	-1.818	PASS
$\pi/4$ DQPSK	LCH	-4.438	PASS
$\pi/4$ DQPSK	MCH	-2.554	PASS
$\pi/4$ DQPSK	HCH	-0.917	PASS
8DPSK	LCH	-4.034	PASS
8DPSK	MCH	-2.161	PASS
8DPSK	HCH	-0.620	PASS

Test Graph

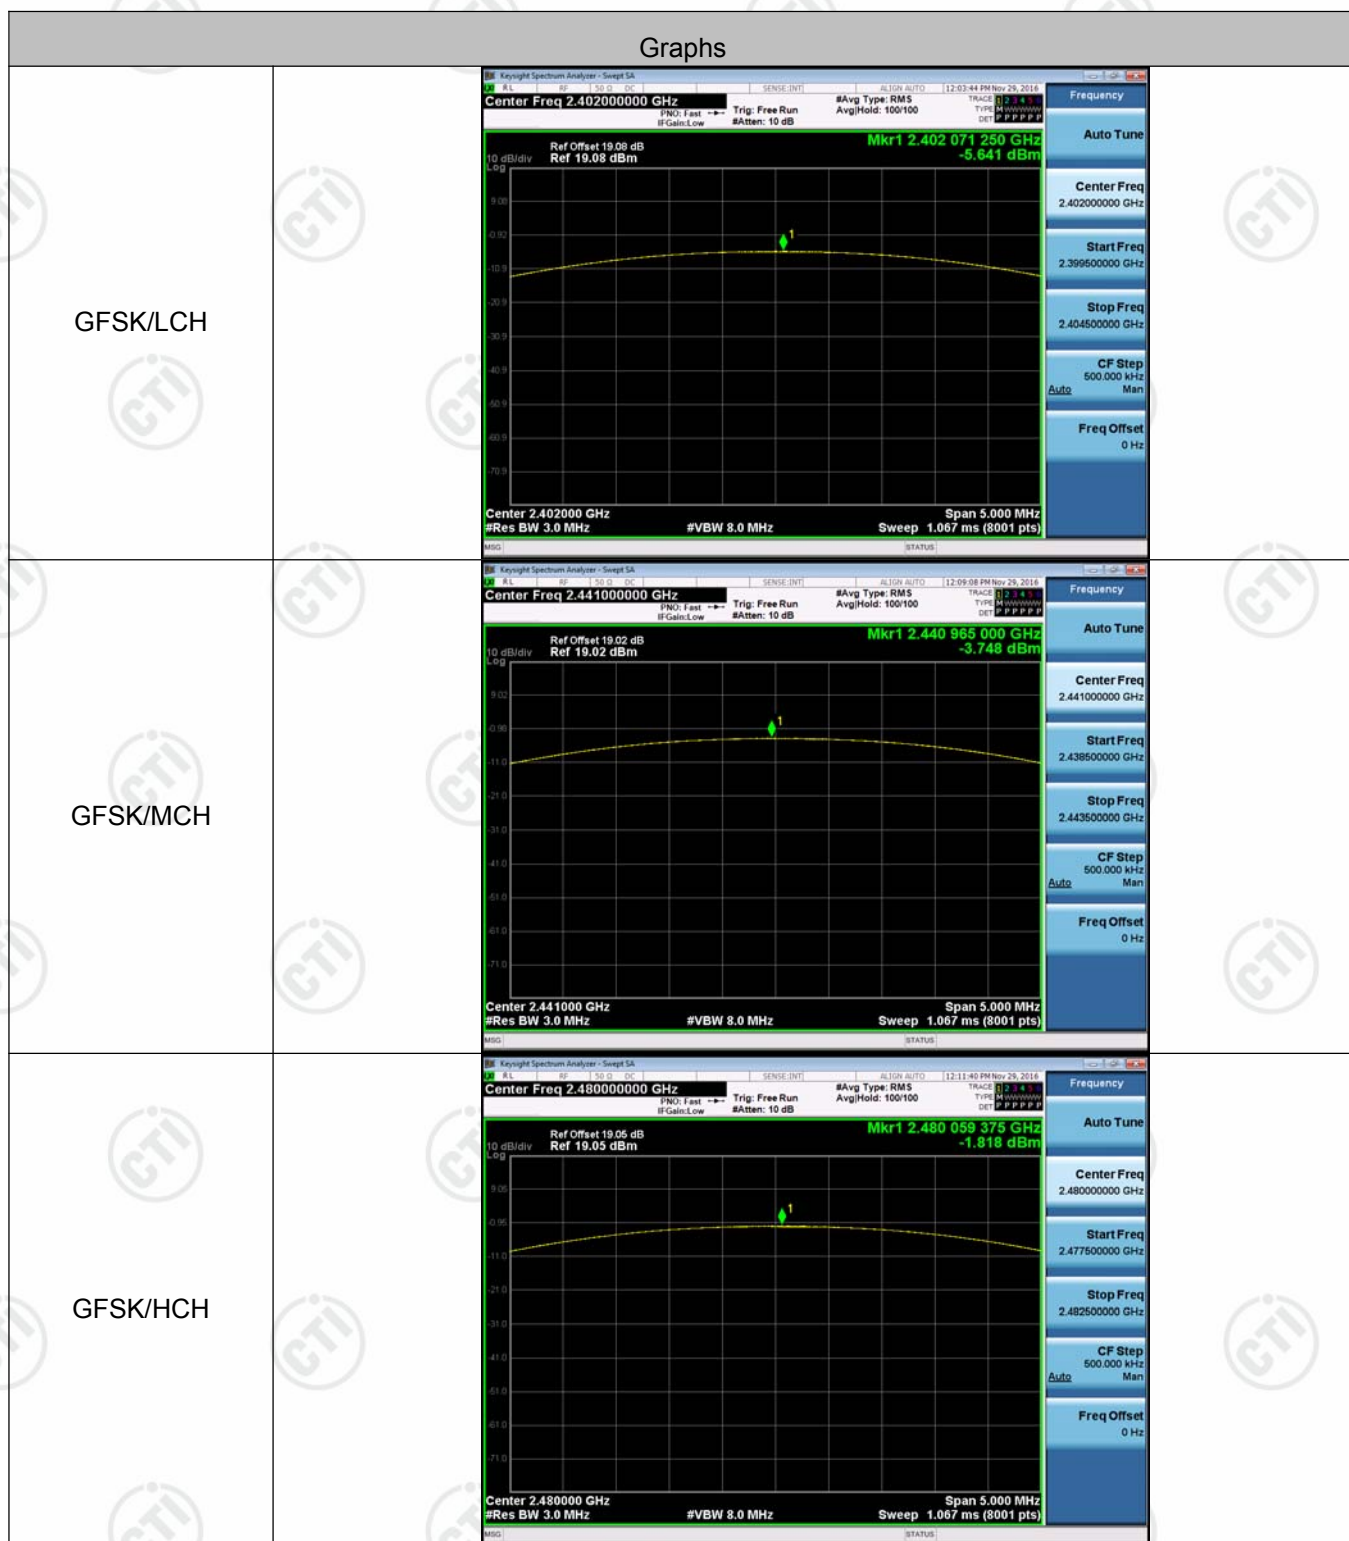

<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	


Appendix F): Band-edge for RF Conducted Emissions




Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	-6.151	Off	-60.004	-26.15	PASS
			-6.266	On	-59.919	-26.27	PASS
GFSK	HCH	2480	-2.349	Off	-58.752	-22.35	PASS
			-2.339	On	-59.224	-22.34	PASS
$\pi/4$ DQPSK	LCH	2402	-6.256	Off	-60.055	-26.26	PASS
			-6.462	On	-60.139	-26.46	PASS
$\pi/4$ DQPSK	HCH	2480	-2.360	Off	-58.384	-22.36	PASS
			-3.217	On	-58.761	-23.22	PASS
8DPSK	LCH	2402	-6.277	Off	-60.251	-26.28	PASS
			-6.400	On	-59.257	-26.4	PASS
8DPSK	HCH	2480	-2.332	Off	-59.154	-22.33	PASS
			-2.669	On	-58.333	-22.67	PASS


Test Graph

Graphs

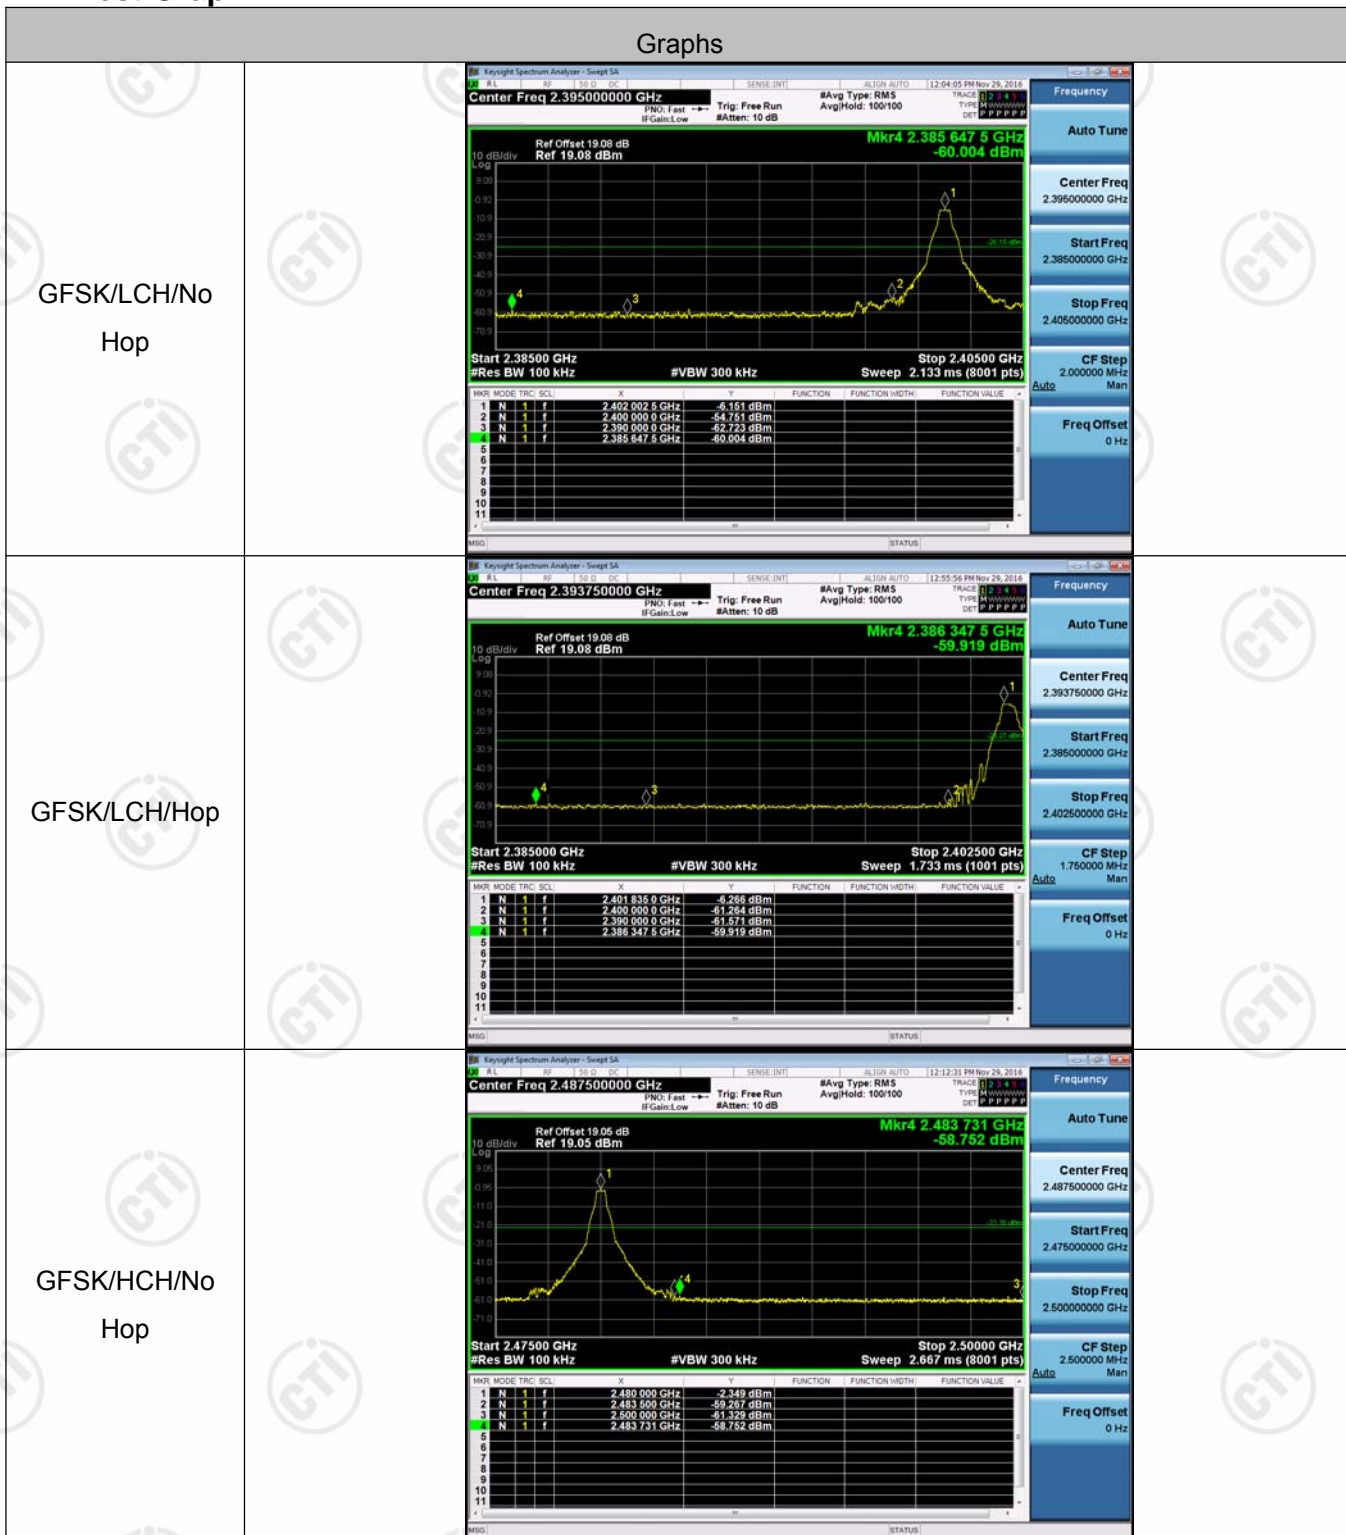


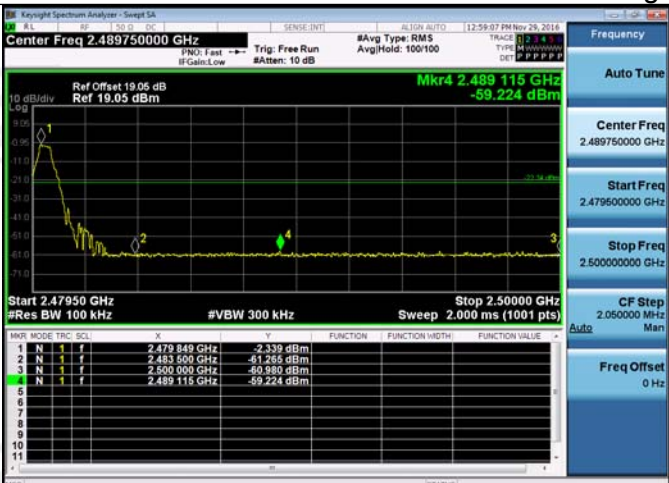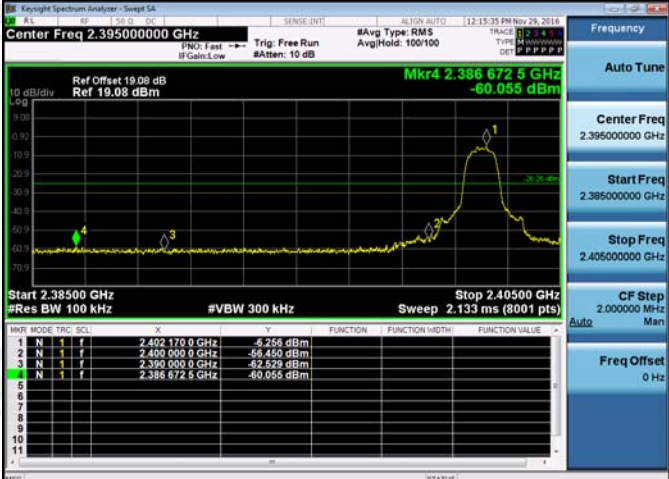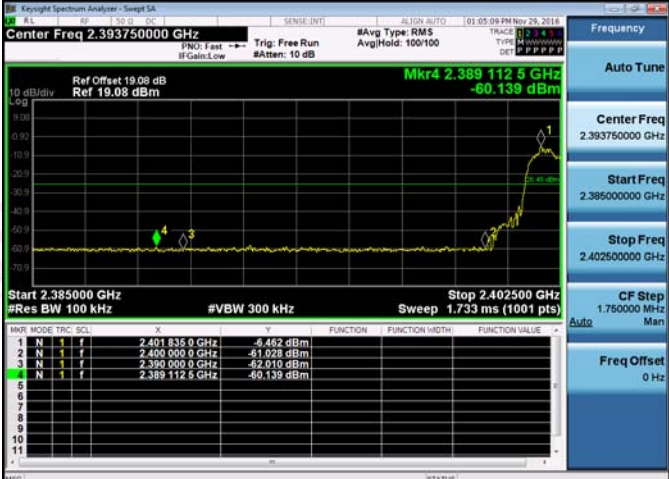GFSK/HCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 849 GHz</td><td>-2.339 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-61.285 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-60.880 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.489 115 GHz</td><td>-59.224 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 849 GHz	-2.339 dBm				2	N	1	f	2.483 500 GHz	-61.285 dBm				3	N	1	f	2.500 000 GHz	-60.880 dBm				4	N	1	f	2.489 115 GHz	-59.224 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 849 GHz	-2.339 dBm																																									
2	N	1	f	2.483 500 GHz	-61.285 dBm																																									
3	N	1	f	2.500 000 GHz	-60.880 dBm																																									
4	N	1	f	2.489 115 GHz	-59.224 dBm																																									
$\pi/4$ DQPSK/LCH/ No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 170 GHz</td><td>-5.256 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-55.450 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-62.529 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.386 672 GHz</td><td>-60.055 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 170 GHz	-5.256 dBm				2	N	1	f	2.400 000 GHz	-55.450 dBm				3	N	1	f	2.390 000 GHz	-62.529 dBm				4	N	1	f	2.386 672 GHz	-60.055 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 170 GHz	-5.256 dBm																																									
2	N	1	f	2.400 000 GHz	-55.450 dBm																																									
3	N	1	f	2.390 000 GHz	-62.529 dBm																																									
4	N	1	f	2.386 672 GHz	-60.055 dBm																																									
$\pi/4$ DQPSK/LCH/ Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 835 GHz</td><td>-9.452 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-61.028 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-62.010 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.389 112 GHz</td><td>-60.139 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 835 GHz	-9.452 dBm				2	N	1	f	2.400 000 GHz	-61.028 dBm				3	N	1	f	2.390 000 GHz	-62.010 dBm				4	N	1	f	2.389 112 GHz	-60.139 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 835 GHz	-9.452 dBm																																									
2	N	1	f	2.400 000 GHz	-61.028 dBm																																									
3	N	1	f	2.390 000 GHz	-62.010 dBm																																									
4	N	1	f	2.389 112 GHz	-60.139 dBm																																									


$\pi/4$ DQPSK/HCH/
No Hop

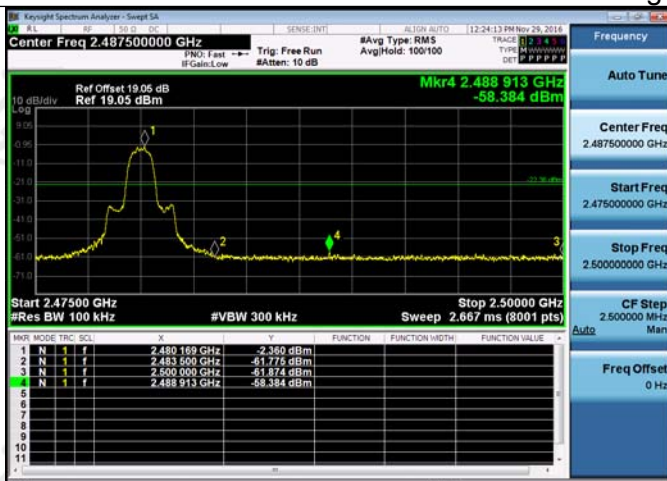


$\pi/4$ DQPSK/HCH/
Hop

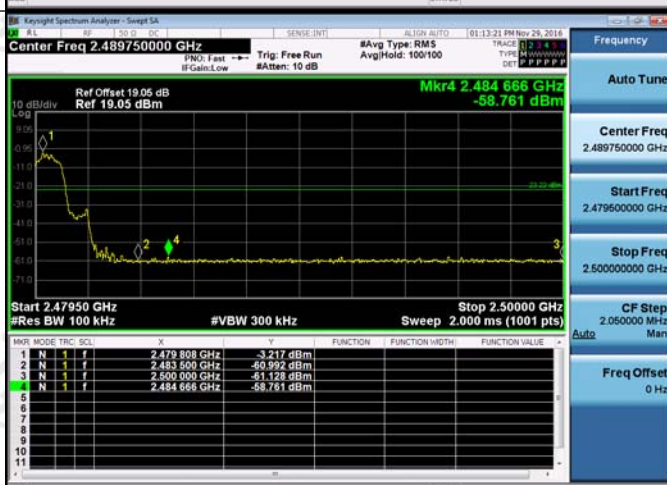


8DPSK/LCH/No
Hop

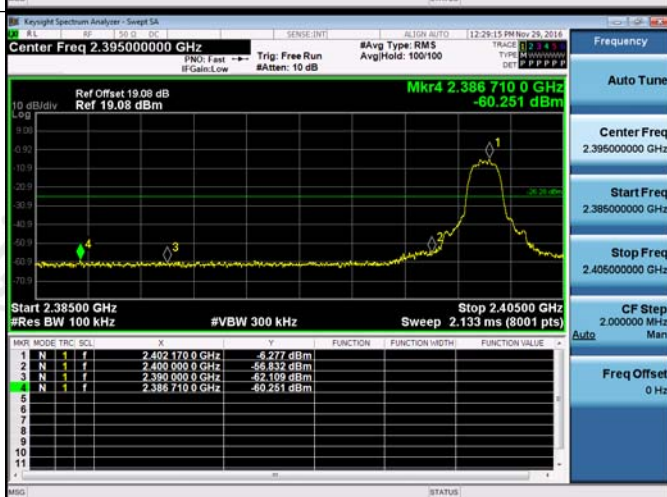


8DPSK/LCH/Hop

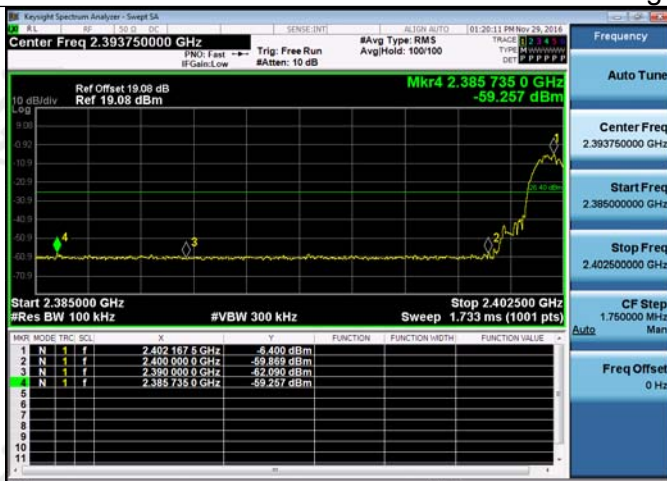

8DPSK/HCH/No
Hop

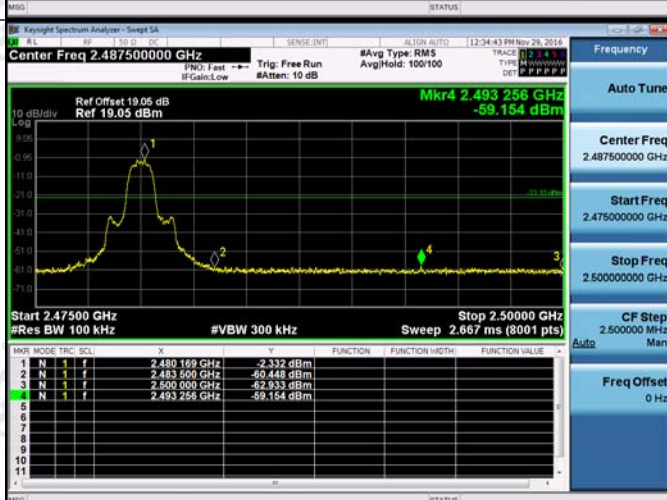

8DPSK/HCH/Hop

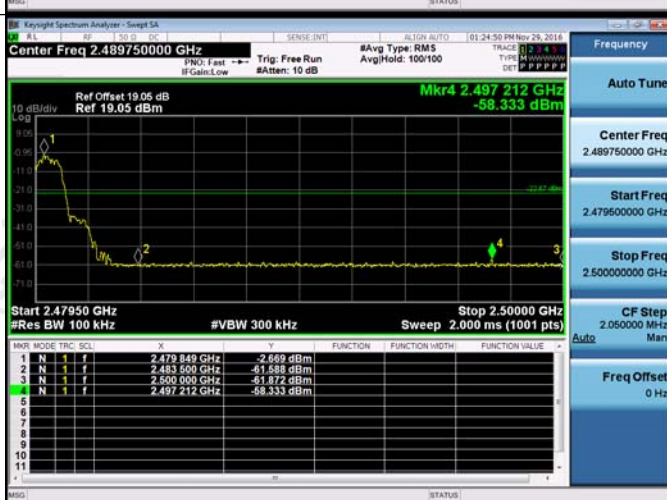




Appendix G): RF Conducted Spurious Emissions



Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-6.268	<Limit	PASS
GFSK	MCH	-4.282	<Limit	PASS
GFSK	HCH	-2.394	<Limit	PASS
$\pi/4$ DQPSK	LCH	-6.315	<Limit	PASS
$\pi/4$ DQPSK	MCH	-4.316	<Limit	PASS
$\pi/4$ DQPSK	HCH	-3.815	<Limit	PASS
8DPSK	LCH	-6.316	<Limit	PASS
8DPSK	MCH	-4.267	<Limit	PASS
8DPSK	HCH	-2.412	<Limit	PASS


Test Graph

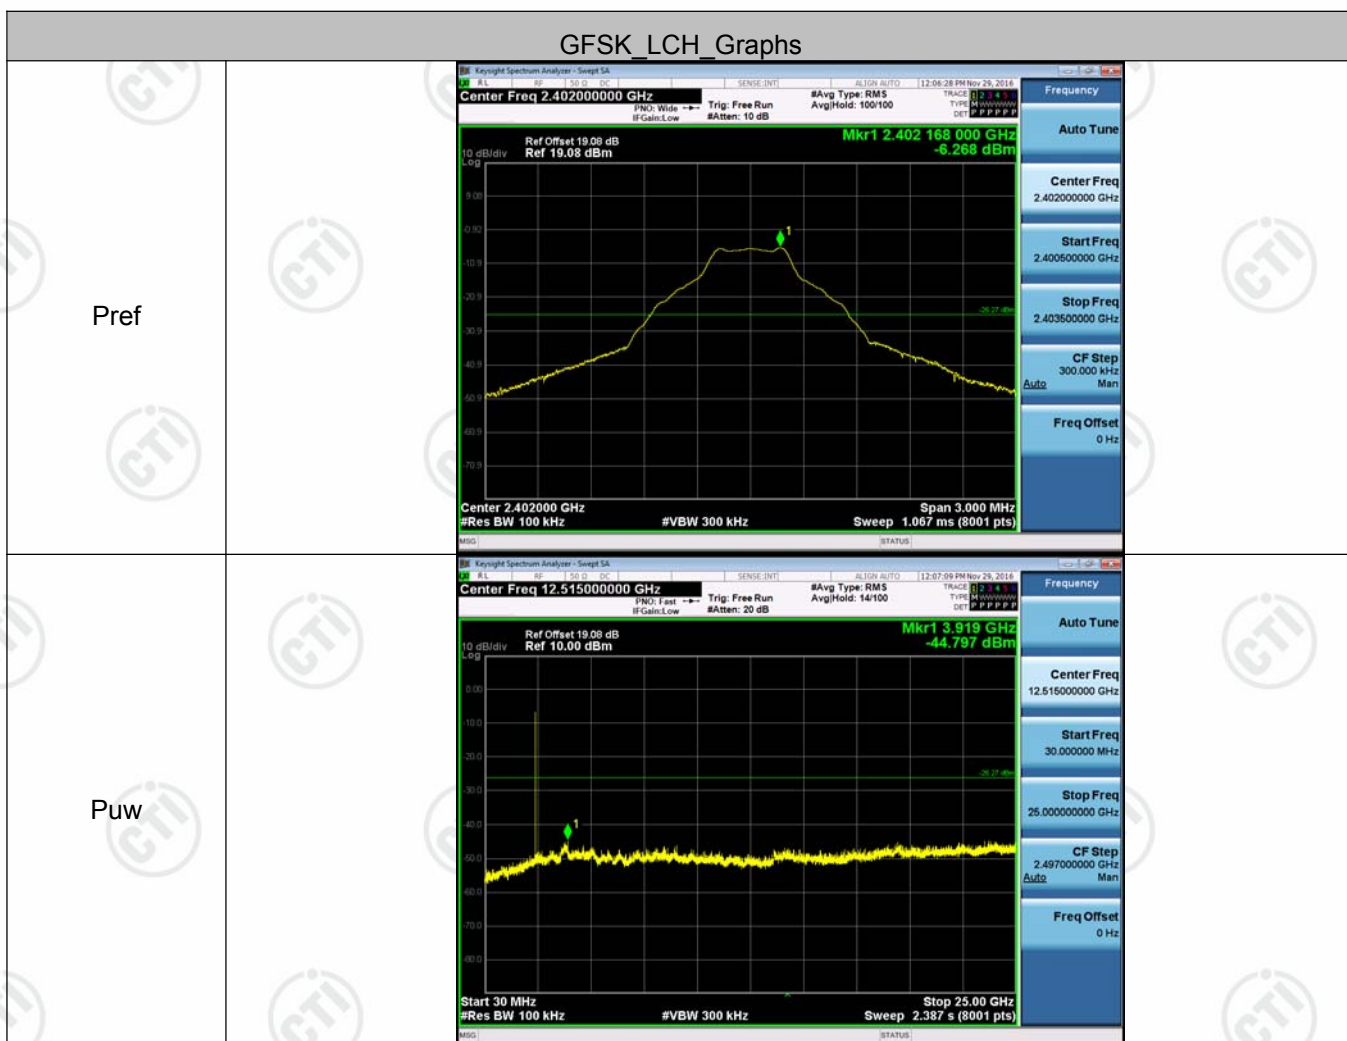

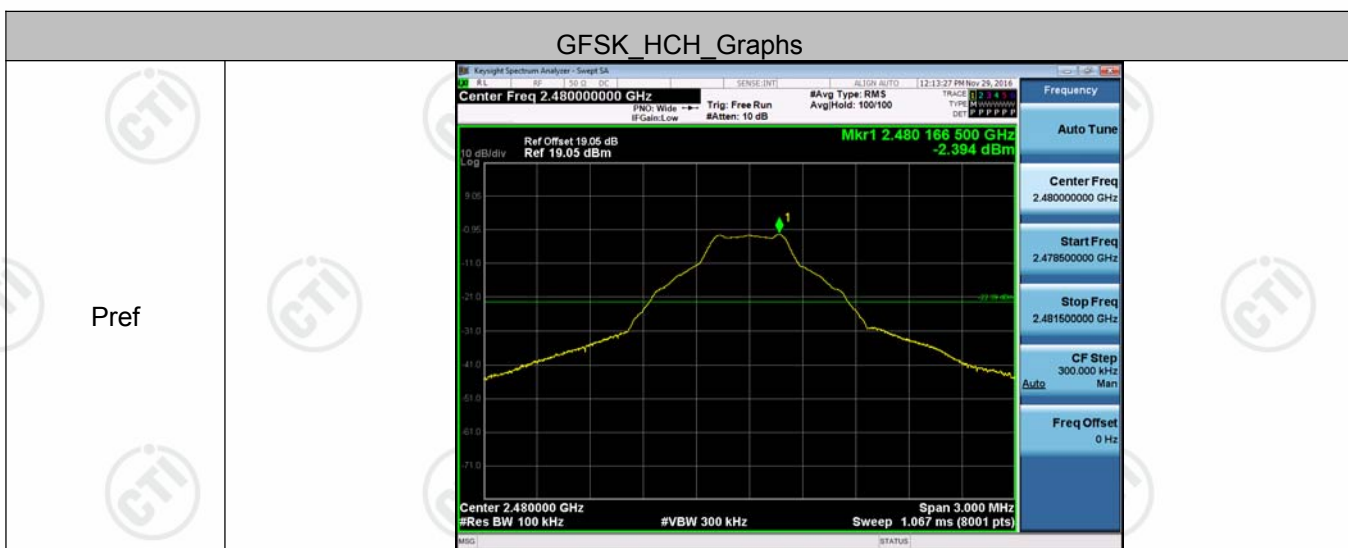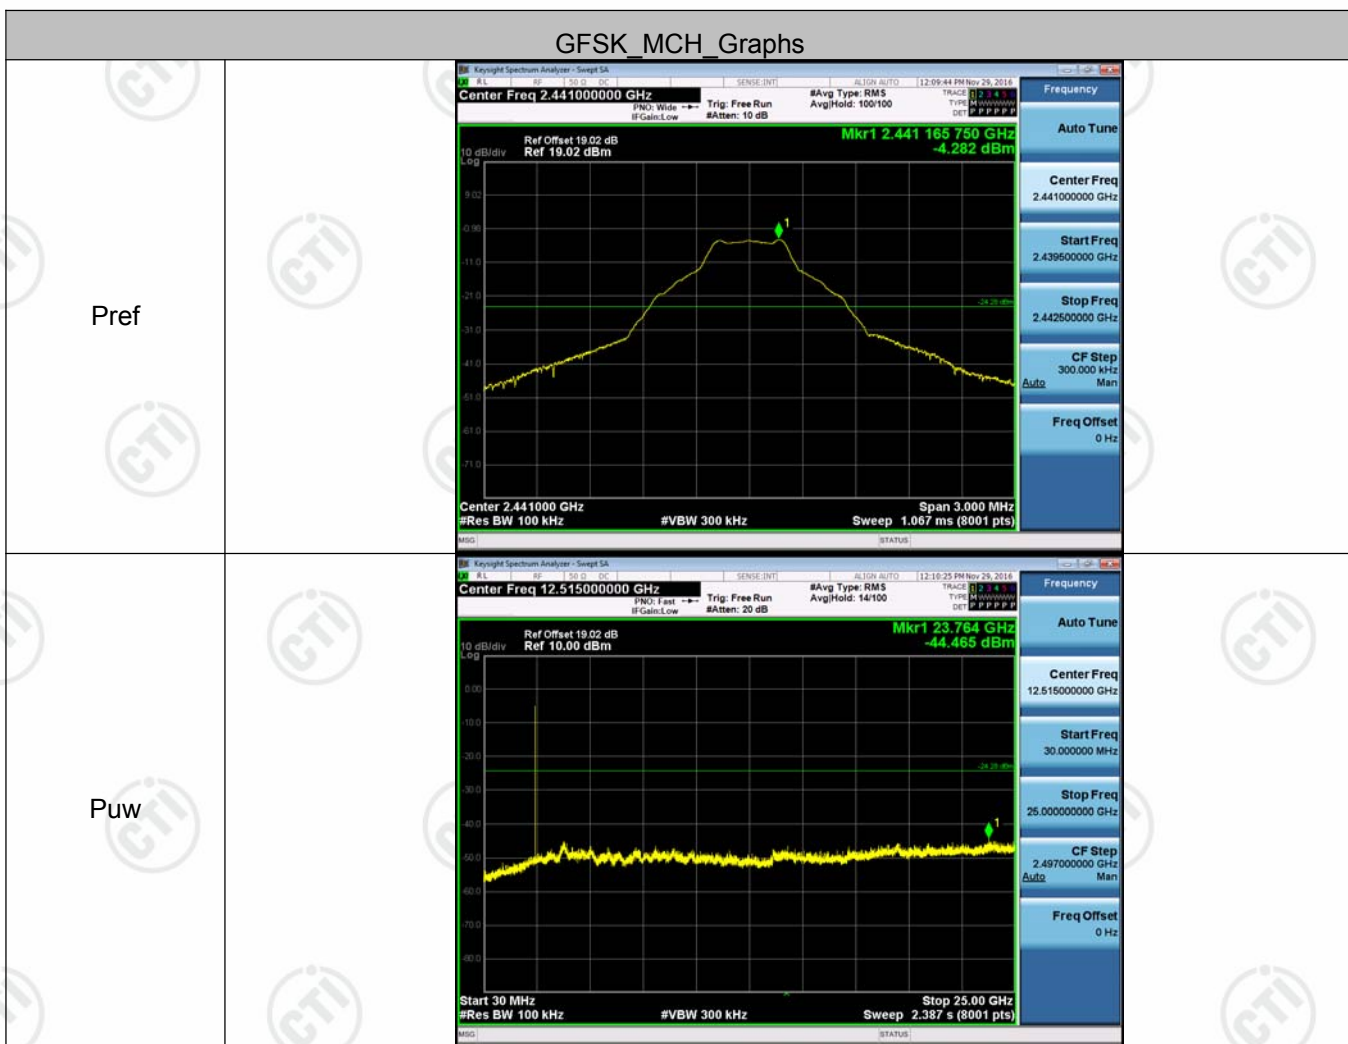


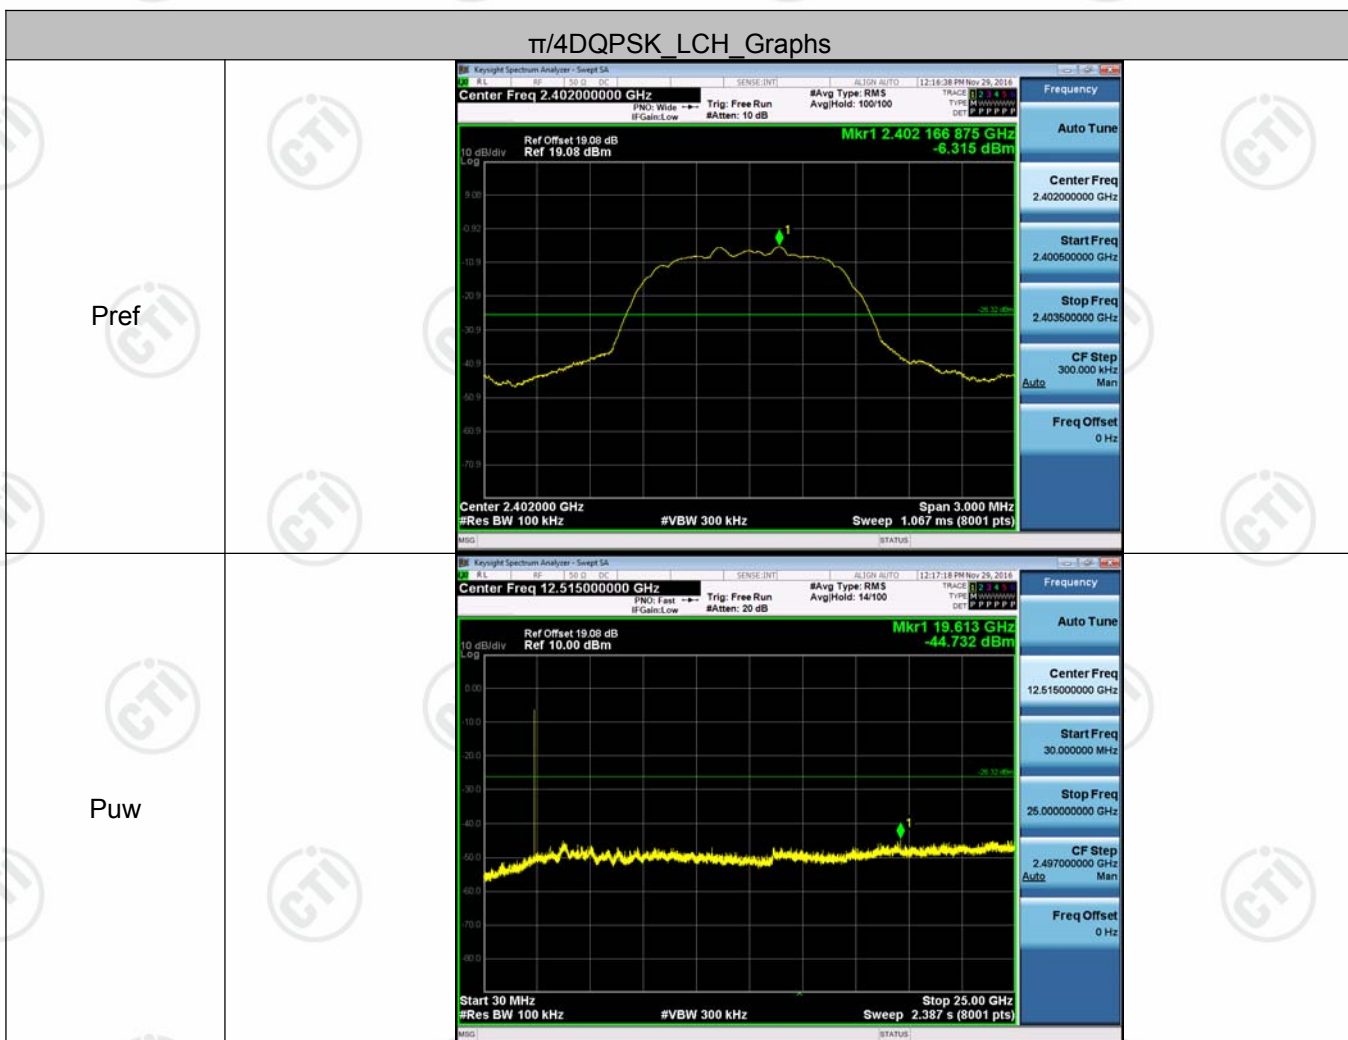
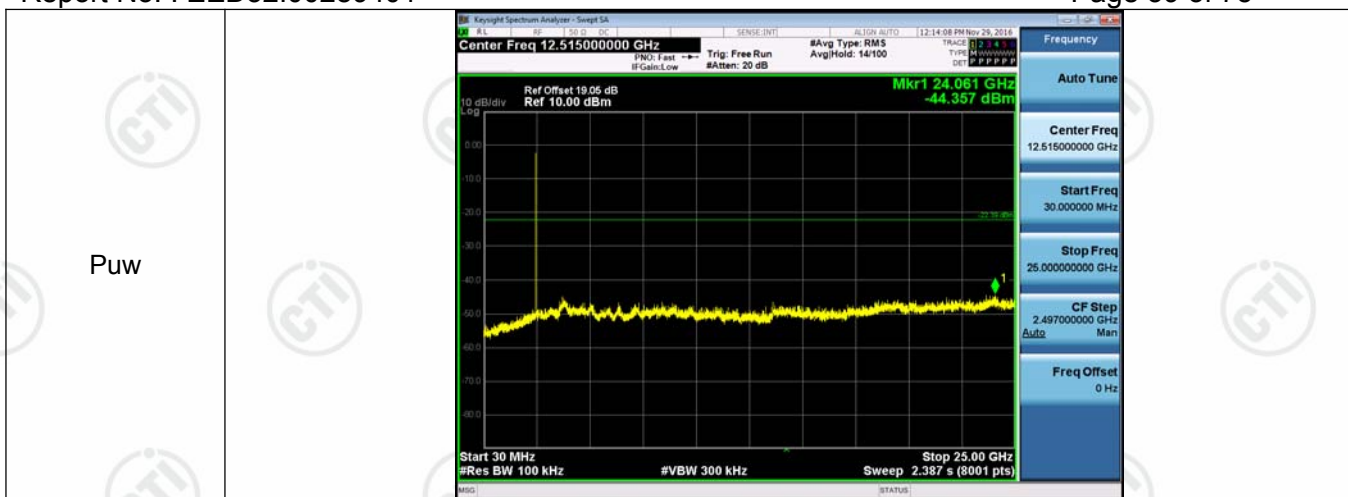


$\pi/4$ DQPSK_MCH_Graphs

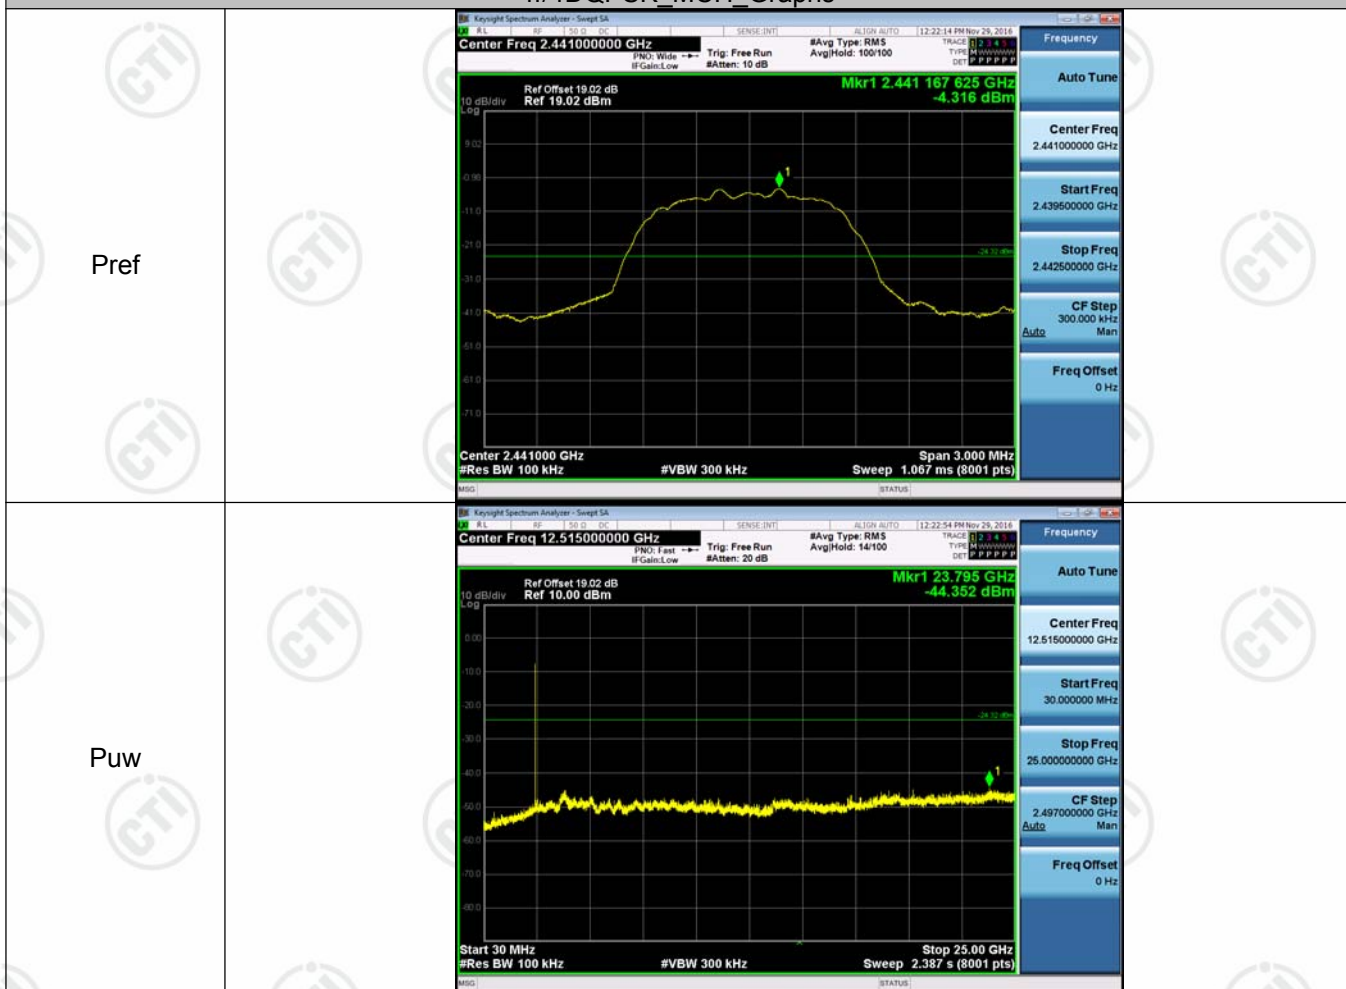


$\pi/4$ DQPSK_HCH_Graphs

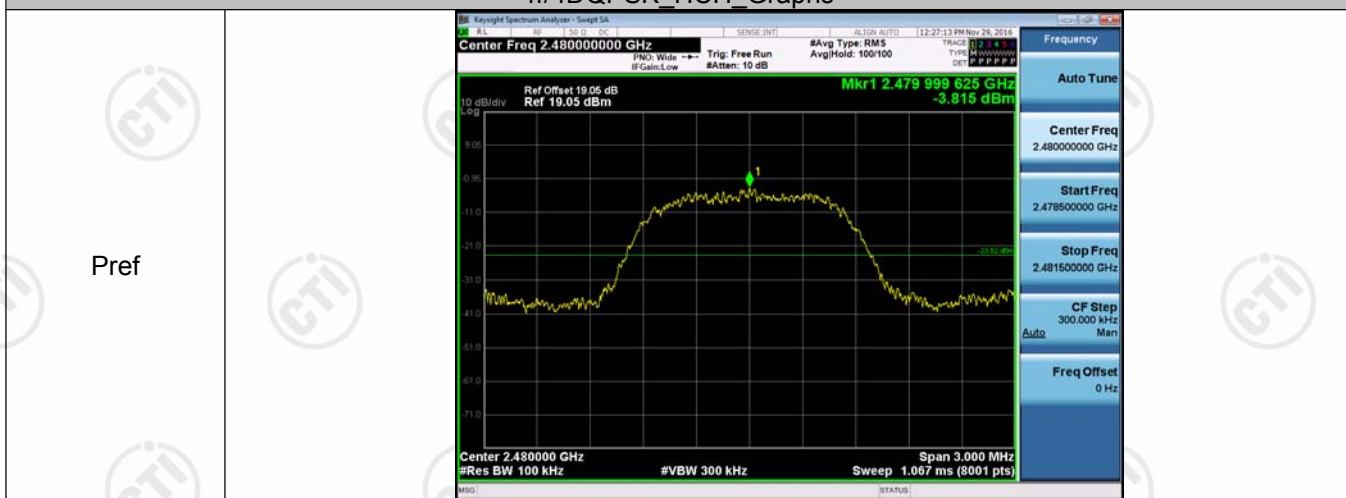

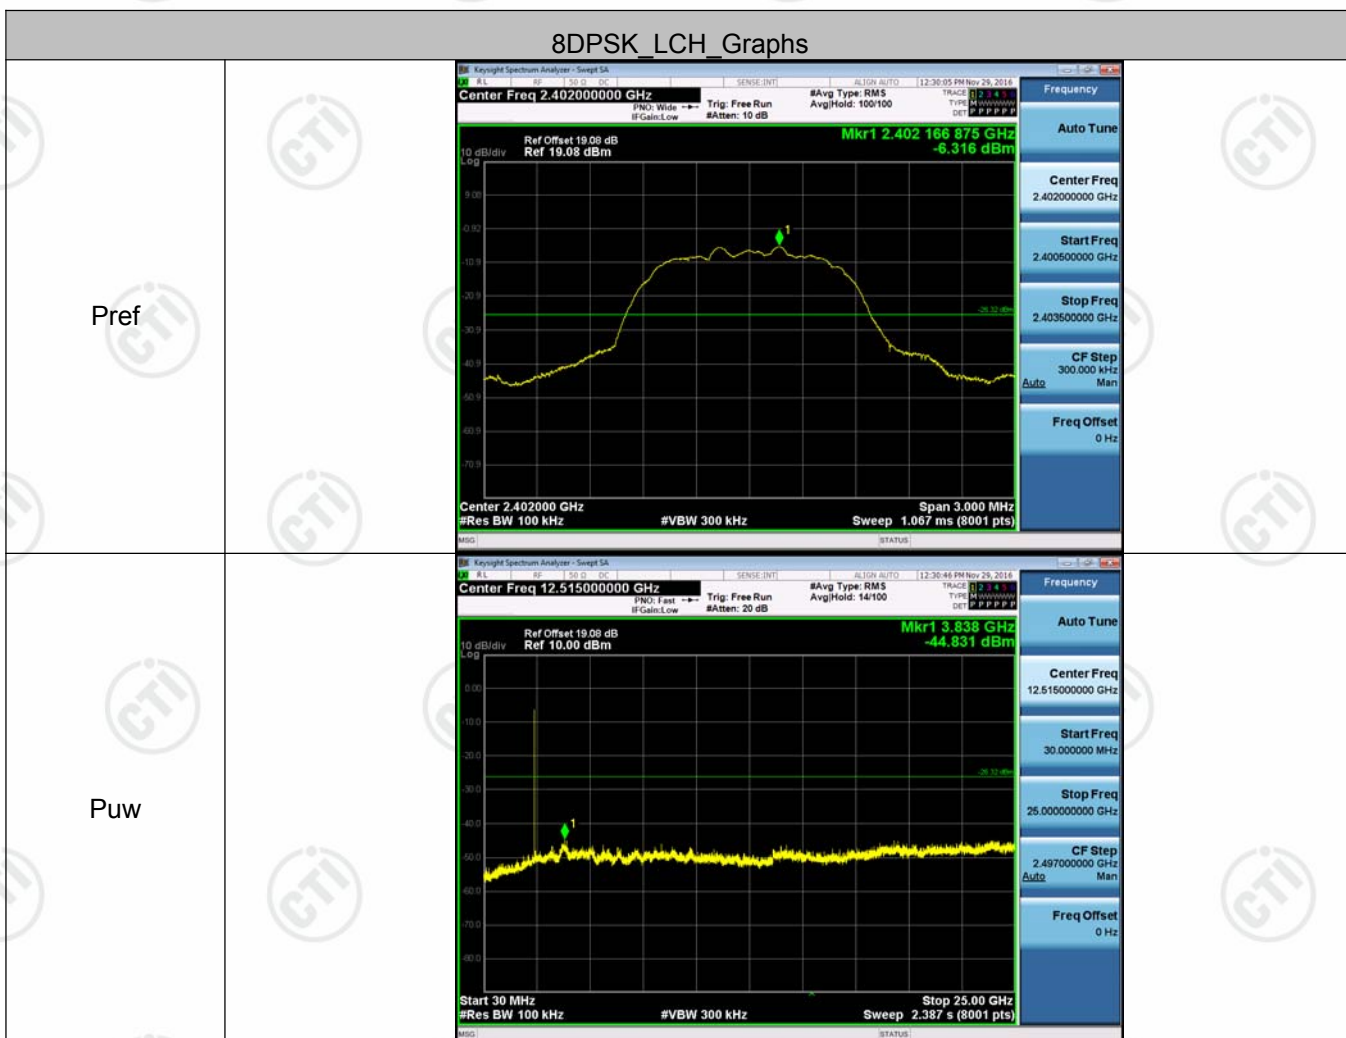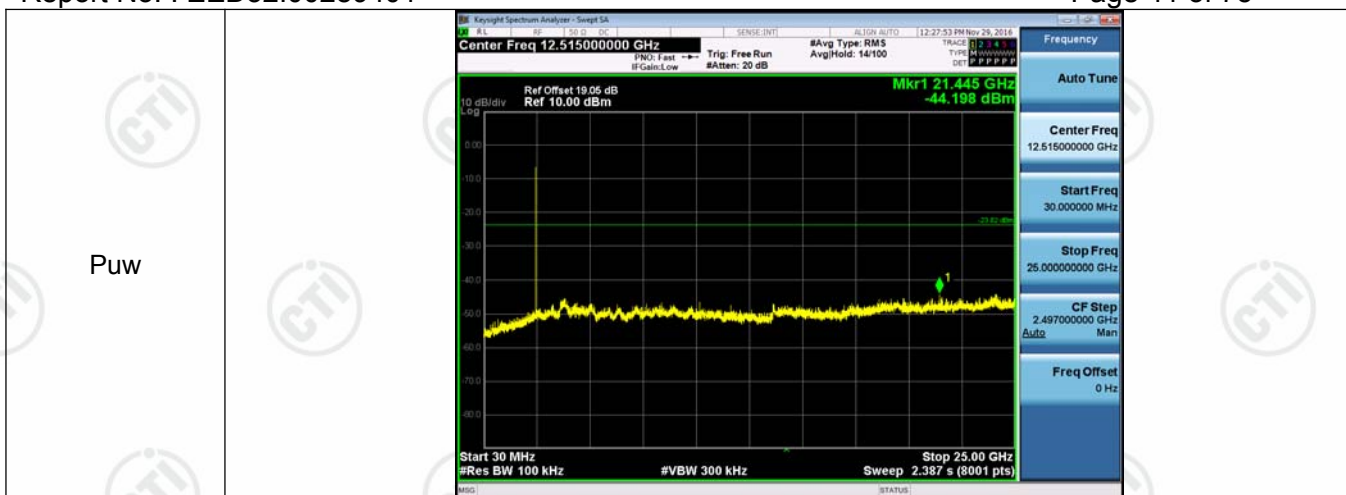


8DPSK_MCH_Graphs

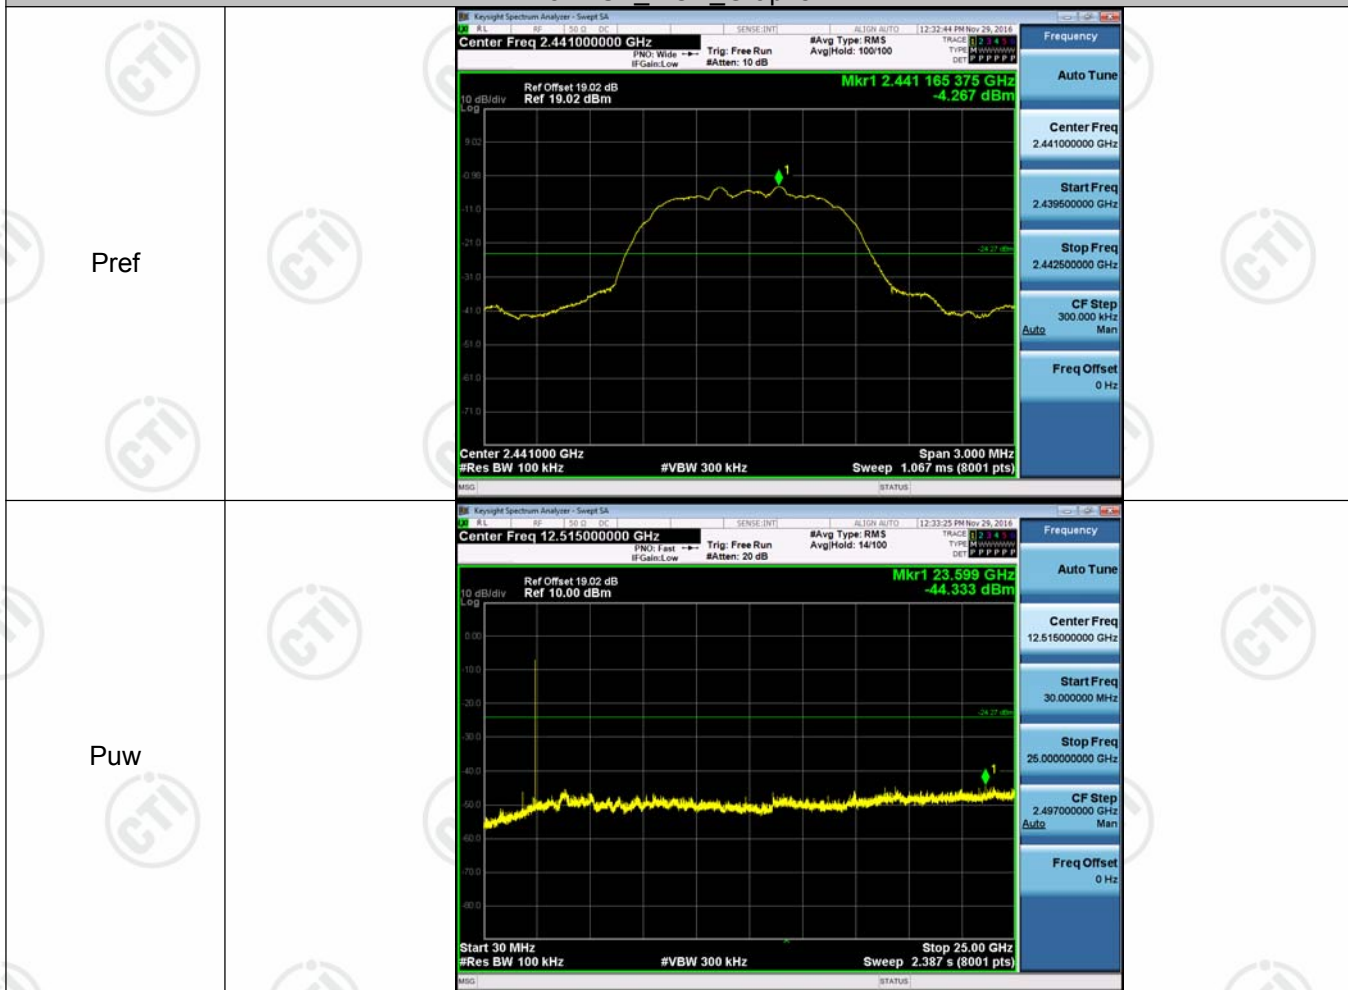

8DPSK_HCH_Graphs



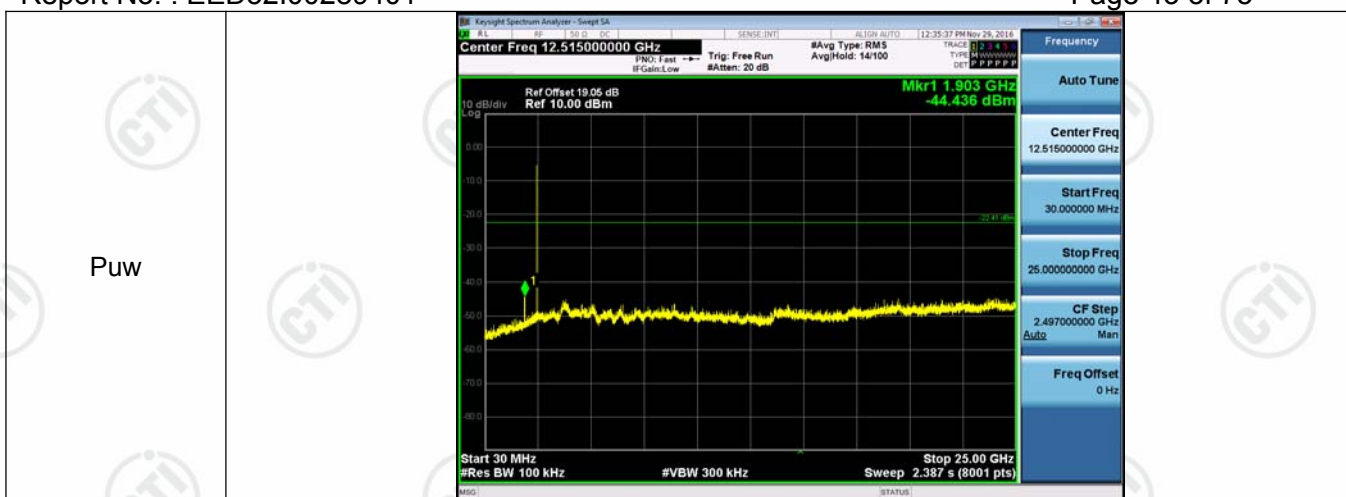

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="316 996 1372 1146"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1243 1275 1391"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Chip antenna and no consideration of replacement. The best case gain of the antenna is 0.5dBi.

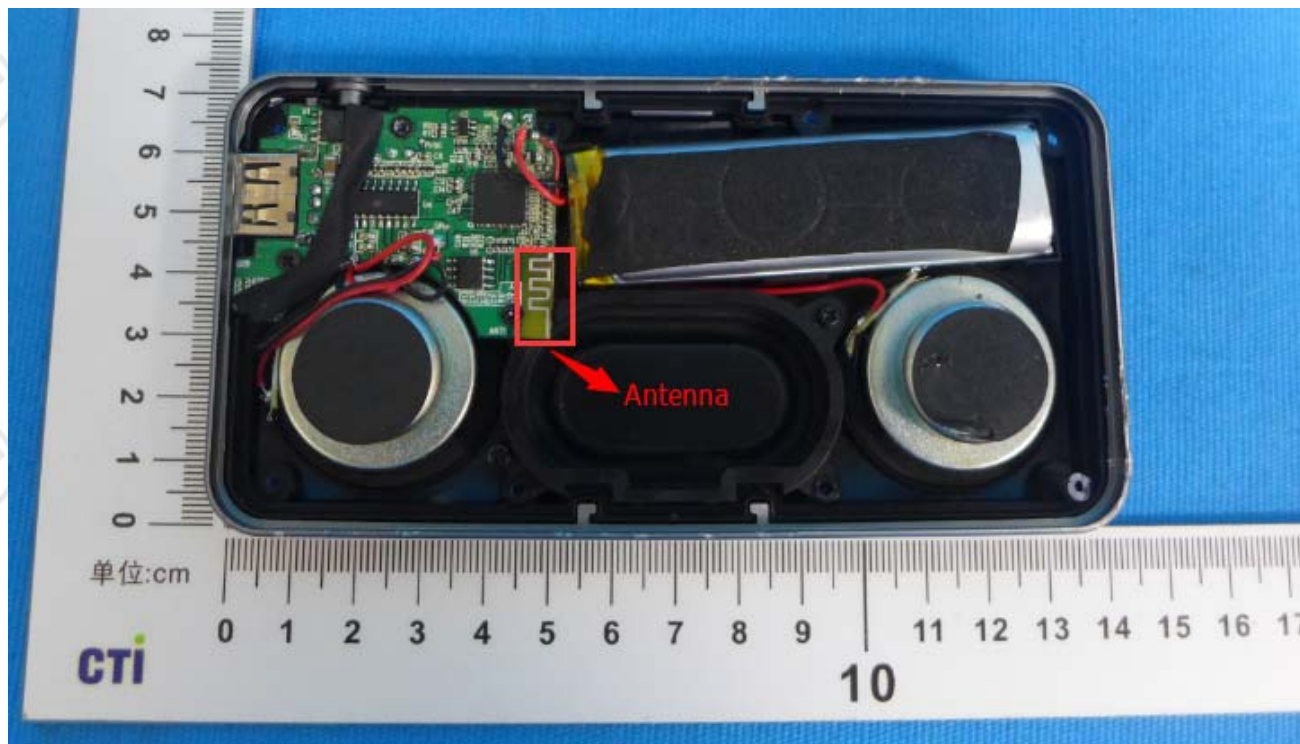

Appendix J): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:


80.0 dBuV

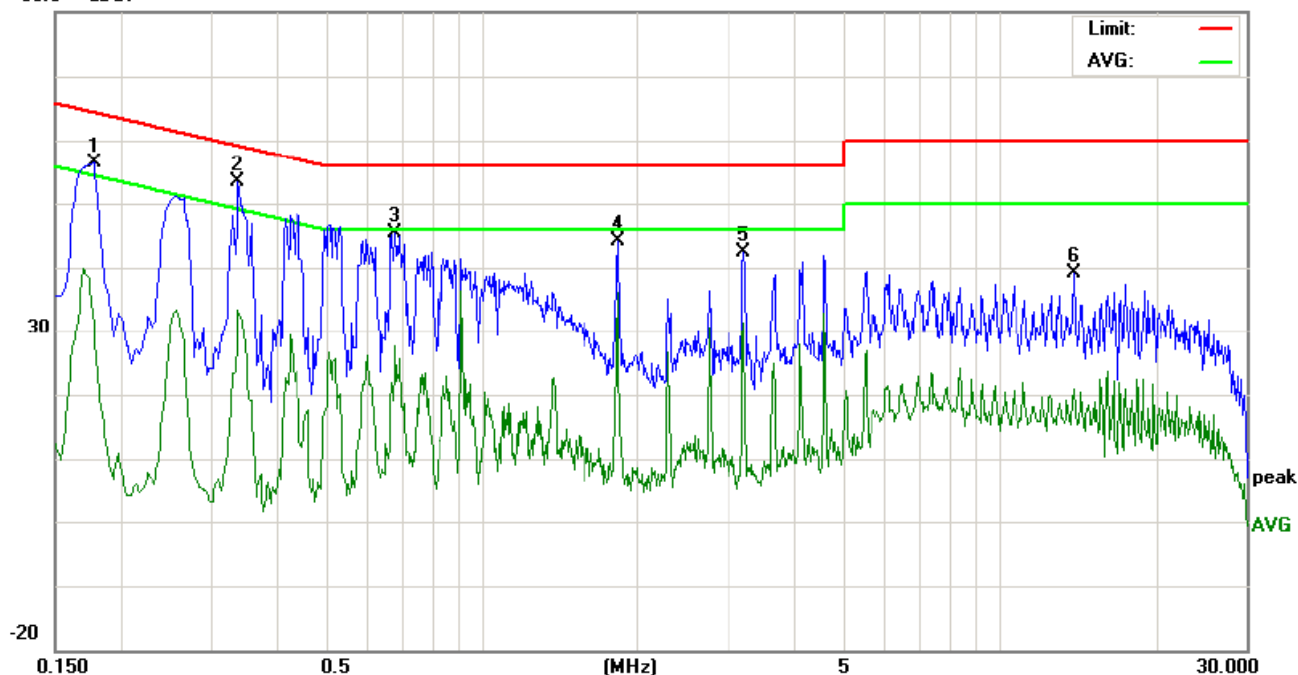

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	46.48		21.33	9.80	56.28		31.13	64.57	54.57	-8.29	-23.44	P	
2	0.3379	43.49		23.47	9.84	53.33		33.31	59.25	49.25	-5.92	-15.94	P	
3	0.6780	35.51		13.72	9.90	45.41		23.62	56.00	46.00	-10.59	-22.38	P	
4	1.8340	34.05		26.16	9.95	44.00		36.11	56.00	46.00	-12.00	-9.89	P	
5	3.2100	32.49		21.47	10.00	42.49		31.47	56.00	46.00	-13.51	-14.53	P	
6	13.9420	29.17		10.84	10.08	39.25		20.92	60.00	50.00	-20.75	-29.08	P	

Neutral line:

80.0 dBuV

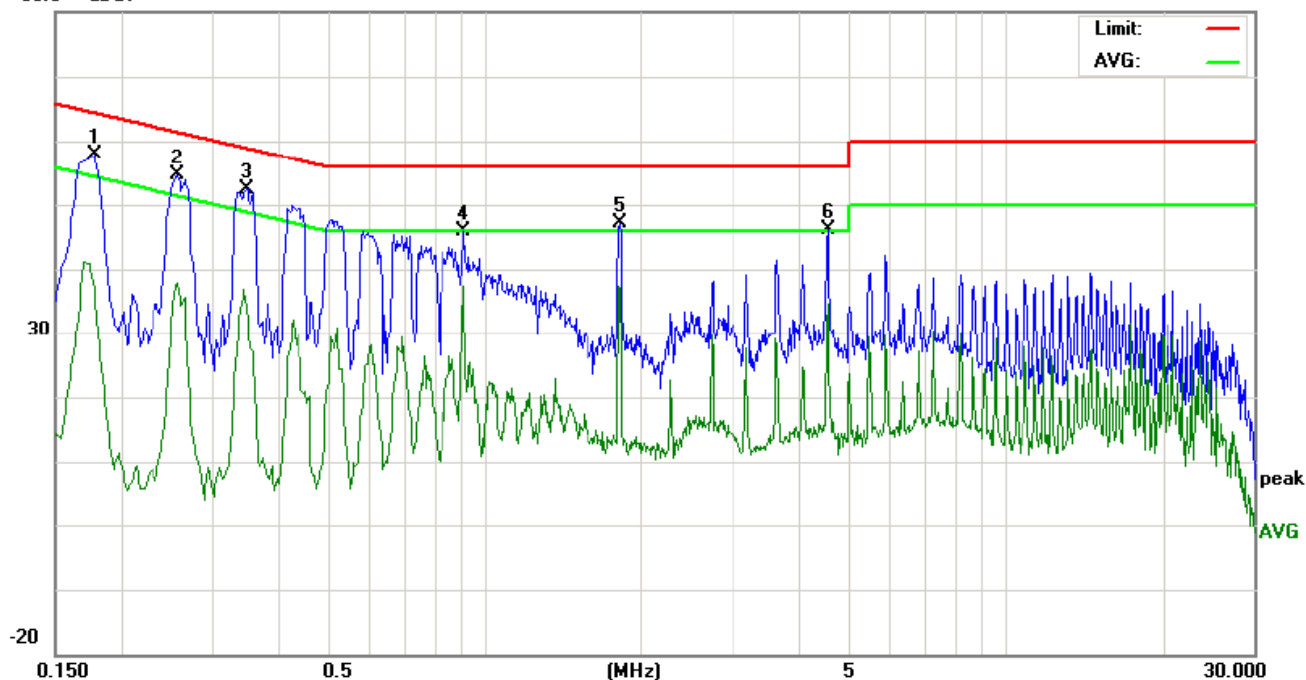

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	48.00		27.43	9.80	57.80		37.23	64.57	54.57	-6.77	-17.34	P	
2	0.2580	44.84		28.04	9.80	54.64		37.84	61.49	51.49	-6.85	-13.65	P	
3	0.3500	42.54		24.20	9.85	52.39		34.05	58.96	48.96	-6.57	-14.91	P	
4	0.9100	36.09		27.75	9.70	45.79		37.45	56.00	46.00	-10.21	-8.55	P	
5	1.8180	36.33		27.50	9.95	46.28		37.45	56.00	46.00	-9.72	-8.55	P	
6	4.5620	36.08		24.51	10.00	46.08		34.51	56.00	46.00	-9.92	-11.49	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. AC120V and 240V are tested and found the worst case is 120V, So only the 120V data were shown in the above.

Appendix K): Restricted bands around fundamental frequency (Radiated)


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). b. Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:


Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

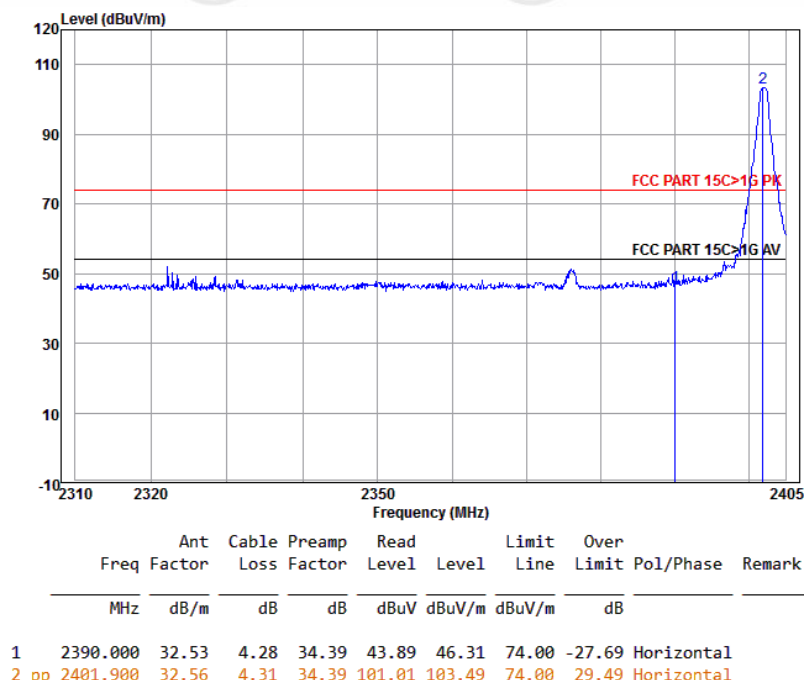

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

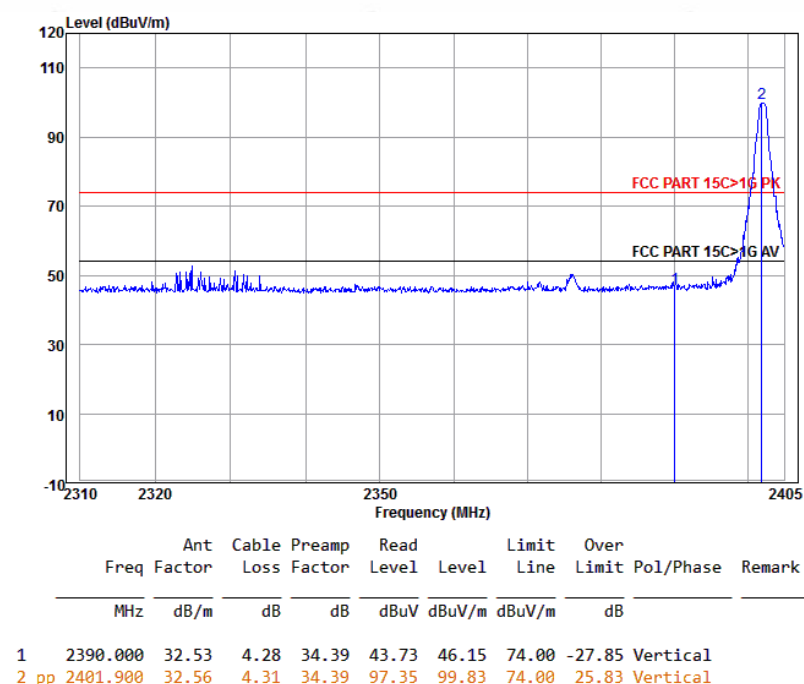


Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

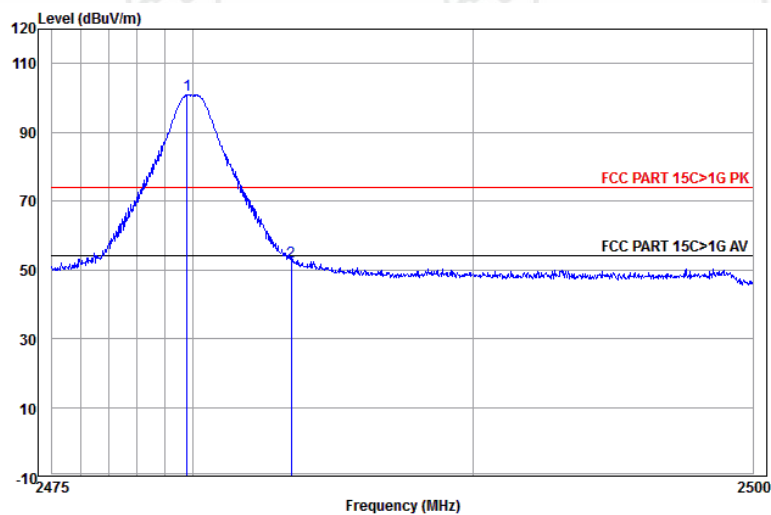


	Ant Freq	Cable Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.805	32.71	4.50	98.07	100.87	74.00	26.87	Horizontal
2	2483.500	32.71	4.51	49.61	52.42	74.00	-21.58	Horizontal

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

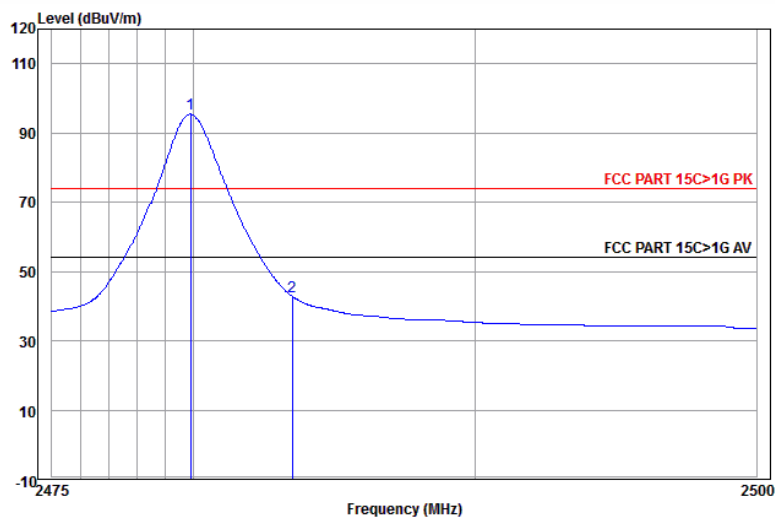


	Ant Freq	Cable Factor	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.905	32.71	4.50	34.41	92.75	95.55	54.00	41.55	Horizontal Average
2	2483.500	32.71	4.51	34.41	40.01	42.82	54.00	-11.18	Horizontal Average

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

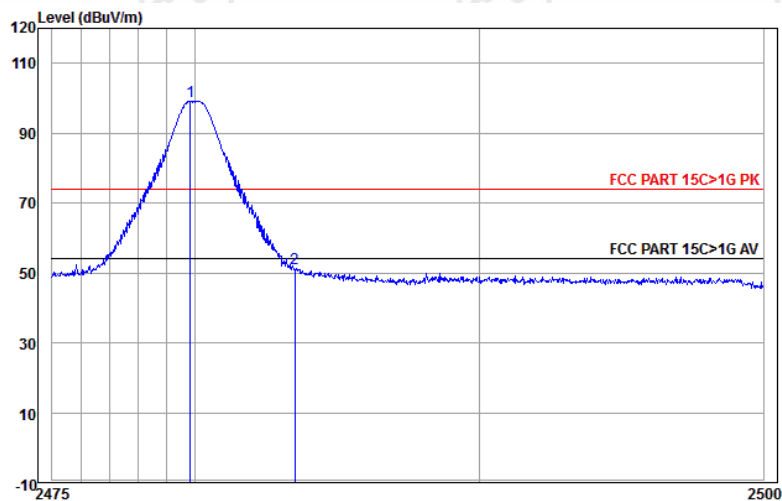


		Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp	2479.830	32.71	4.50	34.41	96.30	99.10	74.00	25.10	Vertical	
2		2483.500	32.71	4.51	34.41	48.38	51.19	74.00	-22.81	Vertical	

Worse case mode:	π /4DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

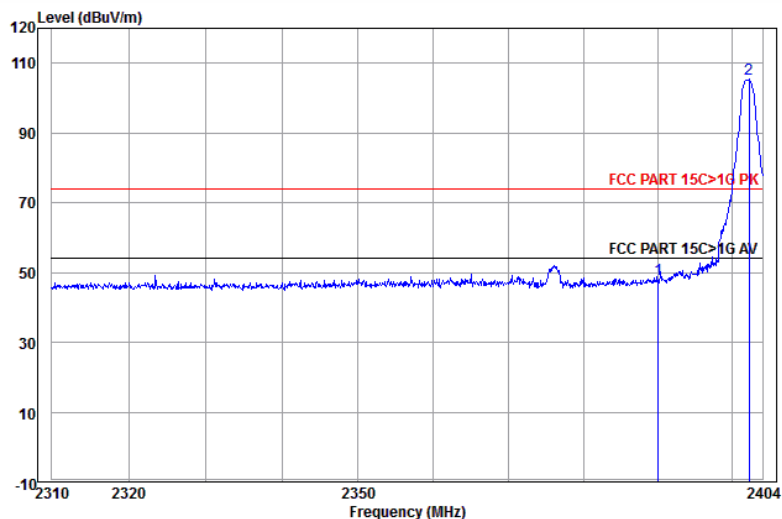


		Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1		2390.000	32.53	4.28	34.39	45.65	48.07	74.00	-25.93	Horizontal	
2	pp	2402.179	32.56	4.31	34.39	102.86	105.34	74.00	31.34	Horizontal	

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

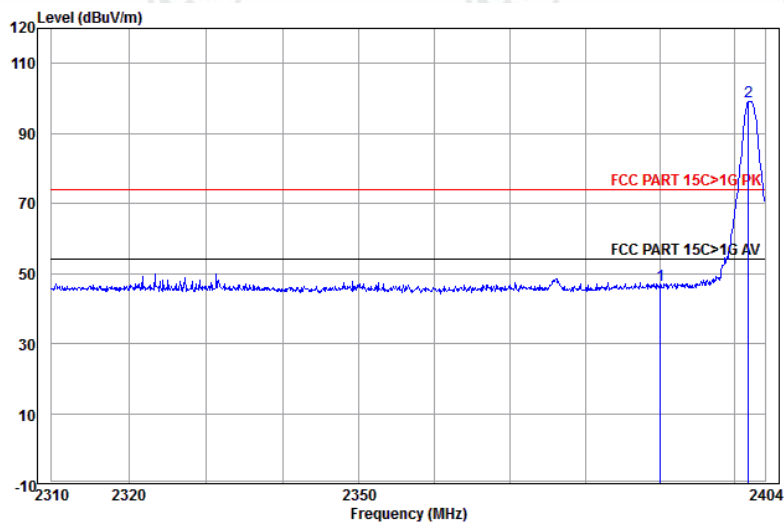


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	44.21	46.63	74.00	-27.37	Vertical	
2	2401.796	32.56	4.31	34.39	96.69	99.17	74.00	25.17	Vertical	

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

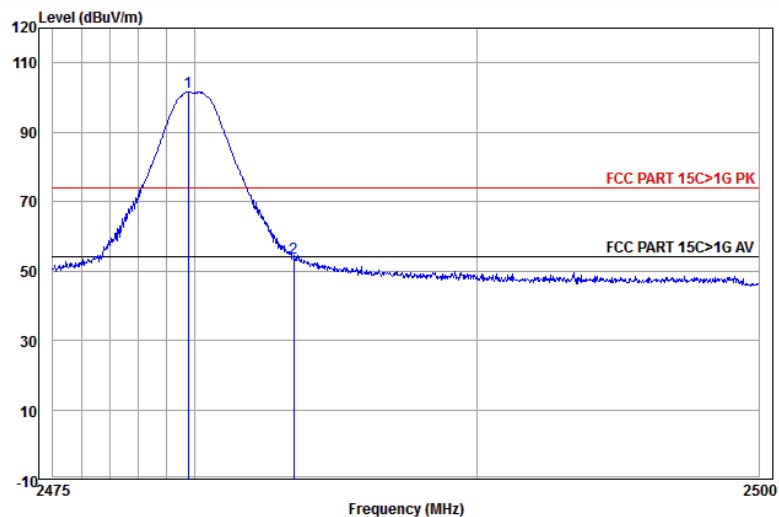


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2479.781	32.71	4.50	34.41	98.89	101.69	74.00	27.69	Horizontal	
2	2483.500	32.71	4.51	34.41	51.07	53.88	74.00	-20.12	Horizontal	

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Average

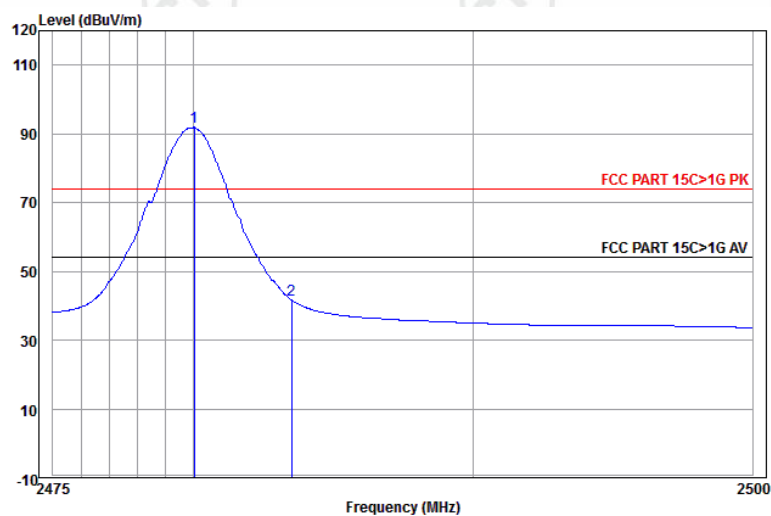


	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.030	32.71	4.50	34.41	89.09	91.89	54.00	37.89	Horizontal	Average
2	2483.500	32.71	4.51	34.41	38.90	41.71	54.00	-12.29	Horizontal	Average

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

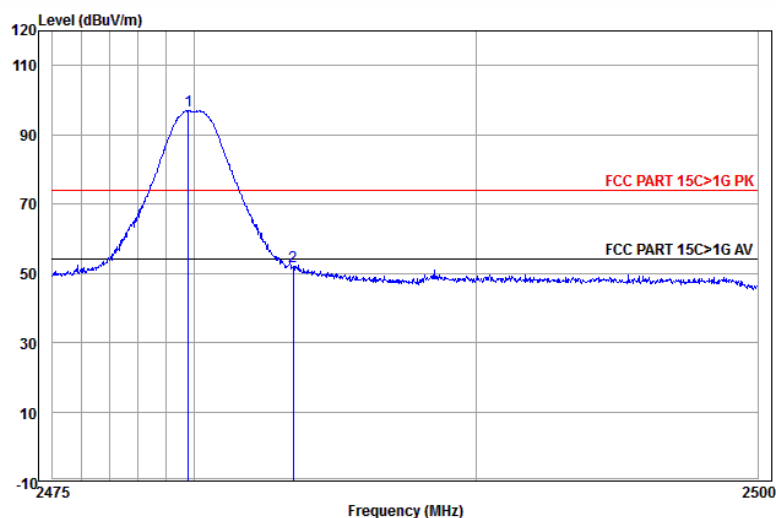


	Ant Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.805	32.71	4.50	34.41	94.19	96.99	74.00	22.99	Vertical	
2	2483.500	32.71	4.51	34.41	49.14	51.95	74.00	-22.05	Vertical	

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

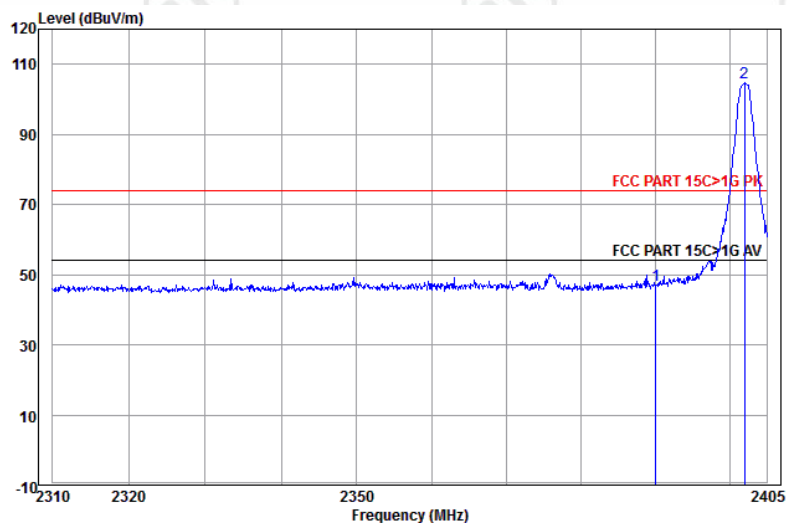


	Ant	Cable	Preamp	Read	Limit	Over		
Freq	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	32.53	4.28	34.39	44.50	46.92	74.00	-27.08	Horizontal
2 pp 2401.997	32.56	4.31	34.39	102.16	104.64	74.00	30.64	Horizontal

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

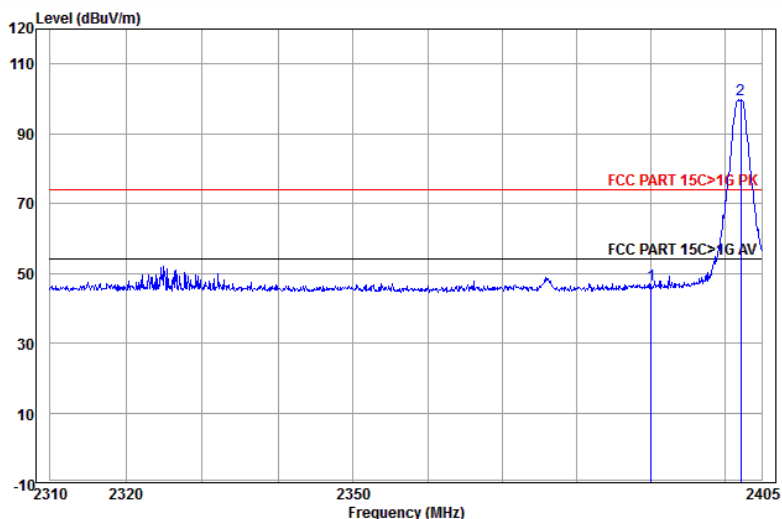


	Ant	Cable	Preamp	Read	Limit	Over		
Freq	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	32.53	4.28	34.39	44.17	46.59	74.00	-27.41	Vertical
2 pp 2402.191	32.56	4.31	34.39	97.21	99.69	74.00	25.69	Vertical

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

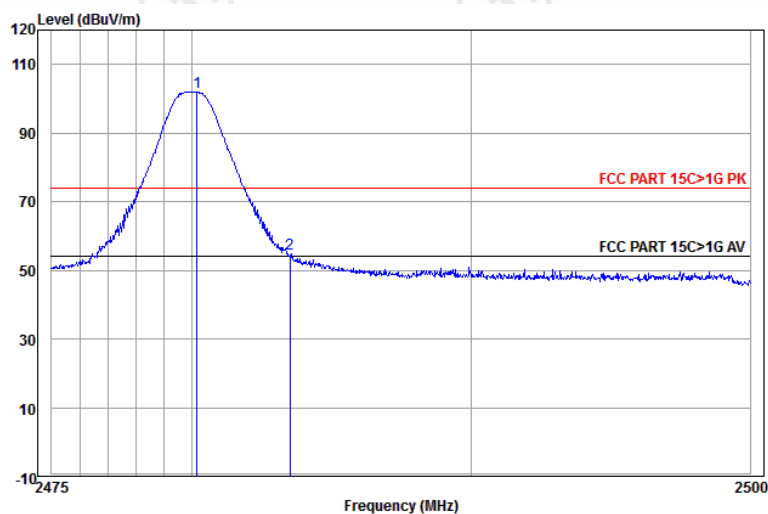


	Ant	Cable	Preamp	Read	Limit	Over		
Freq	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2480.179	32.71	4.50	34.41	99.24	102.04	74.00	28.04	Horizontal
2 2483.500	32.71	4.51	34.41	51.85	54.66	74.00	-19.34	Horizontal

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

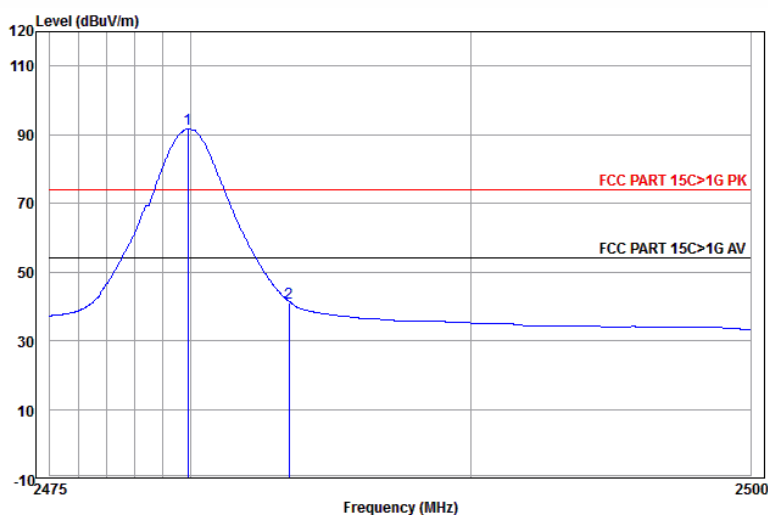

	Ant	Cable	Preamp	Read	Limit	Over		
Freq	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2479.905	32.71	4.50	34.41	88.90	91.70	54.00	37.70	Horizontal Average
2 2483.500	32.71	4.51	34.41	38.23	41.04	54.00	-12.96	Horizontal Average

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

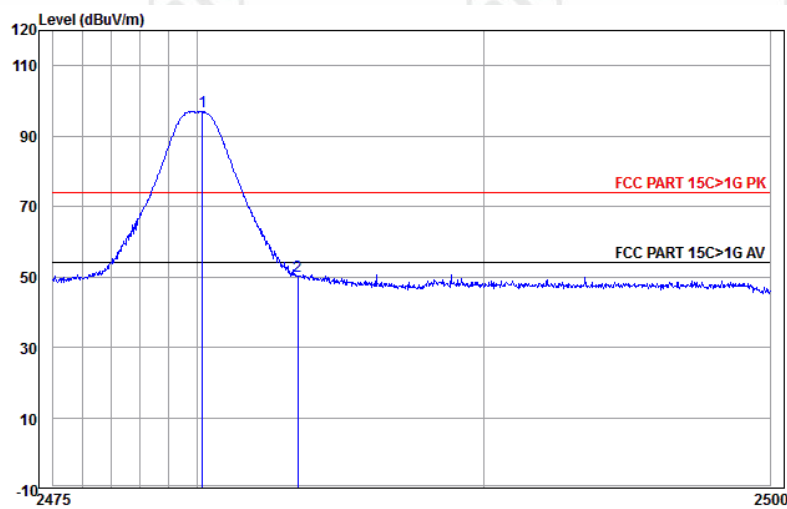

	Ant	Cable	Preamp	Read	Limit	Over		
	Freq	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 2480.179	32.71	4.50	34.41	94.20	97.00	74.00	23.00 Vertical
2	2483.500	32.71	4.51	34.41	47.41	50.22	74.00	-23.78 Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


Appendix L): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz


30MHz~1GHz (QP)

Test mode:	Transmitting	Horizontal
------------	--------------	------------

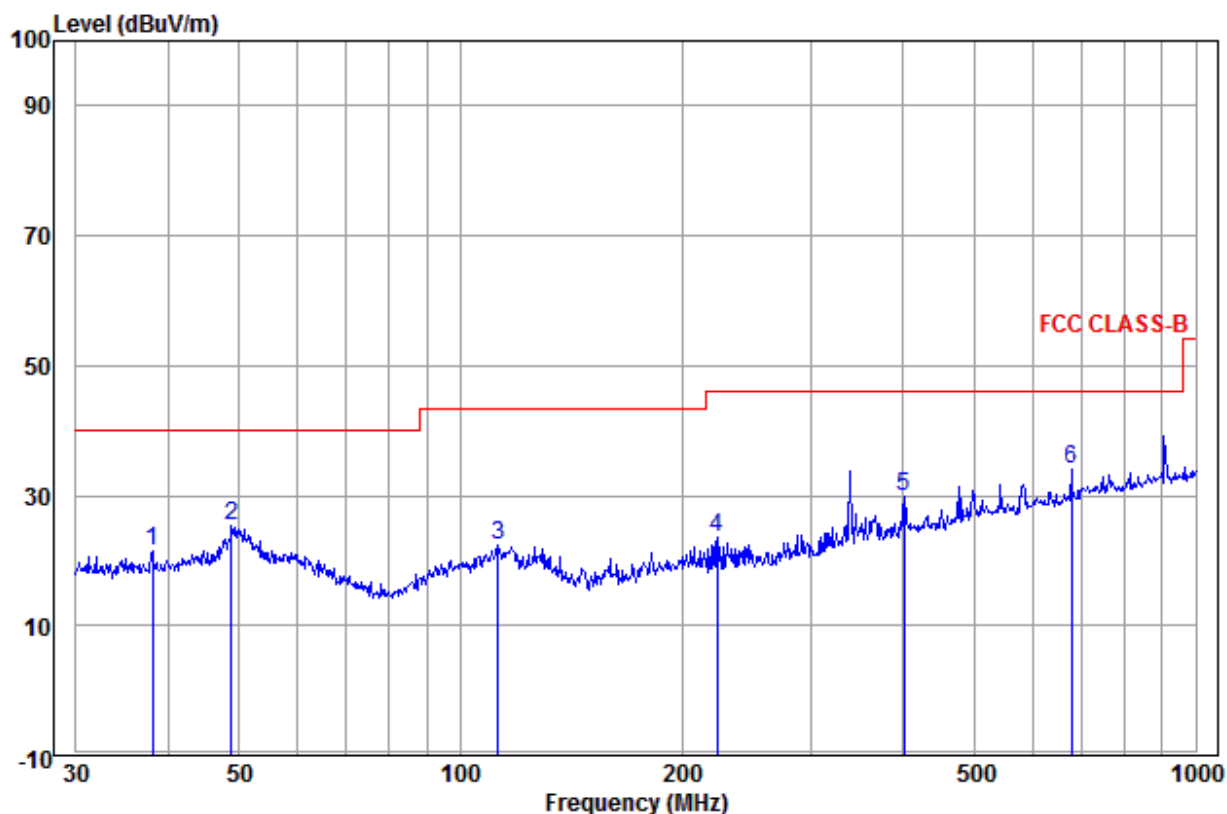

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	38.078	13.91	0.64	6.79	21.34	40.00	-18.66	Horizontal	
2	48.843	15.01	1.31	8.94	25.26	40.00	-14.74	Horizontal	
3	112.524	12.18	1.57	8.73	22.48	43.50	-21.02	Horizontal	
4	223.733	12.00	2.28	9.30	23.58	46.00	-22.42	Horizontal	
5	401.839	16.33	2.81	10.61	29.75	46.00	-16.25	Horizontal	
6 pp	677.580	20.22	3.75	9.95	33.92	46.00	-12.08	Horizontal	

Test mode:	Transmitting	Vertical
------------	--------------	----------

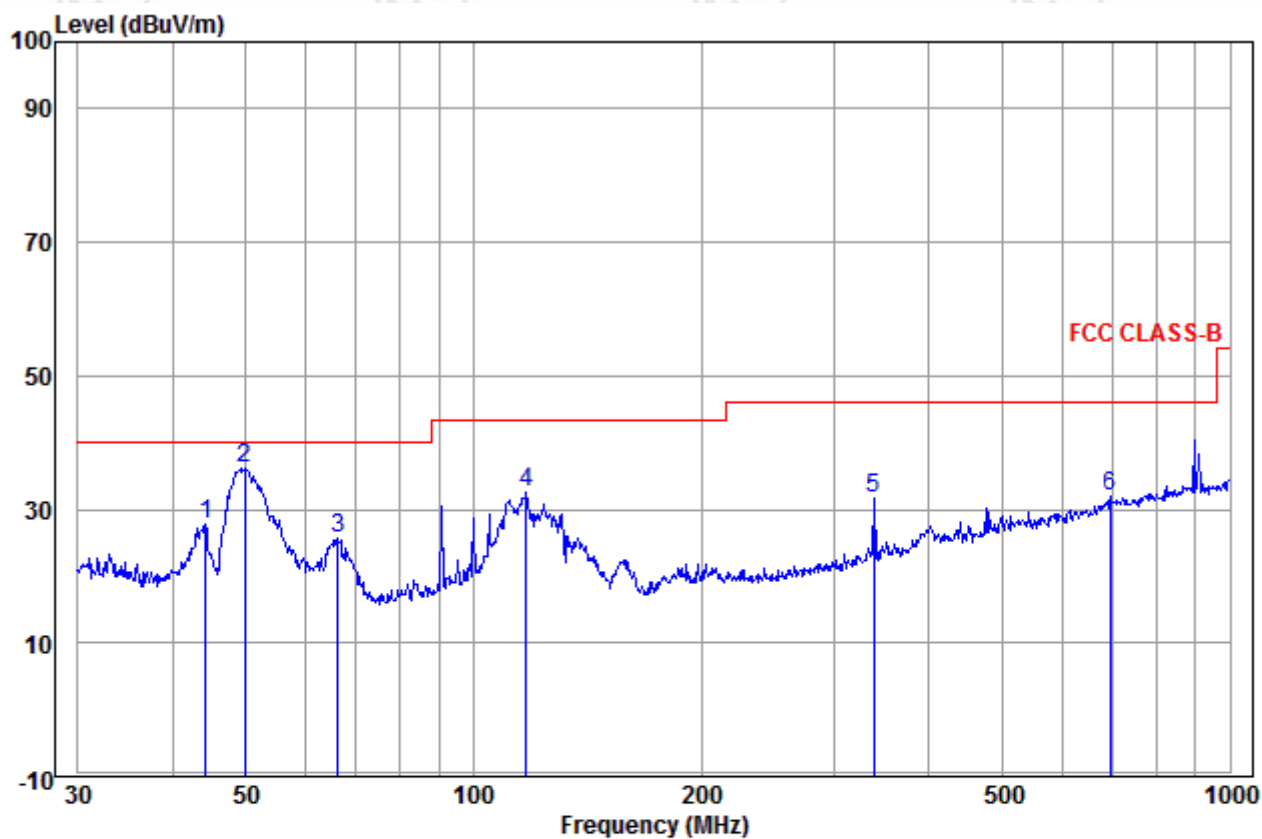

	Ant Freq	Cable Factor	Read Loss	Level	Level	Limit	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	44.275	14.61	0.93	12.17	27.71	40.00	-12.29	Vertical	
2 pp	49.881	15.09	1.39	19.76	36.24	40.00	-3.76	Vertical	
3	66.266	11.61	1.44	12.70	25.75	40.00	-14.25	Vertical	
4	117.360	11.82	1.57	19.06	32.45	43.50	-11.05	Vertical	
5	338.400	14.52	2.64	14.42	31.58	46.00	-14.42	Vertical	
6	694.417	20.58	3.86	7.44	31.88	46.00	-14.12	Vertical	

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1138.626	30.07	2.44	35.03	44.31	41.79	74.00	-32.21	Pass	H
1406.496	30.68	2.74	34.76	44.11	42.77	74.00	-31.23	Pass	H
1741.812	31.30	3.04	34.48	43.97	43.83	74.00	-30.17	Pass	H
4804.000	34.69	5.11	34.35	42.39	47.84	74.00	-26.16	Pass	H
7206.000	36.42	6.66	34.90	38.49	46.67	74.00	-27.33	Pass	H
9608.000	37.88	7.73	35.08	39.18	49.71	74.00	-24.29	Pass	H
1153.210	30.11	2.46	35.01	45.81	43.37	74.00	-30.63	Pass	V
1439.090	30.75	2.77	34.73	43.86	42.65	74.00	-31.35	Pass	V
1750.702	31.32	3.04	34.47	42.92	42.81	74.00	-31.19	Pass	V
4804.000	34.69	5.11	34.35	40.04	45.49	74.00	-28.51	Pass	V
7206.000	36.42	6.66	34.90	39.08	47.26	74.00	-26.74	Pass	V
9608.000	37.88	7.73	35.08	39.39	49.92	74.00	-24.08	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1101.563	29.98	2.40	35.07	45.25	42.56	74.00	-31.44	Pass	H
1228.984	30.29	2.55	34.93	43.78	41.69	74.00	-32.31	Pass	H
1525.860	30.92	2.85	34.65	44.83	43.95	74.00	-30.05	Pass	H
4882.000	34.85	5.08	34.33	43.03	48.63	74.00	-25.37	Pass	H
7323.000	36.43	6.77	34.90	39.20	47.50	74.00	-26.50	Pass	H
9764.000	38.05	7.60	35.05	38.62	49.22	74.00	-24.78	Pass	H
1107.186	29.99	2.40	35.07	44.47	41.79	74.00	-32.21	Pass	V
1319.777	30.50	2.65	34.84	42.94	41.25	74.00	-32.75	Pass	V
1768.619	31.35	3.06	34.46	42.24	42.19	74.00	-31.81	Pass	V
4882.000	34.85	5.08	34.33	42.52	48.12	74.00	-25.88	Pass	V
7323.000	36.43	6.77	34.90	39.55	47.85	74.00	-26.15	Pass	V
9764.000	38.05	7.60	35.05	38.67	49.27	74.00	-24.73	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1101.563	29.98	2.40	35.07	44.26	41.57	74.00	-32.43	Pass	H
1323.141	30.51	2.65	34.84	43.26	41.58	74.00	-32.42	Pass	H
1613.749	31.08	2.93	34.58	43.89	43.32	74.00	-30.68	Pass	H
4960.000	35.01	5.05	34.31	40.48	46.23	74.00	-27.77	Pass	H
7440.000	36.44	6.87	34.90	39.78	48.19	74.00	-25.81	Pass	H
9920.000	38.21	7.48	35.02	40.27	51.14	74.00	-23.06	Pass	H
1101.563	29.98	2.40	35.07	43.90	41.21	74.00	-32.79	Pass	V
1280.072	30.41	2.61	34.88	44.19	42.33	74.00	-31.67	Pass	V
1609.646	31.07	2.93	34.58	43.87	43.29	74.00	-30.71	Pass	V
4960.000	35.01	5.05	34.31	40.05	45.80	74.00	-28.20	Pass	V
7440.000	36.44	6.87	34.90	39.44	47.85	74.00	-26.15	Pass	V
9920.000	38.23	7.46	35.01	39.20	49.88	74.00	-24.12	Pass	V

Worse case mode:		π/4DQPSK(2-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1156.150	30.12	2.46	35.01	44.72	42.29	74.00	-31.71	Pass	H
1442.758	30.76	2.77	34.72	42.92	41.73	74.00	-32.27	Pass	H
1837.456	31.46	3.11	34.41	43.54	43.70	74.00	-30.30	Pass	H
4804.000	34.69	5.11	34.35	43.84	49.29	74.00	-24.71	Pass	H
7206.000	36.42	6.66	34.90	39.54	47.72	74.00	-26.28	Pass	H
9608.000	37.88	7.73	35.08	38.41	48.94	74.00	-25.06	Pass	H
1150.279	30.10	2.46	35.02	46.54	44.08	74.00	-29.92	Pass	V
1388.708	30.65	2.72	34.77	43.68	42.28	74.00	-31.72	Pass	V
1621.985	31.10	2.94	34.57	43.71	43.18	74.00	-30.82	Pass	V
4804.000	34.69	5.11	34.35	40.91	46.36	74.00	-27.64	Pass	V
7206.000	36.42	6.66	34.90	39.63	47.81	74.00	-26.19	Pass	V
9608.000	37.88	7.73	35.08	38.61	49.14	74.00	-24.86	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1141.528	30.08	2.45	35.03	43.51	41.01	74.00	-32.99	Pass	H
1350.362	30.57	2.68	34.81	44.58	43.02	74.00	-30.98	Pass	H
1805.005	31.40	3.09	34.43	43.43	43.49	74.00	-30.51	Pass	H
4882.000	34.85	5.08	34.33	45.20	50.80	74.00	-23.20	Pass	H
7323.000	36.43	6.77	34.90	40.18	48.48	74.00	-25.52	Pass	H
9764.000	38.05	7.60	35.05	39.59	50.19	74.00	-23.81	Pass	H
1138.626	30.07	2.44	35.03	44.00	41.48	74.00	-32.52	Pass	V
1374.639	30.62	2.71	34.79	43.58	42.12	74.00	-31.88	Pass	V
1786.719	31.37	3.07	34.45	42.60	42.59	74.00	-31.41	Pass	V
4882.000	34.85	5.08	34.33	42.60	48.20	74.00	-25.80	Pass	V
7323.000	36.43	6.77	34.90	42.07	50.37	74.00	-23.63	Pass	V
9764.000	38.05	7.60	35.05	39.92	50.52	74.00	-23.48	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1144.437	30.09	2.45	35.02	44.18	41.70	74.00	-32.30	Pass	H
1371.145	30.61	2.70	34.79	44.37	42.89	74.00	-31.11	Pass	H
1823.477	31.43	3.10	34.42	43.19	43.30	74.00	-30.70	Pass	H
4960.000	35.04	5.05	34.31	39.57	45.35	74.00	-28.65	Pass	H
7440.000	36.44	6.87	34.90	39.58	47.99	74.00	-26.01	Pass	H
9920.000	38.21	7.48	35.02	39.48	50.15	74.00	-23.85	Pass	H
1104.371	29.99	2.40	35.07	43.60	40.92	74.00	-33.08	Pass	V
1235.257	30.31	2.56	34.93	44.36	42.30	74.00	-31.70	Pass	V
1510.402	30.89	2.84	34.66	44.36	43.43	74.00	-30.57	Pass	V
4960.000	35.04	5.05	34.31	39.56	45.34	74.00	-28.66	Pass	V
7440.000	36.45	6.89	34.90	39.08	47.52	74.00	-26.48	Pass	V
9920.000	38.21	7.48	35.02	39.92	50.59	74.00	-23.41	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1127.091	30.05	2.43	35.04	44.12	41.56	74.00	-32.44	Pass	H
1381.656	30.63	2.71	34.78	44.01	42.57	74.00	-31.43	Pass	H
1706.700	31.24	3.01	34.51	43.40	43.14	74.00	-30.86	Pass	H
4804.000	34.69	5.11	34.35	42.24	47.69	74.00	-26.31	Pass	H
7206.000	36.42	6.66	34.90	39.42	47.60	74.00	-26.40	Pass	H
9608.000	37.88	7.73	35.08	40.04	50.57	74.00	-23.43	Pass	H
1112.837	30.01	2.41	35.06	44.64	42.00	74.00	-32.00	Pass	V
1346.929	30.56	2.68	34.81	43.59	42.02	74.00	-31.98	Pass	V
1791.273	31.38	3.08	34.44	43.18	43.20	74.00	-30.80	Pass	V
4804.000	34.69	5.11	34.35	41.05	46.50	74.00	-27.50	Pass	V
7206.000	36.42	6.66	34.90	39.59	47.77	74.00	-26.23	Pass	V
9608.000	37.88	7.73	35.08	38.95	49.48	74.00	-24.52	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1121.367	30.03	2.42	35.05	44.11	41.51	74.00	-32.49	Pass	H
1364.182	30.60	2.69	34.80	44.71	43.20	74.00	-30.80	Pass	H
1809.605	31.41	3.09	34.43	44.80	44.87	74.00	-29.13	Pass	H
4882.000	34.85	5.08	34.33	43.65	49.25	74.00	-24.75	Pass	H
7323.000	36.43	6.77	34.90	39.35	47.65	74.00	-26.35	Pass	H
9764.000	38.05	7.60	35.05	38.79	49.39	74.00	-24.61	Pass	H
1079.357	29.92	2.37	35.10	45.27	42.46	74.00	-31.54	Pass	V
1316.422	30.49	2.64	34.84	43.74	42.03	74.00	-31.97	Pass	V
1613.749	31.08	2.93	34.58	43.12	42.55	74.00	-31.45	Pass	V
4882.000	34.85	5.08	34.33	42.78	48.38	74.00	-25.62	Pass	V
7323.000	36.43	6.77	34.90	38.81	47.11	74.00	-26.89	Pass	V
9764.000	38.05	7.60	35.05	38.67	49.27	74.00	-24.73	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final Test Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1090.404	29.95	2.38	35.09	44.05	41.29	74.00	-32.71	Pass	H
1364.182	30.60	2.69	34.80	45.62	44.11	74.00	-29.89	Pass	H
1795.839	31.39	3.08	34.44	43.48	43.51	74.00	-30.49	Pass	H
4960.000	35.01	5.05	34.31	40.20	45.95	74.00	-28.05	Pass	H
7440.000	36.44	6.87	34.90	38.88	47.29	74.00	-26.71	Pass	H
9920.000	36.44	6.87	34.90	38.88	47.29	74.00	-26.71	Pass	H
1167.982	30.15	2.48	35.00	44.50	42.13	74.00	-31.87	Pass	V
1549.344	30.96	2.87	34.63	42.95	42.15	74.00	-31.85	Pass	V
2008.676	31.72	3.26	34.30	43.43	44.11	74.00	-29.89	Pass	V
4960.000	35.04	5.05	34.31	40.05	45.83	74.00	-28.17	Pass	V
7440.000	36.44	6.87	34.90	38.89	47.30	74.00	-26.70	Pass	V
9920.000	38.23	7.46	35.01	38.74	49.42	74.00	-24.58	Pass	V

Note:

1) Pre-scan transmitting mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test Model No.: Harmony

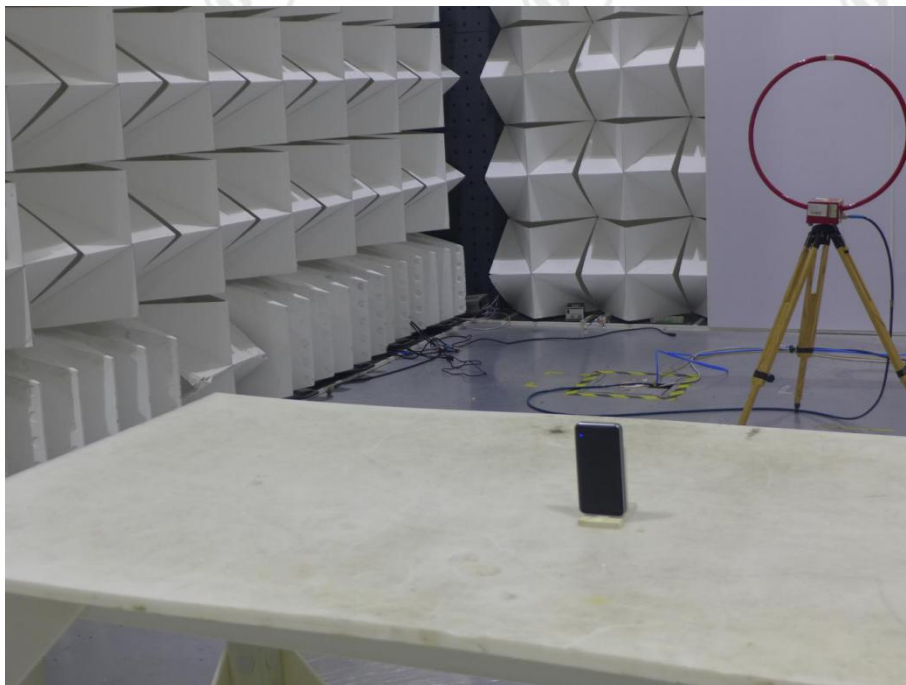


Radiated spurious emission Test Setup-1(Below 30MHz)



Radiated spurious emission Test Setup-2(30MHz-1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)

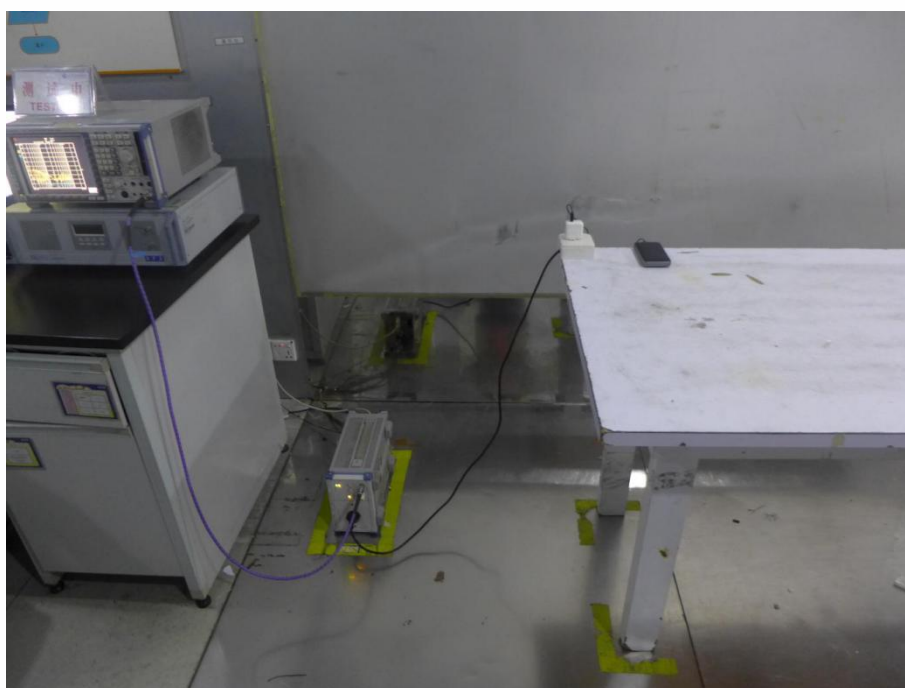


Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Test Model No.: Harmony



View of Product-1

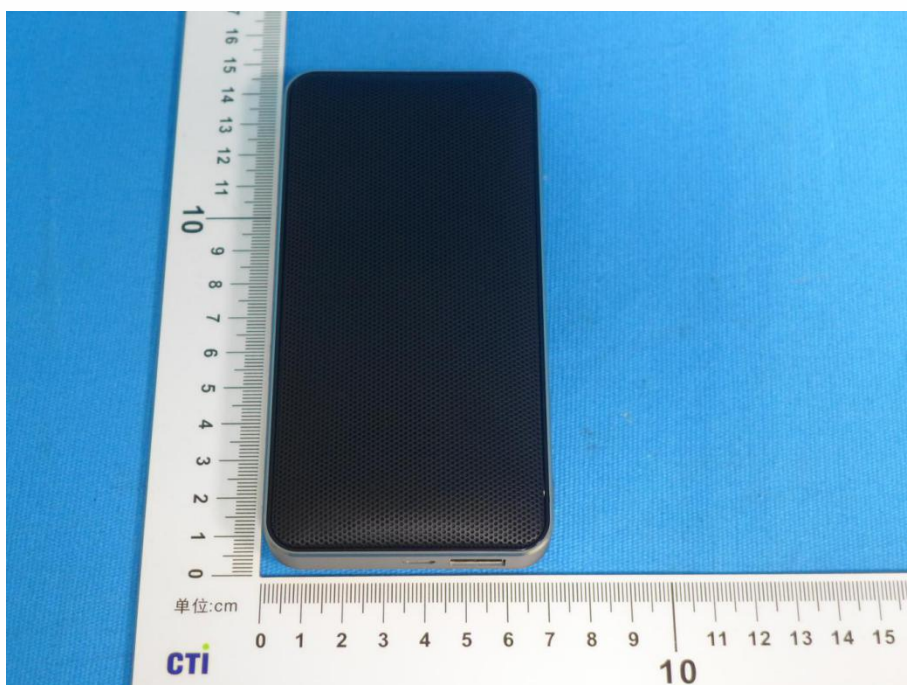

View of Product-2




View of Product-3



View of Product-4



View of Product-5

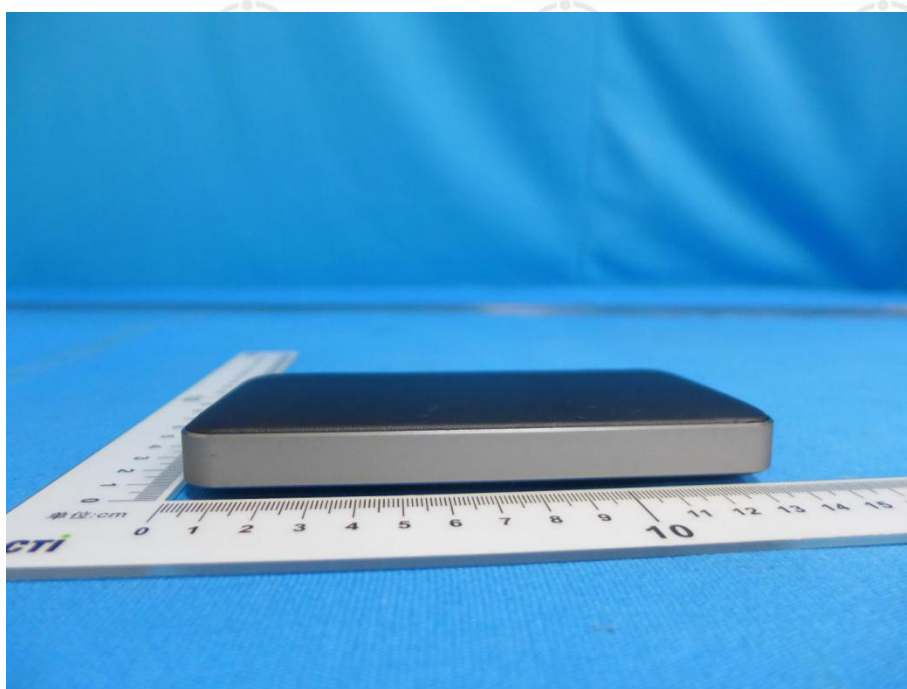


View of Product-6



View of Product-7




View of Product-8

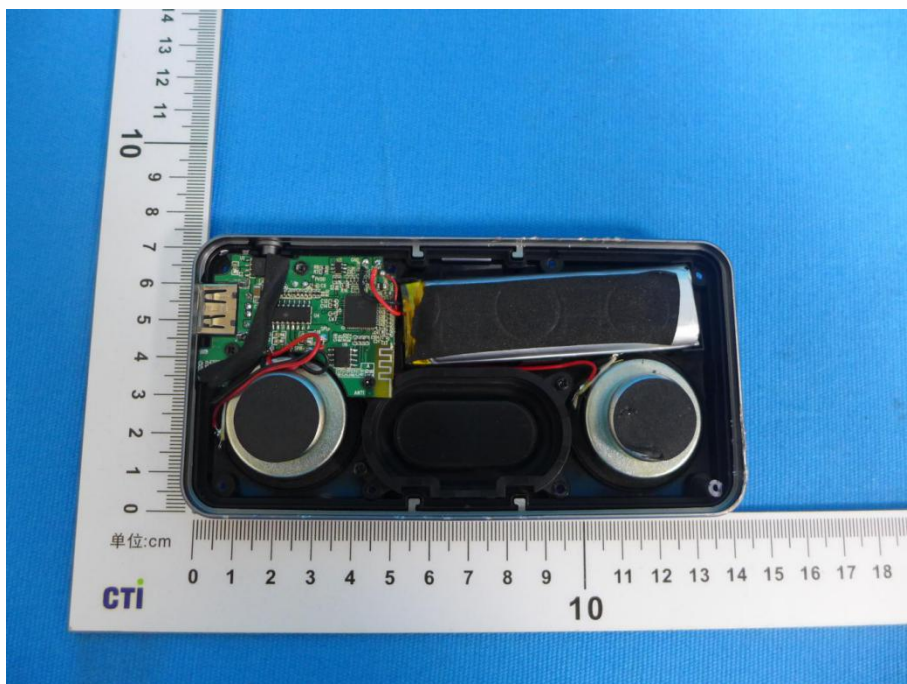


View of Product-9




View of Product-10

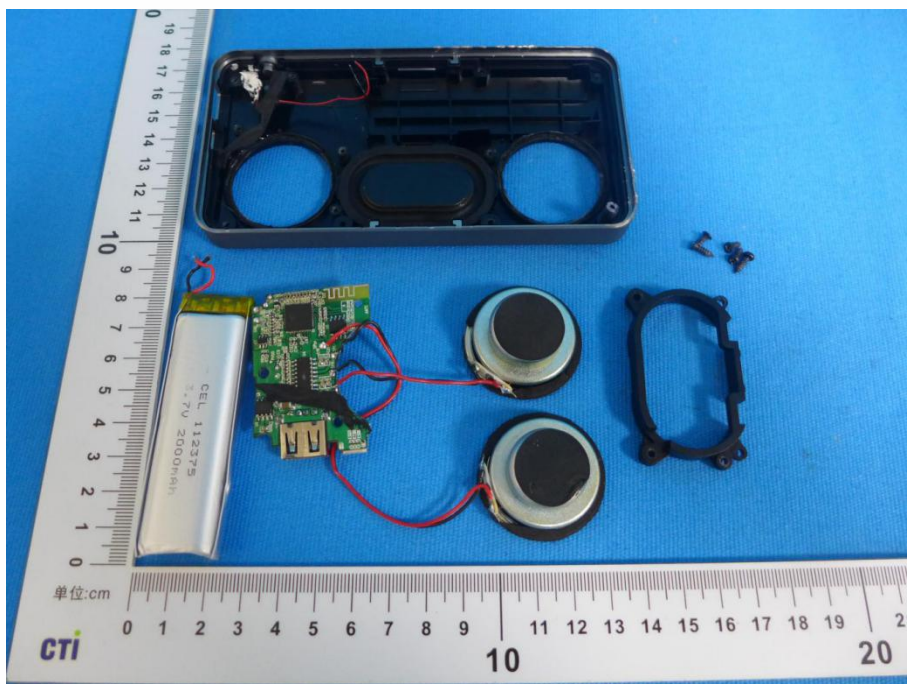


View of Product-11

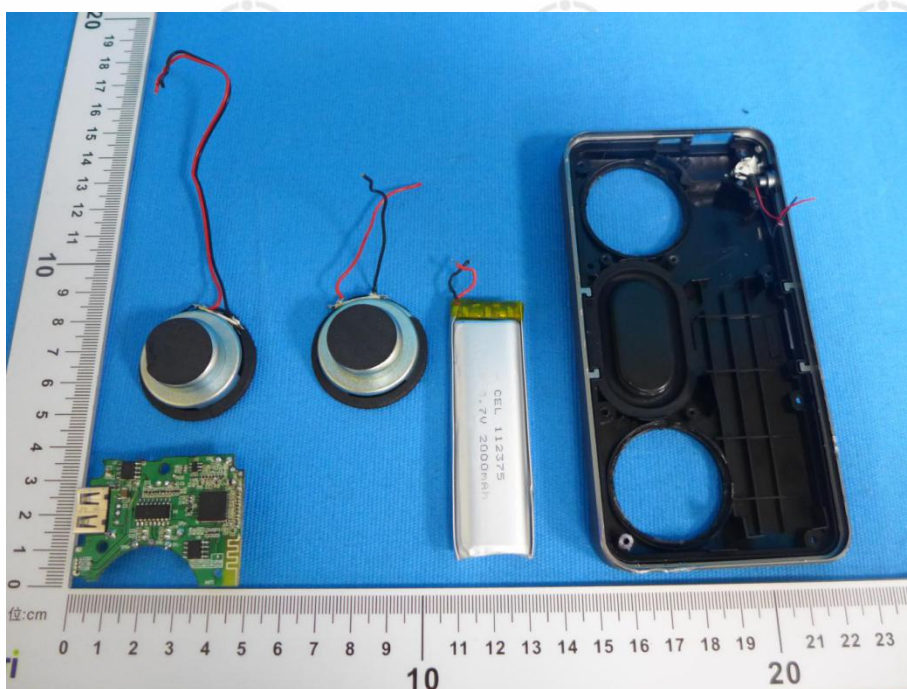

View of Product-12

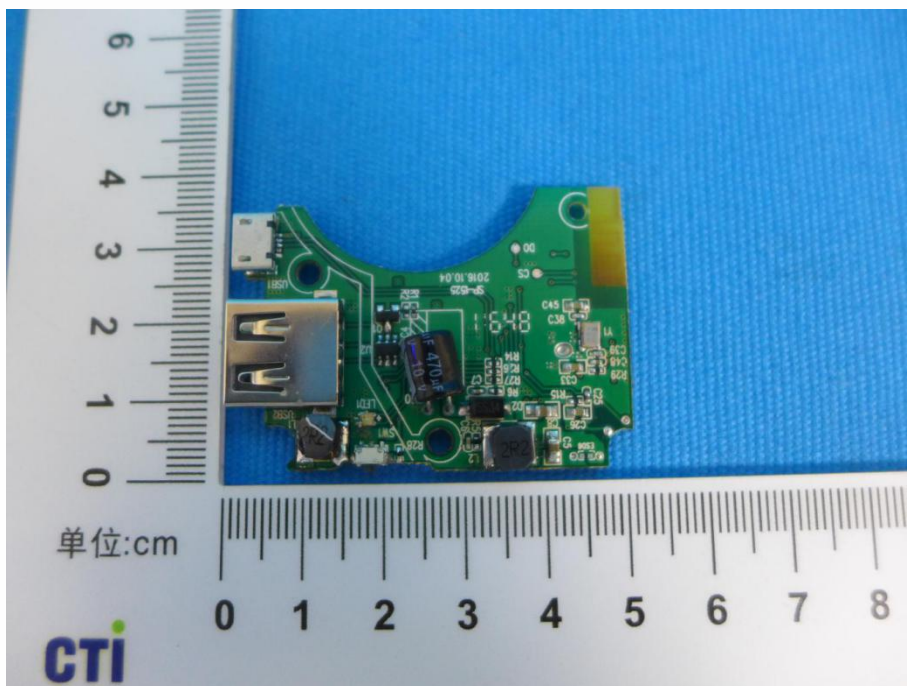


View of Product-13

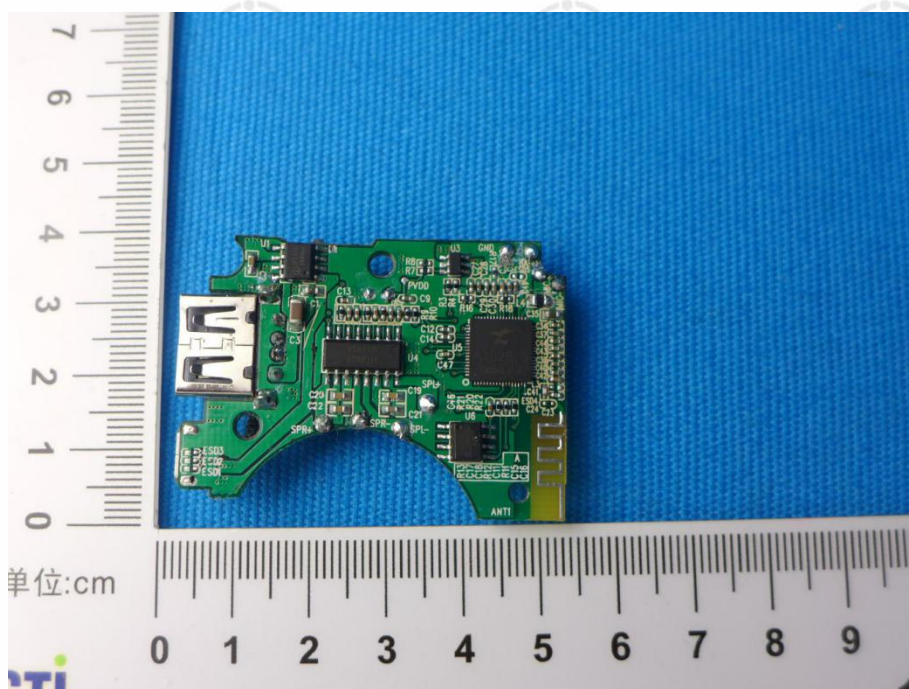

View of Product-14



View of Product-15

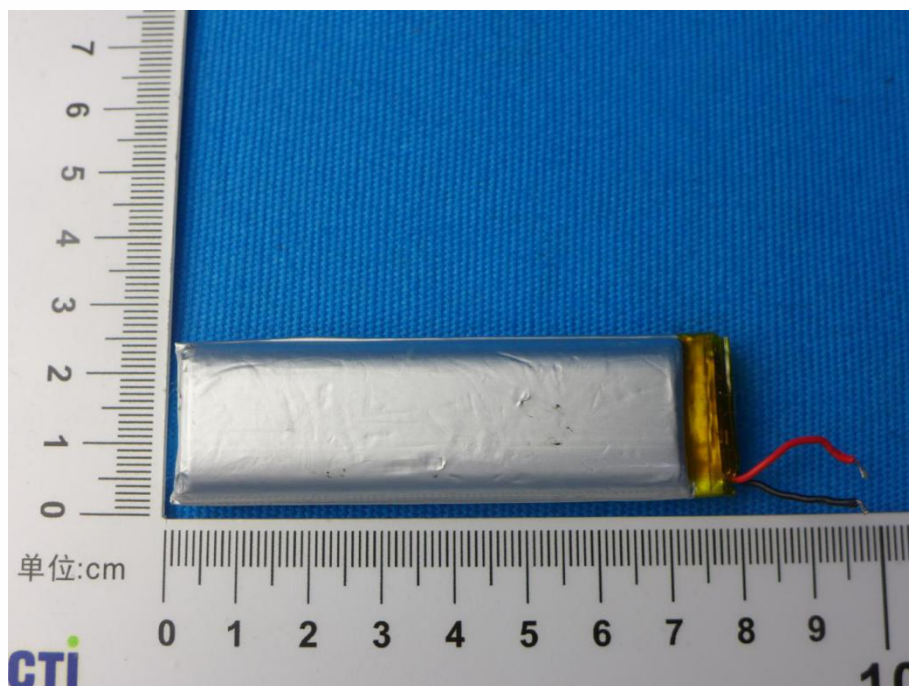

View of Product-16

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.