

RF Test Data for Bluetooth LE

(Conducted Measurements)

General Description of EUT	
Product Name:	Smart Battery Video Doorbell
Test Model:	DB2
Sample ID:	202211-0111-1-2
Environmental Conditions	
Temperature:	25℃
Relative Humidity:	55%
Test Voltage:	DC 5V
Test Engineer:	Huang jian ping
Note: For a more detailed features description, please refer to the report TBR-C-202211-0111-8	

Contents

1. Duty Cycle.....3

2. Maximum Conducted Output Power6

3. -6dB Bandwidth9

4. Occupied Channel Bandwidth12

5. Maximum Power Spectral Density Level.....15


6. Band Edge18


7. Conducted RF Spurious Emission21

8. Restrict Band25

1. Duty Cycle



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	100	0	0
NVNT	BLE 1Mbps	2440	Ant1	100	0	0
NVNT	BLE 1Mbps	2480	Ant1	100	0	0

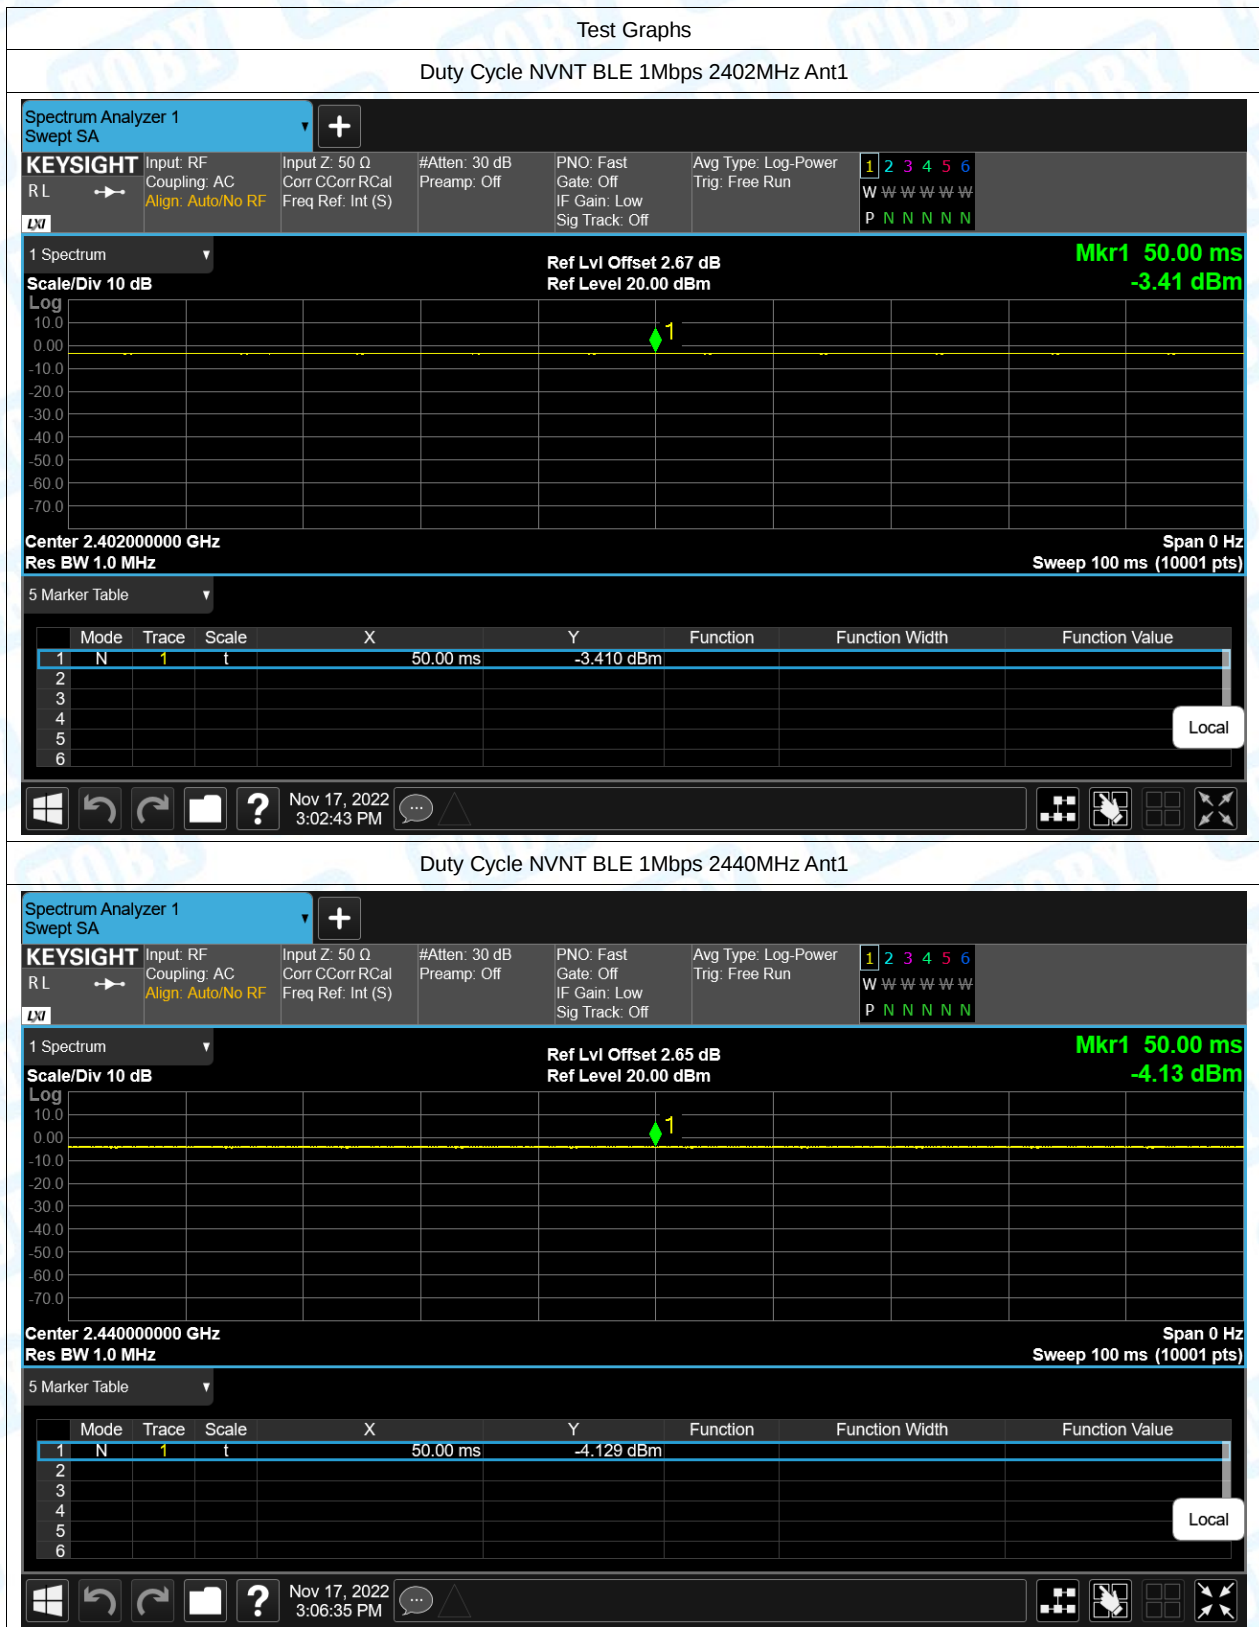


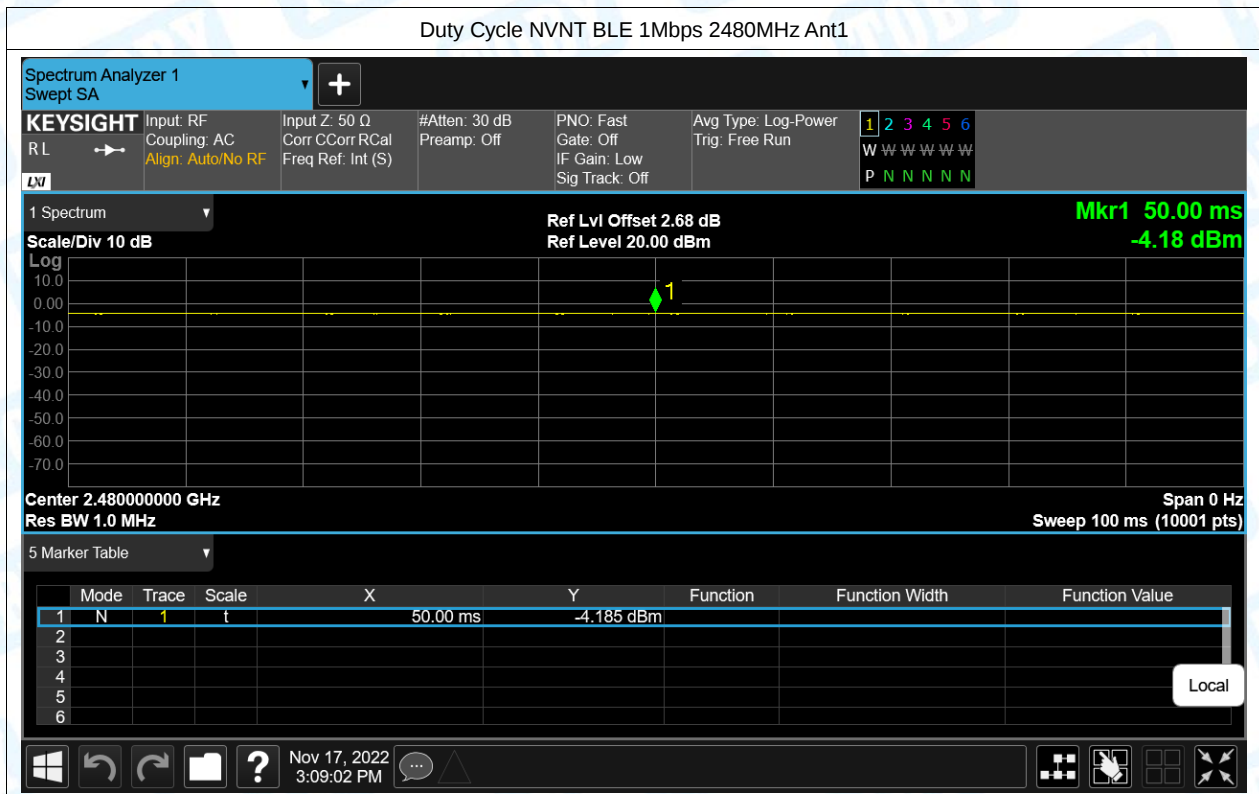

2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-3.27	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	-3.949	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	-4.052	30	Pass

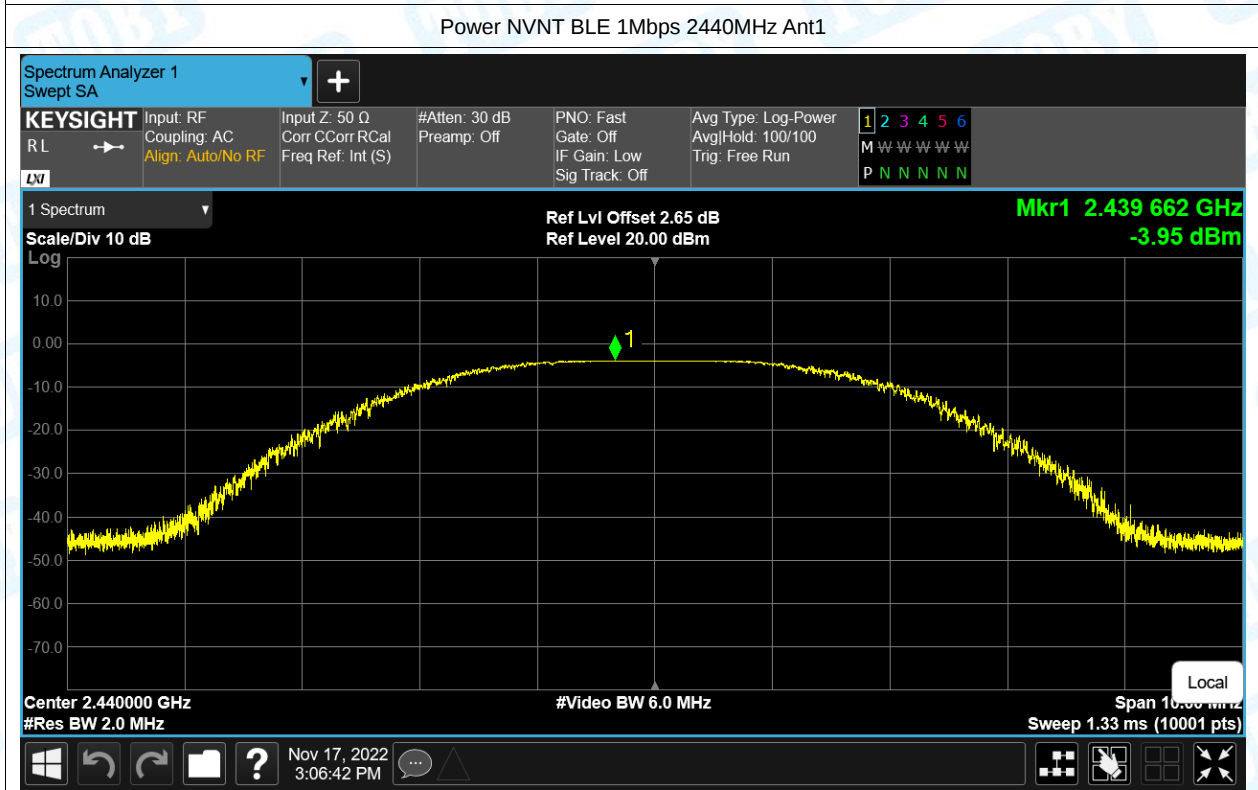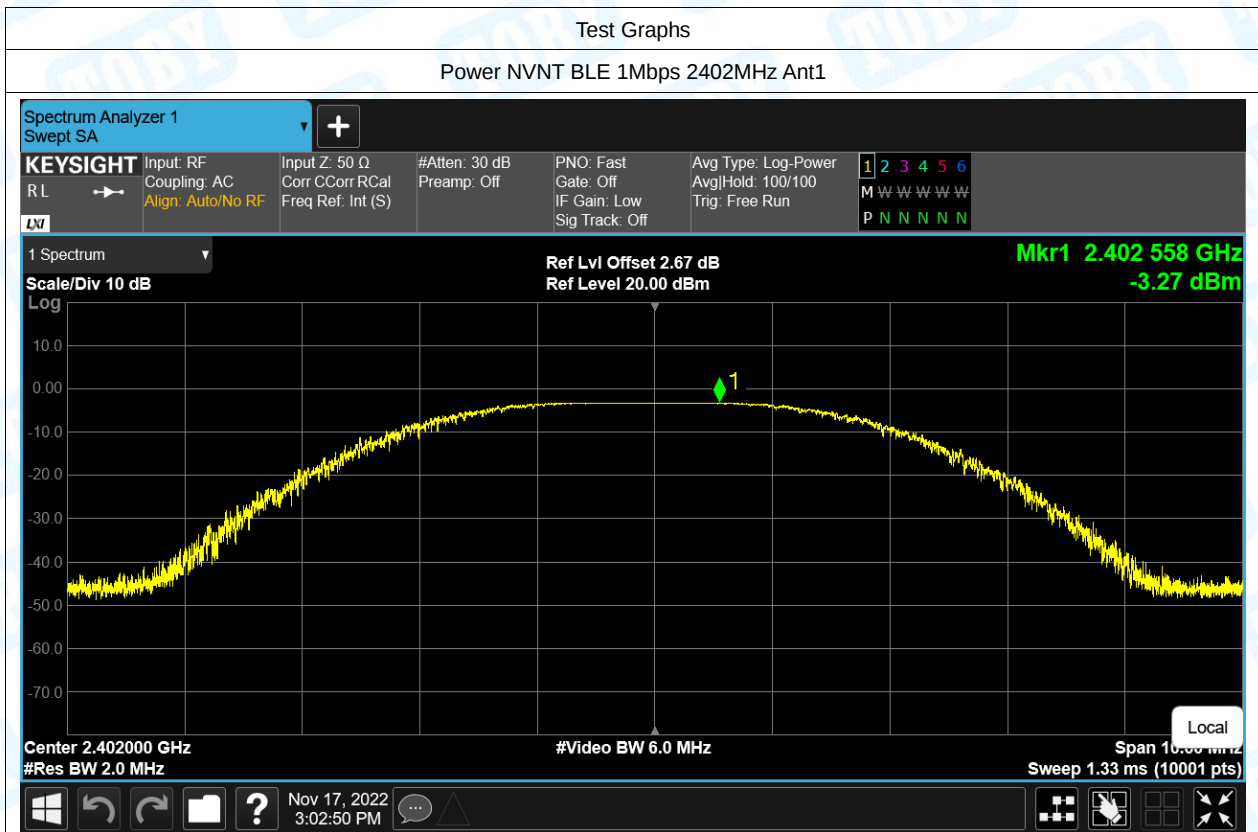


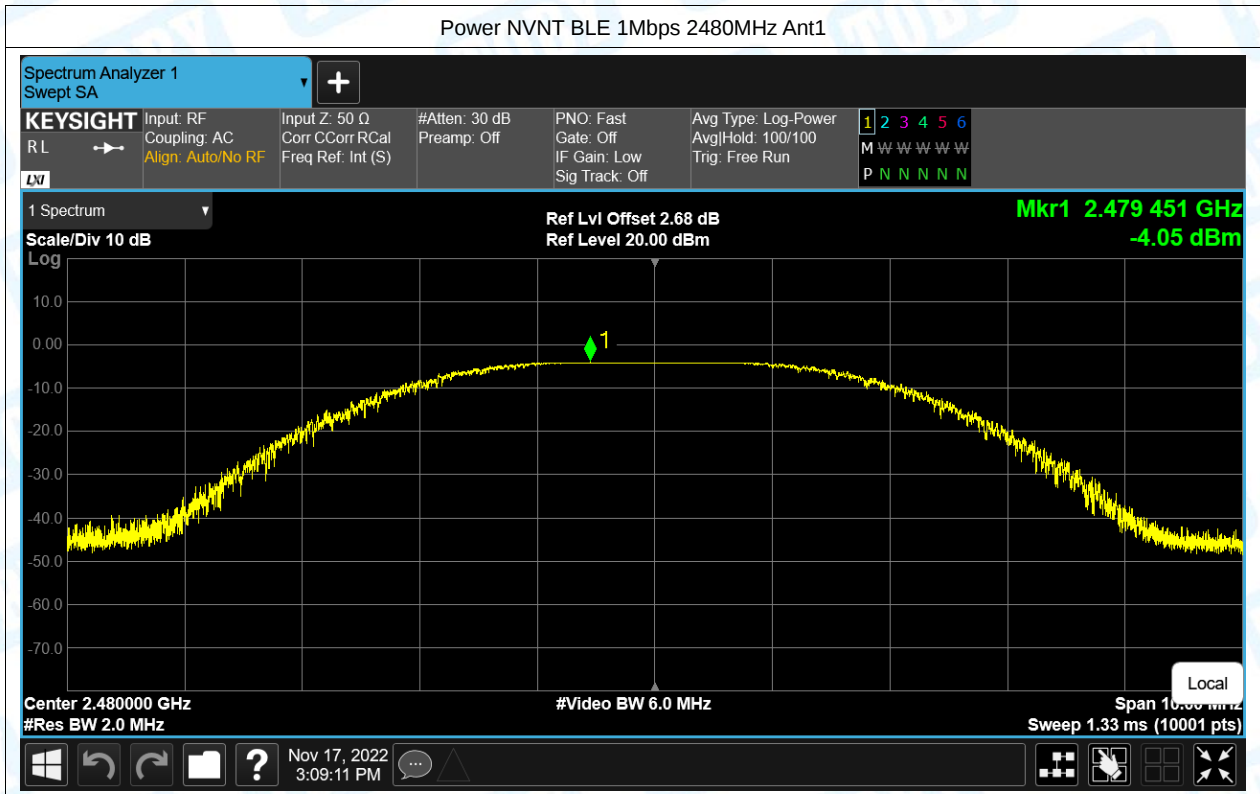

3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	1.25	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	1.26	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	1.26	0.5	Pass




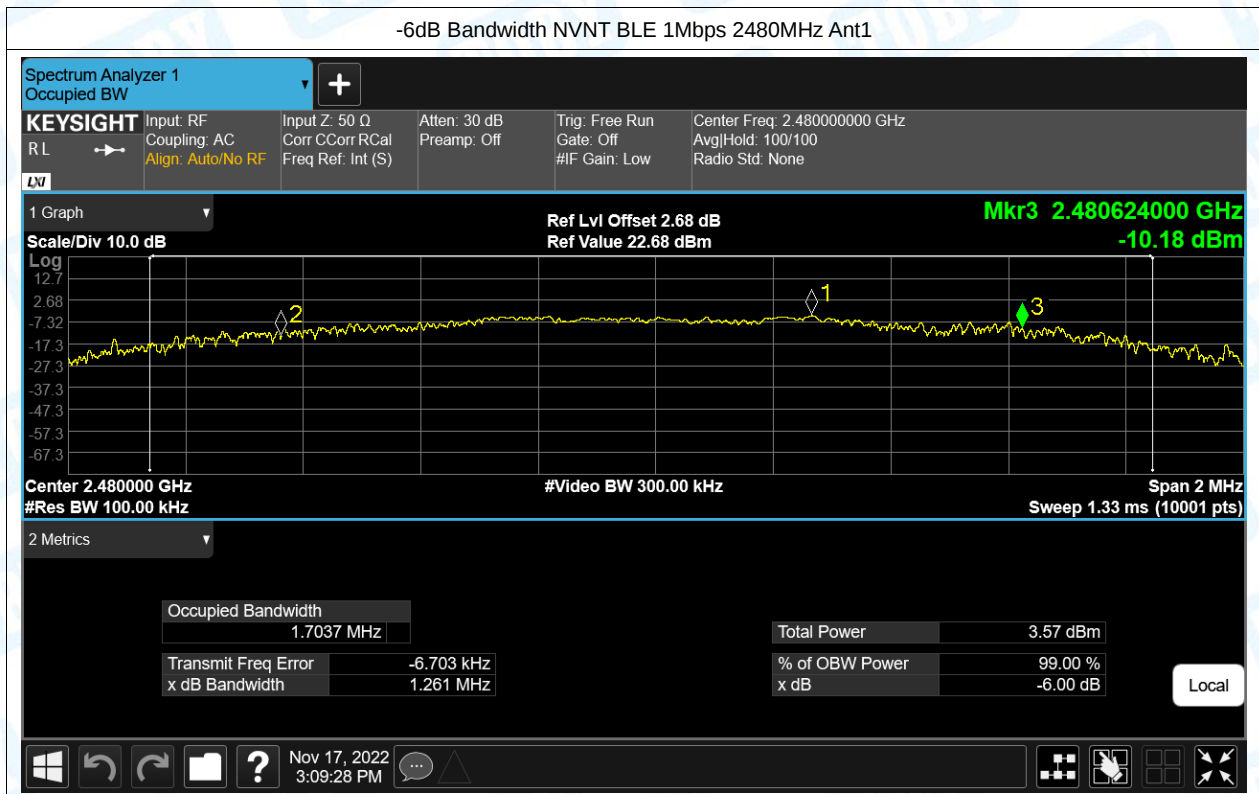

4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.466
NVNT	BLE 1Mbps	2440	Ant1	1.41
NVNT	BLE 1Mbps	2480	Ant1	1.561

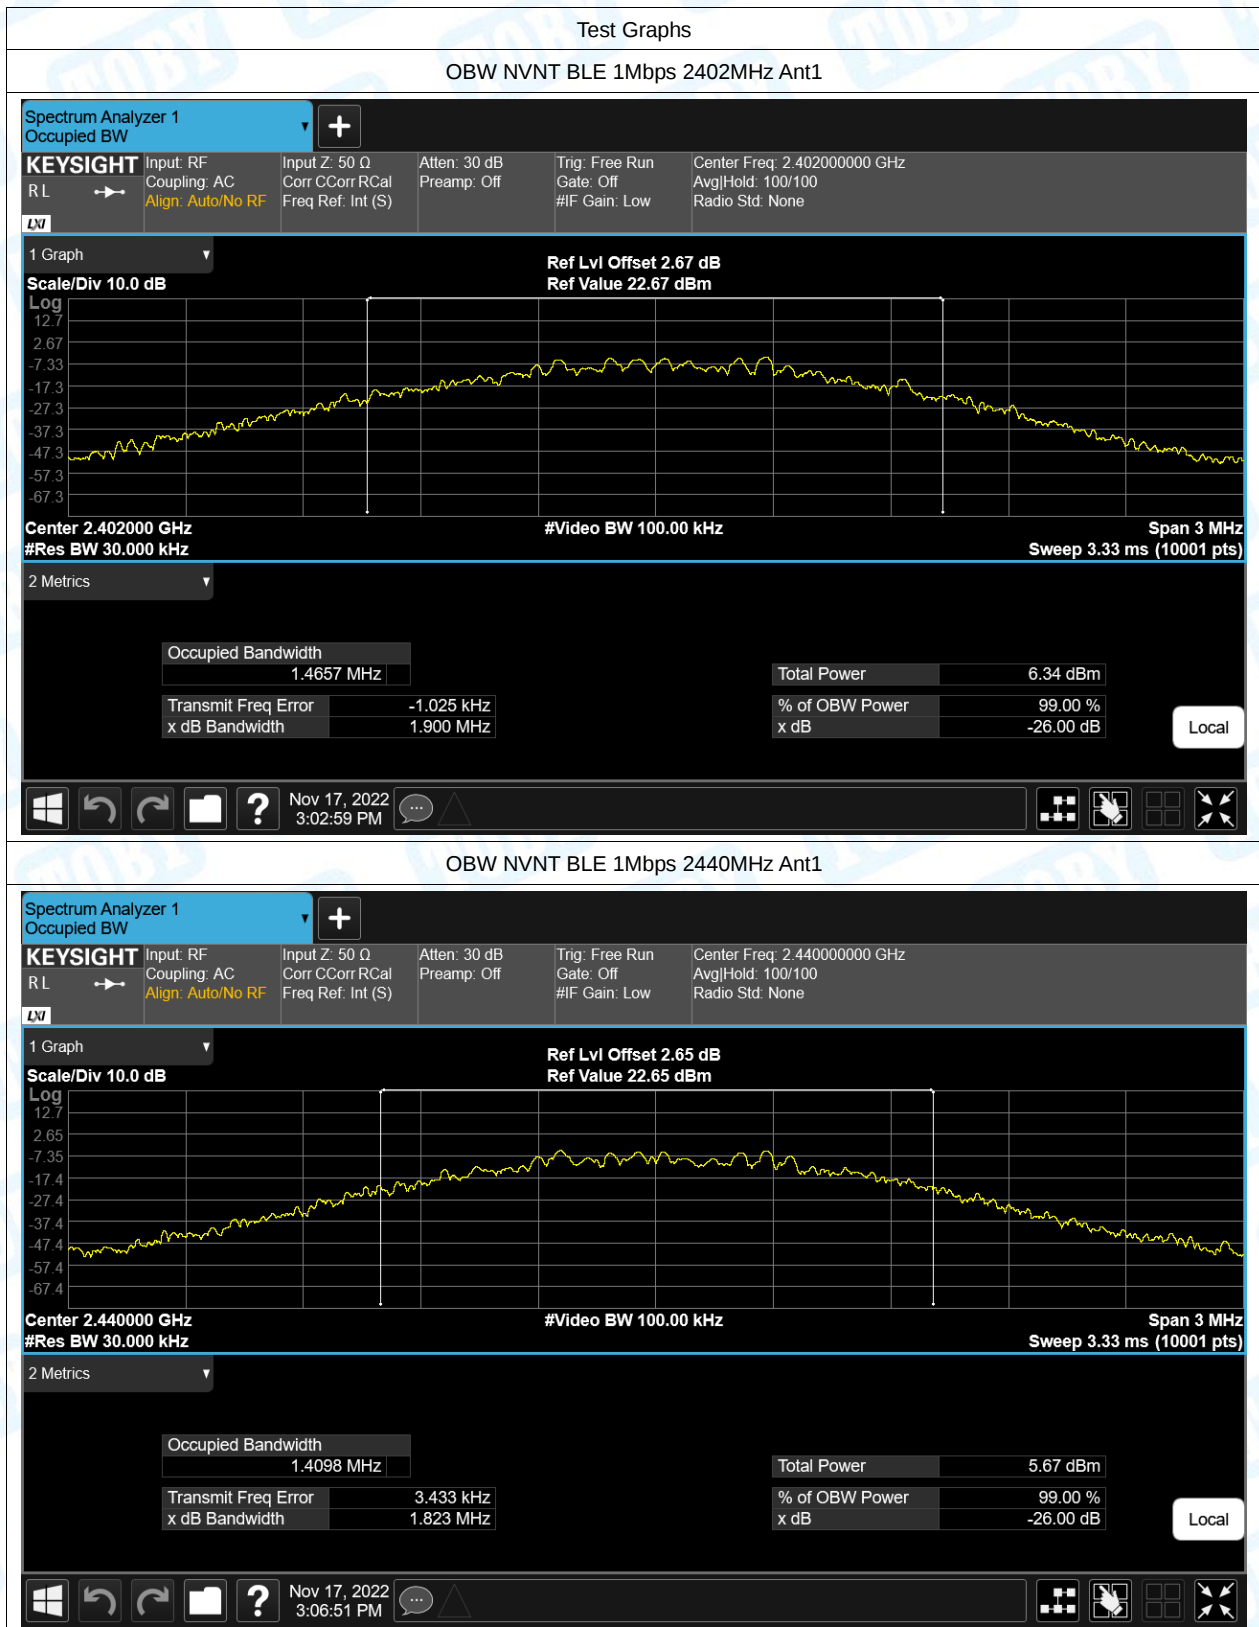


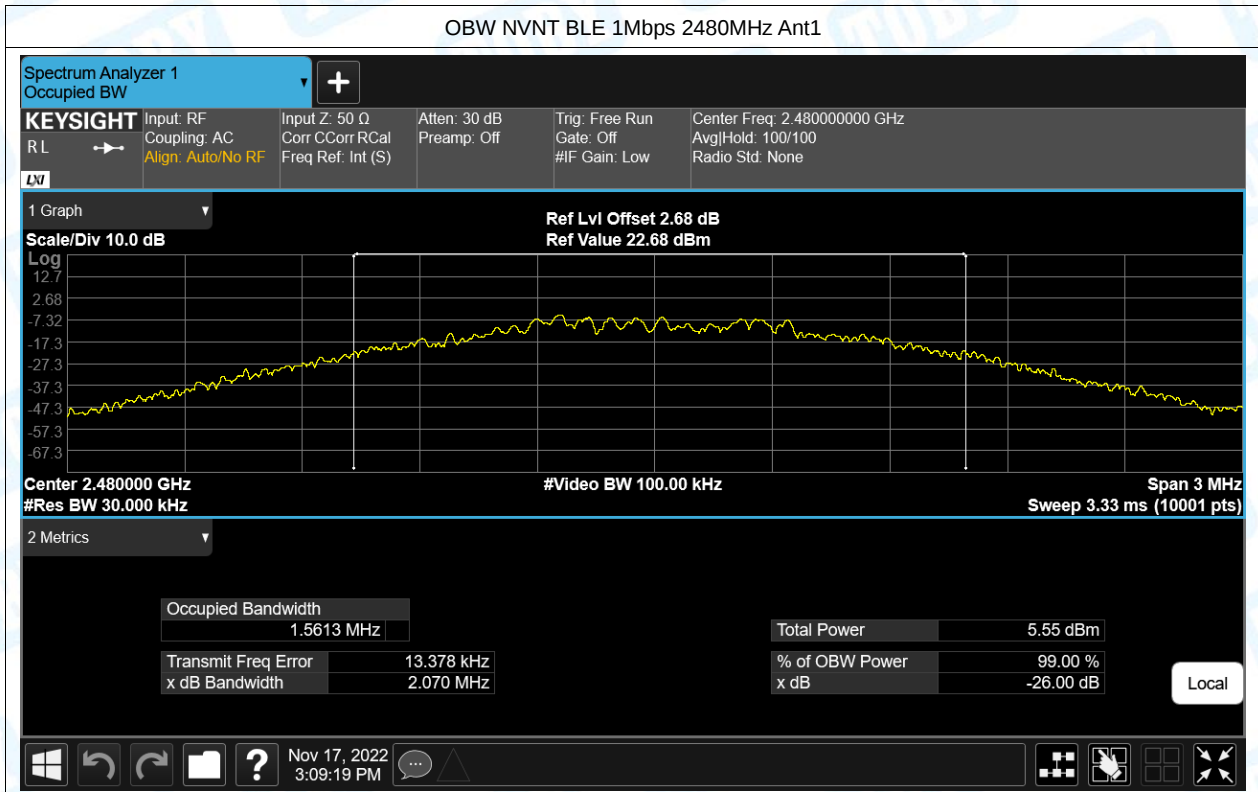

5. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-9.586	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-10.549	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-11.924	8	Pass


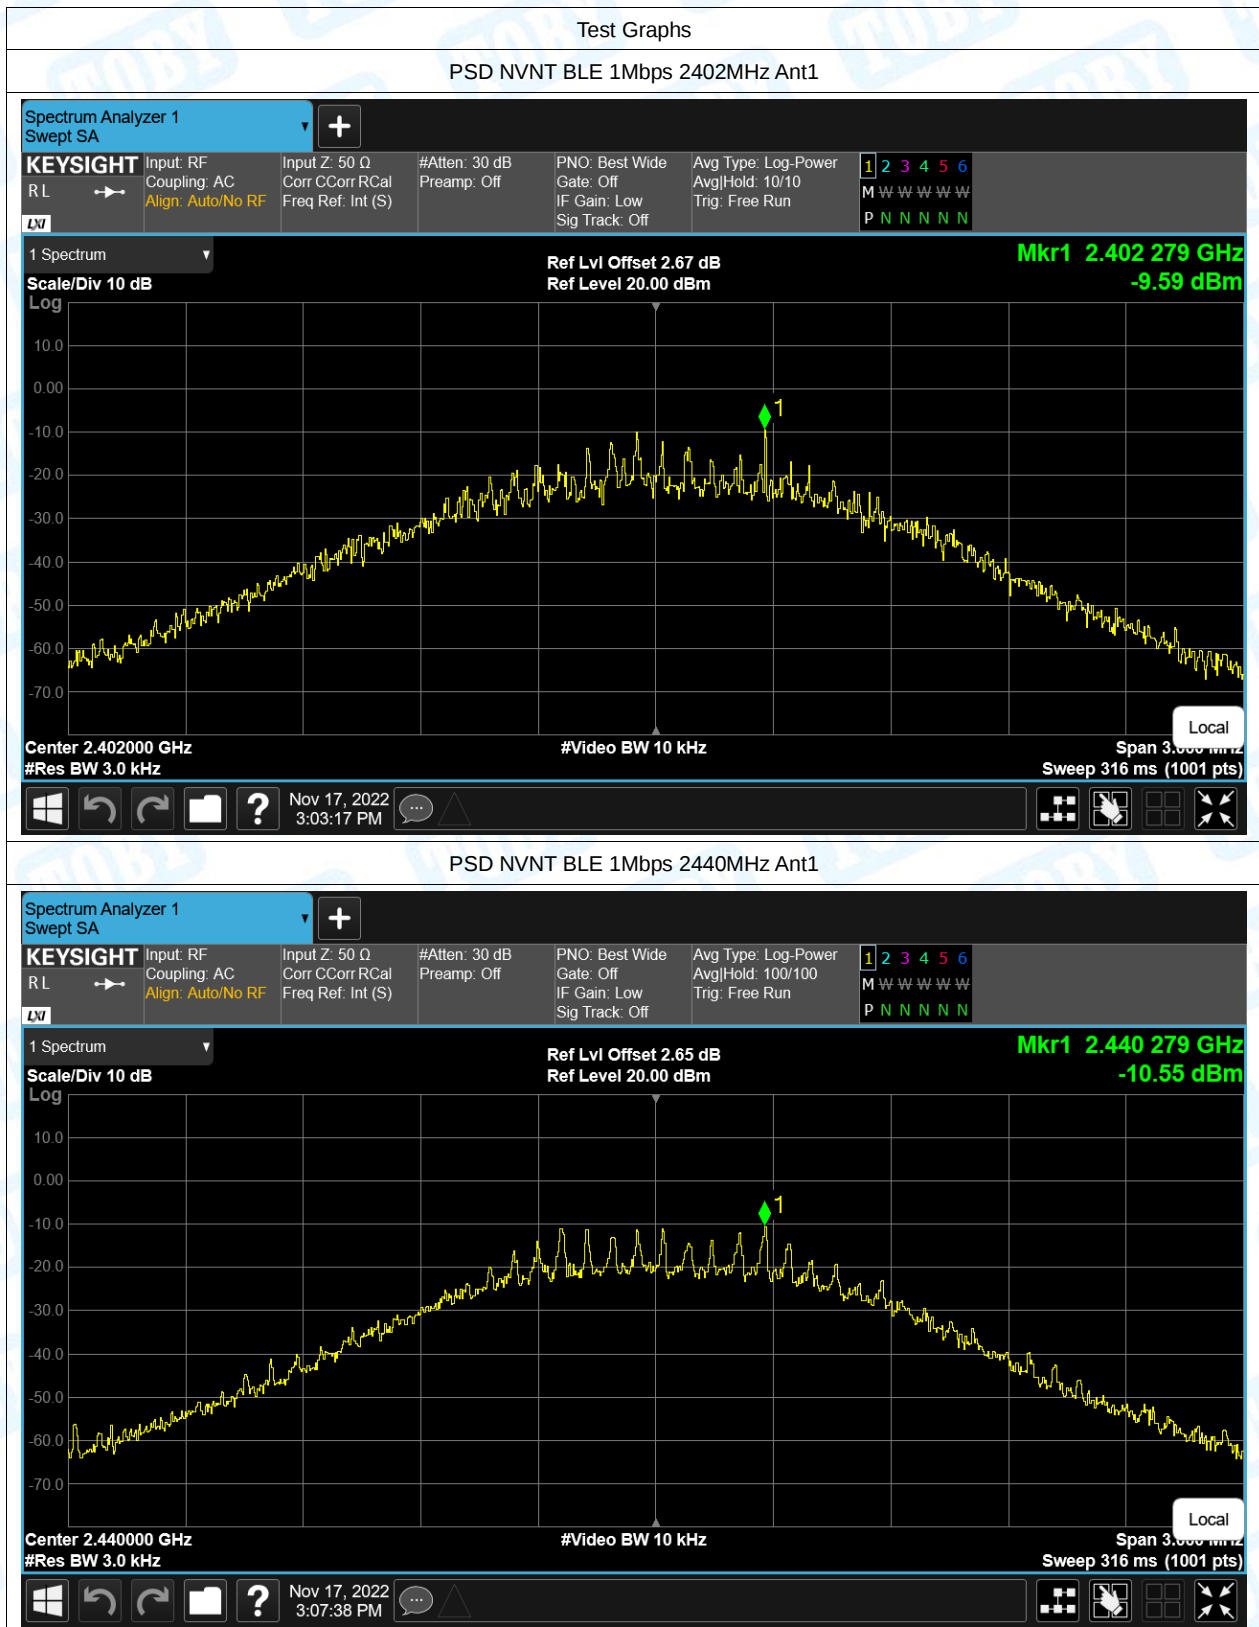


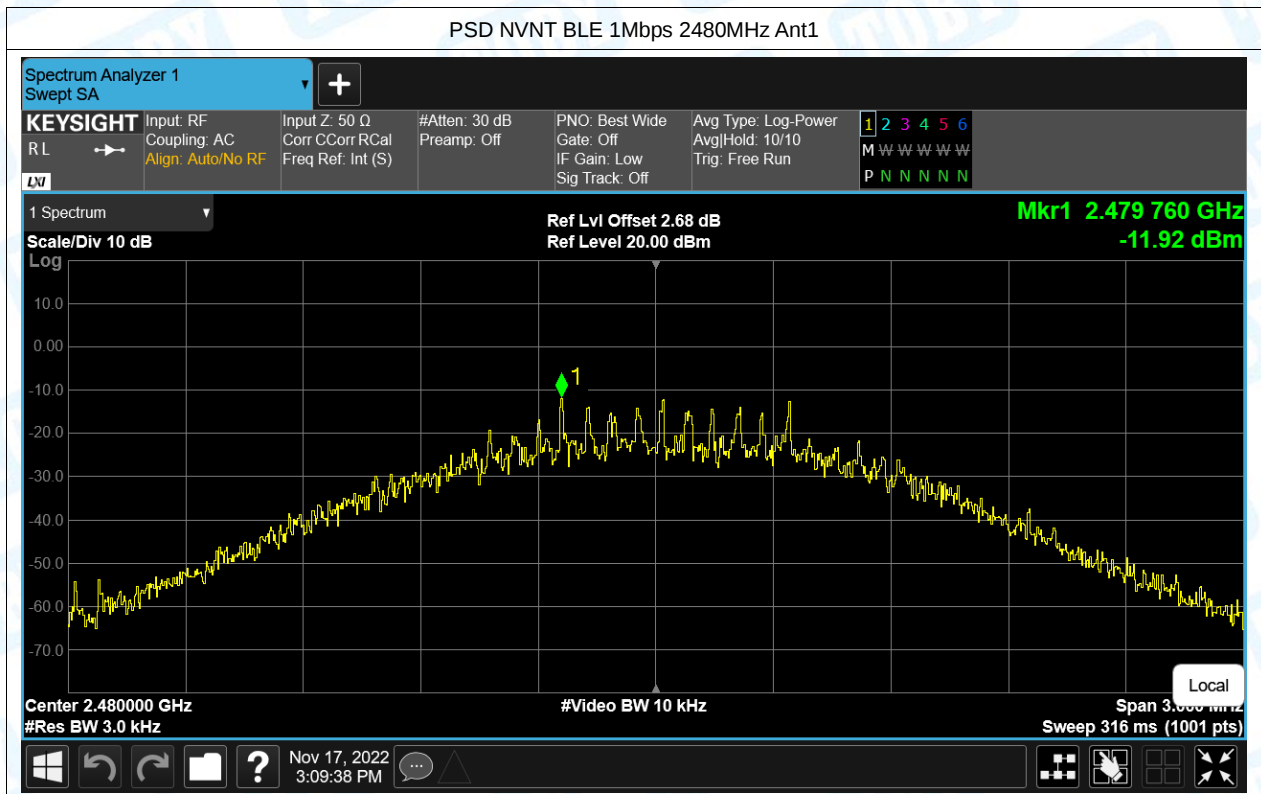

6. Band Edge



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-42.05	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-48.34	-20	Pass


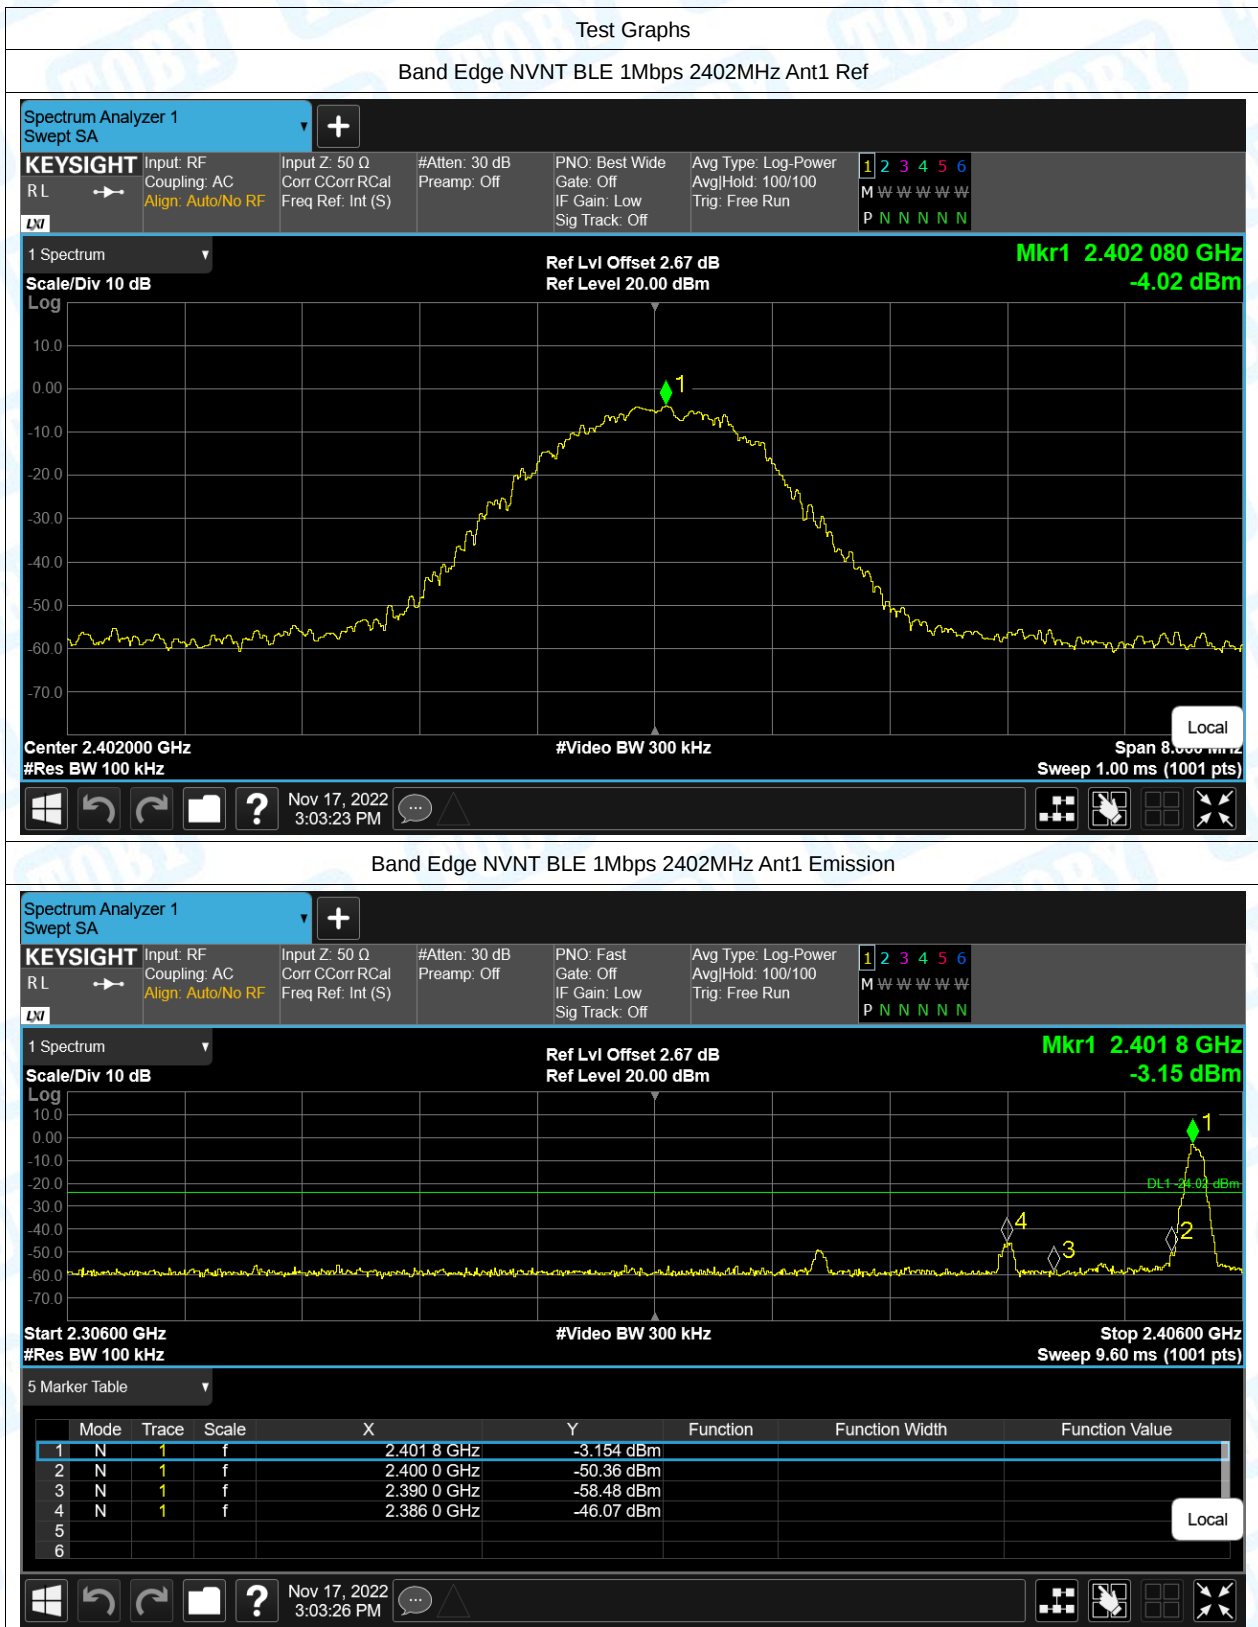


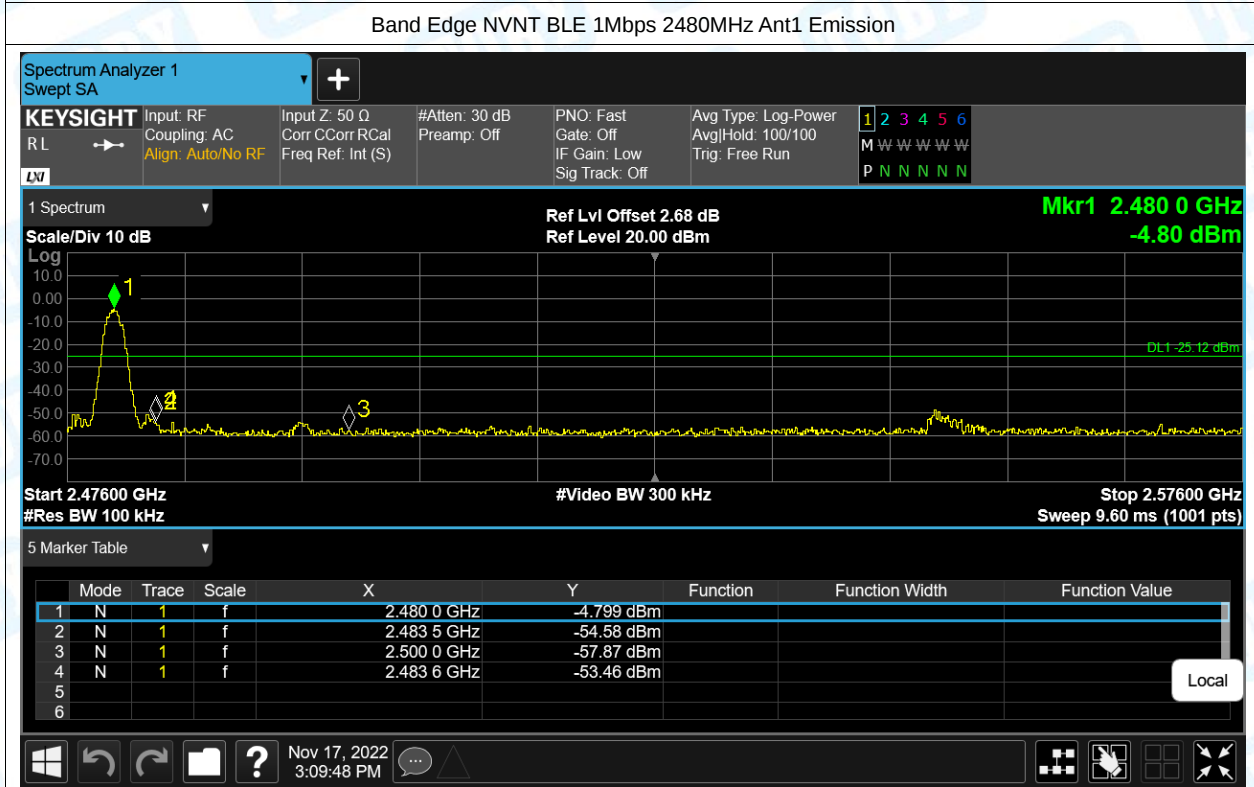
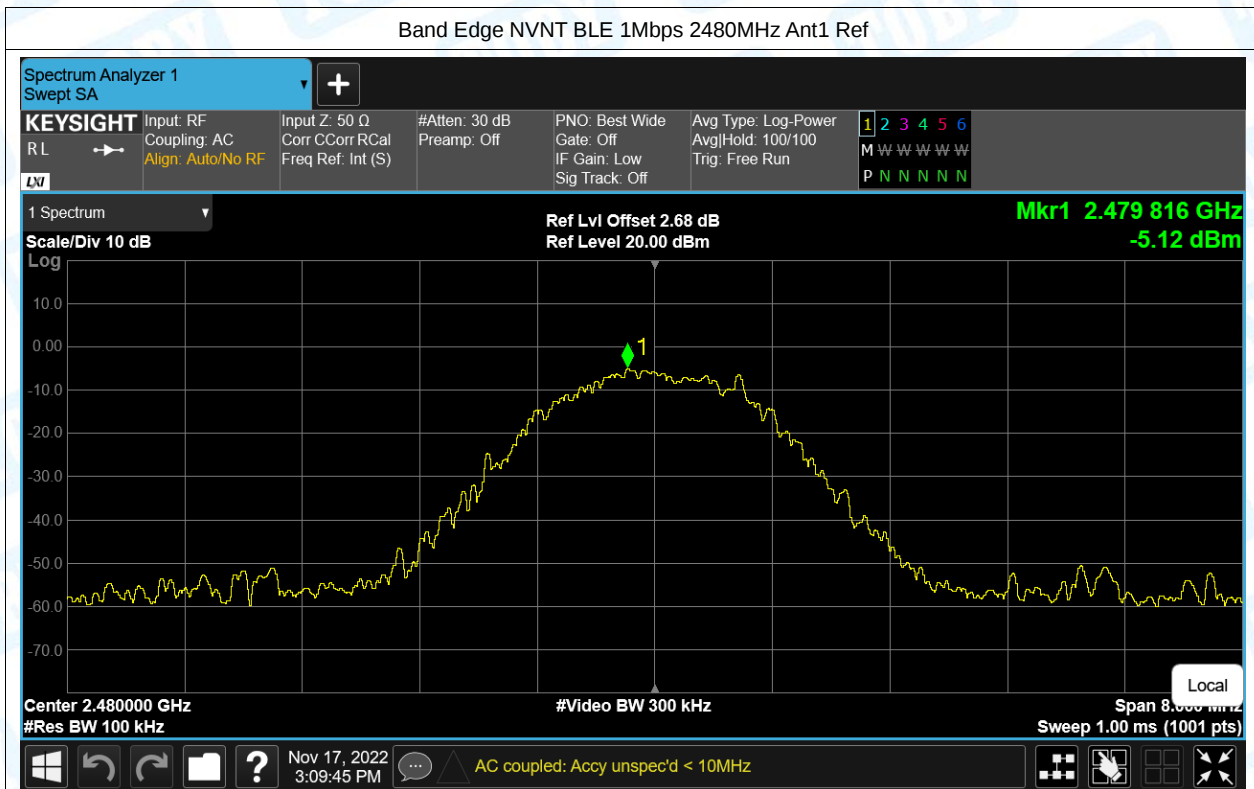


7. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-39.06	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-37.86	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-37.2	-20	Pass

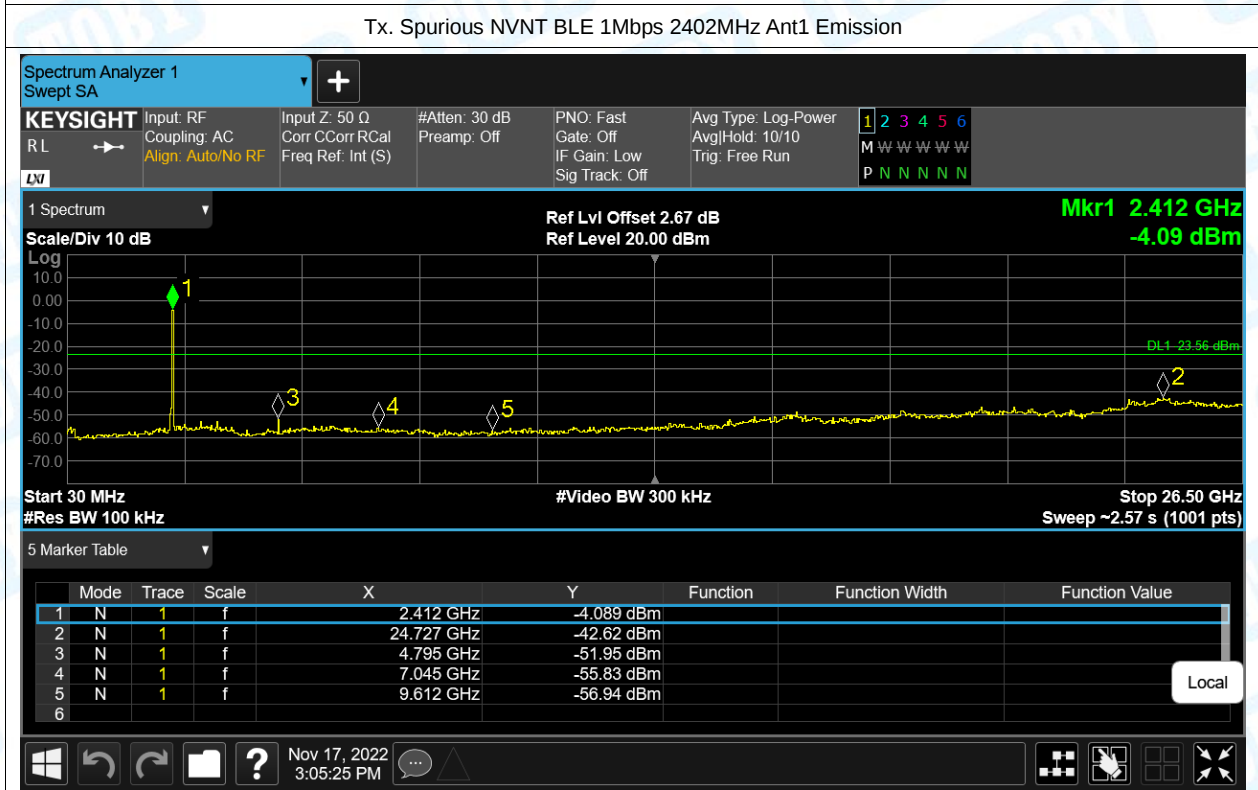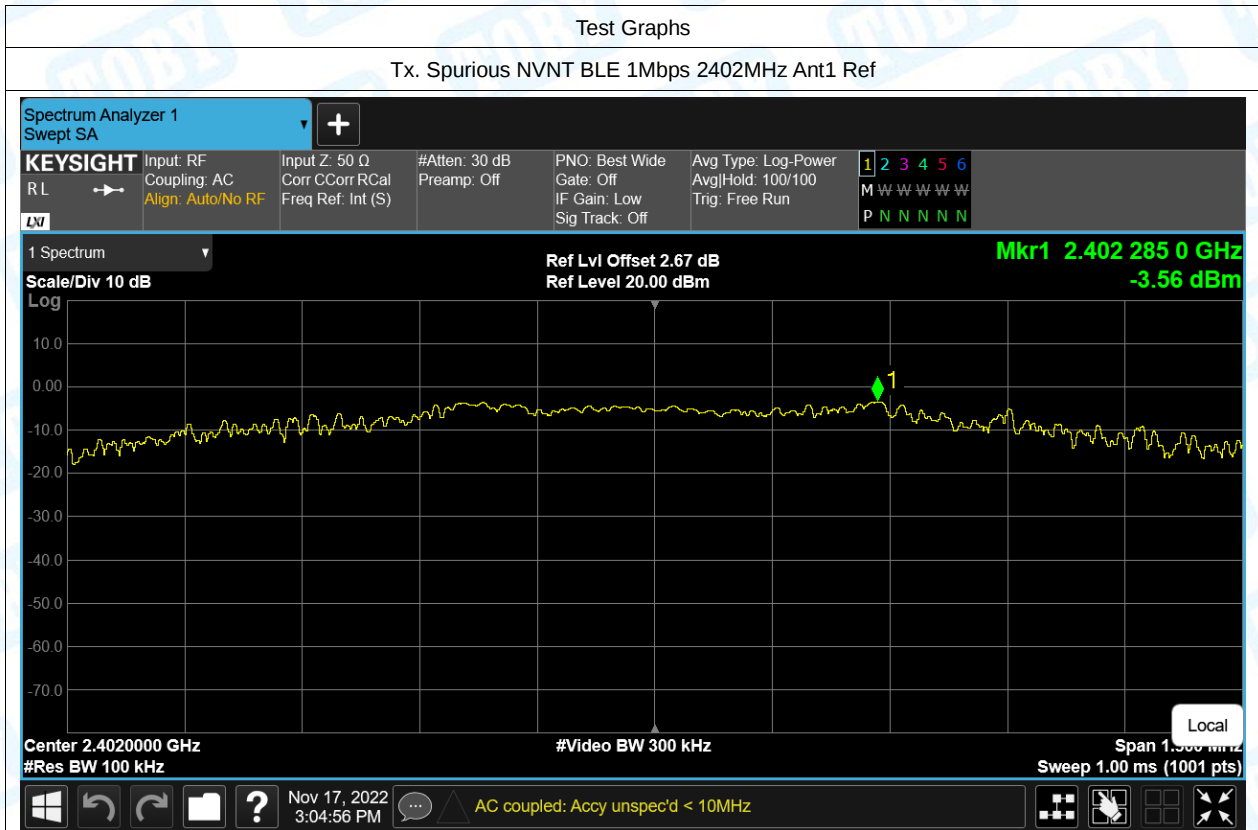


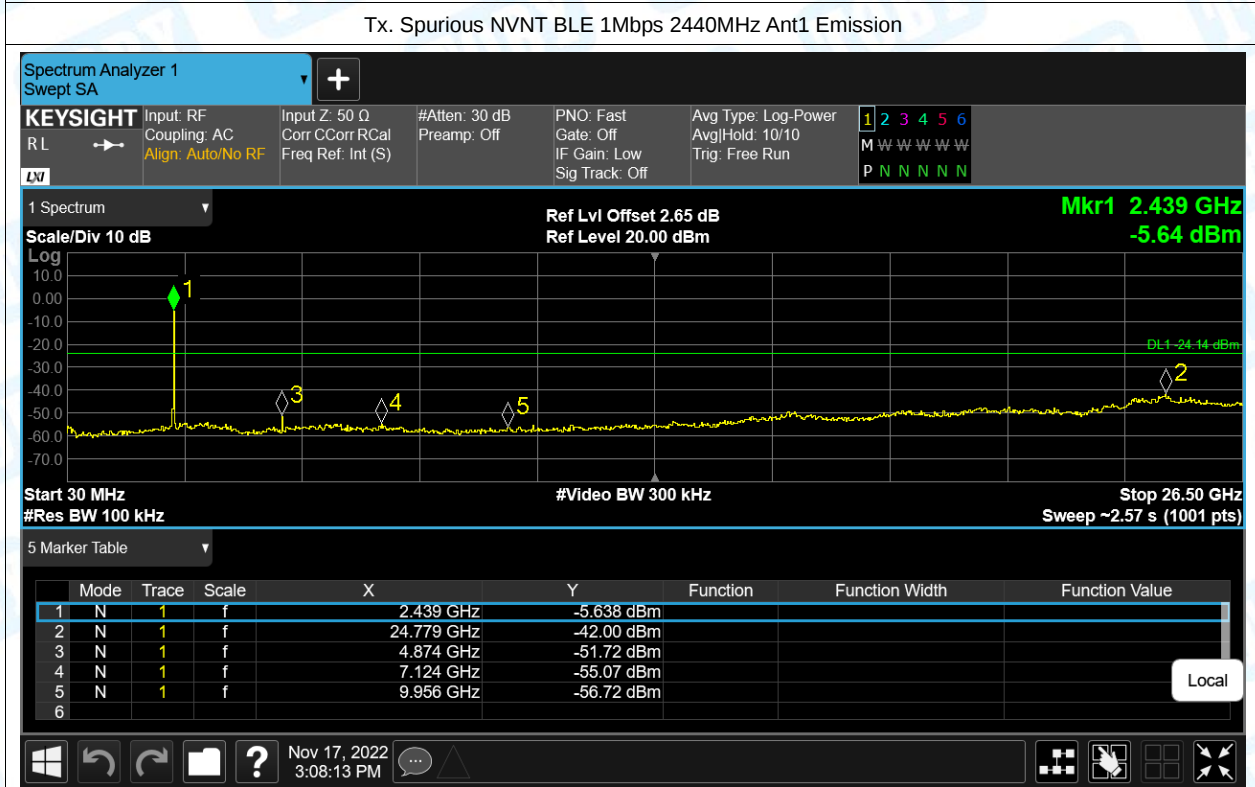
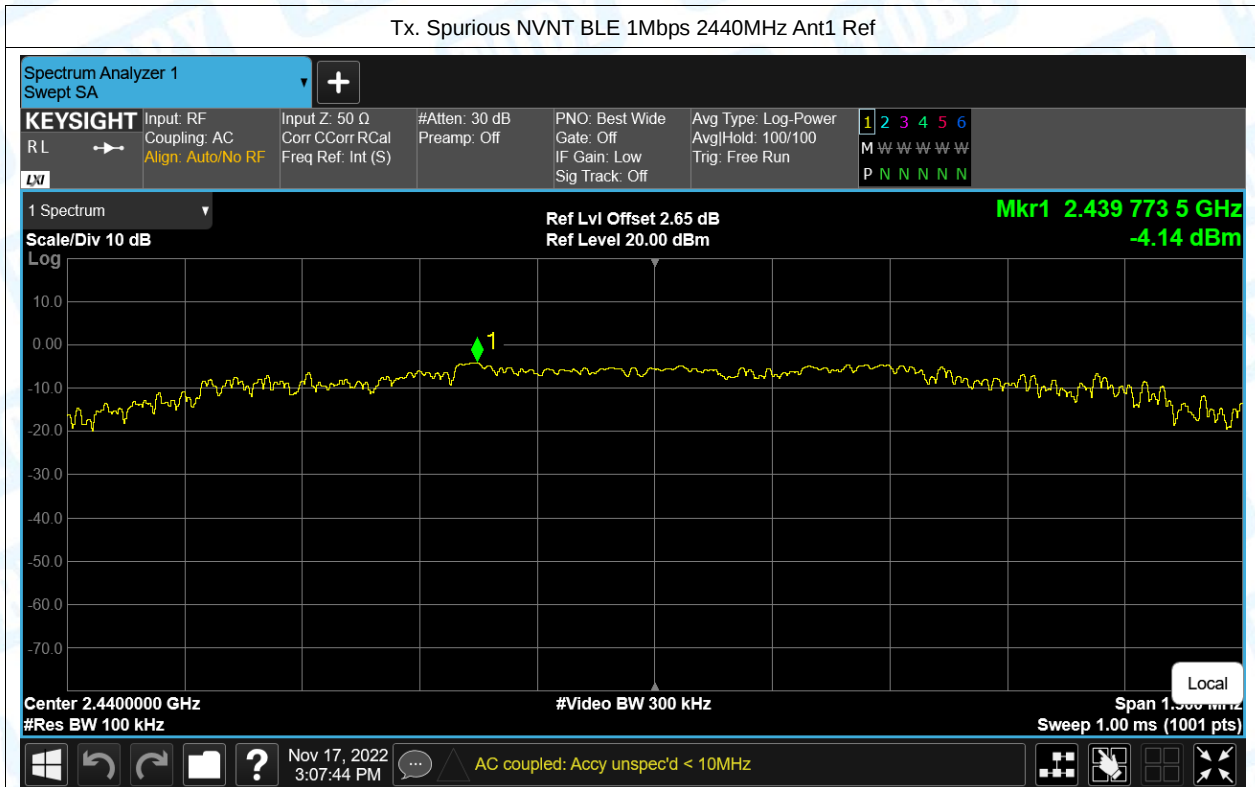


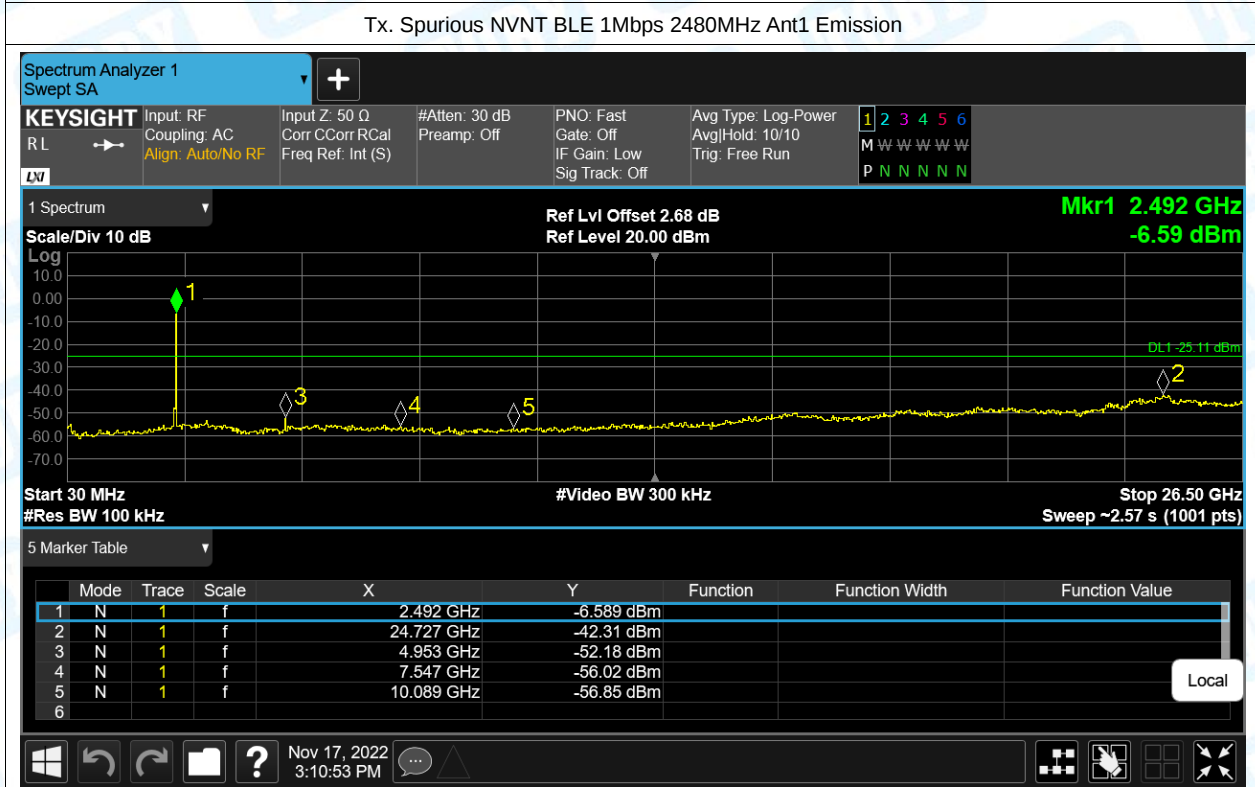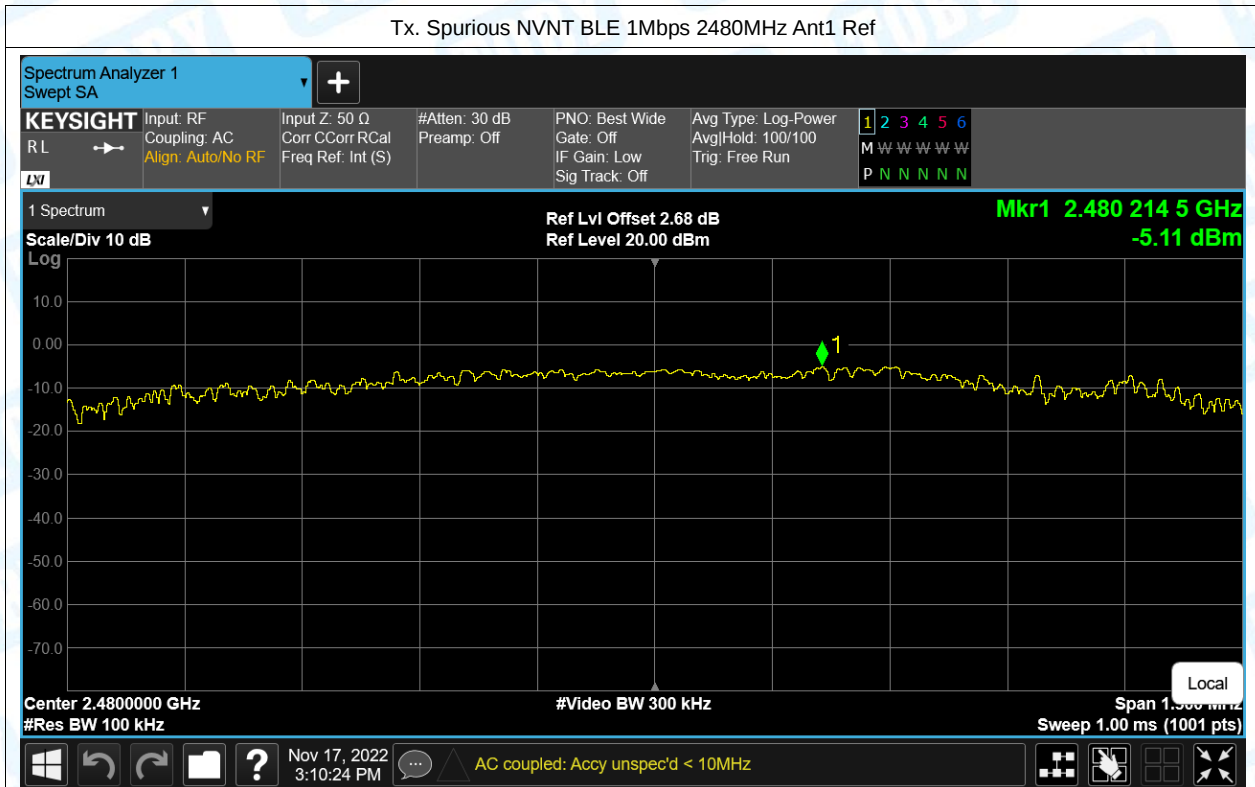

8. Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-47.78	2	49.48	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-59.11	2	38.15	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2386.032	-41.6	2	55.66	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2386.032	-47.46	2	49.8	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-49.64	2	47.62	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-58.93	2	38.33	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-44.29	2	52.97	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-57.41	2	39.85	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2495.632	-44.09	2	53.17	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2495.968	-54.72	2	42.54	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-47.27	2	49.99	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-58.78	2	38.48	Average	54	Pass

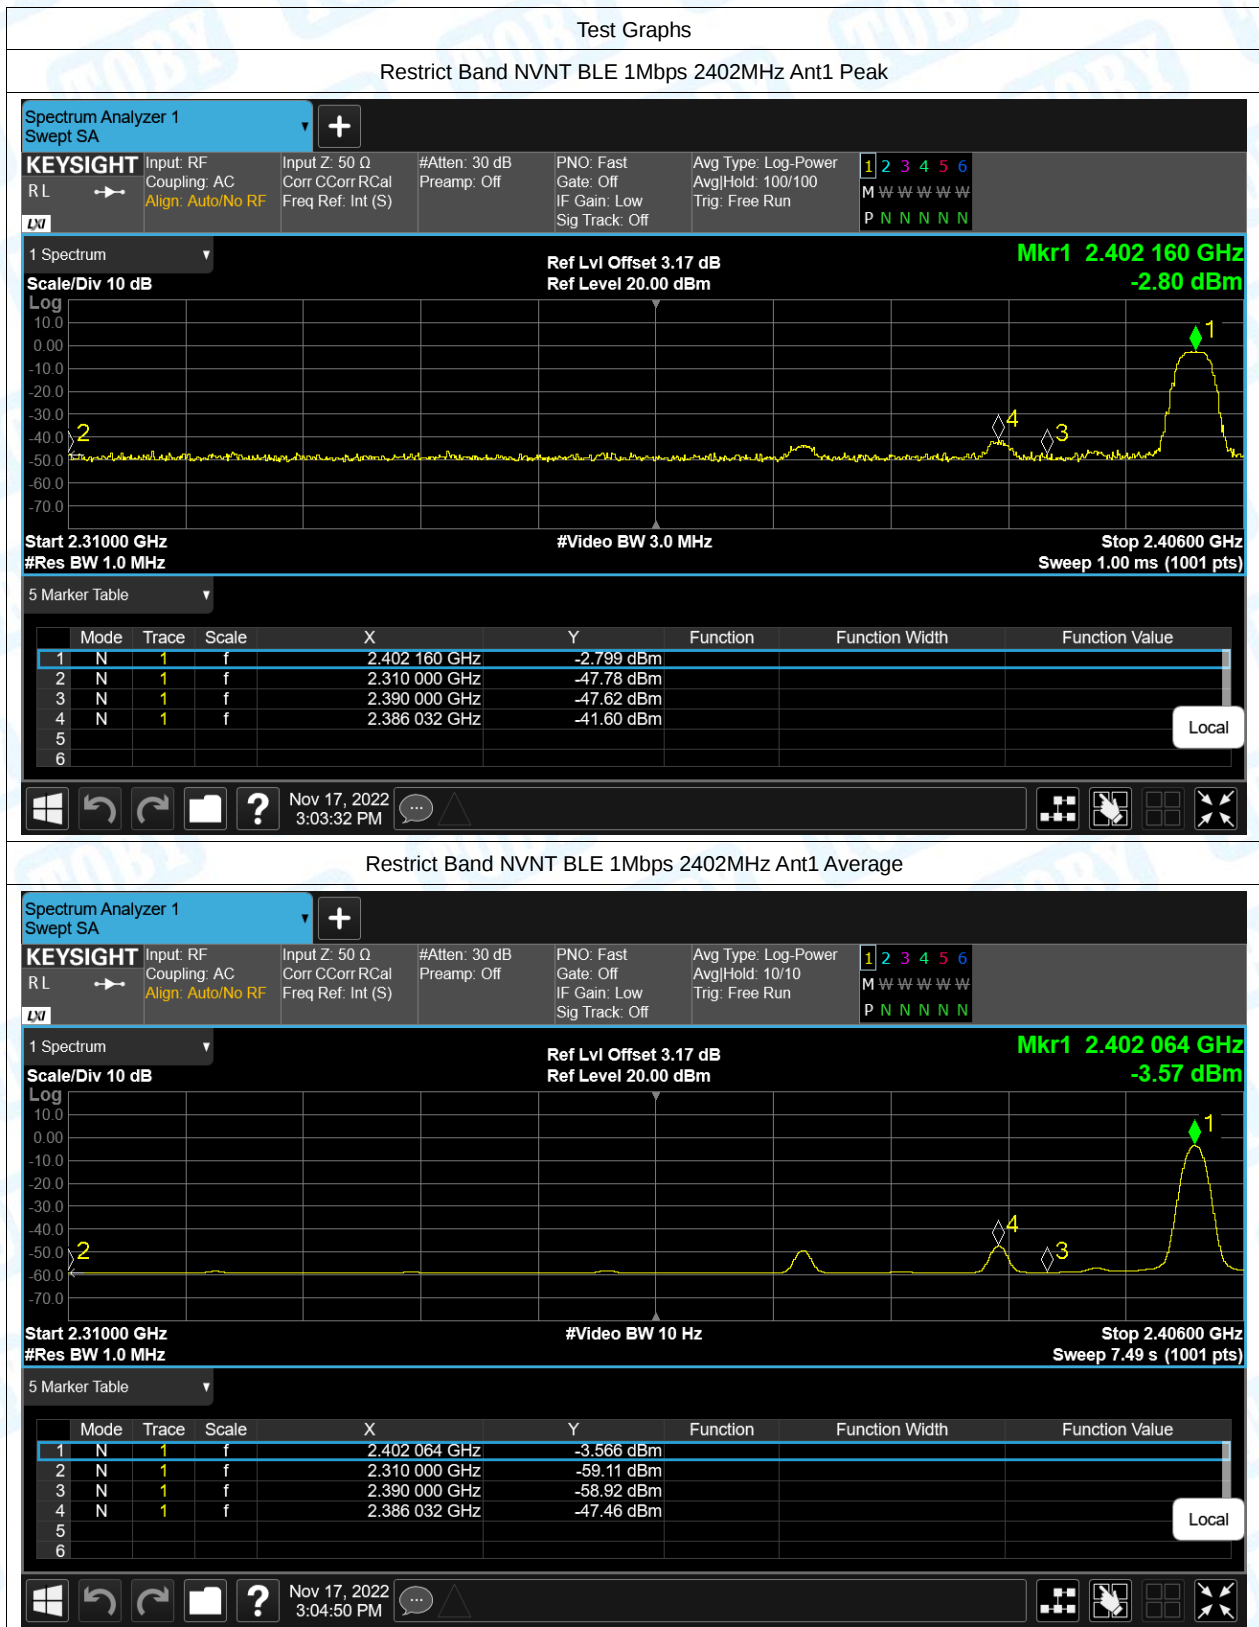

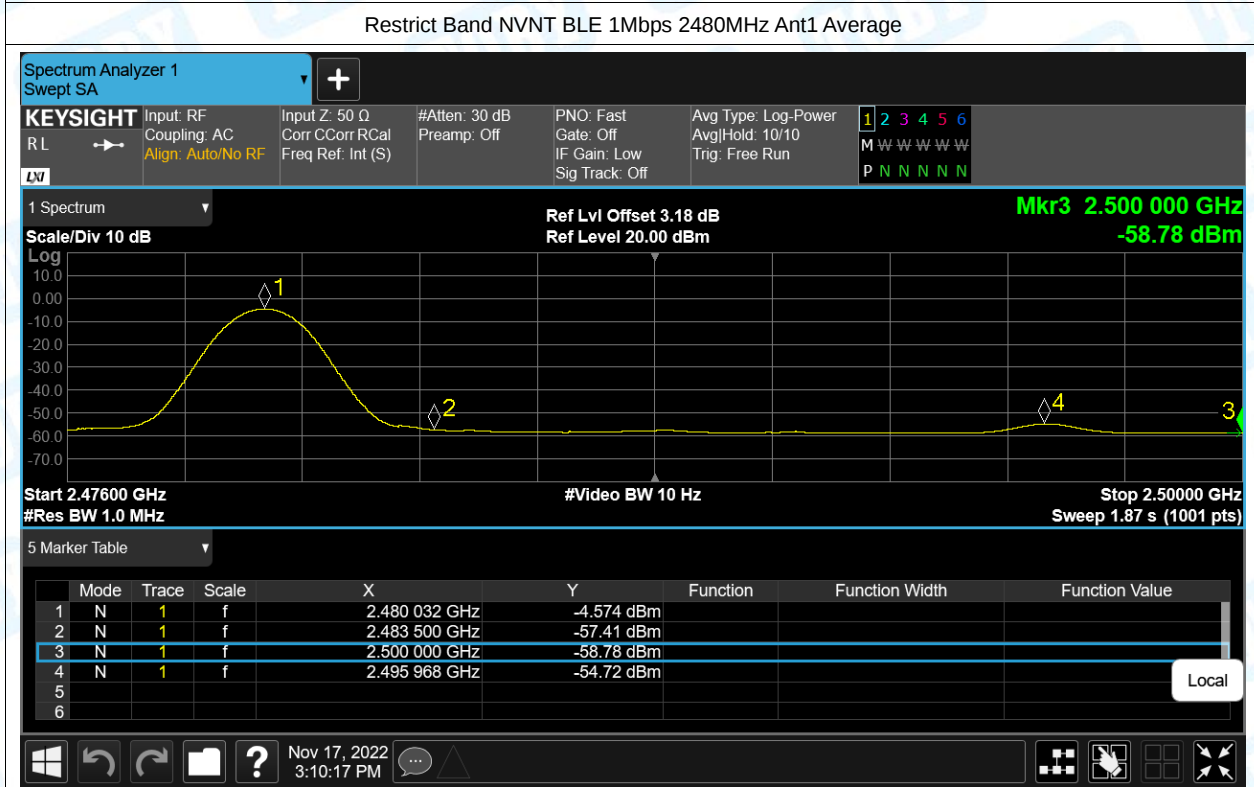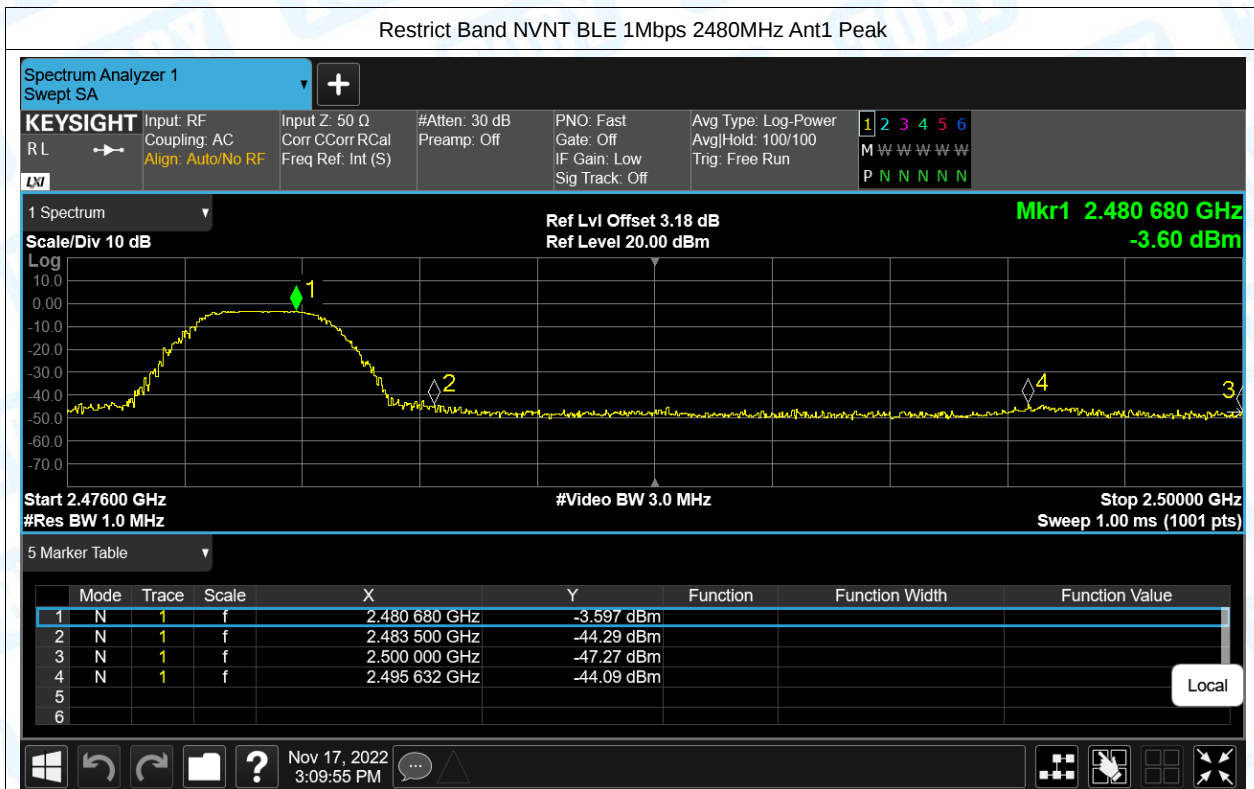

-----END OF THE REPORT-----