

FCC TEST REPORT

FOR

Shenzhen Lenkeng Technology Co., Ltd

Smart Doorbell D01

Test Model: DBI D01 (indoor)

Additional Model No.: DBI (indoor)

Prepared for : Shenzhen Lenkeng Technology Co., Ltd
Address : West 4F,Jingguangxia Culture&Tech Park, 3 Guangxia Road, Shenzhen
518049, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an
District, Shenzhen, Guangdong, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 20, 2018
Number of tested samples : 1
Serial number : Prototype
Date of Test : June 20, 2018- July 04, 2018
Date of Report : July 13, 2018

FCC TEST REPORT

FCC CFR 47 PART 15 C(15.249)

Report Reference No. : LCS180613024AEB

Date of Issue..... : July 13, 2018

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □

Applicant's Name : Shenzhen Lenkeng Technology Co., Ltd

Address..... : West 4F, Jinguangxia Culture&Tech Park, 3 Guangxia Road,
Shenzhen 518049, China

Test Specification

Standard : FCC CFR 47 PART 15 C(15.249) / ANSI C63.10: 2013

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Smart Doorbell D01

Trade Mark : EZfun, HDgenius

Test Model..... : DBI D01(indoor)

Ratings..... : AC 100-240V, 50/60Hz

Result : Positive

Compiled by:

Calvin Weng

Supervised by:

Leo Lee

Approved by:

Gavin Liang

Calvin Weng/ Administrators

Leo Lee / Technique principal

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS180613024AEB	July 13, 2018 Date of issue
-----------------------------------	--------------------------------

Test Model..... : DBI D01(indoor)

EUT..... : Smart Doorbell D01

Applicant..... : Shenzhen Lenkeng Technology Co., Ltd

Address..... : West 4F,Jingguangxia Culture&Tech Park, 3 Guangxia Road,
Shenzhen 518049, China

Telephone..... : /

Fax..... : /

Manufacturer..... : Shenzhen Lenkeng Technology Co., Ltd

Address..... : West 4F,Jingguangxia Culture&Tech Park, 3 Guangxia Road,
Shenzhen 518049, China

Telephone..... : /

Fax..... : /

Factory..... : Shenzhen Lenkeng Technology Co., Ltd

Address..... : West 4F,Jingguangxia Culture&Tech Park, 3 Guangxia Road,
Shenzhen 518049, China

Telephone..... : /

Fax..... : /

Test Result	Positive
-------------	----------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	Jul 13, 2018	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	7
1.1. Description of Device (EUT)	7
1.2. Support Equipment List	7
1.3. External I/O	7
1.4. Description of Test Facility	7
1.5. List of Measuring Equipment	8
1.6. Statement of the measurement uncertainty	9
1.7. Measurement Uncertainty	9
1.8. Description of Test Modes	9
2. TEST METHODOLOGY	10
2.1. EUT Configuration	10
2.2. EUT Exercise	10
2.3. General Test Procedures	10
3. CONNECTION DIAGRAM OF TEST SYSTEM	11
3.1. Justification	11
3.2. EUT Exercise Software	11
3.3. Special Accessories	11
3.4. Block Diagram/Schematics	11
3.5. Equipment Modifications	11
3.6. Test Setup	11
4. SUMMARY OF TEST RESULTS	12
5. POWER LINE CONDUCTED EMISSIONS	13
5.1 Standard Applicable	13
5.2 Block Diagram of Test Setup	13
5.3 Test Results	13
6. RADIATED EMISSION MEASUREMENT	15
6.1. Standard Applicable	15
6.2. Instruments Setting	15
6.3. Test Procedure	16
6.4. Block Diagram of Test Setup	20
6.5. EUT Operation during Test	20
6.6. Results of Radiated Emissions (9 KHz~30MHz)	21
6.7. Results of Radiated Emissions (30MHz~1GHz)	21
6.8. Results for Radiated Emissions (1 – 26 GHz)	23
7. RESULTS FOR BAND EDGE TESTING	24
7.1 Standard Applicable	24
7.2. Test Setup Layout	24
7.3. Measuring Instruments and Setting	24
7.4. Test Procedures	24
7.5. Measuring Instruments and Setting	25
8. 99% AND 20 DB BANDWIDTH MEASUREMENT	27
8.1. Standard Applicable	27
8.2. Block Diagram of Test Setup	27
8.3. Test Procedure	27
8.4. Test Results	27
9. ANTENNA REQUIREMENTS	29
9.1 Standard Applicable	29
9.2 Antenna Connected Construction	29
9.3 Result	29

10.	TEST SETUP PHOTOGRAPHS.....	30
11.	EXTERIOR PHOTOGRAPHS OF EUT	30
12.	INTERIOR PHOTOGRAPHS OF EUT	30

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	Smart Doorbell D01
Test Model	DBI D01(indoor)
List Model No.	DBI(indoor)
Model Declaration	All the models are identical with each other, except the color is different, therefore, full test was applied on DBI D01 (indoor), other models are deemed to fulfill the requirement without further test.
Hardware Version	DBI01_ PCB_VER1.1
Software Version	1.5.0-dev
Power Supply	AC 100-240V, 50/60Hz
2.4G	
Frequency Range	2411MHz~2474MHz (2411MHz, 2418MHz, 2525MHz, 2432MHz, 2439 MHz, 2446MHz, 2453MHz,2460MHz, 2467MHz, 2474MHz)
Channel Number	10
Modulation Type	GFSK
Antenna Description	PCB Antenna, 2.00 dBi (Max.)
Wi-Fi	
Frequency Range	2412MHz-2462MHz
Channel Spacing	5MHz
Channel Number	11 channels for IEEE 802.11b/g/n HT20 IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK)
Modulation Type	IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)
Antenna Description	PCB Antenna, 2.00 dBi (Max.)

1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
---	---	---	---	---

1.3. External I/O

I/O Port Description	Quantity	Cable
----	---	---

1.4. Description of Test Facility

FCC Registration Number. is 254912.
 Industry Canada Registration Number. is 9642A-1.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. List of Measuring Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Meter	R&S	NRVS	100444	2018-06-16	2019-06-15
2	Power Sensor	R&S	NRV-Z81	100458	2018-06-16	2019-06-15
3	Power Sensor	R&S	NRV-Z32	10057	2018-06-16	2019-06-15
4	EPM Series Power Meter	Agilent	E4419B	MY45104493	2018-06-16	2019-06-15
5	E-SERIES AVG POWER SENSOR	Agilent	E9301H	MY41495234	2018-06-16	2019-06-15
6	ESA-E SERIES SPECTRUM ANALYZER	Agilent	E4407B	MY41440754	2017-11-17	2018-11-16
7	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2018-06-16	2019-06-15
8	SPECTRUM ANALYZER	R&S	FSP	100503	2018-06-16	2019-06-15
9	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2018-06-16	2019-06-15
10	Positioning Controller	MF	MF-7082	/	2018-06-16	2019-06-15
11	EMI Test Software	AUDIX	E3	/	N/A	N/A
12	EMI Test Receiver	R&S	ESR 7	101181	2018-06-16	2019-06-15
13	AMPLIFIER	QuieTek	QTK-A2525G	CHM10809065	2017-11-17	2018-11-16
14	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2018-06-22	2019-06-21
15	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2018-05-01	2019-04-30
16	Horn Antenna	EMCO	3115	6741	2018-06-22	2019-06-21
17	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2017-09-21	2020-09-20
18	Broadband Preamplifier	SCHWARZBECK	BBV 9719	9719-025	2017-09-21	2020-09-20
19	RF Cable-R03m	Jye Bao	RG142	CB021	2018-06-16	2019-06-15
20	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2018-06-16	2019-06-15
21	TEST RECEIVER	R&S	ESCI	101142	2018-06-16	2019-06-15
22	RF Cable-CON	UTIFLEX	3102-26886-4	CB049	2018-06-16	2019-06-15
23	10dB Attenuator	SCHWARZBECK	MTS-IMP136	261115-001-0032	2018-06-16	2019-06-15
24	Artificial Mains	R&S	ENV216	101288	2018-06-16	2019-06-15
25	RF Control Unit	JS Tonscend Corporation	JS0806-2	178060073	2017-10-28	2018-10-27
26	JS1120-3 BT/WIFI Test Software	JS Tonscend Corporation	JS1120-3	/	N/A	N/A

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

1.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	3.10dB	(1)
		30MHz~200MHz	2.96dB	(1)
		200MHz~1000MHz	3.10dB	(1)
		1GHz~26.5GHz	4.00dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	1.63dB	(1)
Power disturbance	:	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8. Description of Test Modes

The EUT operates in the unlicensed ISM band at 2.4GHz. The following operating modes were applied for the related test items.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX mode (Mid Channel).

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case;

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power that was determined to be TX mode (Mid Channel).

All test modes were tested, only the result of the worst case was recorded in the report.

It was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane.

Mode of Operations	Transmitting Frequency (MHz)
GFSK	2411
GFSK	2439
GFSK	2474
For Conducted Emission	
Test Mode	TX Mode
For Radiated Emission	
Test Mode	TX Mode

***Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. CONNECTION DIAGRAM OF TEST SYSTEM

3.1. Justification

The system was configured for testing in a continuous transmitting condition.

3.2. EUT Exercise Software

The EUT was controlled by build-in software to enter RF test mode, just by powered on the transmitter and receiver together, then the EUT will keep transmitting continuously.

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Power Line Conducted Emissions	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.249	Band Edges Measurement	Compliant
§15.249, §15.215	99% and 20 dB Bandwidth	Compliant

5. POWER LINE CONDUCTED EMISSIONS


5.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limit at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.2 Block Diagram of Test Setup

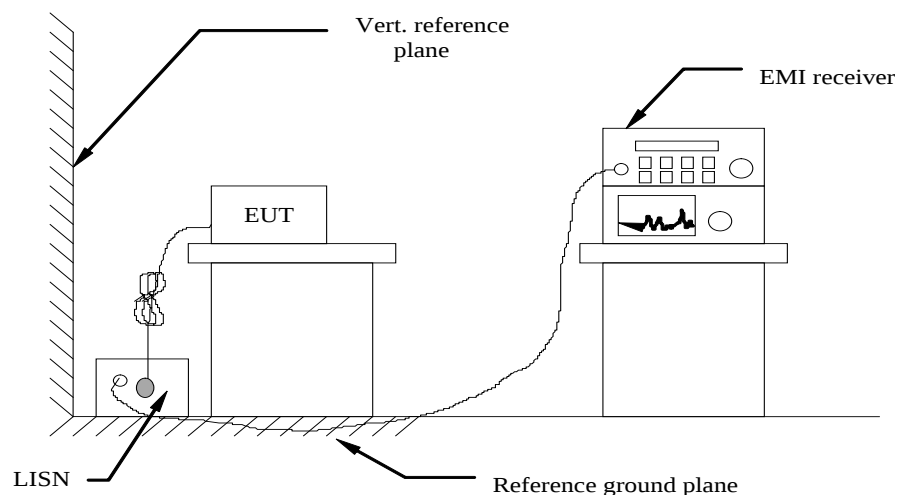


5.3 Test Results

PASS

Please refer to following page.

AC Conducted Emission @ AC 120V/60Hz @ IEEE 802.11b (worst case)

Line

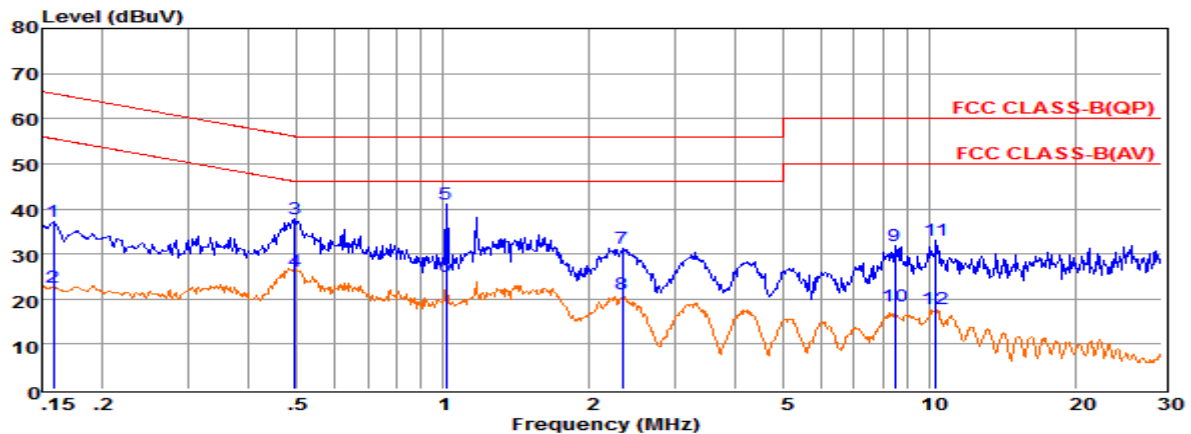


	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.16	17.54	9.58	0.02	37.14	65.56	-28.42	QP
2	0.16	2.99	9.58	0.02	22.59	55.55	-32.96	Average
3	0.50	18.04	9.62	0.04	37.70	56.05	-18.35	QP
4	0.50	6.43	9.62	0.04	26.09	46.05	-19.96	Average
5	1.02	21.45	9.63	0.05	41.13	56.00	-14.87	QP
6	1.02	5.34	9.63	0.05	25.02	46.00	-20.98	Average
7	2.33	11.68	9.64	0.05	31.37	56.00	-24.63	QP
8	2.33	1.51	9.64	0.05	21.20	46.00	-24.80	Average
9	8.50	12.19	9.69	0.08	31.96	60.00	-28.04	QP
10	8.50	-1.48	9.69	0.08	18.29	50.00	-31.71	Average
11	10.29	13.11	9.69	0.08	32.88	60.00	-27.12	QP
12	10.29	-2.03	9.69	0.08	17.74	50.00	-32.26	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.

2. The emission levels that are 20dB below the official limit are not reported.

Neutral

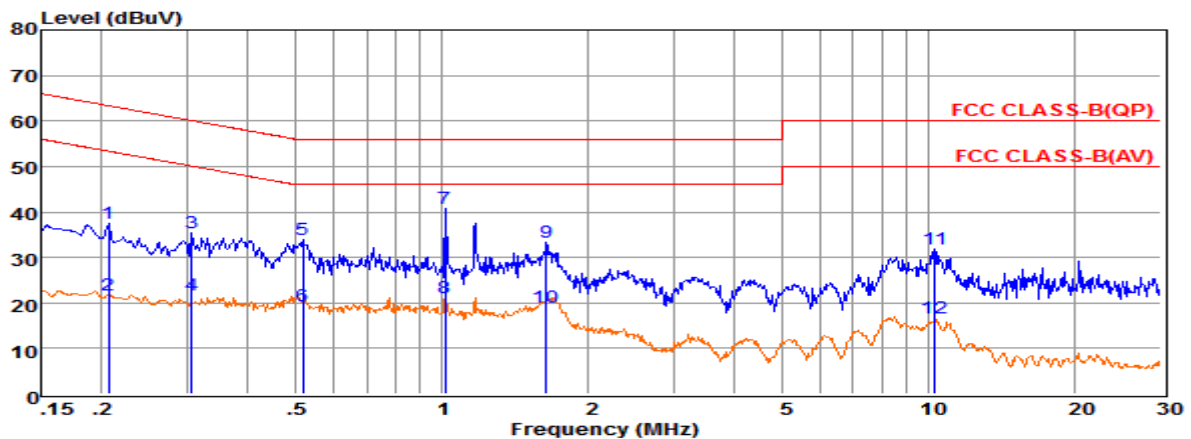

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.21	17.89	9.59	0.03	37.51	63.36	-25.85	QP
2	0.21	2.03	9.59	0.03	21.65	53.36	-31.71	Average
3	0.31	15.88	9.60	0.03	35.51	60.06	-24.55	QP
4	0.31	2.00	9.60	0.03	21.63	50.06	-28.43	Average
5	0.52	14.21	9.62	0.04	33.87	56.00	-22.13	QP
6	0.52	-0.47	9.62	0.04	19.19	46.00	-26.81	Average
7	1.02	21.21	9.63	0.05	40.89	56.00	-15.11	QP
8	1.02	1.49	9.63	0.05	21.17	46.00	-24.83	Average
9	1.64	13.54	9.63	0.05	33.22	56.00	-22.78	QP
10	1.64	-0.79	9.63	0.05	18.89	46.00	-27.11	Average
11	10.29	12.04	9.72	0.08	31.84	60.00	-28.16	QP
12	10.29	-3.14	9.72	0.08	16.66	50.00	-33.34	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.

2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report.

6. RADIATED EMISSION MEASUREMENT

6.1. Standard Applicable

1). According to §15.249 (d) and RSS-210 B.10 (b): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

2). According to §15.249 (a) and RSS-210 B.10 (a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	millivolts/meter	dBuV/m	microvolts/meter	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

6.2. Instruments Setting

Please refer to equipment's list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

6.3. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


6.4. Block Diagram of Test Setup

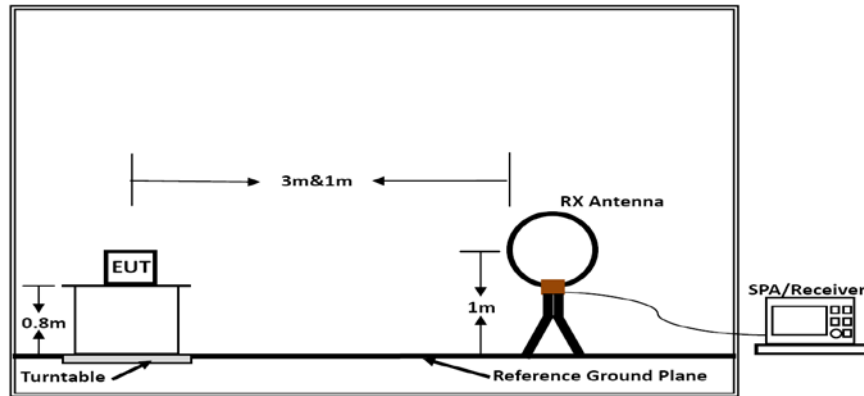

Below 30MHz

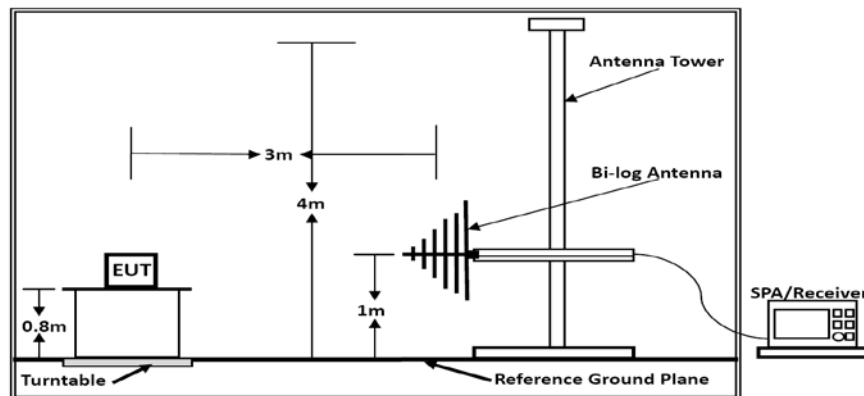

Below 1GHz

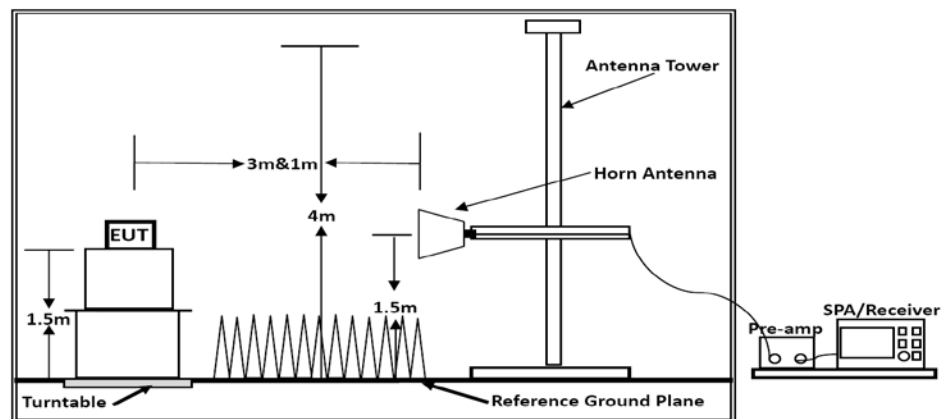

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	23.5°C	Humidity	51.3%
Test Engineer	Wang Chuang	Configurations	TX

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dB)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

6.7. Results of Radiated Emissions (30MHz~1GHz)

Vertical

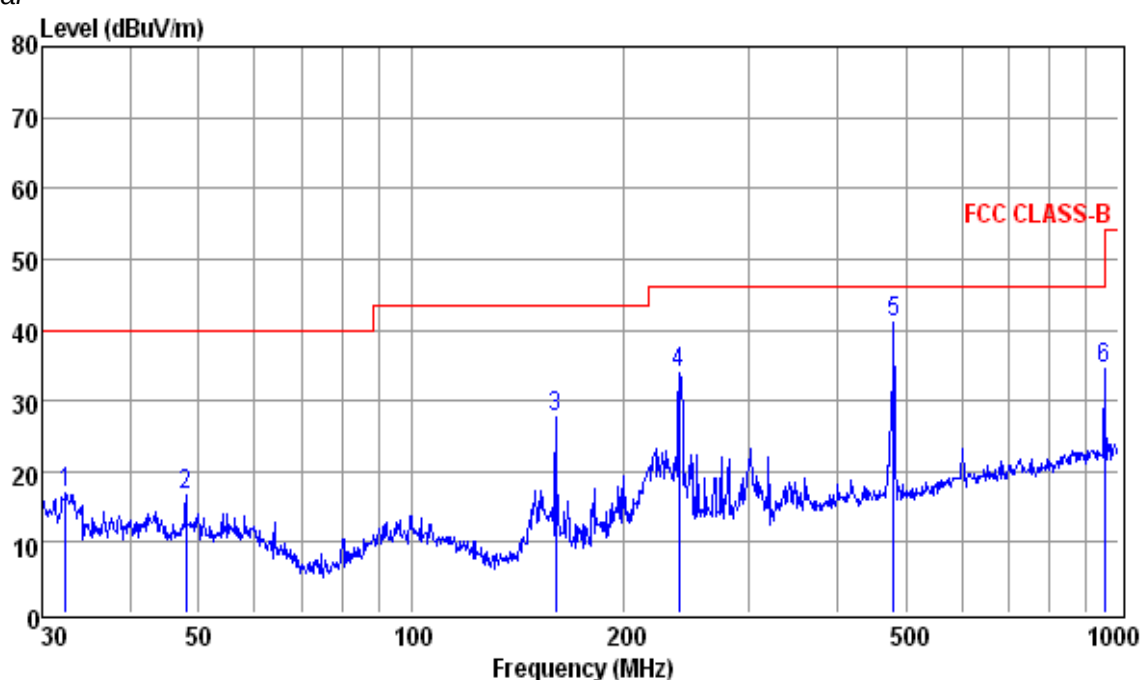


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	32.41	4.13	0.37	12.32	16.82	40.00	-23.18	QP
2	47.99	2.93	0.35	13.37	16.65	40.00	-23.35	QP
3	159.78	18.19	0.75	8.66	27.60	43.50	-15.90	QP
4	239.15	20.81	0.96	12.05	33.82	46.00	-12.18	QP
5	480.53	23.52	1.31	16.08	40.91	46.00	-5.09	QP
6	955.44	11.09	1.89	21.45	34.43	46.00	-11.57	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that ate 20db blow the official limit are not reported

Horizontal

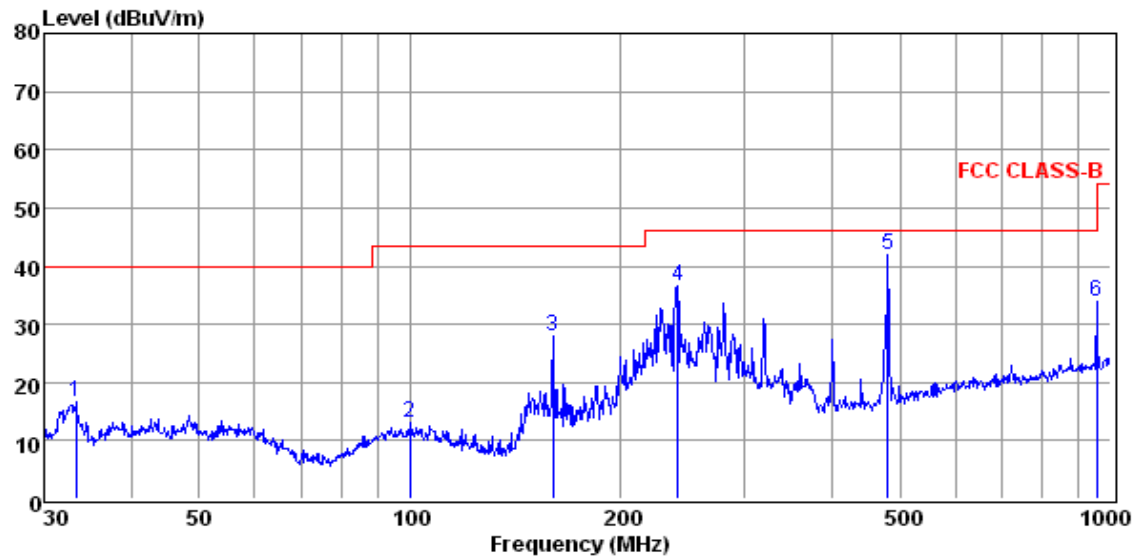

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	33.33	3.98	0.37	12.31	16.66	40.00	-23.34	QP
2	99.88	-0.54	0.60	13.15	13.21	43.50	-30.29	QP
3	159.78	18.64	0.75	8.66	28.05	43.50	-15.45	QP
4	240.83	23.37	1.01	12.09	36.47	46.00	-9.53	QP
5	480.53	24.49	1.31	16.08	41.88	46.00	-4.12	QP
6	955.44	10.69	1.89	21.45	34.03	46.00	-11.97	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that ate 20db blow the official limit are not reported

Note:

1). Pre-scan all modes and recorded the worst case results in this report (TX-Middle Channel).

2). Emission level (dBuV/m) = 20 log Emission level (uV/m).

3). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

6.8. Results for Radiated Emissions (1 – 26 GHz)

Field Strength of Fundamental (TX-2411MHz)						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2411	H	83.37	69.19	114	94	Pass
2411	V	90.25	77.04	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4822.00	54.66	33.06	35.14	3.98	56.56	74.00	-17.44	Peak	Horizontal
4822.00	40.51	33.06	35.14	3.98	42.41	54.00	-11.59	Average	Horizontal
4822.00	59.76	33.06	35.14	3.98	61.66	74.00	-12.34	Peak	Vertical
4822.00	43.54	33.06	35.14	3.98	45.44	54.00	-8.56	Average	Vertical

Field Strength of Fundamental (TX-2439MHz)						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2439	H	83.92	68.89	114	94	Pass
2439	V	91.77	77.14	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4878.00	52.36	33.16	35.15	3.96	54.33	74.00	-19.67	Peak	Horizontal
4878.00	40.63	33.16	35.15	3.96	42.60	54.00	-11.40	Average	Horizontal
4878.00	61.92	33.16	35.15	3.96	63.89	74.00	-10.11	Peak	Vertical
4878.00	44.46	33.16	35.15	3.96	46.43	54.00	-7.57	Average	Vertical

Field Strength of Fundamental (TX-2474MHz)						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2439	H	84.67	70.23	114	94	Pass
2439	V	92.05	77.49	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4948.00	54.67	33.26	35.14	3.98	56.77	74.00	-17.23	Peak	Horizontal
4948.00	40.48	33.26	35.14	3.98	42.58	54.00	-11.42	Average	Horizontal
4948.00	61.30	33.26	35.14	3.98	63.40	74.00	-10.60	Peak	Vertical
4948.00	40.34	33.26	35.14	3.98	42.44	54.00	-11.56	Average	Vertical

Notes:

1. Measuring frequencies from 9 KHz~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. No emission was be recorded above 18GHz means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


7. RESULTS FOR BAND EDGE TESTING

7.1 Standard Applicable

According to FCC §15.249 (d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to RSS-210 B.10 (b): Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

7.2. Test Setup Layout

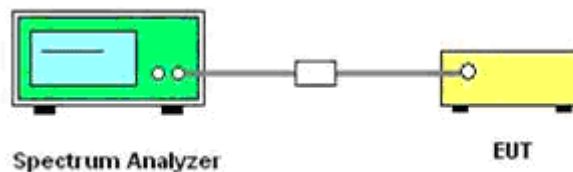

7.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

7.4. Test Procedures

According to ANSI C63.10:2013 Field Strength Approach (linear terms):

$$\text{eirp} = p_t \times g_t = (E \times d)^2 / 30$$

Where:

p_t = transmitter output power in watts,

g_t = numeric gain of the transmitting antenna (unitless),

E = electric field strength in V/m,

d = measurement distance in meters (m).

$$\text{erp} = \text{eirp} / 1.64 = (E \times d)^2 / (30 \times 1.64)$$

Where all terms are as previously defined.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for Peak detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).

9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Compare the resultant electric field strength level to the applicable regulatory limit.
11. Perform radiated spurious emission test duress until all measured frequencies were complete.

7.5. Measuring Instruments and Setting


GFSK							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Convert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-54.536	2.00	0	42.692	Peak	74.00	PASS
2310.000	-71.830	2.00	0	25.398	AV	54.00	PASS
2390.000	-42.312	2.00	0	54.916	Peak	74.00	PASS
2390.000	-71.599	2.00	0	25.629	AV	54.00	PASS
2483.500	-35.159	2.00	0	62.069	Peak	74.00	PASS
2483.500	-70.750	2.00	0	26.478	AV	54.00	PASS
2500.000	-44.022	2.00	0	53.206	Peak	74.00	PASS
2500.000	-71.437	2.00	0	25.791	AV	54.00	PASS

Remark:

1. The other emission levels were very low against the limit.
2. The average measurement was not performed when the peak measured data under the limit of average detection.
3. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;
4. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
5. Please refer to following test plots;


Restrict-Band Band-edge measurements for radiated emissions

GFSK

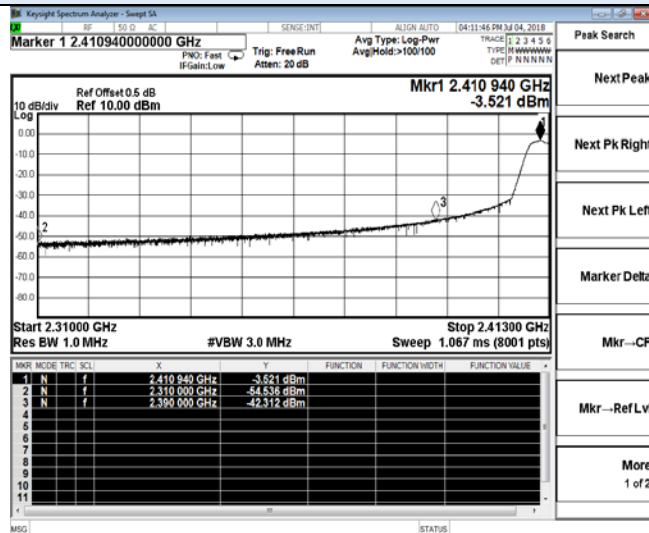


2411 MHz – Peak


GFSK

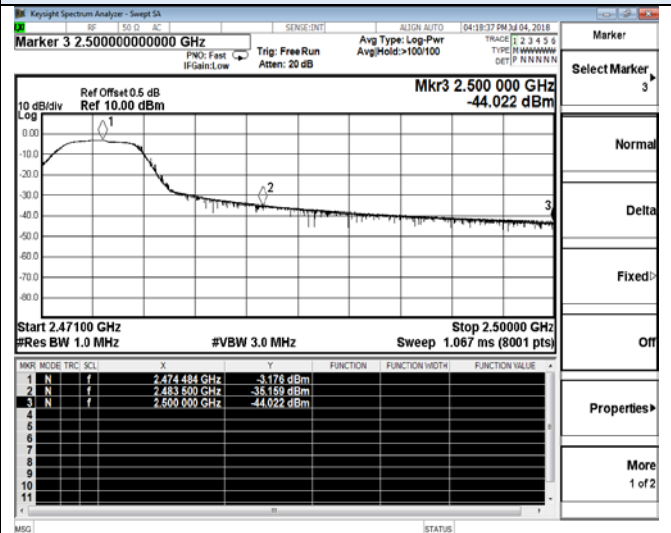

2474 MHz – Peak

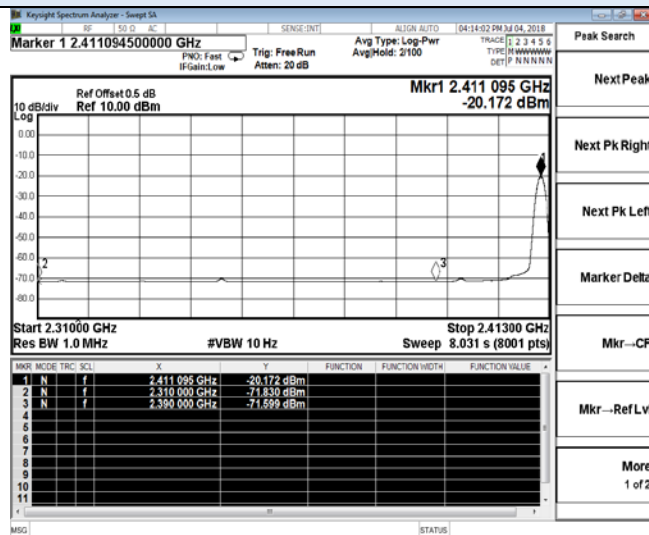

2411 MHz – Average

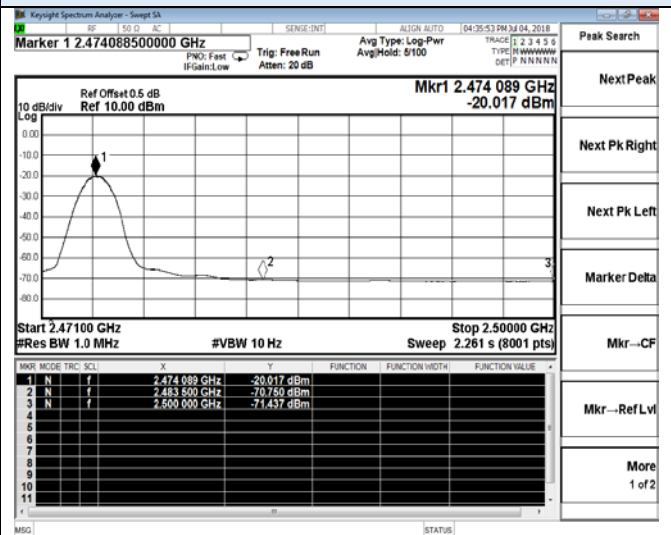

2474 MHz – Average

8. 99% AND 20 DB BANDWIDTH MEASUREMENT

8.1. Standard Applicable

According to § 2.1049 and RSS-Gen section 6.7 “The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.”

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

8.2. Block Diagram of Test Setup



8.3. Test Procedure

Use the following spectrum analyzer settings:

Span = 3MHz

RBW = 30 KHz

VBW = 100 KHz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

8.4. Test Results


Test Result of 99% and 20dB Bandwidth Measurement			
Test Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2411	6.113	5.9761	Non-Specified
2439	5.479	5.4457	Non-Specified
2474	4.751	4.6261	Non-Specified

Remark:


1. Test results including cable loss;
2. Please refer following test plots;

20dB Bandwidth and 99% Bandwidth


GFSK

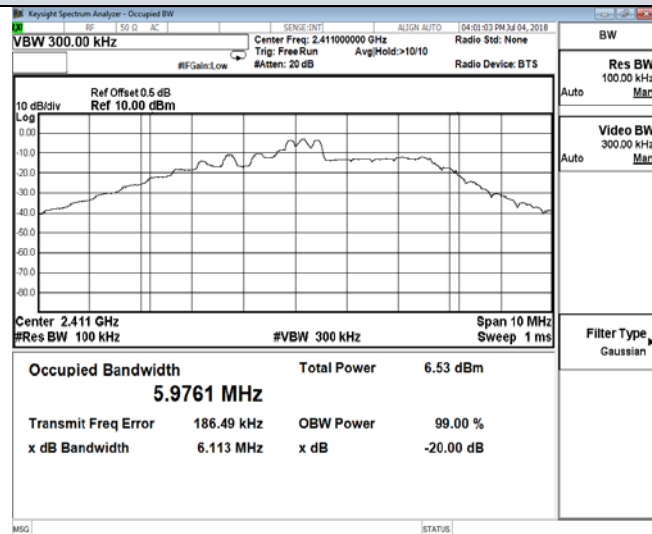


GFSK

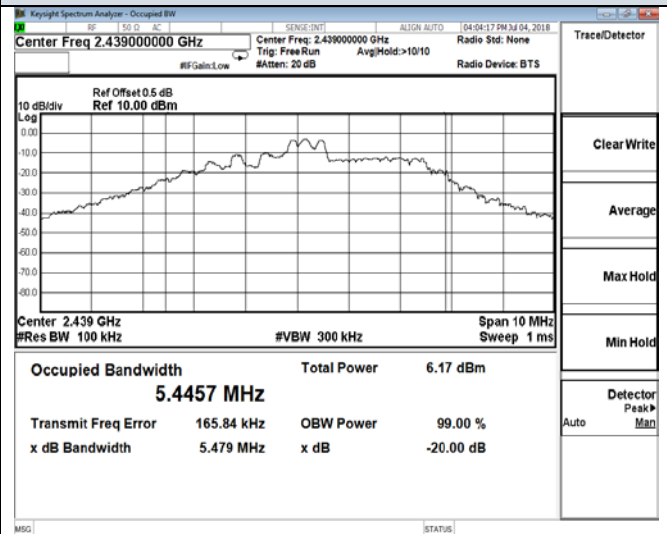

2411 MHz

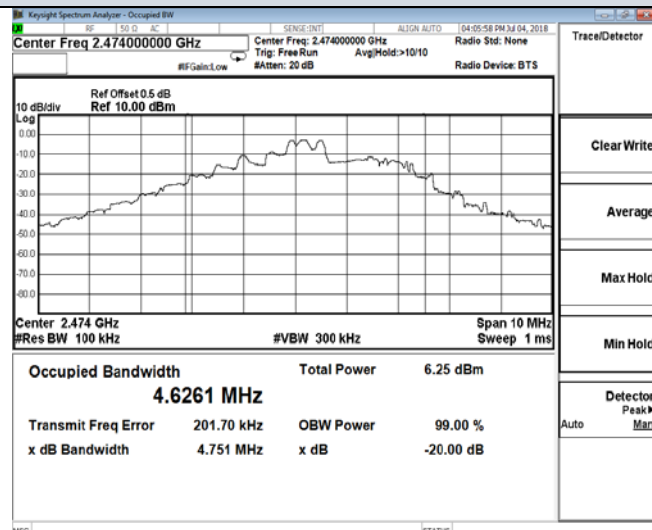

2439 MHz



2474 MHz



9. ANTENNA REQUIREMENTS

9.1 Standard Applicable

According to § 15.203 and RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Antenna Connected Construction

9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 2.00 dBi, and the antenna is a PIFA antenna connected to PCB board and no consideration of replacement. Please see EUT photo for details.

The PCB antenna will disable and connect to PIFA antenna, meet FCC part 15.203 antenna requirement.

9.3 Result

Compliance.

10. TEST SETUP PHOTOGRAPHS

Please refer to separate file for test setup photographs.

11. EXTERIOR PHOTOGRAPHS OF EUT

Please refer to separate file for exterior photographs.

12. INTERIOR PHOTOGRAPHS OF EUT

Please refer to separate file for interior photographs.

-----THE END OF TEST REPORT-----