



FCC RF Test Report

APPLICANT : CHEP
EQUIPMENT : Asset Tracker
BRAND NAME : CHEP
MODEL NAME : Gen 4 Ultra Short
FCC ID : 2APRD-GEN4SHORT
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 27, 2024 ~ Jul. 28, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
2.5 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 Antenna Requirements.....	32
4 LIST OF MEASURING EQUIPMENT	33
5 MEASUREMENT UNCERTAINTY	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR470213B	Rev. 01	Initial issue of report	Aug. 23, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.08 dB at 4824.00 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Applicable	Not connect to AC Mains
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

CHEP

2901 Tasman Drive Suite 101 Santa Clara, CA 95054

1.2 Manufacturer

MINEWING VIET NAM ELECTRONICS CO., LTD

Lot CN2, Yen Phong industrial park, Dong Phong commune and, Long Chau commune, Yen Phong District, Bac Ninh province, Vietnam

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Asset Tracker
Brand Name	CHEP
Model Name	Gen 4 Ultra Short
FCC ID	2APRD-GEN4SHORT
IMEI Code	Conducted: 866901063563195 Radiation: 866901066268204
HW Version	v14
SW Version	v10.00.0002
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 16.61 dBm (0.0458 W) 802.11g : 18.43 dBm (0.0697 W) 802.11n HT20 : 16.51 dBm (0.0448 W) 802.11n HT40 : 16.05 dBm (0.0403 W)
99% Occupied Bandwidth	802.11b : 13.06 MHz 802.11g : 16.70 MHz 802.11n HT20 : 17.50 MHz 802.11n HT40 : 36.78 MHz
Antenna Type / Gain	PCB Antenna with gain -2.5 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel


Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

2.3 Connection Diagram of Test System

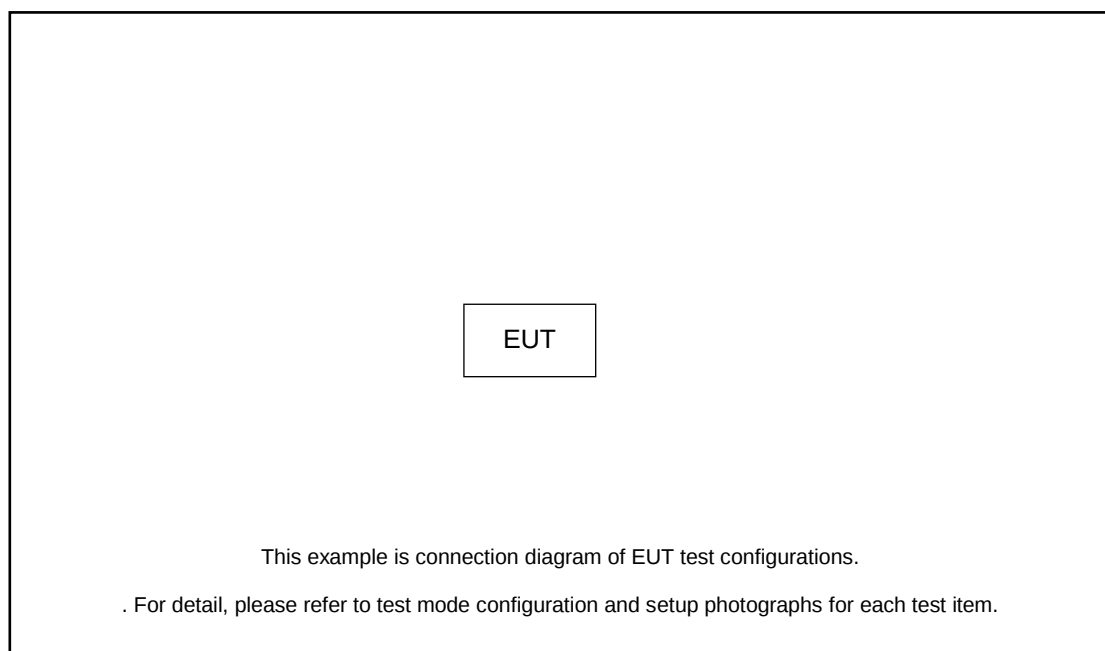

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.



2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.30 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.30 + 10 = 11.30 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

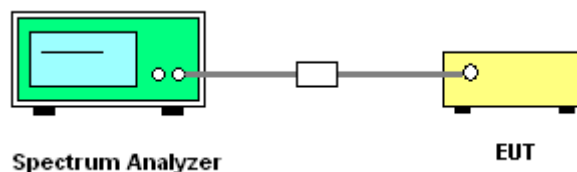



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

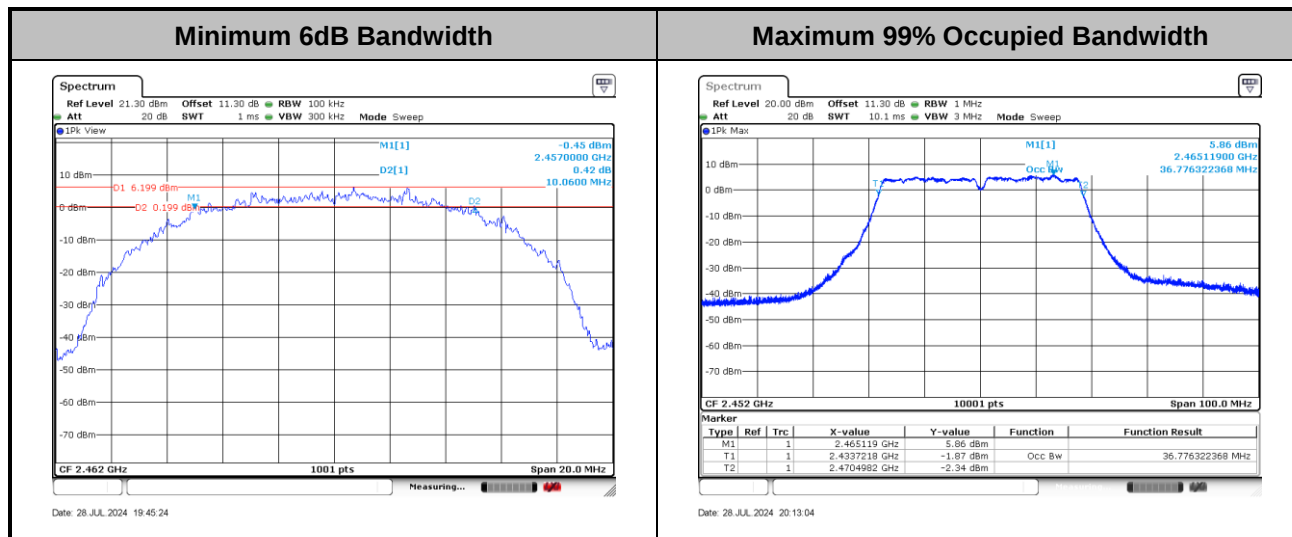

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

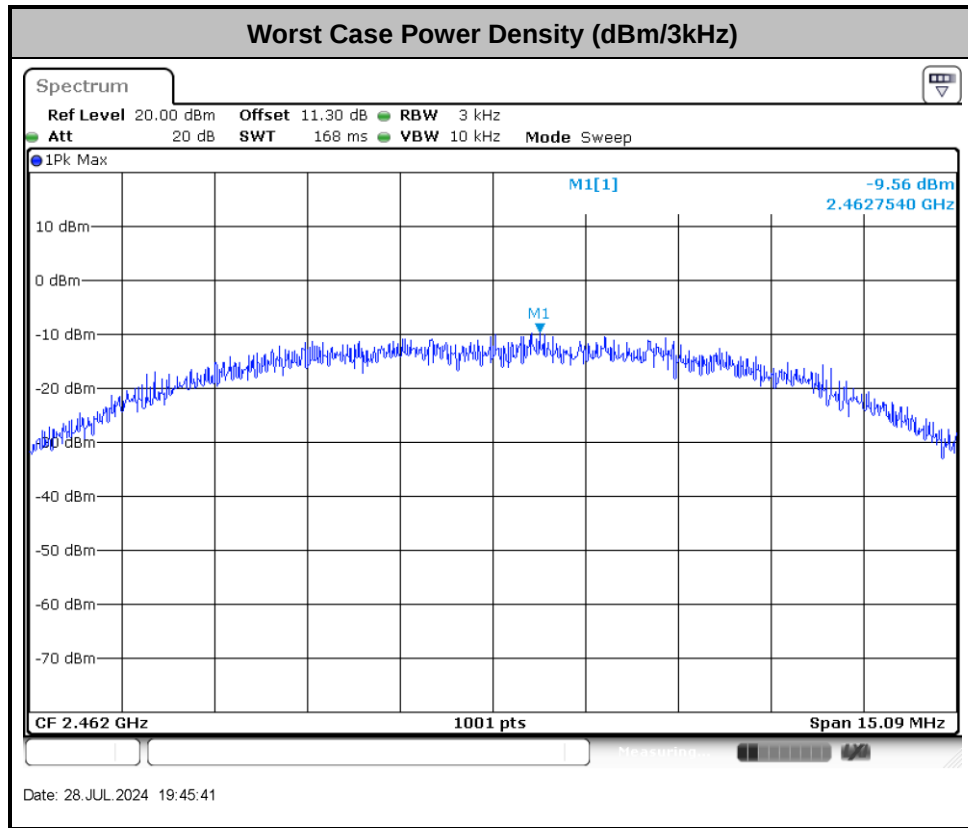

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

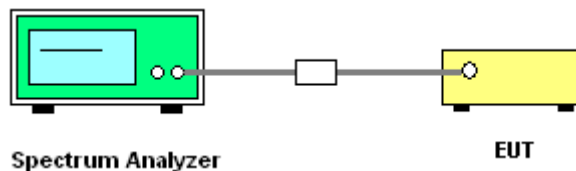




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Sam Zheng	Temperature :	24~26°C
		Relative Humidity :	50~53%


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

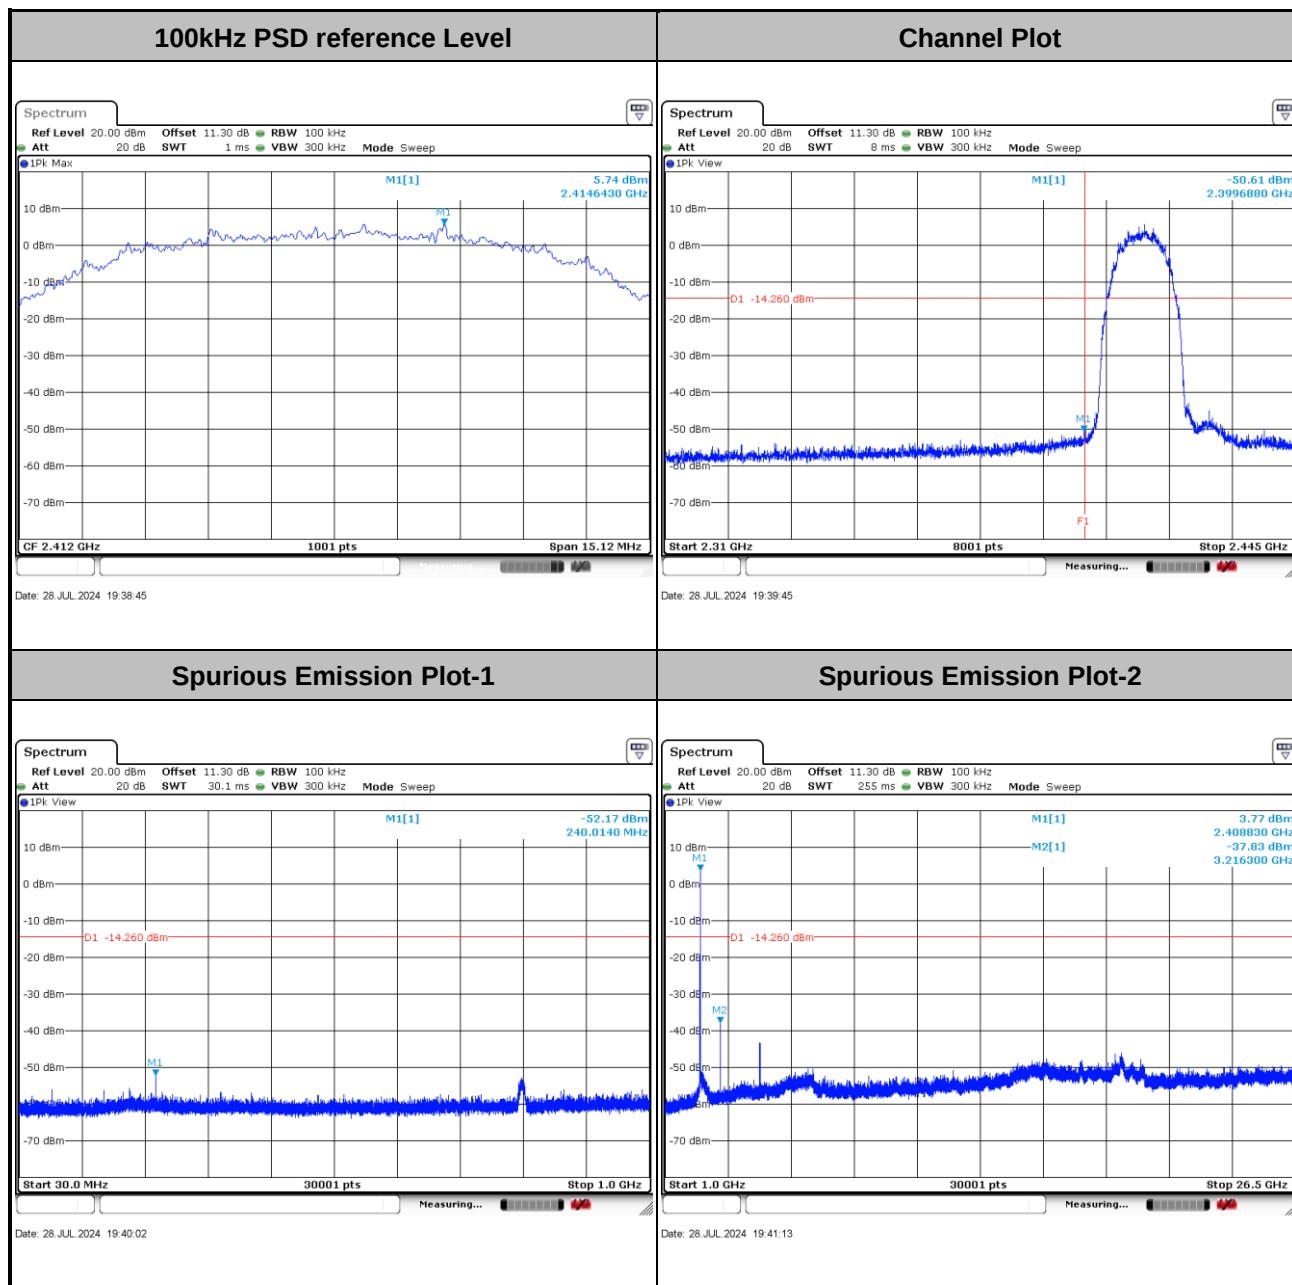



Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

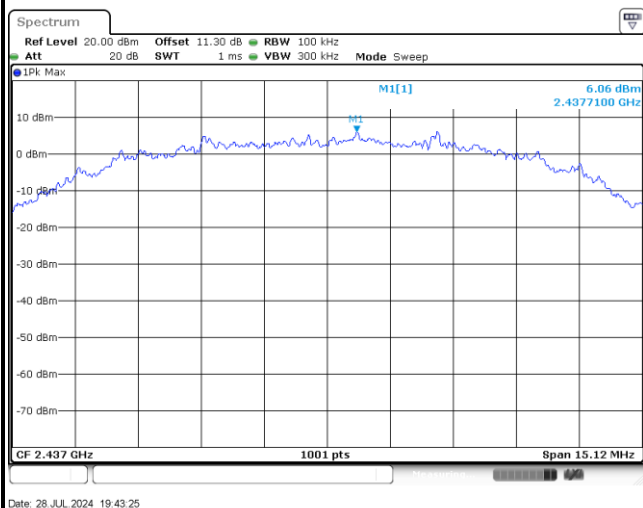


Channel Plot

NA

Spurious Emission Plot-1

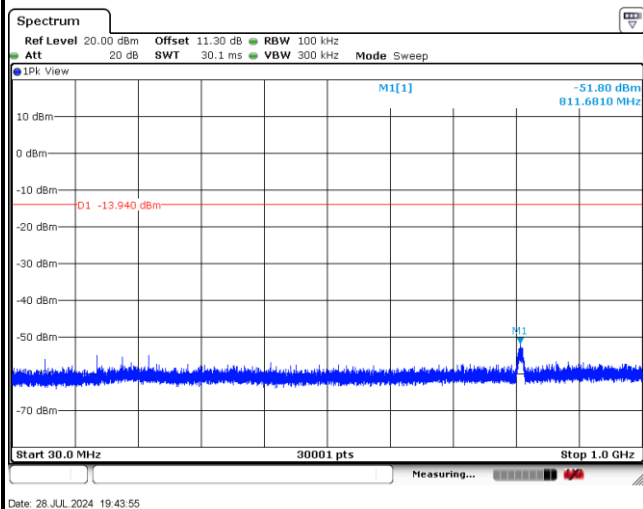


Spurious Emission Plot-2

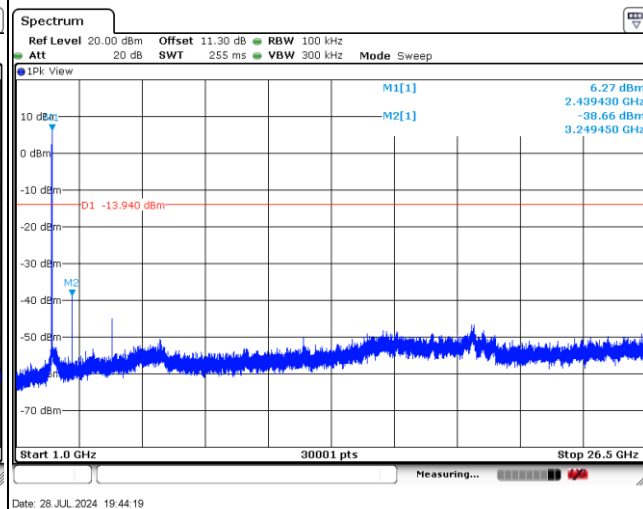




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

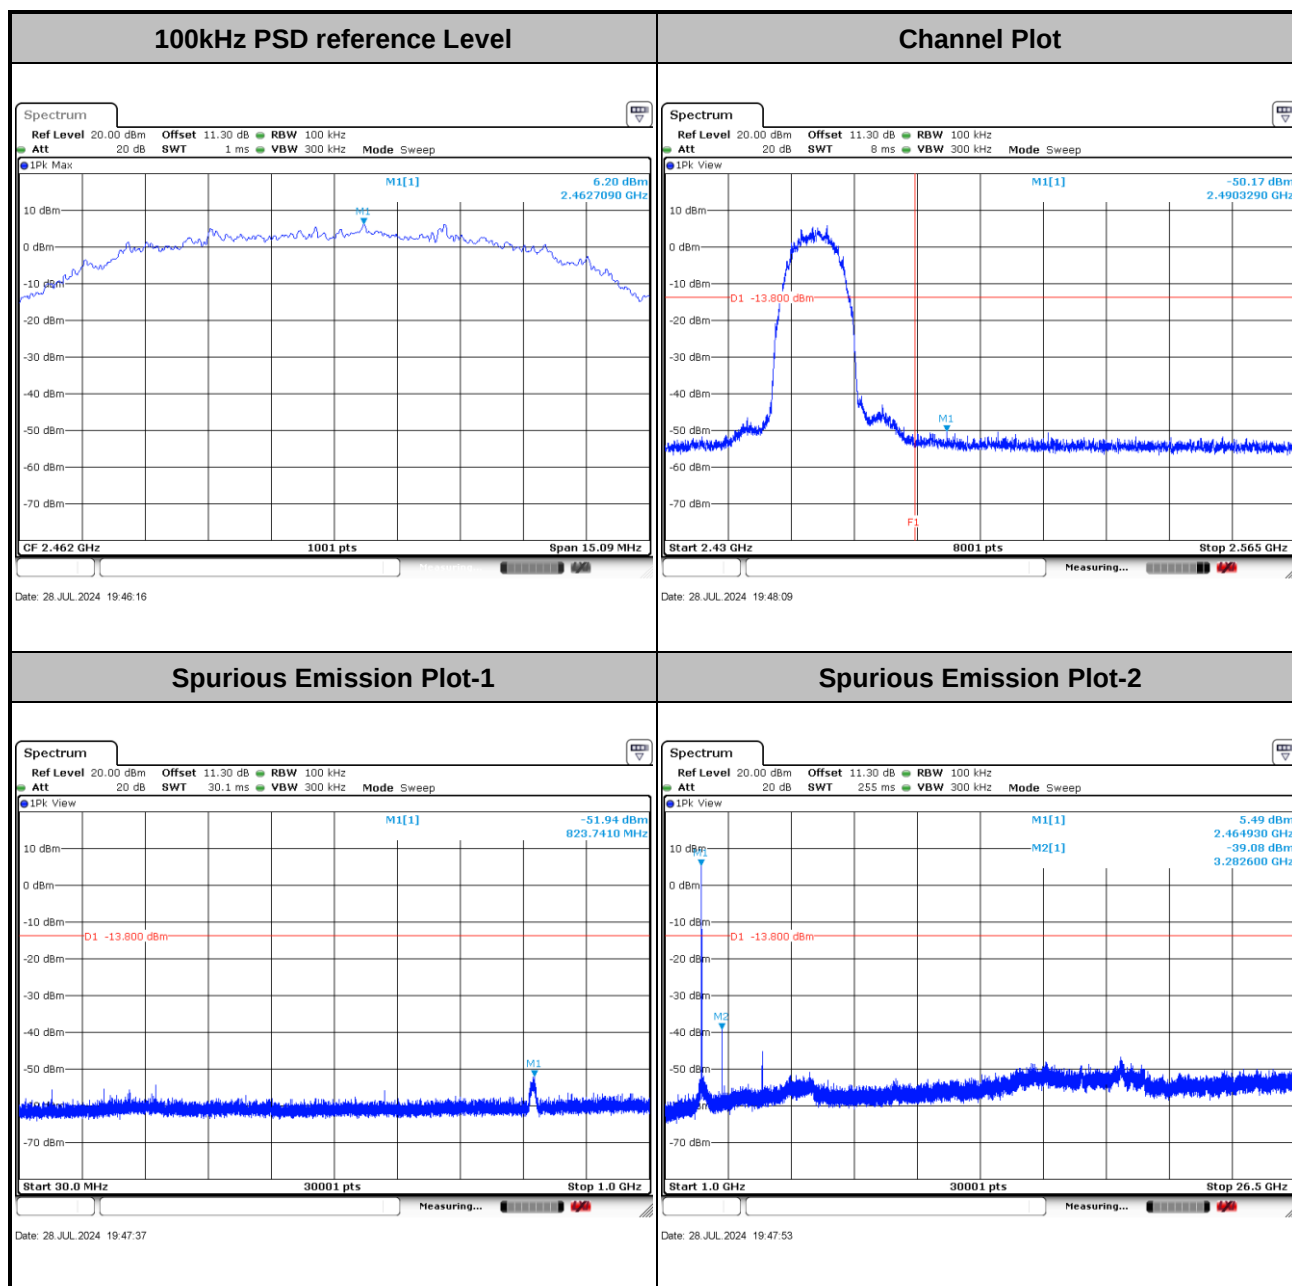




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

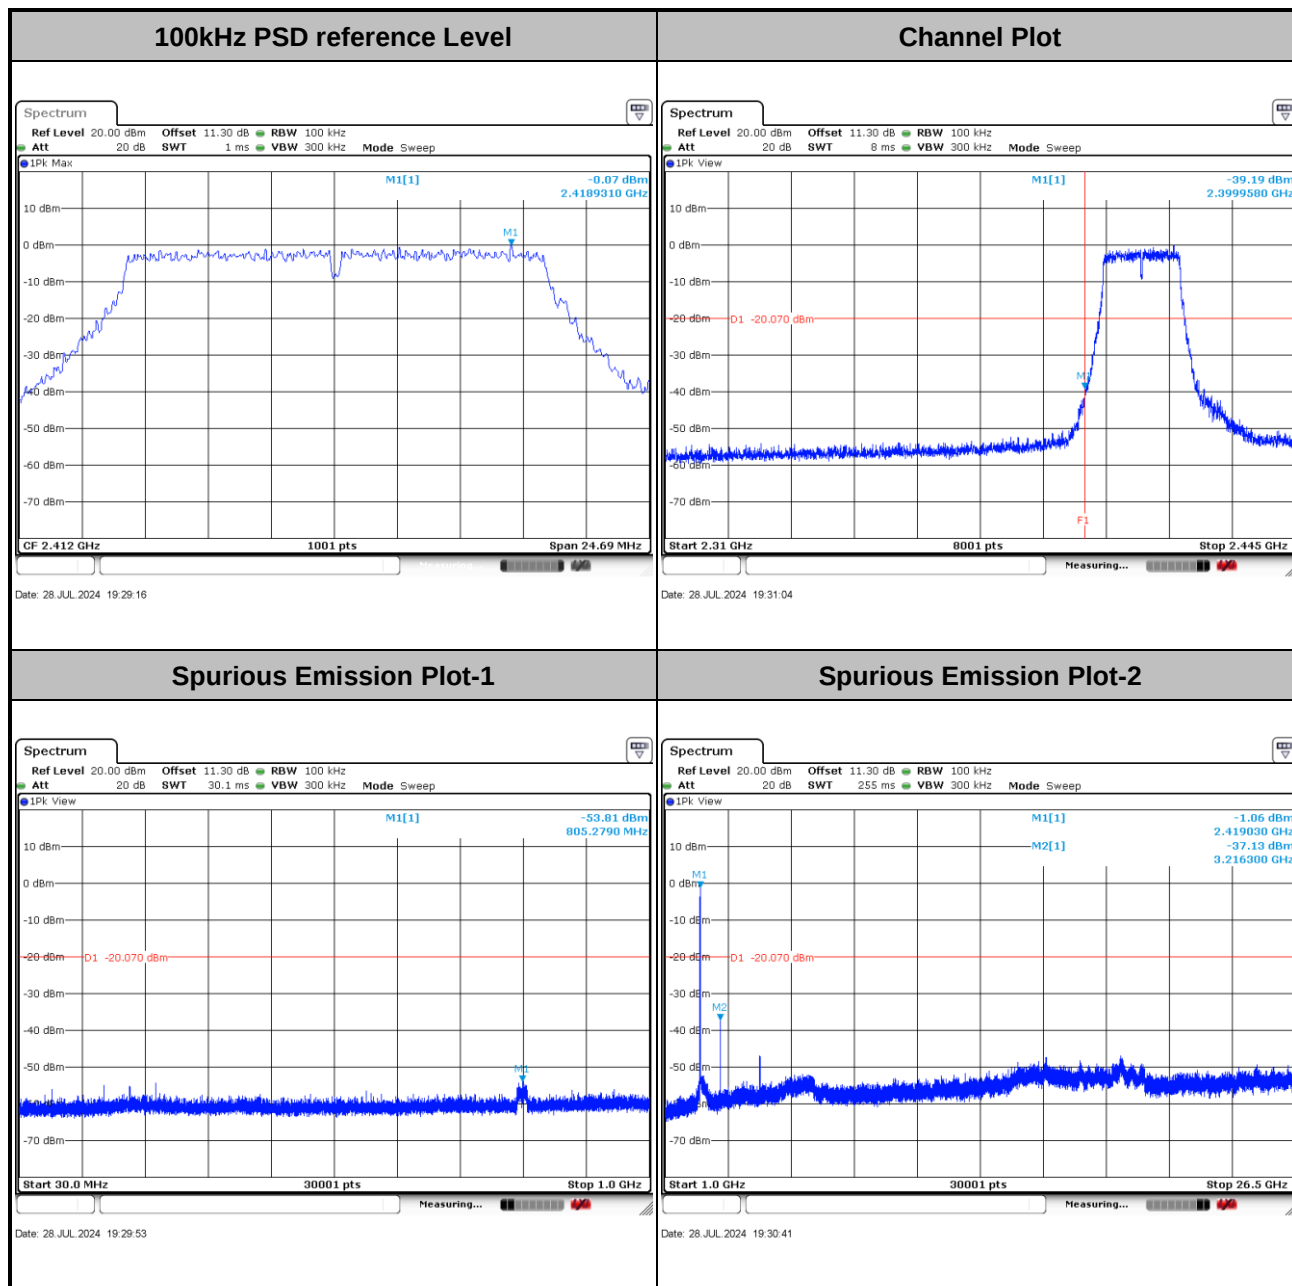



Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

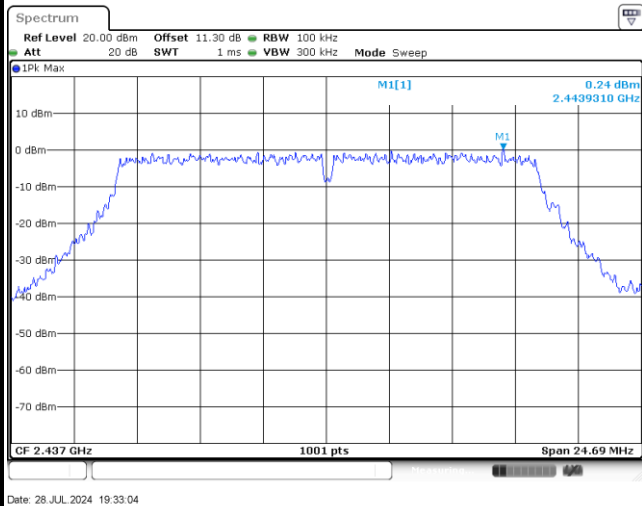


Channel Plot

NA

Spurious Emission Plot-1

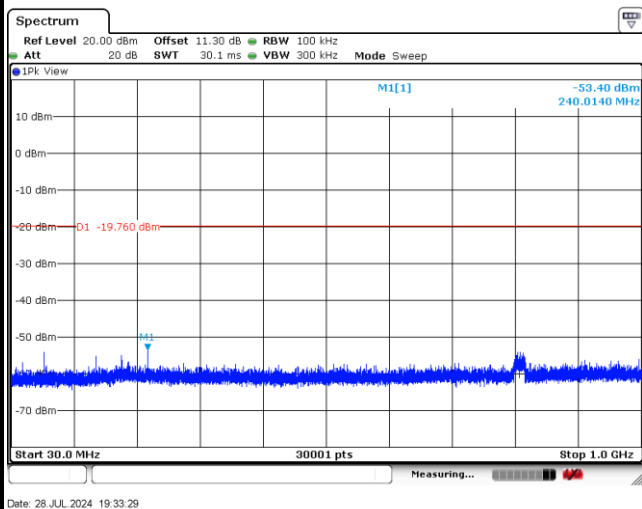


Spurious Emission Plot-2

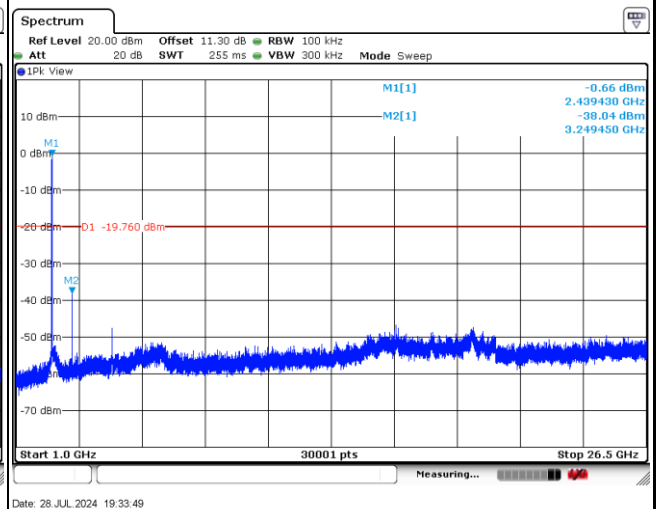




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

100kHz PSD reference Level

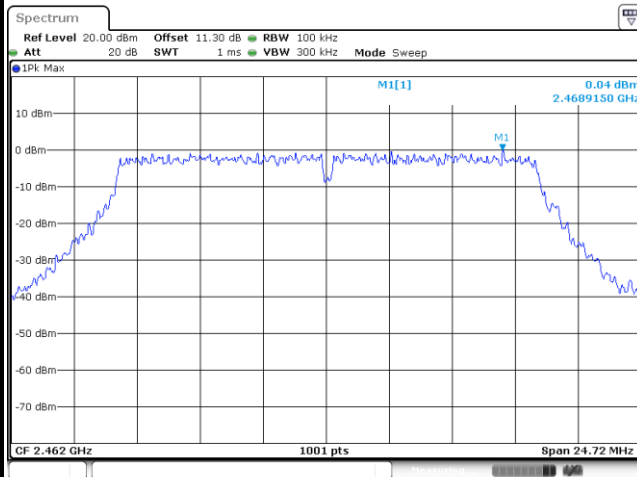


Date: 28 JUL 2024 19:35:41

Channel Plot

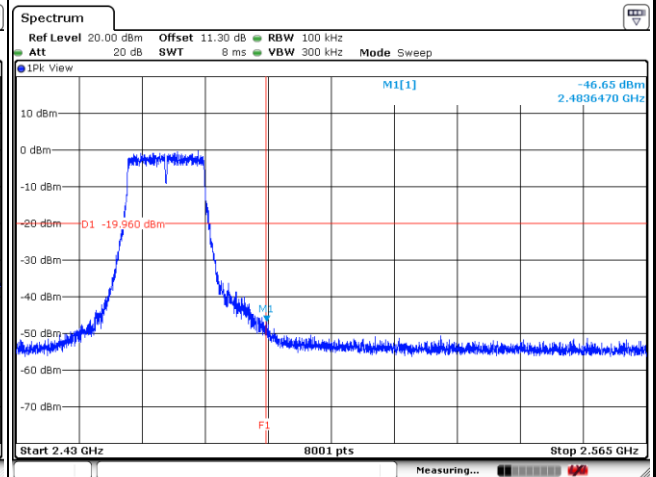


Date: 28 JUL 2024 19:36:53

Spurious Emission Plot-1

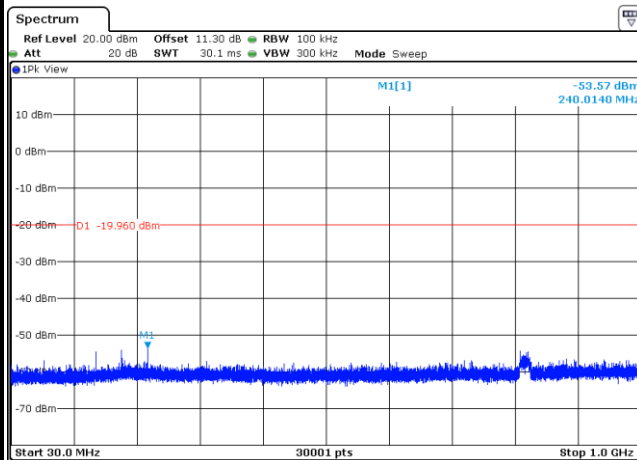

Date: 28 JUL 2024 19:36:05

Spurious Emission Plot-2

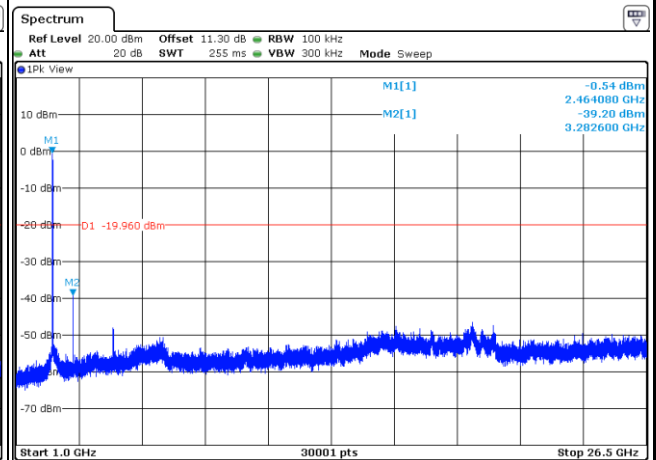


Date: 28 JUL 2024 19:36:24




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

100kHz PSD reference Level

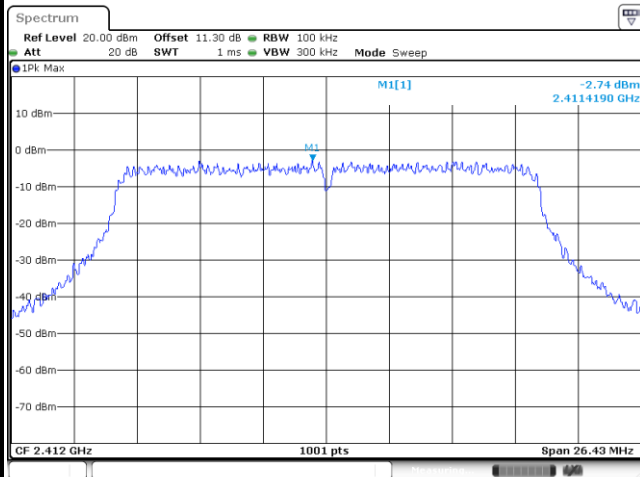


Date: 28 JUL 2024 19:15:52

Channel Plot

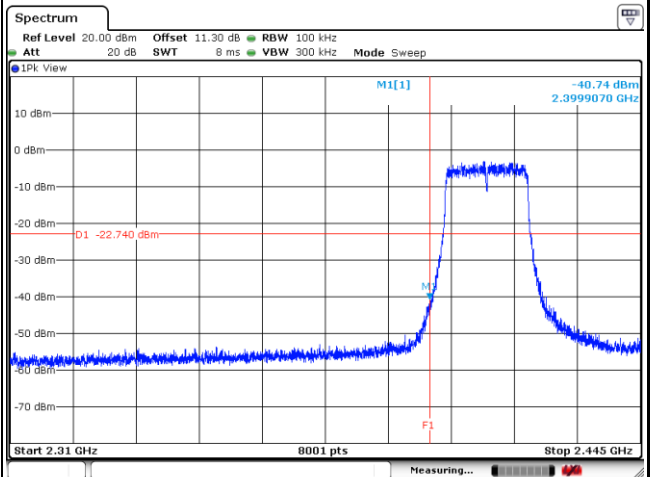


Date: 28 JUL 2024 19:16:44

Spurious Emission Plot-1

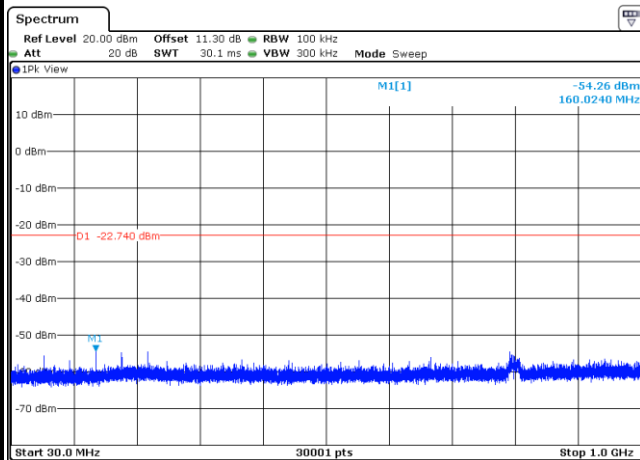

Date: 28 JUL 2024 19:16:10

Spurious Emission Plot-2

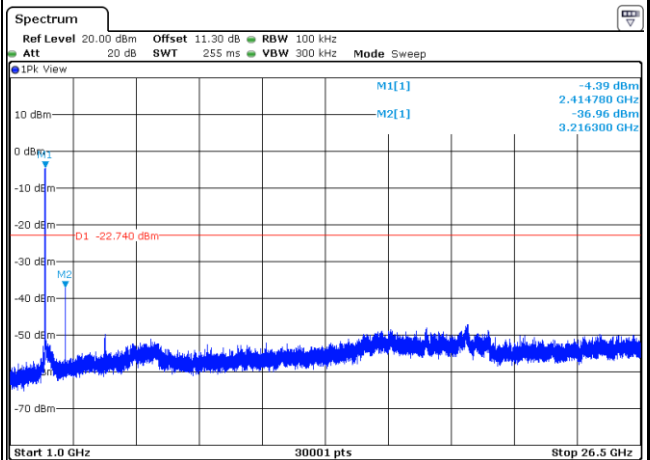


Date: 28 JUL 2024 19:16:34



Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

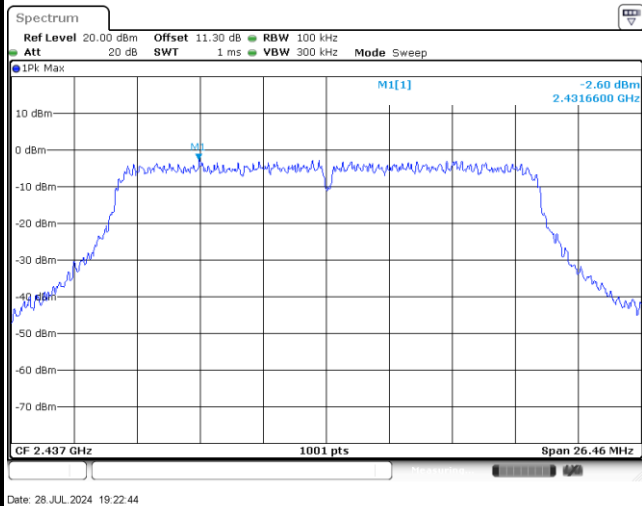


Channel Plot

NA

Spurious Emission Plot-1

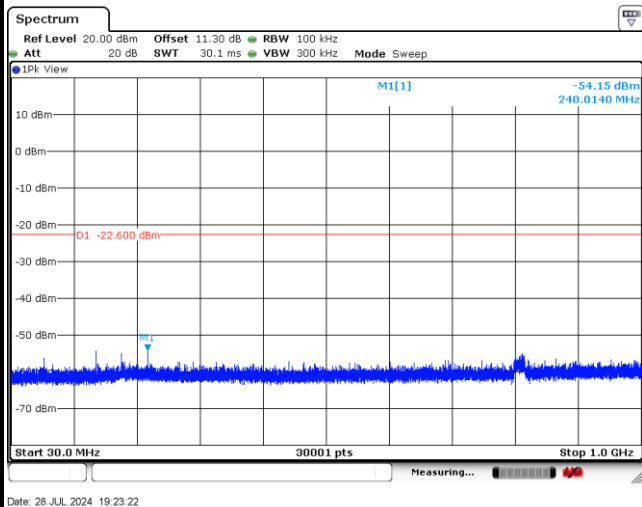


Spurious Emission Plot-2

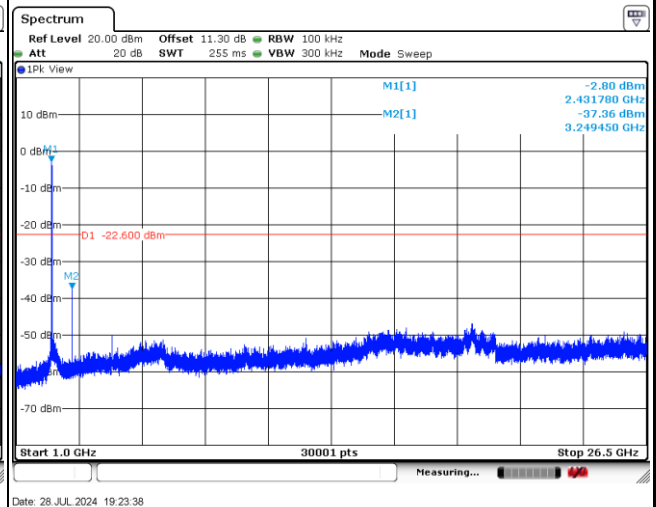



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

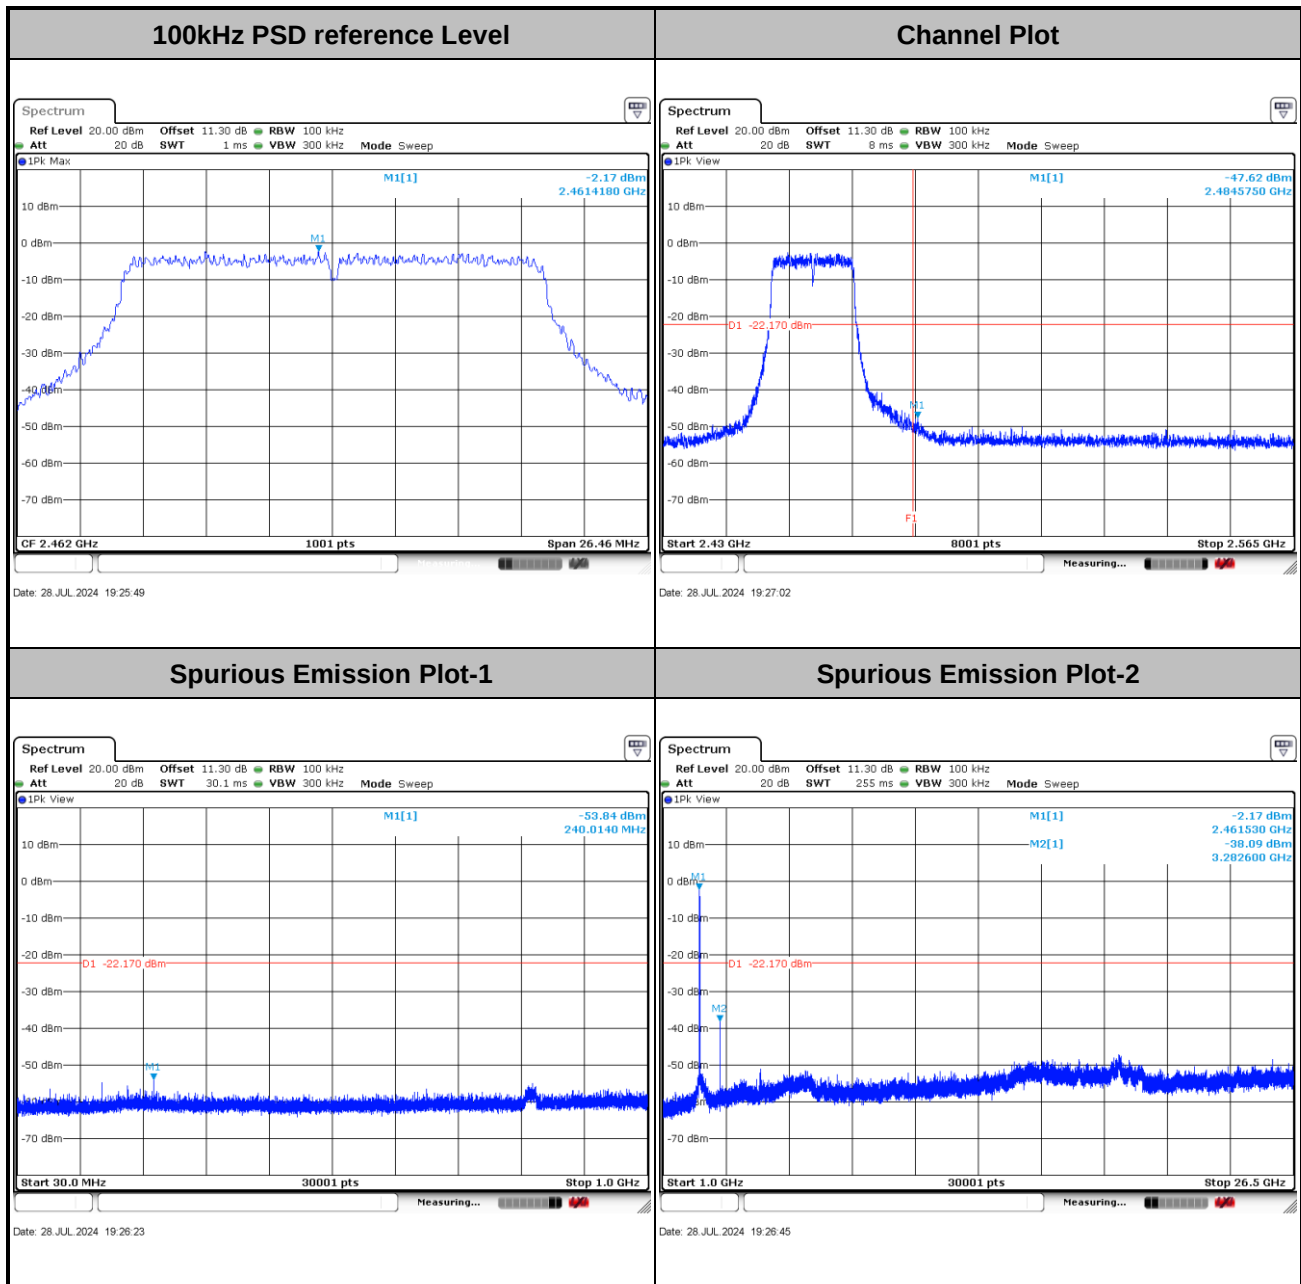




Test Mode : 802.11n HT40


Test Channel : 03

100kHz PSD reference Level

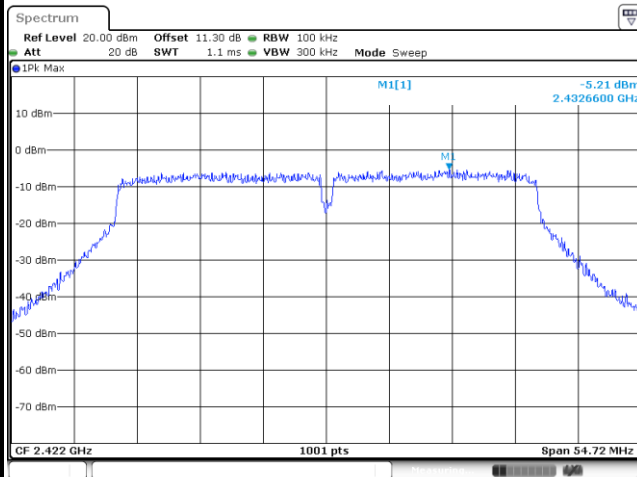


Date: 28 JUL 2024 19:08:52

Channel Plot

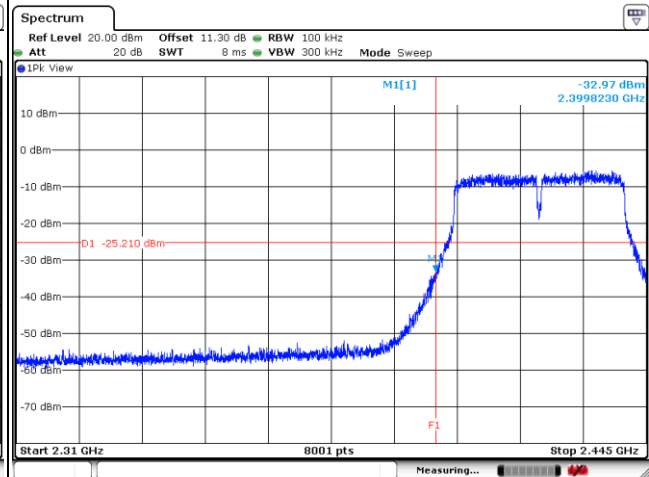


Date: 28 JUL 2024 19:09:41

Spurious Emission Plot-1

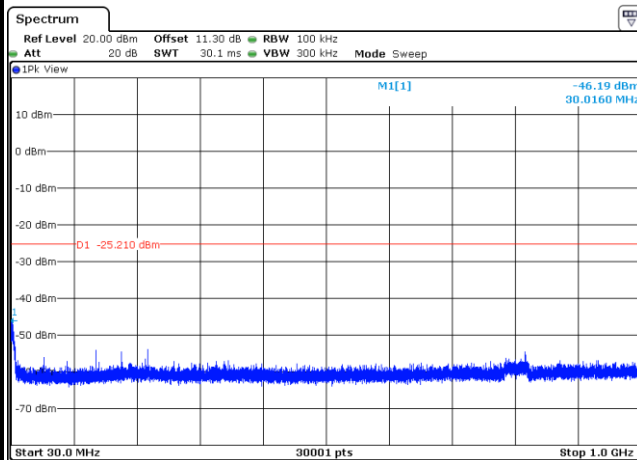

Date: 28 JUL 2024 19:09:09

Spurious Emission Plot-2

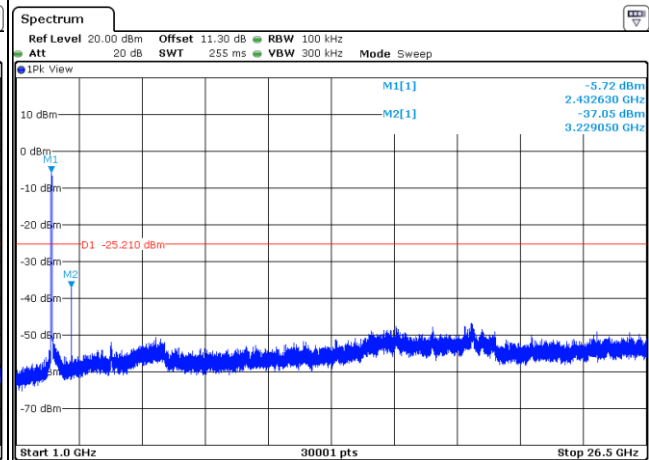


Date: 28 JUL 2024 19:09:24



Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

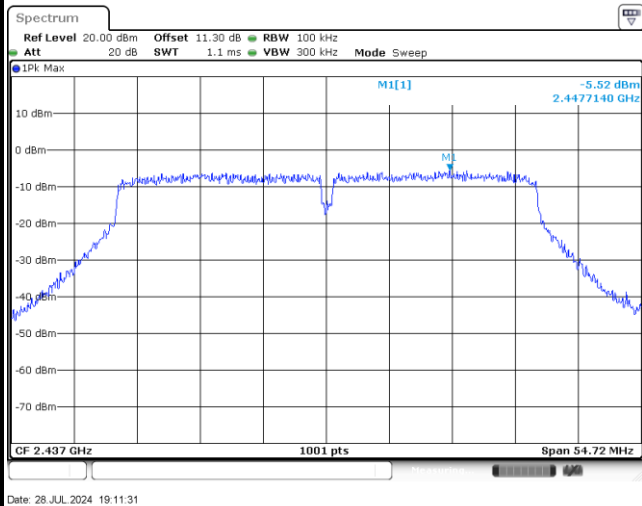


Channel Plot

NA

Spurious Emission Plot-1

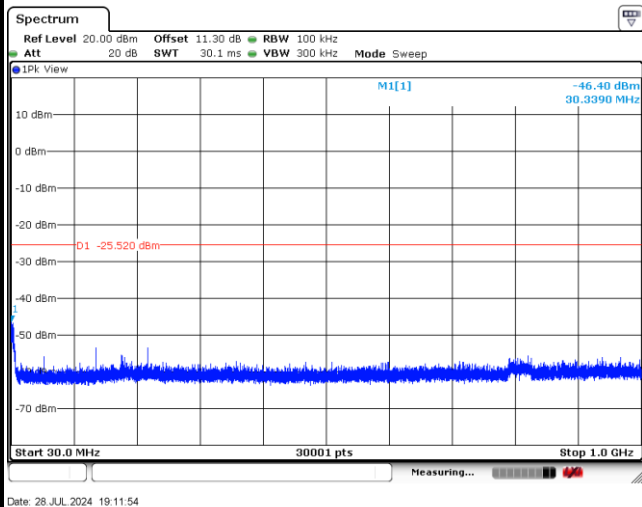


Spurious Emission Plot-2

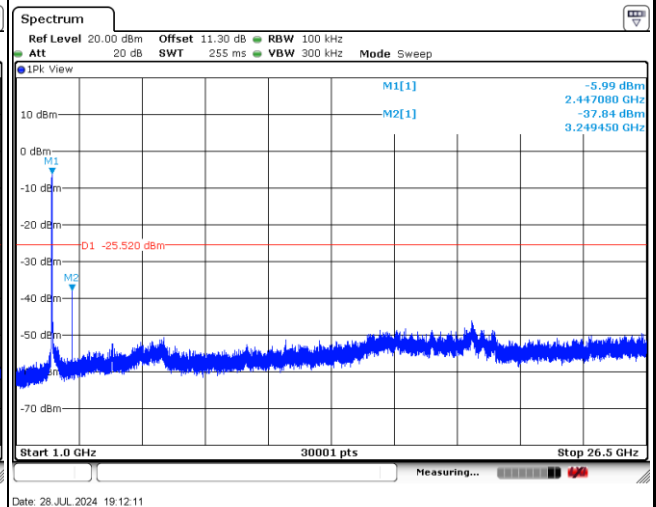




Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----

100kHz PSD reference Level

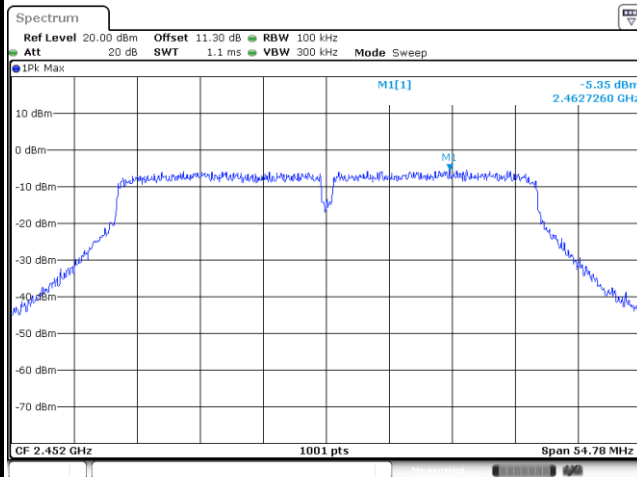


Date: 28 JUL 2024 19:13:34

Channel Plot

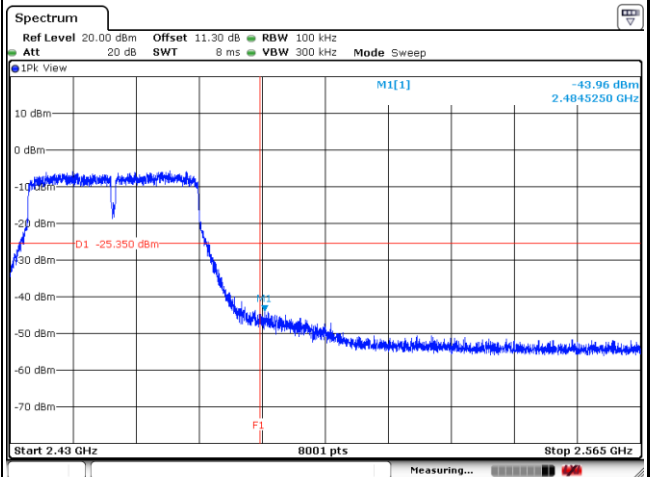


Date: 28 JUL 2024 19:14:24

Spurious Emission Plot-1

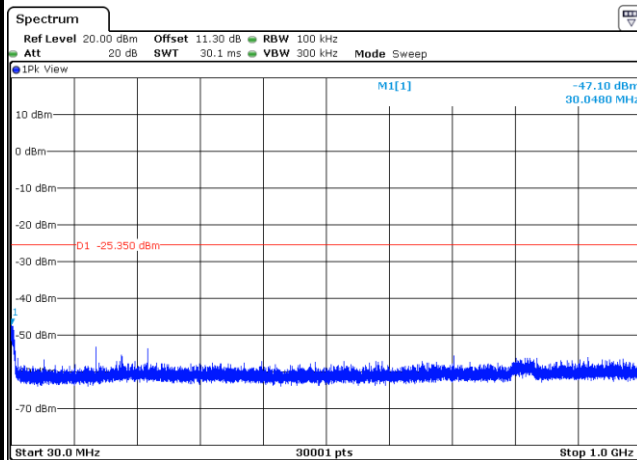

Date: 28 JUL 2024 19:13:51

Spurious Emission Plot-2

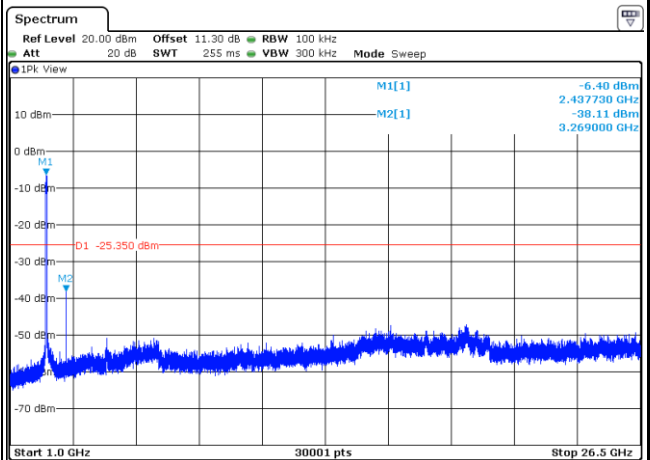

Date: 28 JUL 2024 19:14:11

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

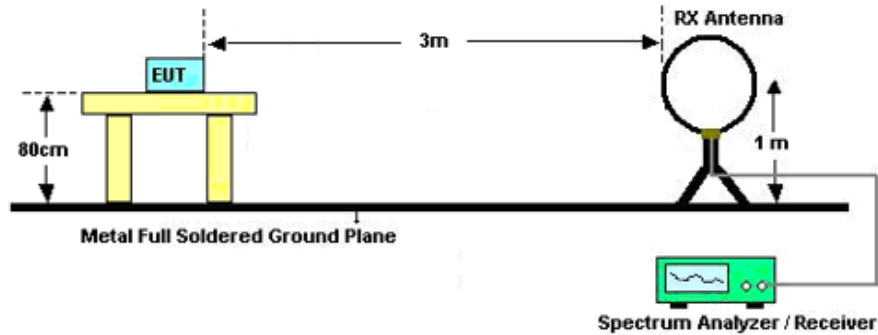

For radiated emissions from 30MHz to 1GHz

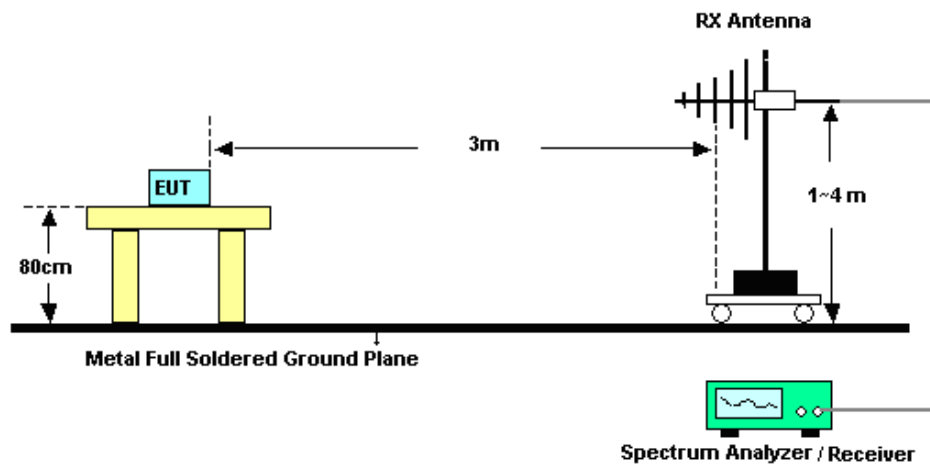

For radiated emissions above 1GHz

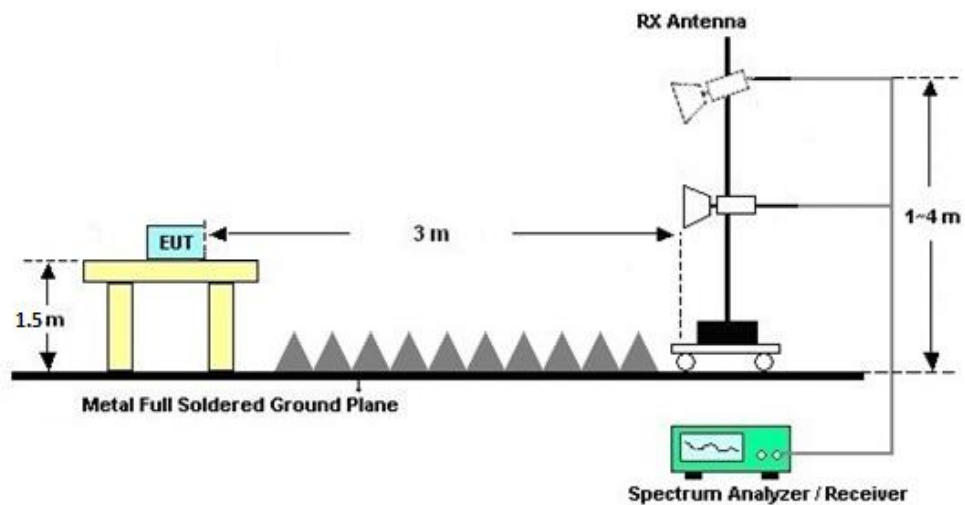



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	Jul. 27, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 09, 2024	Jul. 27, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2024	Jul. 27, 2024	Jul. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Jul. 27, 2024	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	Jul. 27, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Jul. 27, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Jul. 27, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Jul. 27, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2023	Jul. 27, 2024	Dec. 26, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Jul. 27, 2024	Jul. 02, 2025	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2023	Jul. 27, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 27, 2024	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 27, 2024	NCR	Radiation (03CH03-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jul. 28, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Jul. 28, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Jul. 28, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Apr. 09, 2024	Jul. 28, 2024	Apr. 08, 2025	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sam Zheng	Temperature:	21~25	°C
Test Date:	2024/7/28	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	13.06	10.08	0.50	Pass
11b	1Mbps	1	6	2437	13.06	10.08	0.50	Pass
11b	1Mbps	1	11	2462	13.05	10.06	0.50	Pass
11g	6Mbps	1	1	2412	16.69	16.46	0.50	Pass
11g	6Mbps	1	6	2437	16.69	16.46	0.50	Pass
11g	6Mbps	1	11	2462	16.70	16.48	0.50	Pass
HT20	MCS0	1	1	2412	17.50	17.62	0.50	Pass
HT20	MCS0	1	6	2437	17.50	17.64	0.50	Pass
HT20	MCS0	1	11	2462	17.50	17.64	0.50	Pass
HT40	MCS0	1	3	2422	36.76	36.48	0.50	Pass
HT40	MCS0	1	6	2437	36.74	36.48	0.50	Pass
HT40	MCS0	1	9	2452	36.78	36.52	0.50	Pass

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-9.91	-2.50	8.00	Pass
11b	1Mbps	1	6	2437	-9.59	-2.50	8.00	Pass
11b	1Mbps	1	11	2462	-9.56	-2.50	8.00	Pass
11g	6Mbps	1	1	2412	-15.48	-2.50	8.00	Pass
11g	6Mbps	1	6	2437	-15.29	-2.50	8.00	Pass
11g	6Mbps	1	11	2462	-15.34	-2.50	8.00	Pass
HT20	MCS0	1	1	2412	-17.47	-2.50	8.00	Pass
HT20	MCS0	1	6	2437	-17.10	-2.50	8.00	Pass
HT20	MCS0	1	11	2462	-16.88	-2.50	8.00	Pass
HT40	MCS0	1	3	2422	-18.64	-2.50	8.00	Pass
HT40	MCS0	1	6	2437	-18.54	-2.50	8.00	Pass
HT40	MCS0	1	9	2452	-19.40	-2.50	8.00	Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	14.00	30.00	-2.50	11.50	36.00	Pass
11b	1Mbps	1	6	2437	14.30	30.00	-2.50	11.80	36.00	Pass
11b	1Mbps	1	11	2462	14.60	30.00	-2.50	12.10	36.00	Pass
11g	6Mbps	1	1	2412	13.00	30.00	-2.50	10.50	36.00	Pass
11g	6Mbps	1	6	2437	13.40	30.00	-2.50	10.90	36.00	Pass
11g	6Mbps	1	11	2462	13.50	30.00	-2.50	11.00	36.00	Pass
HT20	MCS0	1	1	2412	10.60	30.00	-2.50	8.10	36.00	Pass
HT20	MCS0	1	6	2437	10.90	30.00	-2.50	8.40	36.00	Pass
HT20	MCS0	1	11	2462	11.00	30.00	-2.50	8.50	36.00	Pass
HT40	MCS0	1	3	2422	10.90	30.00	-2.50	8.40	36.00	Pass
HT40	MCS0	1	6	2437	10.90	30.00	-2.50	8.40	36.00	Pass
HT40	MCS0	1	9	2452	11.00	30.00	-2.50	8.50	36.00	Pass

Note:

1. Measured power (dBm) has offset with cable loss.
2. Power setting is by default.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	16.16	30.00	-2.50	13.66	36.00	Pass
11b	1Mbps	1	6	2437	16.39	30.00	-2.50	13.89	36.00	Pass
11b	1Mbps	1	11	2462	16.61	30.00	-2.50	14.11	36.00	Pass
11g	6Mbps	1	1	2412	18.06	30.00	-2.50	15.56	36.00	Pass
11g	6Mbps	1	6	2437	18.20	30.00	-2.50	15.70	36.00	Pass
11g	6Mbps	1	11	2462	18.43	30.00	-2.50	15.93	36.00	Pass
HT20	MCS0	1	1	2412	16.16	30.00	-2.50	13.66	36.00	Pass
HT20	MCS0	1	6	2437	16.34	30.00	-2.50	13.84	36.00	Pass
HT20	MCS0	1	11	2462	16.51	30.00	-2.50	14.01	36.00	Pass
HT40	MCS0	1	3	2422	15.91	30.00	-2.50	13.41	36.00	Pass
HT40	MCS0	1	6	2437	15.77	30.00	-2.50	13.27	36.00	Pass
HT40	MCS0	1	9	2452	16.05	30.00	-2.50	13.55	36.00	Pass

Note:

1. Measured power (dBm) has offset with cable loss.
2. Power Setting is by default.



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24-25℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	SISO	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	SISO	802.11n HT40	09	2452	MCS0	-	-
Mode 12	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	LF

Summary of each worse mode





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2385.53	41.18	54.00	-12.82	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	49.92	54.00	-4.08	H	Average	Pass	Harmonic
2	802.11b	06	2493.13	42.50	54.00	-11.50	H	AVERAGE	Pass	Band Edge
2	802.11b	06	4874.00	49.91	54.00	-4.09	H	Average	Pass	Harmonic
3	802.11b	11	2488.07	42.43	54.00	-11.57	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	48.17	54.00	-5.83	H	Average	Pass	Harmonic
4	802.11g	01	2389.95	44.01	54.00	-9.99	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	46.05	54.00	-7.95	H	Average	Pass	Harmonic
5	802.11g	06	2484.12	41.77	54.00	-12.23	H	AVERAGE	Pass	Band Edge
5	802.11g	06	4874.00	45.93	54.00	-8.07	H	Average	Pass	Harmonic
6	802.11g	11	2483.58	48.15	54.00	-5.85	H	AVERAGE	Pass	Band Edge
6	802.11g	11	4924.00	45.00	54.00	-9.00	V	Average	Pass	Harmonic
7	802.11n HT20	01	2389.95	43.58	54.00	-10.42	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	46.82	74.00	-27.18	H	Peak	Pass	Harmonic
8	802.11n HT20	06	2493.51	42.89	54.00	-11.11	H	AVERAGE	Pass	Band Edge
8	802.11n HT20	06	4874.00	42.44	54.00	-11.56	H	Average	Pass	Harmonic
9	802.11n HT20	11	2483.85	47.55	54.00	-6.45	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	4924.00	46.07	74.00	-27.93	V	Peak	Pass	Harmonic
10	802.11n HT40	03	2389.97	45.96	54.00	-8.04	H	AVERAGE	Pass	Band Edge
10	802.11n HT40	03	-	-	-	-	-	-	-	Harmonic
11	802.11n HT40	09	2484.30	49.91	54.00	-4.09	H	AVERAGE	Pass	Band Edge
11	802.11n HT40	09	-	-	-	-	-	-	-	Harmonic
12	802.11n HT40	09	869.05	31.12	46	-14.88	H	Peak	Pass	LF







Harmonic Test Results for Non-Restricted bands

Mode	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
11b_CH01		3210	54.32	-28.66	82.98	73.67	32.19	5.68	57.22	-	-	P	H
		3210	50.92	-30.97	81.89	70.27	32.19	5.68	57.22	-	-	P	V
11b_CH06		3255	54.85	-30.38	85.23	74.04	32.26	5.75	57.2	-	-	P	H
		3255	51.17	-31.29	82.46	70.36	32.26	5.75	57.2	-	-	P	V
11b_CH11		3285	54.53	-29.36	83.89	73.62	32.29	5.81	57.19	-	-	P	H
		3285	50.44	-21.98	72.42	69.53	32.29	5.81	57.19	-	-	P	V
11g_CH01		3210	54.69	-27.82	82.51	74.04	32.19	5.68	57.22	-	-	P	H
		3210	49.89	-27.35	77.24	69.24	32.19	5.68	57.22	-	-	P	V
11g_CH06		3255	54.37	-24.64	79.01	73.56	32.26	5.75	57.2	-	-	P	H
		3255	51.05	-28.10	79.15	70.24	32.26	5.75	57.2	-	-	P	V
11g_CH11		3285	54.57	-27.96	82.53	73.66	32.29	5.81	57.19	-	-	P	H
		3285	50.49	-28.56	79.05	69.58	32.29	5.81	57.19	-	-	P	V
11N20_CH01		3210	55.28	-25.00	80.28	74.63	32.19	5.68	57.22	-	-	P	H
		3210	50.19	-24.84	75.03	69.54	32.19	5.68	57.22	-	-	P	V
11N20_CH06		3255	55.58	-24.83	80.41	74.77	32.26	5.75	57.2	-	-	P	H
		3255	51.46	-23.81	75.27	70.65	32.26	5.75	57.2	-	-	P	V
11N20_CH11		3285	54.56	-24.24	78.8	73.65	32.29	5.81	57.19	-	-	P	H
		3285	51.84	-20.99	72.83	70.93	32.29	5.81	57.19	-	-	P	V
Remark	1. All results are PASS against Peak limit line. 2. Non-restricted band limit is 100kHz PSD Level - 20dB.												

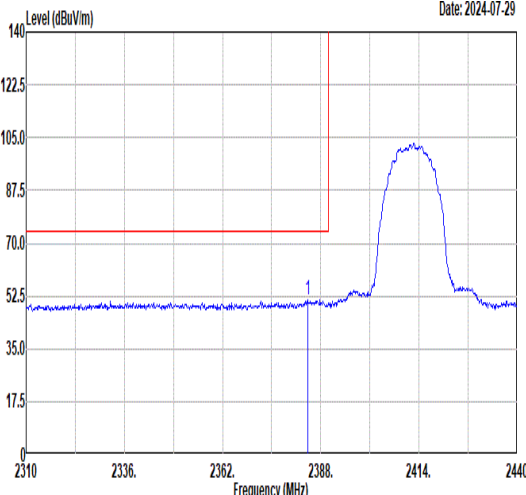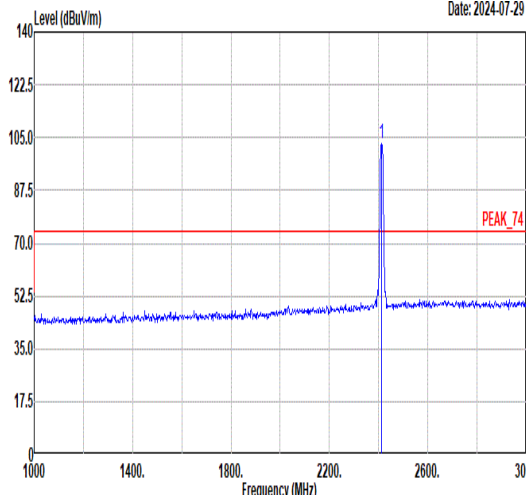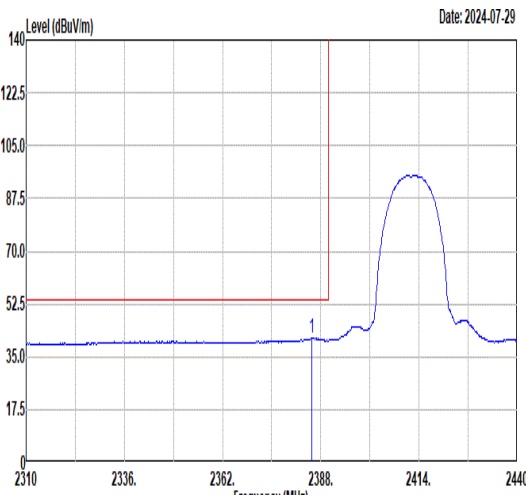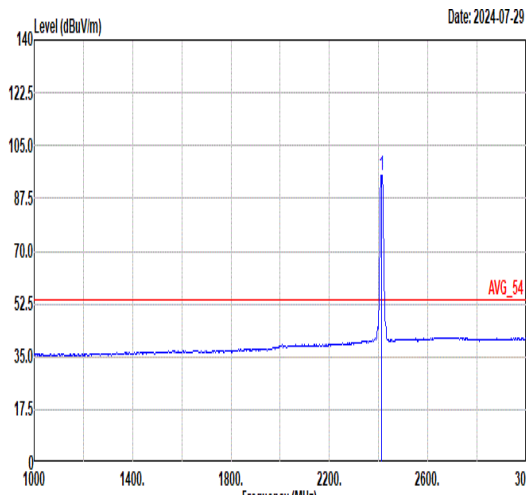

Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.49</td><td>51.30</td><td>74.00</td><td>-22.70</td><td>49.46</td><td>30.62</td><td>4.79</td><td>33.57</td><td>300</td><td>227</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.49	51.30	74.00	-22.70	49.46	30.62	4.79	33.57	300	227	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>102.98</td><td>-----</td><td>-----</td><td>101.07</td><td>30.64</td><td>4.82</td><td>33.55</td><td>300</td><td>227</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.98	-----	-----	101.07	30.64	4.82	33.55	300	227
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2384.49	51.30	74.00	-22.70	49.46	30.62	4.79	33.57	300	227	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	102.98	-----	-----	101.07	30.64	4.82	33.55	300	227	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.53</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>39.34</td><td>30.62</td><td>4.79</td><td>33.57</td><td>300</td><td>227</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.53	41.18	54.00	-12.82	39.34	30.62	4.79	33.57	300	227	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.26</td><td>-----</td><td>-----</td><td>93.35</td><td>30.64</td><td>4.82</td><td>33.55</td><td>300</td><td>227</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.26	-----	-----	93.35	30.64	4.82	33.55	300	227
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2385.53	41.18	54.00	-12.82	39.34	30.62	4.79	33.57	300	227	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	95.26	-----	-----	93.35	30.64	4.82	33.55	300	227	AVERAGE																																																																															

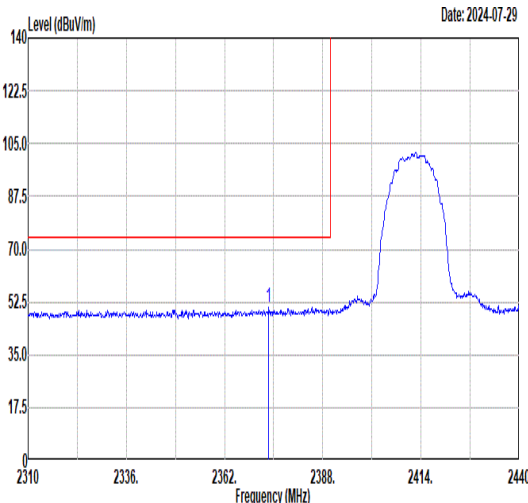
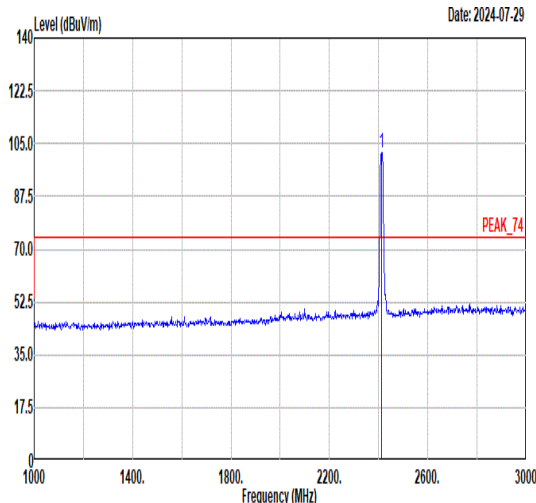
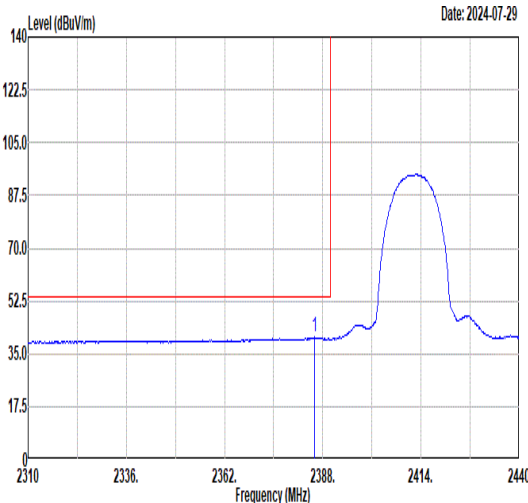
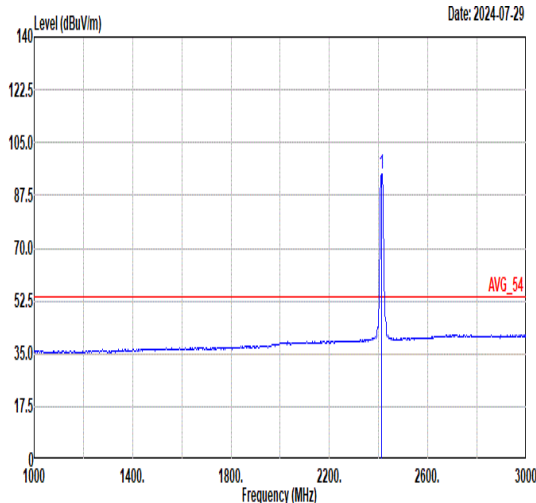


Mode	1																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11b_CH01_2412MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.70</td><td>50.53</td><td>74.00</td><td>-23.47</td><td>48.69</td><td>30.64</td><td>4.78</td><td>33.58</td><td>300</td><td>226</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2373.70	50.53	74.00	-23.47	48.69	30.64	4.78	33.58	300	226	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.89</td><td>-----</td><td>-----</td><td>99.98</td><td>30.64</td><td>4.82</td><td>33.55</td><td>300</td><td>226</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	101.89	-----	-----	99.98	30.64	4.82	33.55	300	226
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2373.70	50.53	74.00	-23.47	48.69	30.64	4.78	33.58	300	226	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	101.89	-----	-----	99.98	30.64	4.82	33.55	300	226	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.79</td><td>40.53</td><td>54.00</td><td>-13.47</td><td>38.69</td><td>30.62</td><td>4.79</td><td>33.57</td><td>300</td><td>226</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2385.79	40.53	54.00	-13.47	38.69	30.62	4.79	33.57	300	226	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>94.50</td><td>-----</td><td>-----</td><td>92.59</td><td>30.64</td><td>4.82</td><td>33.55</td><td>300</td><td>226</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	94.50	-----	-----	92.59	30.64	4.82	33.55	300	226
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2385.79	40.53	54.00	-13.47	38.69	30.62	4.79	33.57	300	226	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	94.50	-----	-----	92.59	30.64	4.82	33.55	300	226	AVERAGE																																																																																



Mode	1									
	Harmonic									
	2400-2483.5_802.11b_CH01_2412MHz									
ANT	SISO									
Pol.	Horizontal					Vertical				
Peak Avg	Data: 1 Level (dBuV/m)									

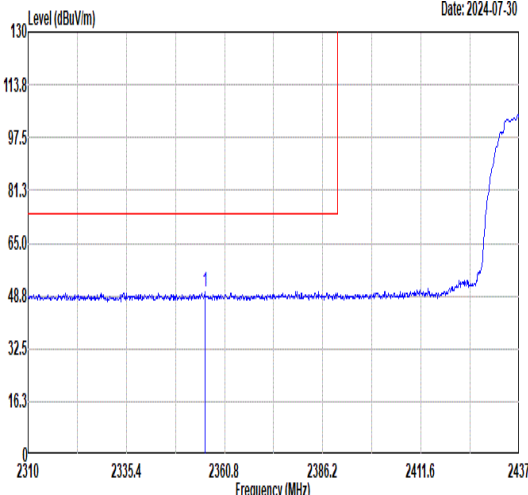
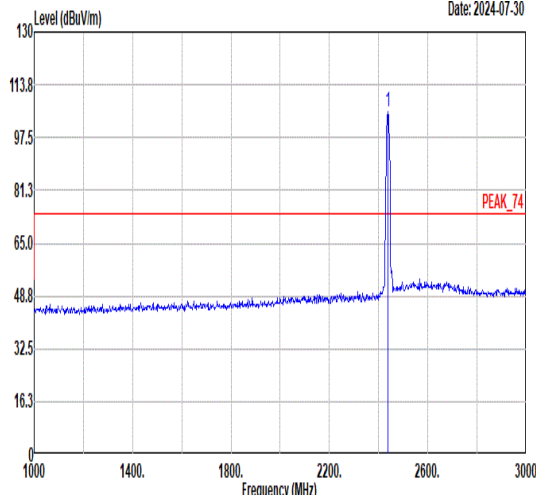
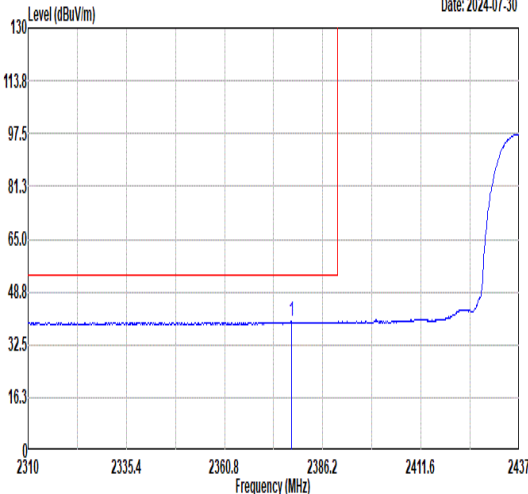
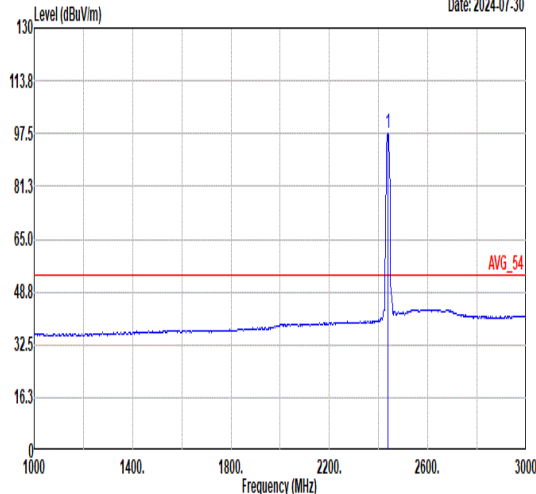


Mode	2																																																																																										
	Band Edge - L																																																																																										
	2400-2483.5_802.11b_CH06_2437MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2355.72</td><td>50.09</td><td>74.00</td><td>-23.91</td><td>48.24</td><td>30.68</td><td>4.76</td><td>33.59</td><td>274</td><td>303</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2355.72	50.09	74.00	-23.91	48.24	30.68	4.76	33.59	274	303	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>105.23</td><td>-----</td><td>-----</td><td>103.22</td><td>30.69</td><td>4.86</td><td>33.54</td><td>274</td><td>303</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	105.23	-----	-----	103.22	30.69	4.86	33.54	274	303
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2355.72	50.09	74.00	-23.91	48.24	30.68	4.76	33.59	274	303	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2437.00	105.23	-----	-----	103.22	30.69	4.86	33.54	274	303	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2378.07</td><td>39.56</td><td>54.00</td><td>-14.44</td><td>37.72</td><td>30.63</td><td>4.78</td><td>33.57</td><td>274</td><td>303</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2378.07	39.56	54.00	-14.44	37.72	30.63	4.78	33.57	274	303	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>97.49</td><td>-----</td><td>-----</td><td>95.48</td><td>30.69</td><td>4.86</td><td>33.54</td><td>274</td><td>303</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.49	-----	-----	95.48	30.69	4.86	33.54	274	303
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2378.07	39.56	54.00	-14.44	37.72	30.63	4.78	33.57	274	303	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2437.00	97.49	-----	-----	95.48	30.69	4.86	33.54	274	303	AVERAGE																																																																																



Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_802.11b_CH06_2437MHz																																									
ANT	SISO																																									
Pol.	Horizontal					Fundamental																																				
Peak	Level (dBuV/m) Date: 2024-07-30 PEAK_BE_74					Blank																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.03</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>50.50</td><td>30.90</td><td>4.94</td><td>33.50</td><td>274</td><td>303 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.03	52.84	74.00	-21.16
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	2496.03	52.84	74.00	-21.16	50.50	30.90	4.94	33.50	274	303 PEAK																																
Avg	Level (dBuV/m) Date: 2024-07-30 AVG_BE_54					Blank																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.13</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>40.19</td><td>30.89</td><td>4.93</td><td>33.51</td><td>274</td><td>303 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.13	42.50	54.00	-11.50
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	2493.13	42.50	54.00	-11.50	40.19	30.89	4.93	33.51	274	303 AVERAGE																																

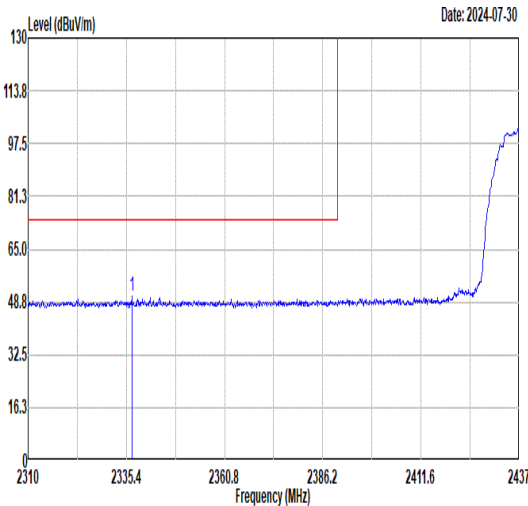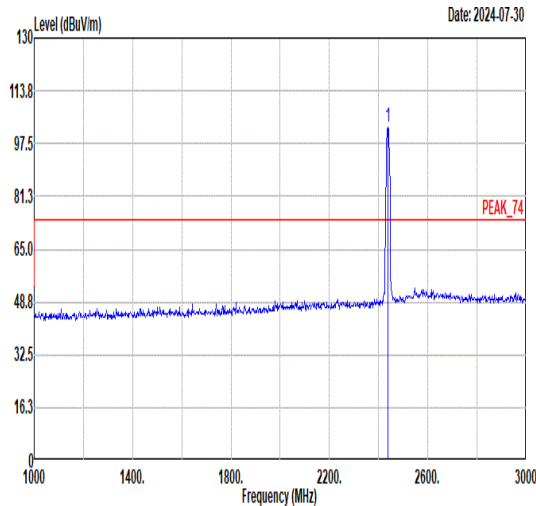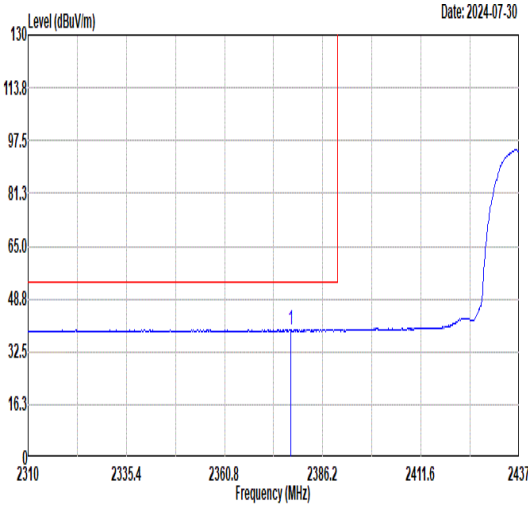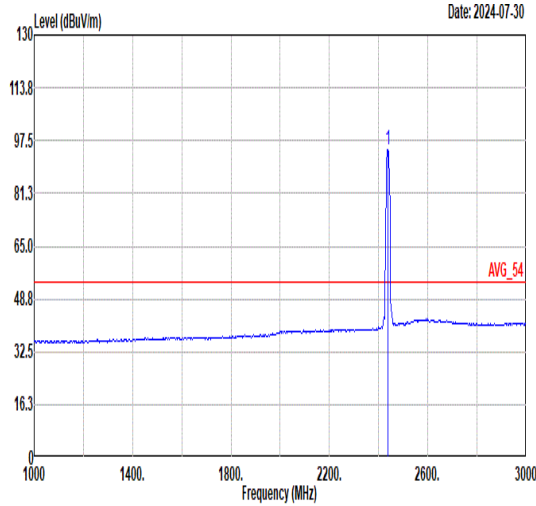

Mode	2																																																																																											
	Band Edge - L																																																																																											
	2400-2483.5_802.11b_CH06_2437MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	 Date: 2024-07-30 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2336.80</td><td>50.30</td><td>74.00</td><td>-23.70</td><td>48.45</td><td>30.71</td><td>4.74</td><td>33.60</td><td>400</td><td>286</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2336.80	50.30	74.00	-23.70	48.45	30.71	4.74	33.60	400	286	PEAK	 Date: 2024-07-30 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>102.46</td><td>-----</td><td>-----</td><td>100.45</td><td>30.69</td><td>4.86</td><td>33.54</td><td>400</td><td>286</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	102.46	-----	-----	100.45	30.69	4.86	33.54	400	286	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2336.80	50.30	74.00	-23.70	48.45	30.71	4.74	33.60	400	286	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2437.00	102.46	-----	-----	100.45	30.69	4.86	33.54	400	286	PEAK																																																																																	
Avg	 Date: 2024-07-30 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2377.82</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>37.64</td><td>30.63</td><td>4.78</td><td>33.57</td><td>400</td><td>286</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2377.82	39.48	54.00	-14.52	37.64	30.63	4.78	33.57	400	286	AVERAGE	 Date: 2024-07-30 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>94.72</td><td>-----</td><td>-----</td><td>92.71</td><td>30.69</td><td>4.86</td><td>33.54</td><td>400</td><td>286</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	94.72	-----	-----	92.71	30.69	4.86	33.54	400	286	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2377.82	39.48	54.00	-14.52	37.64	30.63	4.78	33.57	400	286	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2437.00	94.72	-----	-----	92.71	30.69	4.86	33.54	400	286	AVERAGE																																																																																	







Mode	2																																																			
	Band Edge - R																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																			
ANT	SISO																																																			
Pol.	Vertical						Fundamental																																													
Peak	Level (dBuV/m) Date: 2024-07-30 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.17</td><td>52.71</td><td>74.00</td><td>-21.29</td><td>50.41</td><td>30.88</td><td>4.93</td><td>33.51</td><td>400</td><td>286</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2490.17	52.71	74.00	-21.29	50.41	30.88	4.93	33.51	400	286	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	2490.17	52.71	74.00	-21.29	50.41	30.88	4.93	33.51	400	286	PEAK																																									
Avg	Level (dBuV/m) Date: 2024-07-30 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.62</td><td>41.19</td><td>54.00</td><td>-12.81</td><td>38.89</td><td>30.88</td><td>4.93</td><td>33.51</td><td>400</td><td>286</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2491.62	41.19	54.00	-12.81	38.89	30.88	4.93	33.51	400	286	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	2491.62	41.19	54.00	-12.81	38.89	30.88	4.93	33.51	400	286	AVERAGE																																									



Mode	2																																																																																																																																								
	Harmonic																																																																																																																																								
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																								
ANT	SISO																																																																																																																																								
Pol.	Horizontal					Vertical																																																																																																																																			
Peak Avg	Data: 1 Level (dBuV/m) Date: 2024-08-05 <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3255.00</td><td>54.85</td><td></td><td></td><td>74.04</td><td>32.26</td><td>5.75</td><td>57.20</td><td>100</td><td>235 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>57.23</td><td>-16.77</td><td>74.00</td><td>72.66</td><td>34.33</td><td>7.76</td><td>57.52</td><td>305</td><td>358 Peak</td></tr><tr><td>3</td><td>4874.00</td><td>49.91</td><td>-4.09</td><td>54.00</td><td>65.34</td><td>34.33</td><td>7.76</td><td>57.52</td><td>305</td><td>358 Average</td></tr><tr><td>4</td><td>7311.00</td><td>43.69</td><td>-30.31</td><td>74.00</td><td>58.22</td><td>35.44</td><td>8.95</td><td>58.92</td><td>---</td><td>---</td></tr></table> Data: 2 Level (dBuV/m) Date: 2024-08-05 <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3255.00</td><td>51.17</td><td></td><td></td><td>70.36</td><td>32.26</td><td>5.75</td><td>57.20</td><td>125</td><td>231 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>54.84</td><td>-19.16</td><td>74.00</td><td>70.27</td><td>34.33</td><td>7.76</td><td>57.52</td><td>123</td><td>254 Peak</td></tr><tr><td>3</td><td>4874.00</td><td>46.93</td><td>-7.07</td><td>54.00</td><td>62.36</td><td>34.33</td><td>7.76</td><td>57.52</td><td>123</td><td>254 Average</td></tr><tr><td>4</td><td>7311.00</td><td>45.62</td><td>-28.38</td><td>74.00</td><td>60.15</td><td>35.44</td><td>8.95</td><td>58.92</td><td>---</td><td>---</td></tr></table>					Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	3255.00	54.85			74.04	32.26	5.75	57.20	100	235 Peak	2	4874.00	57.23	-16.77	74.00	72.66	34.33	7.76	57.52	305	358 Peak	3	4874.00	49.91	-4.09	54.00	65.34	34.33	7.76	57.52	305	358 Average	4	7311.00	43.69	-30.31	74.00	58.22	35.44	8.95	58.92	---	---	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	3255.00	51.17			70.36	32.26	5.75	57.20	125	231 Peak	2	4874.00	54.84	-19.16	74.00	70.27	34.33	7.76	57.52	123	254 Peak	3	4874.00	46.93	-7.07	54.00	62.36	34.33	7.76	57.52	123	254 Average	4	7311.00	45.62	-28.38	74.00	60.15	35.44	8.95	58.92	---	---
	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																														
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	3255.00	54.85			74.04	32.26	5.75	57.20	100	235 Peak																																																																																																																															
2	4874.00	57.23	-16.77	74.00	72.66	34.33	7.76	57.52	305	358 Peak																																																																																																																															
3	4874.00	49.91	-4.09	54.00	65.34	34.33	7.76	57.52	305	358 Average																																																																																																																															
4	7311.00	43.69	-30.31	74.00	58.22	35.44	8.95	58.92	---	---																																																																																																																															
Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	3255.00	51.17			70.36	32.26	5.75	57.20	125	231 Peak																																																																																																																															
2	4874.00	54.84	-19.16	74.00	70.27	34.33	7.76	57.52	123	254 Peak																																																																																																																															
3	4874.00	46.93	-7.07	54.00	62.36	34.33	7.76	57.52	123	254 Average																																																																																																																															
4	7311.00	45.62	-28.38	74.00	60.15	35.44	8.95	58.92	---	---																																																																																																																															

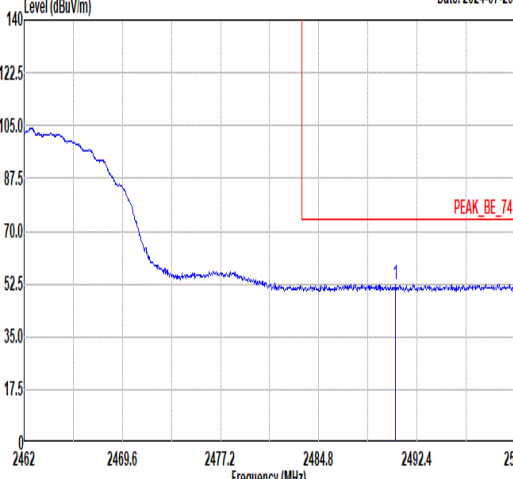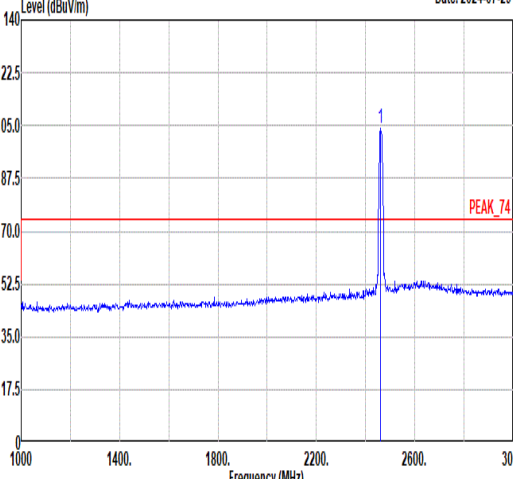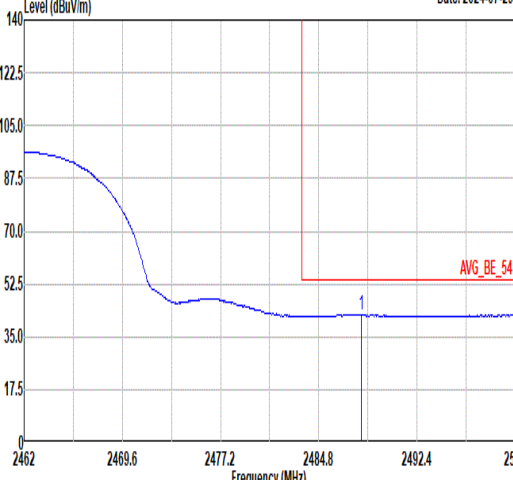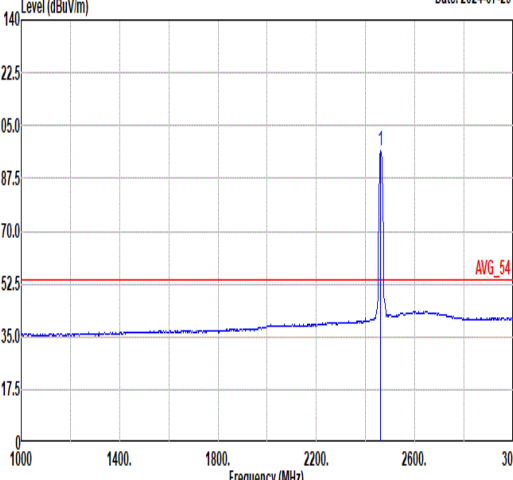

Mode	3																																																		
	Band Edge																																																		
	2400-2483.5_802.11b_CH11_2462MHz																																																		
ANT	SISO																																																		
Pol.	Horizontal																																																		
Peak	Level (dBuV/m) Date: 2024-07-29  PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2490.73</td><td>52.52</td><td>74.00</td><td>-21.48</td><td>50.22</td><td>30.88</td><td>4.93</td><td>33.51</td><td>100</td><td>203</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.73	52.52	74.00	-21.48	50.22	30.88	4.93	33.51	100	203	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	2490.73	52.52	74.00	-21.48	50.22	30.88	4.93	33.51	100	203	PEAK																																								
Fundamental	Level (dBuV/m) Date: 2024-07-29  PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>103.89</td><td>-----</td><td>-----</td><td>101.76</td><td>30.77</td><td>4.89</td><td>33.53</td><td>100</td><td>203</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.89	-----	-----	101.76	30.77	4.89	33.53	100	203	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	2462.00	103.89	-----	-----	101.76	30.77	4.89	33.53	100	203	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-07-29  AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2488.07</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>40.14</td><td>30.87</td><td>4.93</td><td>33.51</td><td>100</td><td>203</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.07	42.43	54.00	-11.57	40.14	30.87	4.93	33.51	100	203	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	2488.07	42.43	54.00	-11.57	40.14	30.87	4.93	33.51	100	203	AVERAGE																																								
Avg	Level (dBuV/m) Date: 2024-07-29  AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>96.54</td><td>-----</td><td>-----</td><td>94.41</td><td>30.77</td><td>4.89</td><td>33.53</td><td>100</td><td>203</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.54	-----	-----	94.41	30.77	4.89	33.53	100	203	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	2462.00	96.54	-----	-----	94.41	30.77	4.89	33.53	100	203	AVERAGE																																								







Mode	3										
	Band Edge										
	2400-2483.5_802.11b_CH11_2462MHz										
ANT	SISO										
Pol.	Vertical										
Peak											



Mode	3																																																																																																																																														
	Harmonic																																																																																																																																														
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																														
ANT	SISO																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2024-07-30 3000 6000 9000 12000 15000 18000 Frequency (MHz)						Level (dBuV/m) Date: 2024-07-30 3000 6000 9000 12000 15000 18000 Frequency (MHz)																																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>3285.00</td><td>54.53</td><td>-</td><td>-</td><td>73.64</td><td>32.30</td><td>5.78</td><td>57.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>57.57</td><td>74.00</td><td>-16.43</td><td>72.93</td><td>34.40</td><td>7.79</td><td>57.55</td><td>308</td><td>352</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>48.17</td><td>54.00</td><td>-5.83</td><td>63.53</td><td>34.40</td><td>7.79</td><td>57.55</td><td>308</td><td>352</td><td>Average</td></tr><tr><td>4</td><td>7386.00</td><td>44.22</td><td>74.00</td><td>-29.78</td><td>58.58</td><td>35.42</td><td>9.17</td><td>58.95</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	3285.00	54.53	-	-	73.64	32.30	5.78	57.19	--	--	Peak	2	4924.00	57.57	74.00	-16.43	72.93	34.40	7.79	57.55	308	352	Peak	3	4924.00	48.17	54.00	-5.83	63.53	34.40	7.79	57.55	308	352	Average	4	7386.00	44.22	74.00	-29.78	58.58	35.42	9.17	58.95	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>3285.00</td><td>50.44</td><td>-</td><td>-</td><td>69.55</td><td>32.30</td><td>5.78</td><td>57.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>69.33</td><td>34.40</td><td>7.79</td><td>57.55</td><td>100</td><td>325</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>47.00</td><td>54.00</td><td>-7.00</td><td>62.36</td><td>34.40</td><td>7.79</td><td>57.55</td><td>100</td><td>325</td><td>Average</td></tr><tr><td>4</td><td>7386.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>58.45</td><td>35.42</td><td>9.17</td><td>58.95</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	3285.00	50.44	-	-	69.55	32.30	5.78	57.19	--	--	Peak	2	4924.00	53.97	74.00	-20.03	69.33	34.40	7.79	57.55	100	325	Peak	3	4924.00	47.00	54.00	-7.00	62.36	34.40	7.79	57.55	100	325	Average	4	7386.00	44.09	74.00	-29.91	58.45	35.42	9.17	58.95	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																						
	1	3285.00	54.53	-	-	73.64	32.30	5.78	57.19	--	--	Peak																																																																																																																																			
2	4924.00	57.57	74.00	-16.43	72.93	34.40	7.79	57.55	308	352	Peak																																																																																																																																				
3	4924.00	48.17	54.00	-5.83	63.53	34.40	7.79	57.55	308	352	Average																																																																																																																																				
4	7386.00	44.22	74.00	-29.78	58.58	35.42	9.17	58.95	--	--	Peak																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																							
1	3285.00	50.44	-	-	69.55	32.30	5.78	57.19	--	--	Peak																																																																																																																																				
2	4924.00	53.97	74.00	-20.03	69.33	34.40	7.79	57.55	100	325	Peak																																																																																																																																				
3	4924.00	47.00	54.00	-7.00	62.36	34.40	7.79	57.55	100	325	Average																																																																																																																																				
4	7386.00	44.09	74.00	-29.91	58.45	35.42	9.17	58.95	--	--	Peak																																																																																																																																				

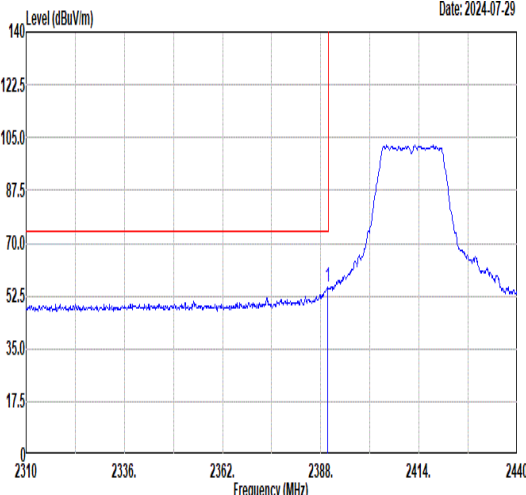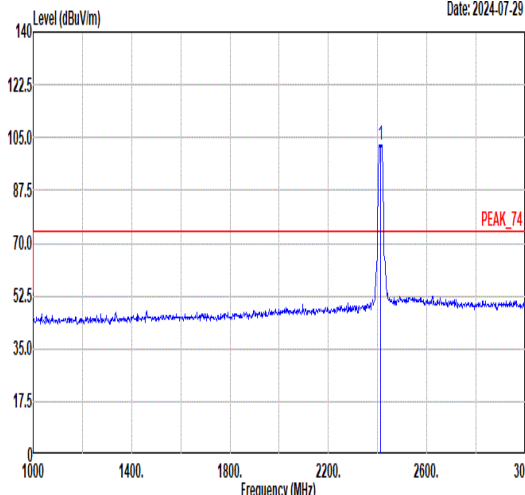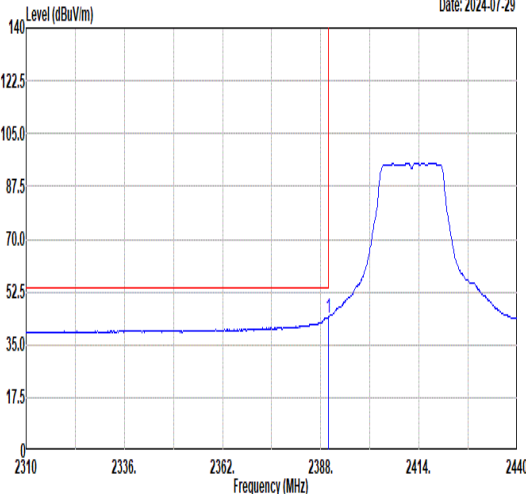
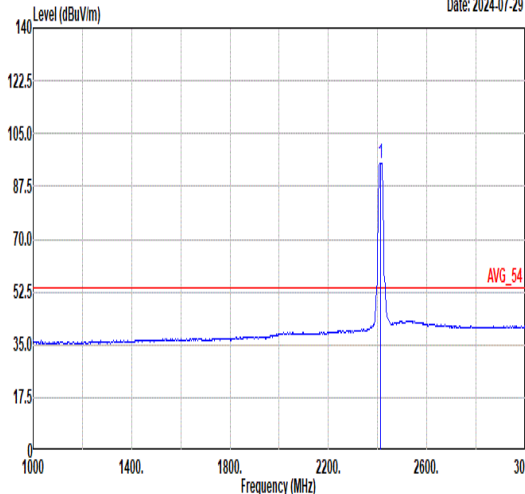


Mode	4																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>53.55</td><td>30.61</td><td>4.80</td><td>33.57</td><td>100</td><td>234</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.82	55.39	74.00	-18.61	53.55	30.61	4.80	33.57	100	234	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.51</td><td>-----</td><td>-----</td><td>100.58</td><td>30.65</td><td>4.83</td><td>33.55</td><td>100</td><td>234</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	102.51	-----	-----	100.58	30.65	4.83	33.55	100	234
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.82	55.39	74.00	-18.61	53.55	30.61	4.80	33.57	100	234	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	102.51	-----	-----	100.58	30.65	4.83	33.55	100	234	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.01</td><td>54.00</td><td>-9.99</td><td>42.17</td><td>30.61</td><td>4.80</td><td>33.57</td><td>100</td><td>234</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	44.01	54.00	-9.99	42.17	30.61	4.80	33.57	100	234	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.26</td><td>-----</td><td>-----</td><td>93.33</td><td>30.65</td><td>4.83</td><td>33.55</td><td>100</td><td>234</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	95.26	-----	-----	93.33	30.65	4.83	33.55	100	234
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.95	44.01	54.00	-9.99	42.17	30.61	4.80	33.57	100	234	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	95.26	-----	-----	93.33	30.65	4.83	33.55	100	234	AVERAGE																																																																																



Mode	4																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH01_2412MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-07-29 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>52.25</td><td>74.00</td><td>-21.75</td><td>50.41</td><td>30.61</td><td>4.80</td><td>33.57</td><td>288</td><td>226</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	52.25	74.00	-21.75	50.41	30.61	4.80	33.57	288	226	PEAK	Level (dBuV/m) Date: 2024-07-29 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.24</td><td>-----</td><td>-----</td><td>95.31</td><td>30.65</td><td>4.83</td><td>33.55</td><td>288</td><td>226</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	97.24	-----	-----	95.31	30.65	4.83	33.55	288	226	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2389.95	52.25	74.00	-21.75	50.41	30.61	4.80	33.57	288	226	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2412.00	97.24	-----	-----	95.31	30.65	4.83	33.55	288	226	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-07-29 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>41.70</td><td>54.00</td><td>-12.30</td><td>39.87</td><td>30.61</td><td>4.79</td><td>33.57</td><td>288</td><td>226</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.17	41.70	54.00	-12.30	39.87	30.61	4.79	33.57	288	226	AVERAGE	Level (dBuV/m) Date: 2024-07-29 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>89.76</td><td>-----</td><td>-----</td><td>87.83</td><td>30.65</td><td>4.83</td><td>33.55</td><td>288</td><td>226</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	89.76	-----	-----	87.83	30.65	4.83	33.55	288	226	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2389.17	41.70	54.00	-12.30	39.87	30.61	4.79	33.57	288	226	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2412.00	89.76	-----	-----	87.83	30.65	4.83	33.55	288	226	AVERAGE																																																																																	

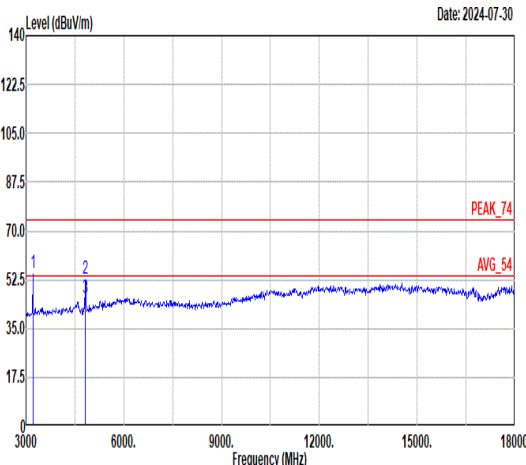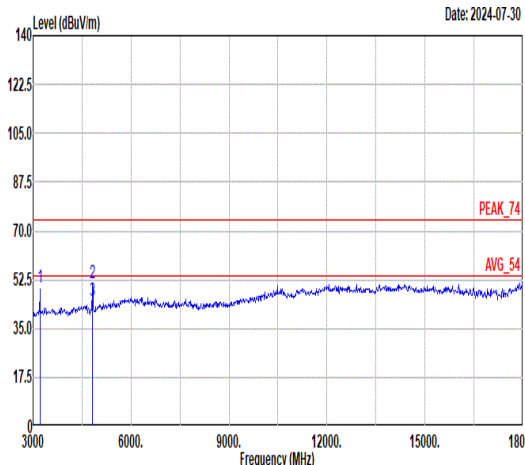

Mode	4																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																			
ANT	SISO																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																													
Peak Avg																																																																																																																																				
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>3210.00</td><td>54.69</td><td>-----</td><td>-----</td><td>74.06</td><td>32.19</td><td>5.66</td><td>57.22</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>52.76</td><td>74.00</td><td>-21.24</td><td>68.23</td><td>34.26</td><td>7.75</td><td>57.48</td><td>358</td><td>333</td><td>Peak</td></tr><tr><td>3</td><td>4824.00</td><td>46.05</td><td>54.00</td><td>-7.95</td><td>61.52</td><td>34.26</td><td>7.75</td><td>57.48</td><td>358</td><td>333</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	3210.00	54.69	-----	-----	74.06	32.19	5.66	57.22	--	--	Peak	2	4824.00	52.76	74.00	-21.24	68.23	34.26	7.75	57.48	358	333	Peak	3	4824.00	46.05	54.00	-7.95	61.52	34.26	7.75	57.48	358	333	Average	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>3210.00</td><td>49.89</td><td>-----</td><td>-----</td><td>69.26</td><td>32.19</td><td>5.66</td><td>57.22</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>51.06</td><td>74.00</td><td>-22.94</td><td>66.53</td><td>34.26</td><td>7.75</td><td>57.48</td><td>253</td><td>360</td><td>Peak</td></tr><tr><td>3</td><td>4824.00</td><td>45.08</td><td>54.00</td><td>-8.92</td><td>60.55</td><td>34.26</td><td>7.75</td><td>57.48</td><td>253</td><td>360</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	3210.00	49.89	-----	-----	69.26	32.19	5.66	57.22	--	--	Peak	2	4824.00	51.06	74.00	-22.94	66.53	34.26	7.75	57.48	253	360	Peak	3	4824.00	45.08	54.00	-8.92	60.55	34.26	7.75	57.48	253	360	Average
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																								
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	3210.00	54.69	-----	-----	74.06	32.19	5.66	57.22	--	--	Peak																																																																																																																									
2	4824.00	52.76	74.00	-21.24	68.23	34.26	7.75	57.48	358	333	Peak																																																																																																																									
3	4824.00	46.05	54.00	-7.95	61.52	34.26	7.75	57.48	358	333	Average																																																																																																																									
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	3210.00	49.89	-----	-----	69.26	32.19	5.66	57.22	--	--	Peak																																																																																																																									
2	4824.00	51.06	74.00	-22.94	66.53	34.26	7.75	57.48	253	360	Peak																																																																																																																									
3	4824.00	45.08	54.00	-8.92	60.55	34.26	7.75	57.48	253	360	Average																																																																																																																									







Mode	5																																																																																											
	Band Edge - L																																																																																											
	2400-2483.5_802.11g_CH06_2437MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.23</td><td>50.63</td><td>74.00</td><td>-23.37</td><td>48.80</td><td>30.61</td><td>4.79</td><td>33.57</td><td>400</td><td>316</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2388.23	50.63	74.00	-23.37	48.80	30.61	4.79	33.57	400	316	PEAK	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>99.01</td><td>-----</td><td>-----</td><td>97.00</td><td>30.69</td><td>4.86</td><td>33.54</td><td>400</td><td>316</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	99.01	-----	-----	97.00	30.69	4.86	33.54	400	316	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2388.23	50.63	74.00	-23.37	48.80	30.61	4.79	33.57	400	316	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2437.00	99.01	-----	-----	97.00	30.69	4.86	33.54	400	316	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2358.64</td><td>39.88</td><td>54.00</td><td>-14.12</td><td>38.04</td><td>30.67</td><td>4.76</td><td>33.59</td><td>400</td><td>316</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2358.64	39.88	54.00	-14.12	38.04	30.67	4.76	33.59	400	316	AVERAGE	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>91.72</td><td>-----</td><td>-----</td><td>89.73</td><td>30.68</td><td>4.85</td><td>33.54</td><td>400</td><td>316</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	91.72	-----	-----	89.73	30.68	4.85	33.54	400	316	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2358.64	39.88	54.00	-14.12	38.04	30.67	4.76	33.59	400	316	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2437.00	91.72	-----	-----	89.73	30.68	4.85	33.54	400	316	AVERAGE																																																																																	



Mode	5																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11g_CH06_2437MHz																																																		
ANT	SISO																																																		
Pol.	Horizontal							Fundamental																																											
Peak	Level (dBuV/m) Date: 2024-07-30 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.75</td><td>52.68</td><td>74.00</td><td>-21.32</td><td>50.38</td><td>30.88</td><td>4.93</td><td>33.51</td><td>400</td><td>316</td><td>PEAK</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2491.75	52.68	74.00	-21.32	50.38	30.88	4.93	33.51	400	316	PEAK	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2491.75	52.68	74.00	-21.32	50.38	30.88	4.93	33.51	400	316	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-07-30 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.12</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>39.51</td><td>30.85</td><td>4.92</td><td>33.51</td><td>400</td><td>316</td><td>AVERAGE</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.12	41.77	54.00	-12.23	39.51	30.85	4.92	33.51	400	316	AVERAGE	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2484.12	41.77	54.00	-12.23	39.51	30.85	4.92	33.51	400	316	AVERAGE																																								

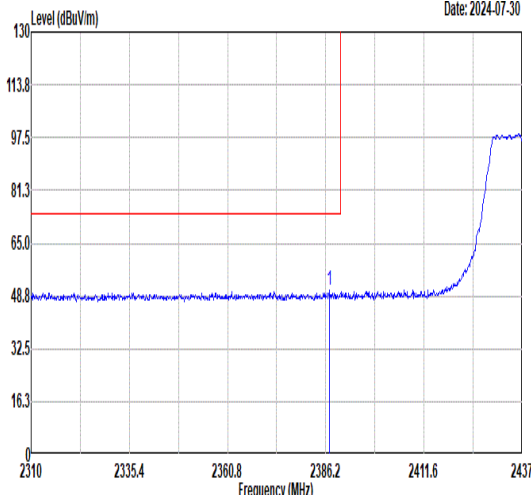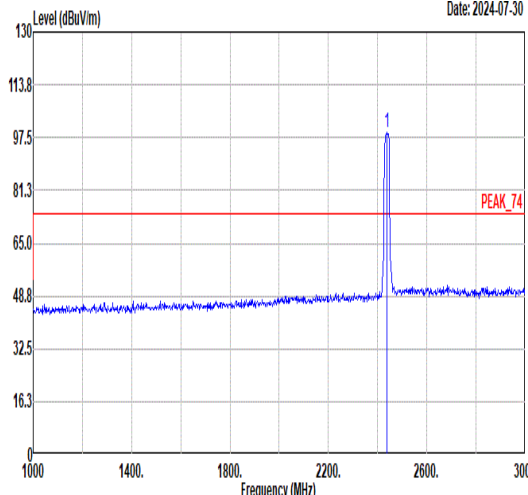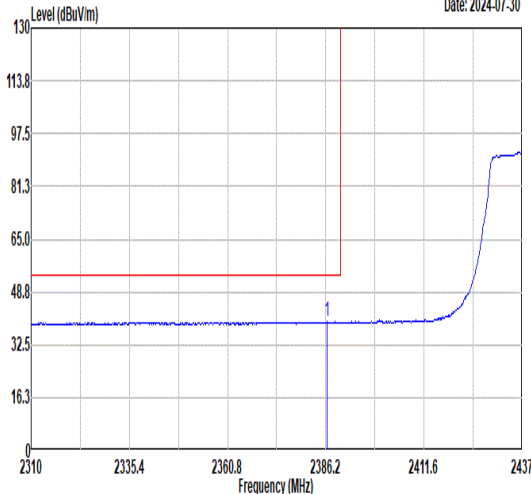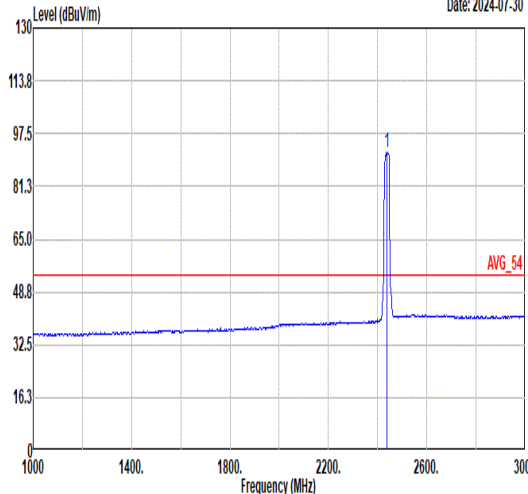

Mode	5																																																																																										
	Band Edge - L																																																																																										
	2400-2483.5_802.11g_CH06_2437MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.09</td><td>50.51</td><td>74.00</td><td>-23.49</td><td>48.68</td><td>30.61</td><td>4.79</td><td>33.57</td><td>308</td><td>279</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2387.09	50.51	74.00	-23.49	48.68	30.61	4.79	33.57	308	279	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>99.15</td><td>-----</td><td>-----</td><td>97.14</td><td>30.69</td><td>4.86</td><td>33.54</td><td>308</td><td>279</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	99.15	-----	-----	97.14	30.69	4.86	33.54	308	279
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2387.09	50.51	74.00	-23.49	48.68	30.61	4.79	33.57	308	279	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2437.00	99.15	-----	-----	97.14	30.69	4.86	33.54	308	279	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.45</td><td>39.51</td><td>54.00</td><td>-14.49</td><td>37.68</td><td>30.61</td><td>4.79</td><td>33.57</td><td>308</td><td>279</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2386.45	39.51	54.00	-14.49	37.68	30.61	4.79	33.57	308	279	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>91.64</td><td>-----</td><td>-----</td><td>89.65</td><td>30.68</td><td>4.85</td><td>33.54</td><td>308</td><td>279</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	91.64	-----	-----	89.65	30.68	4.85	33.54	308	279
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2386.45	39.51	54.00	-14.49	37.68	30.61	4.79	33.57	308	279	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2437.00	91.64	-----	-----	89.65	30.68	4.85	33.54	308	279	AVERAGE																																																																																







Mode	5																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11g_CH06_2437MHz																																																		
ANT	SISO																																																		
Pol.	Vertical						Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.77</td><td>51.98</td><td>74.00</td><td>-22.02</td><td>49.71</td><td>30.86</td><td>4.92</td><td>33.51</td><td>308</td><td>279</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2486.77	51.98	74.00	-22.02	49.71	30.86	4.92	33.51	308	279	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2486.77	51.98	74.00	-22.02	49.71	30.86	4.92	33.51	308	279	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.98</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>38.91</td><td>30.88</td><td>4.93</td><td>33.51</td><td>308</td><td>279</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2489.98	41.21	54.00	-12.79	38.91	30.88	4.93	33.51	308	279	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2489.98	41.21	54.00	-12.79	38.91	30.88	4.93	33.51	308	279	AVERAGE																																								



Mode	5																																																																																																																																																																							
	Harmonic																																																																																																																																																																							
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																																							
ANT	SISO																																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																																	
Peak Avg																																																																																																																																																																								
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3255.00</td><td>54.37</td><td></td><td></td><td></td><td>73.58</td><td>32.25</td><td>5.74</td><td>57.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>54.11</td><td>74.00</td><td>-19.89</td><td></td><td>69.53</td><td>34.33</td><td>7.77</td><td>57.52</td><td>304</td><td>360</td><td>Peak</td></tr><tr><td>3</td><td>4874.00</td><td>45.93</td><td>54.00</td><td>-8.07</td><td></td><td>61.35</td><td>34.33</td><td>7.77</td><td>57.52</td><td>304</td><td>360</td><td>Average</td></tr><tr><td>4</td><td>7311.00</td><td>43.64</td><td>74.00</td><td>-30.36</td><td></td><td>58.19</td><td>35.44</td><td>8.93</td><td>58.92</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB		dB	cm	deg	1	3255.00	54.37				73.58	32.25	5.74	57.20	--	--	Peak	2	4874.00	54.11	74.00	-19.89		69.53	34.33	7.77	57.52	304	360	Peak	3	4874.00	45.93	54.00	-8.07		61.35	34.33	7.77	57.52	304	360	Average	4	7311.00	43.64	74.00	-30.36		58.19	35.44	8.93	58.92	--	--	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3255.00</td><td>51.05</td><td></td><td></td><td></td><td>70.26</td><td>32.25</td><td>5.74</td><td>57.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td></td><td>67.58</td><td>34.33</td><td>7.77</td><td>57.52</td><td>100</td><td>352</td><td>Peak</td></tr><tr><td>3</td><td>4874.00</td><td>43.81</td><td>54.00</td><td>-10.19</td><td></td><td>59.23</td><td>34.33</td><td>7.77</td><td>57.52</td><td>100</td><td>352</td><td>Average</td></tr><tr><td>4</td><td>7311.00</td><td>43.86</td><td>74.00</td><td>-30.14</td><td></td><td>58.41</td><td>35.44</td><td>8.93</td><td>58.92</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB		dB	cm	deg	1	3255.00	51.05				70.26	32.25	5.74	57.20	--	--	Peak	2	4874.00	52.16	74.00	-21.84		67.58	34.33	7.77	57.52	100	352	Peak	3	4874.00	43.81	54.00	-10.19		59.23	34.33	7.77	57.52	100	352	Average	4	7311.00	43.86	74.00	-30.14		58.41	35.44	8.93	58.92	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																											
		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB		dB	cm	deg																																																																																																																																																											
	1	3255.00	54.37				73.58	32.25	5.74	57.20	--	--	Peak																																																																																																																																																											
2	4874.00	54.11	74.00	-19.89		69.53	34.33	7.77	57.52	304	360	Peak																																																																																																																																																												
3	4874.00	45.93	54.00	-8.07		61.35	34.33	7.77	57.52	304	360	Average																																																																																																																																																												
4	7311.00	43.64	74.00	-30.36		58.19	35.44	8.93	58.92	--	--	Peak																																																																																																																																																												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB		dB	cm	deg																																																																																																																																																												
1	3255.00	51.05				70.26	32.25	5.74	57.20	--	--	Peak																																																																																																																																																												
2	4874.00	52.16	74.00	-21.84		67.58	34.33	7.77	57.52	100	352	Peak																																																																																																																																																												
3	4874.00	43.81	54.00	-10.19		59.23	34.33	7.77	57.52	100	352	Average																																																																																																																																																												
4	7311.00	43.86	74.00	-30.14		58.41	35.44	8.93	58.92	--	--	Peak																																																																																																																																																												

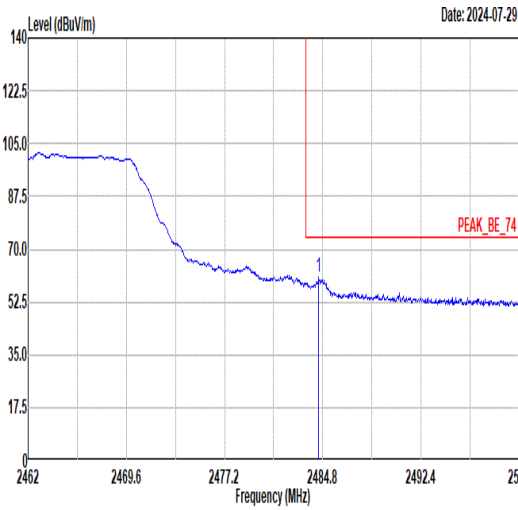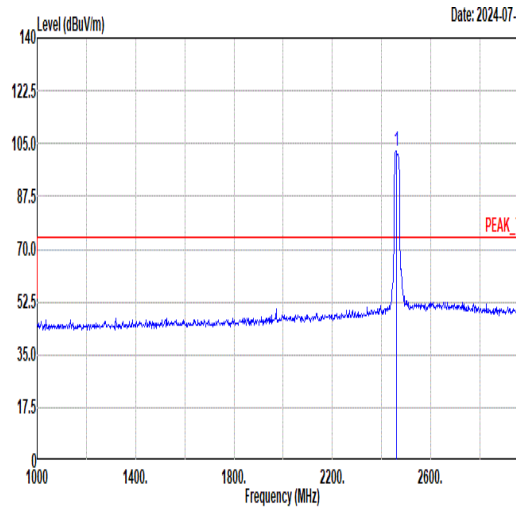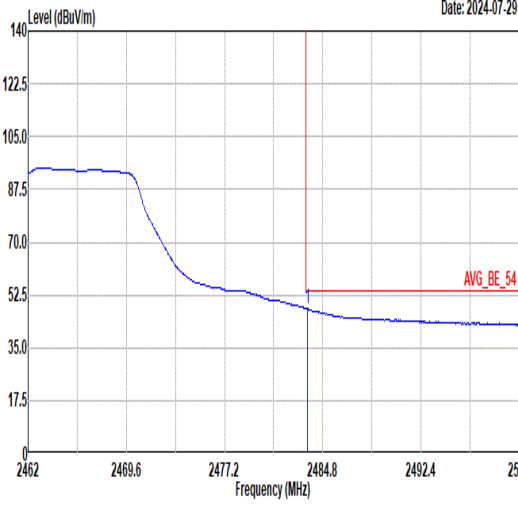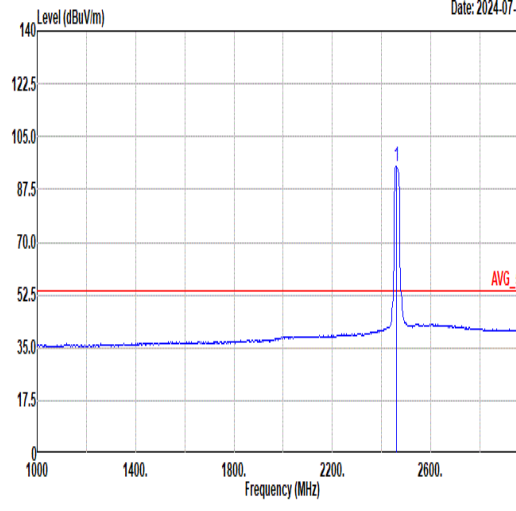

Mode	6																																																																																													
	Band Edge																																																																																													
	2400-2483.5_802.11g_CH11_2462MHz																																																																																													
ANT	SISO																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.50</td><td>60.50</td><td>74.00</td><td>-13.50</td><td>58.24</td><td>30.85</td><td>4.92</td><td>33.51</td><td>100</td><td>207</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.50	60.50	74.00	-13.50	58.24	30.85	4.92	33.51	100	207	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.53</td><td>-----</td><td>-----</td><td>100.44</td><td>30.74</td><td>4.88</td><td>33.53</td><td>100</td><td>207</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.53	-----	-----	100.44	30.74	4.88	33.53	100	207
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2484.50	60.50	74.00	-13.50	58.24	30.85	4.92	33.51	100	207	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2462.00	102.53	-----	-----	100.44	30.74	4.88	33.53	100	207	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>48.15</td><td>54.00</td><td>-5.85</td><td>45.89</td><td>30.85</td><td>4.92</td><td>33.51</td><td>100</td><td>207</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	48.15	54.00	-5.85	45.89	30.85	4.92	33.51	100	207	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>95.06</td><td>-----</td><td>-----</td><td>92.96</td><td>30.75</td><td>4.88</td><td>33.53</td><td>100</td><td>207</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.06	-----	-----	92.96	30.75	4.88	33.53	100	207
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2483.58	48.15	54.00	-5.85	45.89	30.85	4.92	33.51	100	207	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2462.00	95.06	-----	-----	92.96	30.75	4.88	33.53	100	207	AVERAGE																																																																																			



Mode	6																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-07-29 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.72</td><td>58.77</td><td>74.00</td><td>-15.23</td><td>56.50</td><td>30.86</td><td>4.92</td><td>33.51</td><td>309</td><td>199</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.72	58.77	74.00	-15.23	56.50	30.86	4.92	33.51	309	199	PEAK	Level (dBuV/m) Date: 2024-07-29 PEAK_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.05</td><td>-----</td><td>-----</td><td>96.88</td><td>30.79</td><td>4.90</td><td>33.52</td><td>309</td><td>199</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	99.05	-----	-----	96.88	30.79	4.90	33.52	309	199	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2484.72	58.77	74.00	-15.23	56.50	30.86	4.92	33.51	309	199	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	99.05	-----	-----	96.88	30.79	4.90	33.52	309	199	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-07-29 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>46.39</td><td>54.00</td><td>-7.61</td><td>44.13</td><td>30.85</td><td>4.92</td><td>33.51</td><td>309</td><td>199</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.51	46.39	54.00	-7.61	44.13	30.85	4.92	33.51	309	199	AVERAGE	Level (dBuV/m) Date: 2024-07-29 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.64</td><td>-----</td><td>-----</td><td>89.47</td><td>30.79</td><td>4.90</td><td>33.52</td><td>309</td><td>199</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	91.64	-----	-----	89.47	30.79	4.90	33.52	309	199	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.51	46.39	54.00	-7.61	44.13	30.85	4.92	33.51	309	199	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	91.64	-----	-----	89.47	30.79	4.90	33.52	309	199	AVERAGE																																																																																	



Mode	6																																																																																																																																																																																																								
	Harmonic																																																																																																																																																																																																								
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																																																								
ANT	SISO																																																																																																																																																																																																								
Pol.	Horizontal												Vertical																																																																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz)												Level (dBuV/m) Date: 2024-07-30 Frequency (MHz)																																																																																																																																																																																												
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th colspan="2">Freq</th><th colspan="2">Level</th><th colspan="2">Line</th><th colspan="2">Level</th><th colspan="2">Factor</th><th colspan="2">Loss Factor</th><th colspan="2"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>3285.00</td><td>54.57</td><td></td><td>73.68</td><td>32.30</td><td>5.78</td><td>57.19</td><td>--</td><td>--</td><td colspan="2">Peak</td></tr><tr><td>2</td><td>4924.00</td><td>49.95</td><td>74.00</td><td>-24.05</td><td>65.31</td><td>34.40</td><td>7.79</td><td>57.55</td><td>100</td><td>325</td><td colspan="2">Peak</td></tr><tr><td>3</td><td>4924.00</td><td>44.28</td><td>54.00</td><td>-9.72</td><td>59.64</td><td>34.40</td><td>7.79</td><td>57.55</td><td>100</td><td>325</td><td colspan="2">Average</td></tr><tr><td>4</td><td>7386.00</td><td>43.88</td><td>74.00</td><td>-30.12</td><td>58.24</td><td>35.42</td><td>9.17</td><td>58.95</td><td>--</td><td>--</td><td colspan="2">Peak</td></tr></table>														Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq		Level		Line		Level		Factor		Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	3285.00	54.57		73.68	32.30	5.78	57.19	--	--	Peak		2	4924.00	49.95	74.00	-24.05	65.31	34.40	7.79	57.55	100	325	Peak		3	4924.00	44.28	54.00	-9.72	59.64	34.40	7.79	57.55	100	325	Average		4	7386.00	43.88	74.00	-30.12	58.24	35.42	9.17	58.95	--	--	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th colspan="2">Freq</th><th colspan="2">Level</th><th colspan="2">Line</th><th colspan="2">Level</th><th colspan="2">Factor</th><th colspan="2">Loss Factor</th><th colspan="2"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>3285.00</td><td>50.49</td><td></td><td></td><td>9.60</td><td>32.30</td><td>5.78</td><td>57.19</td><td>--</td><td>--</td><td colspan="2">Peak</td></tr><tr><td>2</td><td>4924.00</td><td>51.77</td><td>74.00</td><td>-22.23</td><td>67.13</td><td>34.40</td><td>7.79</td><td>57.55</td><td>368</td><td>57</td><td colspan="2">Peak</td></tr><tr><td>3</td><td>4924.00</td><td>45.00</td><td>54.00</td><td>-9.00</td><td>60.36</td><td>34.40</td><td>7.79</td><td>57.55</td><td>368</td><td>57</td><td colspan="2">Average</td></tr><tr><td>4</td><td>7386.00</td><td>45.13</td><td>74.00</td><td>-28.87</td><td>59.49</td><td>35.42</td><td>9.17</td><td>58.95</td><td>--</td><td>--</td><td colspan="2">Peak</td></tr></table>						Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq		Level		Line		Level		Factor		Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	3285.00	50.49			9.60	32.30	5.78	57.19	--	--	Peak		2	4924.00	51.77	74.00	-22.23	67.13	34.40	7.79	57.55	368	57	Peak		3	4924.00	45.00	54.00	-9.00	60.36	34.40	7.79	57.55	368	57	Average		4	7386.00	45.13	74.00	-28.87	59.49	35.42	9.17	58.95	--	--	Peak	
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																										
	Freq		Level		Line		Level		Factor		Loss Factor																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																															
	1	3285.00	54.57		73.68	32.30	5.78	57.19	--	--	Peak																																																																																																																																																																																														
2	4924.00	49.95	74.00	-24.05	65.31	34.40	7.79	57.55	100	325	Peak																																																																																																																																																																																														
3	4924.00	44.28	54.00	-9.72	59.64	34.40	7.79	57.55	100	325	Average																																																																																																																																																																																														
4	7386.00	43.88	74.00	-30.12	58.24	35.42	9.17	58.95	--	--	Peak																																																																																																																																																																																														
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																											
Freq		Level		Line		Level		Factor		Loss Factor																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																
1	3285.00	50.49			9.60	32.30	5.78	57.19	--	--	Peak																																																																																																																																																																																														
2	4924.00	51.77	74.00	-22.23	67.13	34.40	7.79	57.55	368	57	Peak																																																																																																																																																																																														
3	4924.00	45.00	54.00	-9.00	60.36	34.40	7.79	57.55	368	57	Average																																																																																																																																																																																														
4	7386.00	45.13	74.00	-28.87	59.49	35.42	9.17	58.95	--	--	Peak																																																																																																																																																																																														





Mode	7																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																													
ANT	SISO																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2024-07-29 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.17</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>52.73</td><td>30.61</td><td>4.79</td><td>33.57</td><td>138</td><td>235 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.17	54.56	74.00	-19.44	52.73	30.61	4.79	33.57	138	235 PEAK	Level (dBuV/m) Date: 2024-07-29 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>100.28</td><td>-----</td><td>-----</td><td>98.36</td><td>30.64</td><td>4.83</td><td>33.55</td><td>138</td><td>235 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	100.28	-----	-----	98.36	30.64	4.83	33.55	138	235 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2389.17	54.56	74.00	-19.44	52.73	30.61	4.79	33.57	138	235 PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2412.00	100.28	-----	-----	98.36	30.64	4.83	33.55	138	235 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2024-07-29 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>43.58</td><td>54.00</td><td>-10.42</td><td>41.74</td><td>30.61</td><td>4.80</td><td>33.57</td><td>138</td><td>235 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	43.58	54.00	-10.42	41.74	30.61	4.80	33.57	138	235 AVERAGE	Level (dBuV/m) Date: 2024-07-29 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>92.73</td><td>-----</td><td>-----</td><td>90.80</td><td>30.65</td><td>4.83</td><td>33.55</td><td>138</td><td>235 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	92.73	-----	-----	90.80	30.65	4.83	33.55	138	235 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2389.95	43.58	54.00	-10.42	41.74	30.61	4.80	33.57	138	235 AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2412.00	92.73	-----	-----	90.80	30.65	4.83	33.55	138	235 AVERAGE																																																																					



Mode	7																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Date: 2024-07-29 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>50.37</td><td>30.61</td><td>4.80</td><td>33.57</td><td>286</td><td>222</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.43	52.21	74.00	-21.79	50.37	30.61	4.80	33.57	286	222	PEAK	Date: 2024-07-29 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.03</td><td>-----</td><td>-----</td><td>93.10</td><td>30.65</td><td>4.83</td><td>33.55</td><td>286</td><td>222</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	95.03	-----	-----	93.10	30.65	4.83	33.55	286	222	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	2389.43	52.21	74.00	-21.79	50.37	30.61	4.80	33.57	286	222	PEAK																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	2412.00	95.03	-----	-----	93.10	30.65	4.83	33.55	286	222	PEAK																																																																							
Avg	Date: 2024-07-29 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>39.42</td><td>30.61</td><td>4.80</td><td>33.57</td><td>286</td><td>222</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	41.26	54.00	-12.74	39.42	30.61	4.80	33.57	286	222	AVERAGE	Date: 2024-07-29 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>87.04</td><td>-----</td><td>-----</td><td>85.11</td><td>30.65</td><td>4.83</td><td>33.55</td><td>286</td><td>222</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	87.04	-----	-----	85.11	30.65	4.83	33.55	286	222	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	2389.95	41.26	54.00	-12.74	39.42	30.61	4.80	33.57	286	222	AVERAGE																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	2412.00	87.04	-----	-----	85.11	30.65	4.83	33.55	286	222	AVERAGE																																																																							

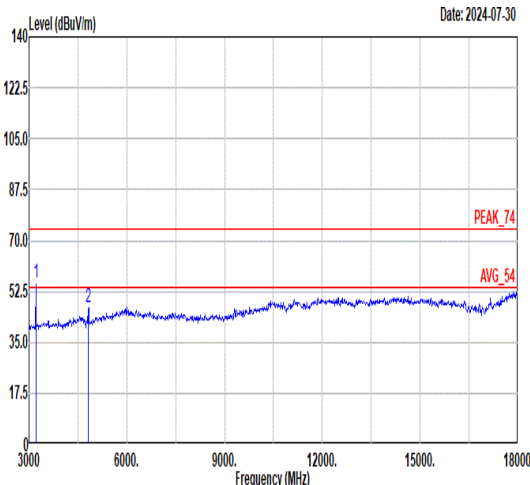
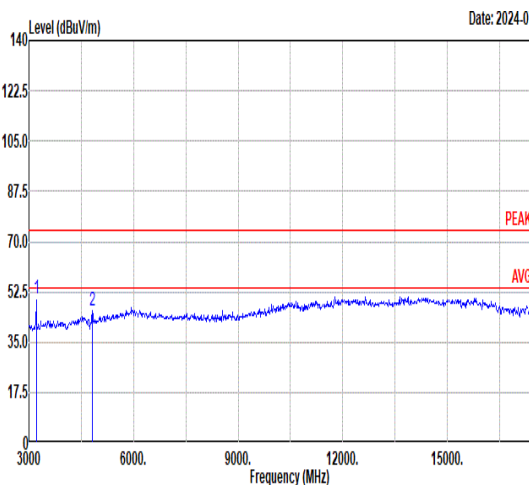


Mode	7																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																																	
ANT	SISO																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3210.00</td><td>55.28</td><td></td><td></td><td>74.65</td><td>32.19</td><td>5.66</td><td>57.22</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>46.82</td><td>74.00</td><td>-27.18</td><td>62.29</td><td>34.26</td><td>7.75</td><td>57.48</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	3210.00	55.28			74.65	32.19	5.66	57.22	--	--	Peak	2	4824.00	46.82	74.00	-27.18	62.29	34.26	7.75	57.48	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3210.00</td><td>50.19</td><td></td><td></td><td>69.56</td><td>32.19</td><td>5.66</td><td>57.22</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>45.79</td><td>74.00</td><td>-28.21</td><td>61.26</td><td>34.26</td><td>7.75</td><td>57.48</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	3210.00	50.19			69.56	32.19	5.66	57.22	--	--	Peak	2	4824.00	45.79	74.00	-28.21	61.26	34.26	7.75	57.48	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	3210.00	55.28			74.65	32.19	5.66	57.22	--	--	Peak																																																																																																																							
2	4824.00	46.82	74.00	-27.18	62.29	34.26	7.75	57.48	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	3210.00	50.19			69.56	32.19	5.66	57.22	--	--	Peak																																																																																																																							
2	4824.00	45.79	74.00	-28.21	61.26	34.26	7.75	57.48	--	--	Peak																																																																																																																							







Mode	8																																																																																				
	Band Edge - L																																																																																				
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																				
ANT	SISO																																																																																				
Pol.	Horizontal					Fundamental																																																																															
Peak	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz)					Level (dBuV/m) Date: 2024-07-30 Frequency (MHz)																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2372.48</td><td>50.76</td><td>74.00</td><td>-23.24</td><td>48.92</td><td>30.64</td><td>4.78</td><td>33.58</td><td>356</td><td>305 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2372.48	50.76	74.00	-23.24	48.92	30.64	4.78	33.58	356	305 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>100.41</td><td>-----</td><td>-----</td><td>98.40</td><td>30.69</td><td>4.86</td><td>33.54</td><td>356</td><td>305 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	100.41	-----	-----	98.40	30.69	4.86	33.54	356
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1 2372.48	50.76	74.00	-23.24	48.92	30.64	4.78	33.58	356	305 PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1 2437.00	100.41	-----	-----	98.40	30.69	4.86	33.54	356	305 PEAK																																																																												
Avg	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz)					Level (dBuV/m) Date: 2024-07-30 Frequency (MHz)																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2382.64</td><td>40.41</td><td>54.00</td><td>-13.59</td><td>38.57</td><td>30.62</td><td>4.79</td><td>33.57</td><td>356</td><td>305 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2382.64	40.41	54.00	-13.59	38.57	30.62	4.79	33.57	356	305 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>92.67</td><td>-----</td><td>-----</td><td>90.66</td><td>30.69</td><td>4.86</td><td>33.54</td><td>356</td><td>305 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	92.67	-----	-----	90.66	30.69	4.86	33.54	356
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1 2382.64	40.41	54.00	-13.59	38.57	30.62	4.79	33.57	356	305 AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1 2437.00	92.67	-----	-----	90.66	30.69	4.86	33.54	356	305 AVERAGE																																																																												

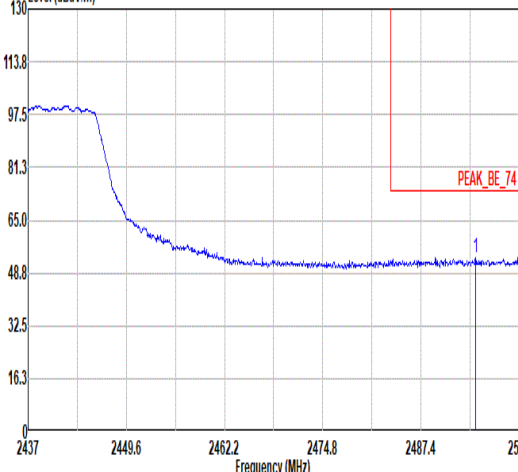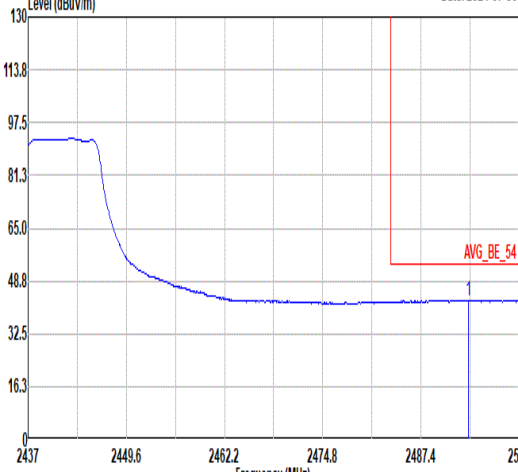

Mode	8																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																		
ANT	SISO																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-07-30 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.39</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>51.26</td><td>30.89</td><td>4.94</td><td>33.51</td><td>356</td><td>305</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2494.39	53.58	74.00	-20.42	51.26	30.89	4.94	33.51	356	305	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2494.39	53.58	74.00	-20.42	51.26	30.89	4.94	33.51	356	305	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-07-30 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.51</td><td>42.89</td><td>54.00</td><td>-11.11</td><td>40.58</td><td>30.89</td><td>4.93</td><td>33.51</td><td>356</td><td>305</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2493.51	42.89	54.00	-11.11	40.58	30.89	4.93	33.51	356	305	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2493.51	42.89	54.00	-11.11	40.58	30.89	4.93	33.51	356	305	AVERAGE																																								

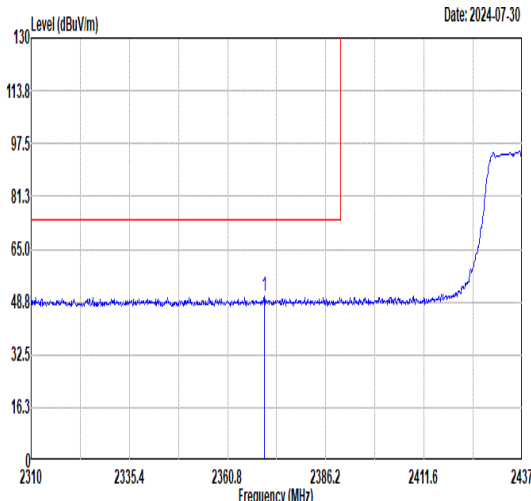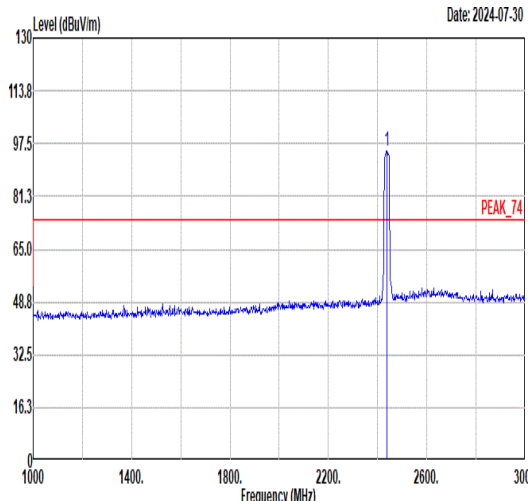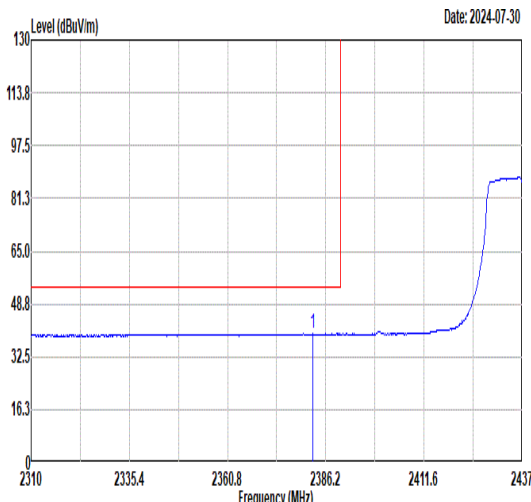
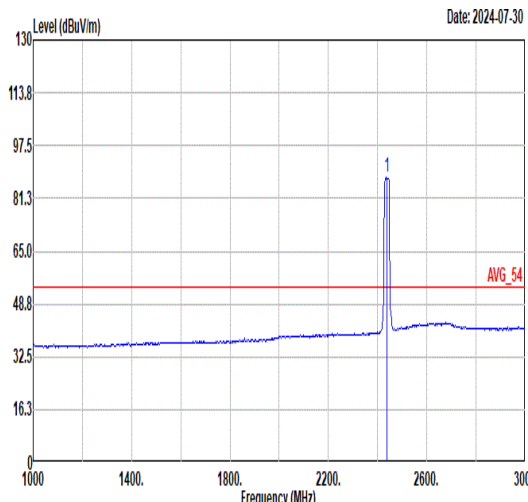


Mode	8																																																																																										
	Band Edge - L																																																																																										
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2370.33</td><td>50.39</td><td>74.00</td><td>-23.61</td><td>48.54</td><td>30.65</td><td>4.78</td><td>33.58</td><td>303</td><td>281</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2370.33	50.39	74.00	-23.61	48.54	30.65	4.78	33.58	303	281	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>95.27</td><td>-----</td><td>-----</td><td>93.26</td><td>30.69</td><td>4.86</td><td>33.54</td><td>303</td><td>281</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	95.27	-----	-----	93.26	30.69	4.86	33.54	303	281
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2370.33	50.39	74.00	-23.61	48.54	30.65	4.78	33.58	303	281	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2437.00	95.27	-----	-----	93.26	30.69	4.86	33.54	303	281	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.77</td><td>39.68</td><td>54.00</td><td>-14.32</td><td>37.84</td><td>30.62</td><td>4.79</td><td>33.57</td><td>303</td><td>281</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2382.77	39.68	54.00	-14.32	37.84	30.62	4.79	33.57	303	281	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>87.62</td><td>-----</td><td>-----</td><td>85.63</td><td>30.68</td><td>4.85</td><td>33.54</td><td>303</td><td>281</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	87.62	-----	-----	85.63	30.68	4.85	33.54	303	281
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2382.77	39.68	54.00	-14.32	37.84	30.62	4.79	33.57	303	281	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2437.00	87.62	-----	-----	85.63	30.68	4.85	33.54	303	281	AVERAGE																																																																																



Mode	8																																																			
	Band Edge - R																																																			
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																			
ANT	SISO																																																			
Pol.	Vertical						Fundamental																																													
Peak	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.75</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>49.75</td><td>30.88</td><td>4.93</td><td>33.51</td><td>303</td><td>281</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2491.75	52.05	74.00	-21.95	49.75	30.88	4.93	33.51	303	281	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	2491.75	52.05	74.00	-21.95	49.75	30.88	4.93	33.51	303	281	PEAK																																									
Avg	Level (dBuV/m) Date: 2024-07-30 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.46</td><td>41.13</td><td>54.00</td><td>-12.87</td><td>38.80</td><td>30.90</td><td>4.94</td><td>33.51</td><td>303</td><td>281</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2495.46	41.13	54.00	-12.87	38.80	30.90	4.94	33.51	303	281	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	2495.46	41.13	54.00	-12.87	38.80	30.90	4.94	33.51	303	281	AVERAGE																																									

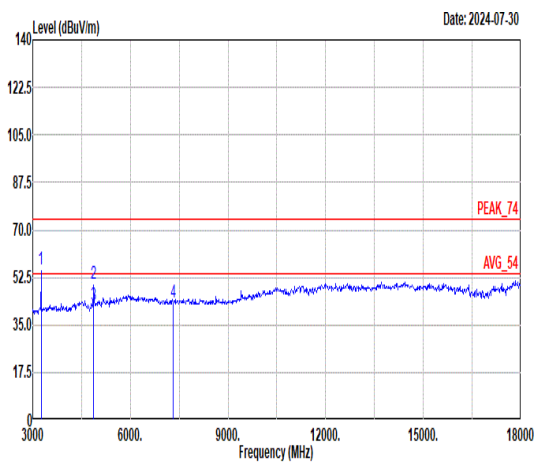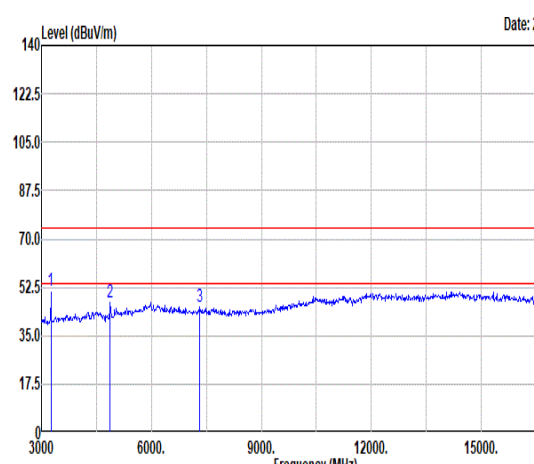

Mode		8																																																																																																																																									
		Harmonic																																																																																																																																									
		2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																									
ANT		SISO																																																																																																																																									
Pol.		Horizontal					Vertical																																																																																																																																				
Peak Avg																																																																																																																																											
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3255.00	55.58	74.79	32.25	5.74	57.20	--	--	Peak	2	4874.00	50.40	-23.60	65.82	34.33	7.77	57.52	324	360	Peak	3	4874.00	42.44	54.00	-11.56	57.86	34.33	7.77	57.52	324	360	Average	4	7311.00	43.58	74.00	-30.42	58.13	35.44	8.93	58.92	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>3255.00</td><td>51.46</td><td>70.67</td><td>32.25</td><td>5.74</td><td>57.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>62.37</td><td>34.33</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>45.30</td><td>74.00</td><td>-28.70</td><td>59.85</td><td>35.44</td><td>8.93</td><td>58.92</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3255.00	51.46	70.67	32.25	5.74	57.20	--	--	Peak	2	4874.00	46.95	74.00	-27.05	62.37	34.33	7.77	57.52	--	--	Peak	3	7311.00	45.30	74.00	-28.70	59.85	35.44	8.93	58.92	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	3255.00	55.58	74.79	32.25	5.74	57.20	--	--	Peak																																																																																																																																		
2	4874.00	50.40	-23.60	65.82	34.33	7.77	57.52	324	360	Peak																																																																																																																																	
3	4874.00	42.44	54.00	-11.56	57.86	34.33	7.77	57.52	324	360	Average																																																																																																																																
4	7311.00	43.58	74.00	-30.42	58.13	35.44	8.93	58.92	--	--	Peak																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	3255.00	51.46	70.67	32.25	5.74	57.20	--	--	Peak																																																																																																																																		
2	4874.00	46.95	74.00	-27.05	62.37	34.33	7.77	57.52	--	--	Peak																																																																																																																																
3	7311.00	45.30	74.00	-28.70	59.85	35.44	8.93	58.92	--	--	Peak																																																																																																																																



Mode	9																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																							
ANT	SISO																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																	
Peak	Level (dBuV/m) Date: 2024-07-29 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2484.15</td><td>58.25</td><td>74.00</td><td>-15.75</td><td>55.99</td><td>30.85</td><td>4.92</td><td>33.51</td><td>100</td><td>197</td><td>PEAK</td><td></td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	2484.15	58.25	74.00	-15.75	55.99	30.85	4.92	33.51	100	197	PEAK		Level (dBuV/m) Date: 2024-07-29 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2462.00</td><td>98.80</td><td>-----</td><td>-----</td><td>96.70</td><td>30.75</td><td>4.88</td><td>33.53</td><td>100</td><td>197</td><td>PEAK</td><td></td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	2462.00	98.80	-----	-----	96.70	30.75	4.88	33.53	100	197	PEAK	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2484.15	58.25	74.00	-15.75	55.99	30.85	4.92	33.51	100	197	PEAK																																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2462.00	98.80	-----	-----	96.70	30.75	4.88	33.53	100	197	PEAK																																																																																													
Avg	Level (dBuV/m) Date: 2024-07-29 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2483.85</td><td>47.55</td><td>54.00</td><td>-6.45</td><td>45.29</td><td>30.85</td><td>4.92</td><td>33.51</td><td>100</td><td>197</td><td>AVERAGE</td><td></td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	2483.85	47.55	54.00	-6.45	45.29	30.85	4.92	33.51	100	197	AVERAGE		Level (dBuV/m) Date: 2024-07-29 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2462.00</td><td>91.99</td><td>-----</td><td>-----</td><td>89.90</td><td>30.74</td><td>4.88</td><td>33.53</td><td>100</td><td>197</td><td>AVERAGE</td><td></td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	2462.00	91.99	-----	-----	89.90	30.74	4.88	33.53	100	197	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2483.85	47.55	54.00	-6.45	45.29	30.85	4.92	33.51	100	197	AVERAGE																																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2462.00	91.99	-----	-----	89.90	30.74	4.88	33.53	100	197	AVERAGE																																																																																													







Mode	9																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-07-29 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.42</td><td>54.14</td><td>74.00</td><td>-19.86</td><td>51.88</td><td>30.85</td><td>4.92</td><td>33.51</td><td>400</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.42	54.14	74.00	-19.86	51.88	30.85	4.92	33.51	400	360	PEAK	Level (dBuV/m) Date: 2024-07-29 PEAK_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.83</td><td>-----</td><td>-----</td><td>90.67</td><td>30.78</td><td>4.90</td><td>33.52</td><td>400</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	92.83	-----	-----	90.67	30.78	4.90	33.52	400	360	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2484.42	54.14	74.00	-19.86	51.88	30.85	4.92	33.51	400	360	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	92.83	-----	-----	90.67	30.78	4.90	33.52	400	360	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-07-29 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>40.14</td><td>30.85</td><td>4.92</td><td>33.51</td><td>400</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.58	42.40	54.00	-11.60	40.14	30.85	4.92	33.51	400	360	AVERAGE	Level (dBuV/m) Date: 2024-07-29 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>85.10</td><td>-----</td><td>-----</td><td>82.93</td><td>30.79</td><td>4.90</td><td>33.52</td><td>400</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	85.10	-----	-----	82.93	30.79	4.90	33.52	400	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.58	42.40	54.00	-11.60	40.14	30.85	4.92	33.51	400	360	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	85.10	-----	-----	82.93	30.79	4.90	33.52	400	360	AVERAGE																																																																																	



Mode	9																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-07-30 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3285.00</td><td>54.56</td><td></td><td>73.67</td><td>32.30</td><td>5.78</td><td>57.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>44.72</td><td>74.00</td><td>-29.28</td><td>60.08</td><td>34.40</td><td>7.79</td><td>57.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>43.53</td><td>74.00</td><td>-30.47</td><td>57.89</td><td>35.42</td><td>9.17</td><td>58.95</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	3285.00	54.56		73.67	32.30	5.78	57.19	--	--	--	Peak	2	4924.00	44.72	74.00	-29.28	60.08	34.40	7.79	57.55	--	--	Peak	3	7386.00	43.53	74.00	-30.47	57.89	35.42	9.17	58.95	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
	1	3285.00	54.56		73.67	32.30	5.78	57.19	--	--	--	Peak																																																																						
2	4924.00	44.72	74.00	-29.28	60.08	34.40	7.79	57.55	--	--	Peak																																																																							
3	7386.00	43.53	74.00	-30.47	57.89	35.42	9.17	58.95	--	--	Peak																																																																							
Level (dBuV/m) Date: 2024-07-30 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3285.00</td><td>51.84</td><td></td><td>70.95</td><td>32.30</td><td>5.78</td><td>57.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>46.07</td><td>74.00</td><td>-27.93</td><td>61.43</td><td>34.40</td><td>7.79</td><td>57.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>44.23</td><td>74.00</td><td>-29.77</td><td>58.59</td><td>35.42</td><td>9.17</td><td>58.95</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	3285.00	51.84		70.95	32.30	5.78	57.19	--	--	--	Peak	2	4924.00	46.07	74.00	-27.93	61.43	34.40	7.79	57.55	--	--	Peak	3	7386.00	44.23	74.00	-29.77	58.59	35.42	9.17	58.95	--	--	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	3285.00	51.84		70.95	32.30	5.78	57.19	--	--	--	Peak																																																																							
2	4924.00	46.07	74.00	-27.93	61.43	34.40	7.79	57.55	--	--	Peak																																																																							
3	7386.00	44.23	74.00	-29.77	58.59	35.42	9.17	58.95	--	--	Peak																																																																							

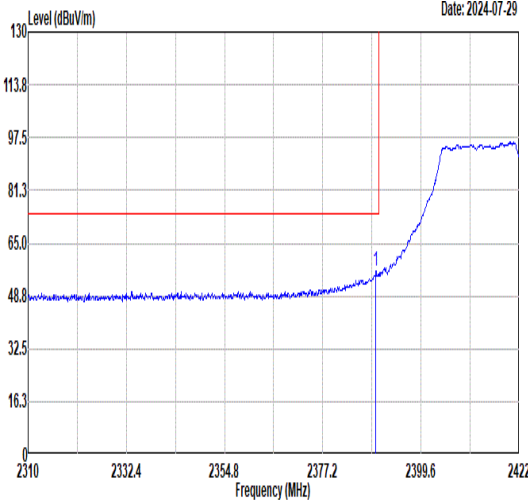
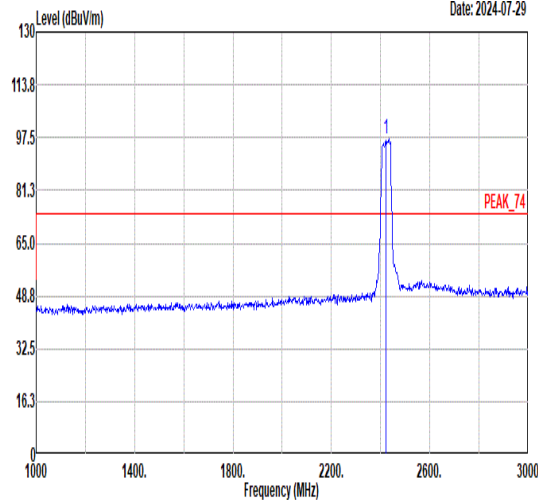
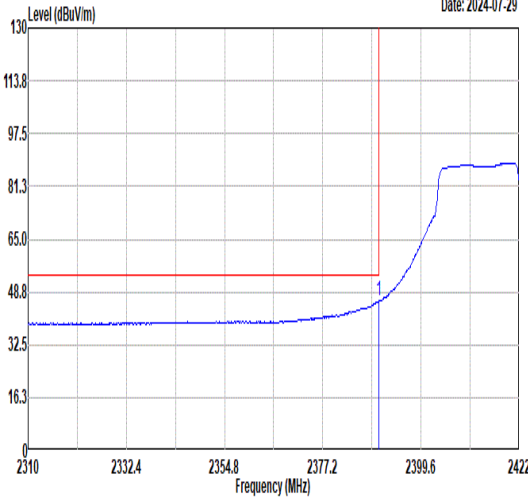
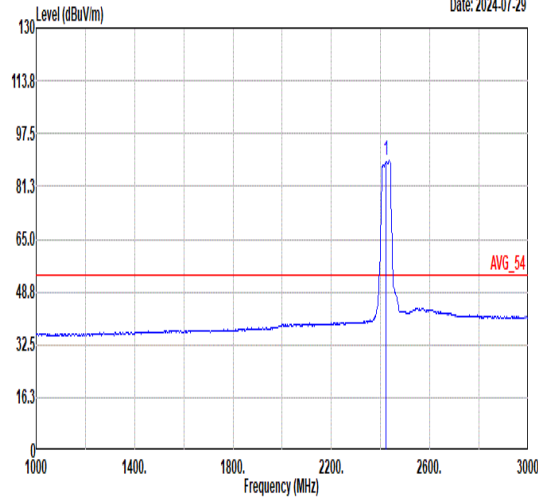


Mode	10																																																																																						
	Band Edge - L																																																																																						
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																						
ANT	SISO																																																																																						
Pol.	Horizontal					Fundamental																																																																																	
Peak																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>56.20</td><td>74.00</td><td>-17.80</td><td>54.37</td><td>30.61</td><td>4.79</td><td>33.57</td><td>193</td><td>195 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.30	56.20	74.00	-17.80	54.37	30.61	4.79	33.57	193	195 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>96.94</td><td>-----</td><td>-----</td><td>94.95</td><td>30.68</td><td>4.85</td><td>33.54</td><td>193</td><td>195 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2422.00	96.94	-----	-----	94.95	30.68	4.85	33.54	193
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	2389.30	56.20	74.00	-17.80	54.37	30.61	4.79	33.57	193	195 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	2422.00	96.94	-----	-----	94.95	30.68	4.85	33.54	193	195 PEAK																																																																													
Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.97</td><td>45.96</td><td>54.00</td><td>-8.04</td><td>44.12</td><td>30.61</td><td>4.80</td><td>33.57</td><td>193</td><td>195 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.97	45.96	54.00	-8.04	44.12	30.61	4.80	33.57	193	195 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>89.39</td><td>-----</td><td>-----</td><td>87.40</td><td>30.68</td><td>4.85</td><td>33.54</td><td>193</td><td>195 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2422.00	89.39	-----	-----	87.40	30.68	4.85	33.54	193
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	2389.97	45.96	54.00	-8.04	44.12	30.61	4.80	33.57	193	195 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	2422.00	89.39	-----	-----	87.40	30.68	4.85	33.54	193	195 AVERAGE																																																																													



Mode	10										
	Band Edge - R										
	2400-2483.5_802.11n HT40_CH03_2422MHz										
ANT	SISO										
Pol.	Horizontal							Fundamental			
Peak											

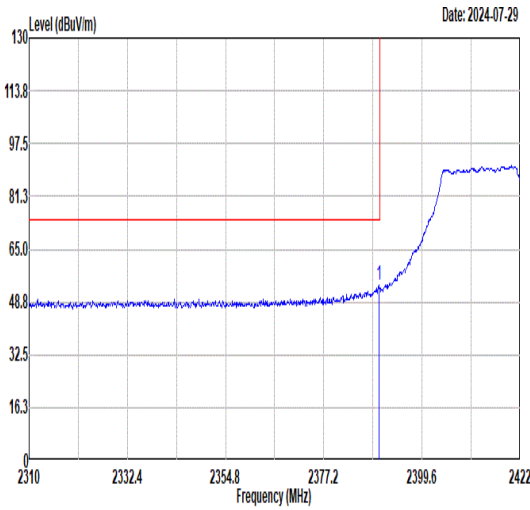
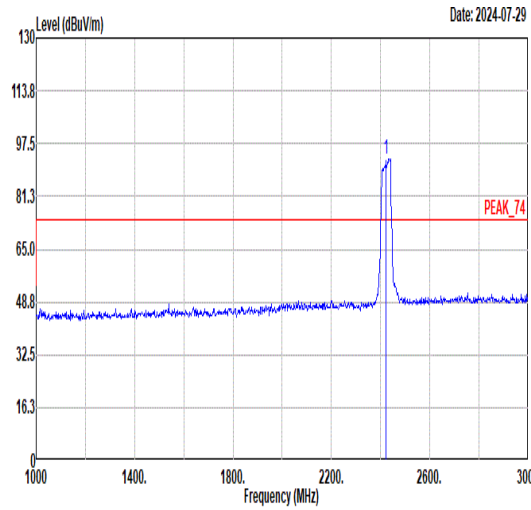
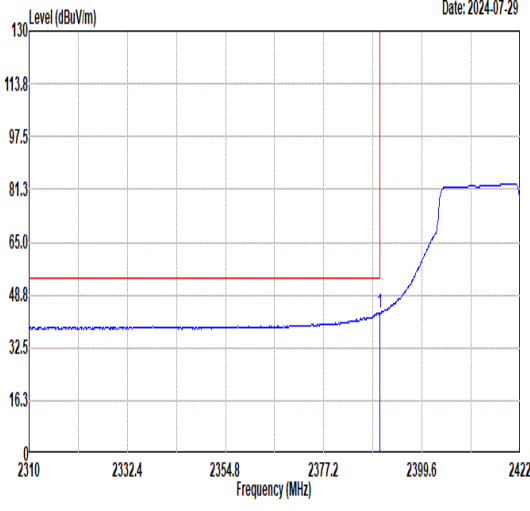
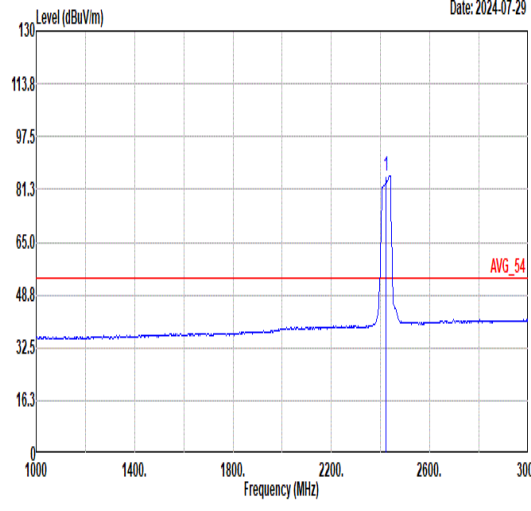


Mode	10																																																																																														
	Band Edge - L																																																																																														
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																														
ANT	SISO																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.74</td><td>53.80</td><td>74.00</td><td>-20.20</td><td>51.96</td><td>30.61</td><td>4.80</td><td>33.57</td><td>286</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.74	53.80	74.00	-20.20	51.96	30.61	4.80	33.57	286	225	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2422.00</td><td>92.95</td><td>-----</td><td>-----</td><td>90.96</td><td>30.68</td><td>4.85</td><td>33.54</td><td>286</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2422.00	92.95	-----	-----	90.96	30.68	4.85	33.54	286	225
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.74	53.80	74.00	-20.20	51.96	30.61	4.80	33.57	286	225	PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2422.00	92.95	-----	-----	90.96	30.68	4.85	33.54	286	225	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.97</td><td>43.31</td><td>54.00</td><td>-10.69</td><td>41.47</td><td>30.61</td><td>4.80</td><td>33.57</td><td>286</td><td>225</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.97	43.31	54.00	-10.69	41.47	30.61	4.80	33.57	286	225	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2422.00</td><td>85.52</td><td>-----</td><td>-----</td><td>83.53</td><td>30.68</td><td>4.85</td><td>33.54</td><td>286</td><td>225</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2422.00	85.52	-----	-----	83.53	30.68	4.85	33.54	286	225
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.97	43.31	54.00	-10.69	41.47	30.61	4.80	33.57	286	225	AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2422.00	85.52	-----	-----	83.53	30.68	4.85	33.54	286	225	AVERAGE																																																																																				



Mode	10									
	Band Edge - R									
	2400-2483.5_802.11n HT40_CH03_2422MHz									
ANT	SISO									
Pol.	Vertical					Fundamental				
Peak										

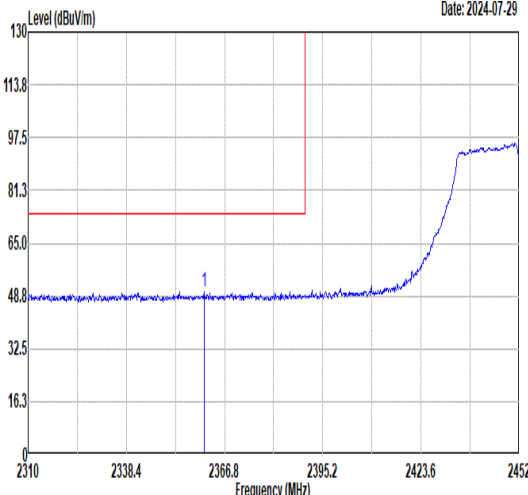
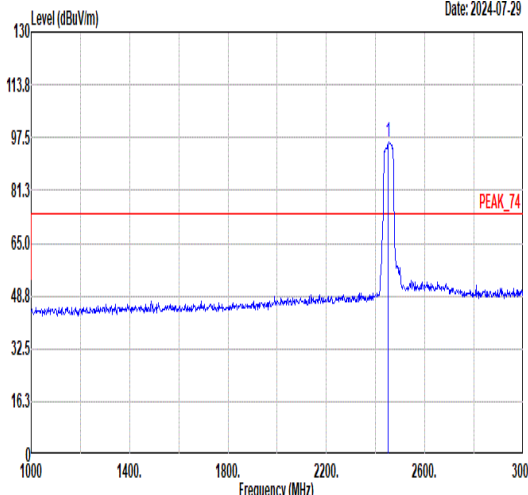
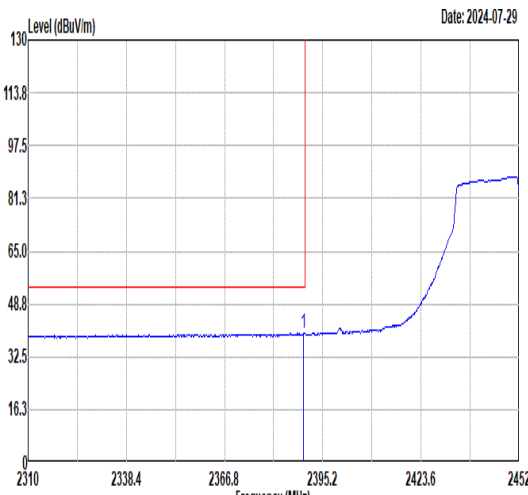
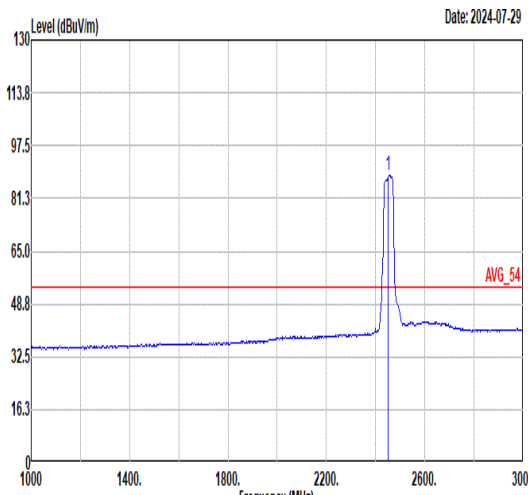


Mode	11																																																																																										
	Band Edge - L																																																																																										
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal										Fundamental																																																																																
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2310 to 2452 MHz. A red horizontal line is at 74.00 dB. A blue trace shows a peak at 2368.84 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2368.84</td><td>50.03</td><td>74.00</td><td>-23.97</td><td>48.17</td><td>30.67</td><td>4.77</td><td>33.58</td><td>100</td><td>199</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2368.84	50.03	74.00	-23.97	48.17	30.67	4.77	33.58	100	199	PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is at 74.00 dB. A blue trace shows a peak at 2452.00 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>95.91</td><td>-----</td><td>-----</td><td>93.82</td><td>30.74</td><td>4.88</td><td>33.53</td><td>100</td><td>199</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	95.91	-----	-----	93.82	30.74	4.88	33.53	100	199	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2368.84	50.03	74.00	-23.97	48.17	30.67	4.77	33.58	100	199	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2452.00	95.91	-----	-----	93.82	30.74	4.88	33.53	100	199	PEAK																																																																																
Avg	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2310 to 2452 MHz. A red horizontal line is at 54.00 dB. A blue trace shows an average level with a peak at 2389.66 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.66</td><td>39.73</td><td>54.00</td><td>-14.27</td><td>37.89</td><td>30.61</td><td>4.80</td><td>33.57</td><td>100</td><td>199</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.66	39.73	54.00	-14.27	37.89	30.61	4.80	33.57	100	199	AVERAGE	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is at 54.00 dB. A blue trace shows an average level with a peak at 2452.00 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>88.47</td><td>-----</td><td>-----</td><td>86.38</td><td>30.74</td><td>4.88</td><td>33.53</td><td>100</td><td>199</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	88.47	-----	-----	86.38	30.74	4.88	33.53	100	199	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.66	39.73	54.00	-14.27	37.89	30.61	4.80	33.57	100	199	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2452.00	88.47	-----	-----	86.38	30.74	4.88	33.53	100	199	AVERAGE																																																																																



Mode	11										
	Band Edge - R										
	2400-2483.5_802.11n HT40_CH09_2452MHz										
ANT	SISO										
Pol.	Horizontal							Fundamental			
Peak											

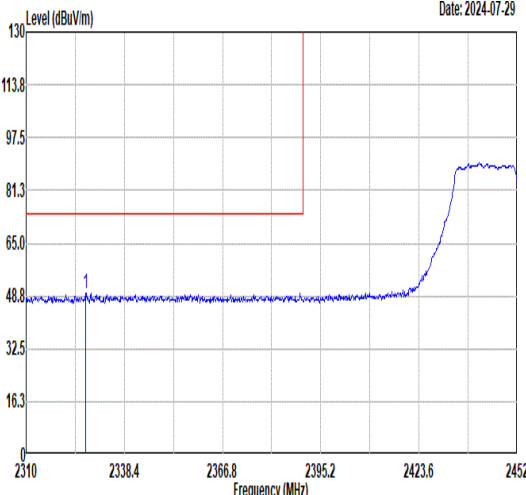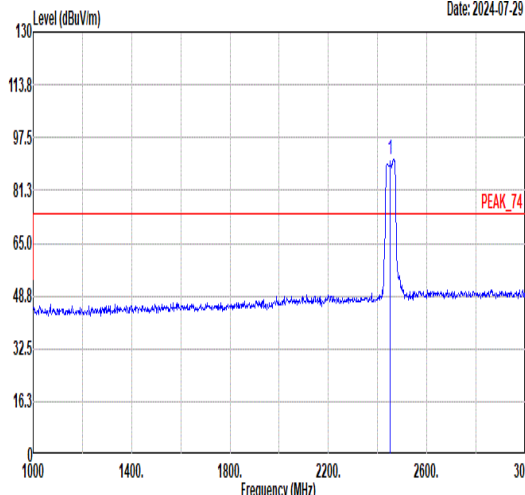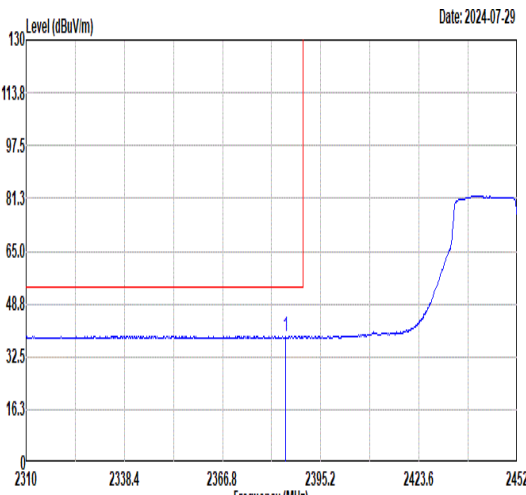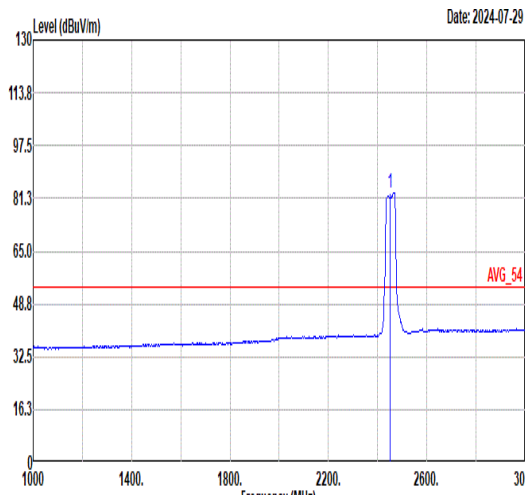

Mode	11																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2327.18</td><td>49.52</td><td>74.00</td><td>-24.48</td><td>47.66</td><td>30.73</td><td>4.73</td><td>33.60</td><td>384</td><td>115</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2327.18	49.52	74.00	-24.48	47.66	30.73	4.73	33.60	384	115	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>90.67</td><td>-----</td><td>-----</td><td>88.53</td><td>30.77</td><td>4.89</td><td>33.52</td><td>384</td><td>115</td><td>PEAK_74</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	90.67	-----	-----	88.53	30.77	4.89	33.52	384	115
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2327.18	49.52	74.00	-24.48	47.66	30.73	4.73	33.60	384	115	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2452.00	90.67	-----	-----	88.53	30.77	4.89	33.52	384	115	PEAK_74																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.98</td><td>38.88</td><td>54.00</td><td>-15.12</td><td>37.04</td><td>30.62</td><td>4.79</td><td>33.57</td><td>384</td><td>115</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.98	38.88	54.00	-15.12	37.04	30.62	4.79	33.57	384	115	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>83.05</td><td>-----</td><td>-----</td><td>80.91</td><td>30.77</td><td>4.89</td><td>33.52</td><td>384</td><td>115</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	83.05	-----	-----	80.91	30.77	4.89	33.52	384	115
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2384.98	38.88	54.00	-15.12	37.04	30.62	4.79	33.57	384	115	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2452.00	83.05	-----	-----	80.91	30.77	4.89	33.52	384	115	AVERAGE																																																																															



Mode	11										
	Band Edge - R										
	2400-2483.5_802.11n HT40_CH09_2452MHz										
ANT	SISO										
Pol.	Vertical						Fundamental				
Peak											




Mode	12																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_802.11n_HT40_CH09_LF																																																																																																																																																																									
ANT	SISO																																																																																																																																																																									
Pol.	Horizontal					Vertical																																																																																																																																																																				
QP/ Peak	Level (dBuV/m) Date: 2024-08-01 Frequency (MHz) <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>47.46</td><td>21.37</td><td>40.00</td><td>-18.63</td><td>36.06</td><td>19.62</td><td>0.69</td><td>35.00</td><td>-- Peak</td></tr><tr><td>2</td><td>143.49</td><td>23.41</td><td>43.50</td><td>-20.09</td><td>38.44</td><td>18.43</td><td>1.26</td><td>34.72</td><td>-- Peak</td></tr><tr><td>3</td><td>198.78</td><td>22.67</td><td>43.50</td><td>-20.83</td><td>39.84</td><td>16.05</td><td>1.48</td><td>34.70</td><td>-- Peak</td></tr><tr><td>4</td><td>349.13</td><td>25.89</td><td>46.00</td><td>-20.11</td><td>38.35</td><td>20.20</td><td>1.94</td><td>34.60</td><td>-- Peak</td></tr><tr><td>5</td><td>741.98</td><td>29.50</td><td>46.00</td><td>-16.50</td><td>33.46</td><td>27.51</td><td>2.93</td><td>34.40</td><td>-- Peak</td></tr><tr><td>6</td><td>869.05</td><td>31.12</td><td>46.00</td><td>-14.88</td><td>33.57</td><td>28.73</td><td>3.12</td><td>34.30</td><td>-- Peak</td></tr></tbody></table>					Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	47.46	21.37	40.00	-18.63	36.06	19.62	0.69	35.00	-- Peak	2	143.49	23.41	43.50	-20.09	38.44	18.43	1.26	34.72	-- Peak	3	198.78	22.67	43.50	-20.83	39.84	16.05	1.48	34.70	-- Peak	4	349.13	25.89	46.00	-20.11	38.35	20.20	1.94	34.60	-- Peak	5	741.98	29.50	46.00	-16.50	33.46	27.51	2.93	34.40	-- Peak	6	869.05	31.12	46.00	-14.88	33.57	28.73	3.12	34.30	-- Peak	Level (dBuV/m) Date: 2024-08-01 Frequency (MHz) <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>33.88</td><td>26.20</td><td>40.00</td><td>-13.80</td><td>42.04</td><td>18.46</td><td>0.57</td><td>34.87</td><td>-- Peak</td></tr><tr><td>2</td><td>140.58</td><td>23.85</td><td>43.50</td><td>-19.65</td><td>39.13</td><td>18.20</td><td>1.24</td><td>34.72</td><td>-- Peak</td></tr><tr><td>3</td><td>194.90</td><td>23.34</td><td>43.50</td><td>-20.16</td><td>40.29</td><td>16.28</td><td>1.47</td><td>34.70</td><td>-- Peak</td></tr><tr><td>4</td><td>282.20</td><td>22.09</td><td>46.00</td><td>-23.91</td><td>36.42</td><td>18.57</td><td>1.74</td><td>34.64</td><td>-- Peak</td></tr><tr><td>5</td><td>601.33</td><td>26.99</td><td>46.00</td><td>-19.01</td><td>32.89</td><td>26.09</td><td>2.61</td><td>34.60</td><td>-- Peak</td></tr><tr><td>6</td><td>933.07</td><td>30.17</td><td>46.00</td><td>-15.83</td><td>31.87</td><td>29.38</td><td>3.22</td><td>34.30</td><td>-- Peak</td></tr></tbody></table>					Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	33.88	26.20	40.00	-13.80	42.04	18.46	0.57	34.87	-- Peak	2	140.58	23.85	43.50	-19.65	39.13	18.20	1.24	34.72	-- Peak	3	194.90	23.34	43.50	-20.16	40.29	16.28	1.47	34.70	-- Peak	4	282.20	22.09	46.00	-23.91	36.42	18.57	1.74	34.64	-- Peak	5	601.33	26.99	46.00	-19.01	32.89	26.09	2.61	34.60	-- Peak	6	933.07	30.17	46.00	-15.83	31.87	29.38	3.22	34.30	-- Peak
	Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	47.46	21.37	40.00	-18.63	36.06	19.62	0.69	35.00	-- Peak																																																																																																																																																																	
2	143.49	23.41	43.50	-20.09	38.44	18.43	1.26	34.72	-- Peak																																																																																																																																																																	
3	198.78	22.67	43.50	-20.83	39.84	16.05	1.48	34.70	-- Peak																																																																																																																																																																	
4	349.13	25.89	46.00	-20.11	38.35	20.20	1.94	34.60	-- Peak																																																																																																																																																																	
5	741.98	29.50	46.00	-16.50	33.46	27.51	2.93	34.40	-- Peak																																																																																																																																																																	
6	869.05	31.12	46.00	-14.88	33.57	28.73	3.12	34.30	-- Peak																																																																																																																																																																	
Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																	
1	33.88	26.20	40.00	-13.80	42.04	18.46	0.57	34.87	-- Peak																																																																																																																																																																	
2	140.58	23.85	43.50	-19.65	39.13	18.20	1.24	34.72	-- Peak																																																																																																																																																																	
3	194.90	23.34	43.50	-20.16	40.29	16.28	1.47	34.70	-- Peak																																																																																																																																																																	
4	282.20	22.09	46.00	-23.91	36.42	18.57	1.74	34.64	-- Peak																																																																																																																																																																	
5	601.33	26.99	46.00	-19.01	32.89	26.09	2.61	34.60	-- Peak																																																																																																																																																																	
6	933.07	30.17	46.00	-15.83	31.87	29.38	3.22	34.30	-- Peak																																																																																																																																																																	

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	100	-	-	10Hz


802.11b

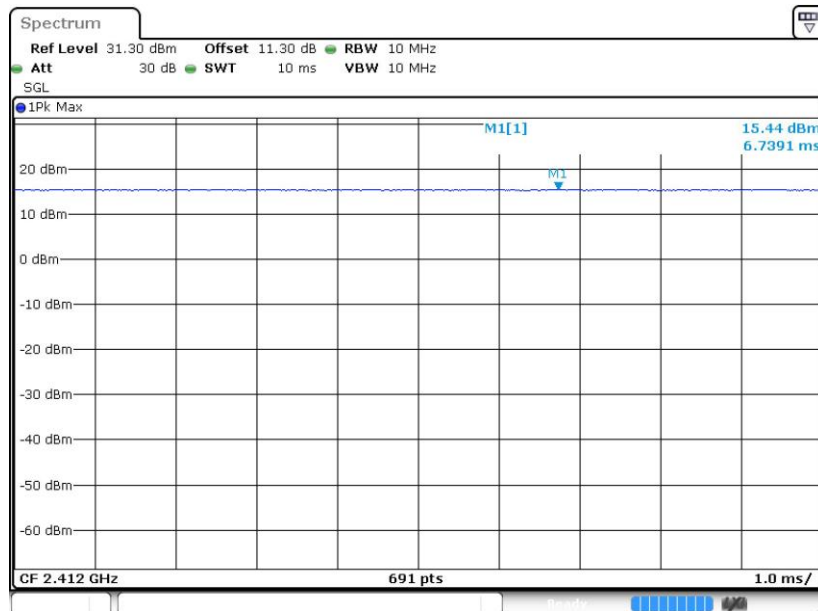

Date: 27.JUL.2024 10:46:37




802.11g

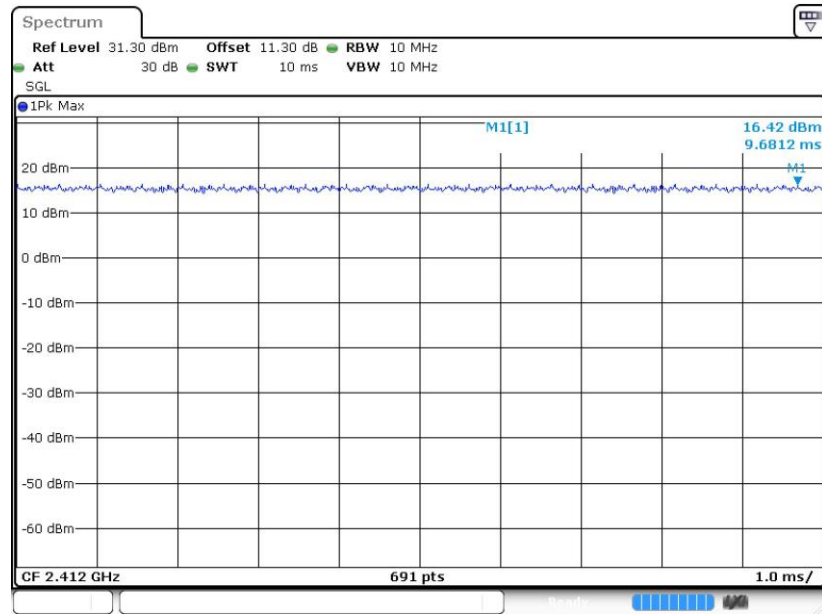

Date: 27.JUL.2024 10:47:01


802.11n HT20

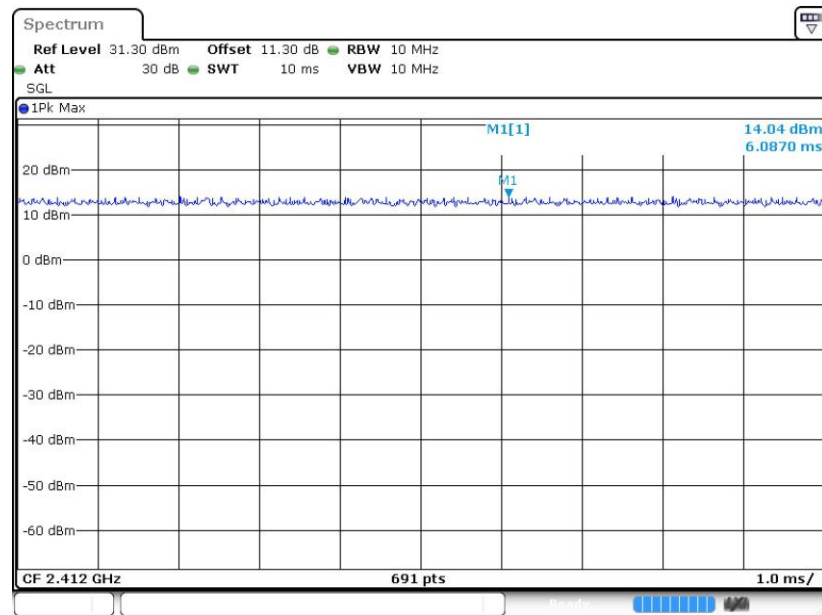

Date: 27.JUL.2024 10:47:58



802.11n HT40

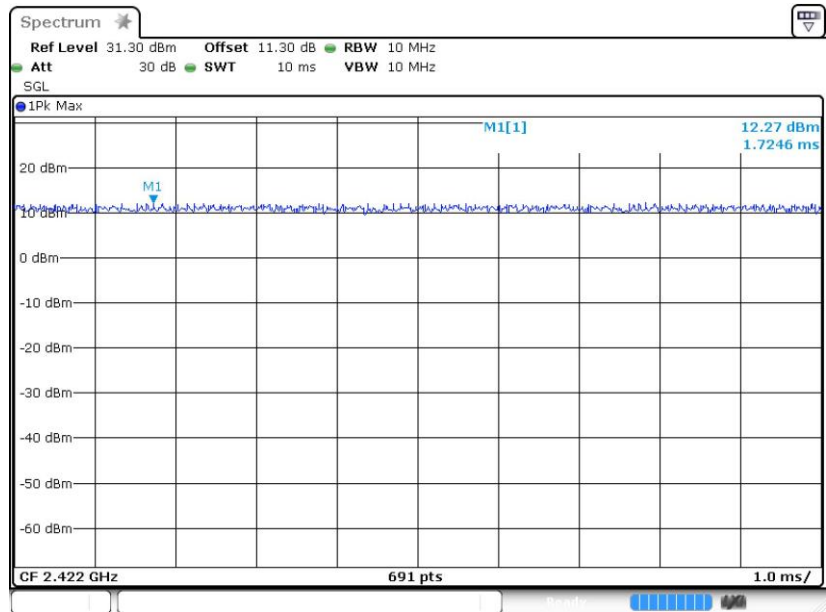

Date: 27 JUL 2024 10:48:30