


**Product specification**

**Quick Reference Data**

|                            |                                    |  |
|----------------------------|------------------------------------|--|
|                            | Antenna module on the system board |  |
| Frequenc Range             | 2400 ~ 2500MHz                     |  |
| Ant. Port Input Pwr. (dBm) | 0 (Typ. BT class 2 output power)   |  |
| Tot. Rad. Pwr. (dBm)       | -1.2 (Input pwr – loss pwr)        |  |
| Peak EIRP(dBm)             | 1.2                                |  |
| Directivity (dBi)          | 1 (all direction antenna)          |  |
| Efficiency (dB)            | 6 0.2 %                            |  |
| Gain (dBi)                 | 1.9                                |  |
| Input Impedence(ohm)       | 50                                 |  |
| Polarization Type          | V ertical & H orizontal            |  |
| V . S .W . R               | < 1.4                              |  |

All the technical data and information contained herein are subject to change without prior notice

**Antenna Layout & module on the system board**

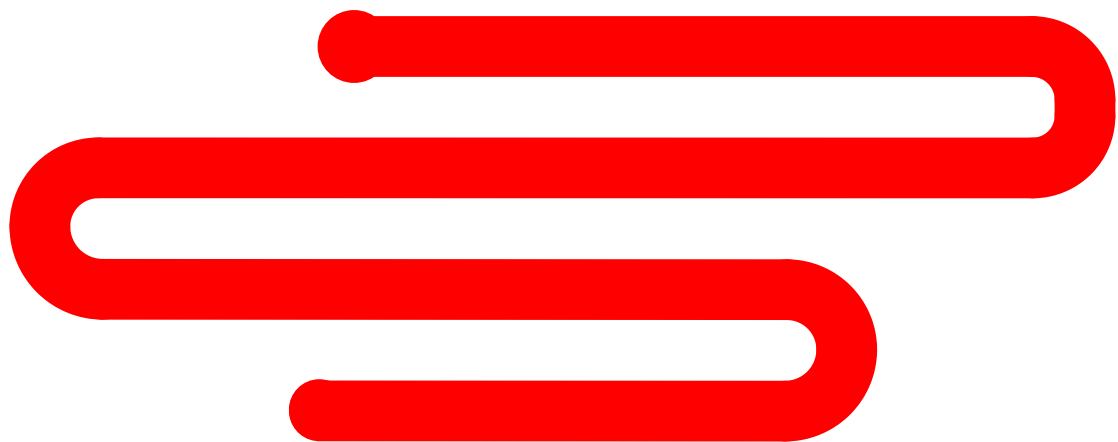

**Antenna Gain**

**Gain Table**

| Unit in dBi @2.44GHz | XY-plane |      | XZ-plane |      | YZ-plane |      | Efficiency |
|----------------------|----------|------|----------|------|----------|------|------------|
|                      | Peak     | Avg. | Peak     | Avg. | Peak     | Avg. |            |
| Module Board         | 1.2      | -0.5 | 1.9      | -3.6 | 1.1      | -3.0 | 6 0.2 %    |

Return Loss



## The Environment of Antenna Radiation Pattern



# 3D radiation pattern diagram



## XY-plane



## XZ-plane



## YZ-plane

