



FCC Part 15.247

TEST REPORT

For

Audio-Technica Corporation

2-46-1 Nishi-naruse, Machida Tokyo 194-8666 Japan

Report Type	Original Report
FCC Identity:	FCC ID: JFZM50XBT2
Product Name	Wireless Headphones
Model Name	ATH-M50xBT2
Report Number	RXZ200926002-00B
Report Date	2020/11/16
Reviewed By	Flight Hsieh <i>Flight Hsieh</i>
Prepared By: Bay Area Compliance Laboratories Corp.(Linkou Laboratory) No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.) Tel: +886 (3)3961072; Fax: +886 (3) 3961027 www.bacl.com.tw	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

Revision History

Revision	Report Number	Issue Date	Description
1.0	RXZ200926002-00B	2020/11/16	Original Report

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	OPERATION CONDITION OF EUT.....	5
1.3	OBJECTIVE AND TEST METHODOLOGY.....	6
1.4	MEASUREMENT UNCERTAINTY	6
1.5	ENVIRONMENTAL CONDITIONS AND TEST DATE	6
1.6	TEST FACILITY.....	6
2	SYSTEM TEST CONFIGURATION.....	7
2.1	DESCRIPTION OF TEST CONFIGURATION.....	7
2.2	SUPPORT EQUIPMENT LIST AND DETAILS	7
2.3	BLOCK DIAGRAM OF TEST SETUP	8
3	SUMMARY OF TEST RESULTS	9
4	FCC §15.247(I), § 1.1307, § 2.1093 – RF EXPOSURE	10
4.1	APPLICABLE STANDARD	10
4.2	RF EXPOSURE EVALUATION RESULT.....	10
5	FCC §15.203 – ANTENNA REQUIREMENTS.....	11
5.1	APPLICABLE STANDARD	11
5.2	ANTENNA LIST AND DETAILS	11
6	FCC §15.207 - AC LINE CONDUCTED EMISSIONS.....	12
6.1	APPLICABLE STANDARD	12
6.2	EUT SETUP AND TEST PROCEDURE.....	12
6.3	TEST EQUIPMENT LIST AND DETAILS	13
6.4	TEST DATA AND TEST PLOT.....	13
7	FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS.....	14
7.1	APPLICABLE STANDARD	14
7.2	EUT SETUP AND TEST PROCEDURE.....	16
7.3	TEST EQUIPMENT LIST AND DETAILS	17
7.4	RADIATED EMISSION TEST PLOT AND DATA.....	18
8	FCC §15.247(A)(1) – 20 DB EMISSION BANDWIDTH.....	27
8.1	APPLICABLE STANDARD	27
8.2	TEST PROCEDURE.....	27
8.3	TEST EQUIPMENT LIST AND DETAILS	27
8.4	TEST RESULTS	28
9	FCC §15.247(A)(1) – CHANNEL SEPARATION TEST	32
9.1	APPLICABLE STANDARD	32
9.2	TEST PROCEDURE.....	32
9.3	TEST EQUIPMENT LIST AND DETAILS	32
9.4	TEST RESULTS	33
10	FCC §15.247(A)(1)(III) – TIME OF OCCUPANCY (DWELL TIME)	37
10.1	APPLICABLE STANDARD	37
10.2	TEST PROCEDURE.....	37
10.3	TEST EQUIPMENT LIST AND DETAILS	38
10.4	TEST RESULTS	38
11	FCC §15.247(A)(1)(III) –QUANTITY OF HOPPING CHANNEL TEST	40
11.1	APPLICABLE STANDARD	40
11.2	TEST PROCEDURE.....	40
11.3	TEST EQUIPMENT LIST AND DETAILS	40
11.4	TEST RESULTS	41

12 FCC §15.247(B)(1) – MAXIMUM OUTPUT POWER.....42

 12.1 APPLICABLE STANDARD 42

 12.2 TEST PROCEDURE..... 42

 12.3 TEST EQUIPMENT LIST AND DETAILS 42

 12.4 TEST RESULTS 42

13 FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE43

 13.1 APPLICABLE STANDARD 43

 13.2 TEST PROCEDURE..... 43

 13.3 TEST EQUIPMENT LIST AND DETAILS 43

 13.4 TEST RESULTS 44

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	Audio-Technica Corporation 2-46-1 Nishi-naruse, Machida Tokyo 194-8666 Japan
Manufacturer	Audio-Technica Corporation 2-46-1 Nishi-naruse, Machida Tokyo 194-8666 Japan
Brand Name	audio-technica
Product (Equipment)	Wireless Headphones
Model Name	ATH-M50xBT2
Frequency Range	2402 - 2480 MHz
Number of Channels	79 Channels
Output Power	BR-1Mbps: 3.86 dBm (0.0024 W) EDR-2Mbps: 6.65 dBm (0.0046 W) EDR-3Mbps: 7.09 dBm (0.0051 W)
Modulation Type	BR-1Mbps: GFSK EDR-2Mbps: $\pi/4$ -DQPSK EDR-3Mbps: 8-DPSK
Related Submittal(s)/Grant(s)	FCC Part 15.247 DTS with FCC ID: JFZM50XBT2
Received Date	2020/10/16
Date of Test	2020/10/21 - 2020/10/27

*All measurement and test data in this report was gathered from production sample serial number: 200926002 (Assigned by BACL, Linkou Laboratory).

1.2 Operation Condition of EUT

Power Operation (Voltage Range)	☐ AC 120 V/60 Hz ☐ Adapter ☐ By Power Cord.
	☒ DC Type ☐ DC Power ☒ Battery: 3.7V ☒ External from USB Cable ☐ External DC Adapter

1.3 Objective and Test Methodology

The Objective of this Test Report was to document the compliance of the Audio-Technica Corporation. Appliance (Model: ATH-M50xBT2) to the requirements of the following Standards:

- Part 2, Subpart J, Part 15, Subparts A and C, section 15.247 of the Federal Communication Commission's rules.
- ANSI C63.10-2013 of the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.4 Measurement Uncertainty

Parameter	Expanded Measurement uncertainty
RF output power with Power Meter	± 1.488 dB
Occupied Channel Bandwidth	± 453.927 Hz
RF Conducted test with Spectrum	± 2.77 dB
AC Power Line Conducted Emission	± 2.66 dB
Radiated Below 1G	± 3.57 dB
Radiated Above 1G	± 5.32 dB

The test results with statement of conformity, the decision rules are based on the specifications and standards. The test results will not take the measurement uncertainty into account.

1.5 Environmental Conditions and Test Date

Test Site	Test Date	Temperature (°C)	Relative Humidity (% RH)	Test Engineer
Conduction (Con-01)	2020/10/22	22.1	55	Brian Chang
Radiated (966B)	2020/10/26 - 2020/10/27	22.0 - 23.0	50 - 57	Brian Chang
Conducted (TH-02)	2020/10/21-2020/10/22	22.6	58	Rui Zhan

1.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

☒ No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) by Mutual Recognition Agreement (MRA). The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 0027578244. Designation No.: TW3546. The Test Firm Registration No.: 181430.

2 System Test Configuration

2.1 Description of Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer.

No special accessory, No modification was made to the EUT and No special equipment used during test.

For BT (BR/EDR), there are totally 79 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441
1	2403	--	--
2	2404	--	--
3	2405	76	2478
--	--	77	2479
38	2440	78	2480

For BLE: Channel 0, 39 and 78 were tested.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the peak power across all data rates bandwidths, and modulations.

Radiated below 1G were tested worst output power.

The major electrical and mechanical constructions of series models are identical to the basic model, except different Color.

For the model MT830 is the the final test data are shown on this test report.


Worst Case of Power Setting				
EUT Exercise Software		Bluetooth RF Test Tool		
Configuration	N _{TX}	Low CH	Mid CH	High CH
BR-1Mbps mode	1	default	default	default
EDR-2Mbps mode	1	default	default	default
EDR-3Mbps mode	1	default	default	default

2.2 Support Equipment List and Details

No.	Description	Manufacturer	Model Number	Serial Number
A	Adapter	APPLE	A1385	N/A
B	NoteBook	DELL	Latitude E6410	PP27LA001

No.	Description	Manufacturer	Model Number
1	USB Cable (Type A to C)	audio-technica	ATH-M50xBT2
2	3.5@Audio Calbe	audio-technica	ATH-M50xBT2

2.3 Block Diagram of Test Setup

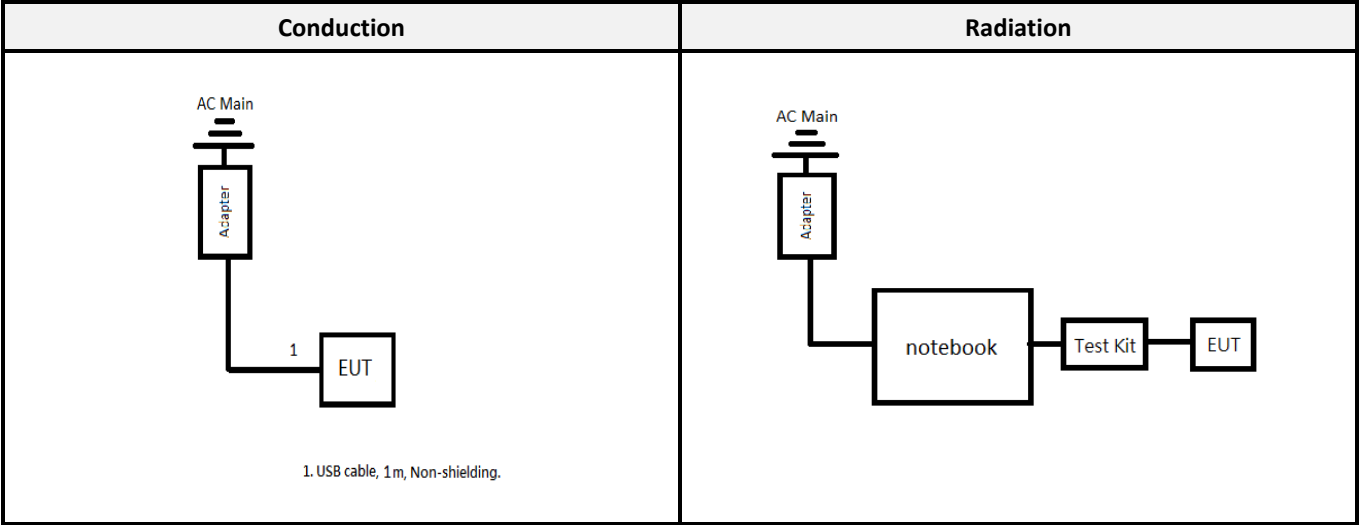

3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §1.1307, § 2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance

4 FCC §15.247(i), § 1.1307, § 2.1093 – RF Exposure

4.1 Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[Vf(\text{GHz})] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.

4.2 RF Exposure Evaluation Result

RF Exposure Evaluation:

Frequency (MHz)	Turn-up Power		Evaluation Distance (mm)	SAR Exclusion Result	Extremity SAR Exclusion Limit (1g SAR)
	(dBm)	(mW)			
2402-2480	8.00	6.31	5	1.99	3

Result: SAR evaluation is not necessary.

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi

5.2 Antenna List and Details

Brand	Model	Antenna Type	Antenna Gain	Result
Unictron	CW337	Polarization Pillar Antenna	-0.40 dBi	Compliance

The EUT has an internal antennas arrangement and fulfill the requirement of this section.

6 FCC §15.207 - AC Line Conducted Emissions

6.1 Applicable Standard


According to FCC §15.207,

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency. Note 2: A linear average detector is required

6.2 EUT Setup and Test Procedure

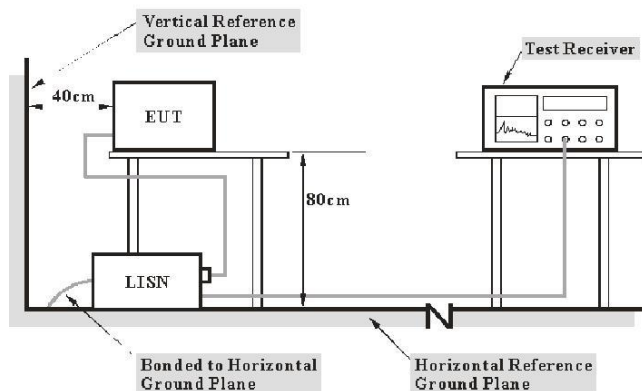

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz. During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz

During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

6.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
AC Line Conduction Room (CON-01)					
Two-Line V-Network	Rohde & Schwarz	ENV216	100010	2020/09/14	2021/09/13
Pulse Limiter	SCHWARZBECK	VSTD 9561-F	00432	2020/09/11	2021/09/10
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2020/05/07	2021/05/06
RF Cable	EMCI	EMCCFD300-BM-BM-8000	180526	2020/08/18	2021/08/17
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

6.4 Test Data and Test Plot

Line

Date: 2020-10-22 Time: 11:23:08

Level (dBuV)

Frequency (MHz)

FCC Part 15B CLASS-B QP

FCC Part 15B CLASS-B AV

	Read Freq	Level	Level Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB
1	0.161	18.36	38.22	19.86	65.40	-27.18 QP
2	0.161	-1.52	18.34	19.86	55.40	-37.06 Average
3	0.252	14.70	34.57	19.87	61.70	-27.13 QP
4	0.252	-3.00	16.87	19.87	51.70	-34.83 Average
5	0.338	10.32	30.19	19.87	59.25	-29.06 QP
6	0.338	-6.52	13.35	19.87	49.25	-35.90 Average
7	0.774	15.61	35.52	19.91	56.00	-20.48 QP
8	0.774	4.30	24.21	19.91	46.00	-21.79 Average
9	4.917	5.53	25.61	20.08	56.00	-30.39 QP
10	4.917	0.12	20.20	20.08	46.00	-25.80 Average
11	10.071	1.64	21.85	20.21	60.00	-38.15 QP
12	10.071	-3.64	16.57	20.21	50.00	-33.43 Average

Neutral

Date: 2020-10-22 Time: 11:24:23

Level (dBuV)

Frequency (MHz)

FCC Part 15B CLASS-B QP

FCC Part 15B CLASS-B AV

	Read Freq	Level	Level Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB
1	0.165	19.66	39.53	19.87	65.21	-25.68 QP
2	0.165	1.84	21.71	19.87	55.21	-33.50 Average
3	0.252	14.08	33.96	19.88	61.70	-27.74 QP
4	0.252	-2.37	17.51	19.88	51.70	-34.19 Average
5	0.333	10.54	30.42	19.88	59.38	-28.96 QP
6	0.333	-3.85	16.03	19.88	49.38	-33.35 Average
7	0.780	16.32	36.24	19.92	56.00	-19.76 QP
8	0.780	7.40	27.40	19.92	46.00	-18.60 Average
9	3.197	5.17	25.21	20.04	56.00	-30.79 QP
10	3.197	0.03	20.07	20.04	46.00	-25.93 Average
11	7.620	6.00	26.19	20.19	60.00	-33.81 QP
12	7.620	0.49	20.68	20.19	50.00	-29.32 Average

Note:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

7 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	4.5-5.15
0.495-0.505	16.42-16.423	608-614	5.35-5.46
2.1735-2.1905	16.69475-16.69525	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6


As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.2 EUT Setup and Test Procedure

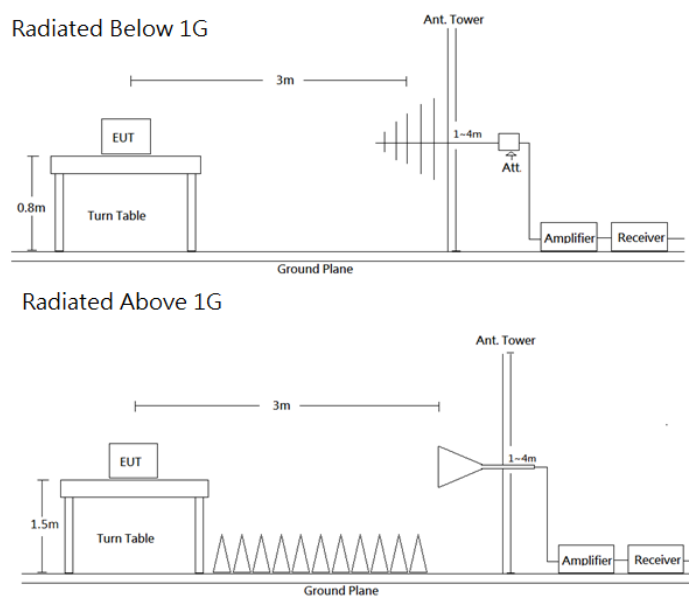

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Detector	Measurement method
30-1000 MHz	120 kHz	/	QP	QP
Above 1 GHz	1 MHz	3 MHz	PK	PK
	1 MHz	10 Hz	RMS	Ave

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

7.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Radiation 3M Room (966B)					
Active Loop	EMCO	6502	0001-3322	2020/03/16	2021/03/15
Bilog Antenna/6 dB Attenuator	SUNOL SCIENCES & EMEC /EMCI	JB3/N-6-06	A111513/AT-N0668	2020/03/19	2021/03/18
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/05/07	2021/05/06
Horn Antenna	ETS-Lindgren	3115	00109141	2020/07/15	2021/07/14
Horn Antenna	ETS-Lindgren	3160-09	00123852	2020/07/07	2021/07/06
Preamplifier	A.H. Systems	PAM-1840VH	174	2020/03/25	2021/03/24
Preamplifier	A.H. Systems	PAM-0118	478	2020/05/05	2021/05/04
Microflex Cable (1m)	EMCI	EMC102-KM-KM-1000	180524	2020/08/06	2021/08/05
Microflex Cable (2m)	EMCI	EMC106-SM-SM-2000	180516	2020/08/06	2021/08/05
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-002	2020/08/06	2021/08/05
Turn Table	Chaintek	T-200-S-1	003501	N.C.R	N.C.R
Antenna Tower	Chaintek	MBD-400-1	003504	N.C.R	N.C.R
Controller	Chaintek	3000-1	003507	N.C.R	N.C.R
Software	Audix	e3 v9	E3LK-01	N.C.R	N.C.R
Conducted Room (TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2020/03/11	2021/03/10
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

7.4 Radiated Emission Test Plot and Data

Transmitting mode (Pre-scan with three orthogonal axis, and worse case as Y axis)

Below 1G (30 MHz-1 GHz)

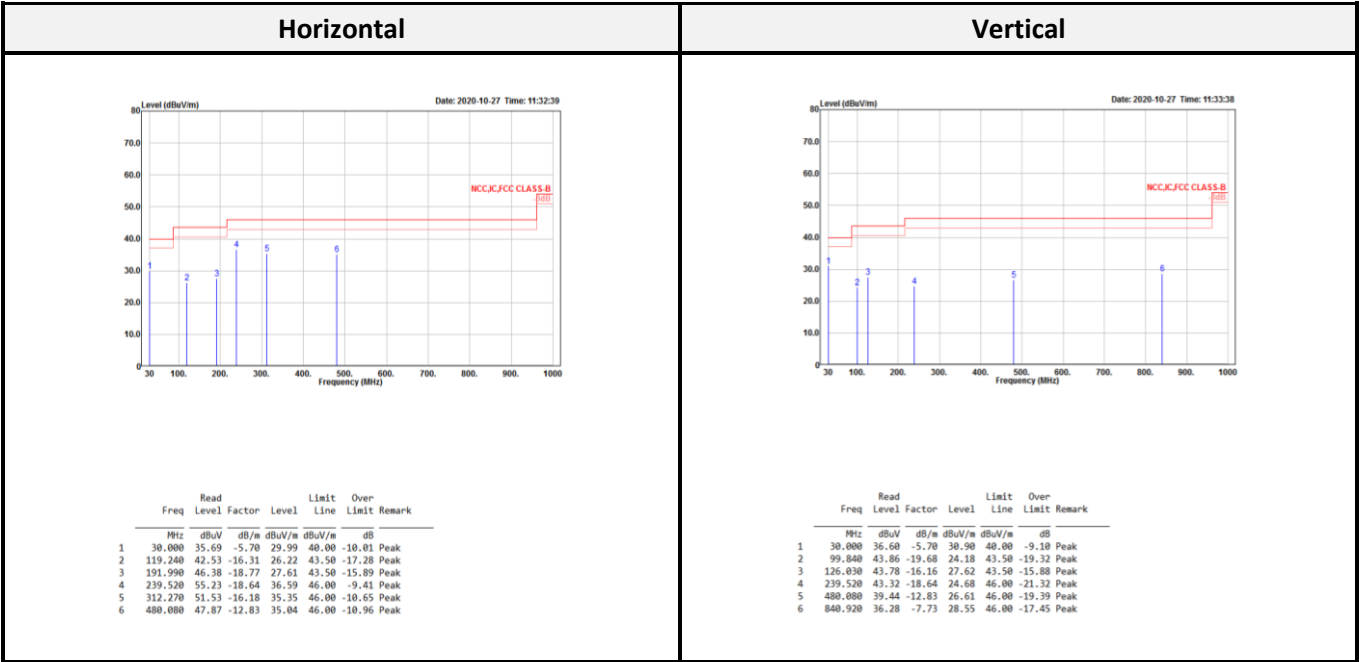

Note:

Level = Read Level + Factor, Over Limit = Level – Limit,

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Above 1G (1 GHz-26.5 GHz)**BR-1Mbps mode:**

Low CH															
Horizontal							Vertical								
	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2358.800	54.22	-5.85	48.37	74.00	-25.63	Peak	1	2387.800	54.58	-5.79	48.79	74.00	-25.21	Peak
2	! 2358.800	42.84	-5.85	36.99	54.00	-17.01	Average	2	! 2387.800	42.22	-5.79	36.43	54.00	-17.57	Average
3	* 2402.100	105.81	-5.75	100.06			Peak	3	* 2402.100	105.34	-5.75	99.59			Peak
4	* 2402.100	105.36	-5.75	99.61			Average	4	* 2402.100	104.87	-5.75	99.12			Average
1	4804.000	41.99	1.40	43.39	74.00	-30.61	Peak	1	4804.000	43.41	1.40	44.81	74.00	-29.19	Peak
2	4804.000	31.59	1.40	32.99	54.00	-21.01	Average	2	4804.000	32.56	1.40	33.96	54.00	-20.04	Average
3	6406.000	47.52	5.93	53.45	74.00	-20.55	Peak	3	! 6406.000	51.02	5.93	56.95	74.00	-17.05	Peak
4	! 6406.000	43.51	5.93	49.44	54.00	-4.56	Average	4	! 6406.000	47.60	5.93	53.53	54.00	-0.47	Average
5	7206.000	40.28	8.03	48.31	74.00	-25.69	Peak	5	7206.000	39.85	8.03	47.88	74.00	-26.12	Peak
6	! 7206.000	30.33	8.03	38.36	54.00	-15.64	Average	6	! 7206.000	30.55	8.03	38.58	54.00	-15.42	Average

Middle CH															
Horizontal								Vertical							
	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2390.000	53.67	-5.79	47.88	74.00	-26.12	Peak	1	2326.698	54.02	-5.81	48.21	74.00	-25.79	Peak
2 !	2390.000	42.24	-5.79	36.45	54.00	-17.55	Average	2 !	2326.698	42.31	-5.81	36.50	54.00	-17.50	Average
3 *	2441.164	106.89	-5.39	101.50			Peak	3 *	2441.164	106.31	-5.39	100.92			Peak
4 *	2441.164	106.36	-5.39	100.97			Average	4 *	2441.164	105.76	-5.39	100.37			Average
5	2490.048	54.58	-5.01	49.57	74.00	-24.43	Peak	5	2517.878	54.37	-4.90	49.47	74.00	-24.53	Peak
6 !	2490.048	42.25	-5.01	37.24	54.00	-16.76	Average	6 !	2517.878	42.27	-4.90	37.37	54.00	-16.63	Average
1	4882.000	40.86	1.72	42.58	74.00	-31.42	Peak	1	4882.000	41.03	1.72	42.75	74.00	-31.25	Peak
2	4882.000	30.59	1.72	32.31	54.00	-21.69	Average	2 !	4882.000	32.82	1.72	34.54	54.00	-19.46	Average
3 !	6508.000	48.58	6.24	54.82	74.00	-19.18	Peak	3 !	6508.000	50.35	6.24	56.59	74.00	-17.41	Peak
4 !	6508.000	43.55	6.24	49.79	54.00	-4.21	Average	4 !	6508.000	45.90	6.24	52.14	54.00	-1.86	Average
5	7323.000	39.62	8.40	48.02	74.00	-25.98	Peak	5	7323.000	41.35	8.40	49.75	74.00	-24.25	Peak
6 !	7323.000	30.10	8.40	38.50	54.00	-15.50	Average	6 !	7323.000	30.97	8.40	39.37	54.00	-14.63	Average

High CH															
Horizontal								Vertical							
	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	* 2480.004	103.79	-5.09	98.70			Peak	1	* 2479.840	103.87	-5.09	98.78			Peak
2	* 2480.004	103.32	-5.09	98.23			Average	2	* 2479.840	103.43	-5.09	98.34			Average
3	2486.646	54.67	-5.04	49.63	74.00	-24.37	Peak	3	2483.940	54.85	-5.06	49.79	74.00	-24.21	Peak
4	! 2486.646	42.76	-5.04	37.72	54.00	-16.28	Average	4	! 2483.940	42.82	-5.06	37.76	54.00	-16.24	Average
1	4960.000	41.37	1.87	43.24	74.00	-30.76	Peak	1	4960.000	41.65	1.87	43.52	74.00	-30.48	Peak
2	4960.000	31.40	1.87	33.27	54.00	-20.73	Average	2	! 4960.000	32.18	1.87	34.05	54.00	-19.95	Average
3	6610.000	45.62	6.79	52.41	74.00	-21.59	Peak	3	! 6610.000	49.25	6.79	56.04	74.00	-17.96	Peak
4	! 6610.000	40.07	6.79	46.86	54.00	-7.14	Average	4	! 6610.000	45.23	6.79	52.02	54.00	-1.98	Average
5	7440.000	39.13	8.57	47.70	74.00	-26.30	Peak	5	7440.000	39.39	8.57	47.96	74.00	-26.04	Peak
6	! 7440.000	30.34	8.57	38.91	54.00	-15.09	Average	6	! 7440.000	29.64	8.57	38.21	54.00	-15.79	Average

EDR-2Mbps mode:

Low CH													
Horizontal							Vertical						
Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
2381.600	54.45	-5.81	48.64	74.00	-25.36	Peak	2370.800	53.99	-5.83	48.16	74.00	-25.84	Peak
2381.600	41.23	-5.81	35.42	54.00	-18.58	Average	2370.800	40.67	-5.83	34.84	54.00	-19.16	Average
2402.200	107.14	-5.75	101.39			Peak	2402.200	106.82	-5.75	101.07			Peak
2402.200	102.98	-5.75	97.23			Average	2402.200	102.66	-5.75	96.91			Average
4804.000	41.26	1.40	42.66	74.00	-31.34	Peak	4804.000	41.08	1.40	42.48	74.00	-31.52	Peak
4804.000	33.26	1.40	34.66	54.00	-19.34	Average	4804.000	31.29	1.40	32.69	54.00	-21.31	Average
6406.000	45.49	5.93	51.42	74.00	-22.58	Peak	6406.000	50.91	5.93	56.84	74.00	-17.16	Peak
6406.000	39.32	5.93	45.25	54.00	-8.75	Average	6406.000	46.54	5.93	52.47	54.00	-1.53	Average
7206.000	41.06	8.03	49.09	74.00	-24.91	Peak	7206.000	40.03	8.03	48.06	74.00	-25.94	Peak
7206.000	32.05	8.03	40.08	54.00	-13.92	Average	7206.000	30.37	8.03	38.40	54.00	-15.60	Average

Middle CH													
Horizontal							Vertical						
Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
2368.000	53.85	-5.83	48.02	74.00	-25.98	Peak	2387.924	53.59	-5.79	47.80	74.00	-26.20	Peak
2368.000	40.24	-5.83	34.41	54.00	-19.59	Average	2387.924	40.27	-5.79	34.48	54.00	-19.52	Average
2441.406	106.57	-5.39	101.18			Peak	2440.922	106.00	-5.39	100.61			Peak
2441.406	102.55	-5.39	97.16			Average	2440.922	102.21	-5.39	96.82			Average
2501.422	53.44	-4.94	48.50	74.00	-25.50	Peak	2483.998	53.85	-5.06	48.79	74.00	-25.21	Peak
2501.422	40.27	-4.94	35.33	54.00	-18.67	Average	2483.998	40.24	-5.06	35.18	54.00	-18.82	Average
4882.000	42.08	1.72	43.80	74.00	-30.20	Peak	4882.000	40.39	1.72	42.11	74.00	-31.89	Peak
4882.000	31.20	1.72	32.92	54.00	-21.08	Average	4882.000	31.63	1.72	33.35	54.00	-20.65	Average
6508.000	46.71	6.24	52.95	74.00	-21.05	Peak	6508.000	50.89	6.24	57.13	74.00	-16.87	Peak
6508.000	42.40	6.24	48.64	54.00	-5.36	Average	6508.000	46.53	6.24	52.77	54.00	-1.23	Average
7323.000	39.12	8.40	47.52	74.00	-26.48	Peak	7323.000	39.46	8.40	47.86	74.00	-26.14	Peak
7323.000	30.28	8.40	38.68	54.00	-15.32	Average	7323.000	29.61	8.40	38.01	54.00	-15.99	Average

High CH													
Horizontal							Vertical						
Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
2480.168	104.60	-5.09	99.51			Peak	2480.168	103.21	-5.09	98.12			Peak
2480.168	100.46	-5.09	95.37			Average	2480.168	100.17	-5.09	95.08			Average
2484.104	54.75	-5.06	49.69	74.00	-24.31	Peak	2491.566	54.23	-5.00	49.23	74.00	-24.77	Peak
2484.104	41.82	-5.06	36.76	54.00	-17.24	Average	2491.566	41.60	-5.00	36.60	54.00	-17.40	Average
4960.000	40.48	1.87	42.35	74.00	-31.65	Peak	4960.000	41.03	1.87	42.90	74.00	-31.10	Peak
4960.000	30.45	1.87	32.32	54.00	-21.68	Average	4960.000	31.49	1.87	33.36	54.00	-20.64	Average
6610.000	45.57	6.79	52.36	74.00	-21.64	Peak	6610.000	47.57	6.79	54.36	74.00	-19.64	Peak
6610.000	41.48	6.79	48.27	54.00	-5.73	Average	6610.000	43.75	6.79	50.54	54.00	-3.46	Average
7440.000	38.78	8.57	47.35	74.00	-26.65	Peak	7440.000	39.09	8.57	47.66	74.00	-26.34	Peak
7440.000	30.85	8.57	39.42	54.00	-14.58	Average	7440.000	30.13	8.57	38.70	54.00	-15.30	Average


EDR-3Mbps mode:

Low CH													
Horizontal							Vertical						
	Freq	Read Level	Factor	Level	Limit Line	Over Limit Remark		Freq	Read Level	Factor	Level	Limit Line	Over Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2342.500	54.62	-5.85	48.77	74.00	-25.23 Peak	1	2386.300	54.23	-5.80	48.43	74.00	-25.57 Peak
2 !	2342.500	42.61	-5.85	36.76	54.00	-17.24 Average	2 !	2386.300	42.65	-5.80	36.85	54.00	-17.15 Average
3 *	2402.100	107.12	-5.75	101.37		Peak	3 *	2402.100	106.87	-5.75	101.12		Peak
4 *	2402.100	103.50	-5.75	97.75		Average	4 *	2402.100	103.21	-5.75	97.46		Average
1	4804.000	42.92	1.40	44.32	74.00	-29.68 Peak	1	4804.000	41.68	1.40	43.08	74.00	-30.92 Peak
2 !	4804.000	33.44	1.40	34.84	54.00	-19.16 Average	2	4804.000	31.55	1.40	32.95	54.00	-21.05 Average
3	6406.000	45.17	5.93	51.10	74.00	-22.90 Peak	3 !	6406.000	50.76	5.93	56.69	74.00	-17.31 Peak
4 !	6406.000	39.48	5.93	45.41	54.00	-8.59 Average	4 !	6406.000	46.96	5.93	52.89	54.00	-1.11 Average
5	7206.000	41.40	8.03	49.43	74.00	-24.57 Peak	5	7206.000	41.26	8.03	49.29	74.00	-24.71 Peak
6 !	7206.000	32.37	8.03	40.40	54.00	-13.60 Average	6 !	7206.000	30.83	8.03	38.86	54.00	-15.14 Average

Middle CH													
Horizontal							Vertical						
	Freq	Read Level	Factor	Level	Limit Line	Over Limit Remark		Freq	Read Level	Factor	Level	Limit Line	Over Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2361.062	53.94	-5.85	48.09	74.00	-25.91 Peak	1	2387.924	53.88	-5.79	48.09	74.00	-25.91 Peak
2 !	2361.062	42.34	-5.85	36.49	54.00	-17.51 Average	2 !	2387.924	42.34	-5.79	36.55	54.00	-17.45 Average
3 *	2440.922	108.14	-5.39	102.75		Peak	3 *	2441.164	107.77	-5.39	102.38		Peak
4 *	2440.922	104.63	-5.39	99.24		Average	4 *	2441.164	104.27	-5.39	98.88		Average
5	2501.906	54.26	-4.94	49.32	74.00	-24.68 Peak	5	2509.650	54.81	-4.92	49.89	74.00	-24.11 Peak
6 !	2501.906	42.31	-4.94	37.37	54.00	-16.63 Average	6 !	2509.650	42.29	-4.92	37.37	54.00	-16.63 Average
1	4882.000	41.53	1.72	43.25	74.00	-30.75 Peak	1	4882.000	41.08	1.72	42.80	74.00	-31.20 Peak
2	4882.000	31.43	1.72	33.15	54.00	-20.85 Average	2	4882.000	31.18	1.72	32.90	54.00	-21.10 Average
3	6508.000	46.32	6.24	52.56	74.00	-21.44 Peak	3 !	6508.000	50.12	6.24	56.36	74.00	-17.64 Peak
4 !	6508.000	41.20	6.24	47.44	54.00	-6.56 Average	4 !	6508.000	46.03	6.24	52.27	54.00	-1.73 Average
5	7323.000	39.84	8.40	48.24	74.00	-25.76 Peak	5	7323.000	39.98	8.40	48.38	74.00	-25.62 Peak
6 !	7323.000	30.41	8.40	38.81	54.00	-15.19 Average	6 !	7323.000	30.67	8.40	39.07	54.00	-14.93 Average

High CH													
Horizontal							Vertical						
	Freq	Read Level	Factor	Level	Limit Line	Over Limit Remark		Freq	Read Level	Factor	Level	Limit Line	Over Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 *	2480.004	105.93	-5.09	100.84		Peak	1 *	2480.004	105.58	-5.09	100.49		Peak
2 *	2480.004	102.29	-5.09	97.20		Average	2 *	2480.004	101.96	-5.09	96.87		Average
3	2485.662	54.80	-5.05	49.75	74.00	-24.25 Peak	3	2484.268	55.03	-5.05	49.98	74.00	-24.02 Peak
4 !	2485.662	43.11	-5.05	38.06	54.00	-15.94 Average	4 !	2484.268	43.07	-5.05	38.02	54.00	-15.98 Average
1	4960.000	40.80	1.87	42.67	74.00	-31.33 Peak	1	4960.000	40.55	1.87	42.42	74.00	-31.58 Peak
2	4960.000	30.74	1.87	32.61	54.00	-21.39 Average	2	4960.000	30.39	1.87	32.26	54.00	-21.74 Average
3	6610.000	46.24	6.79	53.03	74.00	-20.97 Peak	3 !	6610.000	49.01	6.79	55.80	74.00	-18.20 Peak
4 !	6610.000	40.04	6.79	46.83	54.00	-7.17 Average	4 !	6610.000	45.19	6.79	51.98	54.00	-2.02 Average
5	7440.000	39.19	8.57	47.76	74.00	-26.24 Peak	5	7440.000	39.01	8.57	47.58	74.00	-26.42 Peak
6 !	7440.000	30.22	8.57	38.79	54.00	-15.21 Average	6 !	7440.000	29.58	8.57	38.15	54.00	-15.85 Average

Above 1G (1 GHz-26.5 GHz): The worst mode is BR-1Mbps Low CH.

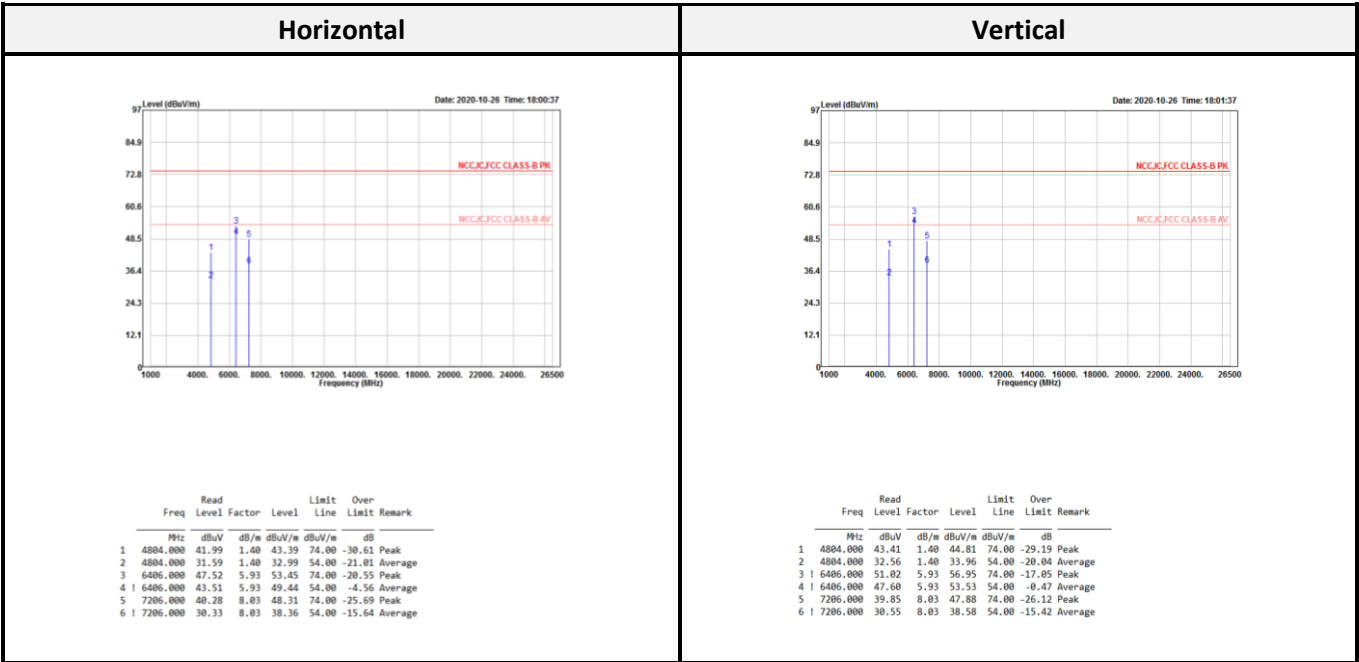

Level = Read Level + Factor

Over Limit = Level – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported


Conducted Spurious Emissions:

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BR-1Mbps				
Low	2402	49.52	≥ 20	Compliance
Mid	2441	49.85	≥ 20	Compliance
High	2480	48.24	≥ 20	Compliance
EDR-2Mbps				
Low	2402	41.21	≥ 20	Compliance
Mid	2441	51.53	≥ 20	Compliance
High	2480	47.33	≥ 20	Compliance
EDR-3Mbps				
Low	2402	50.85	≥ 20	Compliance
Mid	2441	52.10	≥ 20	Compliance
High	2480	46.12	≥ 20	Compliance


BR-1Mbps:

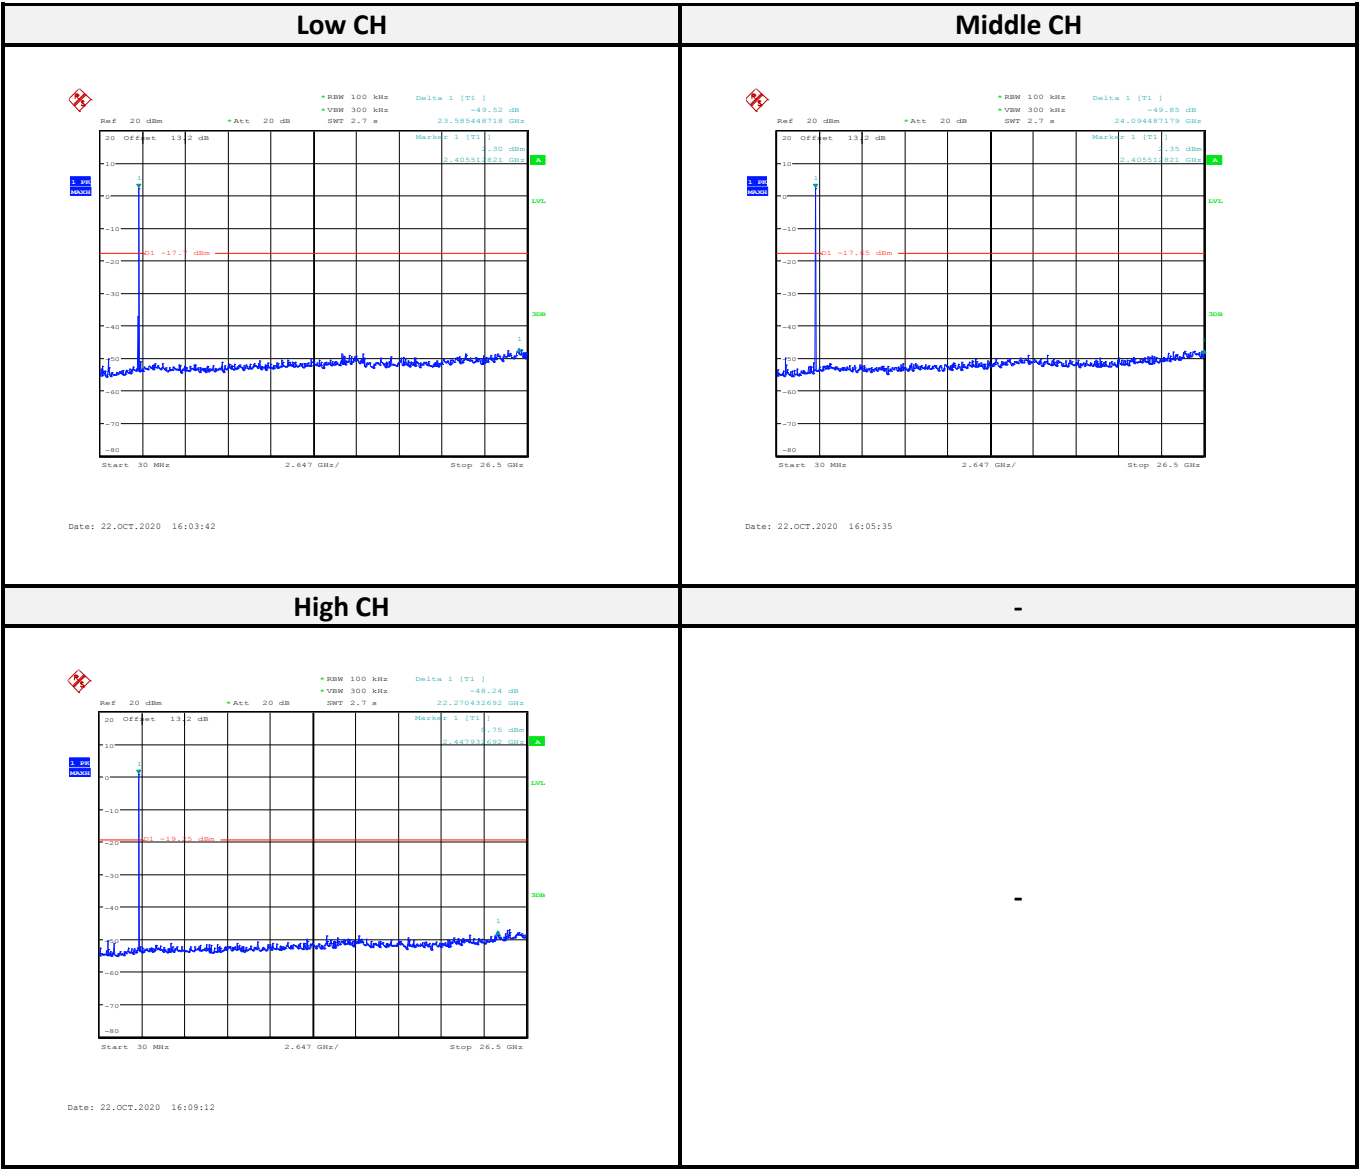

EDR-2Mbps:

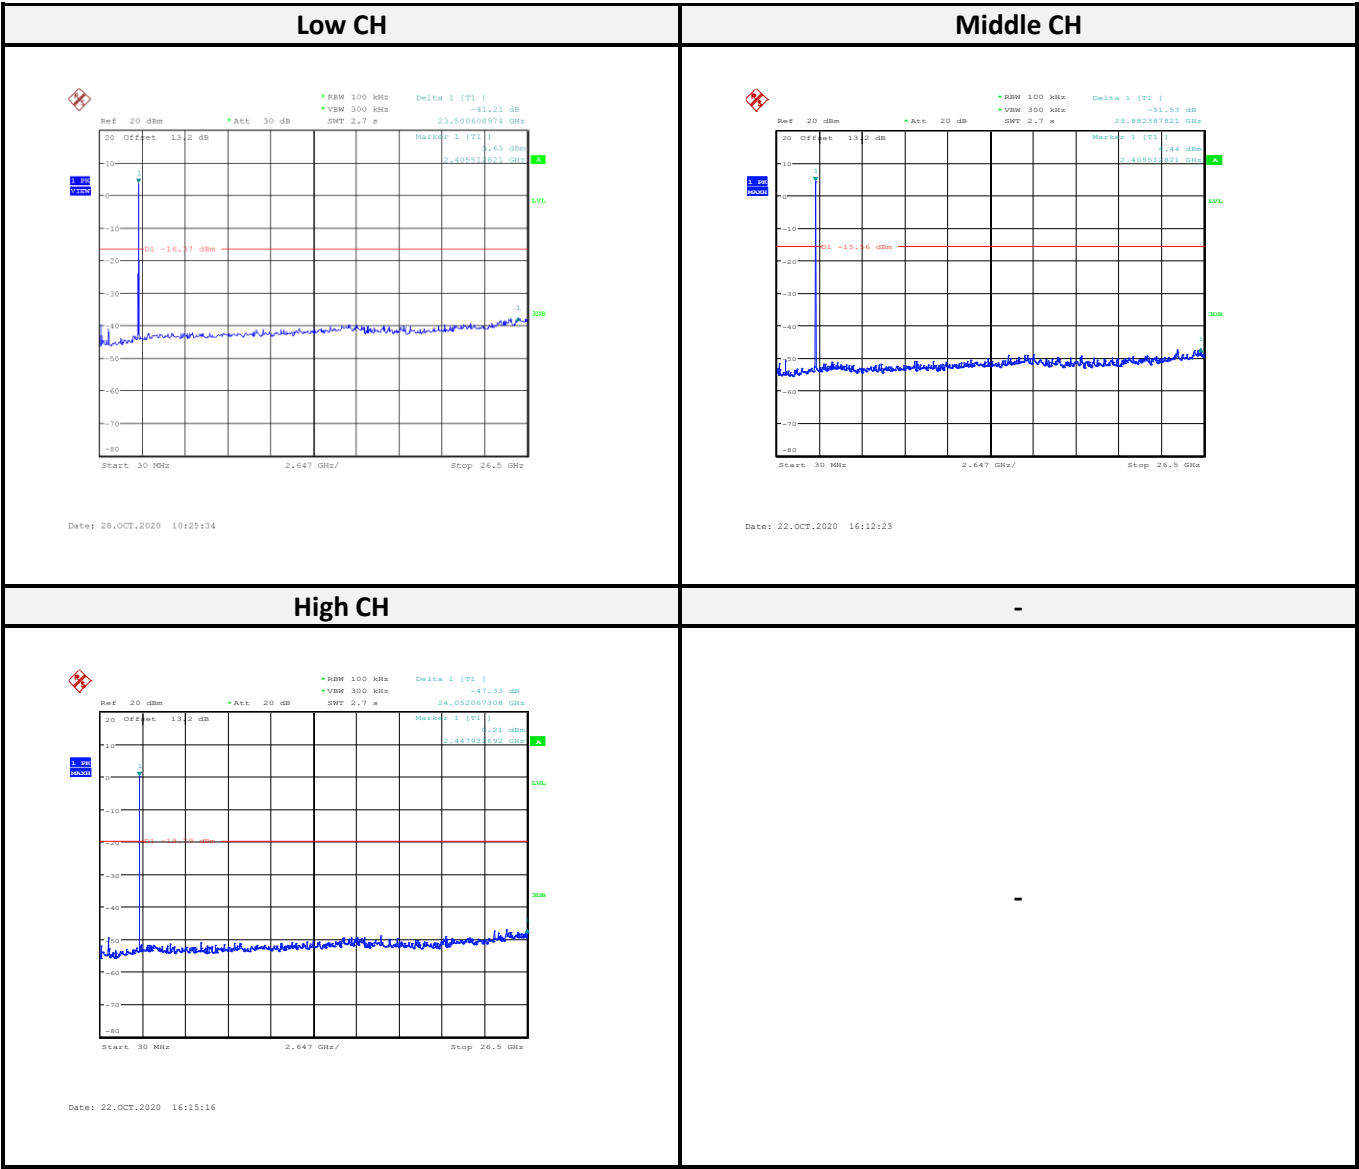

EDR-3Mbps:

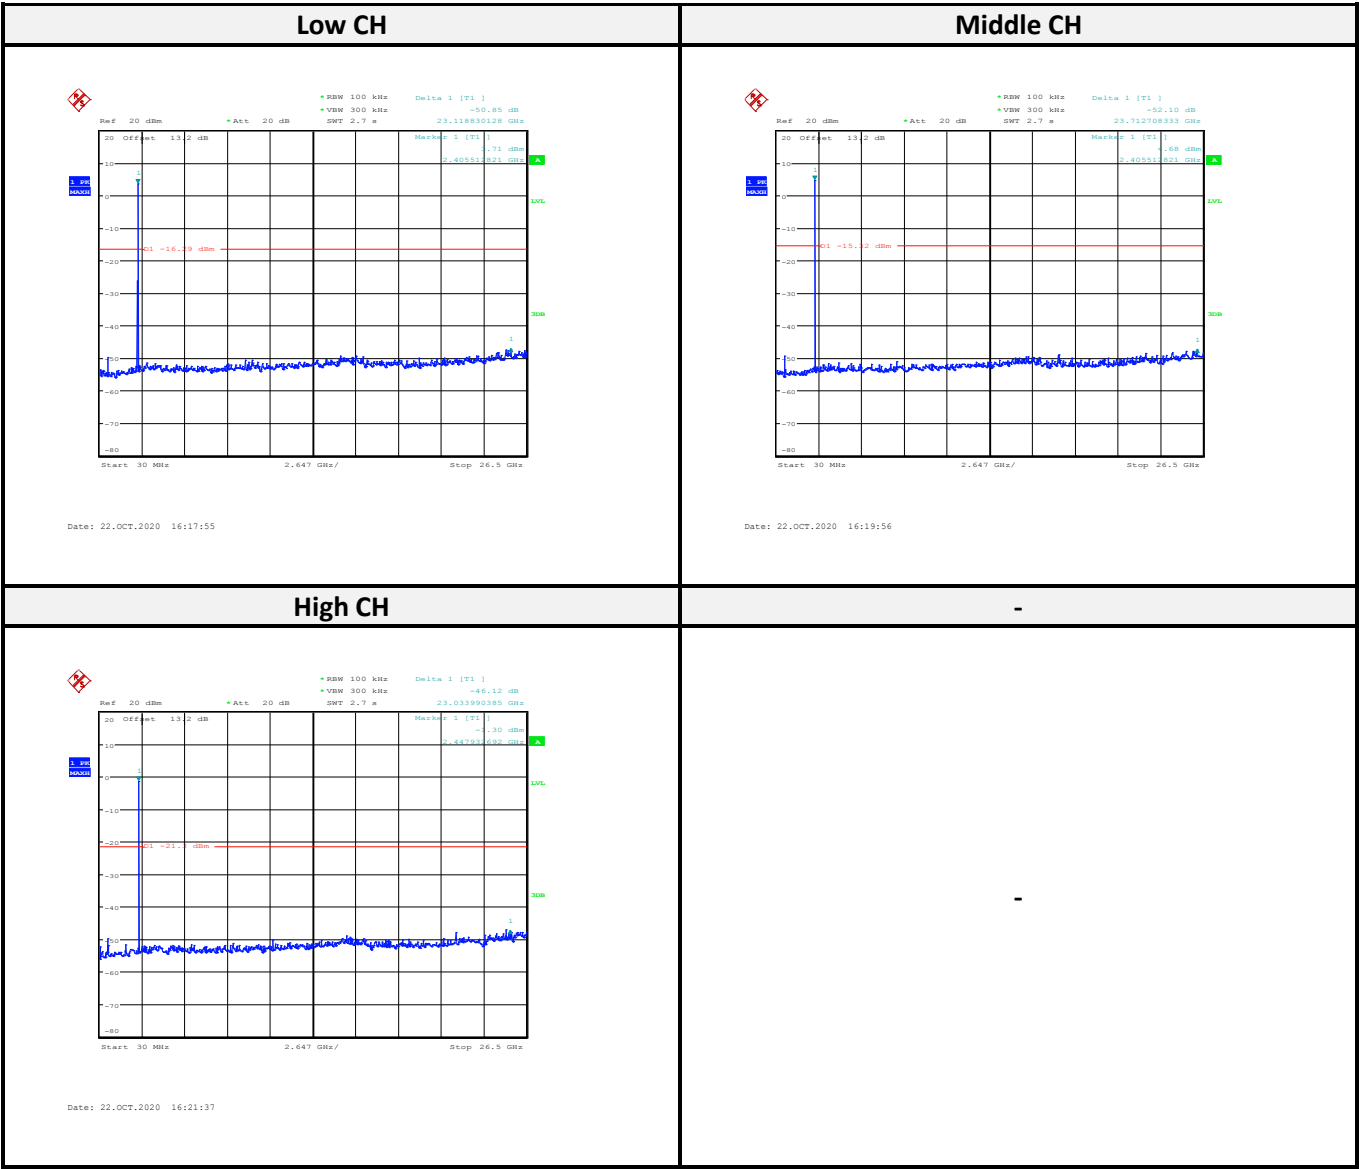

8 FCC §15.247(a)(1) – 20 dB Emission Bandwidth

8.1 Applicable Standard

According to FCC §15.247(a) (1) the maximum 20 dB bandwidth of the hopping channel shall be presented.

8.2 Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (3) Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- (4) Repeat above procedures until all frequencies measured were complete.

8.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2020/03/11	2021/03/10
Cable	MTJ	MT40S	620620-MT40S-100	Each use	-
SMA 10dB Fixed Attenuator	MVE	2W 6GHz	N/A	Each use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


8.4 Test Results

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BR-1Mbps		
Low	2402	0.96
Middle	2441	0.96
High	2480	1.01
EDR-2Mbps		
Low	2402	1.28
Middle	2441	1.30
High	2480	1.28
EDR-3Mbps		
Low	2402	1.30
Middle	2441	1.30
High	2480	1.30

BR-1Mbps:

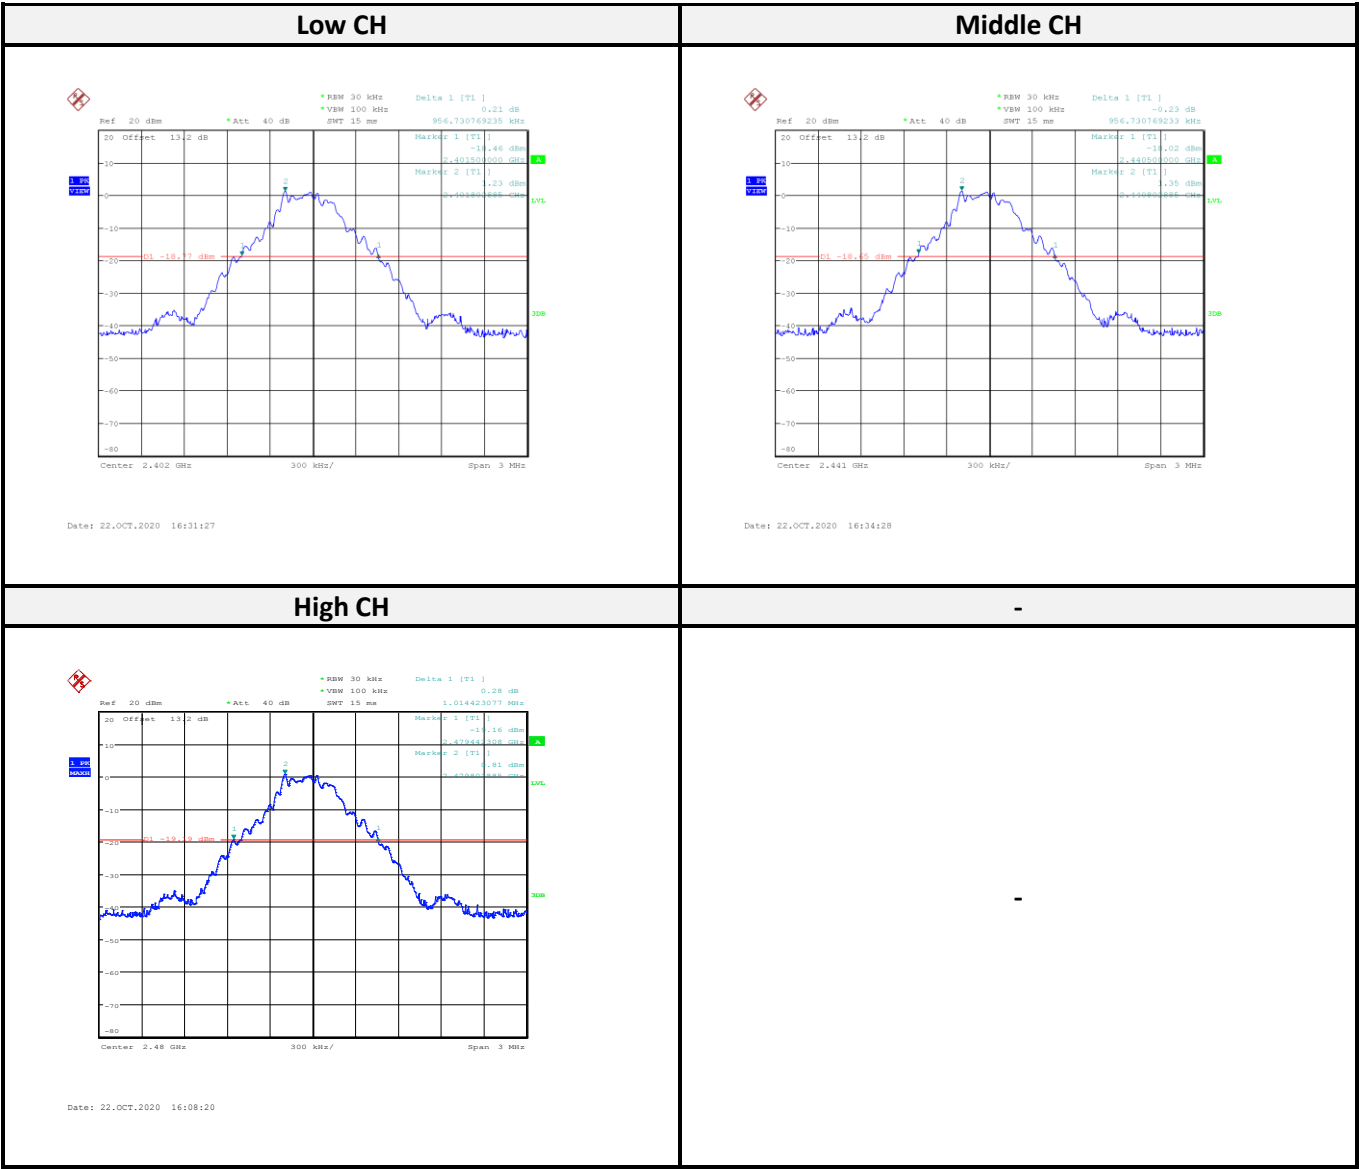

EDR-2Mbps:

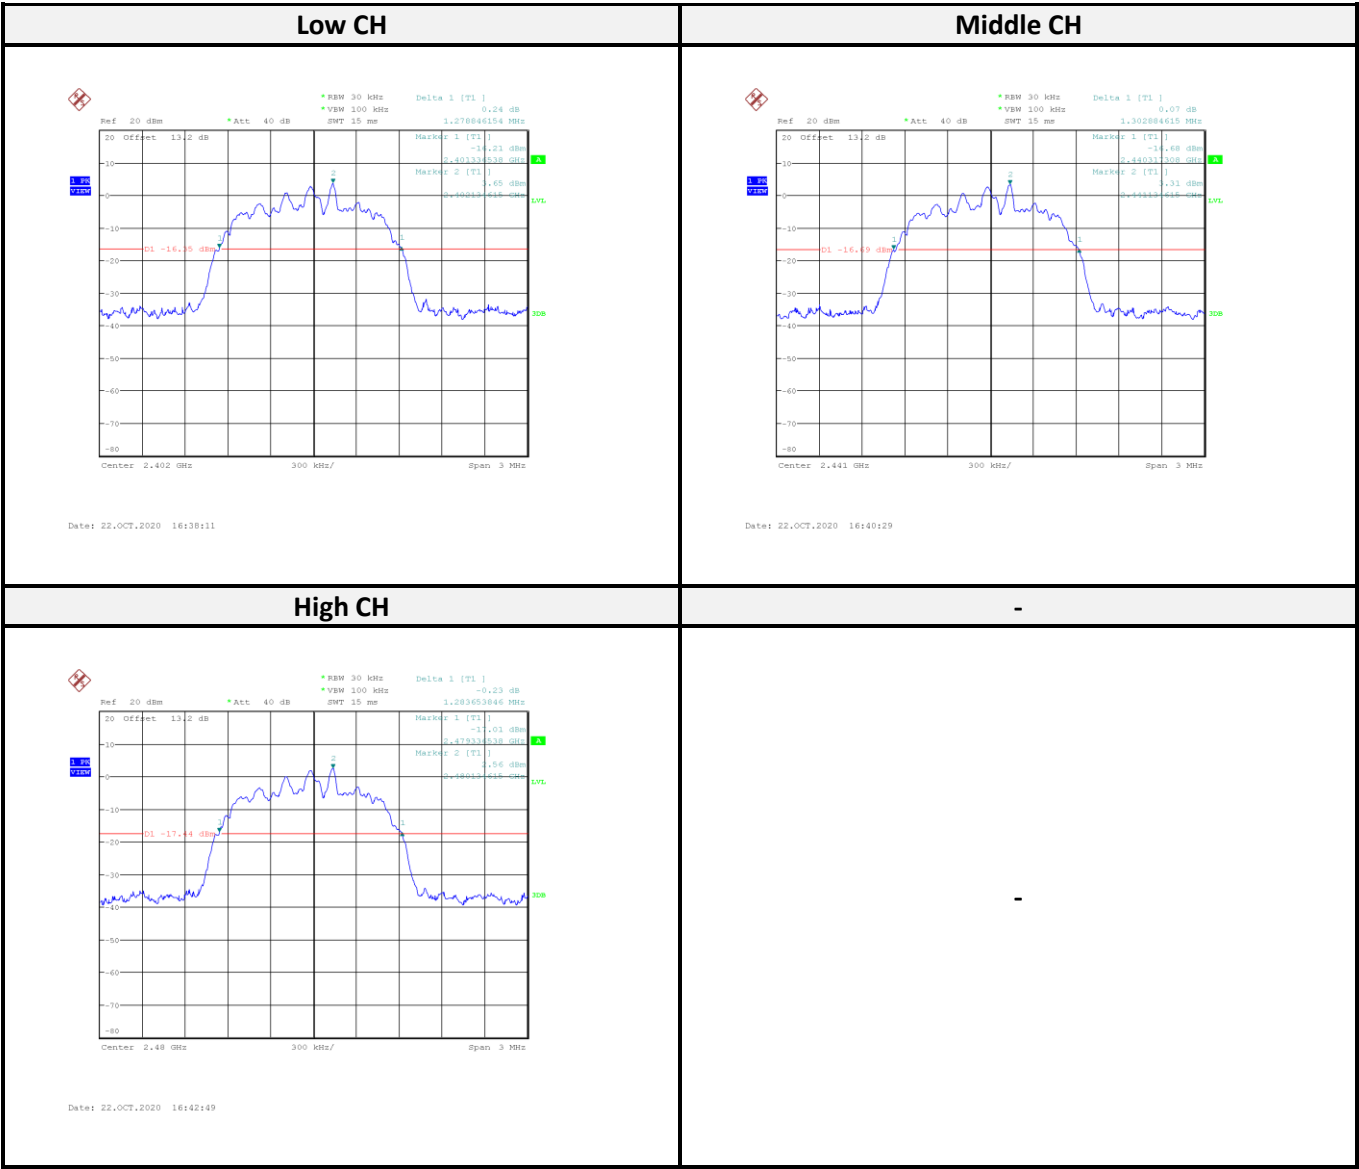

Low CH



Date: 22.OCT.2020 16:19:22

Date: 22 OCT 2020 16:20:45

9 FCC §15.247(a)(1) – Channel Separation Test

9.1 Applicable Standard

According to FCC §15.247(a) (1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

9.2 Test Procedure

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\approx$ 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel. Video (or Average) Bandwidth (VBW) $\geq$ RBW. Sweep = auto

Detector function = peak Trace = max hold

9.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2020/03/11	2021/03/10
Cable	MTJ	MT40S	620620-MT40S-100	Each use	-
SMA 10dB Fixed Attenuator	MVE	2W 6GHz	N/A	Each use	-


***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

9.4 Test Results


Channel	Frequency (MHz)	20 dBc BW (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BR-1Mbps					
Low	2402	0.96	1.01	0.638	Compliance
Middle	2441	0.96	1.00	0.638	Compliance
High	2480	1.01	1.00	0.676	Compliance
EDR-2Mbps					
Low	2402	1.28	1.00	0.853	Compliance
Middle	2441	1.30	1.00	0.869	Compliance
High	2480	1.28	1.01	0.856	Compliance
EDR-3Mbps					
Low	2402	1.30	1.00	0.865	Compliance
Middle	2441	1.30	1.01	0.869	Compliance
High	2480	1.30	1.00	0.869	Compliance

Note: Limit is >two-thirds of the 20 dB bandwidth


BR-1Mbps:

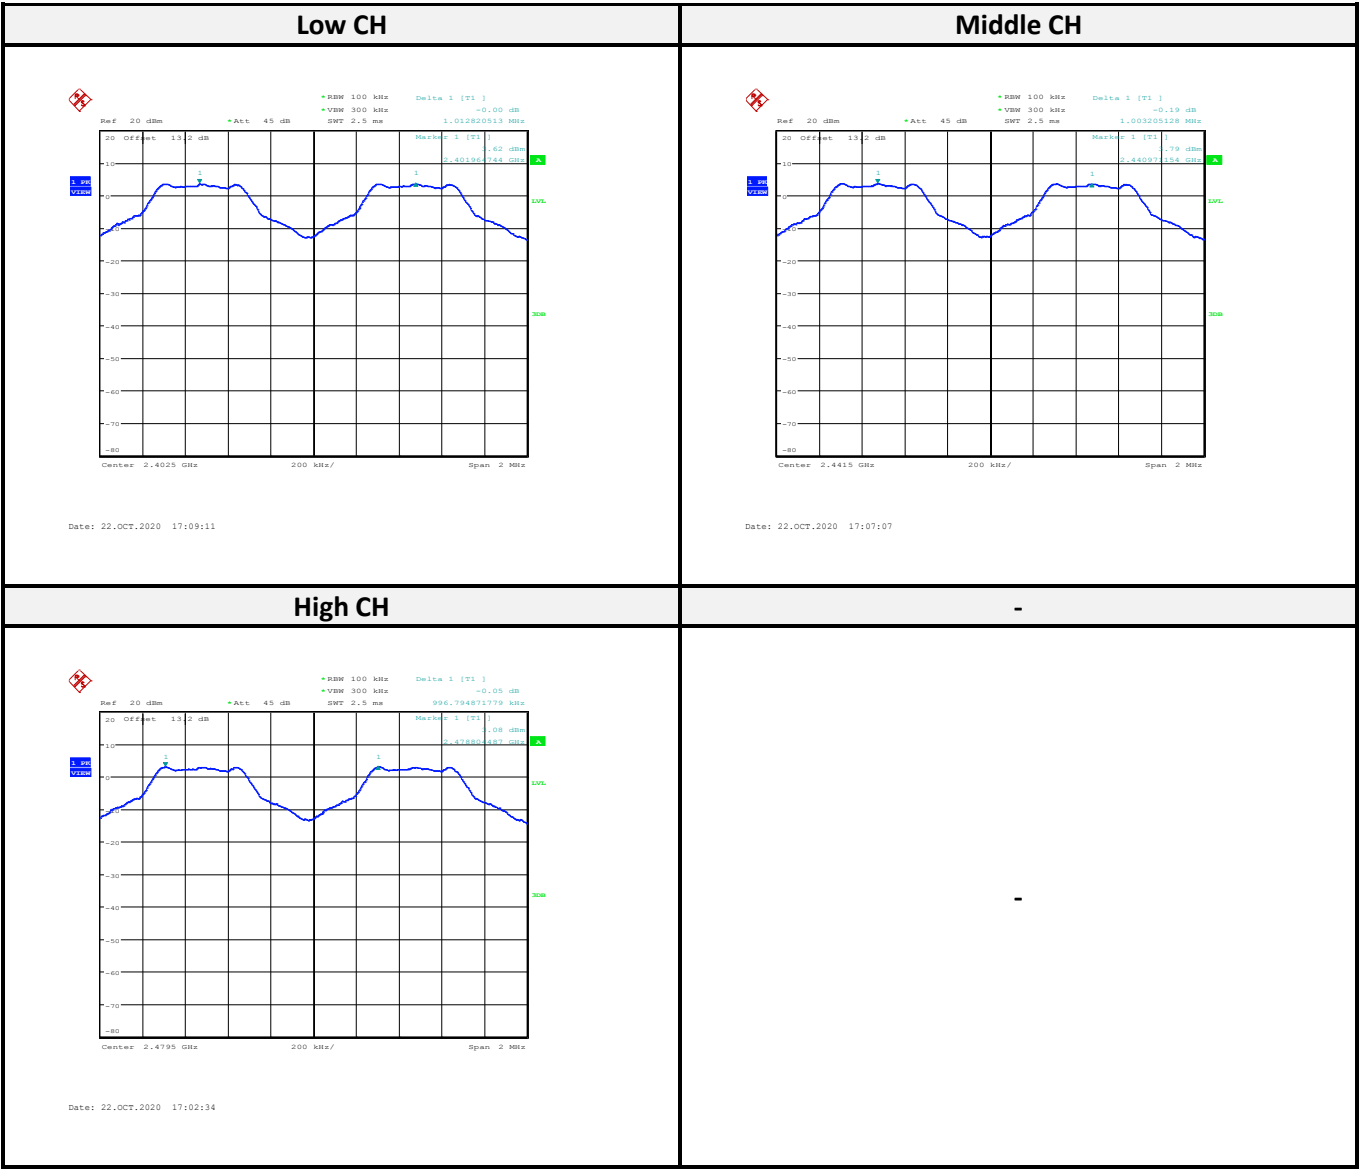

EDR-2Mbps:

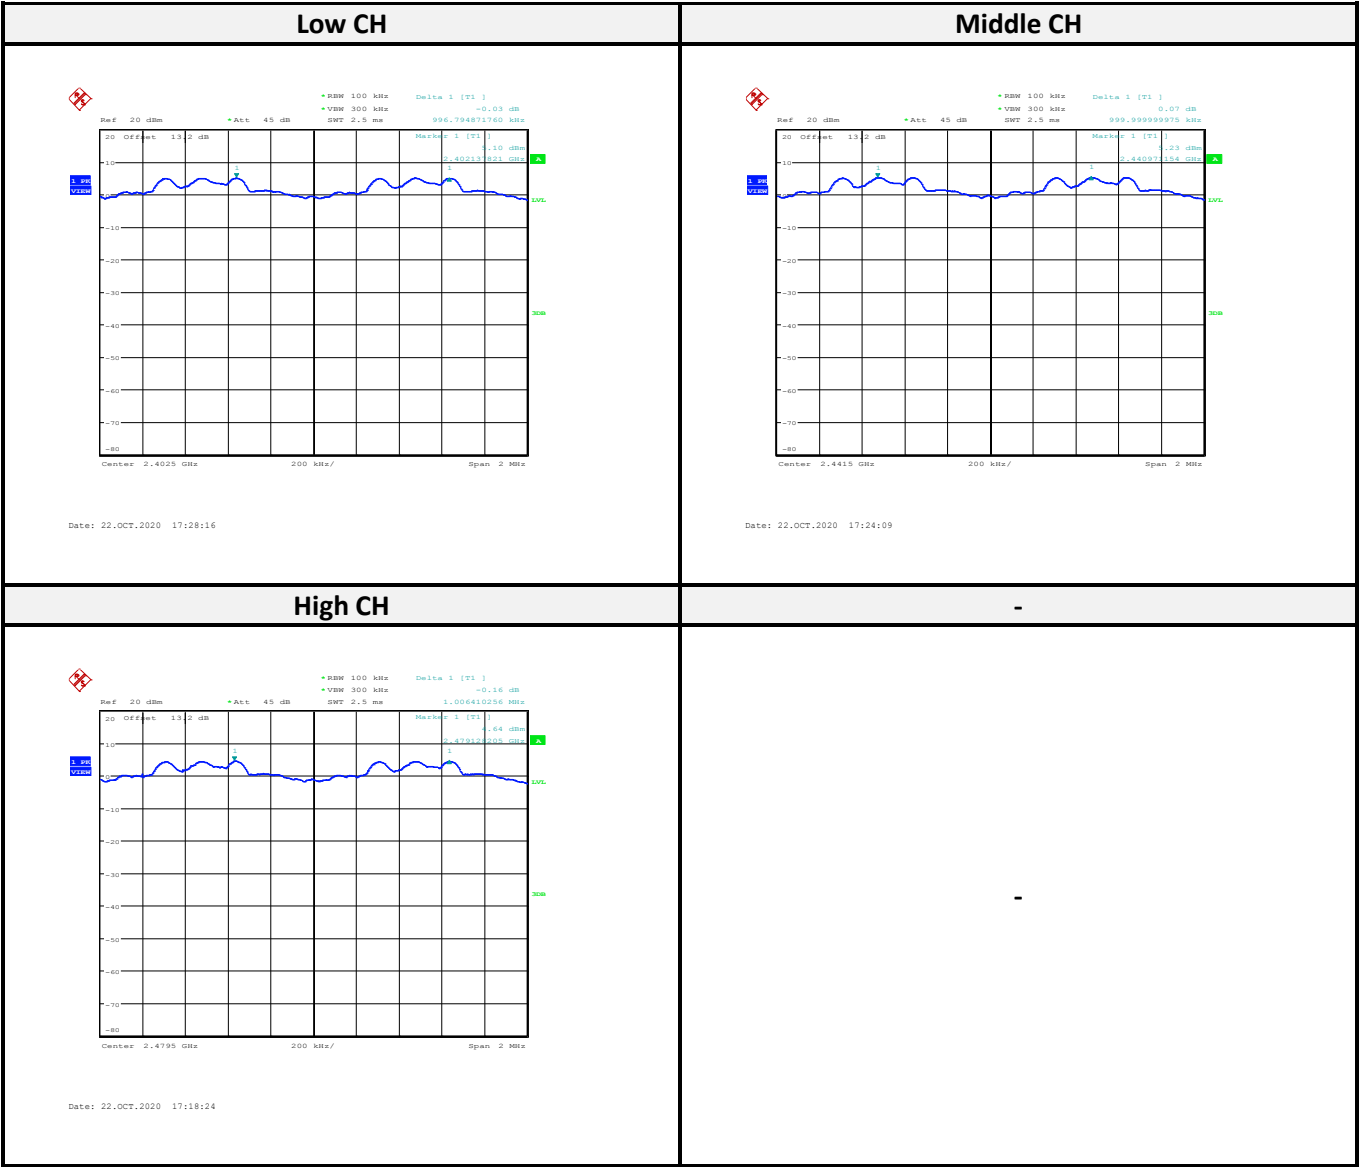

EDR-3Mbps:

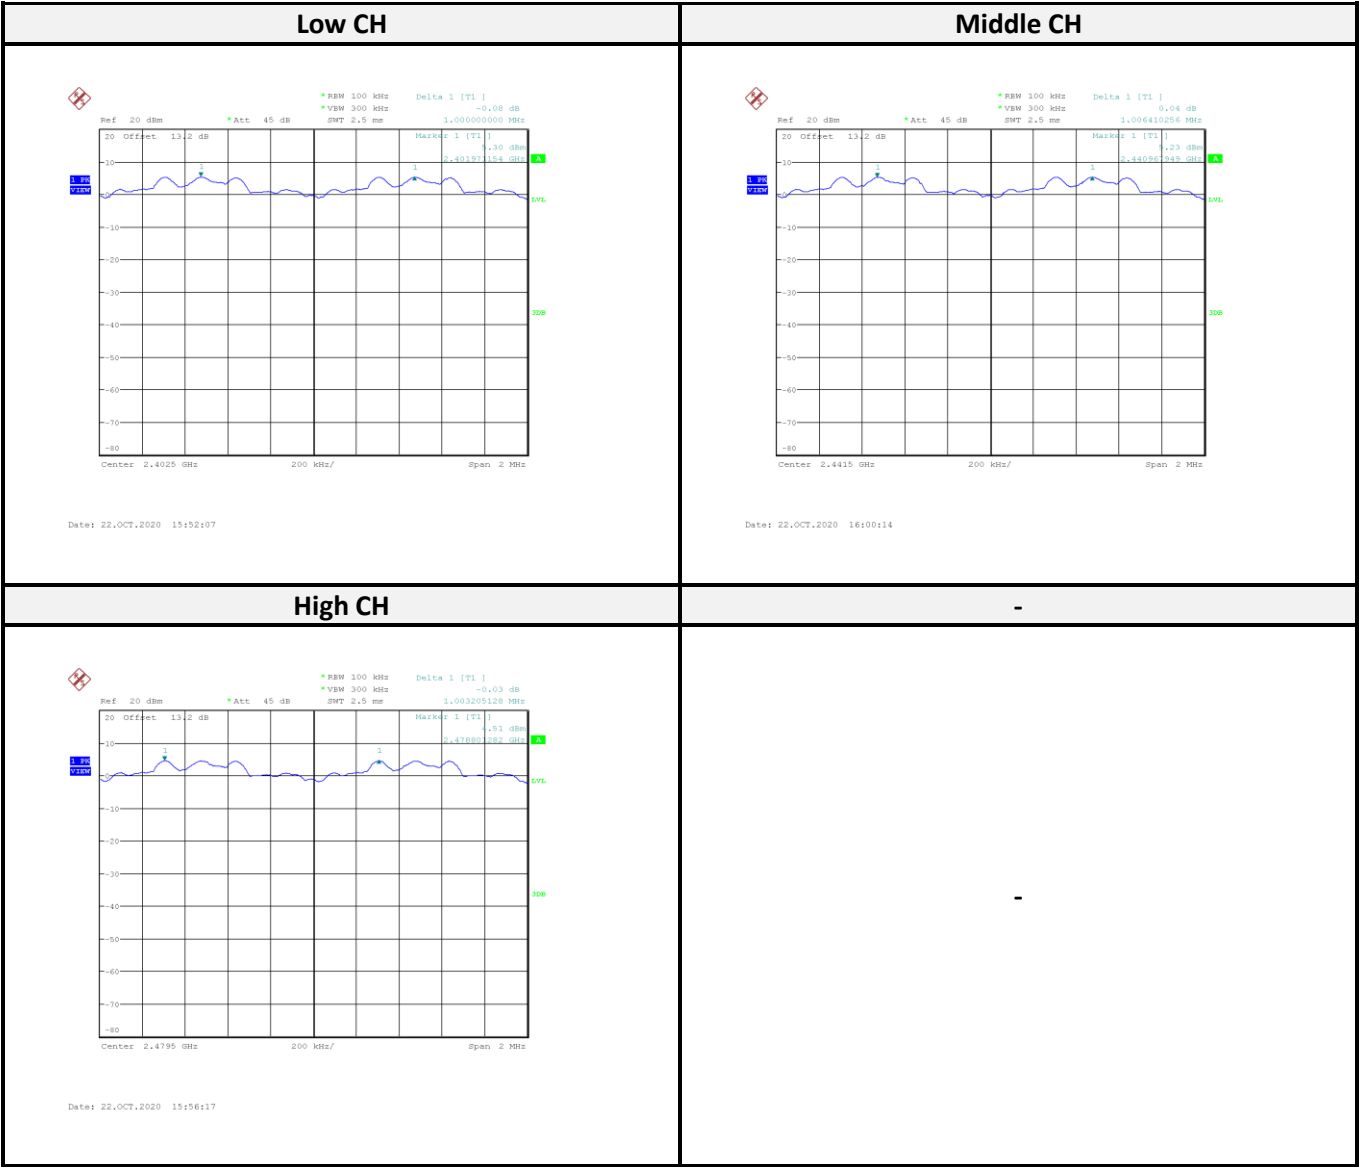

10 FCC §15.247(a)(1)(iii) – Time of Occupancy (Dwell Time)

10.1 Applicable Standard

According to FCC §15.247(a)(1)(iii),

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel

RBW $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep = as necessary to capture the entire dwell time per hopping channel Detector function = peak

Trace = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements.

Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) x (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

10.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2020/03/11	2021/03/10
Cable	MTJ	MT40S	620620-MT40S-100	Each use	-
SMA 10dB Fixed Attenuator	MVE	2W 6GHz	N/A	Each use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


10.4 Test Results

Modulation Mode	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
BR-1Mbps mode	2.98	106.7	0.318	0.4
EDR-2Mbps mode	2.95	106.7	0.314	0.4
EDR-3Mbps mode	2.95	106.7	0.315	0.4

Note1: Number of Pulse in [0.4 x N sec] = $1600/79/6 \times (0.4 \times 79)$

Note2: Dwell Time in [0.4 x N sec] = (Pulse Time * Number of Pulse in [0.4 x N sec])/1000

Note3: Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

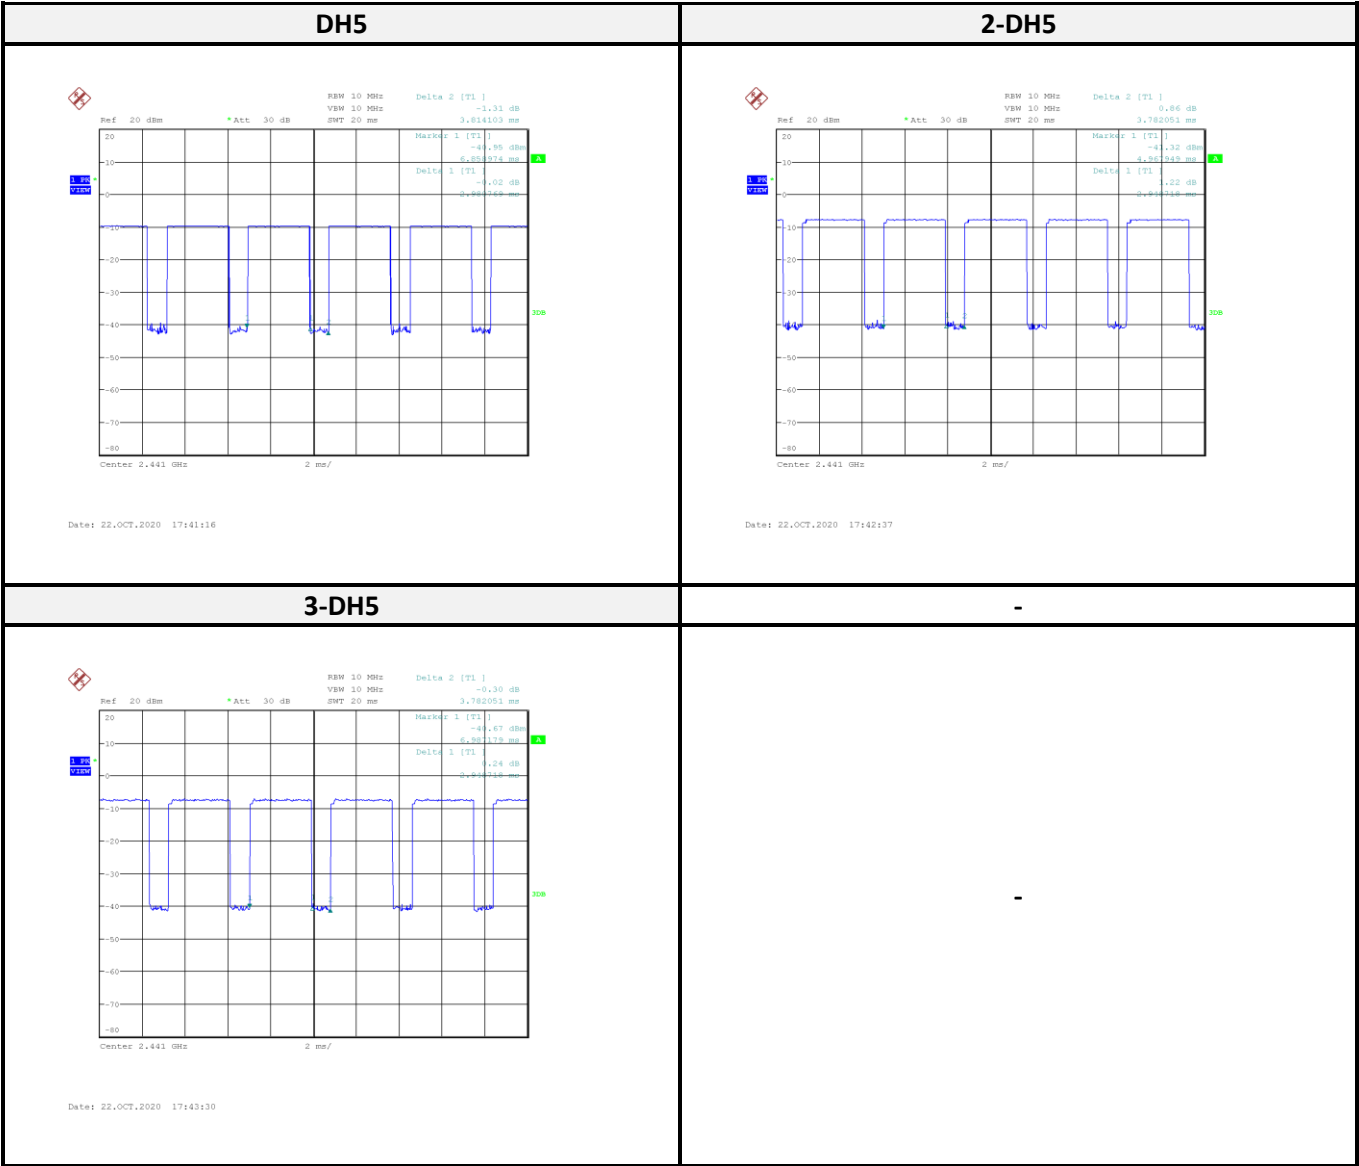

11 FCC §15.247(a)(1)(iii) –Quantity of hopping channel Test

11.1 Applicable Standard

According to FCC §15.247(a)(1)(iii),

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Test Procedure

Span = the frequency band of operation.

RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller VBW ≥ RBW.

Sweep = auto. Detector function = peak Trace = max hold.


11.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2020/03/11	2021/03/10
Cable	MTJ	MT40S	620620-MT40S-100	Each use	-
SMA 10dB Fixed Attenuator	MVE	2W 6GHz	N/A	Each use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

11.4 Test Results

Mode	Frequency Range (MHz)	Number of Hopping Channel	Limit (CH)	Result
BR-1Mbps	2402-2480	79	>15	Compliance
EDR-2Mbps	2402-2480	79	>15	Compliance
EDR-3Mbps	2402-2480	79	>15	Compliance

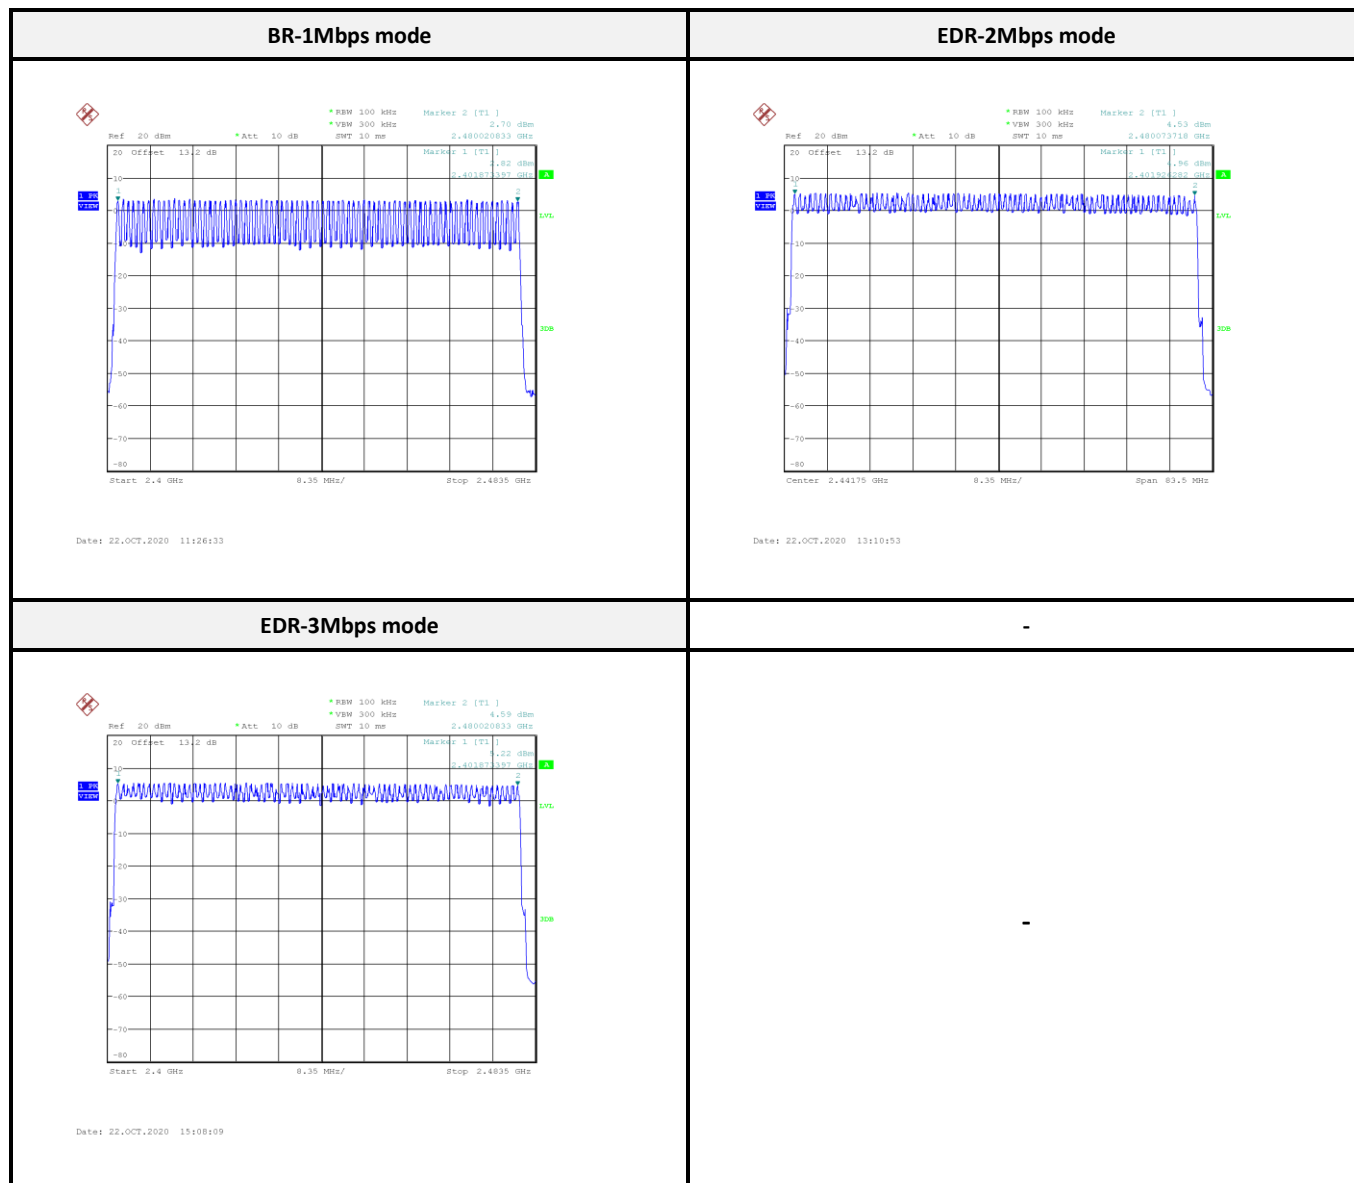

12 FCC §15.247(b)(1) – Maximum Output Power

12.1 Applicable Standard

According to FCC §15.247(b) (1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

12.2 Test Procedure

Place the EUT on a bench and set it in transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Power sensor.

12.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2020/03/11	2021/03/10
USB Wideband Power Sensor	Agilent	U2021XA	MY56120026	2020/09/14	2021/09/13
Cable	MTJ	MT40S	620620-MT40S-100	Each use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

12.4 Test Results

Configuration	Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (W)	Limit (dBm)	Result
BR-1Mbps	Low	2402	3.78	0.0024	21	Compliance
	Middle	2441	3.86	0.0024	21	Compliance
	High	2480	3.34	0.0022	21	Compliance
EDR-2Mbps	Low	2402	6.57	0.0045	21	Compliance
	Middle	2441	6.65	0.0046	21	Compliance
	High	2480	5.93	0.0039	21	Compliance
EDR-3Mbps	Low	2402	7.05	0.0051	21	Compliance
	Middle	2441	7.09	0.0051	21	Compliance
	High	2480	6.45	0.0044	21	Compliance

13 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

13.1 Applicable Standard

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c)

13.2 Test Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.

RBW = 100 kHz VBW = 300 kHz.

Sweep = coupled. Detector function = peak Trace = max hold.

13.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2020/03/11	2021/03/10
Cable	MTJ	MT40S	620620-MT40S-100	Each use	-
SMA 10dB Fixed Attenuator	MVE	2W 6GHz	N/A	Each use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


13.4 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BR-1Mbps				
Low	2402	54.26	≥ 20	Compliance
High	2480	54.28	≥ 20	Compliance
BR-1Mbps Hopping				
Low	2402	53.89	≥ 20	Compliance
High	2480	53.49	≥ 20	Compliance
EDR-2Mbps				
Low	2402	54.96	≥ 20	Compliance
High	2480	55.32	≥ 20	Compliance
EDR-2Mbps Hopping				
Low	2402	53.80	≥ 20	Compliance
High	2480	55.01	≥ 20	Compliance
EDR-3Mbps				
Low	2402	52.95	≥ 20	Compliance
High	2480	55.56	≥ 20	Compliance
EDR-3Mbps Hopping				
Low	2402	54.14	≥ 20	Compliance
High	2480	55.07	≥ 20	Compliance


BR-1Mbps:

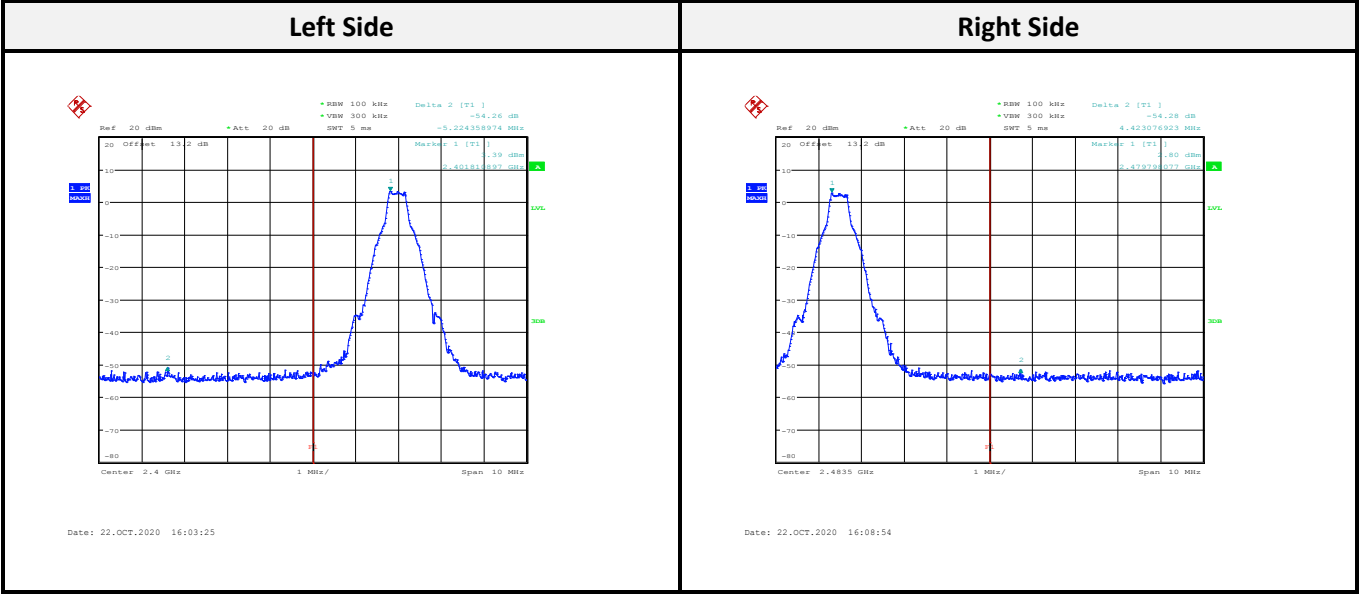


BR-1Mbps Hopping:

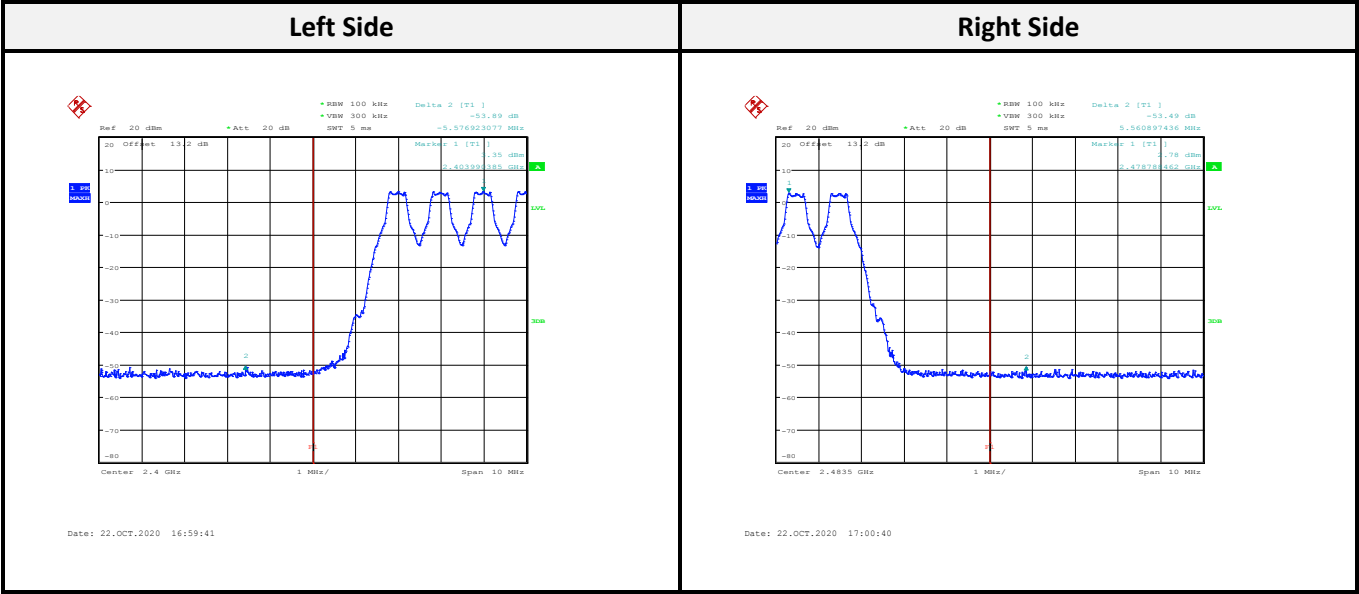


EDR-2Mbps:

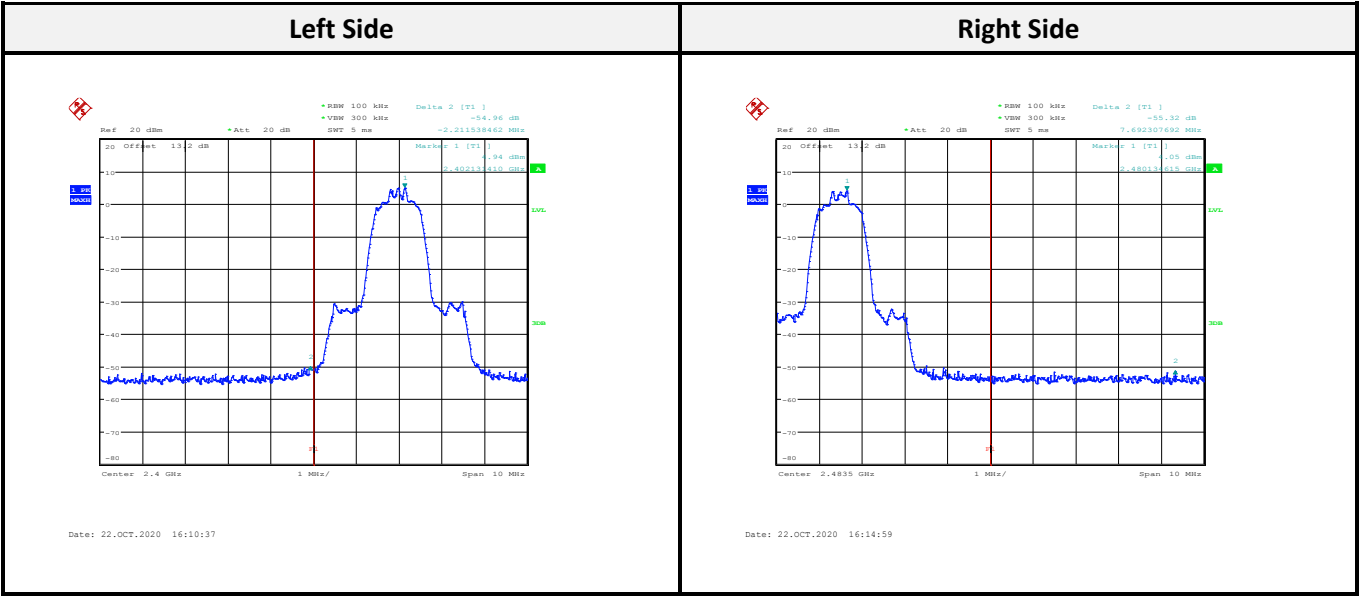


EDR-2Mbps Hopping:

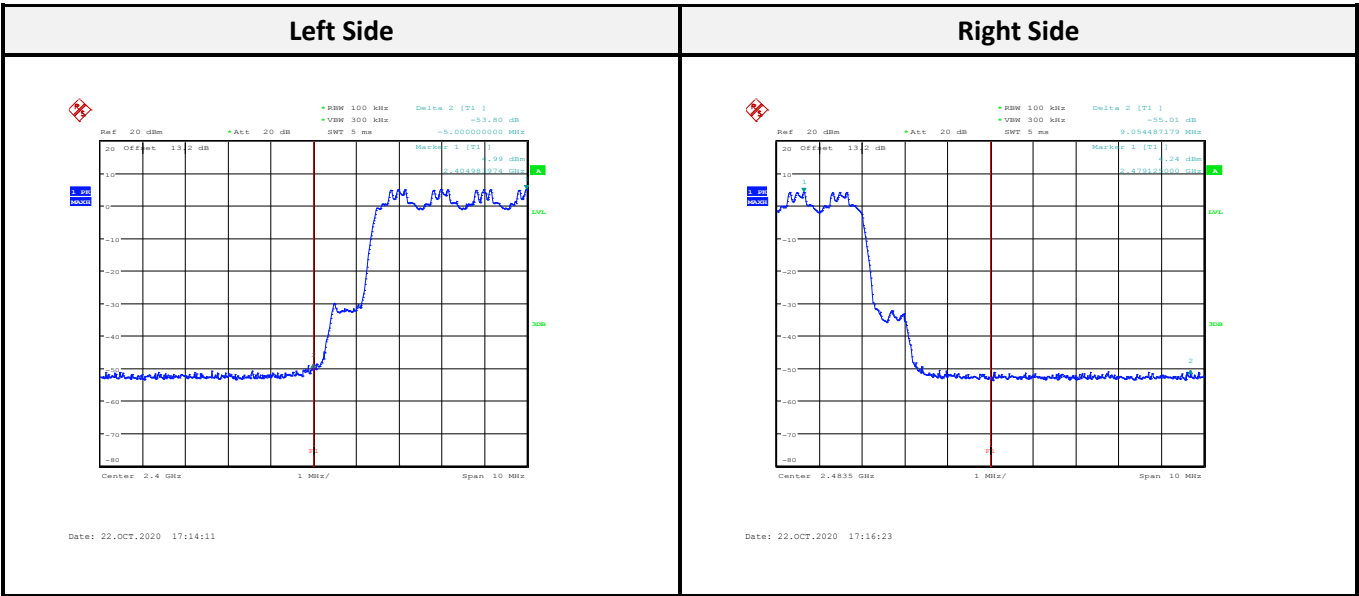

EDR-3Mbps:

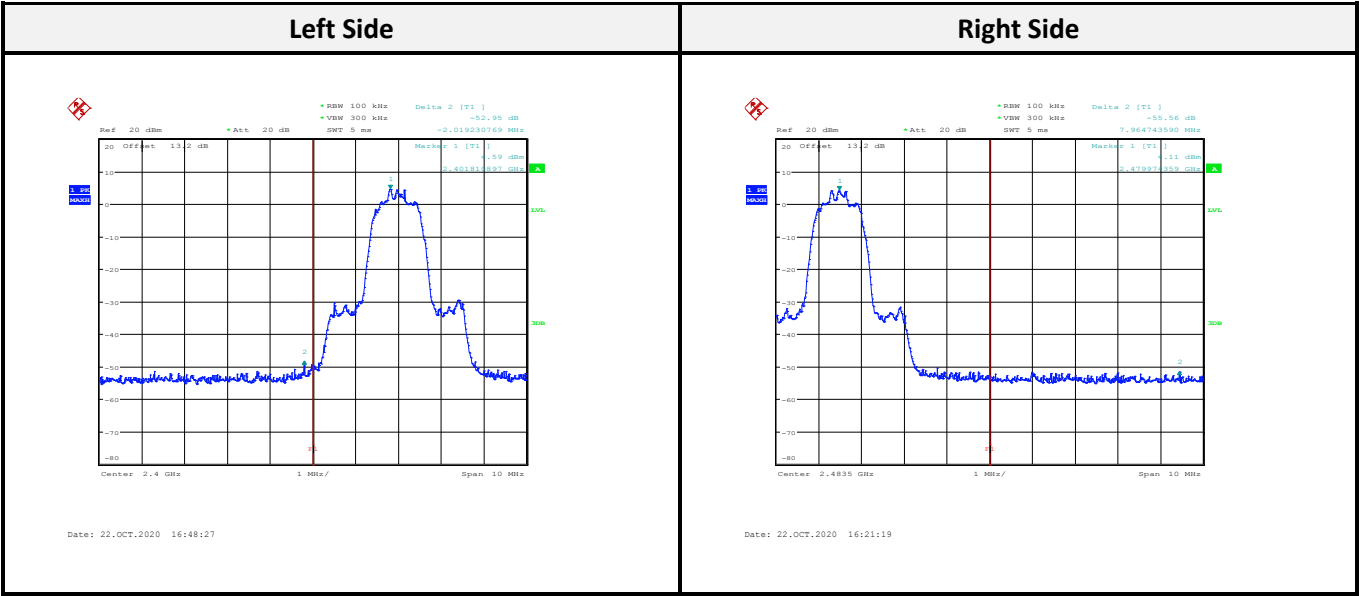

EDR-3Mbps Hopping:

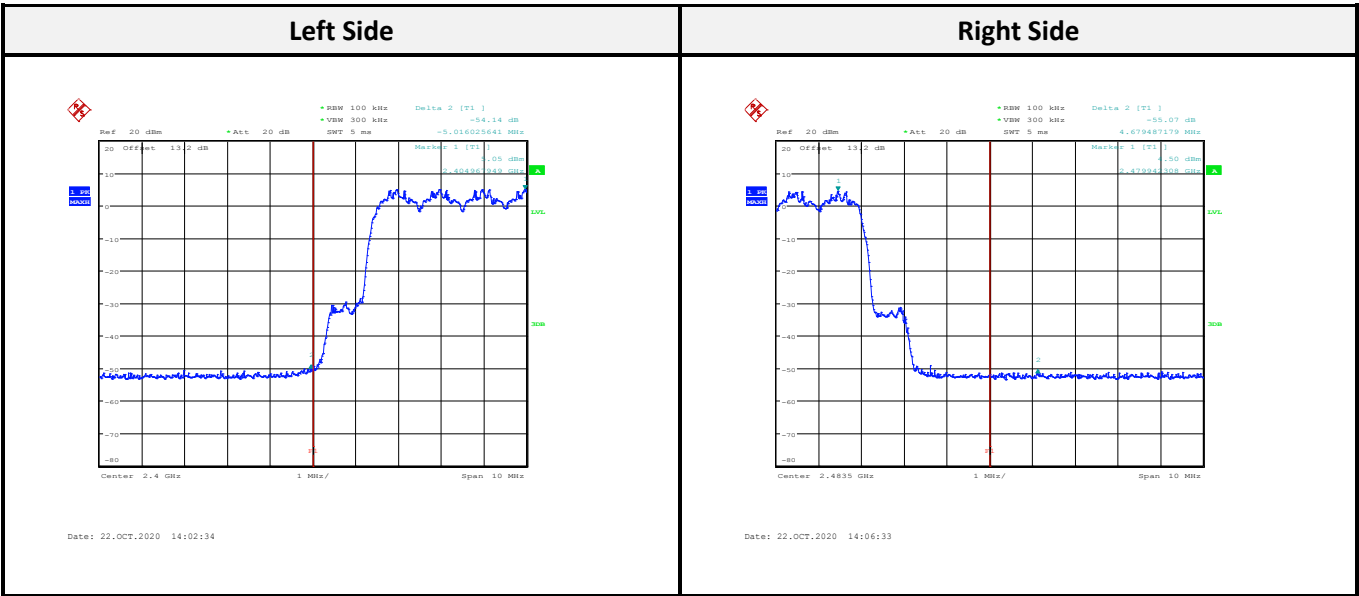

----- END OF REPORT -----