


FCC Test Report

FCC ID : I8803935
Equipment : 802.11be (WiFi 7) Triple-Radio Unified Pro
Access Point
Model No. : WBE660S
Brand Name : ZYXEL
Applicant : Zyxel Communications Corporation
Address : No.2 Industry East RD. IX, Hsinchu Science
Park, Hsinchu 30075, Taiwan, R.O.C
Standard : 47 CFR FCC Part 15.247
Received Date : Jul. 17, 2023
Tested Date : Aug. 10 ~ Aug. 23, 2023

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:


Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	9
1.4	Test Equipment List and Calibration Data.....	11
1.5	Test Standards	12
1.6	Reference Guidance	12
1.7	Deviation from Test Standard and Measurement Procedure.....	12
1.8	Measurement Uncertainty	12
2	TEST CONFIGURATION.....	13
2.1	Testing Facility	13
2.2	The Worst Test Modes and Channel Details	13
3	TRANSMITTER TEST RESULTS	14
3.1	6dB and Occupied Bandwidth.....	14
3.2	Conducted Output Power	15
3.3	Power Spectral Density	16
3.4	Unwanted Emissions in Restricted Frequency Bands	17
3.5	Emissions in non-restricted Frequency Bands.....	19
3.6	AC Power Line Conducted Emissions	20
4	TEST LABORATORY INFORMATION	21
Appendix A. 6dB and Occupied Bandwidth		
Appendix B. Conducted Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions into Restricted Frequency Bands		
Appendix E. Emissions in Non-Restricted Frequency Bands		
Appendix F. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR371702AE	Rev. 01	Initial issue	Sep. 22, 2023

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 16.226MHz 43.42 (Margin -6.58dB) - AV	Pass
15.247(d) 15.209	Unwanted Emissions	[dBuV/m at 3m]: 60.07MHz 36.88 (Margin -3.12dB) – PK0	Pass
15.247(b)(3)	Conducted Output Power	Power [dBm]: 5.84	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	LE	2402-2480	0-39 [40]	125 kbps
				500 kbps
				1 Mbps
				2 Mbps
Note: Bluetooth LE (Low energy) uses GFSK modulation.				

1.1.2 Antenna Details

Brand	Model	Type	Connector	Gain (dBi)
M.gear	D047	PIFA	UFL	0.97

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	15Vdc from adapter 56Vdc from PoE injector
-------------------	---

Note: The above power supplies are not bundled in market.

1.1.4 Accessories

N/A

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	SmartRF Studio 7, version: 2.28.0	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
BT-LE(125kbps)	100.00%	0.00
BT-LE(500kbps)	100.00%	0.00
BT-LE(1Mbps)	100.00%	0.00
BT-LE(2Mbps)	100.00%	0.00



1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
BT-LE(125kbps)	5	5	5
BT-LE(500kbps)	5	5	5
BT-LE(1Mbps)	5	5	5
BT-LE(2Mbps)	5	5	5

1.2 Local Support Equipment List


Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Latitude 5400	DoC	---
2	Laptop	DELL	Latitude E5470	DoC	---
3	PoE injector	ZYXEL	PoE12-60W	---	Provided by applicant. Remarks: I/P: 100-240V~50-60Hz 2.0A O/P: 56.0V=1.161A, 65.1W
4	Adapter	DEEVAN	DSA-45PDH	---	Provided by applicant. Remarks: I/P: 100-240V~50/60Hz 1.5A O/P: +15.0V=3.0A, 45.0W
5	BLE fixture	TI LaunchPad	LP-XDS110ET	---	Provided by applicant.

Note: The BLE fixture is removing from test table after sending command to EUT to control EUT to transmit continuously.

1.3 Test Setup Chart

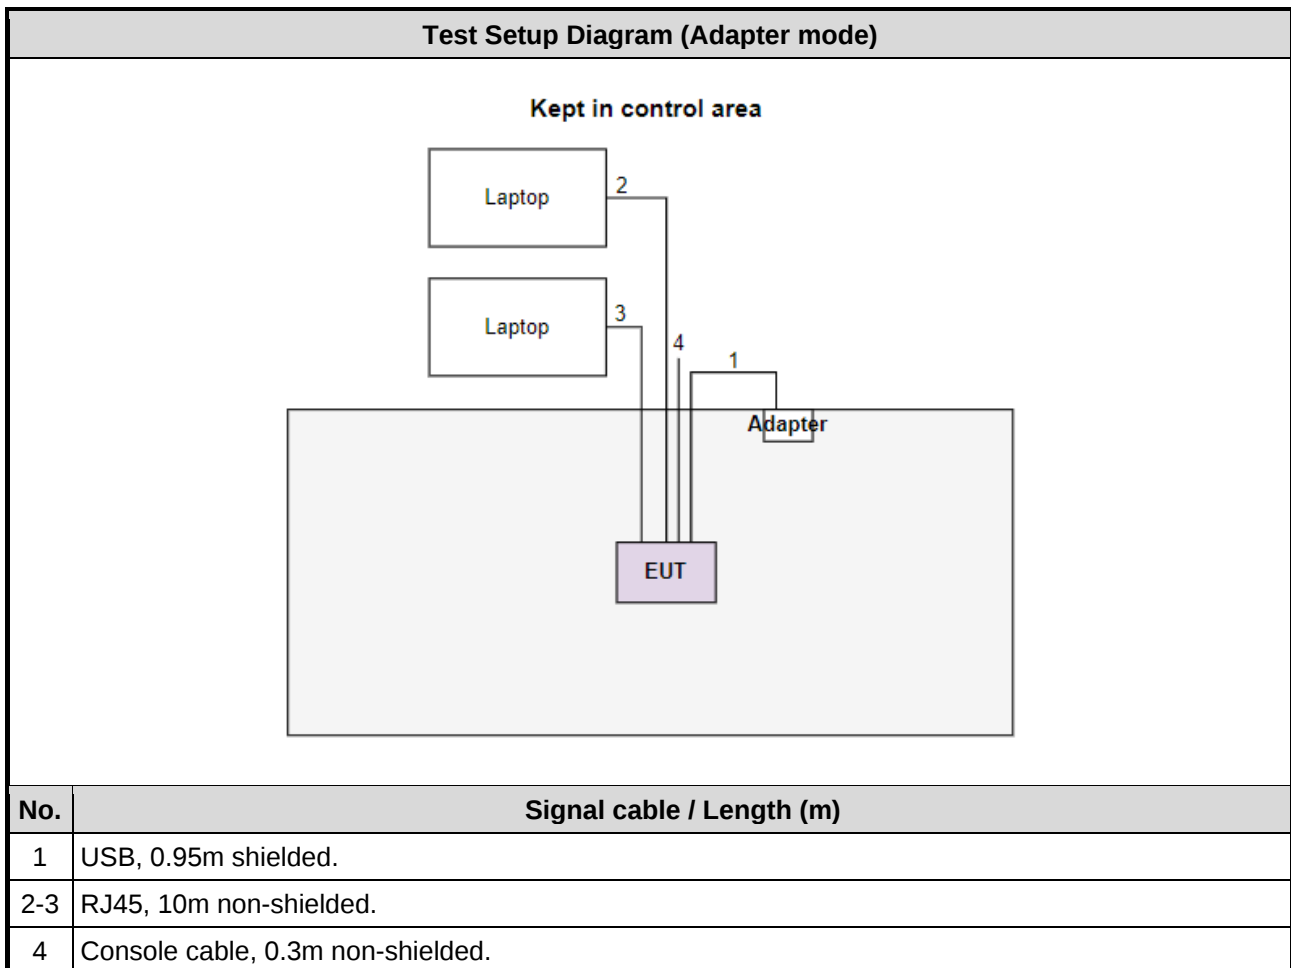

Test Setup Diagram (POE mode)

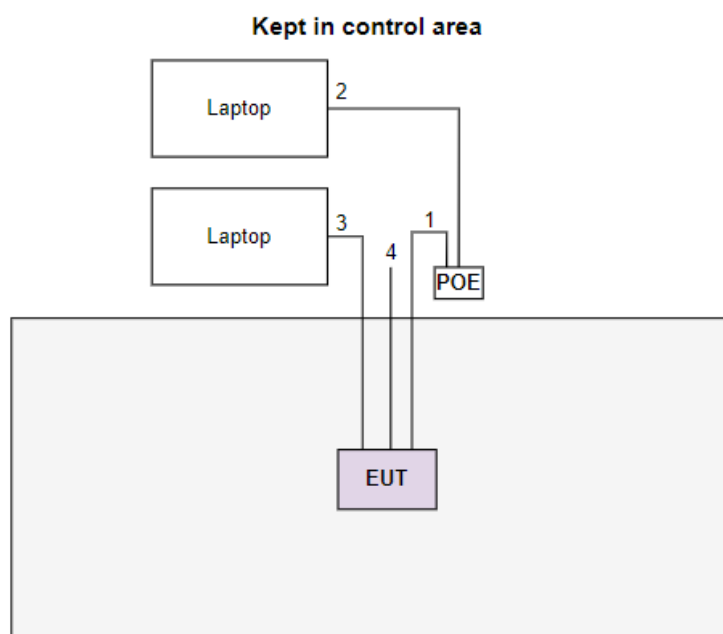

No.	Signal cable / Length (m)
1	RJ45, 10m non-shielded.
2	RJ45, 1.3m non-shielded.
3	RJ45, 10m non-shielded.
4	Console cable, 0.3m non-shielded.

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Aug. 23, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 17, 2023	Feb. 16, 2024
LISN	R&S	ENV216	101579	May 09, 2023	May 08, 2024
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127667	Jan .03, 2023	Jan .02, 2024
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 17, 2022	Oct. 16, 2023
50 ohm terminal (Support Unit)	NA	50	01	Jun. 14, 2023	Jun. 13, 2024
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Aug. 10 ~ Aug. 17, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 03, 2023	Mar. 02, 2024
Spectrum Analyzer	R&S	FSV40	101499	Mar. 16, 2023	Mar. 15, 2024
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 01, 2022	Oct. 31, 2023
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2023	Jul. 03, 2024
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 15, 2022	Dec. 14, 2023
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 27, 2022	Oct. 26, 2023
Preamplifier	EMC	EMC02325	980187	Jul. 10, 2023	Jul. 09, 2024
Preamplifier	EMC	EMC184045SE	980897	Aug. 01, 2023	Jul. 31, 2024
Preamplifier	EMC	EMC184045SE	980903	Jul. 17, 2023	Jul. 16, 2024
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 04, 2022	Oct. 03, 2023
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 23, 2022	Sep. 22, 2023
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 23, 2022	Sep. 22, 2023
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 23, 2022	Sep. 22, 2023
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 23, 2022	Sep. 22, 2023
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 23, 2022	Sep. 22, 2023
Attenuator	Pasternack	PE7005-10	10-3	Oct. 14, 2022	Oct. 13, 2023
HIGHPASS FILTER	WI	WHK3.1-18G-10SS	43	Sep. 28, 2022	Sep. 27, 2023
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Aug. 10, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 14, 2023	Apr. 13, 2024
Power Meter	Anritsu	ML2495A	1241002	Nov. 23, 2022	Nov. 22, 2023
Power Sensor	Anritsu	MA2411B	1207366	Nov. 23, 2022	Nov. 22, 2023
Attenuator	Pasternack	PE7005-10	10-2	Oct. 06, 2022	Oct. 05, 2023
Measurement Software	Sporton	SENSE-15247_FS	V5.10.8	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.96 dB
Unwanted Emission > 1 GHz	± 4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Test Configuration
AC Power Line Conducted Emissions	BT-LE(1Mbps)	2402	1, 2
Unwanted Emissions $\leq$ 1GHz	BT-LE(1Mbps)	2402	1, 2
Unwanted Emissions $>$ 1GHz	BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480	1
Conducted Output Power	BT-LE(125kbps) BT-LE(500kbps) BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480	1
6dB bandwidth Power spectral density	BT-LE(125kbps) BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480	1
NOTE: 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report. 2. The EUT had been tested by following test configurations. 1) Configuration 1: Adapter mode 2) Configuration 2: POE mode			

3 Transmitter Test Results

3.1 6dB and Occupied Bandwidth

3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.1.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.1.3 Test Setup



3.1.4 Test Results

Ambient Condition	26°C / 68%	Tested By	Akun Chung
-------------------	------------	-----------	------------

Refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Limit of Conducted Output Power


Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.2.3 Test Setup



3.2.4 Test Results

Ambient Condition	26°C / 68%	Tested By	Akun Chung
-------------------	------------	-----------	------------

Refer to Appendix B.

3.3 Power Spectral Density


3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.3.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.3.3 Test Setup



3.3.4 Test Results

Ambient Condition	26°C / 68%	Tested By	Akun Chung
-------------------	------------	-----------	------------

Refer to Appendix C.

3.4 Unwanted Emissions in Restricted Frequency Bands

3.4.1 Limit of Unwanted Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9~90 kHz, 110~490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

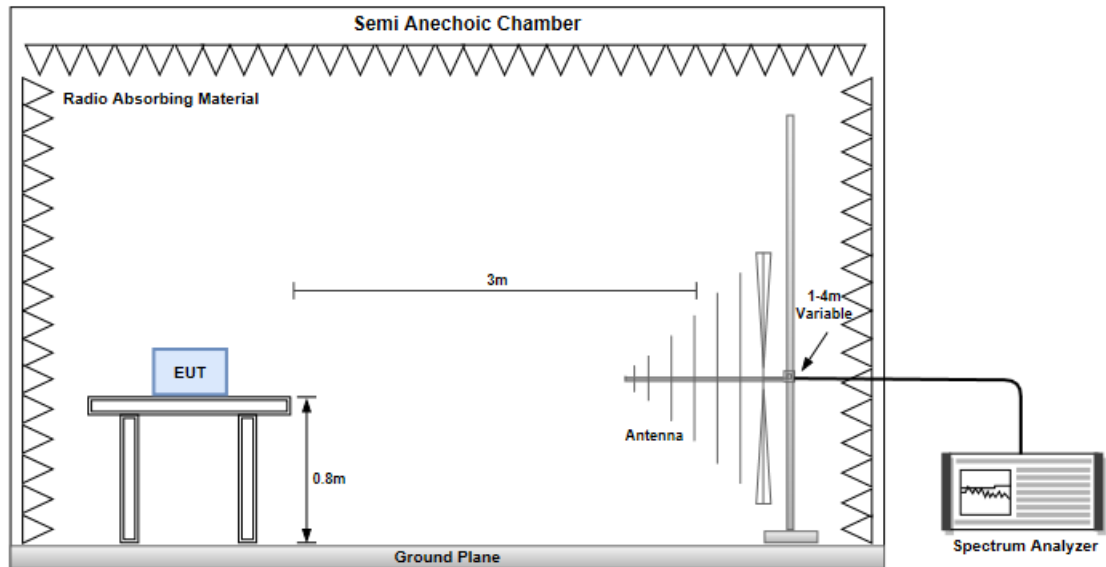

Radiated Emissions above 1 GHz

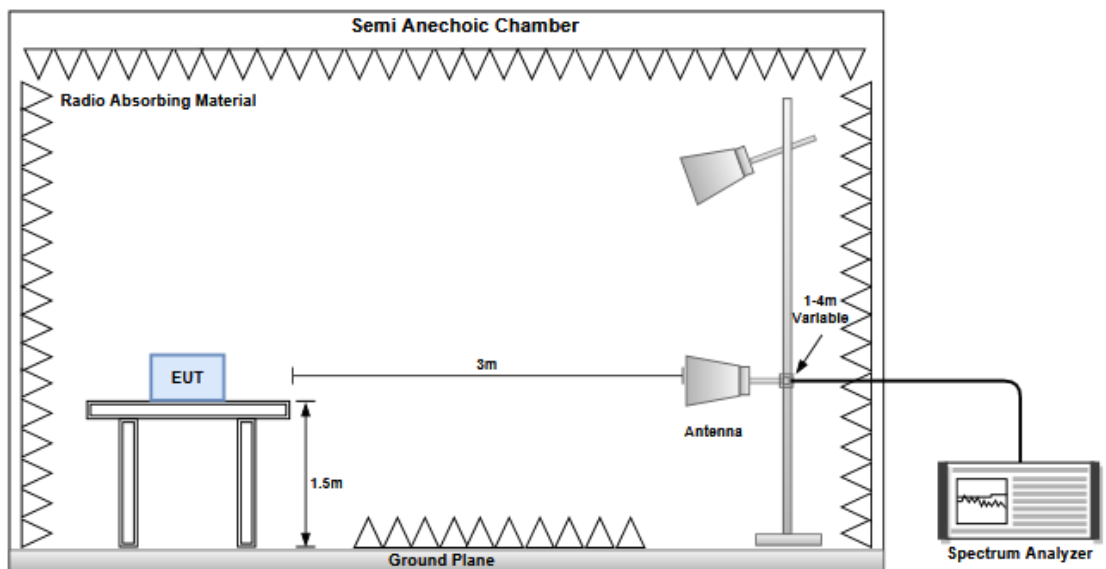

3.4.4 Test Results

Refer to Appendix D.

3.5 Emissions in non-restricted Frequency Bands

3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.5.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	26°C / 68%	Tested By	Akun Chung
-------------------	------------	-----------	------------

Refer to Appendix E.

3.6 AC Power Line Conducted Emissions

3.6.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.6.3 Test Setup

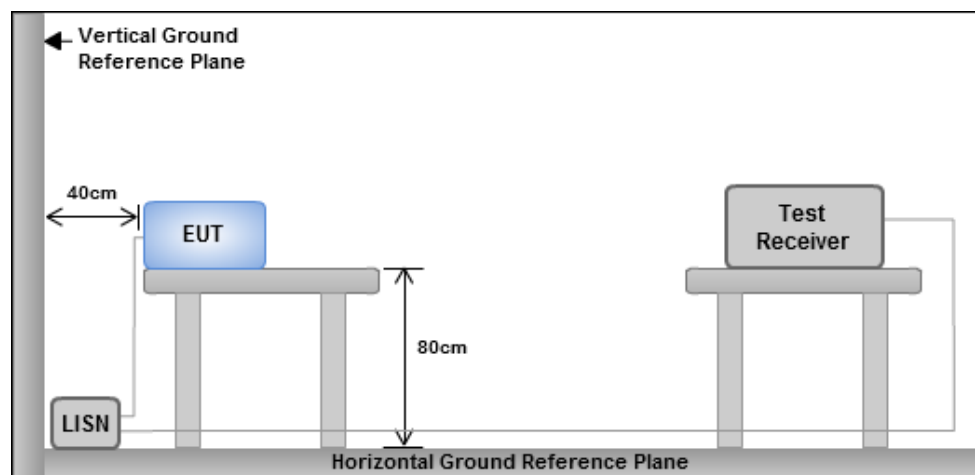

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.6.4 Test Results

Refer to Appendix F.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(125kbps)	773.75k	1.094M	1M09F1D	757.5k	1.088M
BT-LE(1Mbps)	735k	1.076M	1M08F1D	723.75k	1.066M
BT-LE(2Mbps)	1.53M	2.101M	2M10F1D	1.383M	2.094M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	500k	757.5k	1.088M
2440MHz	Pass	500k	773.75k	1.094M
2480MHz	Pass	500k	757.5k	1.091M
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	723.75k	1.066M
2440MHz	Pass	500k	725k	1.068M
2480MHz	Pass	500k	735k	1.076M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.473M	2.094M
2440MHz	Pass	500k	1.53M	2.096M
2480MHz	Pass	500k	1.383M	2.101M



Port X-N dB = Port X 6dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_BT-LE(125kbps)

EBW-DTS



2402MHz

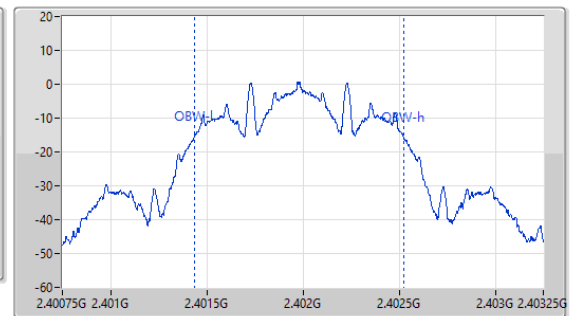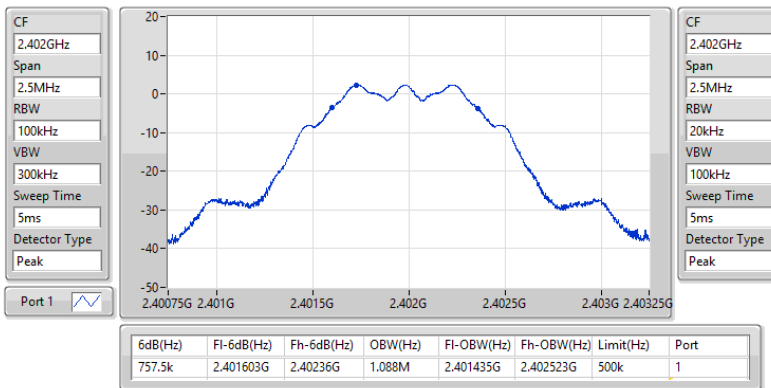

2.4-2.4835GHz_BT-LE(125kbps)

EBW-DTS



2440MHz

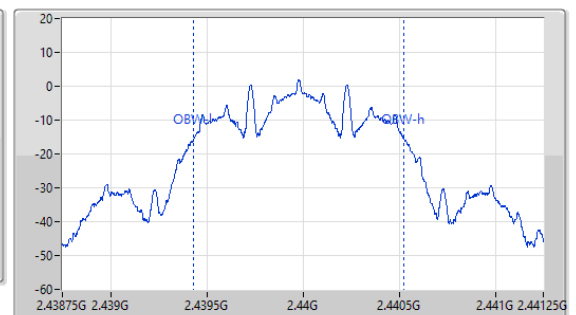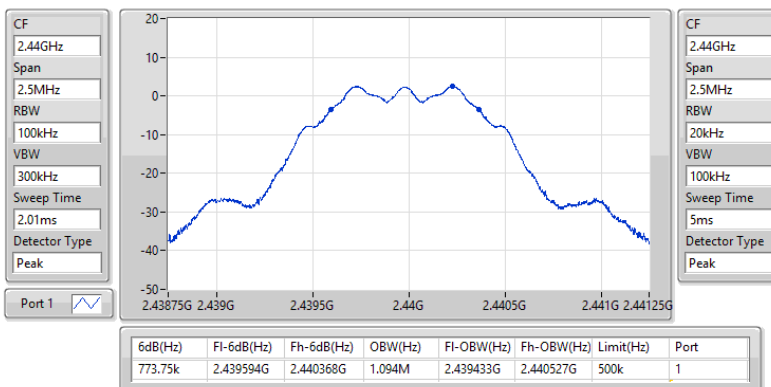

2.4-2.4835GHz_BT-LE(125kbps)

EBW-DTS



2480MHz

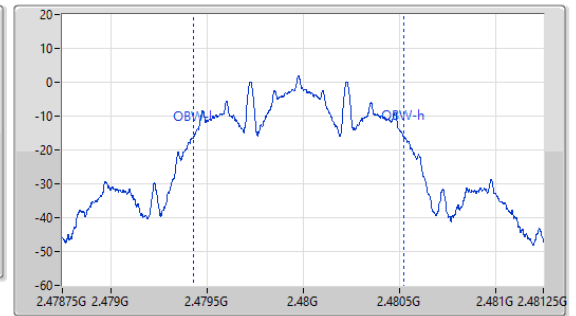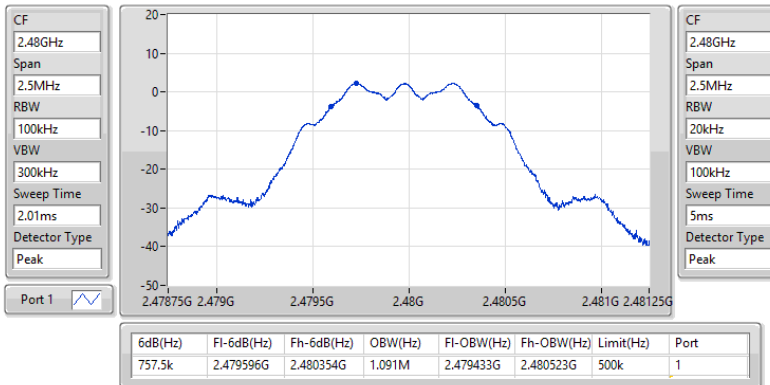

2.4-2.4835GHz_BT-LE(1Mbps)

EBW-DTS



2402MHz

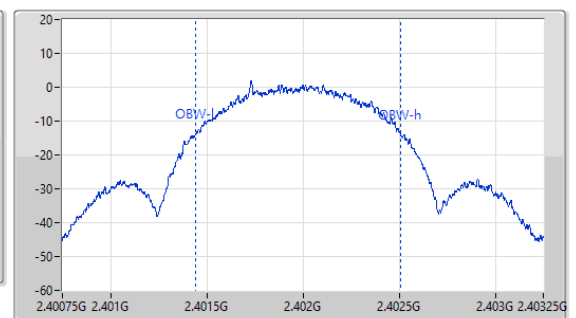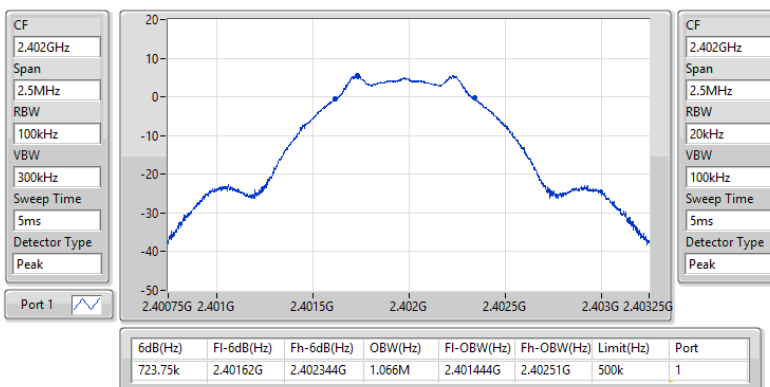

2.4-2.4835GHz_BT-LE(1Mbps)

EBW-DTS



2440MHz

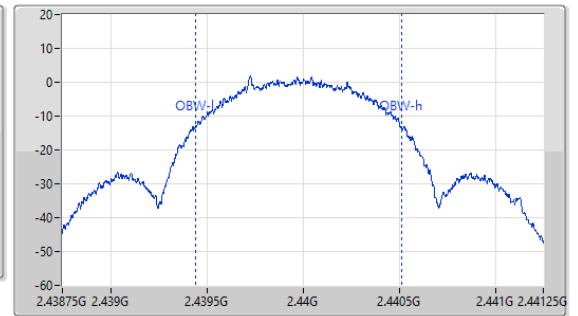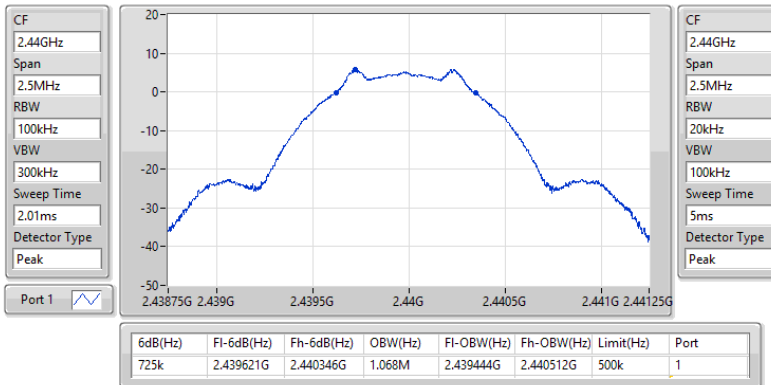

2.4-2.4835GHz_BT-LE(1Mbps)

EBW-DTS



2480MHz

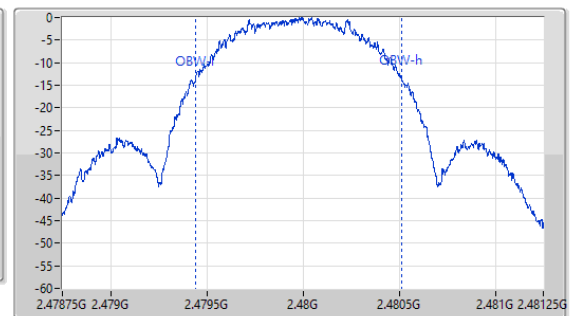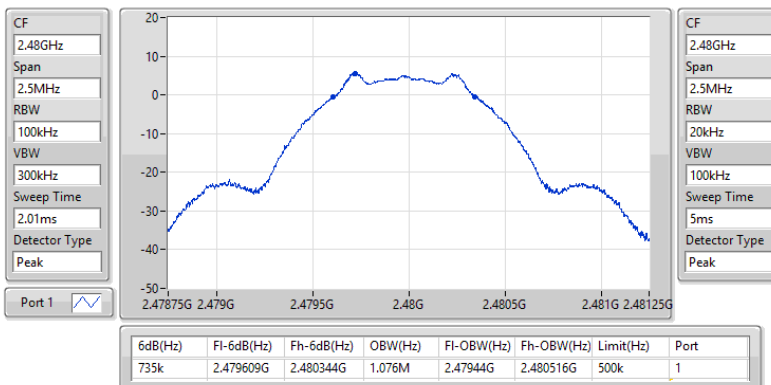

2.4-2.4835GHz_BT-LE(2Mbps)

EBW-DTS



2402MHz

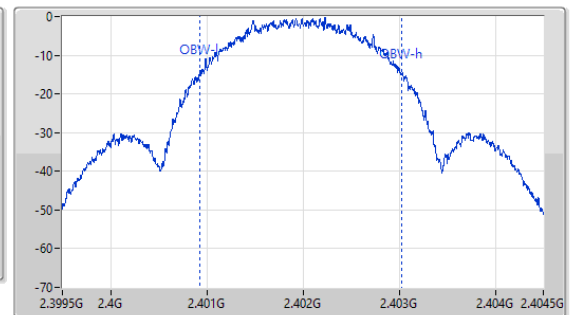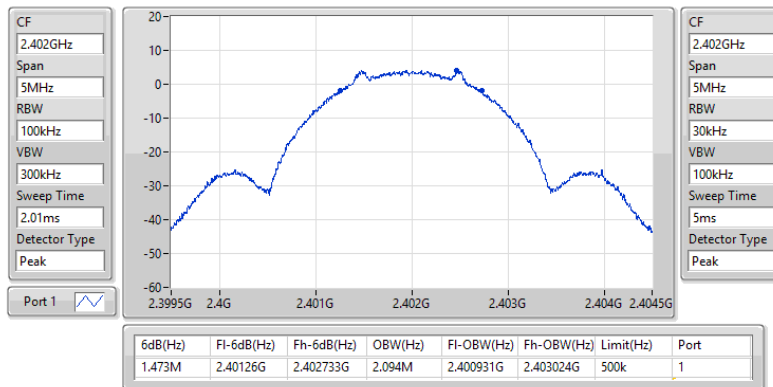

2.4-2.4835GHz_BT-LE(2Mbps)

EBW-DTS



2440MHz

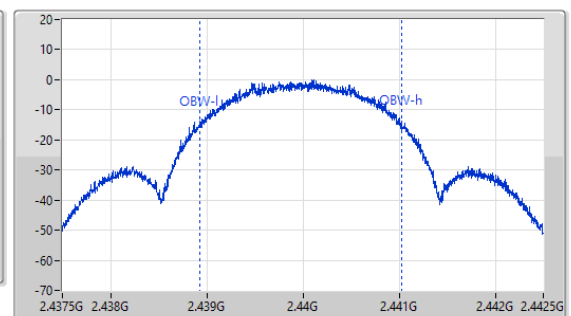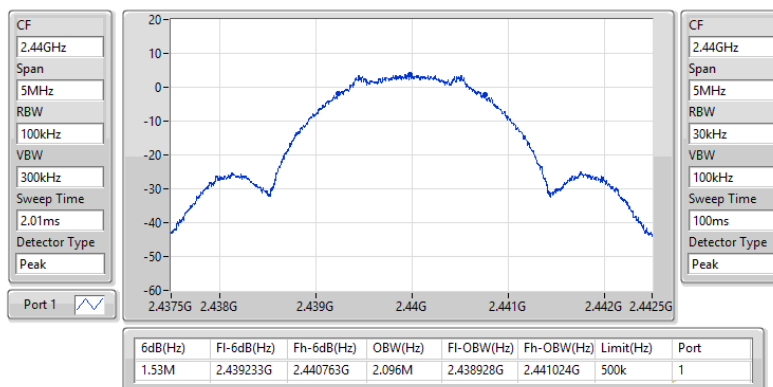

2.4-2.4835GHz_BT-LE(2Mbps)

EBW-DTS

2480MHz

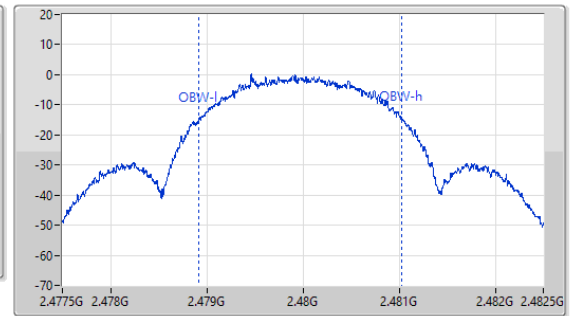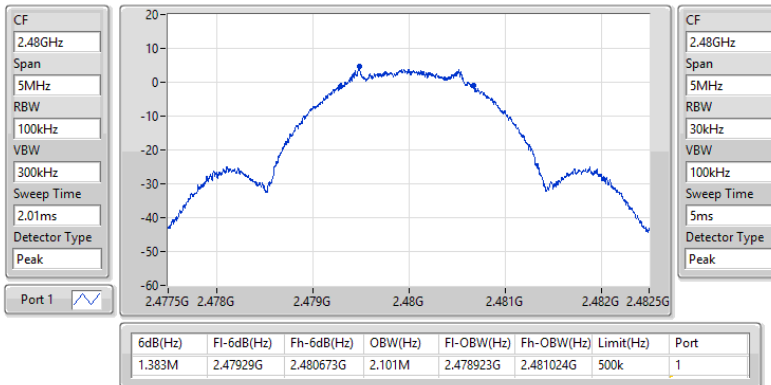



Conducted Output Power (Peak)

Appendix B.1

Summary

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	5.82	0.00382
BT-LE(500kbps)	5.83	0.00383
BT-LE(1Mbps)	5.84	0.00384
BT-LE(2Mbps)	5.83	0.00383

Result

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
BT-LE(125kbps)	-	-	-	-	-	-
2402MHz	Pass	0.97	5.82	30.00	6.79	36.00
2440MHz	Pass	0.97	5.70	30.00	6.67	36.00
2480MHz	Pass	0.97	5.56	30.00	6.53	36.00
BT-LE(500kbps)	-	-	-	-	-	-
2402MHz	Pass	0.97	5.83	30.00	6.80	36.00
2440MHz	Pass	0.97	5.70	30.00	6.67	36.00
2480MHz	Pass	0.97	5.56	30.00	6.53	36.00
BT-LE(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	0.97	5.84	30.00	6.81	36.00
2440MHz	Pass	0.97	5.71	30.00	6.68	36.00
2480MHz	Pass	0.97	5.57	30.00	6.54	36.00
BT-LE(2Mbps)	-	-	-	-	-	-
2402MHz	Pass	0.97	5.83	30.00	6.80	36.00
2440MHz	Pass	0.97	5.71	30.00	6.68	36.00
2480MHz	Pass	0.97	5.57	30.00	6.54	36.00

Summary

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	5.71	0.00372
BT-LE(500kbps)	5.71	0.00372
BT-LE(1Mbps)	5.72	0.00373
BT-LE(2Mbps)	5.72	0.00373

Result

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
BT-LE(125kbps)	-	-	-	-	-	-
2402MHz	Pass	0.97	5.71	-	6.68	-
2440MHz	Pass	0.97	5.59	-	6.56	-
2480MHz	Pass	0.97	5.45	-	6.42	-
BT-LE(500kbps)	-	-	-	-	-	-
2402MHz	Pass	0.97	5.71	-	6.68	-
2440MHz	Pass	0.97	5.58	-	6.55	-
2480MHz	Pass	0.97	5.45	-	6.42	-
BT-LE(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	0.97	5.72	-	6.69	-
2440MHz	Pass	0.97	5.59	-	6.56	-
2480MHz	Pass	0.97	5.46	-	6.43	-
BT-LE(2Mbps)	-	-	-	-	-	-
2402MHz	Pass	0.97	5.72	-	6.69	-
2440MHz	Pass	0.97	5.59	-	6.56	-
2480MHz	Pass	0.97	5.45	-	6.42	-

Note: Average power is for reference only.

Summary

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(125kbps)	0.03
BT-LE(1Mbps)	-6.58
BT-LE(2Mbps)	-8.73

Result


Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	0.97	-0.11	8.00
2440MHz	Pass	0.97	0.03	8.00
2480MHz	Pass	0.97	-0.23	8.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	0.97	-7.22	8.00
2440MHz	Pass	0.97	-6.58	8.00
2480MHz	Pass	0.97	-7.56	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	0.97	-10.02	8.00
2440MHz	Pass	0.97	-8.73	8.00
2480MHz	Pass	0.97	-9.91	8.00



2.4-2.4835GHz_BT-LE(125kbps)

PSD


2402MHz

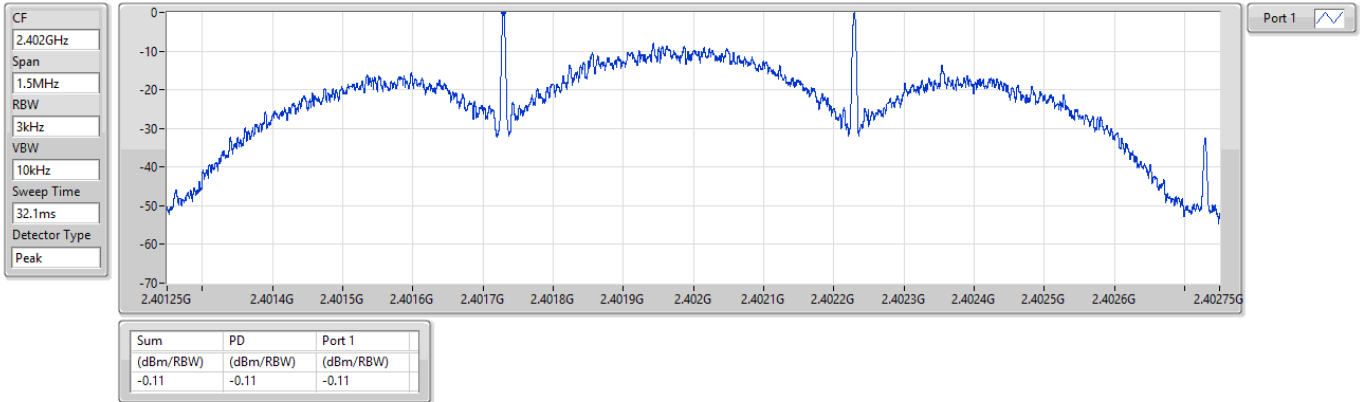

2.4-2.4835GHz_BT-LE(125kbps)

PSD

2440MHz

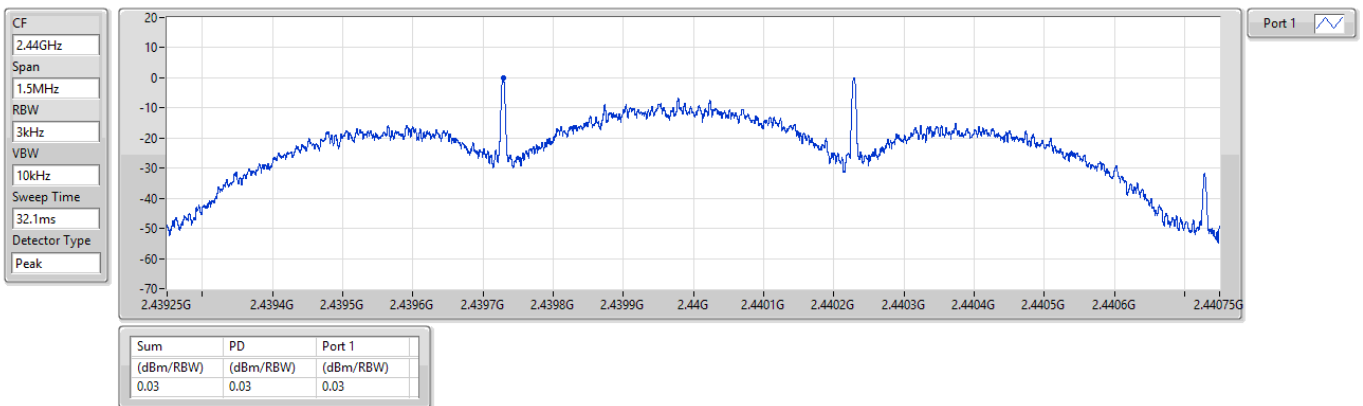




2.4-2.4835GHz_BT-LE(125kbps)

PSD


2480MHz

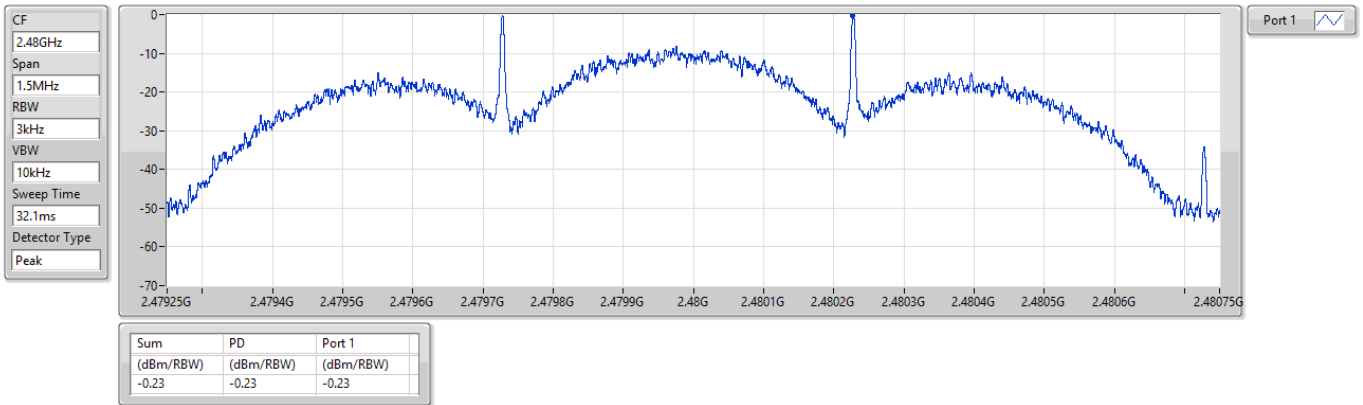

2.4-2.4835GHz_BT-LE(1Mbps)

PSD


2402MHz

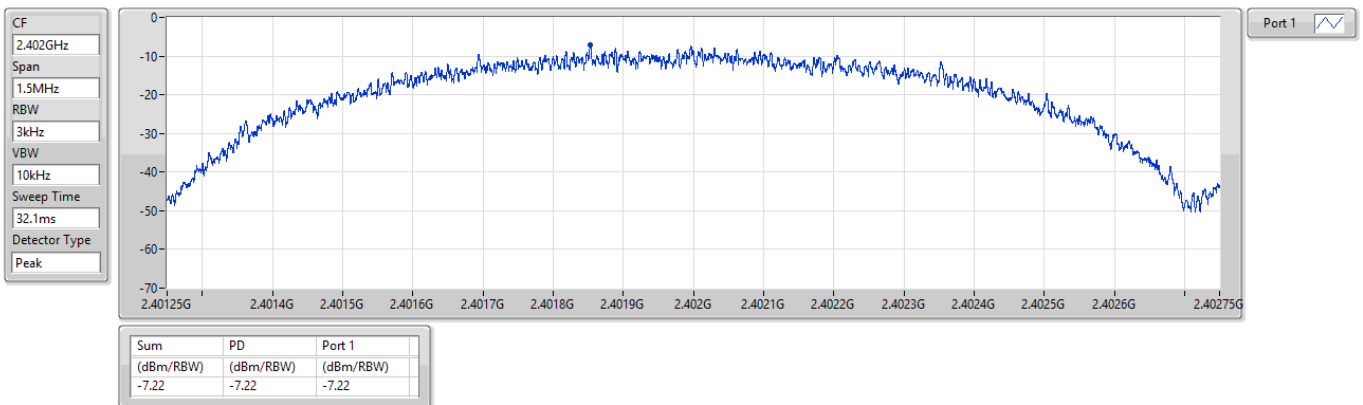

2.4-2.4835GHz_BT-LE(1Mbps)

PSD


2440MHz

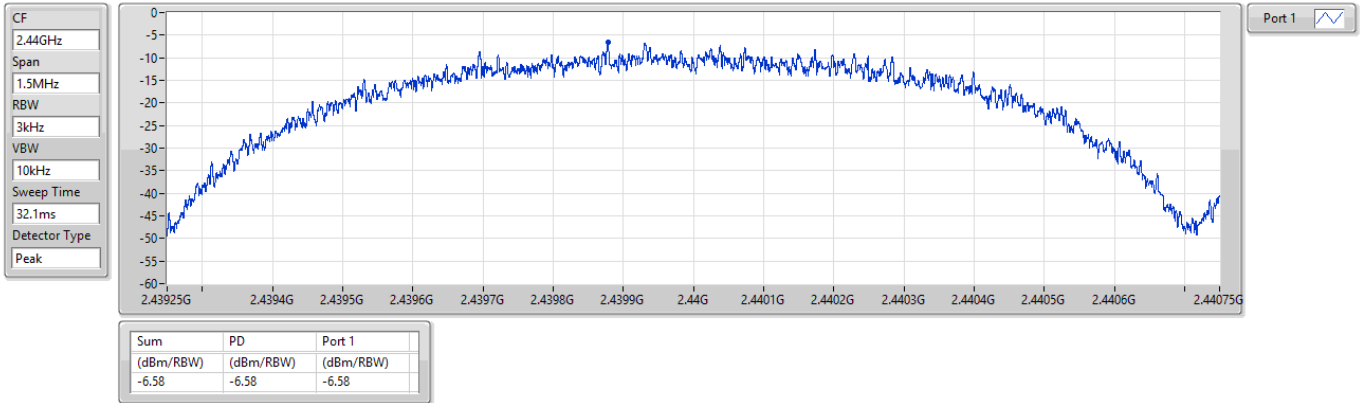

2.4-2.4835GHz_BT-LE(1Mbps)

PSD


2480MHz

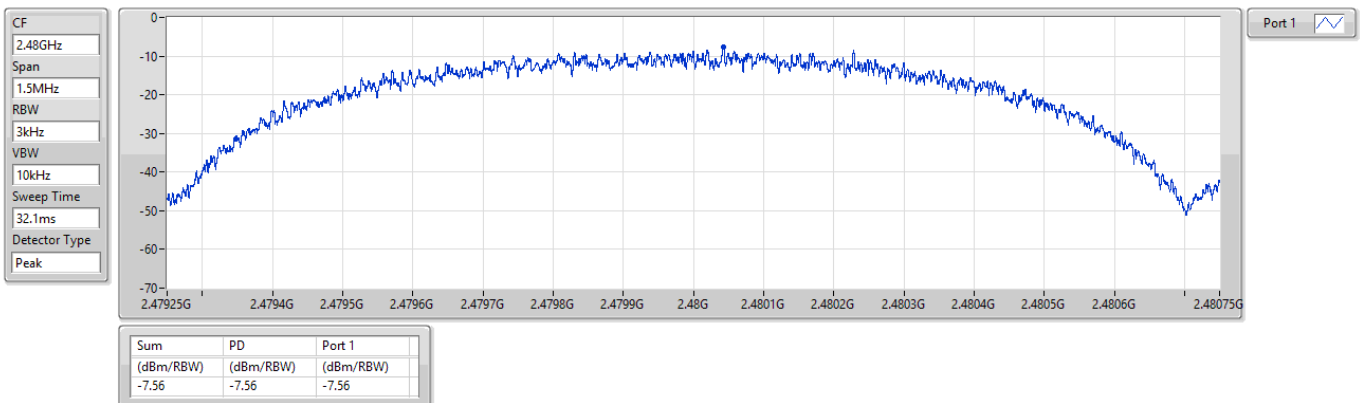

2.4-2.4835GHz_BT-LE(2Mbps)

PSD


2402MHz

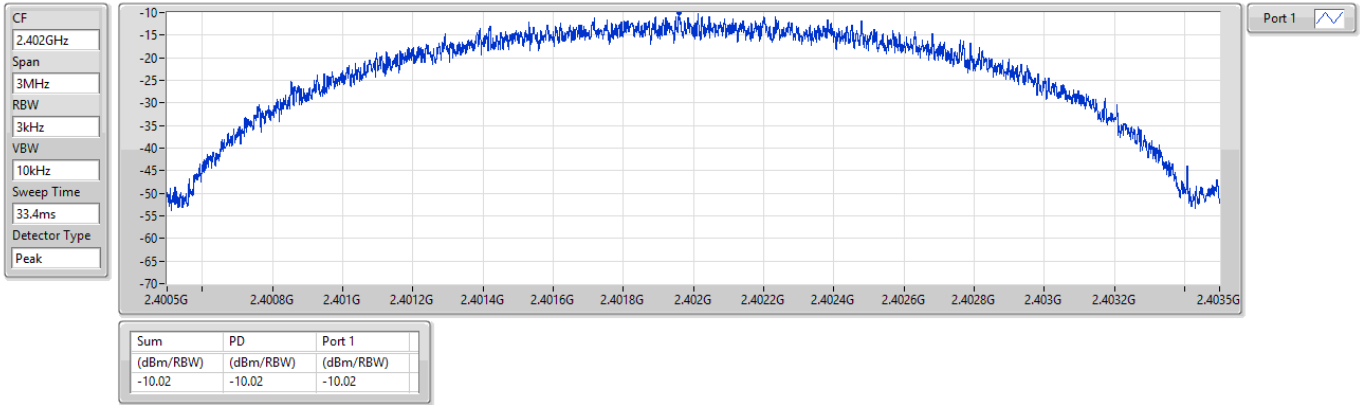

2.4-2.4835GHz_BT-LE(2Mbps)

PSD

2440MHz

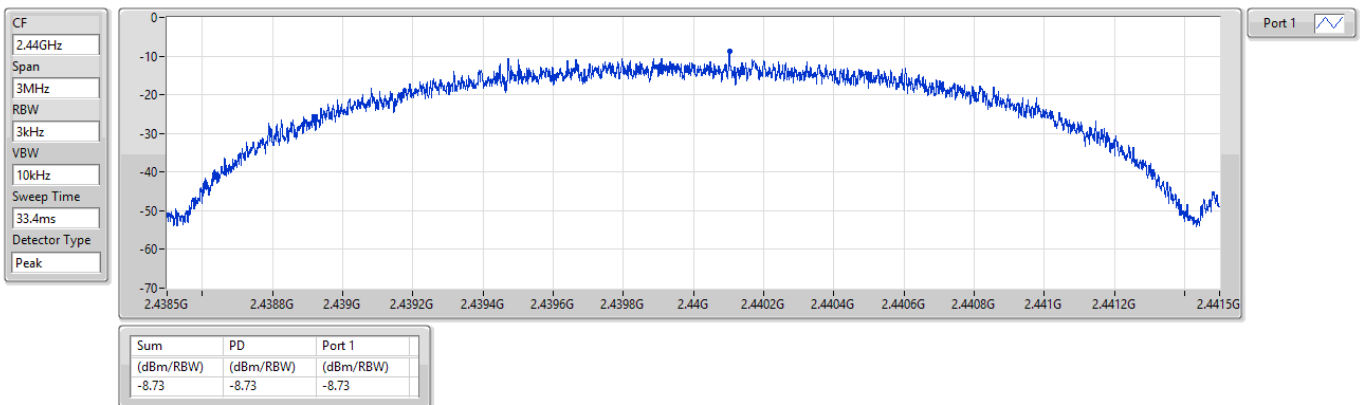




2.4-2.4835GHz_BT-LE(2Mbps)

PSD

2480MHz

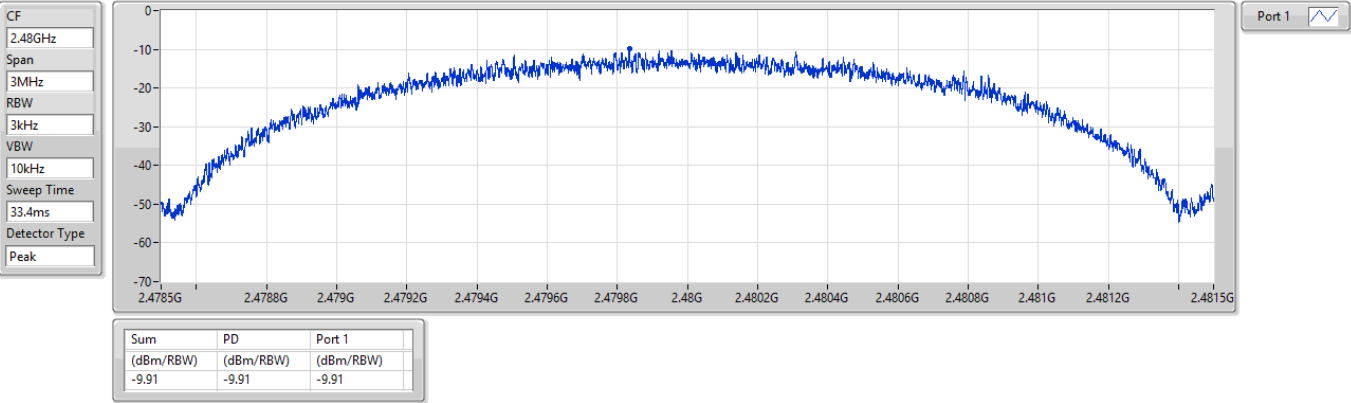



PoE mode

Unwanted Emissions (Below 1GHz)

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Brad Wu

Temperature(°C):26

Humidity(%):65

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	60.07	29.08	40.00	-10.92	37.92	-8.84	Peak	---	---
2	102.75	28.57	43.50	-14.93	41.10	-12.53	Peak	---	---
3	112.45	29.59	43.50	-13.91	41.05	-11.46	Peak	---	---
4	125.06	34.02	43.50	-9.48	44.59	-10.57	Peak	---	---
5	161.92	28.97	43.50	-14.53	37.68	-8.71	Peak	---	---
6	250.19	30.33	46.00	-15.67	40.05	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):26 Humidity(%):65			
Level (dBuV/m)			



Adapter mode

Unwanted Emissions (Below 1GHz)

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Brad Wu

Temperature(°C):26

Humidity(%):65


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	69.77	28.45	40.00	-11.55	39.02	-10.57	Peak	---	---
2	78.50	28.75	40.00	-11.25	41.64	-12.89	Peak	---	---
3	94.99	27.21	43.50	-16.29	41.08	-13.87	Peak	---	---
4	125.06	33.22	43.50	-10.28	43.79	-10.57	Peak	---	---
5	165.80	26.81	43.50	-16.69	35.61	-8.80	Peak	---	---
6	250.19	28.08	46.00	-17.92	37.80	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

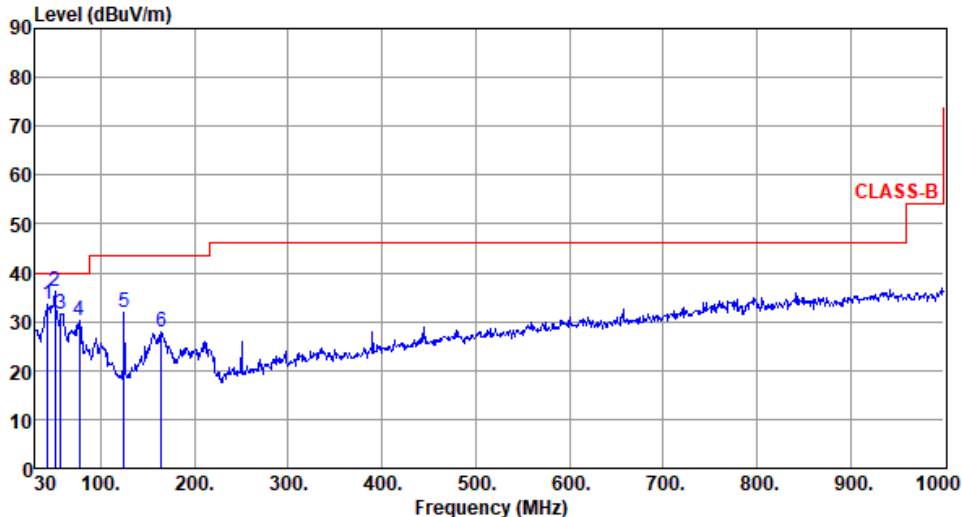

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>43.58</td><td>33.67</td><td>40.00</td><td>-6.33</td><td>41.88</td><td>-8.21</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>51.34</td><td>36.16</td><td>40.00</td><td>-3.84</td><td>44.03</td><td>-7.87</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>57.16</td><td>31.68</td><td>40.00</td><td>-8.32</td><td>39.95</td><td>-8.27</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>77.53</td><td>30.07</td><td>40.00</td><td>-9.93</td><td>42.56</td><td>-12.49</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>125.06</td><td>32.00</td><td>43.50</td><td>-11.50</td><td>42.57</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>164.83</td><td>27.95</td><td>43.50</td><td>-15.55</td><td>36.74</td><td>-8.79</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	43.58	33.67	40.00	-6.33	41.88	-8.21	Peak	---	---	2	51.34	36.16	40.00	-3.84	44.03	-7.87	Peak	---	---	3	57.16	31.68	40.00	-8.32	39.95	-8.27	Peak	---	---	4	77.53	30.07	40.00	-9.93	42.56	-12.49	Peak	---	---	5	125.06	32.00	43.50	-11.50	42.57	-10.57	Peak	---	---	6	164.83	27.95	43.50	-15.55	36.74	-8.79	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	43.58	33.67	40.00	-6.33	41.88	-8.21	Peak	---	---																																																																
2	51.34	36.16	40.00	-3.84	44.03	-7.87	Peak	---	---																																																																
3	57.16	31.68	40.00	-8.32	39.95	-8.27	Peak	---	---																																																																
4	77.53	30.07	40.00	-9.93	42.56	-12.49	Peak	---	---																																																																
5	125.06	32.00	43.50	-11.50	42.57	-10.57	Peak	---	---																																																																
6	164.83	27.95	43.50	-15.55	36.74	-8.79	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									


Unwanted Emissions (Above 1GHz)

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):65			
Level (dBUV/m) <			

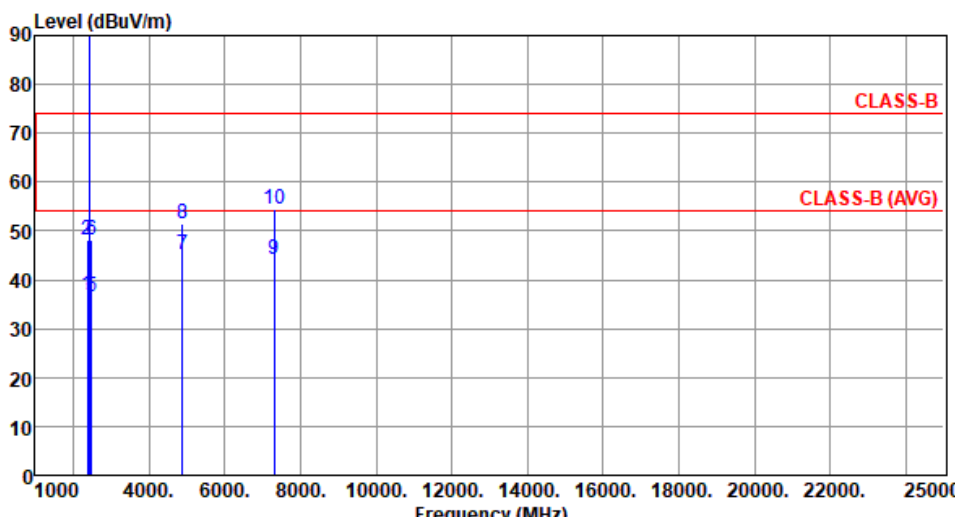

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):25 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	36.79	54.00	-17.21	40.53	-3.74	Average	280	344
2	2390.00	48.07	74.00	-25.93	51.81	-3.74	Peak	280	344
3 *	2440.00	95.32			99.24	-3.92	Average	280	344
4 *	2440.00	96.22			100.14	-3.92	Peak	280	344
5	2483.50	36.56	54.00	-17.44	40.60	-4.04	Average	280	344
6	2483.50	48.20	74.00	-25.80	52.24	-4.04	Peak	280	344
7	4880.00	45.13	54.00	-8.87	44.98	0.15	Average	100	341
8	4880.00	51.42	74.00	-22.58	51.27	0.15	Peak	100	341
9	7320.00	44.02	54.00	-9.98	38.00	6.02	Average	100	355
10	7320.00	54.38	74.00	-19.62	48.36	6.02	Peak	100	355
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBUV/m) CLASS-B CLASS-B (AVG) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>2480.00</td><td>95.51</td><td></td><td>99.54</td><td>-4.03</td><td>Average</td><td>100</td><td>328</td></tr><tr><td>2</td><td>*</td><td>2480.00</td><td>96.37</td><td></td><td>100.40</td><td>-4.03</td><td>Peak</td><td>100</td><td>328</td></tr><tr><td>3</td><td></td><td>2483.50</td><td>37.78</td><td>54.00 -16.22</td><td>41.82</td><td>-4.04</td><td>Average</td><td>100</td><td>328</td></tr><tr><td>4</td><td></td><td>2483.50</td><td>50.47</td><td>74.00 -23.53</td><td>54.51</td><td>-4.04</td><td>Peak</td><td>100</td><td>328</td></tr><tr><td>5</td><td></td><td>4960.00</td><td>39.75</td><td>54.00 -14.25</td><td>39.52</td><td>0.23</td><td>Average</td><td>100</td><td>324</td></tr><tr><td>6</td><td></td><td>4960.00</td><td>47.81</td><td>74.00 -26.19</td><td>47.58</td><td>0.23</td><td>Peak</td><td>100</td><td>324</td></tr><tr><td>7</td><td></td><td>7440.00</td><td>42.57</td><td>54.00 -11.43</td><td>36.51</td><td>6.06</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>8</td><td></td><td>7440.00</td><td>53.93</td><td>74.00 -20.07</td><td>47.87</td><td>6.06</td><td>Peak</td><td>100</td><td>36</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	2480.00	95.51		99.54	-4.03	Average	100	328	2	*	2480.00	96.37		100.40	-4.03	Peak	100	328	3		2483.50	37.78	54.00 -16.22	41.82	-4.04	Average	100	328	4		2483.50	50.47	74.00 -23.53	54.51	-4.04	Peak	100	328	5		4960.00	39.75	54.00 -14.25	39.52	0.23	Average	100	324	6		4960.00	47.81	74.00 -26.19	47.58	0.23	Peak	100	324	7		7440.00	42.57	54.00 -11.43	36.51	6.06	Average	100	36	8		7440.00	53.93	74.00 -20.07	47.87	6.06	Peak	100	36
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	*	2480.00	95.51		99.54	-4.03	Average	100	328																																																																																				
2	*	2480.00	96.37		100.40	-4.03	Peak	100	328																																																																																				
3		2483.50	37.78	54.00 -16.22	41.82	-4.04	Average	100	328																																																																																				
4		2483.50	50.47	74.00 -23.53	54.51	-4.04	Peak	100	328																																																																																				
5		4960.00	39.75	54.00 -14.25	39.52	0.23	Average	100	324																																																																																				
6		4960.00	47.81	74.00 -26.19	47.58	0.23	Peak	100	324																																																																																				
7		7440.00	42.57	54.00 -11.43	36.51	6.06	Average	100	36																																																																																				
8		7440.00	53.93	74.00 -20.07	47.87	6.06	Peak	100	36																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													



Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>2390.00</td><td>36.92</td><td>54.00</td><td>-17.08</td><td>40.66</td><td>-3.74</td><td>Average</td><td>304</td><td>340</td></tr><tr><td>2</td><td>2390.00</td><td>48.62</td><td>74.00</td><td>-25.38</td><td>52.36</td><td>-3.74</td><td>Peak</td><td>304</td><td>340</td></tr><tr><td>3 *</td><td>2440.00</td><td>94.07</td><td></td><td></td><td>97.99</td><td>-3.92</td><td>Average</td><td>304</td><td>340</td></tr><tr><td>4 *</td><td>2440.00</td><td>96.67</td><td></td><td></td><td>100.59</td><td>-3.92</td><td>Peak</td><td>304</td><td>340</td></tr><tr><td>5</td><td>2483.50</td><td>36.74</td><td>54.00</td><td>-17.26</td><td>40.78</td><td>-4.04</td><td>Average</td><td>304</td><td>340</td></tr><tr><td>6</td><td>2483.50</td><td>48.53</td><td>74.00</td><td>-25.47</td><td>52.57</td><td>-4.04</td><td>Peak</td><td>304</td><td>340</td></tr><tr><td>7</td><td>4880.00</td><td>40.92</td><td>54.00</td><td>-13.08</td><td>40.77</td><td>0.15</td><td>Average</td><td>100</td><td>357</td></tr><tr><td>8</td><td>4880.00</td><td>49.60</td><td>74.00</td><td>-24.40</td><td>49.45</td><td>0.15</td><td>Peak</td><td>100</td><td>357</td></tr><tr><td>9</td><td>7320.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>36.66</td><td>6.02</td><td>Average</td><td>100</td><td>351</td></tr><tr><td>10</td><td>7320.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>47.47</td><td>6.02</td><td>Peak</td><td>100</td><td>351</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2390.00	36.92	54.00	-17.08	40.66	-3.74	Average	304	340	2	2390.00	48.62	74.00	-25.38	52.36	-3.74	Peak	304	340	3 *	2440.00	94.07			97.99	-3.92	Average	304	340	4 *	2440.00	96.67			100.59	-3.92	Peak	304	340	5	2483.50	36.74	54.00	-17.26	40.78	-4.04	Average	304	340	6	2483.50	48.53	74.00	-25.47	52.57	-4.04	Peak	304	340	7	4880.00	40.92	54.00	-13.08	40.77	0.15	Average	100	357	8	4880.00	49.60	74.00	-24.40	49.45	0.15	Peak	100	357	9	7320.00	42.68	54.00	-11.32	36.66	6.02	Average	100	351	10	7320.00	53.49	74.00	-20.51	47.47	6.02	Peak	100	351
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	2390.00	36.92	54.00	-17.08	40.66	-3.74	Average	304	340																																																																																																								
2	2390.00	48.62	74.00	-25.38	52.36	-3.74	Peak	304	340																																																																																																								
3 *	2440.00	94.07			97.99	-3.92	Average	304	340																																																																																																								
4 *	2440.00	96.67			100.59	-3.92	Peak	304	340																																																																																																								
5	2483.50	36.74	54.00	-17.26	40.78	-4.04	Average	304	340																																																																																																								
6	2483.50	48.53	74.00	-25.47	52.57	-4.04	Peak	304	340																																																																																																								
7	4880.00	40.92	54.00	-13.08	40.77	0.15	Average	100	357																																																																																																								
8	4880.00	49.60	74.00	-24.40	49.45	0.15	Peak	100	357																																																																																																								
9	7320.00	42.68	54.00	-11.32	36.66	6.02	Average	100	351																																																																																																								
10	7320.00	53.49	74.00	-20.51	47.47	6.02	Peak	100	351																																																																																																								



Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):25 Humidity(%):65									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	2480.00	94.71			98.74	-4.03	Average	286	342
2 *	2480.00	97.51			101.54	-4.03	Peak	286	342
3	2483.50	41.29	54.00	-12.71	45.33	-4.04	Average	286	342
4	2483.50	53.42	74.00	-20.58	57.46	-4.04	Peak	286	342
5	4960.00	34.92	54.00	-19.08	34.69	0.23	Average	100	355
6	4960.00	46.25	74.00	-27.75	46.02	0.23	Peak	100	355
7	7440.00	40.29	54.00	-13.71	34.23	6.06	Average	100	349
8	7440.00	51.37	74.00	-22.63	45.31	6.06	Peak	100	349
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):65			
Level (dBUV/m) </			



2.4-2.4835GHz_BT-LE(125kbps)

CSEndB-DTS


2402MHz

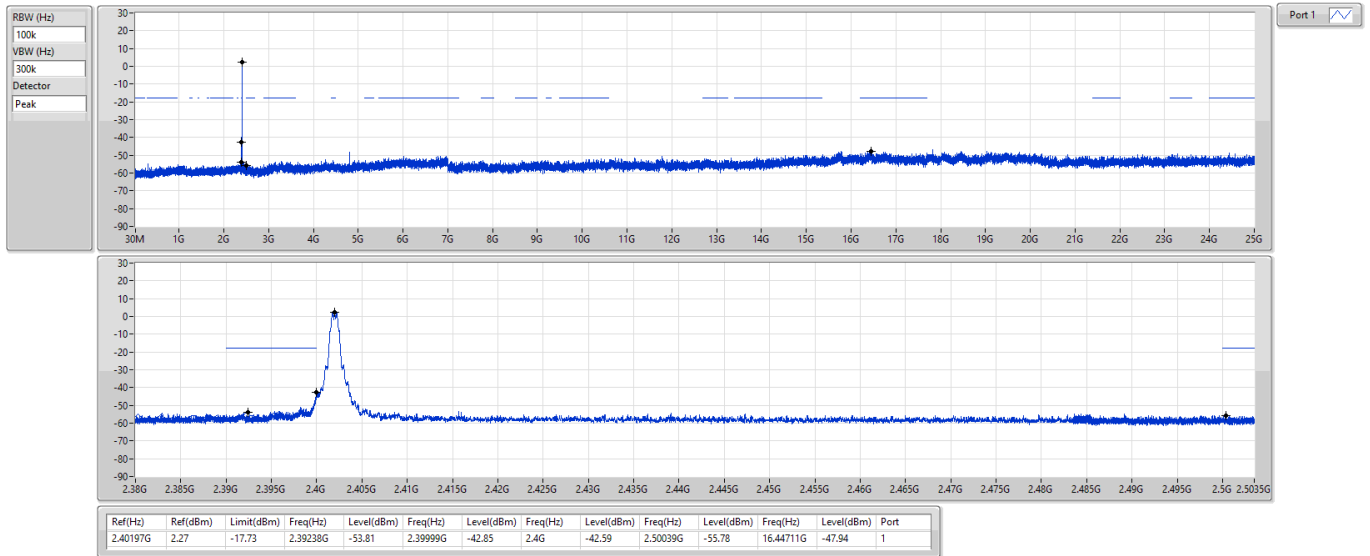

2.4-2.4835GHz_BT-LE(125kbps)

CSEndB-DTS


2440MHz

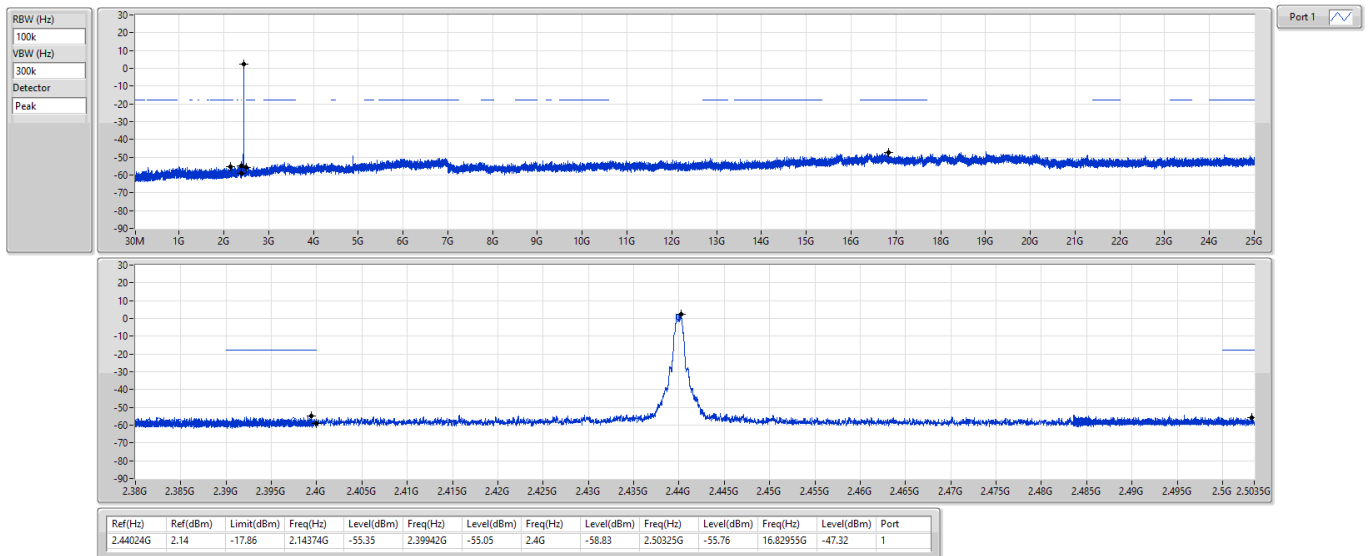

2.4-2.4835GHz_BT-LE(125kbps)

CSEndB-DTS


2480MHz

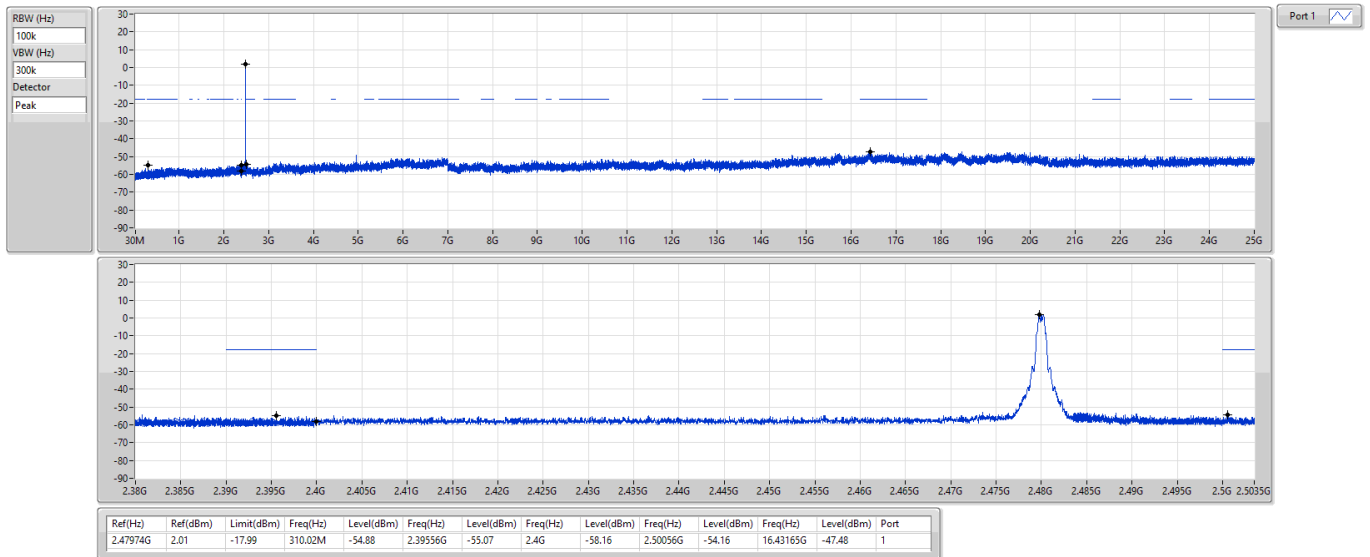

2.4-2.4835GHz_BT-LE(1Mbps)

CSEndB-DTS


2402MHz

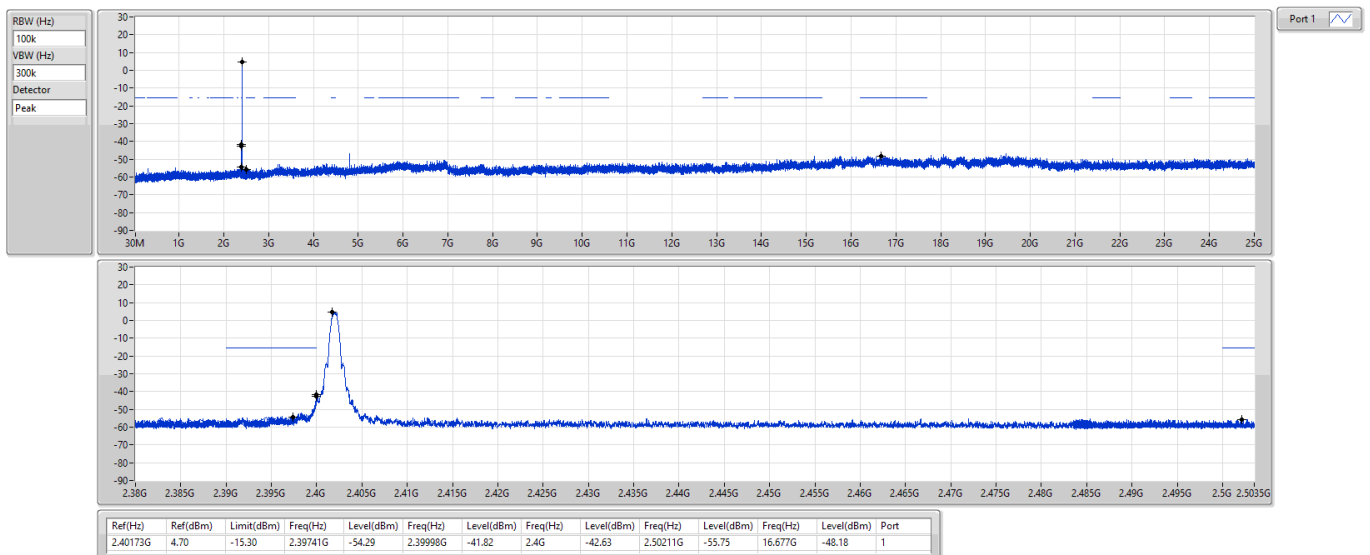

2.4-2.4835GHz_BT-LE(1Mbps)

CSEndB-DTS


2440MHz

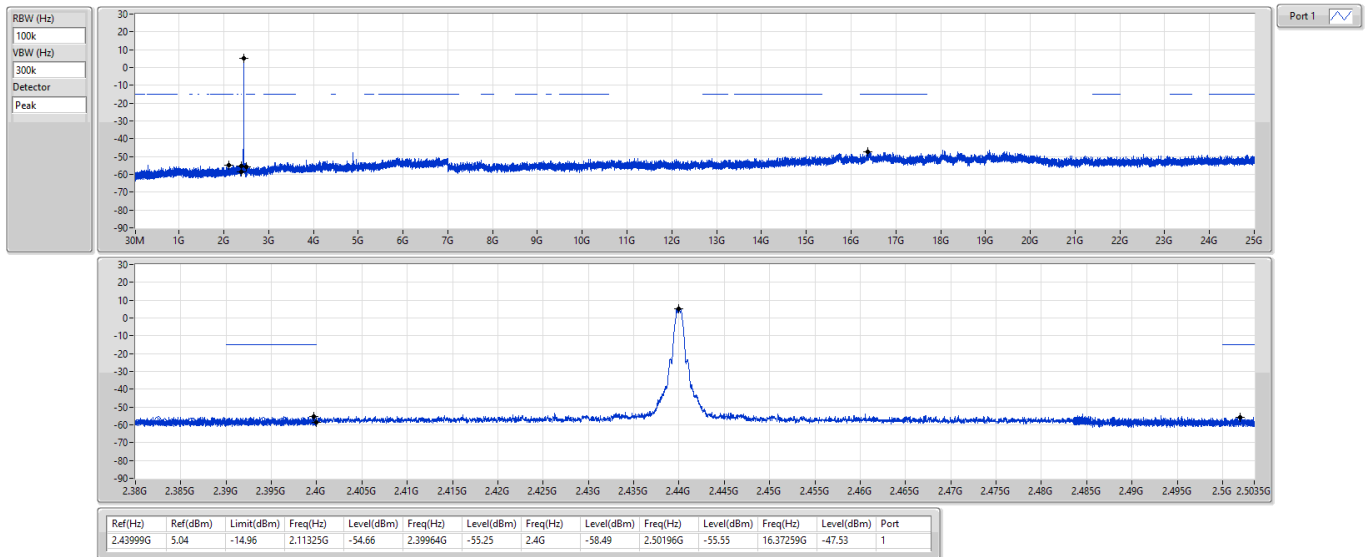

2.4-2.4835GHz_BT-LE(1Mbps)

CSEndB-DTS


2480MHz

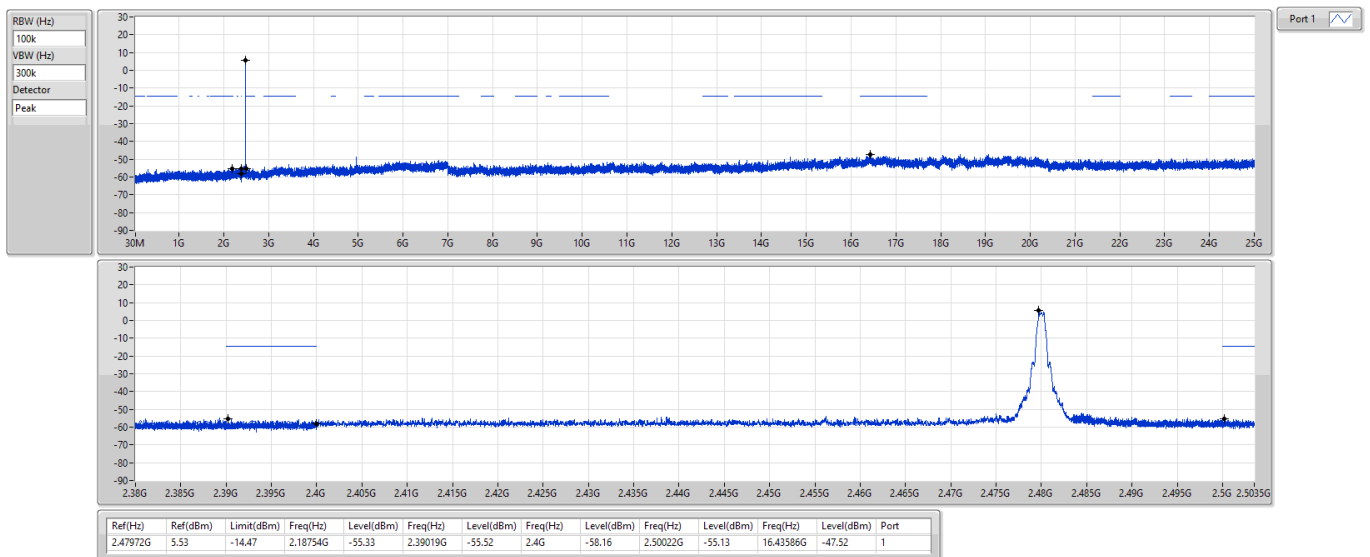

2.4-2.4835GHz_BT-LE(2Mbps)

CSEndB-DTS


2402MHz

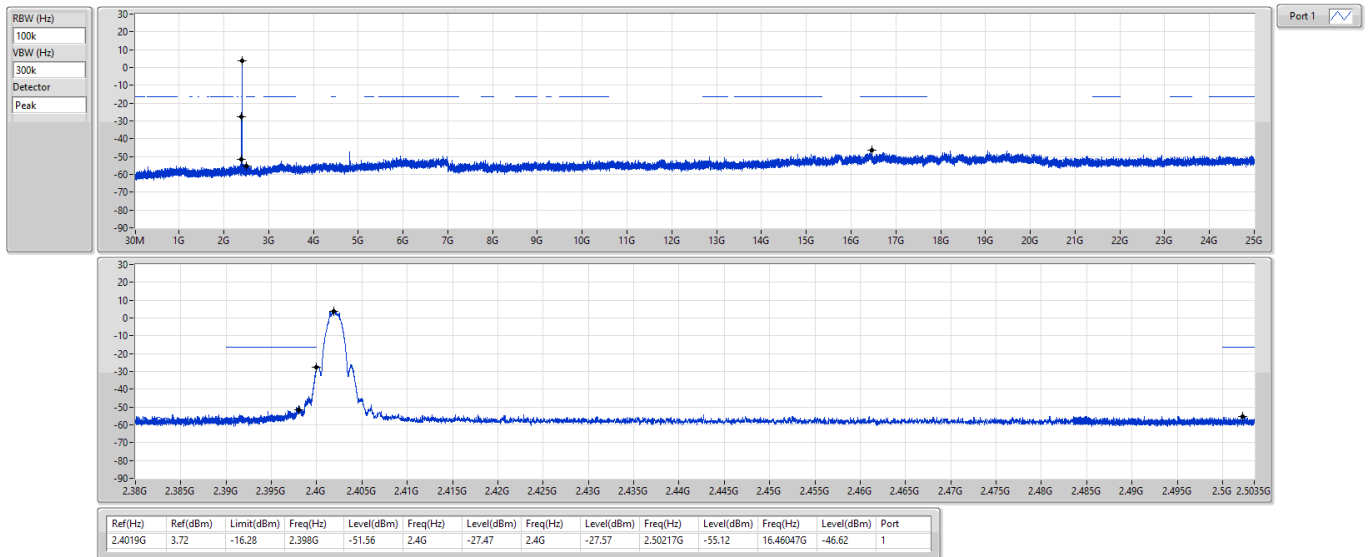

2.4-2.4835GHz_BT-LE(2Mbps)

CSEndB-DTS

2440MHz

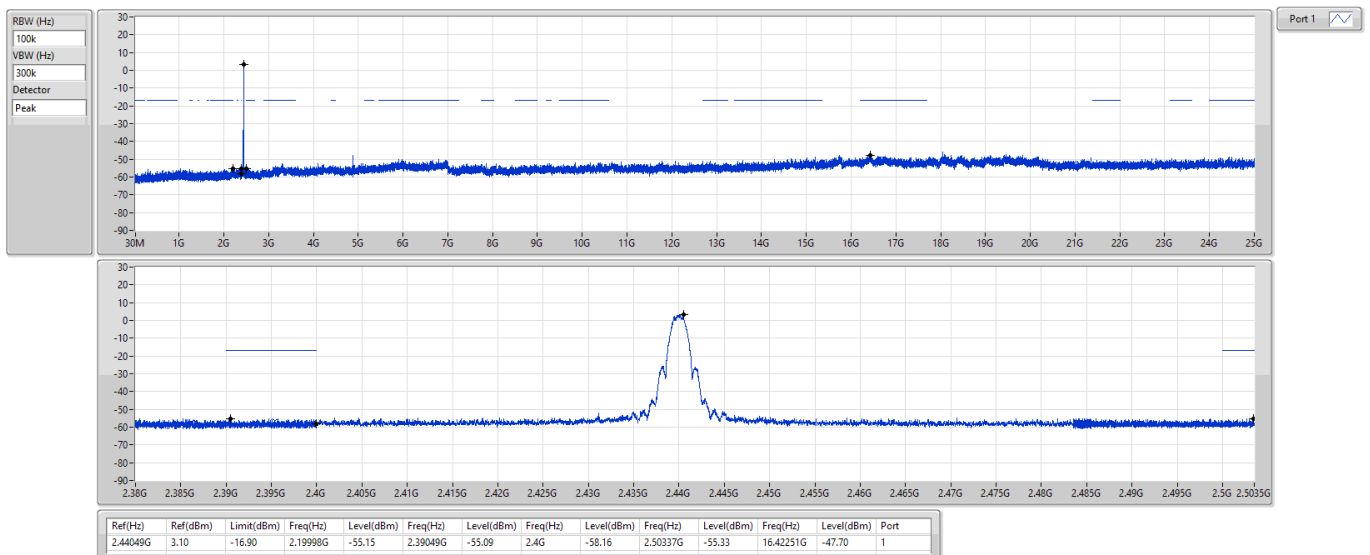




2.4-2.4835GHz_BT-LE(2Mbps)

CSEndB-DTS

2480MHz

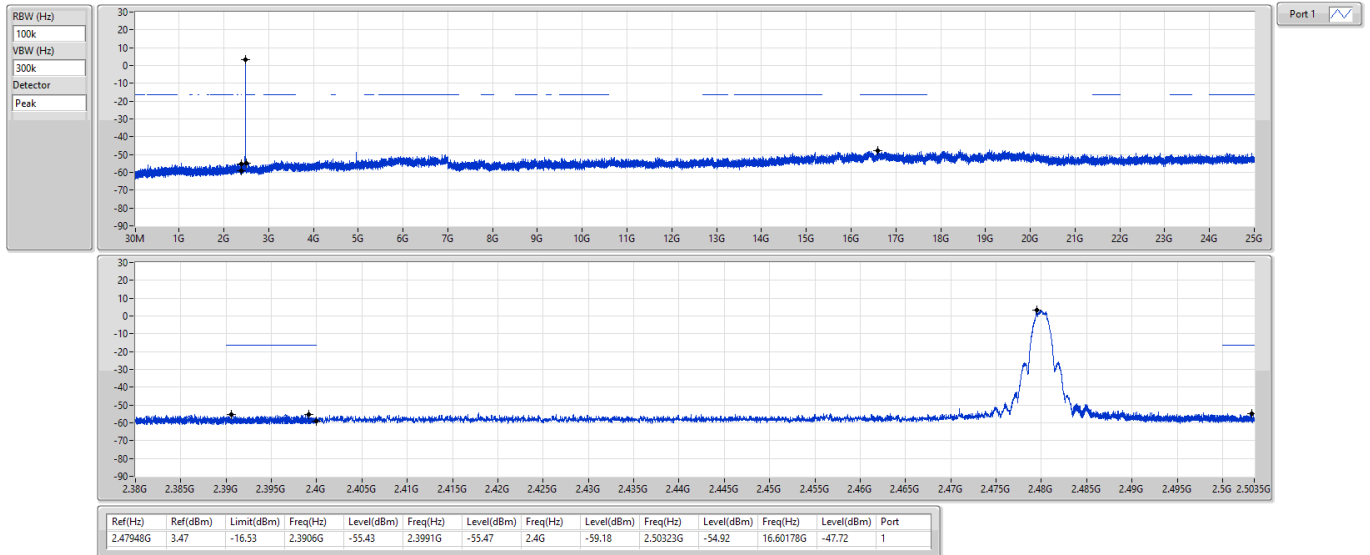



PoE mode

Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402																																																																																																																																		
Power Phase	Line																																																																																																																																				
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.153</td><td>29.82</td><td>55.82</td><td>-26.00</td><td>20.13</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.153</td><td>45.58</td><td>65.82</td><td>-20.24</td><td>35.89</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.168</td><td>27.86</td><td>55.08</td><td>-27.22</td><td>18.17</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.168</td><td>43.03</td><td>65.08</td><td>-22.05</td><td>33.34</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>5</td><td>2.622</td><td>24.79</td><td>46.00</td><td>-21.21</td><td>15.00</td><td>9.64</td><td>0.15</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>2.622</td><td>33.64</td><td>56.00</td><td>-22.36</td><td>23.85</td><td>9.64</td><td>0.15</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>2.978</td><td>25.72</td><td>46.00</td><td>-20.28</td><td>15.92</td><td>9.64</td><td>0.16</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>2.978</td><td>33.21</td><td>56.00</td><td>-22.79</td><td>23.41</td><td>9.64</td><td>0.16</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>14.288</td><td>36.94</td><td>50.00</td><td>-13.06</td><td>26.83</td><td>9.68</td><td>0.43</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>14.288</td><td>40.20</td><td>60.00</td><td>-19.80</td><td>30.09</td><td>9.68</td><td>0.43</td><td>0.00</td><td>QP</td></tr><tr><td>11*</td><td>16.226</td><td>42.99</td><td>50.00</td><td>-7.01</td><td>32.85</td><td>9.68</td><td>0.46</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>16.226</td><td>45.68</td><td>60.00</td><td>-14.32</td><td>35.54</td><td>9.68</td><td>0.46</td><td>0.00</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.153	29.82	55.82	-26.00	20.13	9.63	0.06	0.00	Average	2	0.153	45.58	65.82	-20.24	35.89	9.63	0.06	0.00	QP	3	0.168	27.86	55.08	-27.22	18.17	9.63	0.06	0.00	Average	4	0.168	43.03	65.08	-22.05	33.34	9.63	0.06	0.00	QP	5	2.622	24.79	46.00	-21.21	15.00	9.64	0.15	0.00	Average	6	2.622	33.64	56.00	-22.36	23.85	9.64	0.15	0.00	QP	7	2.978	25.72	46.00	-20.28	15.92	9.64	0.16	0.00	Average	8	2.978	33.21	56.00	-22.79	23.41	9.64	0.16	0.00	QP	9	14.288	36.94	50.00	-13.06	26.83	9.68	0.43	0.00	Average	10	14.288	40.20	60.00	-19.80	30.09	9.68	0.43	0.00	QP	11*	16.226	42.99	50.00	-7.01	32.85	9.68	0.46	0.00	Average	12	16.226	45.68	60.00	-14.32	35.54	9.68	0.46	0.00	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.153	29.82	55.82	-26.00	20.13	9.63	0.06	0.00	Average																																																																																																																												
2	0.153	45.58	65.82	-20.24	35.89	9.63	0.06	0.00	QP																																																																																																																												
3	0.168	27.86	55.08	-27.22	18.17	9.63	0.06	0.00	Average																																																																																																																												
4	0.168	43.03	65.08	-22.05	33.34	9.63	0.06	0.00	QP																																																																																																																												
5	2.622	24.79	46.00	-21.21	15.00	9.64	0.15	0.00	Average																																																																																																																												
6	2.622	33.64	56.00	-22.36	23.85	9.64	0.15	0.00	QP																																																																																																																												
7	2.978	25.72	46.00	-20.28	15.92	9.64	0.16	0.00	Average																																																																																																																												
8	2.978	33.21	56.00	-22.79	23.41	9.64	0.16	0.00	QP																																																																																																																												
9	14.288	36.94	50.00	-13.06	26.83	9.68	0.43	0.00	Average																																																																																																																												
10	14.288	40.20	60.00	-19.80	30.09	9.68	0.43	0.00	QP																																																																																																																												
11*	16.226	42.99	50.00	-7.01	32.85	9.68	0.46	0.00	Average																																																																																																																												
12	16.226	45.68	60.00	-14.32	35.54	9.68	0.46	0.00	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					



Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																					
Level (dBUV) Frequency (MHz)																																																																																																																																					
<table><tr><th></th><th>Freq MHz</th><th>Level dBUV</th><th>Limit Line dBUV</th><th>Over Limit dB</th><th>Read Level dBUV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.153</td><td>29.72</td><td>55.82</td><td>-26.10</td><td>20.03</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.153</td><td>45.82</td><td>65.82</td><td>-20.00</td><td>36.13</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.282</td><td>22.61</td><td>50.76</td><td>-28.15</td><td>12.92</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.282</td><td>33.33</td><td>60.76</td><td>-27.43</td><td>23.64</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>5</td><td>2.608</td><td>20.18</td><td>46.00</td><td>-25.82</td><td>10.39</td><td>9.64</td><td>0.15</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>2.608</td><td>28.99</td><td>56.00</td><td>-27.01</td><td>19.20</td><td>9.64</td><td>0.15</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>3.584</td><td>19.94</td><td>46.00</td><td>-26.06</td><td>10.12</td><td>9.65</td><td>0.17</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>3.584</td><td>28.66</td><td>56.00</td><td>-27.34</td><td>18.84</td><td>9.65</td><td>0.17</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>13.495</td><td>37.52</td><td>50.00</td><td>-12.48</td><td>27.35</td><td>9.75</td><td>0.42</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>13.495</td><td>40.30</td><td>60.00</td><td>-19.70</td><td>30.13</td><td>9.75</td><td>0.42</td><td>0.00</td><td>QP</td></tr><tr><td>11*</td><td>16.226</td><td>43.42</td><td>50.00</td><td>-6.58</td><td>33.19</td><td>9.77</td><td>0.46</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>16.226</td><td>46.02</td><td>60.00</td><td>-13.98</td><td>35.79</td><td>9.77</td><td>0.46</td><td>0.00</td><td>QP</td></tr></table>					Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.153	29.72	55.82	-26.10	20.03	9.63	0.06	0.00	Average	2	0.153	45.82	65.82	-20.00	36.13	9.63	0.06	0.00	QP	3	0.282	22.61	50.76	-28.15	12.92	9.63	0.06	0.00	Average	4	0.282	33.33	60.76	-27.43	23.64	9.63	0.06	0.00	QP	5	2.608	20.18	46.00	-25.82	10.39	9.64	0.15	0.00	Average	6	2.608	28.99	56.00	-27.01	19.20	9.64	0.15	0.00	QP	7	3.584	19.94	46.00	-26.06	10.12	9.65	0.17	0.00	Average	8	3.584	28.66	56.00	-27.34	18.84	9.65	0.17	0.00	QP	9	13.495	37.52	50.00	-12.48	27.35	9.75	0.42	0.00	Average	10	13.495	40.30	60.00	-19.70	30.13	9.75	0.42	0.00	QP	11*	16.226	43.42	50.00	-6.58	33.19	9.77	0.46	0.00	Average	12	16.226	46.02	60.00	-13.98	35.79	9.77	0.46	0.00	QP
	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.153	29.72	55.82	-26.10	20.03	9.63	0.06	0.00	Average																																																																																																																												
2	0.153	45.82	65.82	-20.00	36.13	9.63	0.06	0.00	QP																																																																																																																												
3	0.282	22.61	50.76	-28.15	12.92	9.63	0.06	0.00	Average																																																																																																																												
4	0.282	33.33	60.76	-27.43	23.64	9.63	0.06	0.00	QP																																																																																																																												
5	2.608	20.18	46.00	-25.82	10.39	9.64	0.15	0.00	Average																																																																																																																												
6	2.608	28.99	56.00	-27.01	19.20	9.64	0.15	0.00	QP																																																																																																																												
7	3.584	19.94	46.00	-26.06	10.12	9.65	0.17	0.00	Average																																																																																																																												
8	3.584	28.66	56.00	-27.34	18.84	9.65	0.17	0.00	QP																																																																																																																												
9	13.495	37.52	50.00	-12.48	27.35	9.75	0.42	0.00	Average																																																																																																																												
10	13.495	40.30	60.00	-19.70	30.13	9.75	0.42	0.00	QP																																																																																																																												
11*	16.226	43.42	50.00	-6.58	33.19	9.77	0.46	0.00	Average																																																																																																																												
12	16.226	46.02	60.00	-13.98	35.79	9.77	0.46	0.00	QP																																																																																																																												
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																					




Adapter mode

Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402
Power Phase	Line		

Test by : Joe Liao

Temperature: 24°C

Humidity: 62%

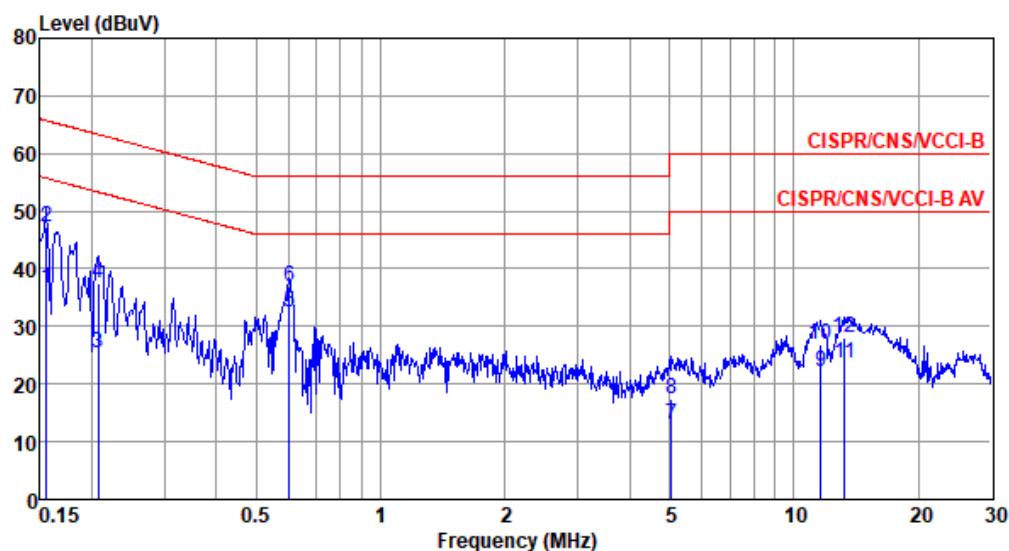

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	36.55	55.69	-19.14	26.68	9.63	0.06	0.18	Average
2	0.156	47.33	65.69	-18.36	37.46	9.63	0.06	0.18	QP
3	0.207	25.50	53.32	-27.82	15.62	9.62	0.06	0.20	Average
4	0.207	37.50	63.32	-25.82	27.62	9.62	0.06	0.20	QP
5*	0.601	32.60	46.00	-13.40	22.59	9.62	0.08	0.31	Average
6	0.601	36.93	56.00	-19.07	26.92	9.62	0.08	0.31	QP
7	5.058	13.11	50.00	-36.89	2.79	9.66	0.23	0.43	Average
8	5.058	17.46	60.00	-42.54	7.14	9.66	0.23	0.43	QP
9	11.621	22.14	50.00	-27.86	11.60	9.69	0.39	0.46	Average
10	11.621	26.86	60.00	-33.14	16.32	9.69	0.39	0.46	QP
11	13.267	23.64	50.00	-26.36	13.06	9.69	0.42	0.47	Average
12	13.267	27.96	60.00	-32.04	17.38	9.69	0.42	0.47	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402																																																																																																																																										
Power Phase	Neutral																																																																																																																																												
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																													
Level (dBuV) Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th></th></tr><tr><td>1</td><td>0.153</td><td>37.36</td><td>55.82</td><td>-18.46</td><td>27.49</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>2</td><td>0.153</td><td>48.19</td><td>65.82</td><td>-17.63</td><td>38.32</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>3</td><td>0.168</td><td>31.41</td><td>55.08</td><td>-23.67</td><td>21.54</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>4</td><td>0.168</td><td>41.54</td><td>65.08</td><td>-23.54</td><td>31.67</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>5</td><td>0.198</td><td>29.36</td><td>53.71</td><td>-24.35</td><td>19.48</td><td>9.63</td><td>0.06</td><td>0.19</td><td>Average</td></tr><tr><td>6</td><td>0.198</td><td>38.87</td><td>63.71</td><td>-24.84</td><td>28.99</td><td>9.63</td><td>0.06</td><td>0.19</td><td>QP</td></tr><tr><td>7*</td><td>0.570</td><td>30.68</td><td>46.00</td><td>-15.32</td><td>20.67</td><td>9.62</td><td>0.08</td><td>0.31</td><td>Average</td></tr><tr><td>8</td><td>0.570</td><td>36.95</td><td>56.00</td><td>-19.05</td><td>26.94</td><td>9.62</td><td>0.08</td><td>0.31</td><td>QP</td></tr><tr><td>9</td><td>11.438</td><td>24.84</td><td>50.00</td><td>-25.16</td><td>14.26</td><td>9.73</td><td>0.39</td><td>0.46</td><td>Average</td></tr><tr><td>10</td><td>11.438</td><td>29.49</td><td>60.00</td><td>-30.51</td><td>18.91</td><td>9.73</td><td>0.39</td><td>0.46</td><td>QP</td></tr><tr><td>11</td><td>13.337</td><td>24.74</td><td>50.00</td><td>-25.26</td><td>14.09</td><td>9.75</td><td>0.42</td><td>0.48</td><td>Average</td></tr><tr><td>12</td><td>13.337</td><td>28.95</td><td>60.00</td><td>-31.05</td><td>18.30</td><td>9.75</td><td>0.42</td><td>0.48</td><td>QP</td></tr></table>				Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark	MHz	dBuV	Line	Limit	Level	dB	loss	dB		1	0.153	37.36	55.82	-18.46	27.49	9.63	0.06	0.18	Average	2	0.153	48.19	65.82	-17.63	38.32	9.63	0.06	0.18	QP	3	0.168	31.41	55.08	-23.67	21.54	9.63	0.06	0.18	Average	4	0.168	41.54	65.08	-23.54	31.67	9.63	0.06	0.18	QP	5	0.198	29.36	53.71	-24.35	19.48	9.63	0.06	0.19	Average	6	0.198	38.87	63.71	-24.84	28.99	9.63	0.06	0.19	QP	7*	0.570	30.68	46.00	-15.32	20.67	9.62	0.08	0.31	Average	8	0.570	36.95	56.00	-19.05	26.94	9.62	0.08	0.31	QP	9	11.438	24.84	50.00	-25.16	14.26	9.73	0.39	0.46	Average	10	11.438	29.49	60.00	-30.51	18.91	9.73	0.39	0.46	QP	11	13.337	24.74	50.00	-25.26	14.09	9.75	0.42	0.48	Average	12	13.337	28.95	60.00	-31.05	18.30	9.75	0.42	0.48	QP
Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																					
MHz	dBuV	Line	Limit	Level	dB	loss	dB																																																																																																																																						
1	0.153	37.36	55.82	-18.46	27.49	9.63	0.06	0.18	Average																																																																																																																																				
2	0.153	48.19	65.82	-17.63	38.32	9.63	0.06	0.18	QP																																																																																																																																				
3	0.168	31.41	55.08	-23.67	21.54	9.63	0.06	0.18	Average																																																																																																																																				
4	0.168	41.54	65.08	-23.54	31.67	9.63	0.06	0.18	QP																																																																																																																																				
5	0.198	29.36	53.71	-24.35	19.48	9.63	0.06	0.19	Average																																																																																																																																				
6	0.198	38.87	63.71	-24.84	28.99	9.63	0.06	0.19	QP																																																																																																																																				
7*	0.570	30.68	46.00	-15.32	20.67	9.62	0.08	0.31	Average																																																																																																																																				
8	0.570	36.95	56.00	-19.05	26.94	9.62	0.08	0.31	QP																																																																																																																																				
9	11.438	24.84	50.00	-25.16	14.26	9.73	0.39	0.46	Average																																																																																																																																				
10	11.438	29.49	60.00	-30.51	18.91	9.73	0.39	0.46	QP																																																																																																																																				
11	13.337	24.74	50.00	-25.26	14.09	9.75	0.42	0.48	Average																																																																																																																																				
12	13.337	28.95	60.00	-31.05	18.30	9.75	0.42	0.48	QP																																																																																																																																				
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).																																																																																																																																													