



Report No: IC 1906212-01 File reference No: 2019-06-27

Applicant: Pointer Telocation

Product: MiniTrack 2G

Model No: CM900100-000

Marketing name: MiniTrack 2G

Test Standards: FCC 47 CFR Part 2, 22(H), 24(E)

RSS-132 Issue 3, January 2013 RSS-133 Issue 6, January 2013 RSS-Gen Issue 5, April 2018

Test result: In the configuration tested, the EUT complied with the standards

specified above.

Approved By

Jack Chung

Jack Chung Manager

Dated: June 27, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1906212-01 Page 2 of 39

Date: 2019-06-27



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A-2

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A-2.

Page 3 of 39

Report No.: FCC1906212-01

Date: 2019-06-27



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	Test Configuration of Equipment Under Test.	9
2.1	Test Mode	9
2.2	Connection Diagram of Test System.	10
3.0	Technical Details	12
3.1	Conducted Output Power Measurement.	12
3.2	Effective Radiated Power and Effective Isotropic Radiated Power Measurement	14
3.3	Occupied Bandwidth Measurement	17
3.4	Band Edge Measurement	22
3.5	Conducted Emission Measurement	25
3.6	Field Strength of Spurious Radiation Measurement	28
3.7	Frequency Stability Measurement	32
3.8	Peak to Average Ratio	36
4.0	Test Equipment	38
5.0	Photographs	39

Report No.: FCC1906212-01 Page 4 of 39

Date: 2019-06-27



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong

Le Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189

For 3m Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Chamber

1.2 Applicant Details

Applicant: Pointer Telocation

Address: FCC:14 Hamelacha, Rohash Haain, 11473, Israel

IC: 14 Hamelacha St. Rosh Ha'ayin, 11473, Israel

Telephone: --Fax: --

1.3 Description of EUT

Product: MiniTrack 2G

Manufacturer: Asiatelco Technologies Co

Address: #289 Bisheng Road, Building-8, 3F, Zhangjiang Hi-Tech Park,

Pudong,

Shanghai 201204, China

Marketing name: MiniTrack 2G Model Number: CM900100-000

Hardware Version: P2

Software Version: MM12_V1.0.9

Tx Frequency GSM850 : 824.2 MHz ~ 848.8 MHz

PCS1900 : 1850.2 MHz ~ 1909.8 MHz

Rx Frequency GSM850 : 869.2 MHz ~ 893.8 MHz

PCS1900: 1930.2 MHz ~ 1989.8 MHz

Support Networks: GPRS

Antenna Type Integral Antenna

Antenna Peak Gain GSM850 Band : -5.67dBi

PCS1900 Band: -2.56Bi

Type of Modulation GMSK

 IC:
 9975A-MINI2G

 FCC ID:
 2AG69MINI2G

Input Voltage: DC12V

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1906212-01 Page 5 of 39

Date: 2019-06-27



1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2019-03-01 to 2019-03-14

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Report No.: FCC1906212-01 Page 6 of 39

Date: 2019-06-27



1.8 Operation Frequency List:

GSM	I 850	PCS	1900
Channel	el Frequency (MHz) Channe		Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
• :	· :	· :	• :
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
• :	• :	• :	• :
250	848.60	809	1909.60
251	848.80	810	1909.80

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Final test channel:

GSM	I 850	PCS	1900
Channel	Channel Frequency (MHz)		Frequency (MHz)
128	824.20	512	1850.20
190	836.60	661	1880.00
251	848.80	810	1909.80

Page 7 of 39 Report No.: FCC1906212-01

Date: 2019-06-27



Summary of test result

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A	PASS	-
3.2	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.2	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	\$2.1049 \$22.917(a) \$24.238(a)	Occupied Bandwidth	N/A	PASS	-
3.4	\$2.1051 \$22.917(a) \$24.238(a)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.5	\$2.1051 \$22.917(a) \$24.238(a)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.6	\$2.1053 \$22.917(a) \$24.238(a)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	-
3.7	\$2.1055 \$22.355 \$24.235	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-
3.8	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-

Page 8 of 39

Report No.: FCC1906212-01

Date: 2019-06-27



Test Item	Section in RSS	Result
DEE (GAD)	DGG 102	Pass*
RF Exposure (SAR)	RSS-102	(Please refer to MPE Report)
Frequency Plan	RSS-132 Clause 5.1	Pass
	RSS-133 Clause 6.1	1 435
Types of Modulation	RSS-132 Clause 5.2	Pass
Types of Wodulation	RSS-133 Clause 6.2	1 455
Occupied Bandwidth	RSS-Gen Clause 6.6	Pass
Frequency Stability	RSS-132 Clause 5.3	Pass
riequency Stability	RSS-133 Clause 6.3	F 455
Transmitter Output Power and Equivalent	RSS-132 Clause 5.4	Pass
Isotropically Radiated Power	RSS-133 Clause 6.4	F 455
Dealy to Ayana as Dayyan Datio	RSS-132 Clause 5.4	Dogo
Peak-to-Average Power Ratio	RSS-133 Clause 6.4	Pass
Transmitter Unwanted Emissions	RSS-132 Clause 5.5	Pass
Transmitter Unwanted Emissions	RSS-133 Clause 6.5	rass
Field strength of spurious radiation measurement	RSS-Gen Clause 6.13	Pass

Pass: The EUT complies with the essential requirements in the standard.

Report No.: FCC1906212-01 Page 9 of 39

Date: 2019-06-27



2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range. Frequency range investigated for radiated emission is as follows:


- 1. 30 MHz to 9000 MHz for GSM850
- 30 MHz to 19000 MHz for PCS1900

	Test Modes								
Band	Radiated TCs	Conducted TCs							
GSM 850	■ GPRS 1 Link	■ GPRS 1 Link							
PCS 1900	■ GPRS 1 Link	■ GPRS 1 Link							

Date: 2019-06-27



2.2 Connection Diagram of Test System

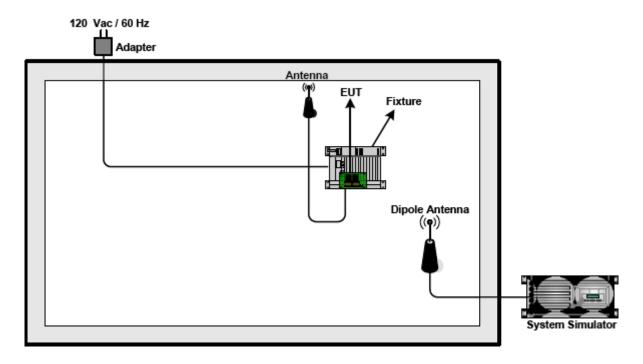

2.3 Frequency Plan

2.5 Trequency Trun								
Frequency Plan for band 824MHz ~ 849MHz								
Frequency Plan (MHz) 824-835 835-845 845-846.5 846.5-849								
Product Supported plan (Yes or No)	Y	Y	Y	Y				

Frequency Plan for band 1850MHz ~ 1915MHz							
Block	Total Spectrum	Lower Sub-band	Product Supported plan (Yes or No)				
Block A	30 MHz	1850-1865 MHz	Y				
Block D*	10 MHz	1865-1870 MHz	Y				
Block B1	10 MHz	1870-1875 MHz	Y				
Block B2*	10 MHz	1875-1880 MHz	Y				
Block B3*	10 MHz	1880-1885 MHz	Y				
Block E*	10 MHz	1885-1890 MHz	Y				
Block F	10 MHz	1890-1895 MHz	Y				
Block C1*	10 MHz	1895-1900 MHz	Y				
Block C2*	10 MHz	1900-1905 MHz	Y				

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1906212-01 Page 11 of 39

Date: 2019-06-27



Block C3*	10 MHz	1905-1910 MHz	Y
Block G	10 MHz	1910-1915 MHz	N

Note: * The usage of these blocks in certain geographic areas is under policies listed in SRSP-510 sections 3.1.3, 3.1.4, 3.1.5 and 3.1.15.

Report No.: FCC1906212-01 Page 12 of 39

Date: 2019-06-27



3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to base station.
- 2. Set EUT at maximum power through base station.
- 3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup



Report No.: FCC1906212-01 Page 13 of 39

Date: 2019-06-27



3.1.5 Test Result of Conducted Output Power

Conducted Power (dBm)									
Band GSM850				PCS1900					
Channel	128	128 190 251			661	810			
Frequency	824.20	836.60	848.80	1850.20	1880.00	1909.80			
GPRS (GMSK, 1 TX slot)	33.19	33.20	33.11	29.46	29.16	28.86			
GPRS (GMSK, 2 TX slot)	31.43	31.50	31.44	28.10	27.98	27.82			
GPRS (GMSK, 3 TX slot)	28.84	28.93	28.87	25.75	25.65	25.59			
GPRS (GMSK, 4 TX slot)	28.40	28.44	28.40	24.95	24.93	25.01			

Date: 2019-06-27



Page 14 of 39

3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

- 1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
- 2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
- GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;
 UMTS operating modes: Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per KDB 971168 D01.
- 4. The table was rotated 360 degrees to determine the position of the highest radiated power.
- 5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
- 6. Taking the record of maximum ERP/EIRP.
- 7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. The conducted power at the terminal of the dipole antenna is measured.
- 9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
- 10. ERP/EIRP = Ps + Et Es + Gs = Ps + Rt Rs + Gs

Ps (dBm): Input power to substitution antenna.

Gs (dBi or dBd): Substitution antenna Gain.

Et = Rt + AFEs = Rs + AF

AF (dB/m): Receive antenna factor

Rt: The highest received signal in spectrum analyzer for EUT.


Rs: The highest received signal in spectrum analyzer for substitution antenna.

Date: 2019-06-27




3.2.4 **Test Setup**


Below1GHz

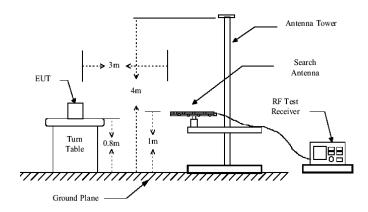

Above 1GHz

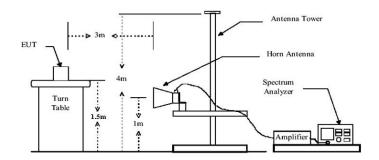

Substituted method:

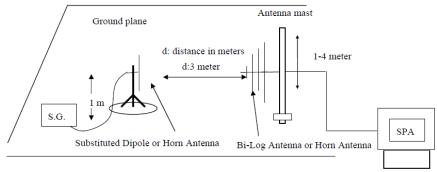

Date: 2019-06-27



Page 16 of 39

3.2.5 Test Result of ERP

The maximum value has been record and the tighter limits apply:

EUT mode	Channel	Modu lation	Polariz ation	SGP [dBm]	Substitution Gain[dBi]	Cable loss[dB]	ERP (dBm)	Limit (dBm)	Result
	Lowest	QPSK	Н	22.07	-2.08	1.55	21.54	38.45	Pass
GSM 850	Middle	QPSK	Н	22.54	-2.08	1.6	22.06	38.45	Pass
	Highest	QPSK	Н	22.39	-2.08	1.65	21.96	38.45	Pass

3.2.6 Test Result of EIRP

The maximum value has been record and the tighter limits apply:

EUT mode	Channel	Modul ation	Polari zation	SGP [dBm]	Substitution Gain[dBi]	Cable loss[dB]	EIRP (dBm)	Limit (dBm)	Result
	Lowest	QPSK	Н	22.47	-1.93	1.13	21.67	33.00	Pass
PCS 1900	Middle	QPSK	Н	22.39	-1.93	1.22	21.68	33.00	Pass
	Highest	QPSK	Н	22.44	-1.93	1.34	21.85	33.00	Pass

Report No.: FCC1906212-01 Page 17 of 39

Date: 2019-06-27



3.3 Occupied Bandwidth Measurement

3.3.1 Description of Occupied Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

- 1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 10*RBW, Peak detector, trace maximum hold.
- 4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.3.4 Test Setup

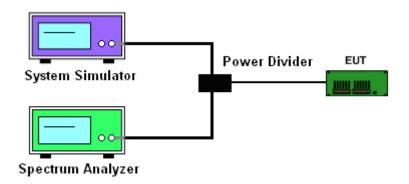

Report No.: FCC1906212-01 Page 18 of 39

Date: 2019-06-27



3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS 1 link)					
Channal	128	190	251			
Channel	(Low)	(Mid)	(High)			
Frequency (MHz)	824.2	836.6	848.8			
99% OBW (kHz)	245.79	246.38	251.69			
26dB BW (kHz)	318.17	316.17	324.97			


PCS Band					
Modes	PCS1900 (GPRS 1 link)				
Ohamal	512	661	810		
Channel	(Low)	(Mid)	(High)		
Frequency (MHz)	1850.2 1880 1909				
99% OBW (kHz)	246.97	243.36	242.22		
26dB BW (kHz)	319.40	327.09	321.38		

Date: 2019-06-27




3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth

GSM 850MHz Channel = 128



GSM 850MHz Channel = 190




Page 20 of 39

Report No.: FCC1906212-01

Date: 2019-06-27



GSM 850MHz Channel = 251



GSM 1900MHz Channel = 512




Page 21 of 39

Report No.: FCC1906212-01

Date: 2019-06-27



GSM 1900MHz Channel = 661



GSM 1900MHz Channel = 810



Report No.: FCC1906212-01 Page 22 of 39

Date: 2019-06-27



3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 5. The limit line is derived from 43 + 10log (P) dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm.

3.4.4 Test Setup

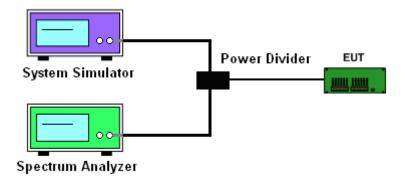

Report No.: FCC1906212-01 Page 23 of 39


Date: 2019-06-27




3.4.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Power Stage :	High
Test Mode :	GPRS 1 Link		

Lower Band Edge Plot on Channel 128








Report No.: FCC1906212-01 Page 24 of 39

Date: 2019-06-27




Band:	PCS1900	Power Stage :	High
Test Mode:	GPRS 1 Link		

Lower Band Edge Plot on Channel 512



Higher Band Edge Plot on Channel 810



Date: 2019-06-27



3.5 Conducted Emission Measurement

3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.


3.5.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm

3.5.4 Test Setup



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2019-06-27





3.5.5 Test Result (Plots) of Conducted Emission

Test plot as follows:


Test Mode: Traffic mode


GSM 850 (GPRS 1 link)







Lowest channel





Middle channel





Highest channel

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Date: 2019-06-27




Test Mode: Traffic mode


PCS 1900 (GPRS 1 link)







Lowest channel





Middle channel





Highest channel

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-06-27



Page 28 of 39

3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

- 1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
- The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 11. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm.
- 12. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 13. ERP (dBm) = EIRP 2.15

Page 29 of 39


Report No.: FCC1906212-01

Date: 2019-06-27




3.6.4 Test Setup


Below 1GHz

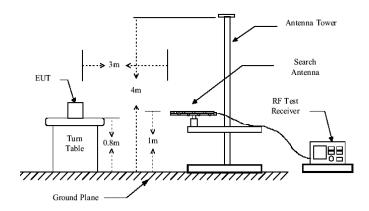

Above 1GHz

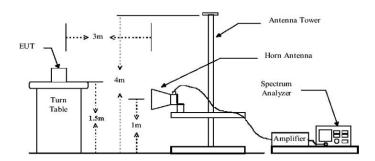

Substituted method:

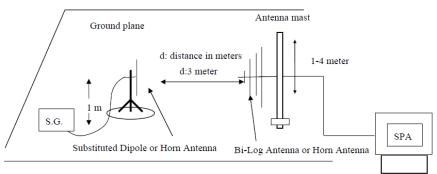

Date: 2019-06-27



3.6.5 Test Result of Field Strength of Spurious Radiated

Test mode: GSM850 Test channel: Lowest					
10011110001		s Emission			
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
1648.40	Vertical	-51.90			
2472.60	V	-53.64			
3296.80	V	-51.90	-13.00	Pass	
4121.00	V	-54.06			
4945.20	V	-51.81			
1648.40	Horizontal	-53.14			
2472.60	Н	-54.01			
3296.80	Н	-53.32	-13.00	Pass	
4121.00	Н	-52.07			
4945.20	Н	-52.19			
Test mode:	GS	M850	Test channel:	Middle	
Frequency (MHz)	Spurious	Emission	Limit (dBm)	Result	
Frequency (MHZ)	Polarization	Level (dBm)	Liffiit (dbfff)	Result	
1673.20	Vertical	-54.27			
2509.80	V	-53.55			
3346.40	V	-54.45	-13.00	Pass	
4183.00	V	-53.25			
5019.60	V	-52.06			
1673.20	Horizontal	-52.65		Pass	
2509.80	Н	-52.87			
3346.40	Н	-53.19	-13.00		
4183.00	Н	-52.47			
5019.60	Н	-53.16			
Test mode:	GS	M850	Test channel:	Highest	
Frequency (MHz)	-	Emission	Limit (dBm)	Result	
. roquoney (m 12)	Polarization	Level (dBm)	Zimit (dBiri)	recount	
1697.60	Vertical	-57.52			
2546.40	V	-53.55			
3395.20	V	-51.22	-13.00	Pass	
4244.00	V	-52.83			
5092.80	V	-53.75			
1697.60	Horizontal	-51.41			
2546.40	Н	-54.28			
3395.20	Н	-55.44	-13.00	Pass	
4244.00	Н	-57.47			
5092.80	Н	-53.34			

Remark:

- 1. The emission behaviour belongs to narrowband spurious emission.
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-06-27



Test mode:	PCS	61900	Test channel:	Lowest	
- (111)	Spurious	Emission	1: :: (15)	5 "	
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
3700.40	Vertical	-56.97			
5550.60	V	-59.36			
7400.80	V	-51.33	-13.00	Pass	
9251.00	V	-53.23			
11101.20	V	-52.83			
3700.40	Horizontal	-51.55			
5550.60	Н	-54.93			
7400.80	Н	-56.29	-13.00	Pass	
9251.00	Н	-58.66			
11101.20	Н	-54.63			
Test mode:	PCS	61900	Test channel:	Middle	
Fraguenov (MILIT)	Spurious	Emission	Limit (dDm)	Result	
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
3760.00	Vertical	-54.66			
5640.00	V	-57.12			
7520.00	V	-59.16	-13.00	Pass	
9400.00	V	-51.13			
11280.00	V	-53.06			
3760.00	Horizontal	-49.40		Pass	
5640.00	Н	-52.89			
7520.00	Н	-54.30	-13.00		
9400.00	Н	-56.76			
11280.00	Н	-53.51			
Test mode:	PCS	31900	Test channel:	Highest	
Frequency (MHz)	Spurious	Emission	Limit (dBm)	Result	
Frequency (Wiriz)	Polarization	Level (dBm)	Liffiit (dbfff)	Kesuit	
3819.60	Vertical	-55.85			
5729.40	V	-58.24			
7639.20	V	-50.22	-13.00	Pass	
9549.00	V	-52.12			
11458.80	V	-52.79			
3819.60	Horizontal	-50.44			
5729.40	Н	-53.83	_		
7639.20	Н	-55.19	-13.00	Pass	
9549.00	Н	-57.57	_		
11458.80	Н	-53.56			

Remark:

- 1. The emission behaviour belongs to narrowband spurious emission.
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report

correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-06-27



Page 32 of 39

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30℃ and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10℃ step up to 50℃. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
- 4. If the EUT can not be turned on at -30°C, the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.7.4 Test Procedures for Voltage Variation


- The EUT was placed in a temperature chamber at 25±5° C and connected with the base station.
- 2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

Report No.: FCC1906212-01 Page 33 of 39

Date: 2019-06-27



3.7.5 Test Setup

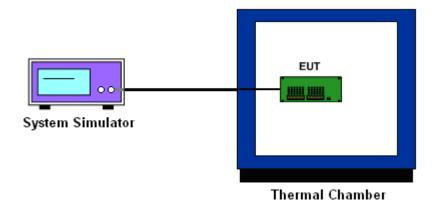

Report No.: FCC1906212-01 Page 34 of 39

Date: 2019-06-27



3.7.6 Test Result of Temperature and Voltage Variation

Reference Fr	requency: GSM850	(GPRS 1 link) Mic	ddle channel=19	0 channel=836.	6MHz	
Power supplied	Temperature (°C)		cy error	Limit (nnm)	Result	
(Vdc)	remperature (C)	Hz	ppm	Limit (ppm)	Result	
	-30	98	0.1166			
	-20	110	0.1320			
	-10	93	0.1114			
	0	76	0.0908			
12.0	10	89	0.1063	2.5	Pass	
	20	76	0.0908			
	30	128	0.1526			
	40	115	0.1372			
	50	110	0.1320			
Reference Fr	requency: PCS1900	(GPRS 1 link) M	iddle channel=66	61 channel=188	0MHz	
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result	
rower supplied (vdc)	remperature (C)	Hz	ppm		Result	
	-30	68	0.0817			
	-20	76	0.0905			
	-10	65	0.0774			
	0	57	0.0686			
12.0	10	61	0.0730	2.5	Pass	
	20	54	0.0642			
	30	94	0.1124			
	40	79	0.0949			
	50	76	0.0905			

Report No.: FCC1906212-01 Page 35 of 39

Date: 2019-06-27



Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz						
Temperature (°C)	Power supplied	Freque	Frequency error		Result	
remperature (0)	(Vdc)	Hz	ppm	Limit (ppm)	resuit	
	36.0	33	0.0392			
25	12.0	38	0.0451	2.5	Pass	
	5.0	43	0.0509			
Reference	Frequency: PCS1900	0 (GPRS 1 link) M	iddle channel=66	1 channel=1880	MHz	
Temperature (°C)	Power supplied	Freque	Frequency error		Result	
remperature (0)	(Vdc)	Hz	ppm	Limit (ppm)	Result	
	36.0	46	0.0547			
25	12.0	34	0.0408	2.5	Pass	
	5.0	38	0.0454			

Note: The extreme voltage was declared by the manufacturer.

Date: 2019-06-27



Page 36 of 39

3.8 Peak-to-Average Ratio

3.8.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures

- 1. The EUT was connected to Spectrum Analyzer and System Simulator via power divider.
- 2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator synchronized with the spectrum analyzer.
- 3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.

3.8.4 Test Setup

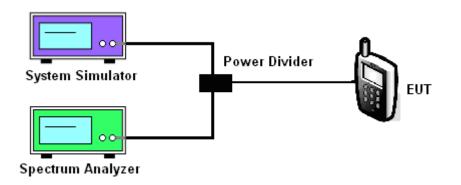

Report No.: FCC1906212-01 Page 37 of 39

Date: 2019-06-27



3.8.5 Test Result of Peak-to-Average Ratio

Modes	GSM850			PCS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	7.77	7.74	7.74	7.83	8.03	7.76

Page 38 of 39

Report No.: FCC1906212-01

Date: 2019-06-27



4.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic	-		N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07
Universal Radio Communication Test	RS	CMU200	1100.008.02	2018-06-22	2019-06-21

Date: 2019-06-27



Page 39 of 39

5.0 Photographs

Reference to the appendix I for details.

Photographs – EUT Reference to the appendix II for details.

End of the report