

# EMC TEST REPORT


**Report No. : EME-051170****Model No. : G-570S****Issued Date : Dec. 13, 2005**

**Applicant : ZyXEL Communications Corporation**  
**6, Innovation Rd II, Science-Based Industrial Park,**  
**Hsin-Chu, Taiwan**

**Test By : Intertek Testing Services Taiwan Ltd.**  
**No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,**  
**Shiang-Shan District, Hsinchu City, Taiwan**

This test report consists of 53 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

Project Engineer

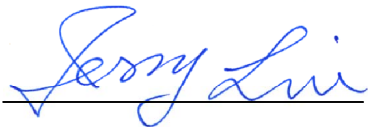

Jerry Liu

Reviewed By



Kevin Chen

## Table of Contents

Summary of Tests .....	4
1. General information .....	5
1.1 Identification of the EUT .....	5
1.2 Additional information about the EUT .....	5
1.3 Antenna description .....	6
1.4 Peripherals equipment .....	6
2. Test specifications .....	7
2.1 Test standard .....	7
2.2 Operation mode .....	7
2.3 Test equipment .....	8
3. Minimum 6dB Bandwidth test .....	9
3.1 Operating environment .....	9
3.2 Test setup & procedure .....	9
3.3 Measured data of Minimum 6dB Bandwidth test results .....	9
4. Maximum Output Power test .....	17
4.1 Operating environment .....	17
4.2 Test setup & procedure .....	17
4.3 Measured data of Maximum Output Power test results .....	17
5. Radiated Emission test .....	19
5.1 Operating environment .....	19
5.2 Test setup & procedure .....	19
5.3 Emission limits .....	20
5.4 Radiated spurious emission test data .....	21
5.4.1 Measurement results: frequencies equal to or less than 1 GHz .....	21
5.4.2 Measurement results: frequency above 1GHz .....	24
6. Power Spectrum Density test .....	31
6.1 Operating environment .....	31
6.2 Test setup & procedure .....	31
6.3 Measured data of Power Spectrum Density test results .....	31
7. Emission on the band edge .....	40
7.1 Operating environment .....	40
7.2 Test setup & procedure .....	40

7.3 Test Result .....	41
7.3.1 Conducted Method .....	41
7.3.2 Radiated Method .....	49
8. Power Line Conducted Emission test §FCC 15.207 .....	50
8.1 Operating environment.....	50
8.2 Test setup & procedure.....	50
8.3 Emission limit .....	51
8.4 Uncertainty of Conducted Emission .....	51
8.5 Power Line Conducted Emission test data.....	52

**Summary of Tests****802.11g Wireless Access Point -Model: G-570S  
FCC ID: I88G570S**

Test	Reference	Results
Minimum 6dB Bandwidth test	15.247(a)(2)	Complies
Maximum Output Power test	15.247(b)	Complies
Radiated Spurious Emission test	15.205, 15.209	Complies
Power Spectrum Density test	15.247(e)	Complies
Emission on the Band Edge test	15.247(d)	Complies
AC Power Line Conducted Emission test	15.207	Complies

**1. General information****1.1 Identification of the EUT**

Applicant	: ZyXEL Communications Corporation
Product	: 802.11g Wireless Access Point
Model No.	: G-570S
FCC ID.	: I88G570S
Frequency Range	: 2412MHz ~ 2462MHz
Channel Number	: 11 channels
Frequency of Each Channel	: 2412MHz, 2417MHz, 2422MHz, 2427MHz, 2432MHz, 2437MHz, 2442MHz, 2447MHz, 2452MHz, 2457MHz, 2462MHz
Type of Modulation	: DSSS, OFDM
Rated Power	: 120Vac, 60Hz with adapter (AD-121A)
Power Cord	: N/A
Data Cable	: RJ-45 UTP Cat.5 10meter × 1
Sample Received	: Oct. 20, 2005
Test Date(s)	: Oct. 22, 2005 ~ Dec. 12, 2005

A FCC DoC report has been generated for the client.

**1.2 Additional information about the EUT**

The EUT is an 802.11g Wireless Access Point, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

### 1.3 Antenna description

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 2.05dBi max

Antenna Type : Dipole antenna

Connector Type : SMA Plug Reverse

### 1.4 Peripherals equipment

Peripherals	Manufacturer	Product No.	Serial No.
Notebook PC	DELL	PP05L	CN-5G5152-48643-498-6810

## **2. Test specifications**

### **2.1 Test standard**

The EUT was performed according to the procedures in FCC Part 15 Subpart C Section § 15.205 、 §15.207 、 §15.209 、 §15.247 and ANSI C63.4/2003.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

### **2.2 Operation mode**

The EUT was operated in continuously transmitting status during all the tests.

**2.3 Test equipment**

Equipment	Brand	Frequency range	Model No.	Intertek ID No.	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS 30	EC303	04/17/2006
EMI Test Receiver	Rohde & Schwarz	20Hz~26.5GHz	ESMI	EC317	08/07/2006
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP 30	EC353	07/24/2006
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK 30	EC365	11/01/2006
Horn Antenna	SCHWARZBECK	1GHz~18GHz	BBHA 9120 D	EC371	12/22/2007
Horn Antenna	SCHWARZBECK	14GHz~40GHz	BBHA 9170	EC351	07/08/2007
Bilog Antenna	SCHWARZBECK	25MHz~2GHz	VULB 9168	EC347	12/23/2007
Pre-Amplifier	MITEQ	100MHz~26.5GHz	919981	EC373	12/30/2005
Pre-Amplifier	MITEQ	26GHz~40GHz	828825	EC374	01/28/2006
Wideband Peak Power Meter/ Sensor	Anritsu	100MHz~18GHz	ML2497A/ MA2491A	EC396	11/10/2006
Controller	HDGmbH	N/A	CM 100	EP346	N/A
Antenna Tower	HDGmbH	N/A	MA 240	EP347	N/A
LISN	Rohde & Schwarz	9KHz~30MHz	ESH3-Z5	EC344	01/13/2006

Note: 1. The above equipments are within the valid calibration period.

2. The test antennas (receiving antenna) are calibration per 3 years.

### 3. Minimum 6dB Bandwidth test

#### 3.1 Operating environment

Temperature: 22 °C  
 Relative Humidity: 53 %  
 Atmospheric Pressure: 1021 hPa

#### 3.2 Test setup & procedure

The minimum 6dB bandwidth per FCC §15.247(a)(2) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel). The minimum 6-dB modulation bandwidth is in the following Table.

#### 3.3 Measured data of Minimum 6dB Bandwidth test results

Test Mode: 802.11b(DSSS Modulation) operating mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit
1 (lowest)	2412	11.78356713	> 500kHz
6 (middle)	2437	11.14228457	> 500kHz
11 (highest)	2462	11.50300601	> 500kHz

Test Mode: 802.11g(OFDM Modulation) operating mode


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit
1 (lowest)	2412	16.43286573	> 500kHz
6 (middle)	2437	16.39278557	> 500kHz
11 (highest)	2462	16.43286573	> 500kHz

Test Mode: 802.11g turbo mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit
6 (middle)	2437	32.76553106	> 500kHz


Please see the plot below.

## Test Mode: 802.11b(DSSS Modulation) operating mode

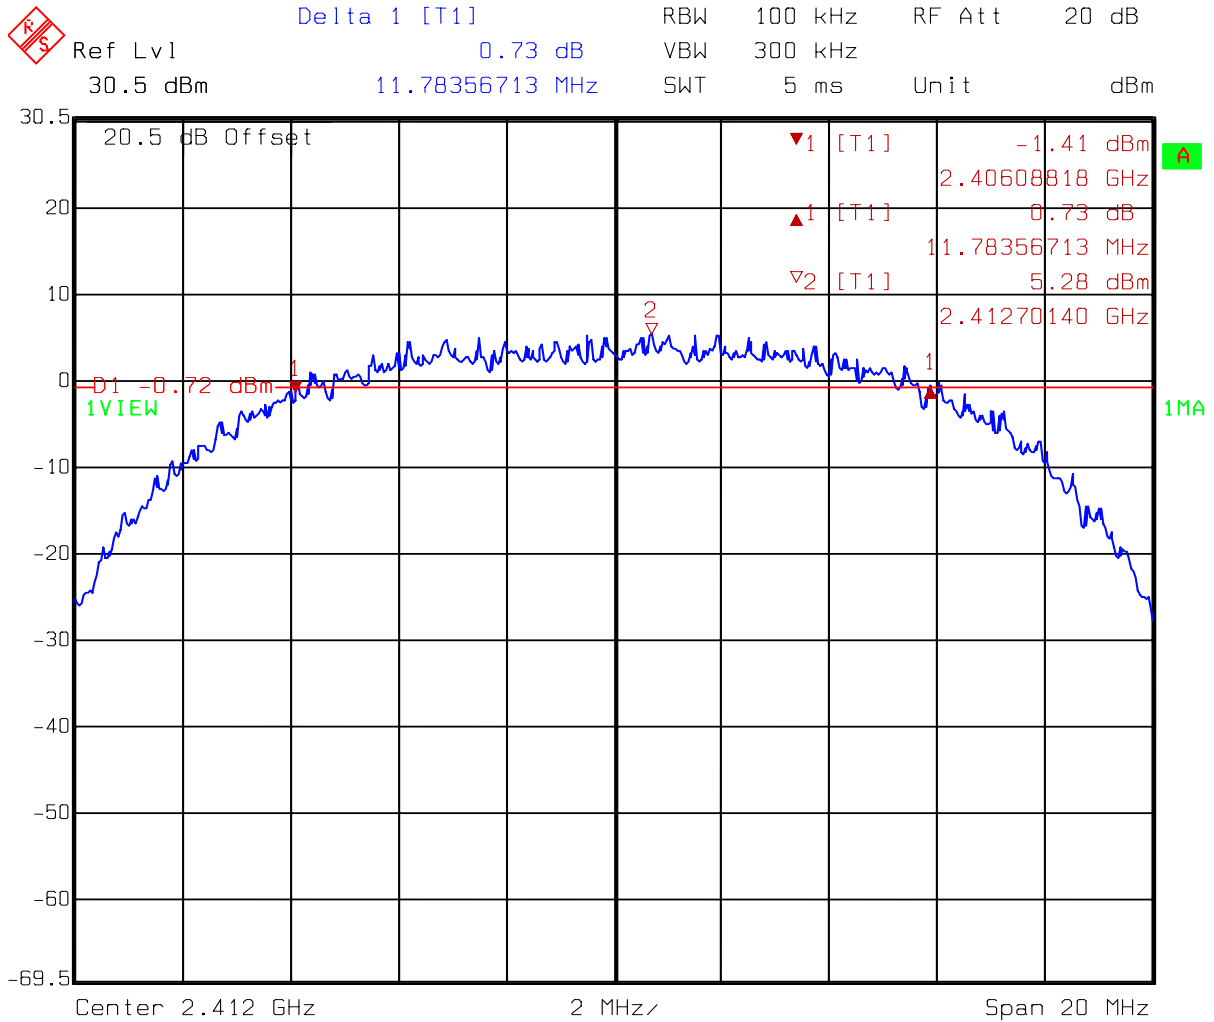


Comment A: 6dB Bandwidth  
11b CH1

Date: 03.NOV.2005 17:13:27

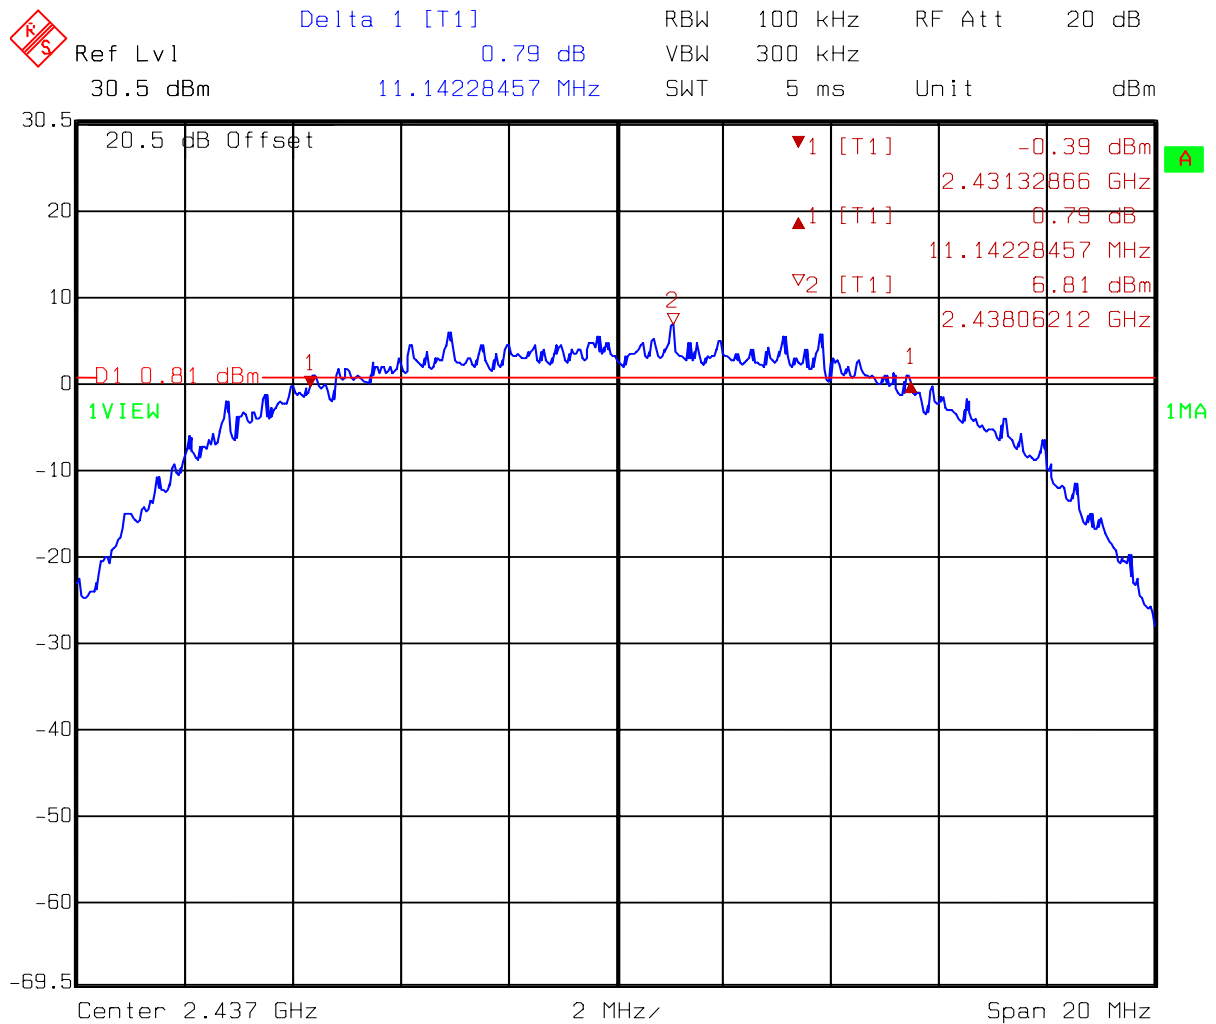

Comment A: 6dB Bandwidth  
11b CH6


Date: 03.NOV.2005 17:16:10

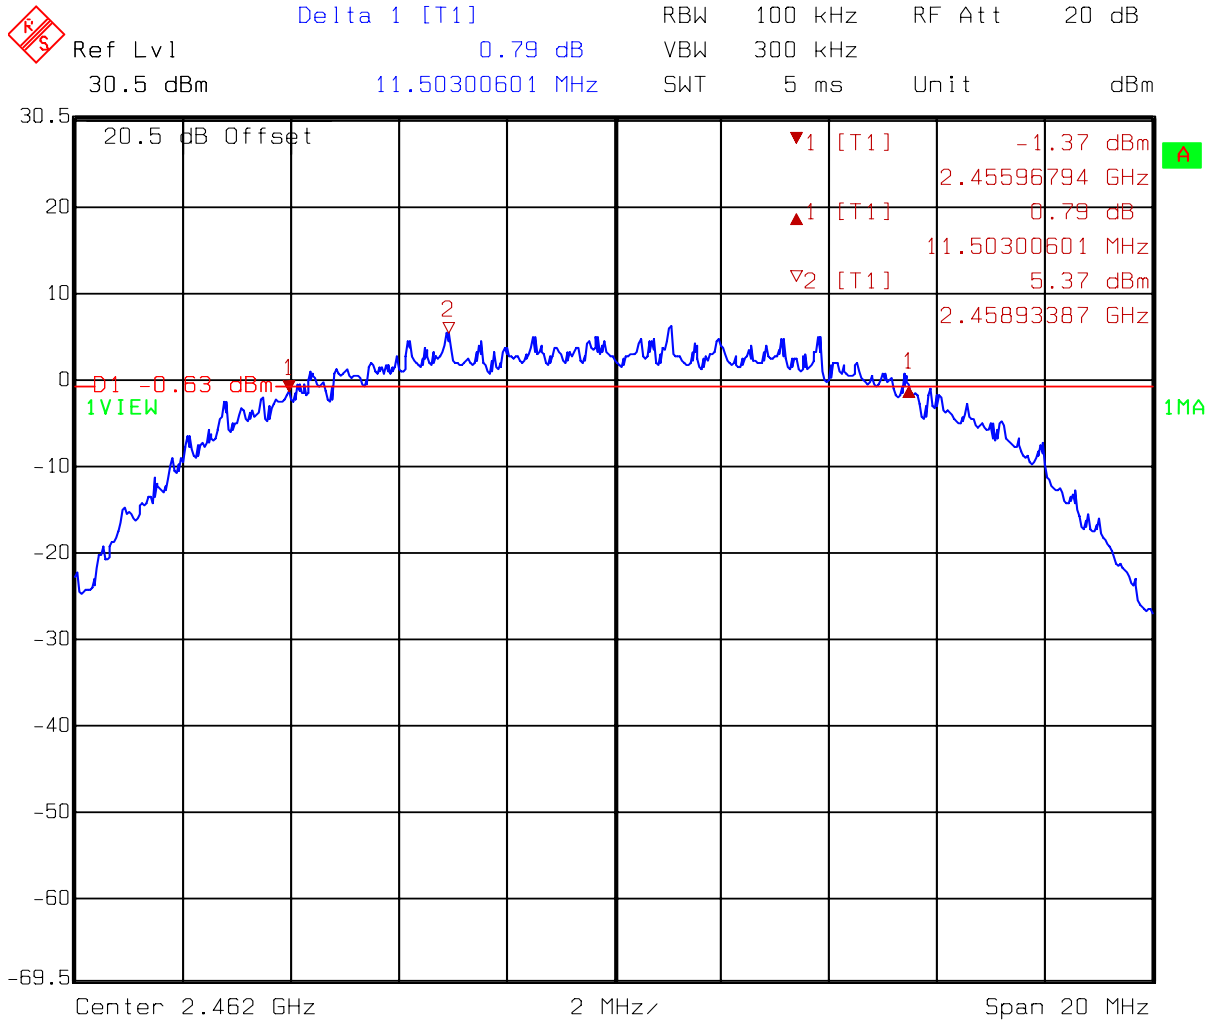

Comment A: 6dB Bandwidth  
11b CH11

Date: 03.NOV.2005 17:18:48


## Test Mode: 802.11g(OFDM Modulation) operating mode

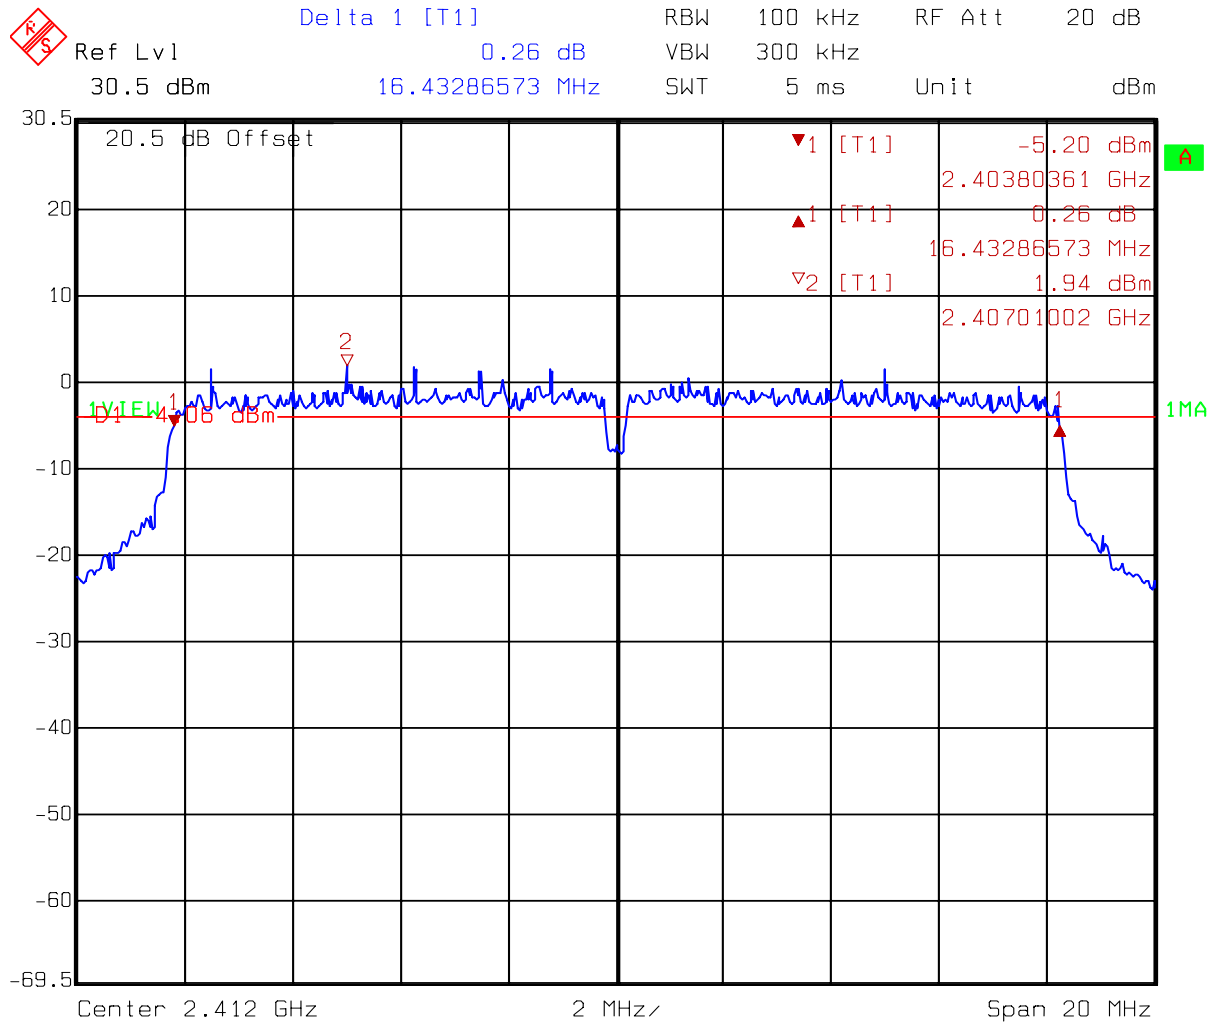

Comment A: 6dB Bandwidth


11g CH1

Date: 03.NOV.2005 17:27:17

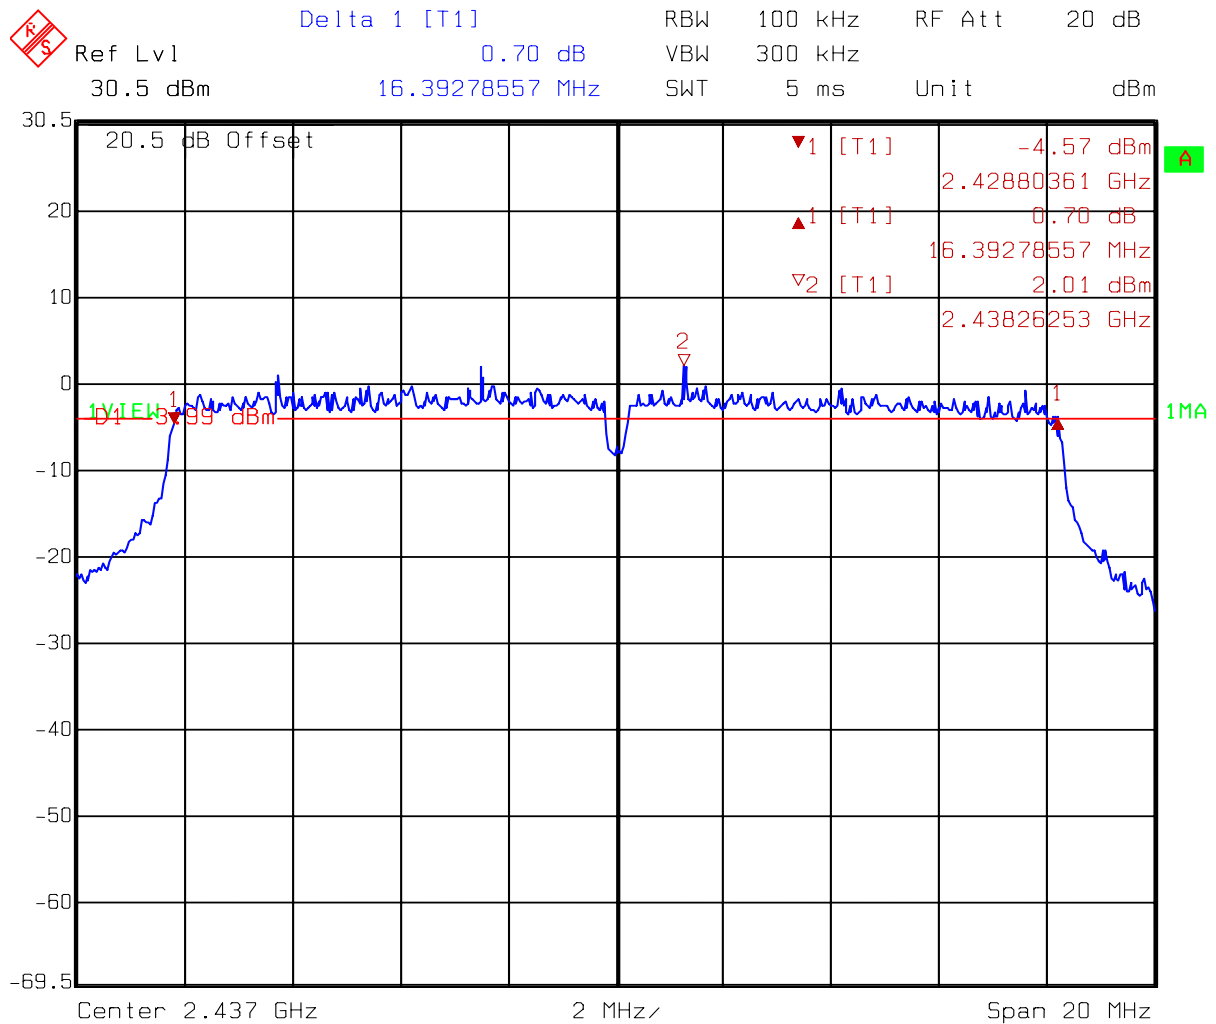

Comment A: 6dB Bandwidth  
11g CH6


Date: 03.NOV.2005 17:25:13

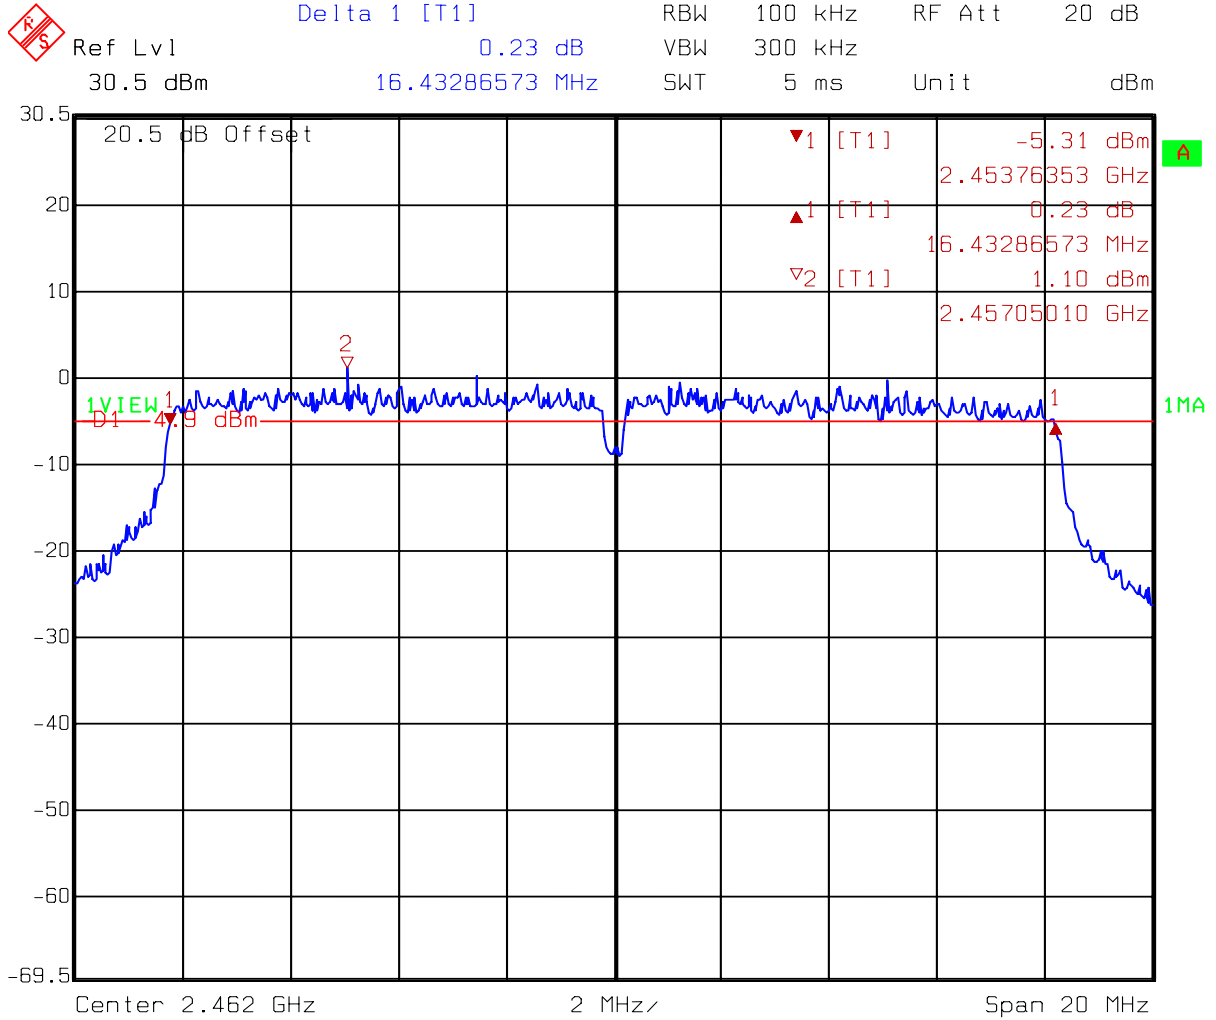

Comment A: 6dB Bandwidth  
11g CH11

Date: 03.NOV.2005 17:21:40

Test Mode: 802.11g turbo mode

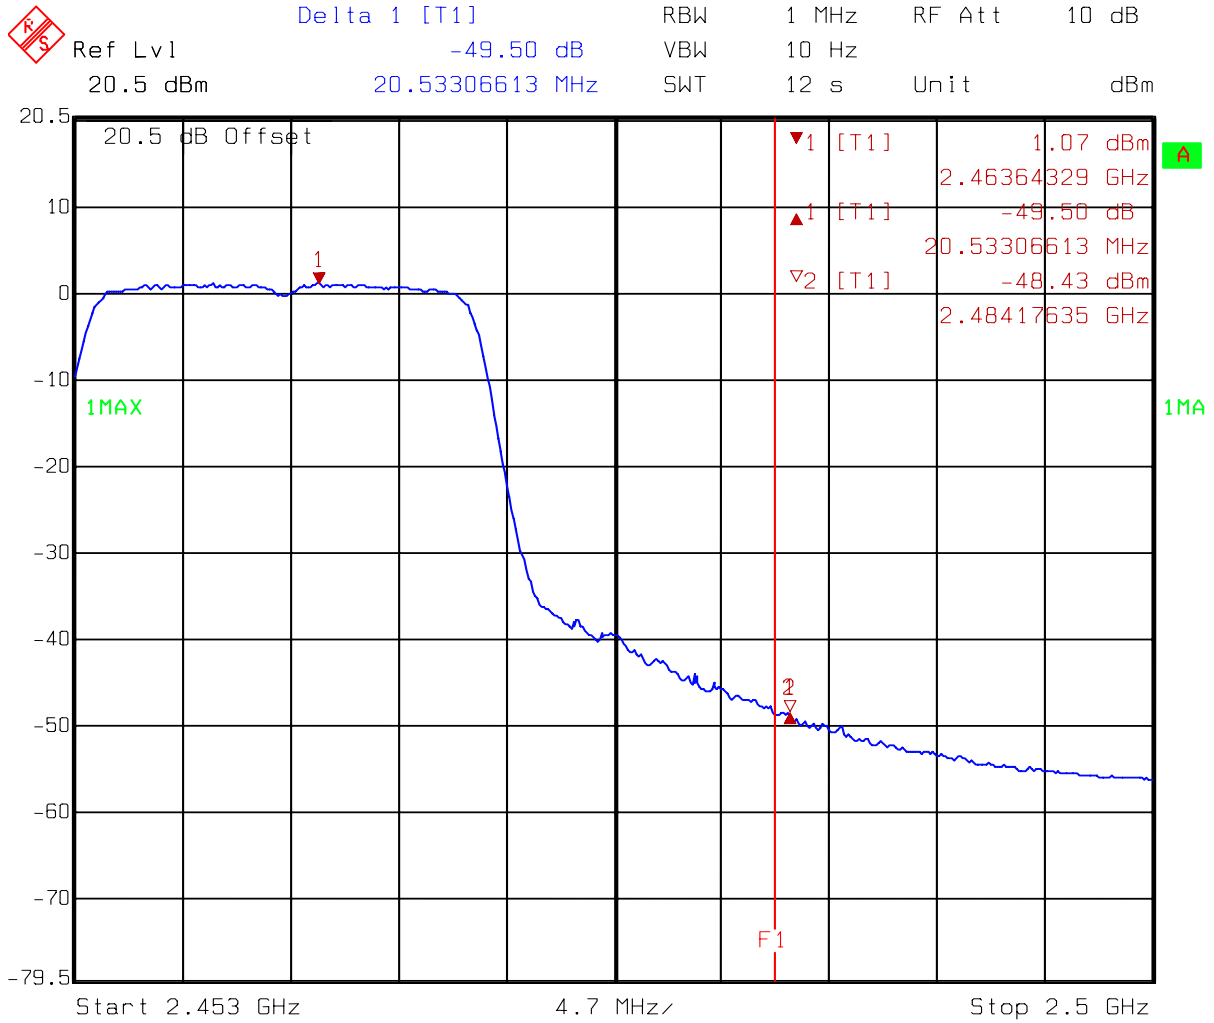

Comment A: Band-edge at 11g\_ch11  
F1=2483.5MHz EC365

Date: 09.DEC.2005 11:49:36

#### 4. Maximum Output Power test

##### 4.1 Operating environment

Temperature: 22 °C  
 Relative Humidity: 51 %  
 Atmospheric Pressure: 1022 hPa

##### 4.2 Test setup & procedure

The power output per FCC §15.247(b) was measured on the EUT using a 50 ohm SMA cable connected to peak power meter via power sensor. Power was read directly and cable loss correction (0.5 dB) was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel).

##### 4.3 Measured data of Maximum Output Power test results

###### Test Mode: 802.11b(DSSS Modulation) operating mode

Channel	Freq. (MHz)	C.L. (dB)	Reading (dBm)	Conducted Peak Output Power		Limit (W)
				(dBm)	(mW)	
1 (lowest)	2412	0.5	16.82	17.32	53.95	1
6 (middle)	2437	0.5	16.75	17.25	53.09	1
11 (highest)	2462	0.5	16.38	16.88	48.75	1

Remark:

Conducted Peak Output Power = Reading + C.L.

###### Test Mode: 802.11g(OFDM Modulation) operating mode

Channel	Freq. (MHz)	C.L. (dB)	Reading (dBm)	Conducted Peak Output Power		Limit (W)
				(dBm)	(mW)	
1 (lowest)	2412	0.5	20.98	21.48	140.60	1
6 (middle)	2437	0.5	20.86	21.36	136.77	1
11 (highest)	2462	0.5	20.52	21.02	126.47	1

Remark:

Conducted Peak Output Power = Reading + C.L.

Test Mode: 802.11g turbo mode

Channel	Freq. (MHz)	C.L. (dB)	Reading (dBm)	Conducted Peak Output Power		Limit (W)
				(dBm)	(mW)	
6 (middle)	2437	0.5	21.75	22.25	167.88	1

Remark:

Conducted Peak Output Power = Reading + C.L.


## 5. Radiated Emission test

### 5.1 Operating environment

Temperature: 23 °C  
Relative Humidity: 53 %  
Atmospheric Pressure: 1021 hPa

### 5.2 Test setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

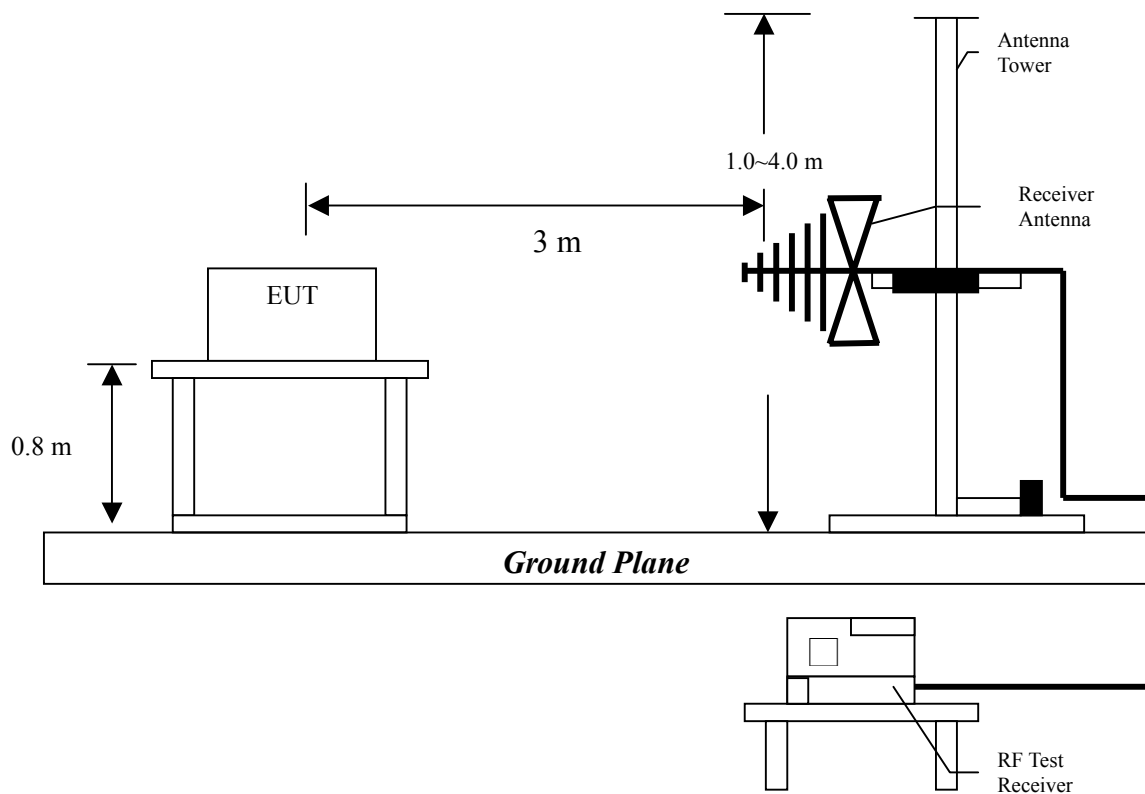

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1MHz RBW/VBW) recorded also on the report.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent 3 meter reading using inverse scaling with distance.

The EUT configuration please refer to the “Spurious set-up photo.pdf”.

### 5.3 Emission limits

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dB $\mu$ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of radiated emission measurement is 4.98 dB.

## 5.4 Radiated spurious emission test data

### The radiated spurious emissions at

Frequency(MHz)	Margin	Frequency(MHz)	Margin
47.46	-3.04	76.56	-3.66
76.56	-3.47	750.00	-4.87
165.00	-3.29	750.00	-3.10
750.00	-3.11	900.00	-2.70
900.00	-4.47	750.00	-3.00
47.46	-3.29	900.00	-2.37

are less than uncertainty. This is within the stated measurement uncertainty, this may affect compliance determined in other test arrangements.

### 5.4.1 Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under 802.11b continuously transmitting mode. Channel 1, 6, 11 were verified. The worst case occurred at 802.11b Tx channel 1.

EUT : G-570S  
Worst Case : 802.11b Tx at channel 1

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Antenna high (cm)	Turn Table angle (degree)
V	47.46	QP	12.87	24.09	36.96	40.00	-3.04	100	187
V	76.56	QP	9.55	26.98	36.53	40.00	-3.47	100	175
V	150.00	QP	15.57	21.69	37.26	43.50	-6.24	100	190
V	165.00	QP	15.27	24.94	40.21	43.50	-3.29	100	169
V	600.00	QP	20.71	19.80	40.51	46.00	-5.49	100	168
V	750.00	QP	22.81	17.95	40.76	46.00	-5.24	100	216
H	105.66	QP	9.88	25.76	35.64	43.50	-7.86	400	177
H	125.00	QP	11.97	25.15	37.12	43.50	-6.38	400	193
H	165.00	QP	13.63	22.01	35.64	43.50	-7.86	400	172
H	500.00	QP	18.13	21.83	39.96	46.00	-6.04	187	152
H	750.00	QP	23.02	19.87	42.89	46.00	-3.11	133	162
H	900.00	QP	24.58	16.95	41.53	46.00	-4.47	100	194

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

The test was performed on EUT under 802.11g continuously transmitting mode. Channel 1, 6, 11 were verified. The worst case occurred at 802.11g Tx channel 1.

EUT : G-570S

Worst Case : 802.11g Tx at channel 1

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Antenna high (cm)	Turn Table angle (degree)
V	47.46	QP	12.87	23.84	36.71	40.00	-3.29	100	188
V	74.62	QP	10.06	24.02	34.08	40.00	-5.92	100	180
V	76.56	QP	9.55	26.79	36.34	40.00	-3.66	100	186
V	150.00	QP	15.57	21.66	37.23	43.50	-6.27	100	176
V	600.00	QP	20.71	19.65	40.36	46.00	-5.64	100	178
V	750.00	QP	22.81	18.32	41.13	46.00	-4.87	100	196
H	105.66	QP	9.88	25.70	35.58	43.50	-7.92	400	182
H	125.00	QP	11.97	24.73	36.70	43.50	-6.80	400	195
H	300.00	QP	14.31	23.51	37.82	46.00	-8.18	372	177
H	500.00	QP	18.13	20.62	38.75	46.00	-7.25	187	162
H	750.00	QP	23.02	19.88	42.90	46.00	-3.10	133	171
H	900.00	QP	24.58	18.72	43.30	46.00	-2.70	100	192

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

EUT : G-570S  
 Test Condition : 802.11g turbo mode

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Antenna high (cm)	Turn Table angle (degree)
V	36.79	QP	12.87	12.51	25.38	40.00	-14.62	100	185
V	87.23	QP	10.06	22.72	32.78	40.00	-7.22	100	168
V	500.00	QP	9.55	20.00	29.55	46.00	-16.45	100	195
V	600.00	QP	15.57	18.12	33.69	46.00	-12.31	100	188
V	750.00	QP	20.71	18.01	38.72	46.00	-7.28	100	174
V	900.00	QP	22.81	15.21	38.02	46.00	-7.98	135	159
H	115.36	QP	9.88	26.57	36.45	43.50	-7.05	400	177
H	250.00	QP	11.97	26.02	37.99	46.00	-8.01	400	182
H	500.00	QP	14.31	19.68	33.99	46.00	-12.01	325	168
H	600.00	QP	18.13	18.57	36.70	46.00	-9.30	255	178
H	750.00	QP	23.02	19.98	43.00	46.00	-3.00	152	191
H	900.00	QP	24.58	19.05	43.63	46.00	-2.37	100	189

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

#### 5.4.2 Measurement results: frequency above 1GHz

EUT : G-570S

Test Condition : 802.11b Tx at channel 1

**Test Result:**

No spurious emission was found above the spectrum analyzer's noise floor.

The noise floor are listed as below:

Noise floor level

For PK:

1GHz-3GHz: 20dBuV

3GHz-14GHz: 27dBuV

14GHz-26.5GHz: 39dBuV

For AV:

1GHz-3GHz: 10dBuV

3GHz-14GHz: 16dBuV

14GHz-26.5GHz: 28dBuV

EUT : G-570S  
Test Condition : 802.11b Tx at channel 6

**Test Result:**

No spurious emission was found above the spectrum analyzer's noise floor.  
The noise floor are listed as below:

**Noise floor level****For PK:**

1GHz-3GHz: 20dBuV

3GHz-14GHz: 27dBuV

14GHz-26.5GHz: 39dBuV

**For AV:**

1GHz-3GHz: 10dBuV

3GHz-14GHz: 16dBuV

14GHz-26.5GHz: 28dBuV

EUT : G-570S

Test Condition : 802.11b Tx at channel 11

**Test Result:**

No spurious emission was found above the spectrum analyzer's noise floor.

The noise floor are listed as below:

Noise floor level

For PK:

1GHz-3GHz: 20dBuV

3GHz-14GHz: 27dBuV

14GHz-26.5GHz: 39dBuV

For AV:

1GHz-3GHz: 10dBuV

3GHz-14GHz: 16dBuV

14GHz-26.5GHz: 28dBuV

EUT : G-570S  
Test Condition : 802.11g Tx at channel 1

**Test Result:**

No spurious emission was found above the spectrum analyzer's noise floor.

The noise floor are listed as below:

Noise floor level

For PK:

1GHz-3GHz: 20dBuV

3GHz-14GHz: 27dBuV

14GHz-26.5GHz: 39dBuV

For AV:

1GHz-3GHz: 10dBuV

3GHz-14GHz: 16dBuV

14GHz-26.5GHz: 28dBuV

EUT : G-570S  
Test Condition : 802.11g Tx at channel 6

**Test Result:**

No spurious emission was found above the spectrum analyzer's noise floor.  
The noise floor are listed as below:

Noise floor level

For PK:

1GHz-3GHz: 20dBuV  
3GHz-14GHz: 27dBuV  
14GHz-26.5GHz: 39dBuV

For AV:

1GHz-3GHz: 10dBuV  
3GHz-14GHz: 16dBuV  
14GHz-26.5GHz: 28dBuV

EUT : G-570S

Test Condition : 802.11g Tx at channel 11

Test Result:

No spurious emission was found above the spectrum analyzer's noise floor.

The noise floor are listed as below:

Noise floor level

For PK:

1GHz-3GHz: 20dBuV

3GHz-14GHz: 27dBuV

14GHz-26.5GHz: 39dBuV

For AV:

1GHz-3GHz: 10dBuV

3GHz-14GHz: 16dBuV

14GHz-26.5GHz: 28dBuV

EUT : G-570S  
Test Condition : 802.11g turbo mode

**Test Result:**

No spurious emission was found above the spectrum analyzer's noise floor.  
The noise floor are listed as below:

Noise floor level

For PK:

1GHz-3GHz: 20dBuV

3GHz-14GHz: 27dBuV

14GHz-26.5GHz: 39dBuV

For AV:

1GHz-3GHz: 10dBuV

3GHz-14GHz: 16dBuV

14GHz-26.5GHz: 28dBuV

## 6. Power Spectrum Density test

### 6.1 Operating environment

Temperature: 22 °C  
Relative Humidity: 53 %  
Atmospheric Pressure 1022 hPa

### 6.2 Test setup & procedure

The power spectrum density per FCC §15.247(e) was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set at 3kHz, the video bandwidth set at 10kHz, a span of 1.5 MHz, and the sweep time set at 500 seconds. Power Density was read directly correction was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel). The Power Spectral Density measured result is in the following table.

### 6.3 Measured data of Power Spectrum Density test results

Test Mode: 802.11b(DSSS Modulation) operating mode

Channel	Frequency (MHz)	Power spectrum density (dBm)	Limit (dBm)
1 (lowest)	2412	-8.12	8
6 (middle)	2437	-8.19	8
11 (highest)	2462	-8.52	8

Test Mode: 802.11g(OFDM Modulation) operating mode


Channel	Frequency (MHz)	Power spectrum density (dBm)	Limit (dBm)
1 (lowest)	2412	-13.50	8
6 (middle)	2437	-13.65	8
11 (highest)	2462	-13.64	8

Test Mode: 802.11g turbo mode

Channel	Frequency (MHz)	Power spectrum density (dBm)	Limit (dBm)
6 (middle)	2437	-12.21	8

Please see the plot below.


## Test Mode: 802.11b(DSSS Modulation) operating mode

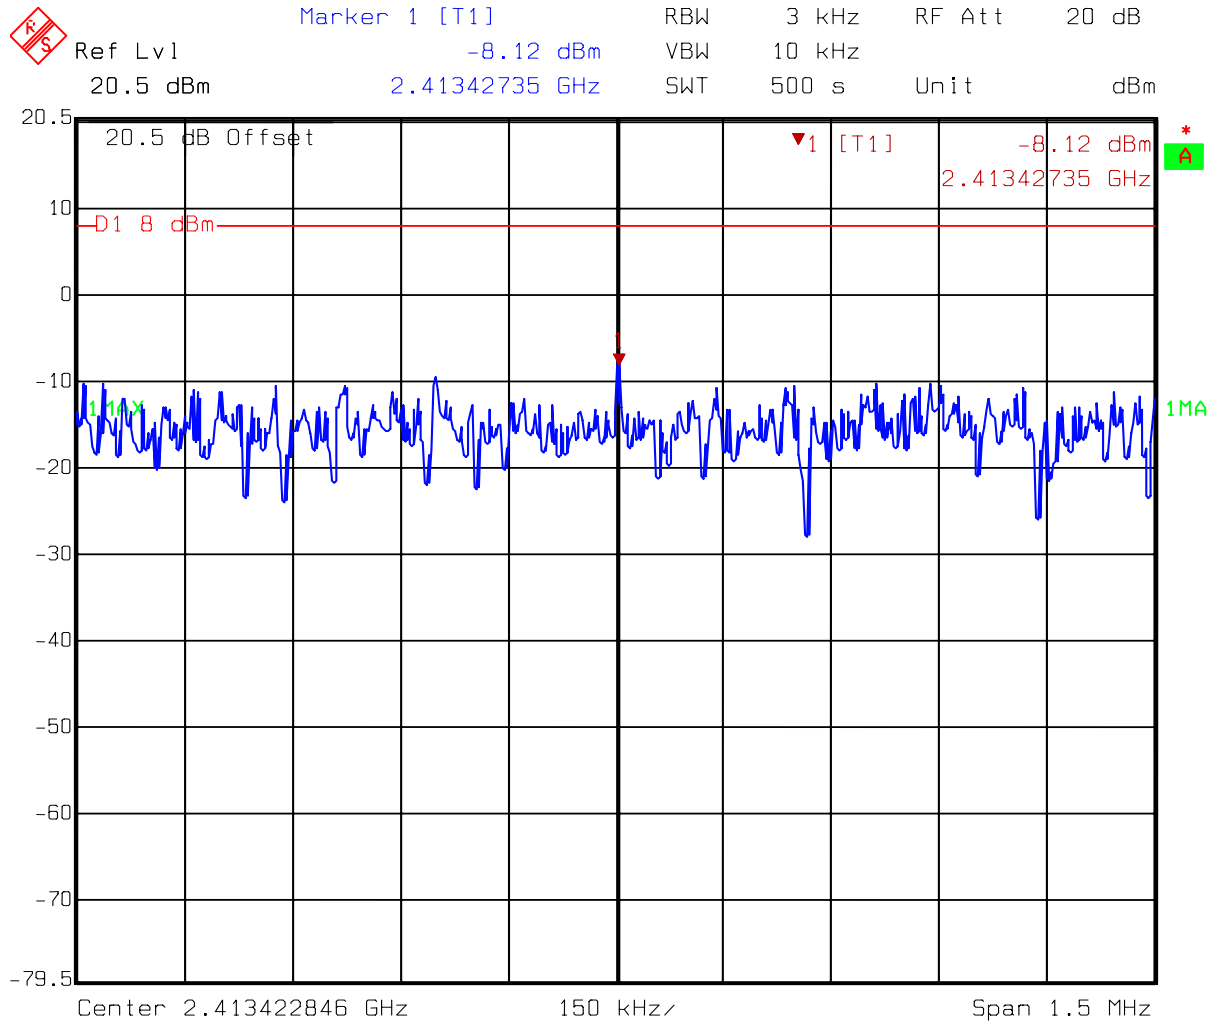

Comment A: Power Spectral Density

802.11b CH1


Date: 03.NOV.2005 18:16:49

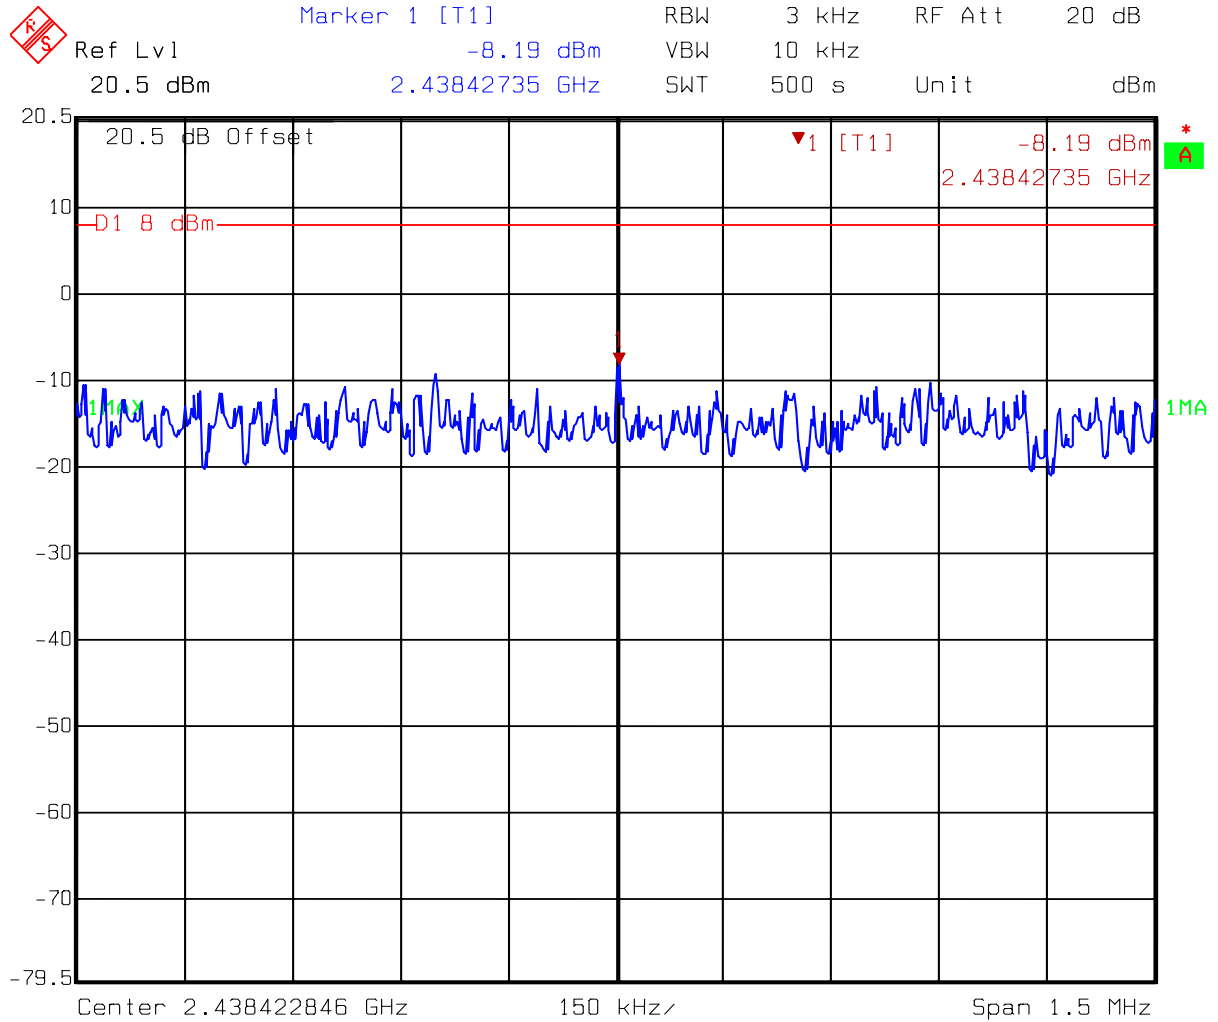

Comment A: Power Spectral Density

802.11b CH6

Date: 03.NOV.2005 18:14:38

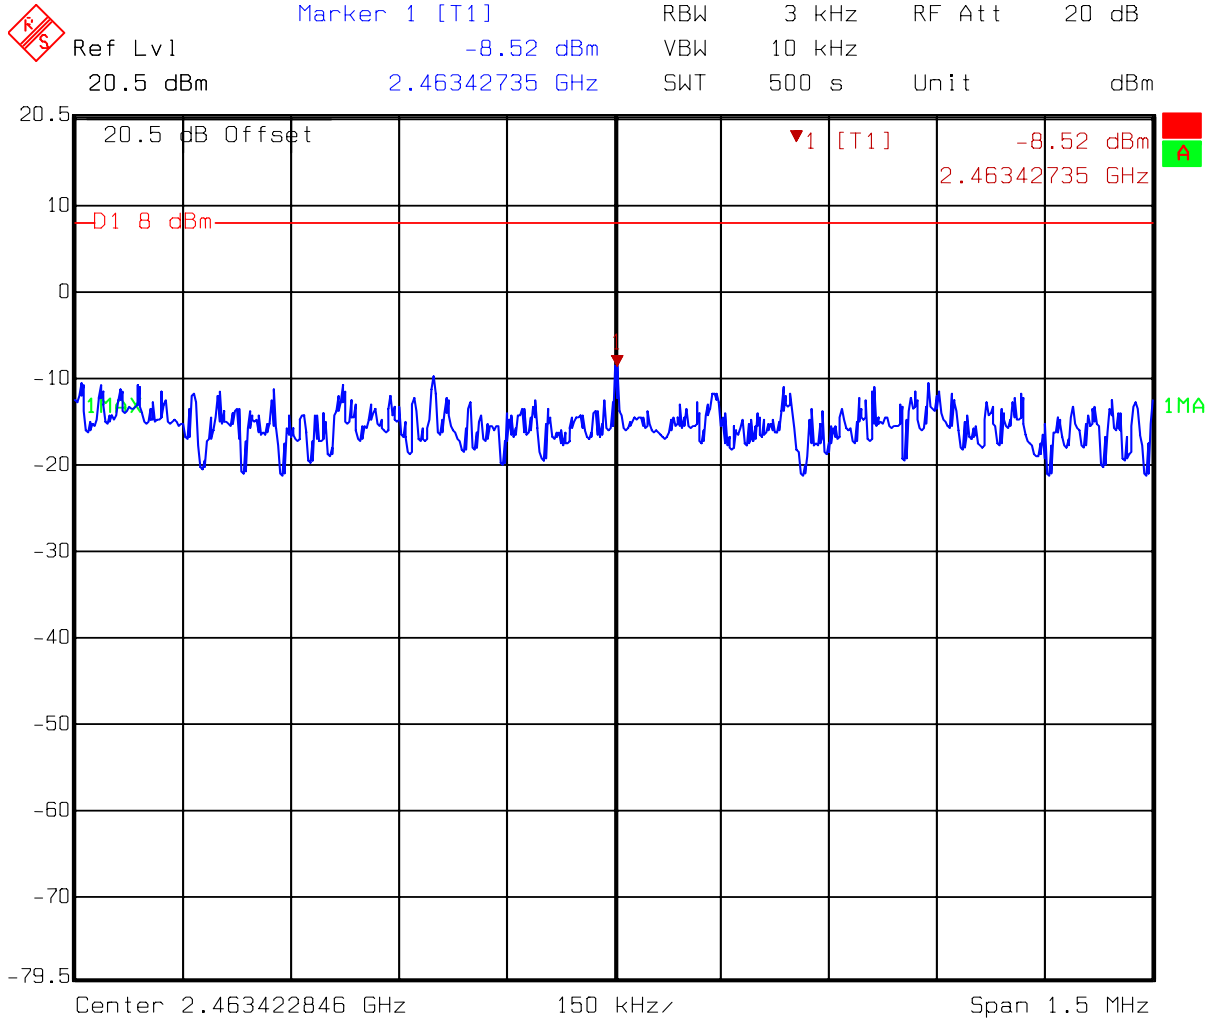

Comment A: Power Spectral Density

802.11b CH11

Date: 03.NOV.2005 18:12:06

Test Mode: 802.11g(OFDM Modulation) operating mode

Marker 1 [T1]

RBW 3 kHz

RF Att

20 dB



Ref Lvl

-13.50 dBm

VBW 10 kHz


20.5 dBm

2.41199349 GHz

SWT 500 s


Unit

dBm

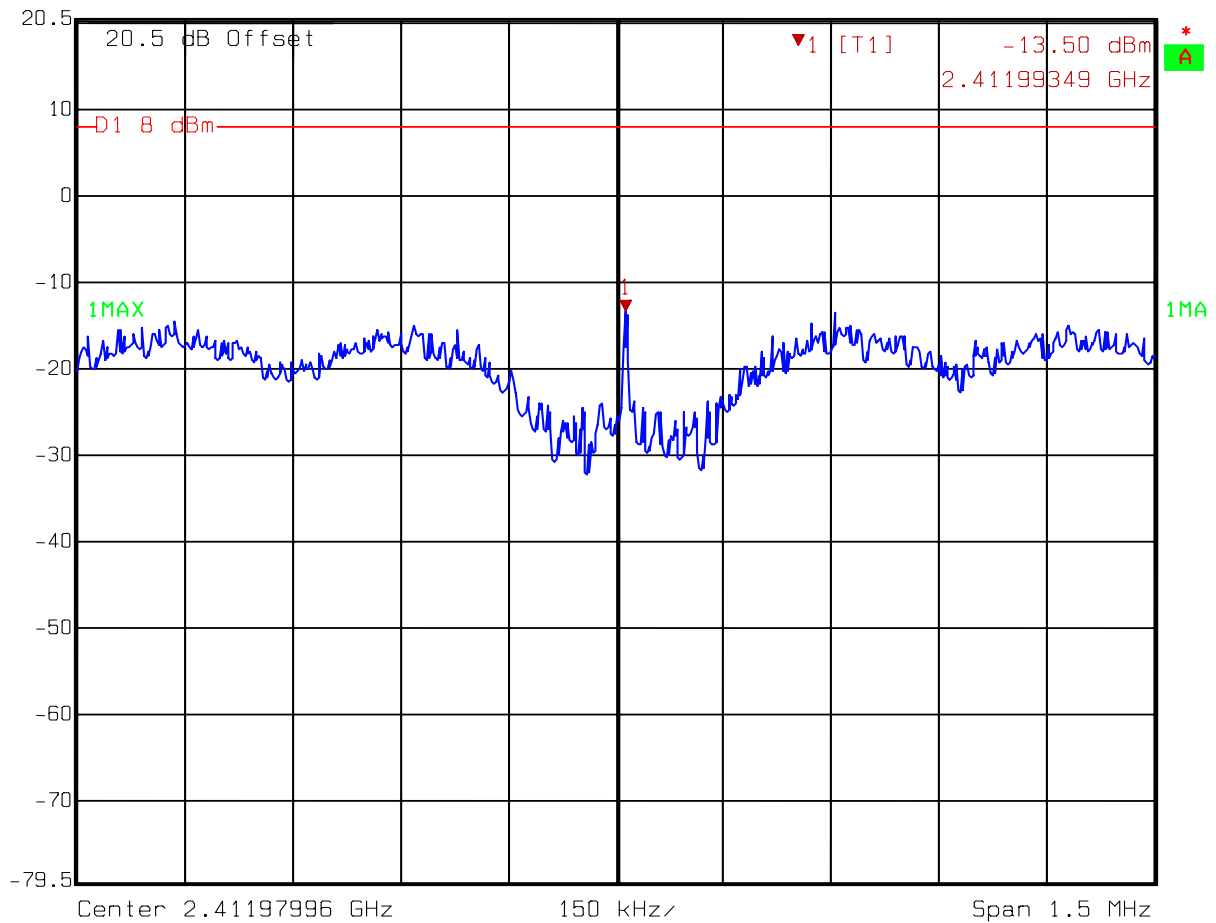

Comment A: Power Spectral Density  
802.11g CH1


Date: 03.NOV.2005 18:18:39

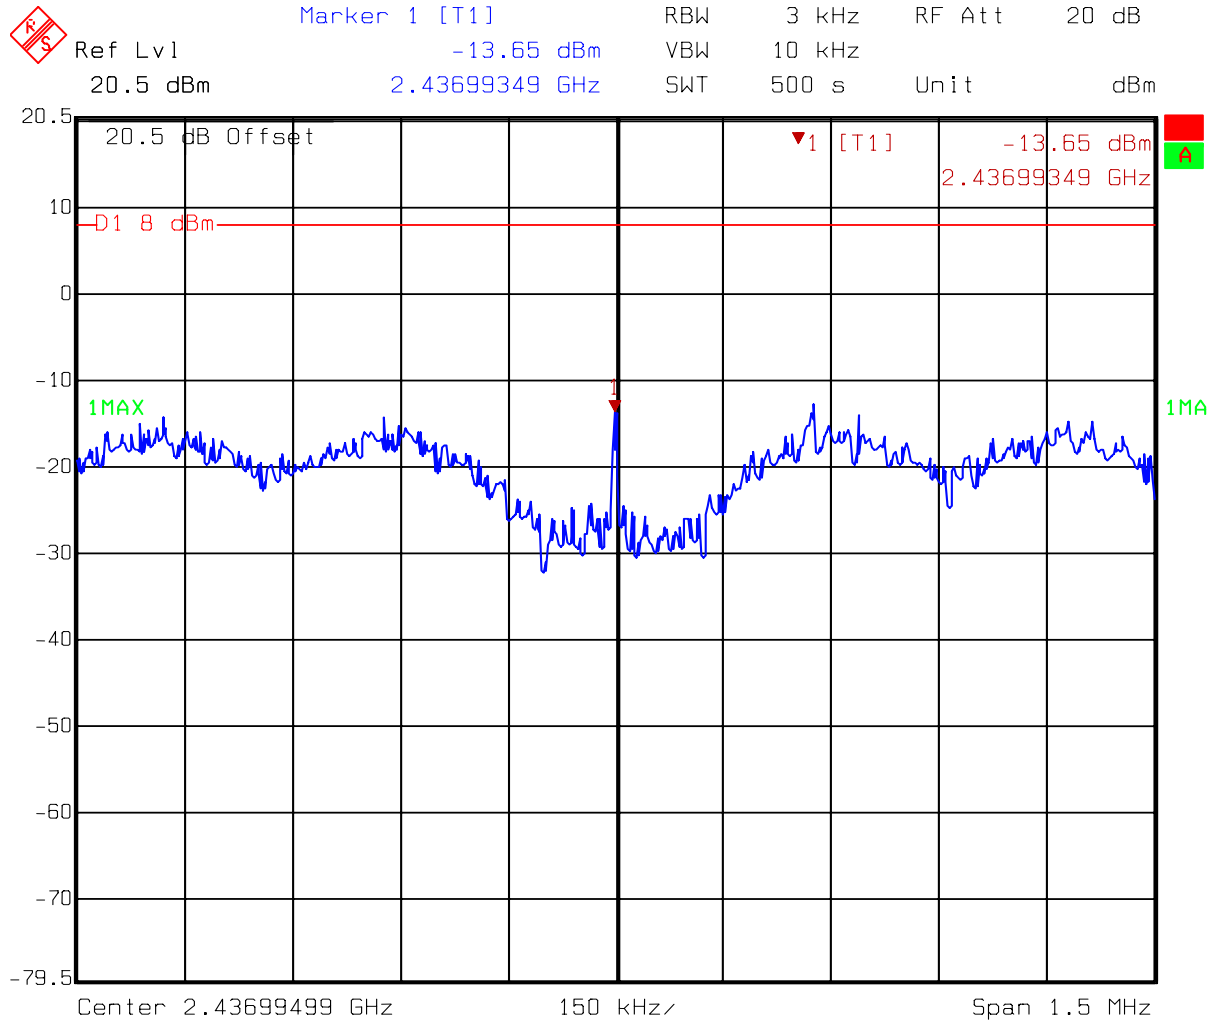

Comment A: Power Spectral Density

802.11g CH6

Date: 03.NOV.2005 18:21:14

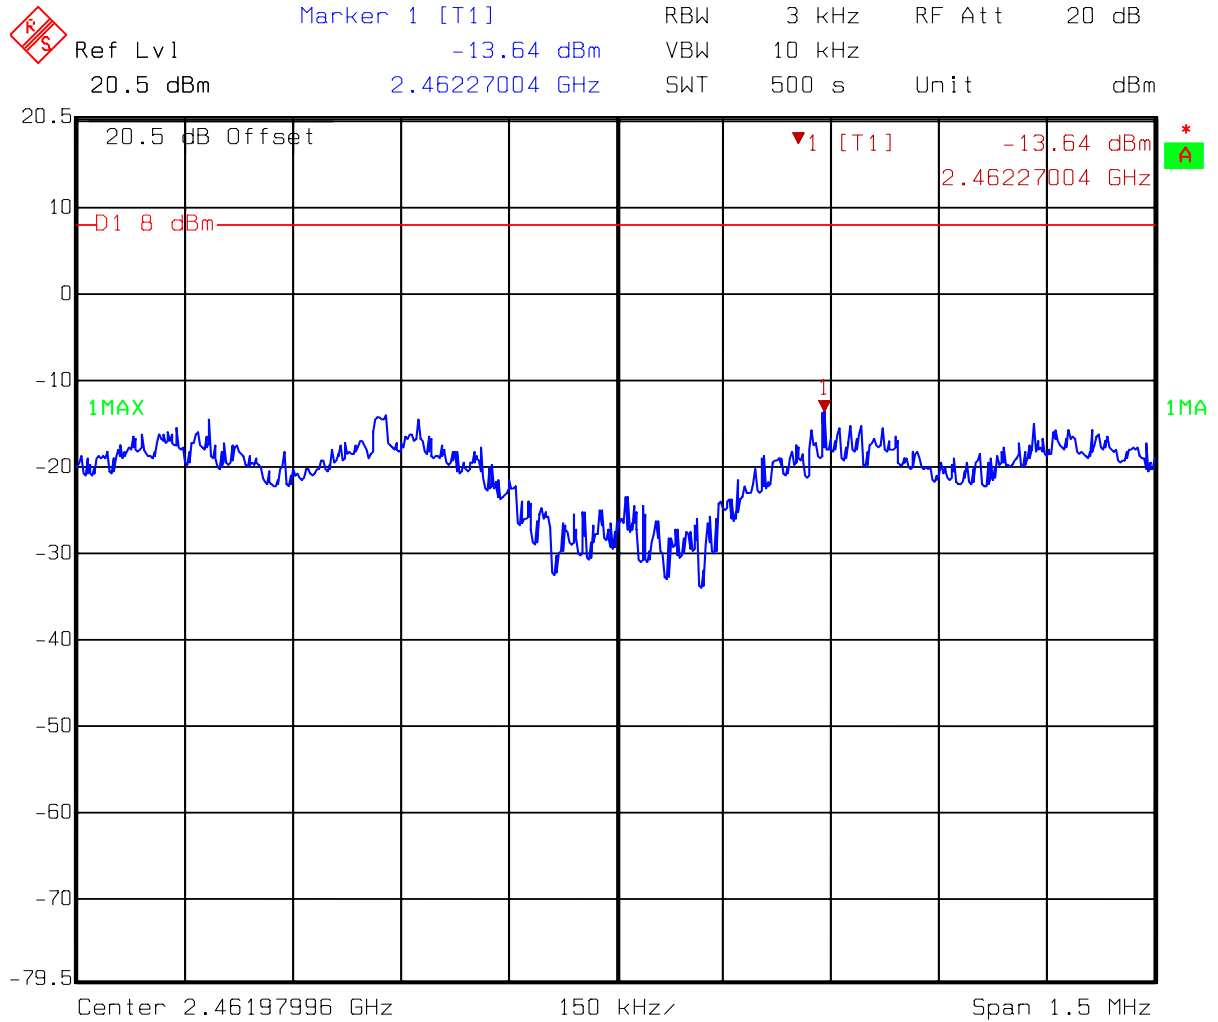


Comment A: Power Spectral Density

802.11g CH11

Date: 03.NOV.2005 18:25:27

Test Mode: 802.11g turbo mode

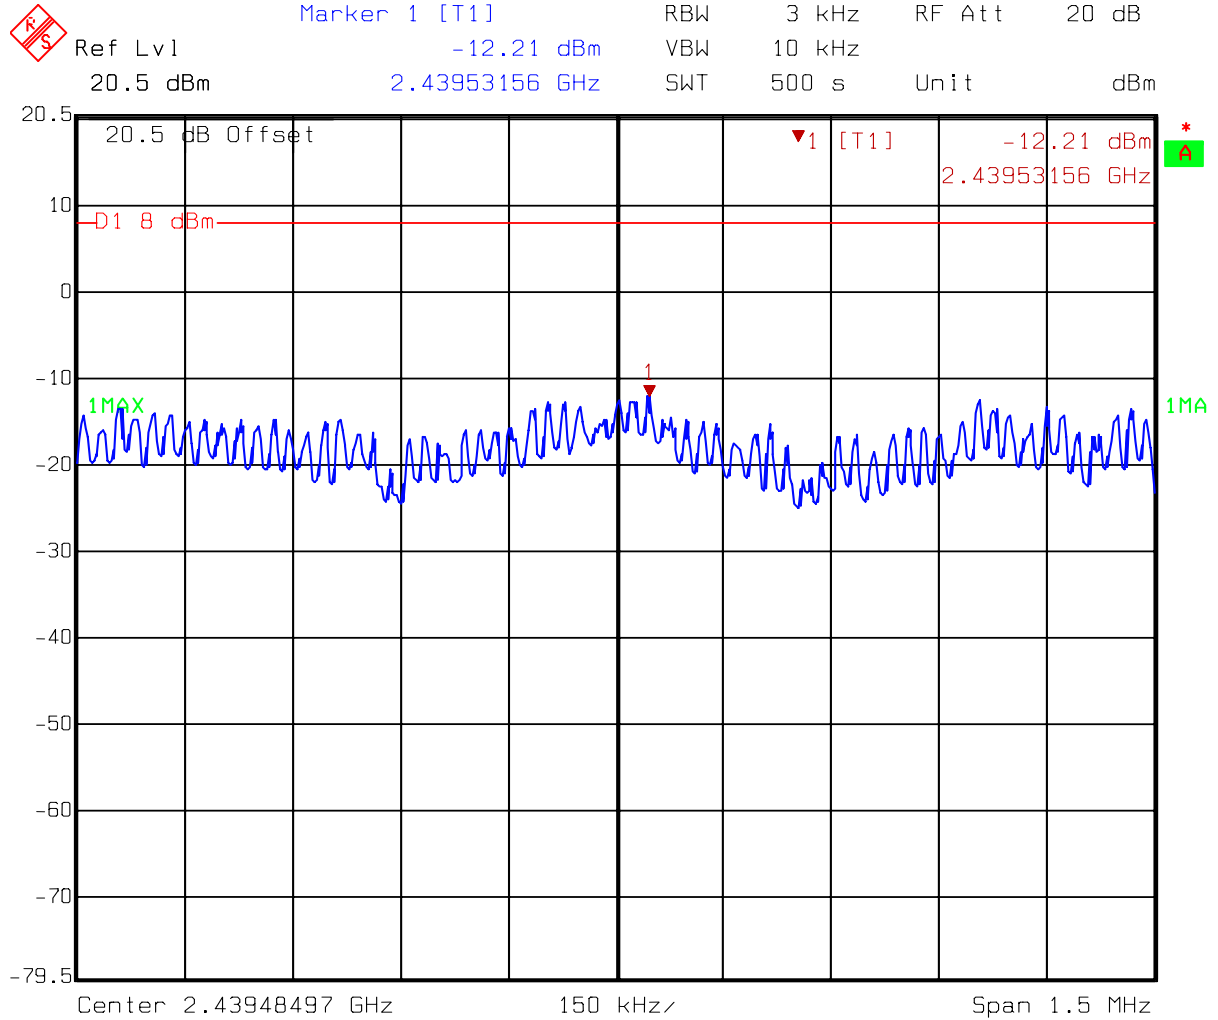

Comment A: Power Spectral Density

802.11g CH6 Turbo mode

Date: 09.DEC.2005 11:17:56

## 7. Emission on the band edge

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 7.1 Operating environment

Temperature:	23	°C
Relative Humidity:	55	%
Atmospheric Pressure	1021	hPa

### 7.2 Test setup & procedure

The output of EUT was connected to spectrum analyzer via a 50ohm cable.


The setting of spectrum analyzer is:

Peak:	RBW = 100kHz ;	VBW = 100kHz
Average:	RBW = 1MHz ;	VBW = 10Hz

## 7.3 Test Result

### 7.3.1 Conducted Method


Test Mode: 802.11b(DSSS Modulation) operating mode

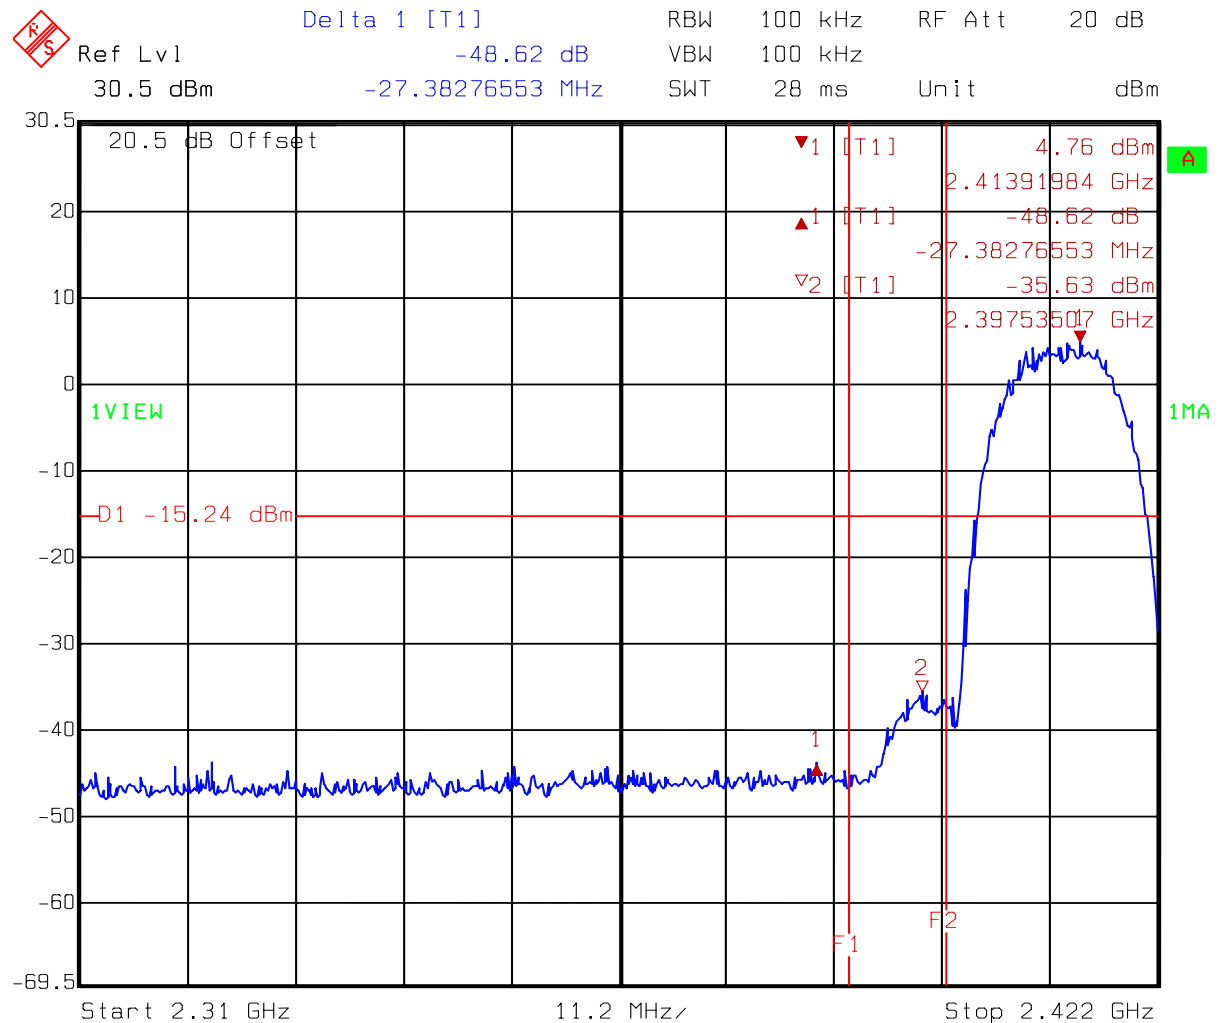

Comment A: Band-edge test at low channel (PK detector)

802.11b F1=2390MHz F2=2400MHz


Date: 03.NOV.2005 17:51:06

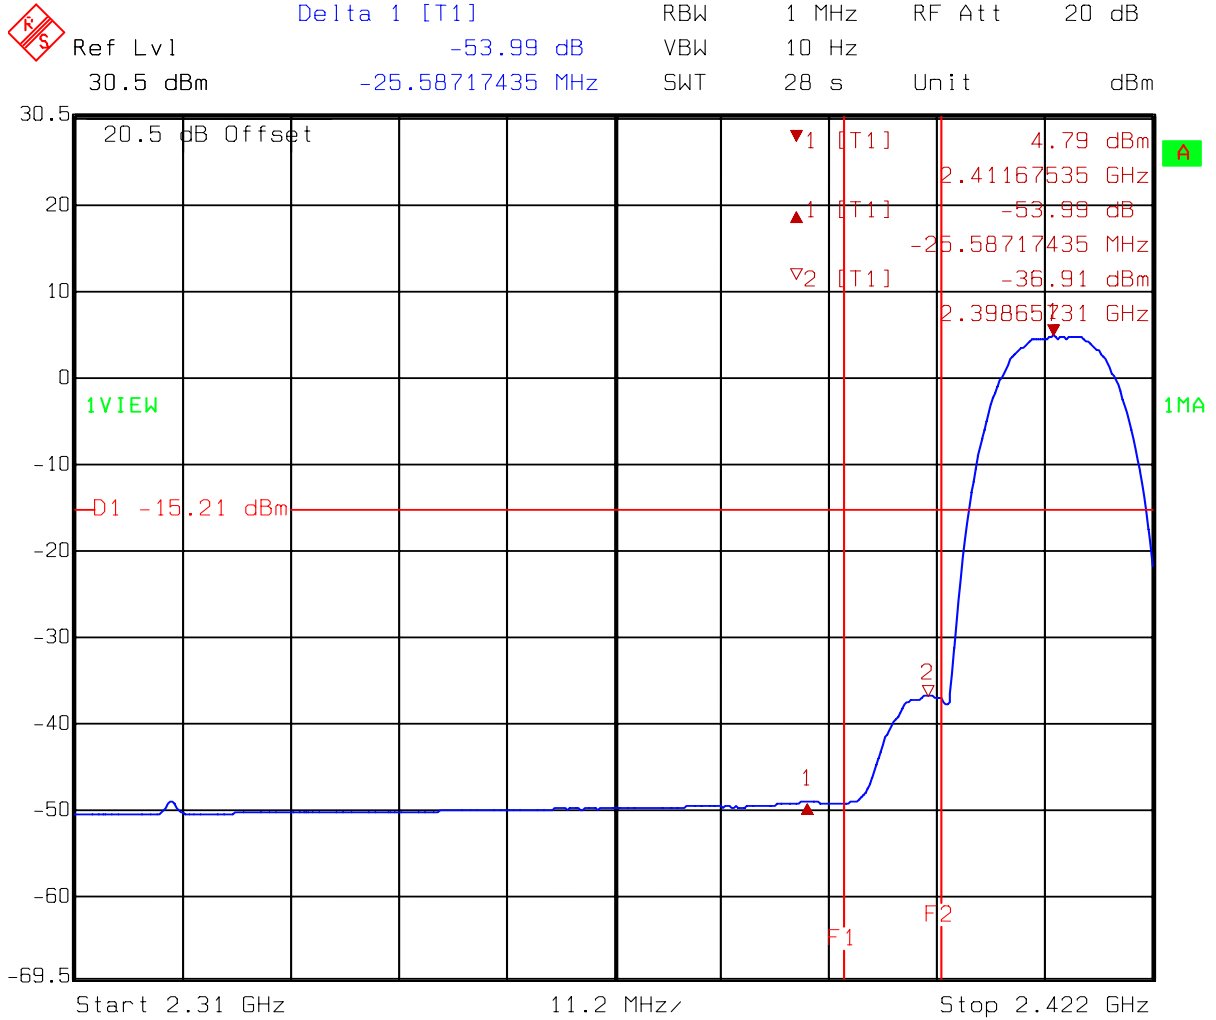

Comment A: Band-edge test at low channel (AV detector)

802.11b F1=2390MHz F2=2400MHz


Date: 03.NOV.2005 17:48:19

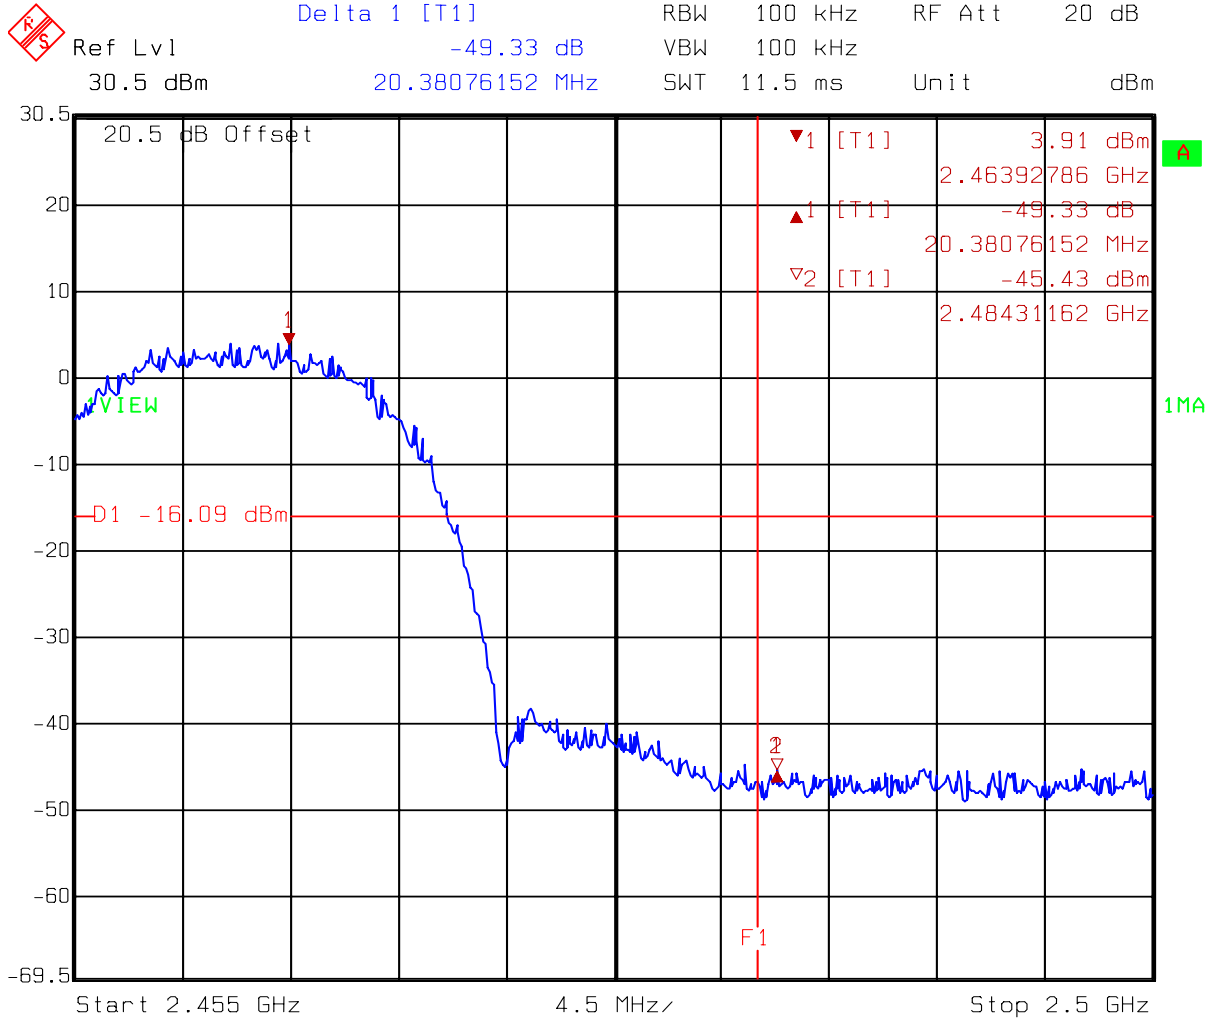

Comment A: Band-edge test at high channel (PK detector)

802.11b F1=2483.5MHz

Date: 03.NOV.2005 18:02:47

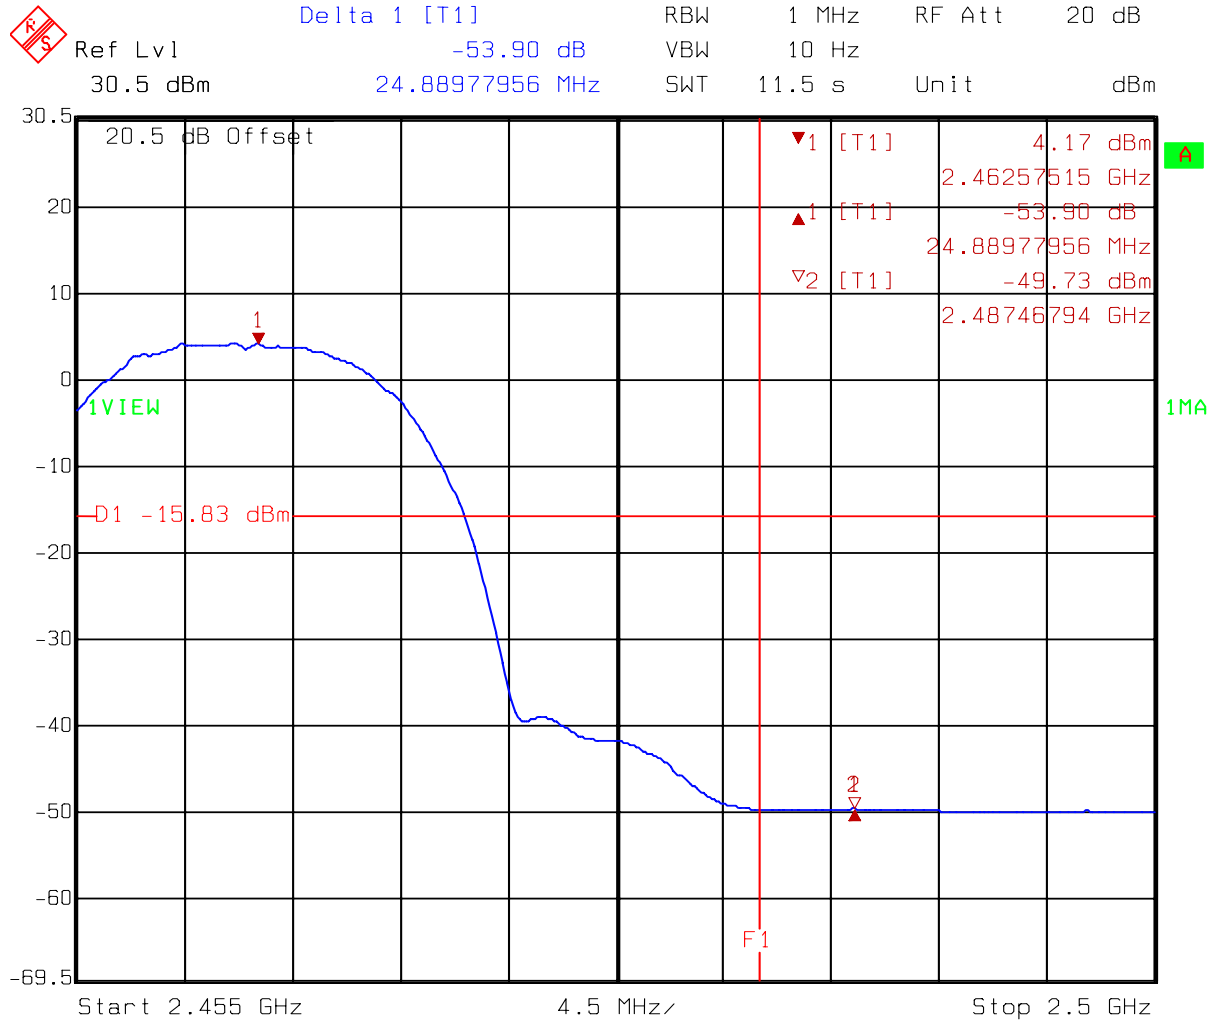


Comment A: Band-edge test at high channel (AV detector)

802.11b F1=2483.5MHz

Date: 03.NOV.2005 18:05:55


## Test Mode: 802.11g(OFDM Modulation) operating mode

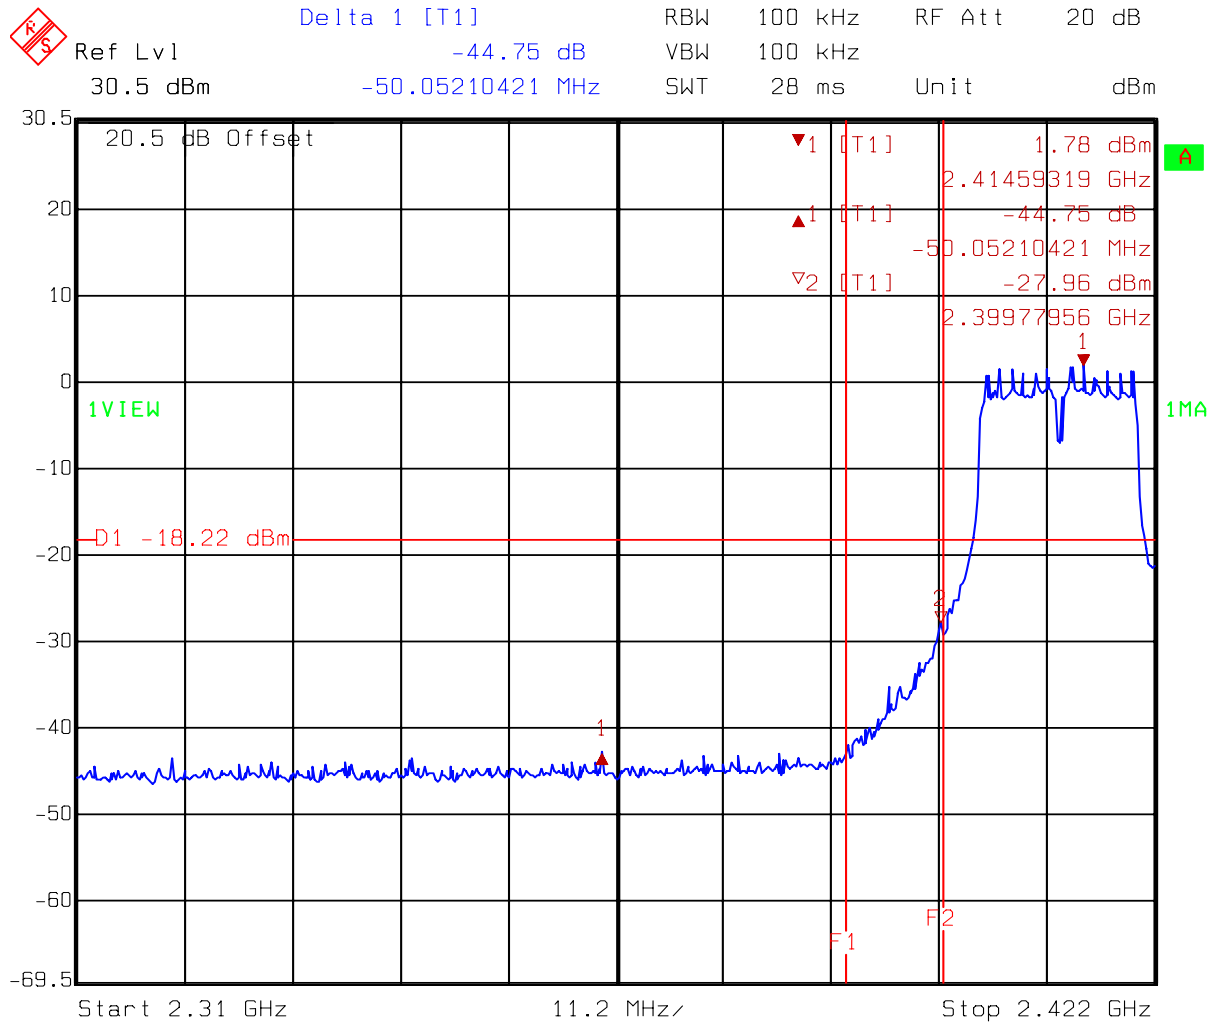

Comment A: Band-edge test at low channel (PK detector)

802.11g F1=2390MHz F2=2400MHz


Date: 03.NOV.2005 17:37:15

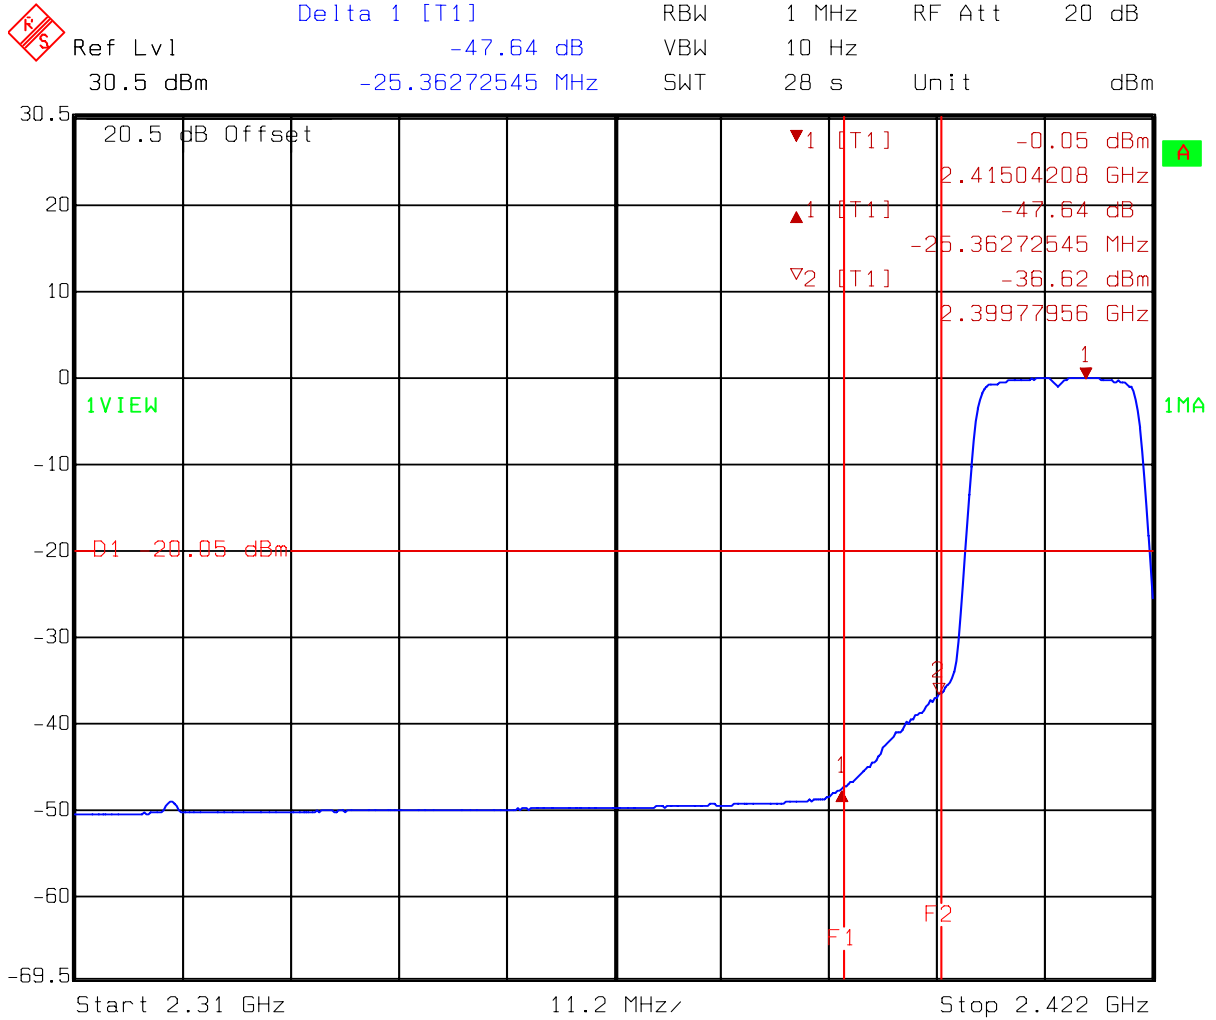

Comment A: Band-edge test at low channel (AV detector)

802.11g F1=2390MHz F2=2400MHz


Date: 03.NOV.2005 17:53:21

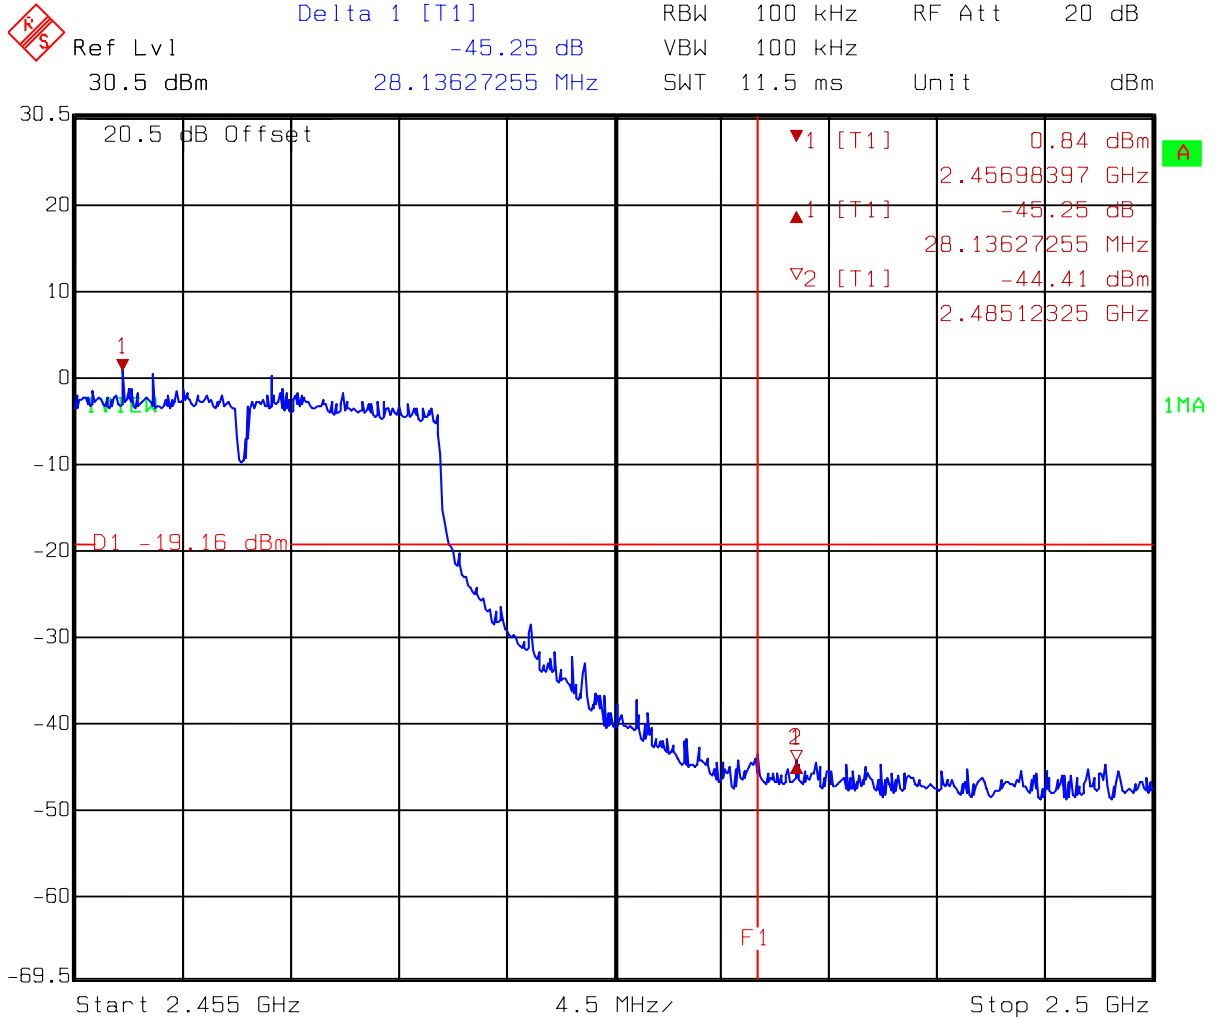

Comment A: Band-edge test at high channel (PK detector)

802.11g F1=2483.5MHz

Date: 03.NOV.2005 17:56:52

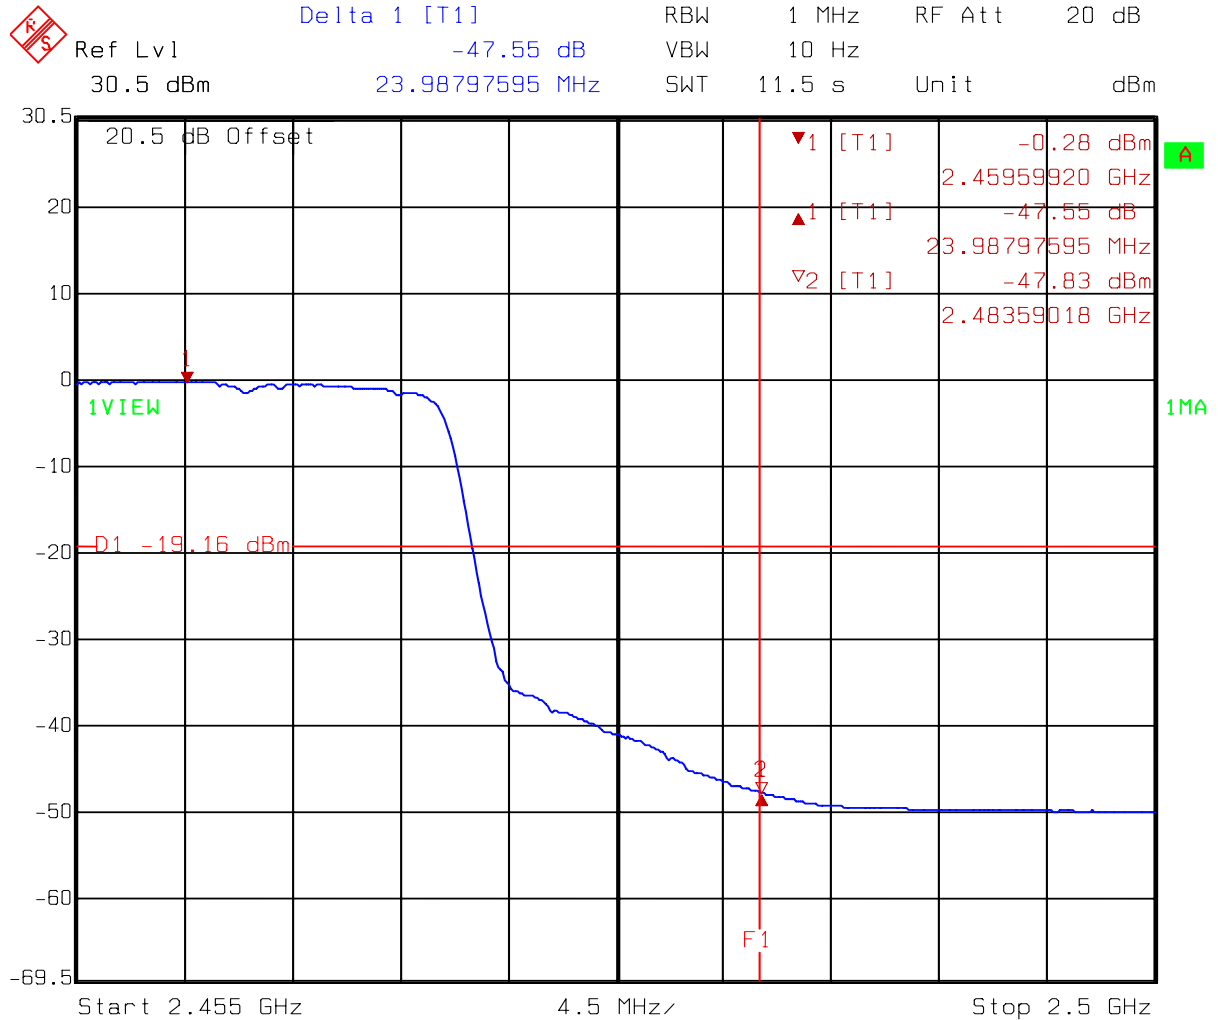

Comment A: Band-edge test at high channel (AV detector)

802.11g F1=2483.5MHz

Date: 03.NOV.2005 17:59:44

### 7.3.2 Radiated Method

Test Mode: 802.11b(DSSS Modulation) operating mode

Channel	Detector	Radiated Method	Conducted Method	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
		Max. Field Strength of Fundamental @3m (dBuV/m)	Between Carrier Max. Power and Local Max. Emission in Restrict Band (dBc)			
		A	B			
1 (lowest)	PK	115.29	48.62	66.67	74	-7.33
	AV	107.25	53.99	53.26	54	-0.74
11 (highest)	PK	114.1	49.33	64.77	74	-9.23
	AV	106.33	53.9	52.43	54	-1.57

Remark: 1.  $C = A - B$

2.  $E = C - D$

Test Mode: 802.11g(OFDM Modulation) operating mode

Channel	Detector	Radiated Method	Conducted Method	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
		Max. Field Strength of Fundamental @3m (dBuV/m)	Between Carrier Max. Power and Local Max. Emission in Restrict Band (dBc)			
		A	B			
1 (lowest)	PK	111.97	44.75	67.22	74	-6.78
	AV	101.55	47.64	53.91	54	-0.09
11 (highest)	PK	109.22	45.25	63.97	74	-10.03
	AV	100.64	47.55	53.09	54	-0.91

Remark: 1.  $C = A - B$


2.  $E = C - D$

## 8. Power Line Conducted Emission test §FCC 15.207

### 8.1 Operating environment

Temperature:	23	°C
Relative Humidity:	55	%
Atmospheric Pressure	1023	hPa

### 8.2 Test setup & procedure

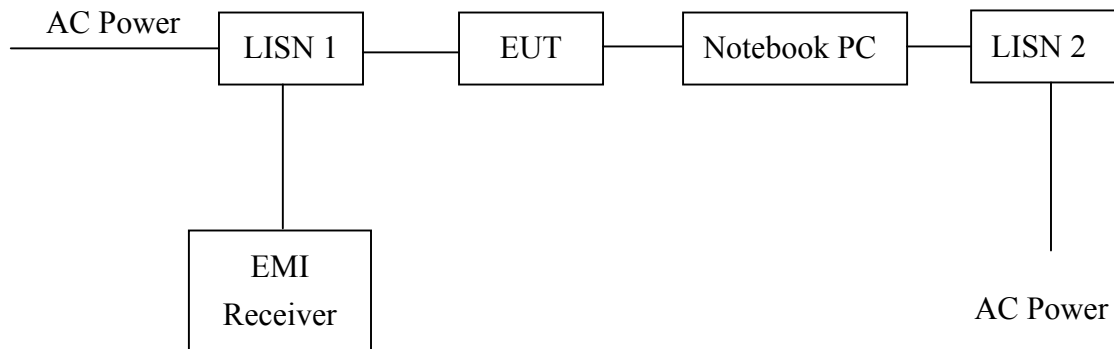

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement. The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

The EUT configuration please refer to the “Conducted set-up photo.pdf”.

**8.3 Emission limit**

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

\*Decreases with the logarithm of the frequency.

**8.4 Uncertainty of Conducted Emission**

Expanded uncertainty (k=2) of conducted emission measurement is 2.6 dB.


## 8.5 Power Line Conducted Emission test data

Phase: Line  
 Model No.: G-570S  
 Test Condition: Normal operating mode

Frequency (MHz)	Corr. Factor (dB)	Level	Limit	Level	Limit	Margin	
		Qp (dBuV)	Qp (dBuV)	AV (dBuV)	Av (dBuV)	Qp	Av
0.150	0.10	51.04	66.00	21.82	56.00	-14.96	-34.18
0.528	0.10	42.03	56.00	13.92	46.00	-13.97	-32.08
1.894	0.10	35.82	56.00	34.29	46.00	-20.18	-11.71
9.086	0.37	37.38	60.00	36.53	50.00	-22.62	-13.47
18.175	0.76	42.02	60.00	37.43	50.00	-17.98	-12.57
22.721	0.91	39.57	60.00	35.26	50.00	-20.43	-14.74

Remark:

1. Corr. Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

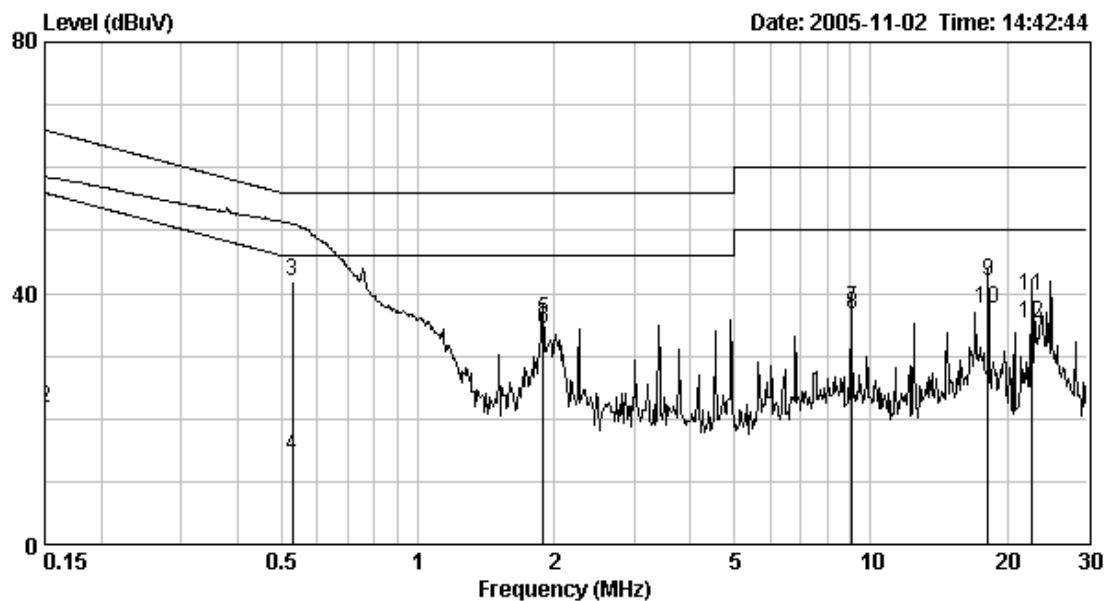

Phase: Neutral  
 Model No.: G-570S  
 Test Condition: Normal operating mode

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level AV (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.150	0.10	51.13	66.00	22.00	56.00	-14.87	-34.00
0.550	0.10	41.49	56.00	13.65	46.00	-14.51	-32.35
1.894	0.10	36.89	56.00	35.45	46.00	-19.11	-10.55
3.409	0.17	34.44	56.00	33.75	46.00	-21.56	-12.25
14.764	0.39	38.19	60.00	36.83	50.00	-21.81	-13.17
17.034	0.48	40.91	60.00	35.70	50.00	-19.09	-14.30

## Remark:

1. Corr. Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

