

TEST REPORT

Applicant Name : Shenzhen Youmi Intelligent Technology Co., Ltd.
Address : 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China
Report Number : SZNS220126-03831E-20A1
FCC ID: 2ATZ4-BIXSG

Test Standard (s)

FCC Part 2.1093

Sample Description

Product Type: RP05
Model No.: BISON X10S
Multiple Models: BISON X10G
Trade Mark: UMIDIGI
Date Received: 2022/01/27
Date of Test: 2022/03/05
Report Date: 2022/03/24

Test Result:

Pass*


* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Lance Li
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

Attestation of Test Results			
MODE		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)
GSM 850	1g Head SAR	0.18	1.6
	1g Body SAR	0.18	
PCS 1900	1g Head SAR	0.79	
	1g Body SAR	0.25	
WCDMA Band 2	1g Head SAR	1.22	
	1g Body SAR	0.58	
WCDMA Band 5	1g Head SAR	0.12	
	1g Body SAR	0.18	
LTE Band 2	1g Head SAR	1.22	
	1g Body SAR	0.90	
LTE Band 5	1g Head SAR	0.21	
	1g Body SAR	0.39	
LTE Band 12	1g Head SAR	0.28	
	1g Body SAR	0.34	
LTE Band 41	1g Head SAR	1.25	
	1g Body SAR	0.68	
2.4G Wi-Fi	1g Head SAR	0.33	
	1g Body SAR	0.11	
5..2G Wi-Fi	1g Head SAR	0.37	
	1g Body SAR	0.13	
5.8G Wi-Fi	1g Head SAR	0.36	
	1g Body SAR	0.16	
Simultaneous	1g Head SAR	1.59	
	1g Body SAR	0.90	
	1g Body SAR	0.90 (Hotspot)	

Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices
	RF Exposure Procedures: TCB Workshop April 2015
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
	IEC 62209-1:2016 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz)
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 941225 D06 Hotspot Mode v02r01
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.	

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY.....	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUIDELINES	7
SAR LIMITS.....	8
FACILITIES	9
DESCRIPTION OF TEST SYSTEM.....	10
EQUIPMENT LIST AND CALIBRATION.....	15
EQUIPMENTS LIST & CALIBRATION INFORMATION.....	15
SAR MEASUREMENT SYSTEM VERIFICATION	16
LIQUID VERIFICATION	16
SYSTEM ACCURACY VERIFICATION.....	19
SAR SYSTEM VALIDATION DATA.....	20
EUT TEST STRATEGY AND METHODOLOGY.....	26
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	26
CHEEK/TOUCH POSITION	27
EAR/TILT POSITION	27
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS.....	28
TEST DISTANCE FOR SAR EVALUATION.....	28
SAR EVALUATION PROCEDURE	29
CONDUCTED OUTPUT POWER MEASUREMENT	30
TEST PROCEDURE	30
RADIO CONFIGURATION	30
MAXIMUM TARGET OUTPUT POWER	36
SAR MEASUREMENT RESULTS	50
SAR TEST DATA	50
SAR MEASUREMENT VARIABILITY.....	58
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION.....	59
SAR PLOTS	68
APPENDIX A MEASUREMENT UNCERTAINTY.....	69
APPENDIX B EUT TEST POSITION PHOTOS.....	70
APPENDIX C PROBE CALIBRATION CERTIFICATES.....	71
APPENDIX D DIPOLE CALIBRATION CERTIFICATES	72

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZNS220126-03831E-20A1	Original Report	2022/03/24

EUT DESCRIPTION

This report has been prepared on behalf of **Shenzhen Youmi Intelligent Technology Co., Ltd.** and their product **RP05**, Model: **BISON X10S**, FCC ID: **2ATZ4-BIXSG** or the EUT (Equipment under Test) as referred to in the rest of this report.

Notes:

1. This series products model: BISON X10S and BISON X10G are identical schematics Model BISON X10S was selected for part of testing, the detailed information can be referred to the attached declaration which was stated and guaranteed by the manufacturer.
2. The EUT is identical with the certified device (model name: RP05, model number: BISON X10S NFC, BISON X10G NFC, FCC ID: 2ATZ4-BIXSGN), except for the NFC chip was removed. We selected the worst modes for Head SAR (LTE Band 41) retest and all bands body back SAR. For the rest of the tests results, please refer to report SZNS211231-68438E-20A

Technical Specification

Device Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
DTM Type:	Class B
Multi-slot Class:	GPRS(Class 12)
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Operation Mode :	GSM Voice, GPRS Data, WCDMA(R99 (Voice+Data), HSDPA/HSUPA/ HSPA+), FDD-LTE, TDD-LTE, Wi-Fi and Bluetooth
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 12: 698-716 MHz(TX); 729-746 MHz(RX) LTE Band 41: 2555-2655MHz& 2555-2655MHz(TX/RX) Wi-Fi 2.4G: 2412 -2462 MHz(TX&RX) Wi-Fi 5.2G: 5150-5250 MHz Wi-Fi 5.8G: 5725-5850 MHz Bluetooth: 2402 -2480 MHz(TX&RX) BLE: 2402 -2480 MHz(TX&RX)
Power Source:	Rechargeable Battery
Normal Operation:	Head and Body-worn

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits**FCC Limit(1g Tissue)**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit(10g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

FACILITIES

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01 .

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

The test site has been registered with ISED Canada under ISED Canada Registration Number CN0016.


DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

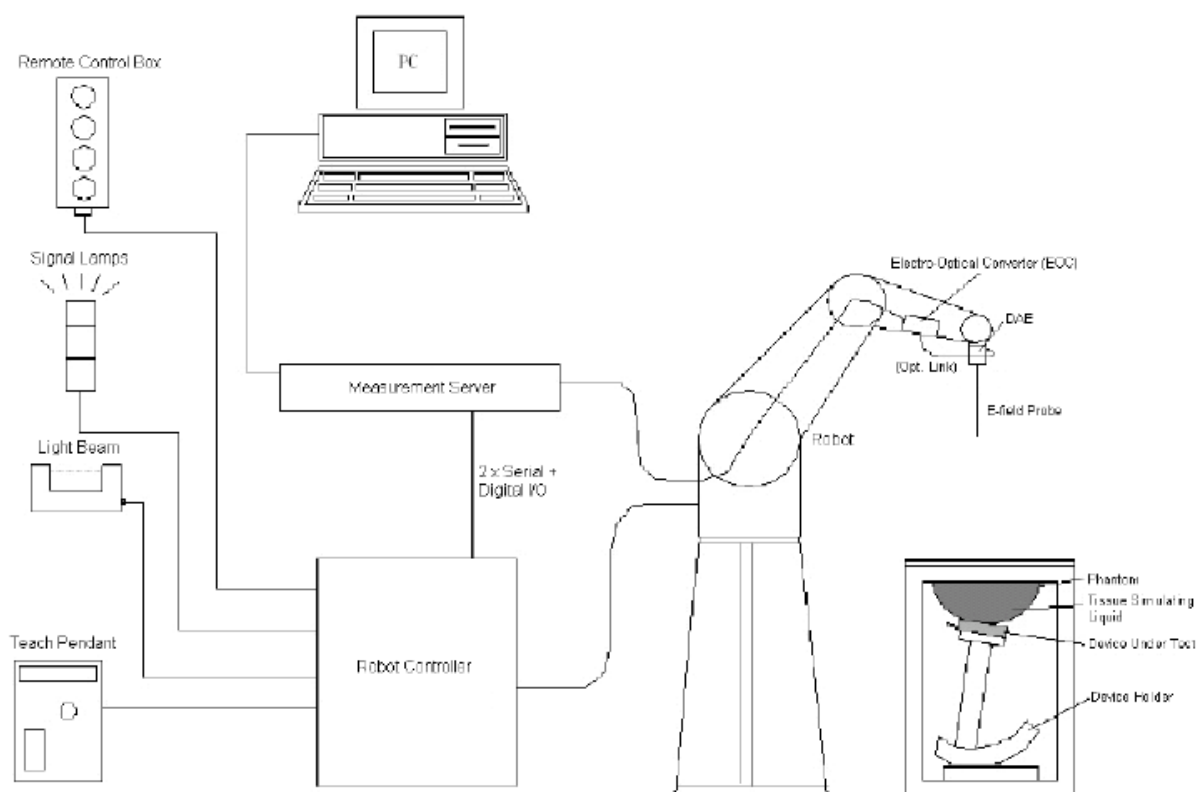

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY5) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm..

When the phantom is mounted inside allocated slot of the DASY5 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY5 platform is used to mount the

Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom.

Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.



Calibration Frequency Points for EX3DV4 E-Field Probes SN: 3619 Calibrated: 2021/08/25

Calibration Frequency Point(MHz)	Frequency Range(MHz)		Conversion Factor		
	From	To	X	Y	Z
450 Head	350	550	8.89	8.89	8.89
600 Head	500	680	8.96	8.96	8.96
750 Head	680	810	8.63	8.63	8.63
835 Head	810	860	8.50	8.50	8.50
900 Head	860	1000	8.28	8.28	8.28
1750 Head	1650	1810	7.33	7.33	7.33
1900 Head	1810	2000	7.07	7.07	7.07
2450 Head	2350	2500	6.69	6.69	6.69
2600 Head	2500	2700	6.53	6.53	6.53
5250 Head	5140	5360	4.37	4.37	4.37
5600 Head	5490	5700	4.03	4.03	4.03
5800 Head	5700	5910	3.93	3.93	3.93

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
<i>750</i>	<i>41,9</i>	<i>0,89</i>
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
<i>1 500</i>	<i>40,4</i>	<i>1,23</i>
<i>1 640</i>	<i>40,2</i>	<i>1,31</i>
<i>1 750</i>	<i>40,1</i>	<i>1,37</i>
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
<i>2 100</i>	<i>39,8</i>	<i>1,49</i>
<i>2 300</i>	<i>39,5</i>	<i>1,67</i>
2 450	39,2	1,80
<i>2 600</i>	<i>39,0</i>	<i>1,96</i>
3 000	38,5	2,40
<i>3 500</i>	<i>37,9</i>	<i>2,91</i>
<i>4 000</i>	<i>37,4</i>	<i>3,43</i>
<i>4 500</i>	<i>36,8</i>	<i>3,94</i>
<i>5 000</i>	<i>36,2</i>	<i>4,45</i>
<i>5 200</i>	<i>36,0</i>	<i>4,66</i>
<i>5 400</i>	<i>35,8</i>	<i>4,86</i>
<i>5 600</i>	<i>35,5</i>	<i>5,07</i>
<i>5 800</i>	<i>35,3</i>	<i>5,27</i>
<i>6 000</i>	<i>35,1</i>	<i>5,48</i>

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.4	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 6.0.31	N/A	NCR	NCR
Data Acquisition Electronics	DAE4	1562	2021/12/13	2022/12/12
E-Field Probe	EX3DV4	3619	2021/08/25	2022/08/24
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
SAM Twin Phantom	SAM-Twin V5.0	1744	NCR	NCR
Dipole, 750MHz	D750V3	1194	2020/1/13	2023/1/12
Dipole,1900MHz	D1900V2	5d128	2021/10/27	2024/10/26
Dipole,2450MHz	D2450V2	751	2020/10/13	2023/10/12
Dipole,2600MHz	D2600V2	1162	2019/10/2	2022/10/1
Dipole,5GHz	D5GHZV2	1301	2020/01/10	2023/01/09
Simulated Tissue Liquid Head(500-9500MHz)	HBBL600-10000V6	180622-2	Each Time	/
Network Analyzer	8753D	3410A08288	2021/7/07	2022/7/06
Dielectric Assessment Kit	DAK-3.5	1248	NCR	NCR
Signal Generator	SMB100A	108362	2021/12/23	2022/12/22
USB wideband power sensor	U2021XA	MY52350001	2021/12/23	2022/12/22
Power Amplifier	CBA 1G-070	T44328	2021/12/23	2022/12/22
Linear Power Amplifier	AS0860-40/45	1060913	2021/12/23	2022/12/22
Directional Coupler	4223-20	3.113.277	2021/12/23	2022/12/22
6dB Attenuator	8493B 6dB Attenuator	2708A 04769	2021/12/23	2022/12/22
Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
Wideband Radio Communication Tester	CMW500	143458	2022/02/27	2023/02/26

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

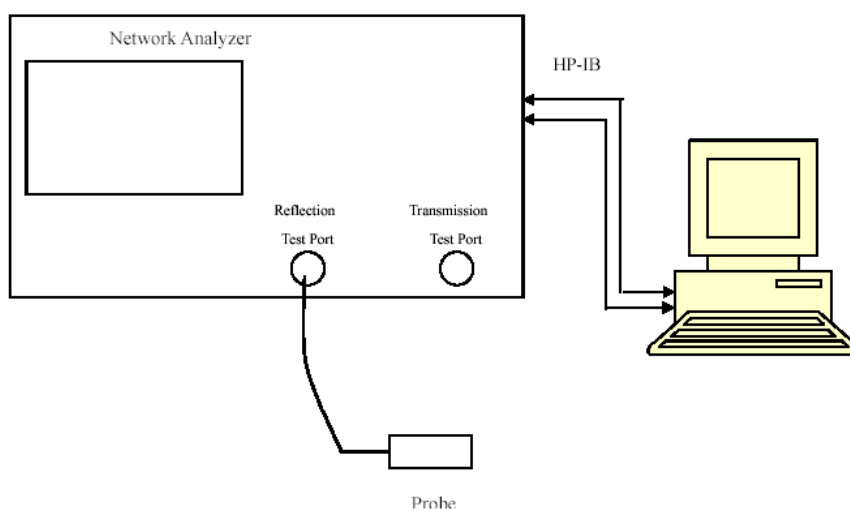

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
704	Simulated Tissue Liquid Head	43.149	0.879	42.18	0.89	2.3	-1.24	± 5
707.5	Simulated Tissue Liquid Head	43.007	0.867	42.16	0.89	2.01	-2.58	± 5
711	Simulated Tissue Liquid Head	42.785	0.879	42.14	0.89	1.53	-1.24	± 5
750	Simulated Tissue Liquid Head	41.685	0.882	41.9	0.89	-0.51	-0.9	± 5
824.2	Simulated Tissue Liquid Head	41.641	0.908	41.55	0.9	0.22	0.89	± 5
826.4	Simulated Tissue Liquid Head	41.7	0.913	41.54	0.9	0.39	1.44	± 5
829	Simulated Tissue Liquid Head	41.399	0.916	41.53	0.9	-0.32	1.78	± 5
836.5	Simulated Tissue Liquid Head	41.615	0.926	41.5	0.9	0.28	2.89	± 5
836.6	Simulated Tissue Liquid Head	41.978	0.933	41.5	0.9	1.15	3.67	± 5
844	Simulated Tissue Liquid Head	41.223	0.934	41.5	0.91	-0.67	2.64	± 5
846.6	Simulated Tissue Liquid Head	41.424	0.941	41.5	0.91	-0.18	3.41	± 5
848.8	Simulated Tissue Liquid Head	41.51	0.94	41.5	0.91	0.02	3.3	± 5

*Liquid Verification above was performed on 2022/03/05.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850.2	Simulated Tissue Liquid Head	40.068	1.39	40	1.4	0.17	-0.71	± 5
1852.4	Simulated Tissue Liquid Head	40.116	1.394	40	1.4	0.29	-0.43	± 5
1860	Simulated Tissue Liquid Head	40.169	1.403	40	1.4	0.42	0.21	± 5
1880	Simulated Tissue Liquid Head	40.18	1.415	40	1.4	0.45	1.07	± 5
1900	Simulated Tissue Liquid Head	39.465	1.439	40	1.4	-1.34	2.79	± 5
1907.6	Simulated Tissue Liquid Head	39.835	1.438	40	1.4	-0.41	2.71	± 5
1909.8	Simulated Tissue Liquid Head	39.65	1.459	40	1.4	-0.88	4.21	± 5

*Liquid Verification above was performed on 2022/03/05.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$	
2412	Simulated Tissue Liquid Head	38.121	1.804	39.28	1.77	-2.95	1.92	± 5
2437	Simulated Tissue Liquid Head	38.347	1.816	39.22	1.79	-2.23	1.45	± 5
2450	Simulated Tissue Liquid Head	38.735	1.836	39.20	1.80	-1.19	2	± 5
2462	Simulated Tissue Liquid Head	38.612	1.837	39.17	1.82	-1.42	0.93	± 5

*Liquid Verification above was performed on 2022/03/05.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2510	Simulated Tissue Liquid Head	38.699	1.872	39.12	1.86	-1.08	0.65	± 5
2535	Simulated Tissue Liquid Head	38.519	1.869	39.09	1.89	-1.46	-1.11	± 5
2560	Simulated Tissue Liquid Head	39.885	1.919	39.05	1.92	2.14	-0.05	± 5
2565	Simulated Tissue Liquid Head	39.87	1.925	39.05	1.92	2.1	0.26	± 5
2595	Simulated Tissue Liquid Head	39.889	1.929	39.01	1.95	2.25	-1.08	± 5
2600	Simulated Tissue Liquid Head	39.933	1.935	39	1.96	2.39	-1.28	± 5
2615	Simulated Tissue Liquid Head	39.865	1.939	38.98	1.97	2.27	-1.57	± 5
2645	Simulated Tissue Liquid Head	39.29	1.967	38.94	2.01	0.9	-2.14	± 5

*Liquid Verification above was performed on 2022/03/05.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$	
5180	Simulated Tissue Liquid Head	36.84	4.677	36.02	4.65	2.28	0.58	± 5
5200	Simulated Tissue Liquid Head	35.445	4.706	36.00	4.66	-1.54	0.99	± 5
5240	Simulated Tissue Liquid Head	34.961	4.729	35.96	4.70	-2.78	0.62	± 5
5250	Simulated Tissue Liquid Head	35.161	4.856	35.95	4.71	-2.19	3.1	± 5
5745	Simulated Tissue Liquid Head	36.596	4.969	35.36	5.21	3.5	-4.63	± 5
5785	Simulated Tissue Liquid Head	36.1	5.021	35.32	5.26	2.21	-4.54	± 5
5800	Simulated Tissue Liquid Head	35.132	5.094	35.30	5.27	-0.48	-3.34	± 5
5825	Simulated Tissue Liquid Head	36.348	5.123	35.28	5.29	3.03	-3.16	± 5

*Liquid Verification above was performed on 2022/03/05.


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

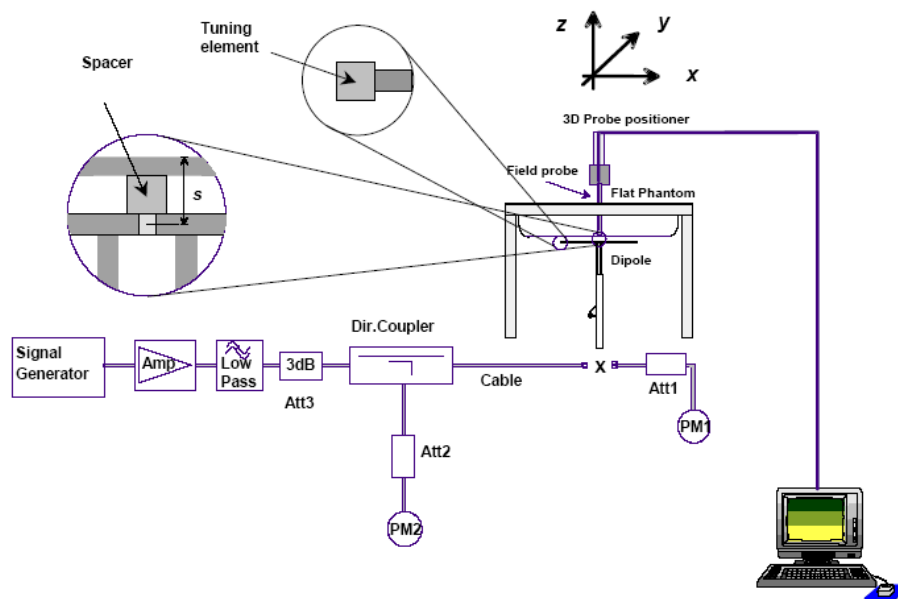

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2022/03/05	750 MHz	Head	100	1g	0.813	8.13	8.55	-4.912	± 10
2022/03/05	1900 MHz	Head	100	1g	4.04	40.4	40.0	1.000	± 10
2022/03/05	2450 MHz	Head	100	1g	4.95	49.5	53.0	-6.604	± 10
2022/03/05	2600 MHz	Head	100	1g	5.85	58.5	55.4	5.596	± 10
2022/03/05	5250 MHz	Head	100	1g	7.79	77.9	80.7	-3.470	± 10
2022/03/05	5800 MHz	Head	100	1g	7.53	75.3	80.2	-6.110	± 10

*The SAR values above are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

System Performance 750 MHz

DUT: D750V3; Type: 750 MHz; Serial: 1194

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 41.685$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN3619; ConvF(8.63, 8.63, 8.63); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 750MHz/d=15mm, Pin=100mw/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.864 W/kg


System Performance Check at 750MHz/d=15mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.45 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.548 W/kg

Maximum value of SAR (measured) = 0.859 W/kg

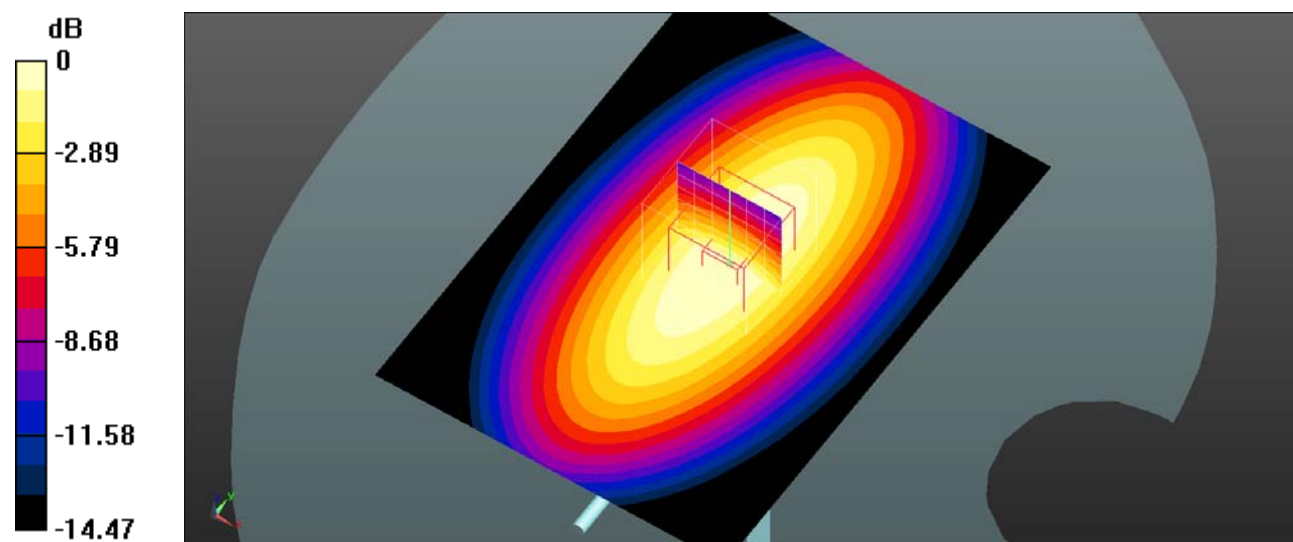

0 dB = 0.859 W/kg = -0.66 dBW/kg

System Performance 1900MHz**DUT: D1900V2; Type: 1900 MHz; Serial: 5d128**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 39.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 1900MHz/d=10mm, Pin=100mw/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.26 W/kg


System Performance Check at 1900MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.34 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 5.52 W/kg

SAR(1 g) = 4.04 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 4.47 W/kg

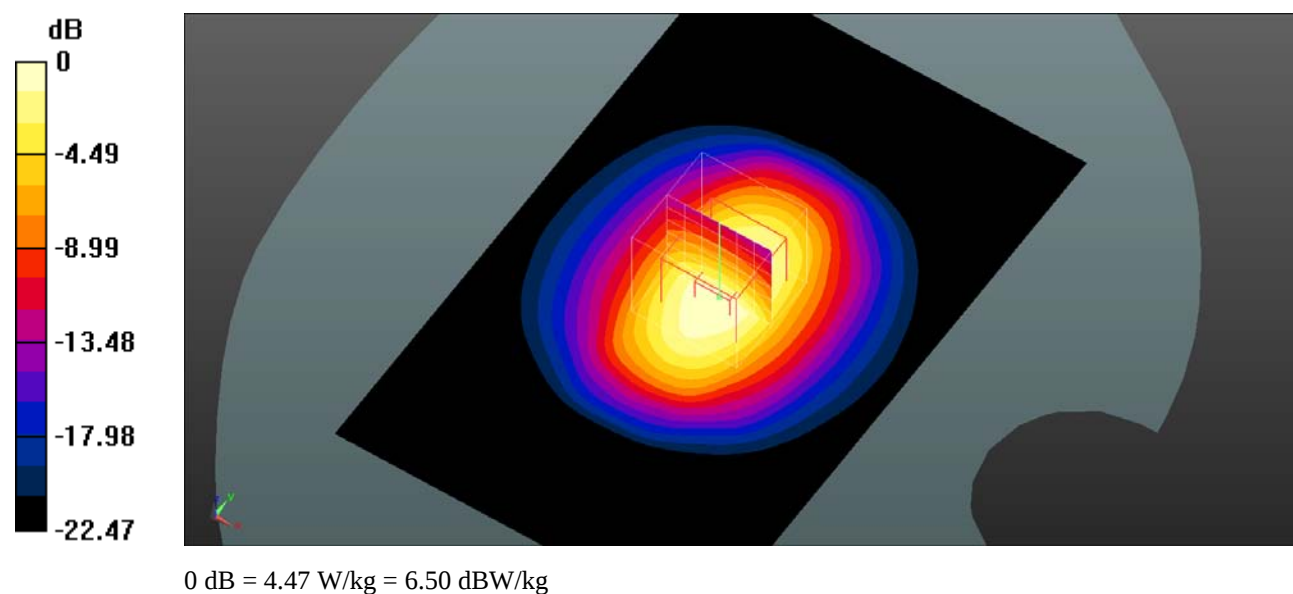

System Performance 2450MHz**DUT: D2450V2; Type: 2450 MHz; Serial: 751**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 38.735$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 2450MHz/d=10mm, Pin=100mw/Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.66 W/kg


System Performance Check at 2450MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.28 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 8.08 W/kg

SAR(1 g) = 4.95 W/kg; SAR(10 g) = 2.47 W/kg

Maximum value of SAR (measured) = 5.48 W/kg

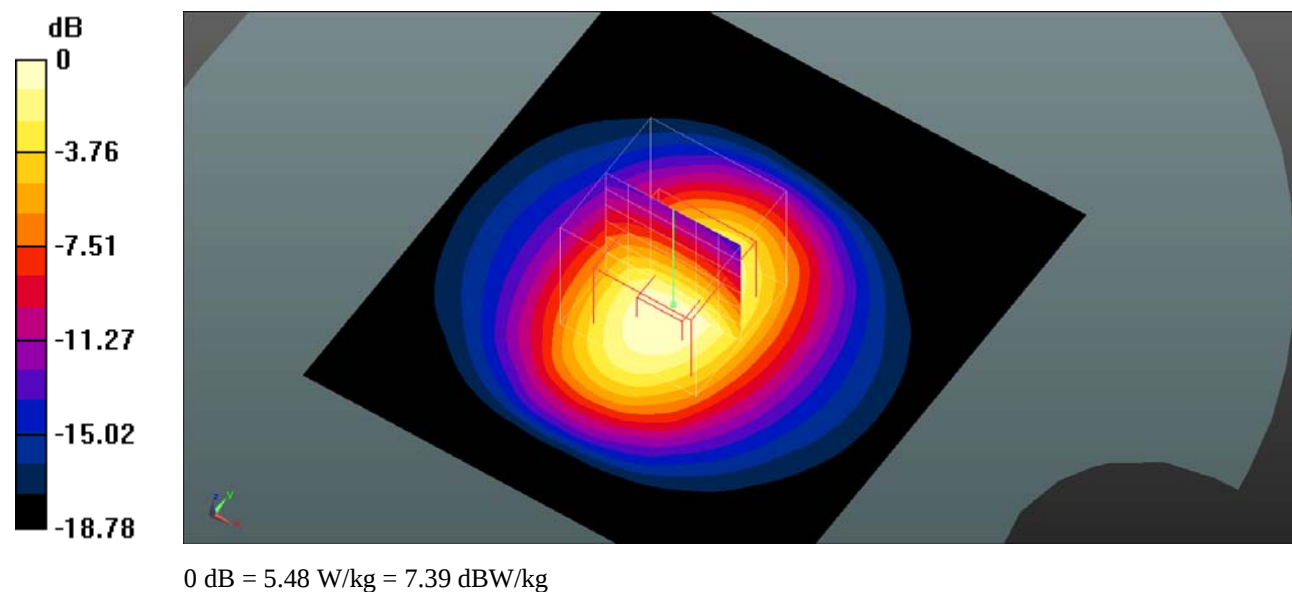

System Performance 2600MHz**DUT: D2600V2; Type: 2600 MHz; Serial: 1162**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 39.933$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 2600MHz/d=10mm, Pin=100mw/Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.09 W/kg


System Performance Check at 2600MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.39 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.85 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 7.12 W/kg

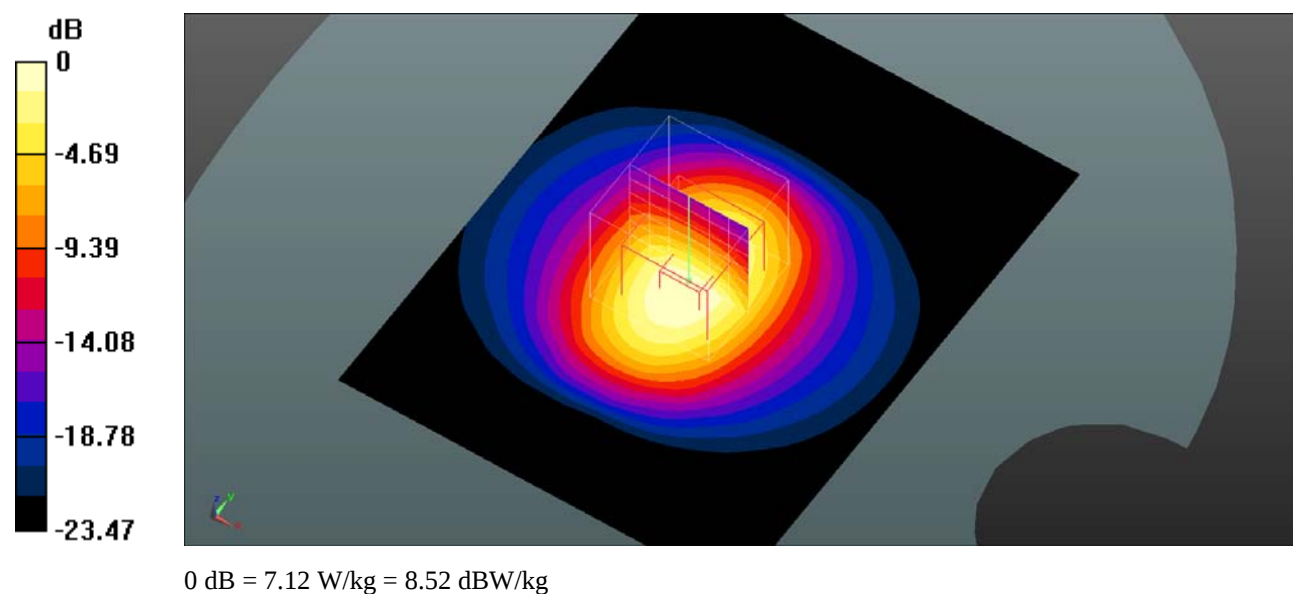

System Performance 5250 MHz**DUT: Dipole 5GHz Type: D5GHZV2; Serial: 1301**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.856 \text{ S/m}$; $\epsilon_r = 35.161$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN3619; ConvF(4.37, 4.37, 4.37); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 5250MHz/d=10mm, Pin=100mw/Area Scan (61x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 16.5 W/kg


System Performance Check at 5250MHz/d=10mm, Pin=100mw//Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 45.16 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 29.7 W/kg

SAR(1 g) = 7.79 W/kg ; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 14.5 W/kg

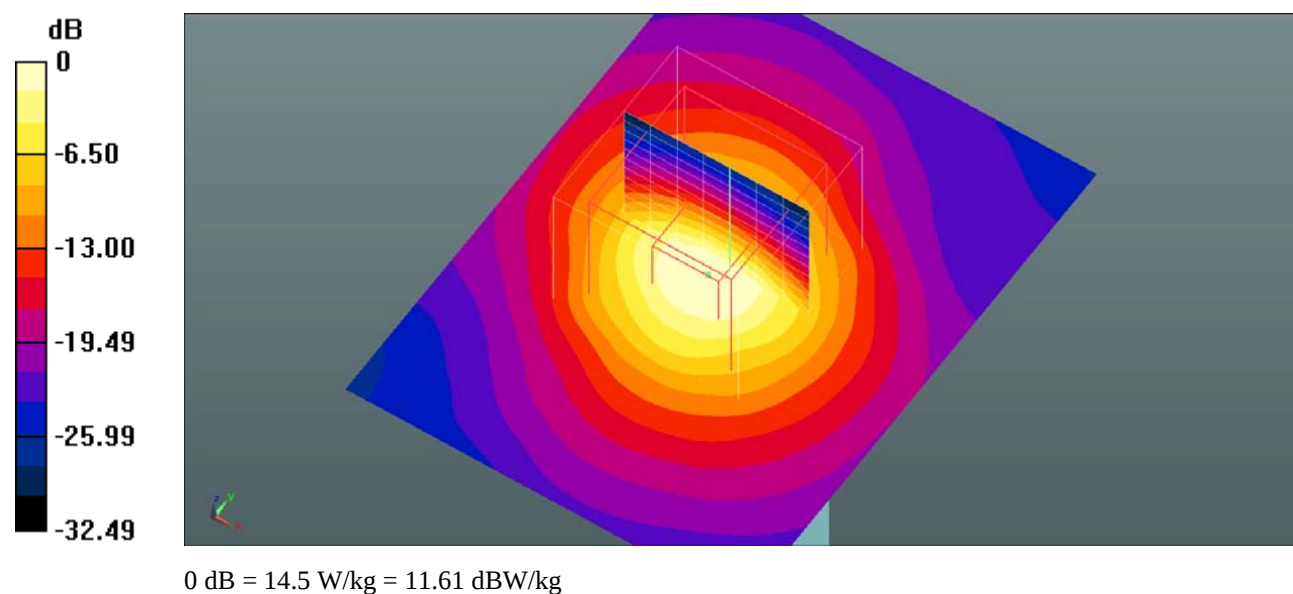

System Performance 5800 MHz**DUT: Dipole 5GHz Type: D5GHZV2; Serial: 1301**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.094 \text{ S/m}$; $\epsilon_r = 35.132$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at 5800MHz/d=10mm, Pin=100mw/Area Scan (61x81x1): Interpolated grid: dx=1.000

mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.2 W/kg

System Performance Check at 5800MHz/d=10mm, Pin=100mw/Zoom Scan (8x8x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 38.45 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 23.1 W/kg

SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 9.54 W/kg

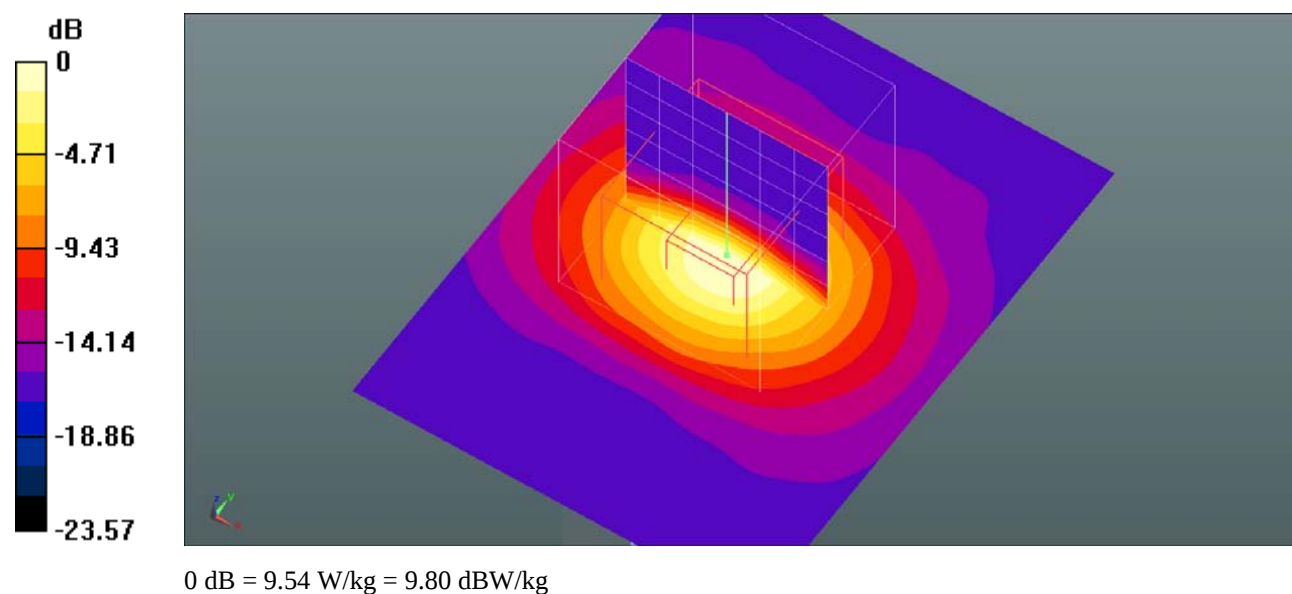


EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

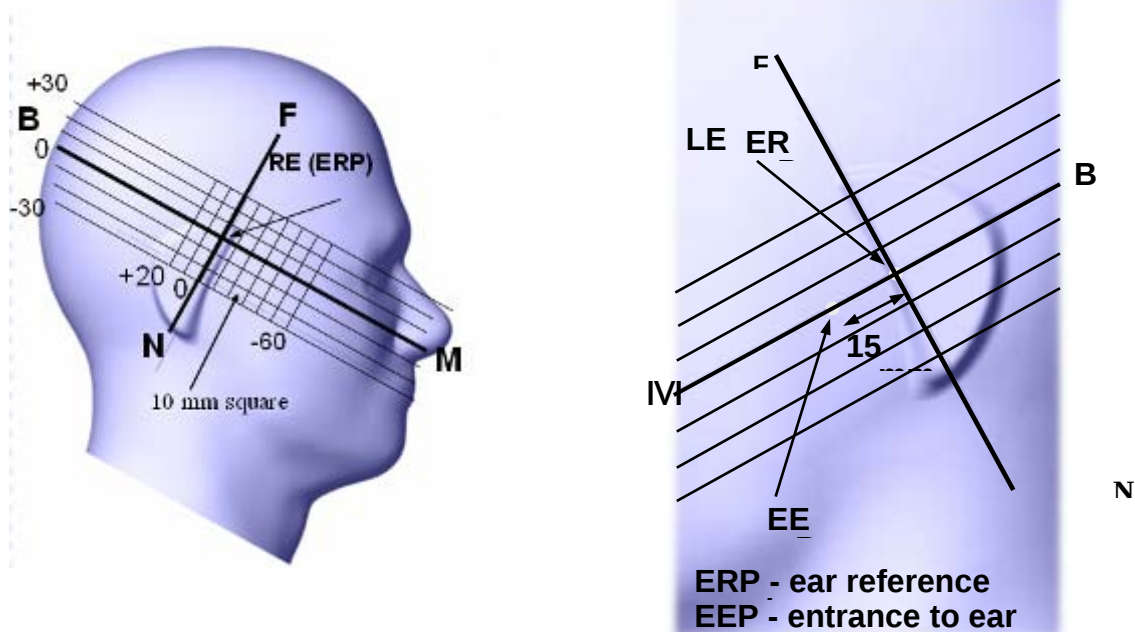

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

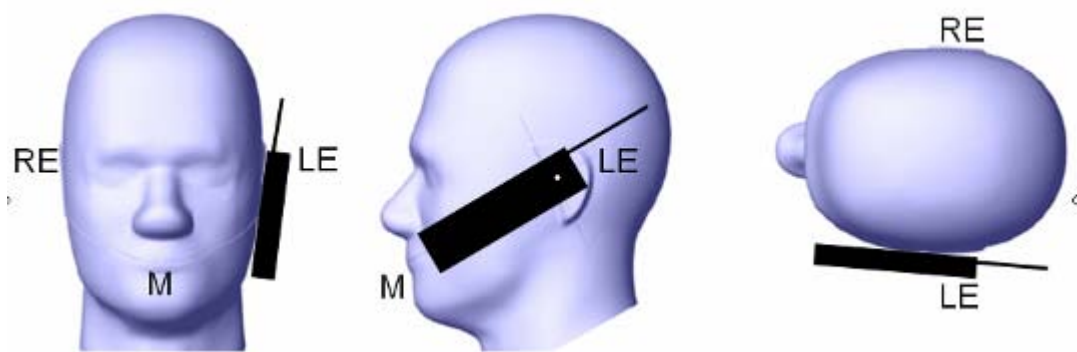


Ear/Tilt Position

With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

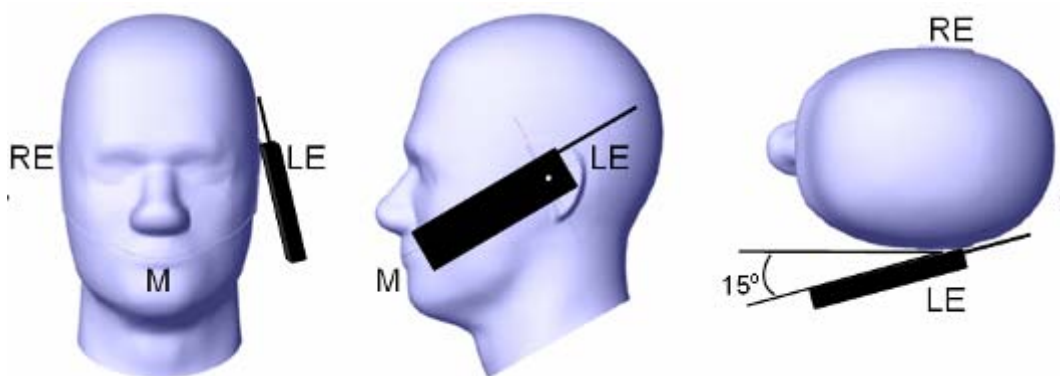Ear /Tilt 15° Position**Test positions for body-worn and other configurations**

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

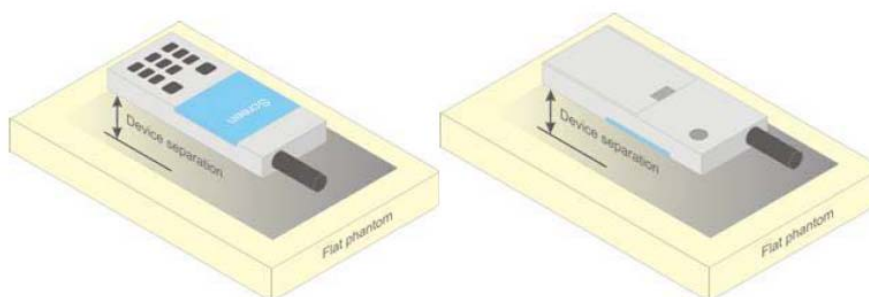


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

For this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring $7 \times 7 \times 7$ points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

CONDUCTED OUTPUT POWER MEASUREMENT

Test Procedure

The RF output of the transmitter was connected to the input of the Spectrum Analyzer through Connector.

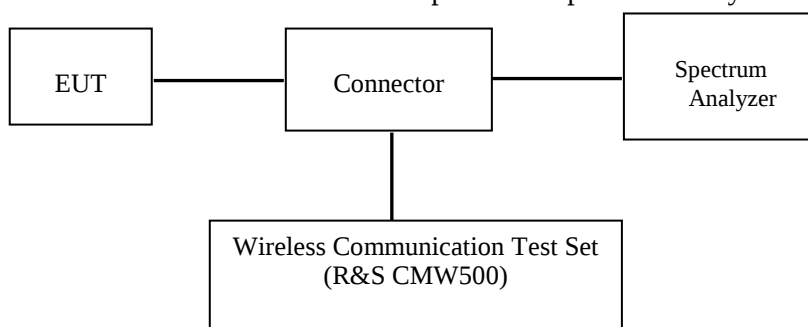

GSM/WCDMA/LTE

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	$\beta_d(SF)$	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specifi c Setting s	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

HSPA+

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

FDD-LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.2				
NS_09	6.6.3.3.3	19	10, 15	> 44	≤ 3
				> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
...					
NS_32	-	-	-	-	-

TDD-LTE

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Maximum Target Output Power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM 850	33.5	33.5	33.5
GPRS 1 TX Slot	33.5	33.5	33.5
GPRS 2 TX Slot	32.0	32.0	32.0
GPRS 3 TX Slot	30.0	30.0	30.0
GPRS 4 TX Slot	28.0	28.0	28.0
PCS 1900	30.0	30.0	30.0
GPRS 1 TX Slot	30.0	30.0	30.0
GPRS 2 TX Slot	27.5	27.5	27.5
GPRS 3 TX Slot	25.0	25.0	25.0
GPRS 4 TX Slot	23.0	23.0	23.0
WCDMA Band 2	23.5	23.5	23.5
HSDPA	23.5	23.5	23.5
HSUPA	23.5	23.5	23.5
HSPA+	23.5	23.5	23.5
WCDMA Band 5	24.0	24.0	24.0
HSDPA	24.0	24.0	24.0
HSUPA	24.0	24.0	24.0
HSPA+	24.0	24.0	24.0
LTE Band 2	22.5	22.5	22.5
LTE Band 5	23.0	23.0	23.0
LTE Band 12	22.0	22.0	22.0
LTE Band 41	23.0	23.0	23.0
WLAN 2.4G	14.5	14.5	14.5
WLAN 5.2G	16.5	16.5	16.5
WLAN 5.8G	16.5	16.5	16.5
Bluetooth BDR/EDR	3.5	3.5	3.5
BLE	3.8	3.8	3.8

Test Results:

GSM:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	33.22
	190	836.6	33.41
	251	848.8	33.05
PCS 1900	512	1850.2	29.44
	661	1880	29.54
	810	1909.8	29.71

GPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	33.29	31.73	29.73	27.41
	190	836.6	33.38	31.77	29.57	27.57
	251	848.8	33.13	31.46	29.49	27.47
PCS 1900	512	1850.2	29.43	27.02	24.99	22.92
	661	1880	29.32	26.96	24.94	22.69
	810	1909.8	29.61	26.91	24.77	22.64

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	24.29	25.73	25.48	24.41
	190	836.6	24.38	25.77	25.32	24.57
	251	848.8	24.13	25.46	25.24	24.47
PCS 1900	512	1850.2	20.43	21.02	20.74	19.92
	661	1880	20.32	20.96	20.69	19.69
	810	1909.8	20.61	20.91	20.52	19.64

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2 .For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3 .For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).

WCDMA Band 2:

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		22.23	23.28	23.27
	HSDPA	1	22.00	21.96	22.03
		2	22.07	21.54	22.12
		3	22.07	21.45	22.22
		4	22.01	21.42	22.10
	HSUPA	1	22.39	22.63	22.75
		2	22.30	22.61	22.90
		3	22.36	22.48	22.70
		4	22.26	22.63	22.69
		5	22.27	22.50	22.66
	HSPA+	1	22.46	22.42	22.63

WCDMA Band 5:

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		23.79	23.74	23.58
	HSDPA	1	22.78	22.70	22.56
		2	22.79	22.67	22.54
		3	22.69	22.74	22.48
		4	22.69	22.56	22.59
	HSUPA	1	23.38	23.13	23.28
		2	23.23	23.40	23.16
		3	23.78	23.48	23.42
		4	23.52	23.35	23.26
		5	23.41	23.31	23.59
	HSPA+	1	23.57	23.38	23.52

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/ HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE Band 2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	21.23	22.01	21.73
		RB1#3	0	0	21.20	21.94	21.71
		RB1#5	0	0	21.25	21.97	21.64
		RB3#0	1	1	21.32	21.95	21.67
		RB3#3	1	1	21.30	21.96	21.58
		RB6#0	1	1	20.22	21.12	20.61
	16-QAM	RB1#0	1	1	20.72	20.88	21.18
		RB1#3	1	1	20.61	20.75	21.29
		RB1#5	1	1	20.78	20.97	21.30
		RB3#0	2	2	20.46	21.26	20.78
		RB3#3	2	2	20.61	21.39	20.84
		RB6#0	2	2	19.47	20.18	20.01
3M	QPSK	RB1#0	0	0	20.97	21.82	21.64
		RB1#8	0	0	21.08	21.86	21.58
		RB1#14	0	0	21.05	21.79	21.61
		RB6#0	1	1	20.33	21.04	20.86
		RB6#9	1	1	20.22	21.02	20.63
		RB15#0	1	1	20.09	20.92	20.50
	16-QAM	RB1#0	1	1	20.39	21.46	20.50
		RB1#8	1	1	20.29	21.48	20.38
		RB1#14	1	1	20.45	21.49	20.40
		RB6#0	2	2	19.47	20.22	19.82
		RB6#9	2	2	19.66	20.19	19.93
		RB15#0	2	2	19.41	20.13	19.71
5M	QPSK	RB1#0	0	0	21.18	22.09	21.67
		RB1#13	0	0	21.18	21.91	21.45
		RB1#24	0	0	21.29	22.01	21.71
		RB15#0	1	1	20.16	21.15	20.76
		RB15#10	1	1	20.30	20.91	20.85
		RB25#0	1	1	20.46	21.04	20.58
	16-QAM	RB1#0	1	1	19.49	21.06	20.55
		RB1#13	1	1	19.47	21.08	20.33
		RB1#24	1	1	19.65	21.16	20.33
		RB15#0	2	2	19.30	19.96	19.82
		RB15#10	2	2	19.46	20.08	19.78
		RB25#0	2	2	19.56	19.96	19.60

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	21.16	21.99	21.88
		RB1#25	0	0	21.22	22.14	21.59
		RB1#49	0	0	21.38	21.99	21.50
		RB25#0	1	1	20.26	21.07	20.72
		RB25#25	1	1	20.49	20.91	20.78
		RB50#0	1	1	20.31	20.96	20.66
	16-QAM	RB1#0	1	1	20.42	21.29	20.27
		RB1#25	1	1	20.59	21.18	20.22
		RB1#49	1	1	20.89	21.14	20.30
		RB25#0	2	2	19.35	20.09	19.88
		RB25#25	2	2	19.67	20.12	19.93
		RB50#0	2	2	19.53	20.12	19.92
15M	QPSK	RB1#0	0	0	21.14	21.92	21.63
		RB1#38	0	0	21.22	21.84	21.59
		RB1#74	0	0	21.78	21.76	21.63
		RB36#0	1	1	20.33	20.82	20.87
		RB36#39	1	1	20.71	20.87	20.71
		RB75#0	1	1	20.54	20.88	20.65
	16-QAM	RB1#0	1	1	20.65	21.28	21.13
		RB1#38	1	1	20.82	21.21	21.22
		RB1#74	1	1	21.28	21.13	20.97
		RB36#0	2	2	19.44	20.13	19.73
		RB36#39	2	2	19.78	20.08	19.88
		RB75#0	2	2	19.51	20.21	19.82
20M	QPSK	RB1#0	0	0	22.24	22.06	22.09
		RB1#50	0	0	21.42	21.91	21.88
		RB1#99	0	0	22.15	22.01	21.82
		RB50#0	1	1	20.46	21.02	20.92
		RB50#50	1	1	20.96	20.81	20.81
		RB100#0	1	1	20.70	21.02	20.80
	16-QAM	RB1#0	1	1	20.17	21.12	21.65
		RB1#50	1	1	20.73	21.03	21.52
		RB1#99	1	1	21.21	21.00	21.33
		RB50#0	2	2	19.43	20.36	19.69
		RB50#50	2	2	20.00	19.97	19.87
		RB100#0	2	2	19.64	20.04	19.74

LTE Band 5:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	22.39	22.18	22.06
		RB1#3	0	0	22.44	22.04	22.11
		RB1#5	0	0	22.65	22.08	22.19
		RB3#0	1	1	22.60	22.19	22.14
		RB3#3	1	1	22.59	22.25	22.20
		RB6#0	1	1	21.49	21.23	21.19
	16-QAM	RB1#0	1	1	22.13	21.93	21.38
		RB1#3	1	1	22.20	21.73	20.82
		RB1#5	1	1	22.12	21.93	20.79
		RB3#0	2	2	21.69	20.99	21.68
		RB3#3	2	2	21.63	21.09	21.27
		RB6#0	2	2	20.92	20.69	20.88
3M	QPSK	RB1#0	0	0	22.43	22.05	22.37
		RB1#8	0	0	22.33	21.93	22.12
		RB1#14	0	0	21.91	22.10	22.14
		RB6#0	1	1	21.47	21.37	21.50
		RB6#9	1	1	21.16	21.17	21.24
		RB15#0	1	1	21.44	21.09	21.47
	16-QAM	RB1#0	1	1	21.86	21.96	21.23
		RB1#8	1	1	21.79	21.93	21.23
		RB1#14	1	1	21.48	21.83	20.77
		RB6#0	2	2	20.56	20.45	20.89
		RB6#9	2	2	20.04	20.64	20.76
		RB15#0	2	2	20.60	20.63	20.56
5M	QPSK	RB1#0	0	0	22.59	22.16	22.46
		RB1#13	0	0	22.01	22.24	21.97
		RB1#24	0	0	21.95	22.12	21.92
		RB15#0	1	1	21.43	21.21	21.53
		RB15#10	1	1	21.12	21.24	21.47
		RB25#0	1	1	21.14	21.19	21.62
	16-QAM	RB1#0	1	1	20.80	21.38	21.27
		RB1#13	1	1	20.17	21.30	21.23
		RB1#24	1	1	20.30	21.21	20.73
		RB15#0	2	2	20.60	20.51	20.52
		RB15#10	2	2	20.25	20.66	20.62
		RB25#0	2	2	20.31	20.68	20.45

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	22.40	22.22	22.23
		RB1#25	0	0	21.98	22.32	22.06
		RB1#49	0	0	22.05	22.37	22.03
		RB25#0	1	1	21.14	21.28	21.61
		RB25#25	1	1	21.54	21.12	21.54
		RB50#0	1	1	21.18	21.39	21.07
	16-QAM	RB1#0	1	1	21.84	21.61	20.64
		RB1#25	1	1	21.20	21.31	20.74
		RB1#49	1	1	21.26	21.80	20.59
		RB25#0	2	2	20.18	20.67	20.71
		RB25#25	2	2	20.62	20.34	20.89
		RB50#0	2	2	20.75	20.78	20.23

LTE Band 12:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	21.40	21.41	21.44
		RB1#3	0	0	21.41	21.41	21.37
		RB1#5	0	0	21.43	21.54	21.48
		RB3#0	1	1	21.49	21.44	21.45
		RB3#3	1	1	21.52	21.62	21.50
		RB6#0	1	1	20.48	20.32	20.49
	16-QAM	RB1#0	1	1	20.74	21.08	20.12
		RB1#3	1	1	20.66	20.97	19.97
		RB1#5	1	1	20.90	21.03	20.06
		RB3#0	2	2	20.59	20.48	20.44
		RB3#3	2	2	20.59	20.36	20.33
		RB6#0	2	2	20.12	19.70	20.18
3M	QPSK	RB1#0	0	0	21.34	21.51	21.54
		RB1#8	0	0	21.33	21.54	21.24
		RB1#14	0	0	21.32	21.44	21.29
		RB6#0	1	1	20.46	20.56	20.49
		RB6#9	1	1	20.52	20.44	20.46
		RB15#0	1	1	20.66	20.43	20.59
	16-QAM	RB1#0	1	1	20.77	21.21	20.10
		RB1#8	1	1	20.85	21.00	20.02
		RB1#14	1	1	20.90	21.24	20.06
		RB6#0	2	2	19.90	19.45	20.03
		RB6#9	2	2	19.98	19.51	20.14
		RB15#0	2	2	20.06	19.54	19.95
5M	QPSK	RB1#0	0	0	21.37	21.50	21.52
		RB1#13	0	0	21.53	21.67	21.44
		RB1#24	0	0	21.49	21.62	21.25
		RB15#0	1	1	20.50	20.44	20.57
		RB15#10	1	1	20.50	20.40	20.44
		RB25#0	1	1	20.40	20.26	20.57
	16-QAM	RB1#0	1	1	19.70	20.38	20.05
		RB1#13	1	1	19.61	20.35	20.09
		RB1#24	1	1	19.53	20.74	20.14
		RB15#0	2	2	20.06	19.38	20.14
		RB15#10	2	2	20.08	19.35	20.00
		RB25#0	2	2	20.16	19.57	19.79

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	21.32	21.38	21.54
		RB1#25	0	0	21.39	21.56	21.77
		RB1#49	0	0	21.44	21.54	21.35
		RB25#0	1	1	20.39	20.47	20.42
		RB25#25	1	1	20.53	20.94	20.53
		RB50#0	1	1	20.49	20.56	20.94
	16-QAM	RB1#0	1	1	20.52	20.54	20.04
		RB1#25	1	1	20.46	20.49	20.53
		RB1#49	1	1	20.50	20.65	19.88
		RB25#0	2	2	20.21	19.45	19.66
		RB25#25	2	2	19.51	19.95	19.99
		RB50#0	2	2	20.11	19.55	19.76

LTE Band 41:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Low Mid Channel (dBm)	Mid High Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	22.28	22.52	22.52	22.23
		RB1#13	0	0	22.29	22.37	22.46	22.26
		RB1#24	0	0	22.34	22.27	22.42	22.28
		RB15#0	1	1	21.26	21.54	21.59	21.24
		RB15#10	1	1	21.19	21.31	21.52	21.27
		RB25#0	1	1	21.19	21.31	21.54	21.12
	16-QAM	RB1#0	1	1	21.59	21.33	21.42	21.51
		RB1#13	1	1	21.63	21.18	21.55	21.67
		RB1#24	1	1	21.73	21.32	21.41	21.69
		RB15#0	2	2	20.53	20.80	20.57	20.50
		RB15#10	2	2	20.33	20.53	20.69	20.27
		RB25#0	2	2	20.62	20.29	20.87	20.68
10M	QPSK	RB1#0	0	0	22.41	22.47	22.48	22.35
		RB1#25	0	0	22.37	22.53	22.28	22.30
		RB1#49	0	0	22.45	22.69	22.34	22.38
		RB25#0	1	1	21.17	21.41	21.58	21.23
		RB25#25	1	1	21.28	21.53	21.49	21.28
		RB50#0	1	1	21.18	21.40	21.58	21.15
	16-QAM	RB1#0	1	1	21.35	21.78	21.27	21.42
		RB1#25	1	1	21.42	21.56	21.36	21.45
		RB1#49	1	1	21.40	21.75	21.27	21.36
		RB25#0	2	2	20.36	20.67	20.96	20.31
		RB25#25	2	2	20.38	20.66	20.87	20.38
		RB50#0	2	2	20.32	20.64	20.59	20.25
15M	QPSK	RB1#0	0	0	22.35	22.54	22.40	22.41
		RB1#38	0	0	22.47	22.57	22.43	22.47
		RB1#74	0	0	22.46	22.56	22.54	22.51
		RB36#0	1	1	21.36	21.44	21.58	21.42
		RB36#39	1	1	21.45	21.38	21.41	21.39
		RB75#0	1	1	21.25	21.35	21.53	21.34
	16-QAM	RB1#0	1	1	21.49	21.63	21.25	21.42
		RB1#38	1	1	21.45	21.96	20.80	21.42
		RB1#74	1	1	21.41	21.59	20.99	21.33
		RB36#0	2	2	20.48	20.30	20.69	20.54
		RB36#39	2	2	20.38	20.56	20.88	20.37
		RB75#0	2	2	20.40	20.53	20.66	20.32

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Low Mid Channel (dBm)	Mid High Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	0	0	22.22	22.81	22.91	22.94
		RB1#50	0	0	22.21	22.57	22.88	22.28
		RB1#99	0	0	22.36	22.61	22.76	22.34
		RB50#0	1	1	21.30	21.96	22.08	21.22
		RB50#50	1	1	21.26	21.39	21.48	21.28
		RB100#0	1	1	21.29	21.92	21.55	21.32
	16-QAM	RB1#0	1	1	21.80	21.20	22.29	21.81
		RB1#50	1	1	21.60	21.28	22.32	21.57
		RB1#99	1	1	21.82	21.21	22.53	21.75
		RB50#0	2	2	20.46	20.53	20.55	20.41
		RB50#50	2	2	20.53	20.60	20.55	20.51
		RB100#0	2	2	20.55	20.25	20.35	20.48

Wi-Fi 2.4G:

Mode	Channel frequency (MHz)	Data Rate	Conducted Average Output
802.11b	2412	1Mbps	13.17
	2437		12.60
	2462		14.12
802.11g	2412	6Mbps	12.93
	2437		11.64
	2462		13.55
802.11n HT20	2412	MCS0	9.23
	2437		10.03
	2462		9.71
802.11n HT40	2422	MCS0	10.47
	2437		9.09
	2452		10.57

WLAN 5G:

Mode	Channel frequency	Data Rate	RF Output Power(dBm)
802.11a	5180	6Mbps	15.99
	5200		15.50
	5240		14.44
	5745		16.08
	5785		15.56
	5825		14.89
802.11n HT20	5180	MCS0	16.11
	5200		15.69
	5240		14.74
	5745		16.28
	5785		15.85
	5825		15.09
802.11n HT40	5190	MCS0	15.79
	5230		14.70
	5755		16.11
	5795		15.69
802.11AC20	5180	MCS0	16.06
	5200		15.64
	5240		14.59
	5745		16.44
	5785		15.75
	5825		15.15
802.11AC40	5190	MCS0	15.84
	5230		14.84
	5755		16.18
	5795		15.63
802.11AC80	5210	MCS0	15.81
	5775		16.17

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	-1.73
	2441	-2.55
	2453	1.08
	2480	1.66
EDR($\pi/4$ -DQPSK)	2402	0.09
	2441	-0.56
	2453	2.98
	2480	0.35
EDR(8DPSK)	2402	-2.36
	2441	-2.89
	2454	-0.21
	2480	0.87
BLE(1M)	2402	1.53
	2440	-0.89
	2480	3.56
BLE(2M)	2402	1.53
	2440	-0.94
	2480	3.73

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21.2-23.4 °C
Relative Humidity:	46-55 %
ATM Pressure:	101.9 kPa
Test Date:	2022/03/05

Testing was performed by Seven Liang.

Verify:

GSM 850 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Worn Back (10mm)	824.2	GSM	/	/	/	/	/	/
	836.6	GSM	33.41	33.5	1.021	0.165	0.17	1#
	848.8	GSM	/	/	/	/	/	/

PCS 1900 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Worn Back (10mm)	1850.2	GSM	/	/	/	/	/	/
	1880	GSM	29.54	30.0	1.112	0.207	0.23	2#
	1909.8	GSM	/	/	/	/	/	/

WCDMA Band 2 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.28	23.5	1.052	0.512	0.54	3#
	1907.6	RMC	/	/	/	/	/	/

WCDMA Band 5 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.74	24.0	1.062	0.151	0.16	4#
	846.6	RMC	/	/	/	/	/	/

LTE Band 2 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	22.06	22.5	1.107	0.625	0.69	5#
	1900	20	1RB	/	/	/	/	/	/

LTE Band 5 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	22.22	23.0	1.197	0.241	0.29	6#
	844	10	1RB	/	/	/	/	/	/

LTE Band 12 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	21.38	22.0	1.153	0.267	0.31	7#
	711	10	1RB	/	/	/	/	/	/

LTE Band 41 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Right Cheek	2565	20	1RB	/	/	/	/	/	/
	2595	20	1RB	/	/	/	/	/	/
	2615	20	1RB	/	/	/	/	/	/
	2645	20	1RB	22.94	23.0	1.014	0.947	0.96	8#
Body Back (10mm)	2565	20	1RB	/	/	/	/	/	/
	2595	20	1RB	22.81	23.0	1.045	0.589	0.62	9#
	2615	20	1RB	/	/	/	/	/	/
	2645	20	1RB	/	/	/	/	/	/

The frequency range of LTE Band 41 is 2555 ~ 2655MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 4.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.¹⁴

$$N_c = Round \left\{ \left[100(f_{high} - f_{low}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- N_c is the number of test channels, rounded to the nearest integer,
- f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
- f_c is the mid-band channel frequency,
- all frequencies are in MHz.

WLAN 2.4G:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (10mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/
	2462	802.11b	14.12	14.5	1.091	0.105	0.11	10#

WLAN 5.2G:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (10mm)	5180	802.11a	15.99	16.5	1.125	0.019	0.02	11#
	5200	802.11a	/	/	/	/	/	/
	5240	802.11a	/	/	/	/	/	/

WLAN 5.8G:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (10mm)	5745	802.11a	16.08	16.5	1.102	0.144	0.16	12#
	5785	802.11a	/	/	/	/	/	/
	5825	802.11a	/	/	/	/	/	/

Additional SAR Scans:**GSM 850:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	31.77	32.0	1.054	0.115	0.12	13#
	848.8	GPRS	/	/	/	/	/	/

PCS 1900:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	26.96	27.5	1.132	0.153	0.17	14#
	1909.8	GPRS	/	/	/	/	/	/

WCDMA Band 2:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.28	23.5	1.052	0.248	0.27	15#
	1907.6	RMC	/	/	/	/	/	/

WCDMA Band 5:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.74	24.0	1.062	0.136	0.15	16#
	846.6	RMC	/	/	/	/	/	/

LTE Band 2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	22.06	22.5	1.107	0.236	0.26	17#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.91	22.5	1.146	0.162	0.18	18#

LTE Band 5:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	22.22	23.0	1.197	0.135	0.16	19#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.32	23.0	1.169	0.108	0.13	20#

LTE Band 12:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	21.38	22.0	1.153	0.097	0.11	21#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	21.56	22.0	1.107	0.00483	0.01	22#

LTE Band 41:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	2565	20	1RB	/	/	/	/	/	/
	2595	20	1RB	22.81	23.0	1.045	0.197	0.21	23#
	2615	20	1RB	/	/	/	/	/	/
	2645	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.57	23.0	1.104	0.157	0.17	24#

The frequency range of LTE Band 41 is 2555 ~ 2655MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 4.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.¹⁴

$$N_c = \text{Round} \left\{ \left[100(f_{\text{high}} - f_{\text{low}}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- N_c is the number of test channels, rounded to the nearest integer,
- f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
- f_c is the mid-band channel frequency,
- all frequencies are in MHz.

WLAN 2.4G:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	/	/	/	/	/	/
	2462	802.11b	14.12	14.5	1.091	0.071	0.08	25#

WLAN 5G:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	5180	802.11a	15.99	16.5	1.125	0.099	0.11	26#
	5200	802.11a	/	/	/	/	/	/
	5240	802.11a	/	/	/	/	/	/

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Front (10mm)	5745	802.11a	16.08	16.5	1.102	0.104	0.11	27#
	5785	802.11a	/	/	/	/	/	/
	5825	802.11a	/	/	/	/	/	/

Note:

When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The Highest Measured SAR Configuration in Each Frequency Band

Head

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
2600MHz (2500-2700MHz)	LTE Band 41	2645.0	Head Right Cheek	0.947	0.935	1.01

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements..

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN(GSM/WCDMA/LTE) + Bluetooth	√	×
WWAN(GSM/WCDMA/LTE) + WLAN	√	√
WLAN + Bluetooth	×	×

Simultaneous and Hotspot SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+Bluetooth	Head Left Cheek	0.14	0.10	0.240
	Head Left Tilt	0.08	0.10	0.180
	Head Right Cheek	0.18	0.10	0.280
	Head Right Tilt	0.09	0.10	0.190
	Body Worn Back	0.17	0.05	0.220
	Body Back	0.18	0.05	0.230
PCS 1900+ Bluetooth	Head Left Cheek	0.54	0.10	0.640
	Head Left Tilt	0.51	0.10	0.610
	Head Right Cheek	0.79	0.10	0.890
	Head Right Tilt	0.55	0.10	0.650
	Body Worn Back	0.23	0.05	0.280
	Body Back	0.25	0.05	0.300
WCDMA Band 2+ Bluetooth	Head Left Cheek	1.03	0.10	1.130
	Head Left Tilt	1.22	0.10	1.320
	Head Right Cheek	1.21	0.10	1.310
	Head Right Tilt	0.73	0.10	0.830
	Body Back	0.54	0.05	0.590
WCDMA Band 5+ Bluetooth	Head Left Cheek	0.10	0.10	0.200
	Head Left Tilt	0.07	0.10	0.170
	Head Right Cheek	0.12	0.10	0.220
	Head Right Tilt	0.07	0.10	0.170
	Body Back	0.16	0.05	0.210
LTE Band 2+ Bluetooth	Head Left Cheek	1.22	0.10	1.320
	Head Left Tilt	0.75	0.10	0.850
	Head Right Cheek	1.22	0.10	1.320
	Head Right Tilt	0.78	0.10	0.880
	Body Back	0.69	0.05	0.740
LTE Band 5+ Bluetooth	Head Left Cheek	0.18	0.10	0.280
	Head Left Tilt	0.12	0.10	0.220
	Head Right Cheek	0.21	0.10	0.310
	Head Right Tilt	0.10	0.10	0.200
	Body Back	0.29	0.05	0.340

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 12+ Bluetooth	Head Left Cheek	0.28	0.10	0.380
	Head Left Tilt	0.06	0.10	0.160
	Head Right Cheek	0.16	0.10	0.260
	Head Right Tilt	0.09	0.10	0.190
	Body Back	0.31	0.05	0.360
LTE Band 41+ Bluetooth	Head Left Cheek	0.68	0.10	0.780
	Head Left Tilt	0.47	0.10	0.570
	Head Right Cheek	0.96	0.10	1.060
	Head Right Tilt	0.73	0.10	0.830
	Body Back	0.62	0.05	0.670

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+ Wi-Fi 2.4G	Head Left Cheek	0.14	0.31	0.450
	Head Left Tilt	0.08	0.21	0.290
	Head Right Cheek	0.18	0.33	0.510
	Head Right Tilt	0.09	0.13	0.220
GSM 850+ Wi-Fi 2.4G (Hotspot)	Body Back	0.18	0.11	0.290
	Body Front	0.12	0.08	0.200
	Body Left	0.13	/	0.130
	Body Right	0.18	0.09	0.270
	Body Top	/	0.10	0.100
	Body Bottom	0.07	/	0.070
PCS 1900+ Wi-Fi 2.4G	Head Left Cheek	0.54	0.31	0.850
	Head Left Tilt	0.51	0.21	0.720
	Head Right Cheek	0.79	0.33	1.120
	Head Right Tilt	0.55	0.13	0.680
PCS 1900+ Wi-Fi 2.4G (Hotspot)	Body Back	0.25	0.11	0.360
	Body Front	0.17	0.08	0.250
	Body Left	0.23	/	0.230
	Body Right	/	0.09	0.090
	Body Top	0.19	0.10	0.290
	Body Bottom	/	/	0.000
WCDMA Band 2+ Wi-Fi 2.4G	Head Left Cheek	1.03	0.31	1.340
	Head Left Tilt	1.22	0.21	1.430
	Head Right Cheek	1.21	0.33	1.540
	Head Right Tilt	0.73	0.13	0.860
WCDMA Band 2+ Wi-Fi 2.4G (Hotspot)	Body Back	0.54	0.11	0.650
	Body Front	0.27	0.08	0.350
	Body Left	0.58	/	0.580
	Body Right	/	0.09	0.090
	Body Top	0.05	0.10	0.150
	Body Bottom	/	/	0.000
WCDMA Band 5+ Wi-Fi 2.4G	Head Left Cheek	0.10	0.31	0.410
	Head Left Tilt	0.07	0.21	0.280
	Head Right Cheek	0.12	0.33	0.450
	Head Right Tilt	0.07	0.13	0.200
WCDMA Band 5+ Wi-Fi 2.4G (Hotspot)	Body Back	0.16	0.11	0.270
	Body Front	0.15	0.08	0.230
	Body Left	0.13	/	0.130
	Body Right	0.18	0.09	0.270
	Body Top	/	0.10	0.100
	Body Bottom	0.09	/	0.090

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 2+ Wi-Fi 2.4G	Head Left Cheek	1.22	0.31	1.530
	Head Left Tilt	0.75	0.21	0.960
	Head Right Cheek	1.22	0.33	1.550
	Head Right Tilt	0.78	0.13	0.910
LTE Band 2+ Wi-Fi 2.4G (Hotspot)	Body Back	0.69	0.11	0.800
	Body Front	0.26	0.08	0.340
	Body Left	0.90	/	0.900
	Body Right	/	0.09	0.090
	Body Top	0.57	0.10	0.670
	Body Bottom	/	/	0.000
LTE Band 5+ Wi-Fi 2.4G	Head Left Cheek	0.18	0.31	0.490
	Head Left Tilt	0.12	0.21	0.330
	Head Right Cheek	0.21	0.33	0.540
	Head Right Tilt	0.10	0.13	0.230
LTE Band 5+ Wi-Fi 2.4G (Hotspot)	Body Back	0.29	0.11	0.400
	Body Front	0.16	0.08	0.240
	Body Left	0.39	/	0.390
	Body Right	0.20	0.09	0.290
	Body Top	/	0.10	0.100
	Body Bottom	0.02	/	0.020
LTE Band 12+ Wi-Fi 2.4G	Head Left Cheek	0.28	0.31	0.590
	Head Left Tilt	0.06	0.21	0.270
	Head Right Cheek	0.16	0.33	0.490
	Head Right Tilt	0.09	0.13	0.220
LTE Band 12+ Wi-Fi 2.4G (Hotspot)	Body Back	0.31	0.11	0.420
	Body Front	0.11	0.08	0.190
	Body Left	0.29	/	0.290
	Body Right	0.11	0.09	0.200
	Body Top	/	0.10	0.100
	Body Bottom	0.02	/	0.020
LTE Band 41+ Wi-Fi 2.4G	Head Left Cheek	0.68	0.31	0.990
	Head Left Tilt	0.47	0.21	0.680
	Head Right Cheek	0.96	0.33	1.290
	Head Right Tilt	0.73	0.13	0.860
LTE Band 41+ Wi-Fi 2.4G (Hotspot)	Body Back	0.62	0.11	0.730
	Body Front	0.21	0.08	0.290
	Body Left	0.51	/	0.510
	Body Right	/	0.09	0.090
	Body Top	0.13	0.10	0.230
	Body Bottom	/	/	0.000

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+ Wi-Fi 5.2G	Head Left Cheek	0.14	0.37	0.510
	Head Left Tilt	0.08	0.34	0.420
	Head Right Cheek	0.18	0.27	0.450
	Head Right Tilt	0.09	0.28	0.370
GSM 850+ Wi-Fi 5.2G (Hotspot)	Body Back	0.18	0.02	0.200
	Body Front	0.12	0.11	0.230
	Body Left	0.13	/	0.130
	Body Right	0.18	0.04	0.220
	Body Top	/	0.13	0.130
	Body Bottom	0.07	/	0.070
PCS 1900+ Wi-Fi 5.2G	Head Left Cheek	0.54	0.37	0.910
	Head Left Tilt	0.51	0.34	0.850
	Head Right Cheek	0.79	0.27	1.060
	Head Right Tilt	0.55	0.28	0.830
PCS 1900+ Wi-Fi 5.2G (Hotspot)	Body Back	0.25	0.02	0.270
	Body Front	0.17	0.11	0.280
	Body Left	0.23	/	0.230
	Body Right	/	0.04	0.040
	Body Top	0.19	0.13	0.320
	Body Bottom	/	/	0.000
WCDMA Band 2+ Wi-Fi 5.2G	Head Left Cheek	1.03	0.37	1.400
	Head Left Tilt	1.22	0.34	1.560
	Head Right Cheek	1.21	0.27	1.480
	Head Right Tilt	0.73	0.28	1.010
WCDMA Band 2+ Wi-Fi 5.2G (Hotspot)	Body Back	0.54	0.02	0.560
	Body Front	0.27	0.11	0.380
	Body Left	0.58	/	0.580
	Body Right	/	0.04	0.040
	Body Top	0.05	0.13	0.180
	Body Bottom	/	/	0.000
WCDMA Band 5+ Wi-Fi 5.2G	Head Left Cheek	0.10	0.37	0.470
	Head Left Tilt	0.07	0.34	0.410
	Head Right Cheek	0.12	0.27	0.390
	Head Right Tilt	0.07	0.28	0.350
WCDMA Band 5+ Wi-Fi 5.2G (Hotspot)	Body Back	0.16	0.02	0.180
	Body Front	0.15	0.11	0.26
	Body Left	0.13	/	0.130
	Body Right	0.18	0.04	0.220
	Body Top	/	0.13	0.130
	Body Bottom	0.09	/	0.090

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 2+ Wi-Fi 5.2G	Head Left Cheek	1.22	0.37	1.590
	Head Left Tilt	0.75	0.34	1.090
	Head Right Cheek	1.22	0.27	1.490
	Head Right Tilt	0.78	0.28	1.060
LTE Band 2+ Wi-Fi 5.2G (Hotspot)	Body Back	0.69	0.02	0.710
	Body Front	0.26	0.11	0.370
	Body Left	0.90	/	0.900
	Body Right	/	0.04	0.040
	Body Top	0.57	0.13	0.700
	Body Bottom	/	/	0.000
LTE Band 5+ Wi-Fi 5.2G	Head Left Cheek	0.18	0.37	0.550
	Head Left Tilt	0.12	0.34	0.460
	Head Right Cheek	0.21	0.27	0.480
	Head Right Tilt	0.10	0.28	0.380
LTE Band 5+ Wi-Fi 5.2G (Hotspot)	Body Back	0.29	0.02	0.310
	Body Front	0.16	0.11	0.270
	Body Left	0.39	/	0.390
	Body Right	0.20	0.04	0.240
	Body Top	/	0.13	0.130
	Body Bottom	0.02	/	0.020
LTE Band 12+ Wi-Fi 5.2G	Head Left Cheek	0.28	0.37	0.650
	Head Left Tilt	0.06	0.34	0.400
	Head Right Cheek	0.16	0.27	0.430
	Head Right Tilt	0.09	0.28	0.370
LTE Band 12+ Wi-Fi 5.2G (Hotspot)	Body Back	0.31	0.02	0.330
	Body Front	0.11	0.11	0.220
	Body Left	0.29	/	0.290
	Body Right	0.11	0.04	0.150
	Body Top	/	0.13	0.130
	Body Bottom	0.02	/	0.020
LTE Band 41+ Wi-Fi 5.2G	Head Left Cheek	0.68	0.37	1.050
	Head Left Tilt	0.47	0.34	0.810
	Head Right Cheek	0.96	0.27	1.230
	Head Right Tilt	0.73	0.28	1.010
LTE Band 41+ Wi-Fi 5.2G (Hotspot)	Body Back	0.62	0.02	0.640
	Body Front	0.21	0.11	0.320
	Body Left	0.51	/	0.510
	Body Right	/	0.04	0.040
	Body Top	0.13	0.13	0.260
	Body Bottom	/	/	0.000

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+ Wi-Fi 5.8G	Head Left Cheek	0.14	0.12	0.260
	Head Left Tilt	0.08	0.10	0.180
	Head Right Cheek	0.18	0.15	0.330
	Head Right Tilt	0.09	0.36	0.450
GSM 850+ Wi-Fi 5.8G (Hotspot)	Body Back	0.18	0.16	0.340
	Body Front	0.12	0.11	0.230
	Body Left	0.13	/	0.130
	Body Right	0.18	0.03	0.210
	Body Top	/	0.11	0.110
	Body Bottom	0.07	/	0.070
PCS 1900+ Wi-Fi 5.8G	Head Left Cheek	0.54	0.12	0.660
	Head Left Tilt	0.51	0.10	0.610
	Head Right Cheek	0.79	0.15	0.940
	Head Right Tilt	0.55	0.36	0.910
PCS 1900+ Wi-Fi 5.8G (Hotspot)	Body Back	0.25	0.16	0.410
	Body Front	0.17	0.11	0.280
	Body Left	0.23	/	0.230
	Body Right	/	0.03	0.030
	Body Top	0.19	0.11	0.300
	Body Bottom	/	/	0.000
WCDMA Band 2+ Wi-Fi 5.8G	Head Left Cheek	1.03	0.12	1.150
	Head Left Tilt	1.22	0.10	1.320
	Head Right Cheek	1.21	0.15	1.360
	Head Right Tilt	0.73	0.36	1.090
WCDMA Band 2+ Wi-Fi 5.8G (Hotspot)	Body Back	0.54	0.16	0.700
	Body Front	0.27	0.11	0.380
	Body Left	0.58	/	0.580
	Body Right	/	0.03	0.030
	Body Top	0.05	0.11	0.160
	Body Bottom	/	/	0.000
WCDMA Band 5+ Wi-Fi 5.8G	Head Left Cheek	0.10	0.12	0.220
	Head Left Tilt	0.07	0.10	0.170
	Head Right Cheek	0.12	0.15	0.270
	Head Right Tilt	0.07	0.36	0.430
WCDMA Band 5+ Wi-Fi 5.8G (Hotspot)	Body Back	0.16	0.16	0.320
	Body Front	0.15	0.11	0.26
	Body Left	0.13	/	0.130
	Body Right	0.18	0.03	0.210
	Body Top	/	0.11	0.110
	Body Bottom	0.09	/	0.090

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 2+ Wi-Fi 5.8G	Head Left Cheek	1.22	0.12	1.340
	Head Left Tilt	0.75	0.10	0.850
	Head Right Cheek	1.22	0.15	1.370
	Head Right Tilt	0.78	0.36	1.140
LTE Band 2+ Wi-Fi 5.8G (Hotspot)	Body Back	0.69	0.16	0.850
	Body Front	0.26	0.11	0.370
	Body Left	0.90	/	0.900
	Body Right	/	0.03	0.030
	Body Top	0.57	0.11	0.680
	Body Bottom	/	/	0.000
LTE Band 5+ Wi-Fi 5.8G	Head Left Cheek	0.18	0.12	0.300
	Head Left Tilt	0.12	0.10	0.220
	Head Right Cheek	0.21	0.15	0.360
	Head Right Tilt	0.10	0.36	0.460
LTE Band 5+ Wi-Fi 5.8G (Hotspot)	Body Back	0.29	0.16	0.450
	Body Front	0.16	0.11	0.270
	Body Left	0.39	/	0.390
	Body Right	0.20	0.03	0.230
	Body Top	/	0.11	0.110
	Body Bottom	0.02	/	0.020
LTE Band 12+ Wi-Fi 5.8G	Head Left Cheek	0.28	0.12	0.400
	Head Left Tilt	0.06	0.10	0.160
	Head Right Cheek	0.16	0.15	0.310
	Head Right Tilt	0.09	0.36	0.450
LTE Band 12+ Wi-Fi 5.8G (Hotspot)	Body Back	0.31	0.16	0.470
	Body Front	0.11	0.11	0.220
	Body Left	0.29	/	0.290
	Body Right	0.11	0.03	0.140
	Body Top	/	0.11	0.110
	Body Bottom	0.02	/	0.020
LTE Band 41+ Wi-Fi 5.8G	Head Left Cheek	0.68	0.12	0.800
	Head Left Tilt	0.47	0.10	0.570
	Head Right Cheek	0.96	0.15	1.110
	Head Right Tilt	0.73	0.36	1.090
LTE Band 41+ Wi-Fi 5.8G (Hotspot)	Body Back	0.62	0.16	0.780
	Body Front	0.21	0.11	0.320
	Body Left	0.51	/	0.510
	Body Right	/	0.03	0.030
	Body Top	0.13	0.11	0.240
	Body Bottom	/	/	0.000

Note:

1. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.
2. Hotspot Mode is not feasible during voice calls.

Conclusion:

Sum of SAR: $\Sigma \text{SAR} \leq 1.6 \text{ W/kg}$ therefore simultaneous transmission SAR with Volume Scans is **not required**.

SAR Plots

Please Refer to the Attachment.

Plot 1#: GSM 850_Body Worn Back_Mid**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.978$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Worn Back/GSM 850 Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.196 W/kg


Body Worn Back/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.65 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

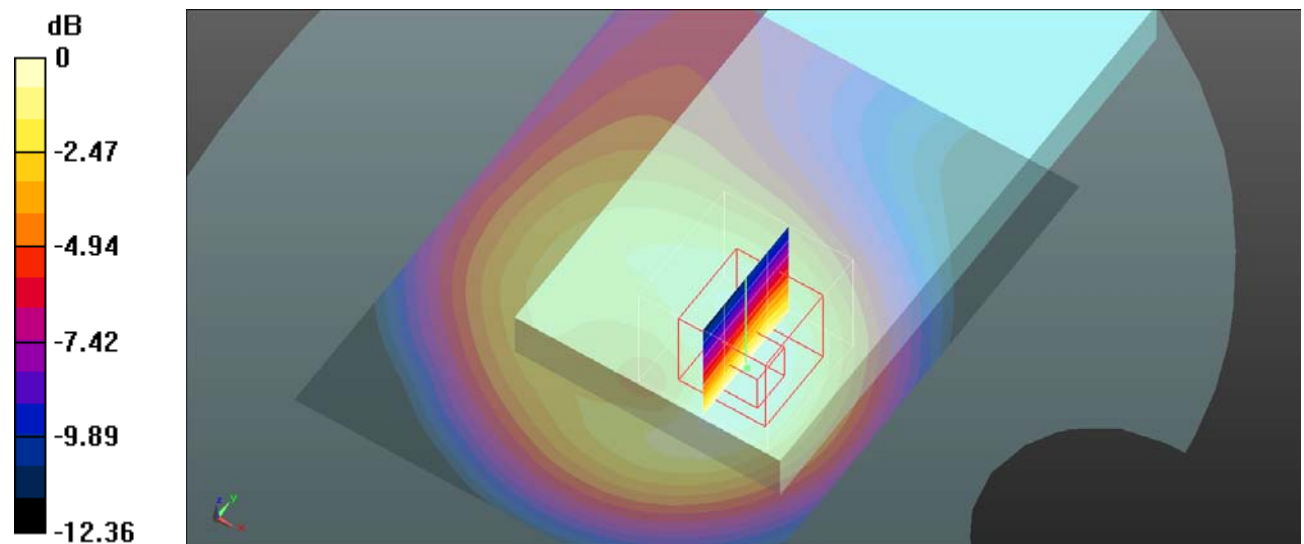

0 dB = 0.187 W/kg = -7.28 dBW/kg

Plot 2#: PCS 1900_Body Worn Back_Mid**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Worn Back/GSM 1900 Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.211 W/kg


Body Worn Back/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.87 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

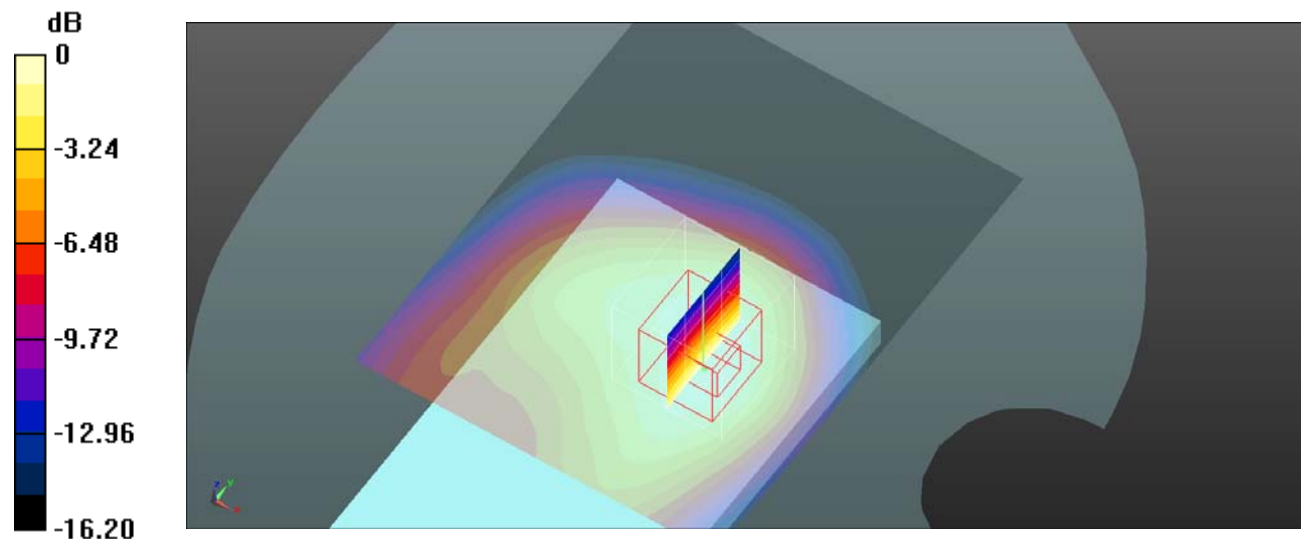

0 dB = 0.203 W/kg = -6.93 dBW/kg

Plot 3#: WCDMA Band 2_Body Back_Mid**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WCDMA Band 2 Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.622 W/kg


Body Back/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.45 V/m; Power Drift = -0.05dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.615 W/kg

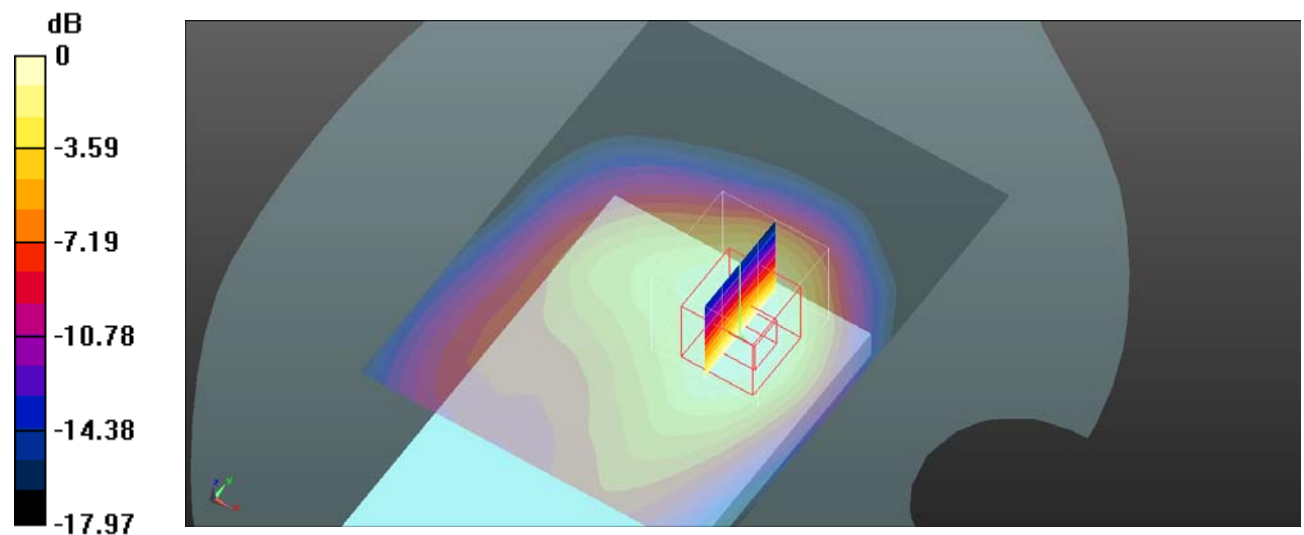

0 dB = 0.615 W/kg = -2.11 dBW/kg

Plot 4#: WCDMA Band 5_Body Back_Mid**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.978$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WCDMA Band 5 Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.163 W/kg


Body Back/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.393 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

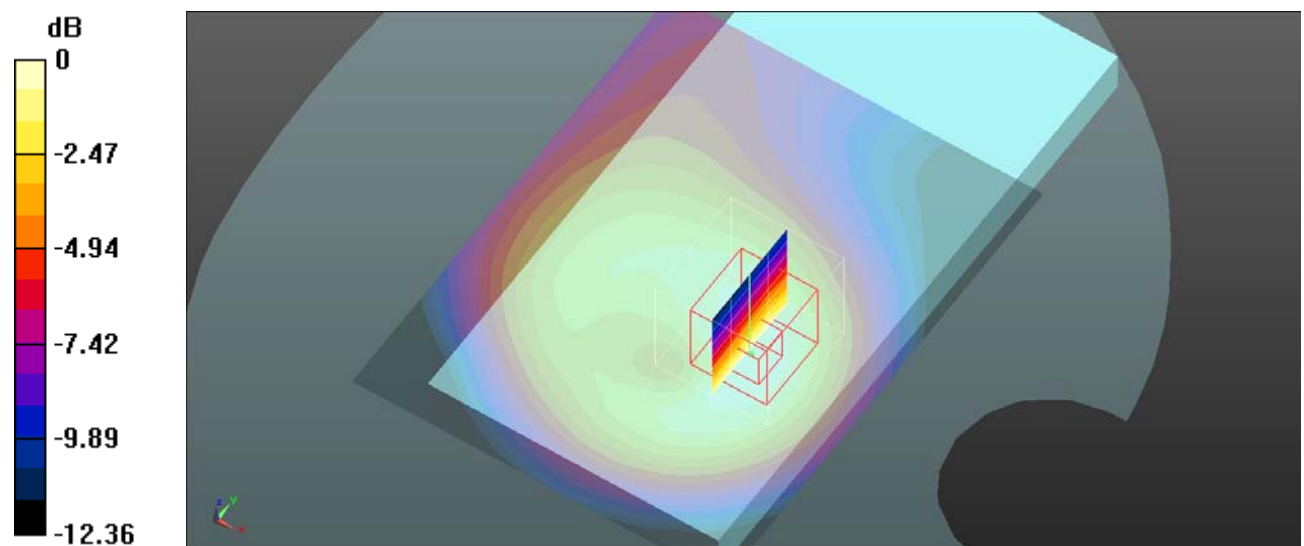

0 dB = 0.162 W/kg = -7.9 dBW/kg

Plot 5#: LTE Band 2_1RB_Body Back_Mid**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 2 1RB Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.736 W/kg


Body Back/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.65 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.363 W/kg

Maximum value of SAR (measured) = 0.721 W/kg

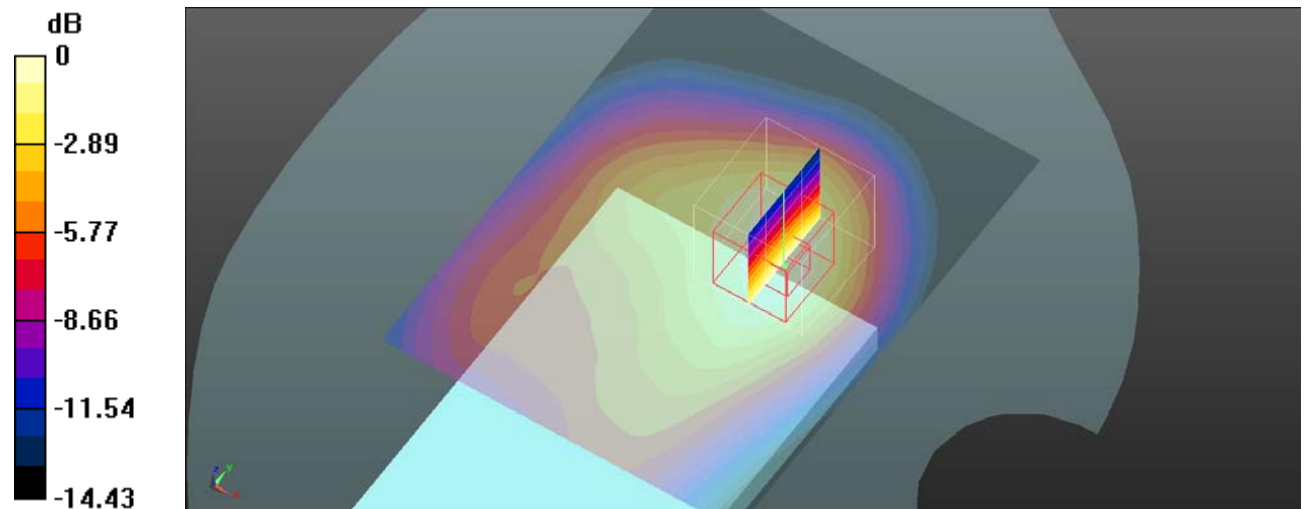

0 dB = 0.721 W/kg = -1.42 dBW/kg

Plot 6#: LTE Band 5_1RB_Body Back_Mid**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.615$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 5 1RB Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.295 W/kg


Body Back/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.24 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.282 W/kg

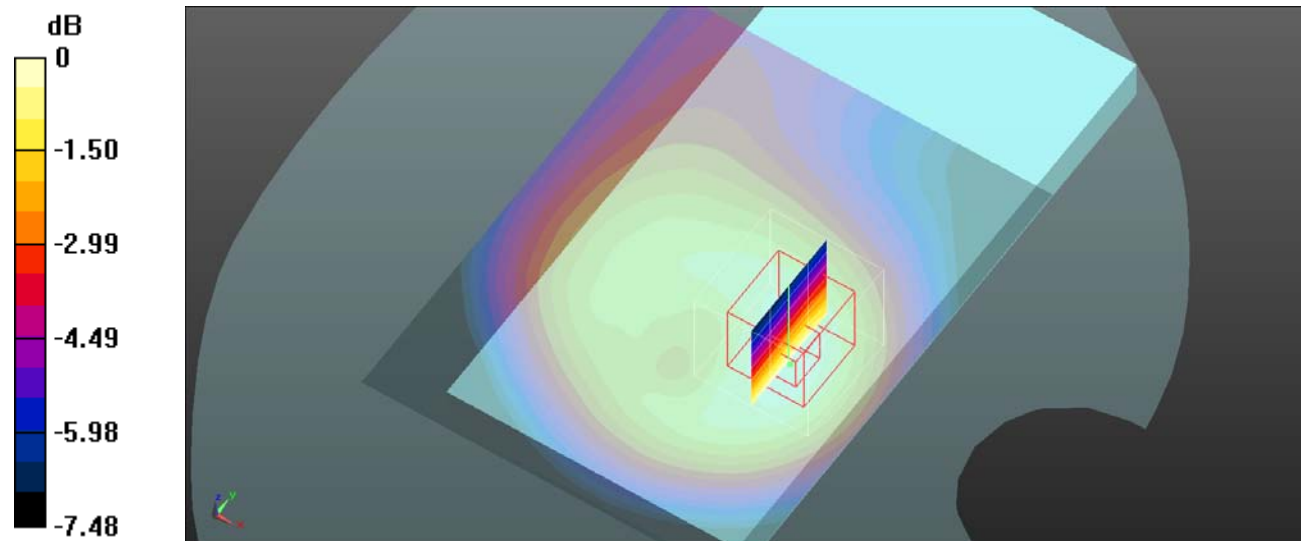

0 dB = 0.282 W/kg = -5.5 dBW/kg

Plot 7#: LTE Band 12_1RB_Body Back_Mid**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 43.007$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.63, 8.63, 8.63); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 12 1RB Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.352 W/kg


Body Back/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.36 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.348 W/kg

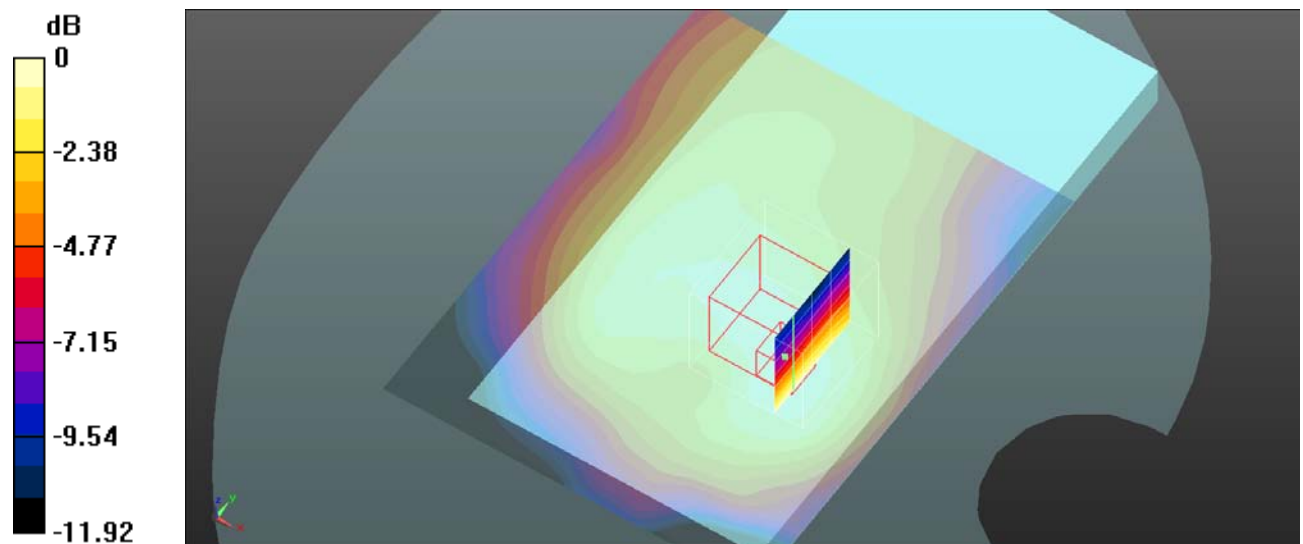

0 dB = 0.348 W/kg = -4.58 dBW/kg

Plot 8#: LTE Band 41_1RB_Head Right Cheek_High**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2645$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 39.29$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/LTE Band 41 1RB High/Area Scan (101x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.992 W/kg


Head Right Cheek/LTE Band 41 1RB High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.49 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.489 W/kg

Maximum value of SAR (measured) = 0.983 W/kg

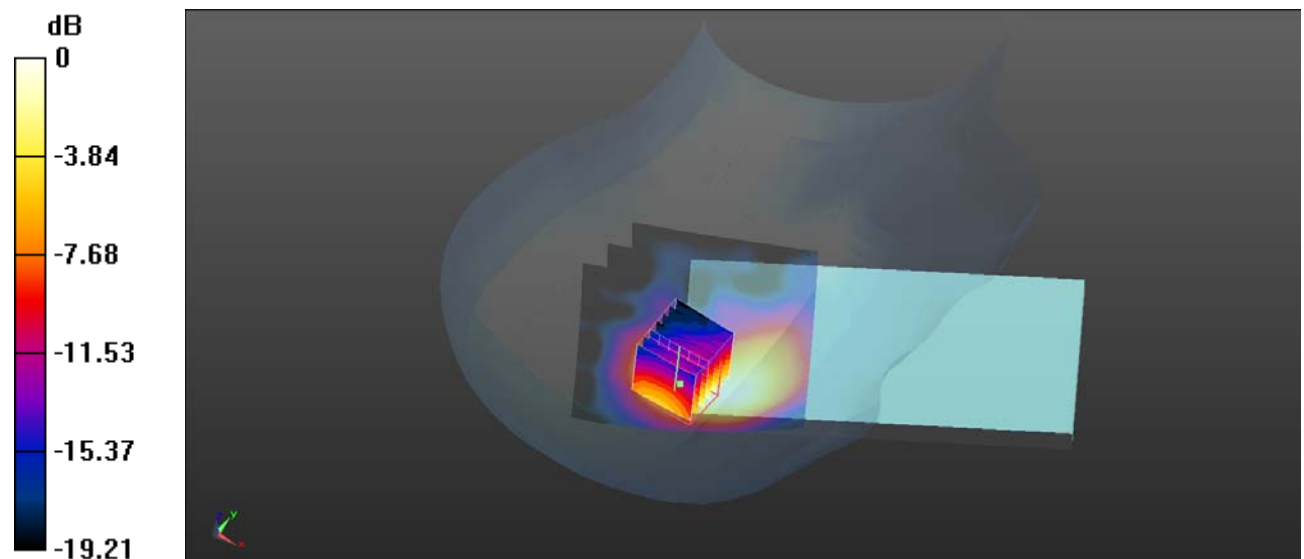

0 dB = 0.983 W/kg = -0.07 dBW/kg

Plot 9#: LTE Band 41_1RB_Body Back_Mid**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.889$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 41 1RB Mid/Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.647 W/kg


Body Back/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.95 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

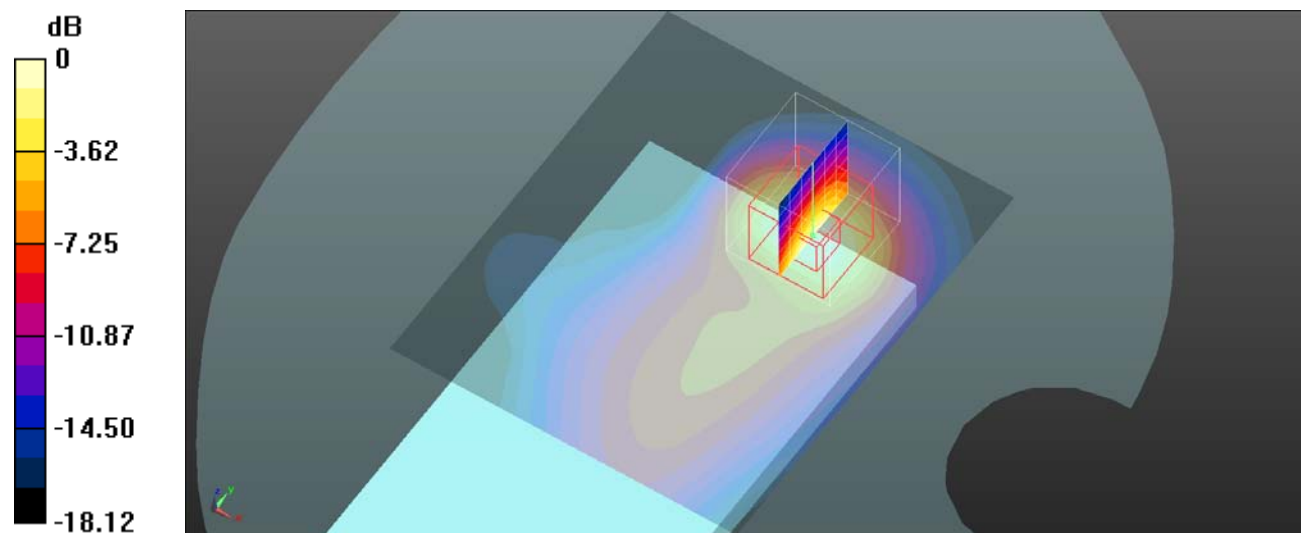

0 dB = 0.633 W/kg = -1.99 dBW/kg

Plot 10#: 2.4G Wi-Fi_Body Back_High**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.837$ S/m; $\epsilon_r = 38.612$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b High/Area Scan (91x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Body Back/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

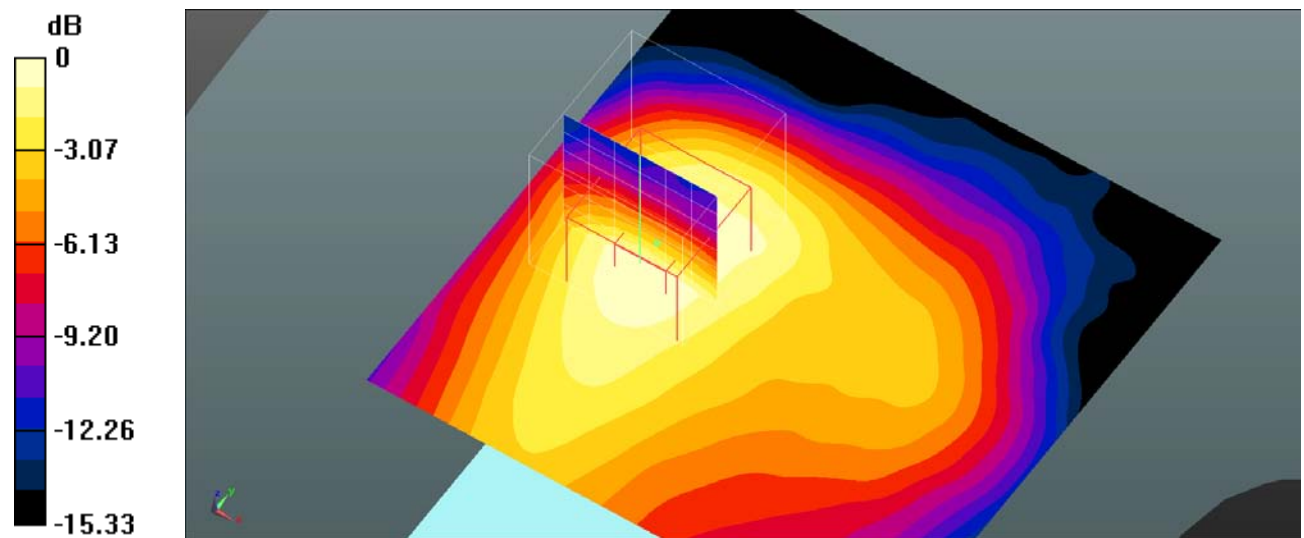

Plot 11#: 5.2G Wi-Fi_Body Back_Low**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5180 \text{ MHz}$; $\sigma = 4.677 \text{ S/m}$; $\epsilon_r = 36.84$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

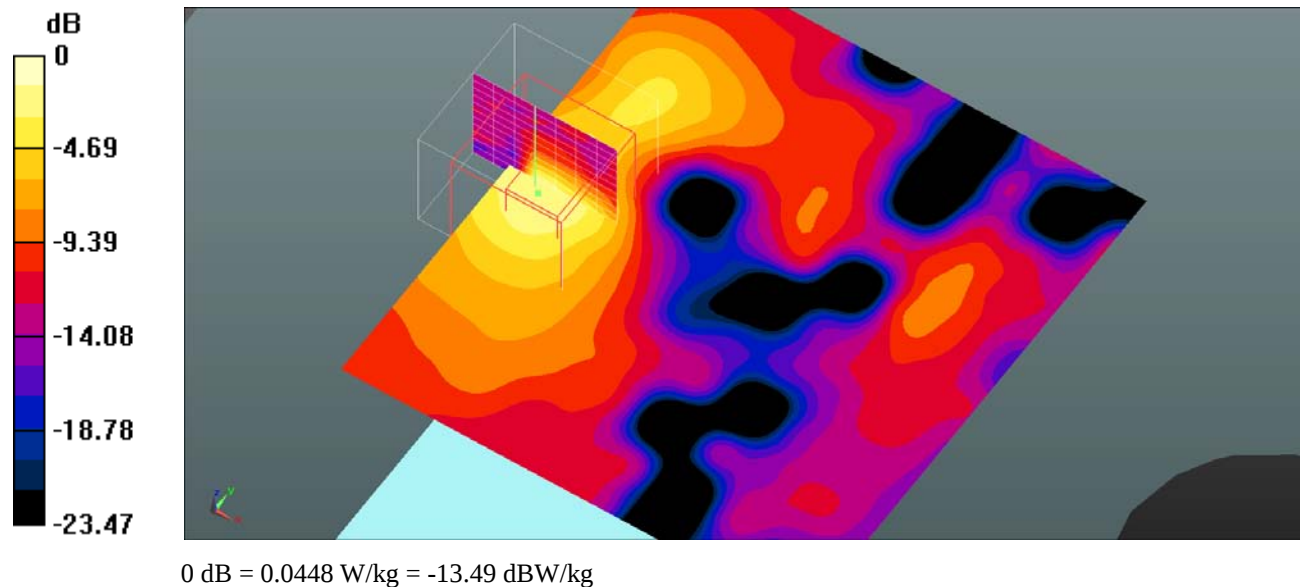Body Back/WLAN 5.2G 802.11a Low/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0496 W/kg **Body Back/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x16)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 3.445 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.123 W/kg **SAR(1 g) = 0.019 W/kg ; SAR(10 g) = 0.011 W/kg** Maximum value of SAR (measured) = 0.0448 W/kg 

Plot 12#: 5.8G Wi-Fi_Body Back_Low**DUT: RP05; Type: BISON X10S; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 4.969$ S/m; $\epsilon_r = 36.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/01/19
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11a Low/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.292 W/kg


Body Back/WLAN 5.8G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.624 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.90 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

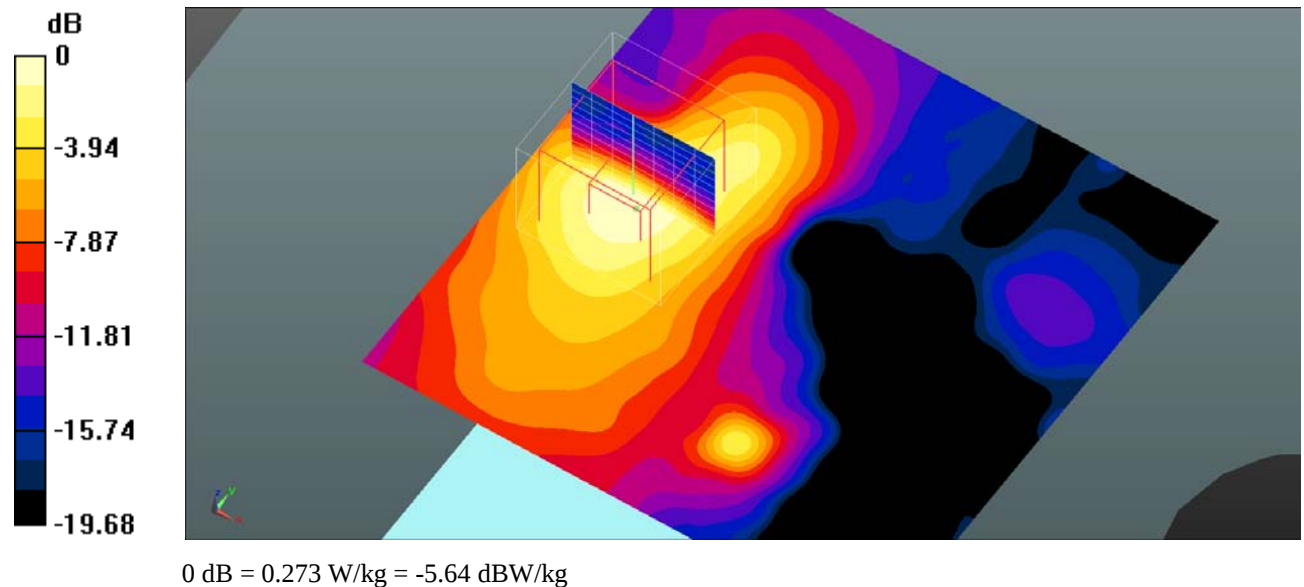

Test Plot 13#:Procedure Name: GSM 850 Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic GPRS-2slots (0); Frequency: 836.6 MHz;Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.978$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/GSM 850 Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.132 W/kg


Body Front/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.96 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

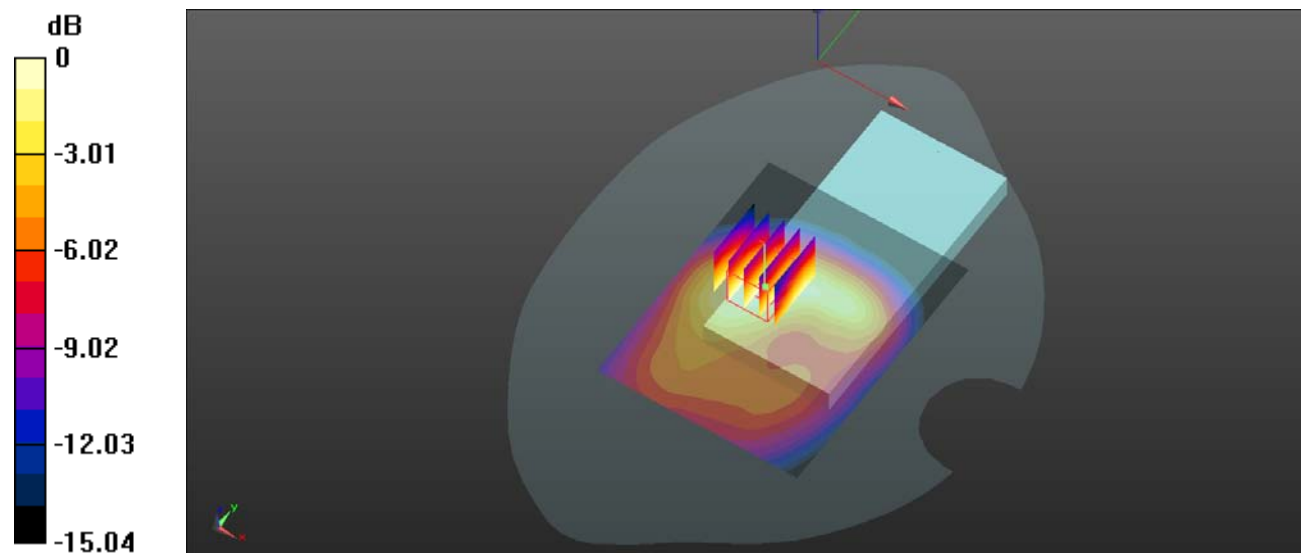

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Plot 14#:Procedure Name: GSM 1900 Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic GPRS-2slots (0); Frequency: 1880 MHz;Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/GSM 1900 Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Body Front/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.77 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

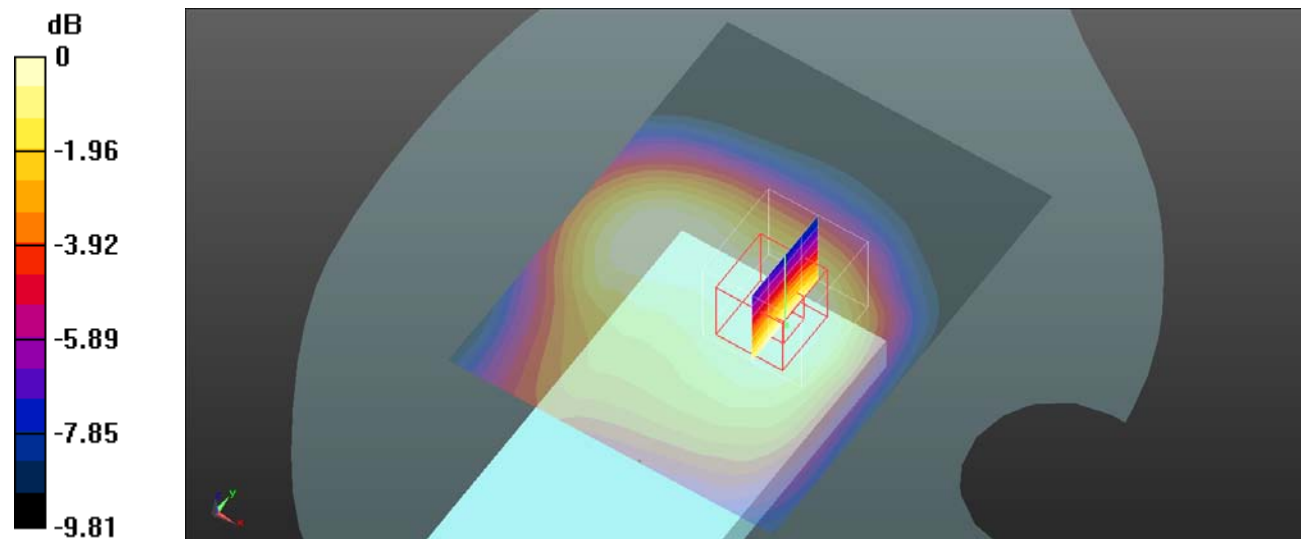

Test Plot 15#:Procedure Name: WCDMA Band 2 Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/WCDMA Band 2 Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.276 W/kg


Body Front/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.74 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

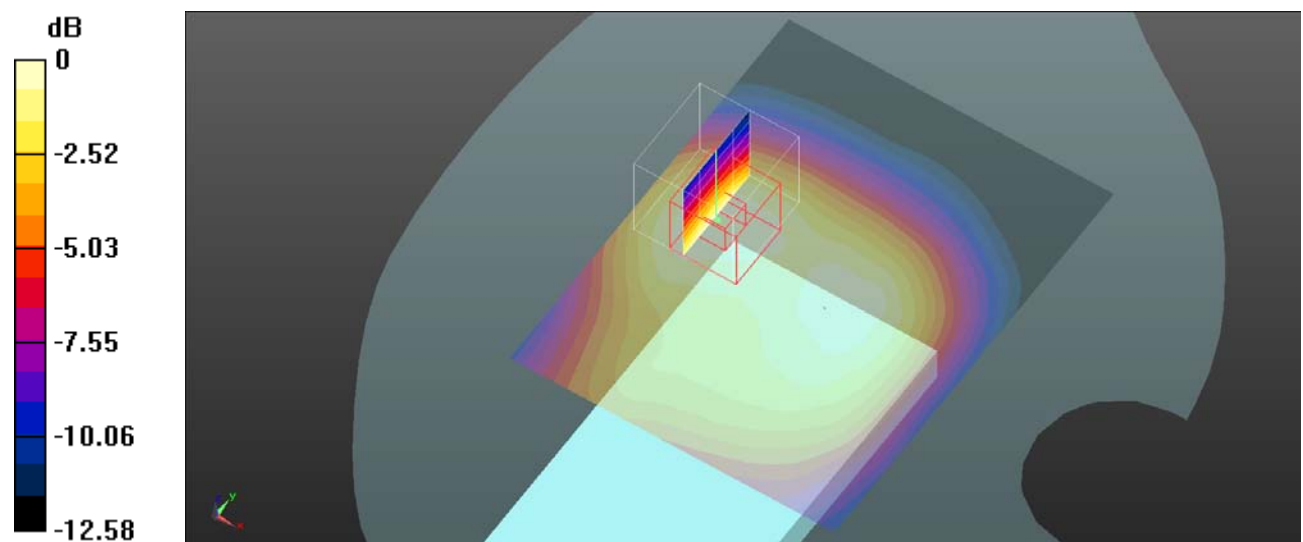

0 dB = 0.267 W/kg = -5.73 dBW/kg

Test Plot 16#:Procedure Name: WCDMA Band 5 Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 41.978$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/WCDMA Band 5 Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.139 W/kg


Body Front/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.09 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.140 W/kg

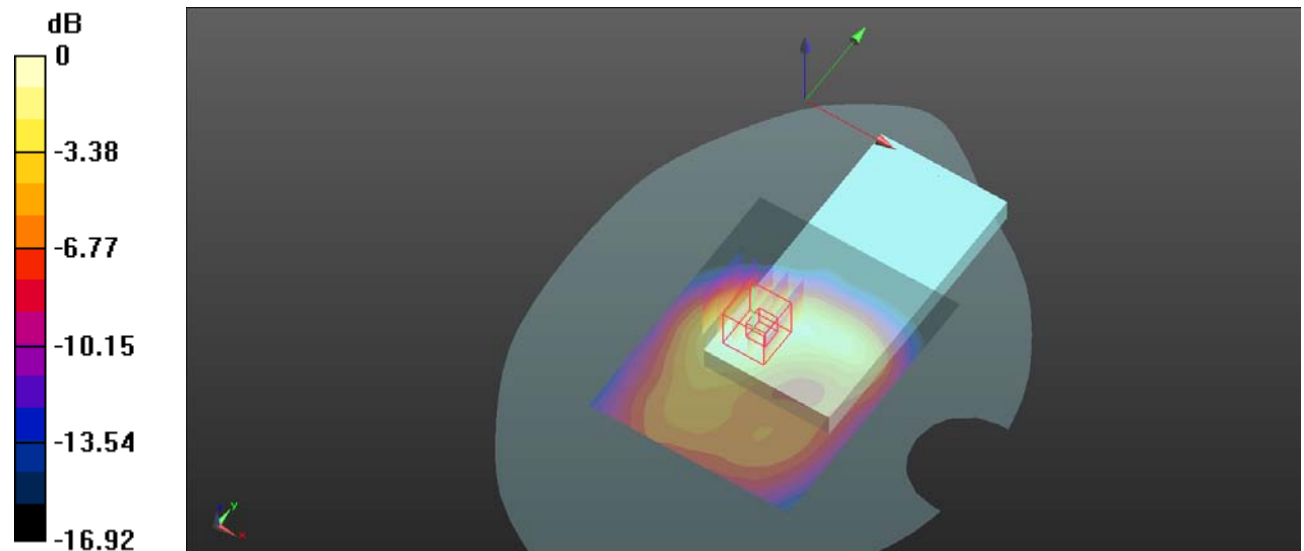

0 dB = 0.140 W/kg = -8.54 dBW/kg

Test Plot 17#:Procedure Name: LTE Band 2 1RB Mid**DUT: X10S; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/LTE Band 2 1RB Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.255 W/kg


Body Front/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

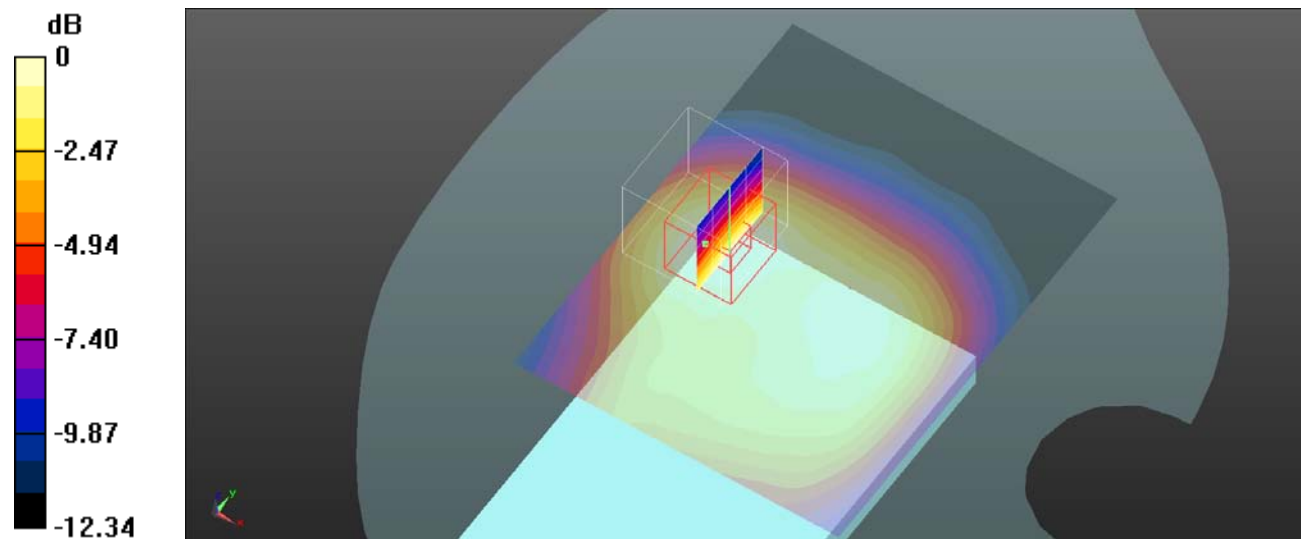

0 dB = 0.249 W/kg = -6.04 dBW/kg

Test Plot 18#:Procedure Name: LTE Band 2 50%RB Mid**DUT: X10S; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/LTE Band 2 50%RB Mid/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.151 W/kg


Body Front/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.110 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

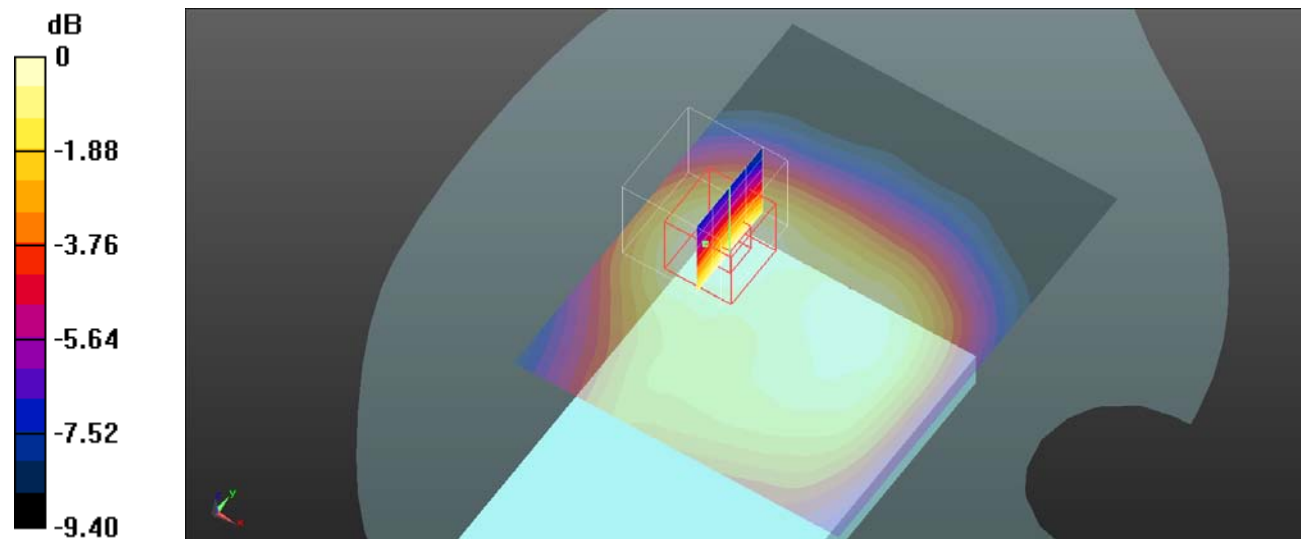

0 dB = 0.180 W/kg = -7.45 dBW/kg

Test Plot 19#:Procedure Name: LTE Band 5 1RB Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.615$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/LTE Band 5 1RB Mid/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


Body Front/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.689 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

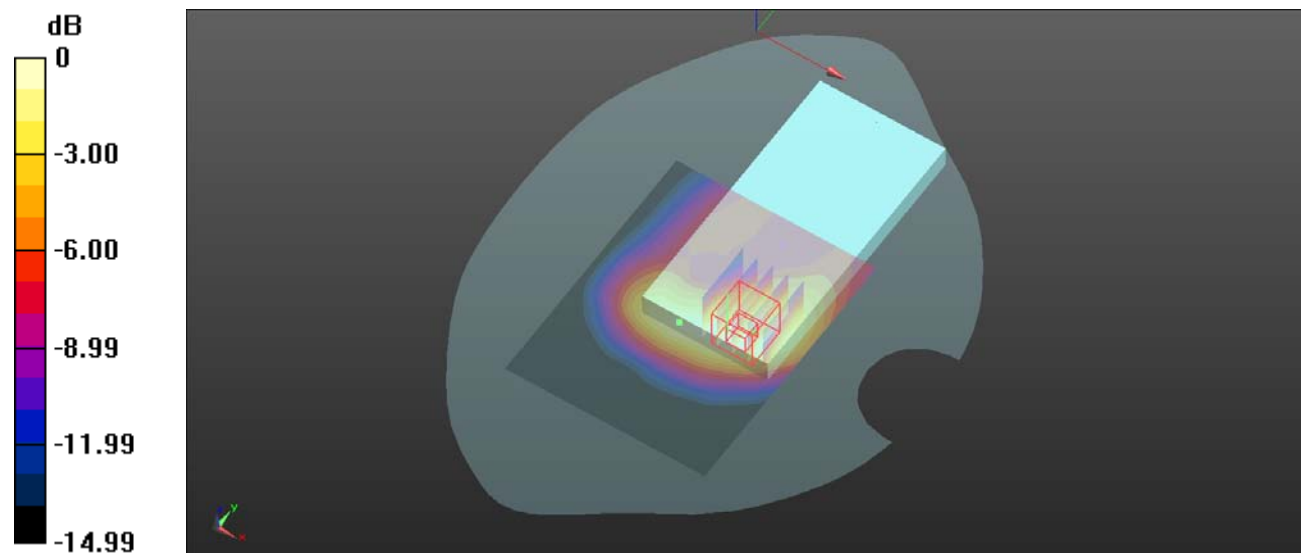

0 dB = 0.138 W/kg = -8.60 dBW/kg

Test Plot 20#:Procedure Name: LTE Band 5 50%RB Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.615$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/LTE Band 5 50%RB Mid/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.110 W/kg


Body Front/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.296 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

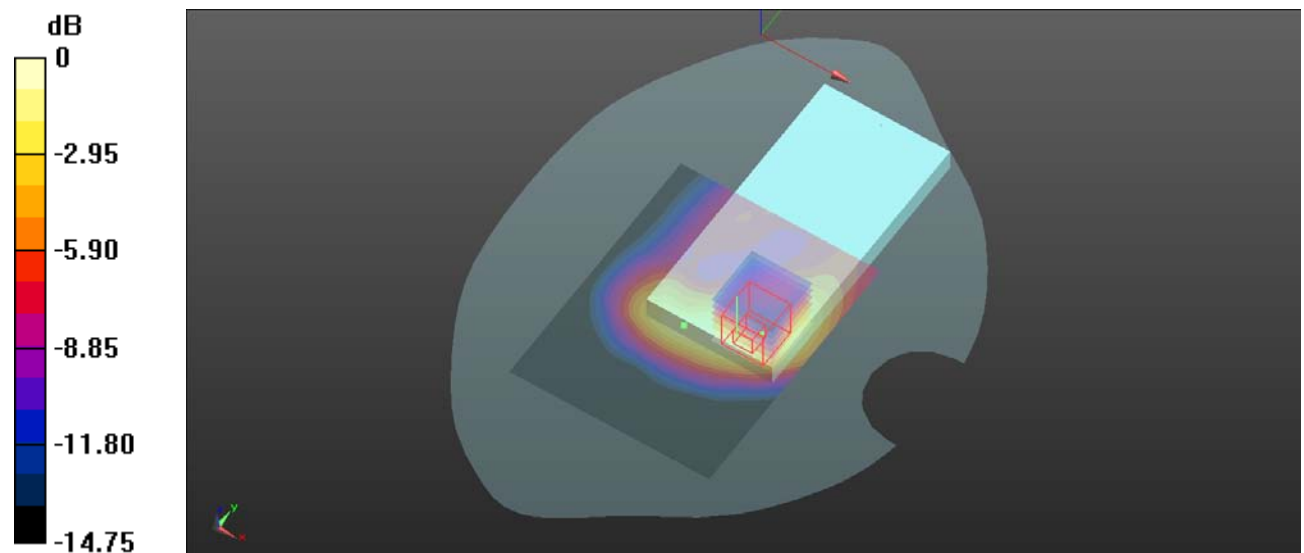

0 dB = 0.111 W/kg = -9.55 dBW/kg

Test Plot 21#:Procedure Name: LTE Band 12 1RB Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 43.007$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.63, 8.63, 8.63) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/LTE Band 12 1RB Mid/Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0985 W/kg


Body Front/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.846 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.0973 W/kg

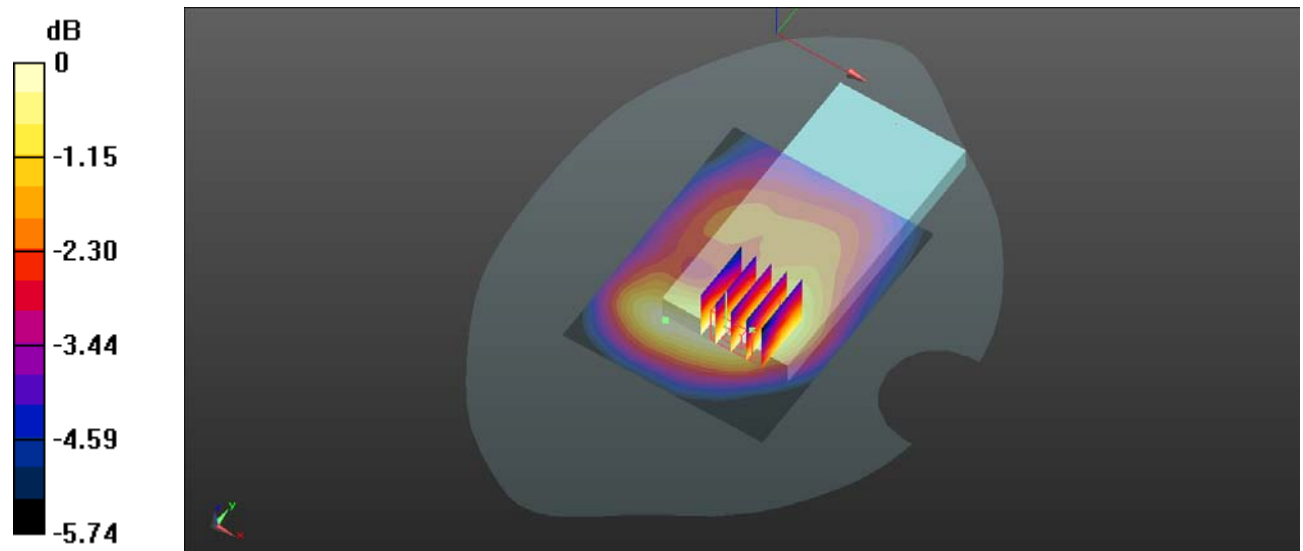

0 dB = 0.0973 W/kg = -10.12 dBW/kg

Test Plot 22#:Procedure Name: LTE Band 12 50%RB Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 43.007$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.63, 8.63, 8.63) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/LTE Band 12 50%RB Mid/Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0886 W/kg


Body Front/LTE Band 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.561 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.00554 W/kg

SAR(1 g) = 0.00483 W/kg; SAR(10 g) = 0.00431 W/kg

Maximum value of SAR (measured) = 0.00554 W/kg

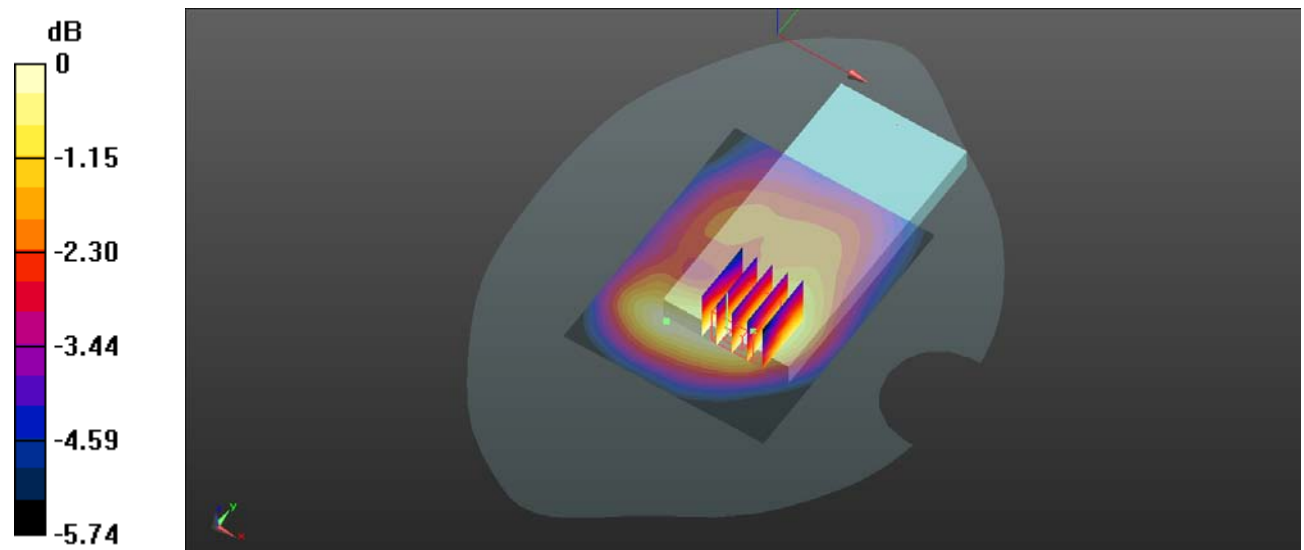

0 dB = 0.00554 W/kg = -22.56 dBW/kg

Test Plot 23#:Procedure Name: LTE Band 41 1RB Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.889$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/LTE Band 41 1RB Mid/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.215 W/kg


Body Front/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.214 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

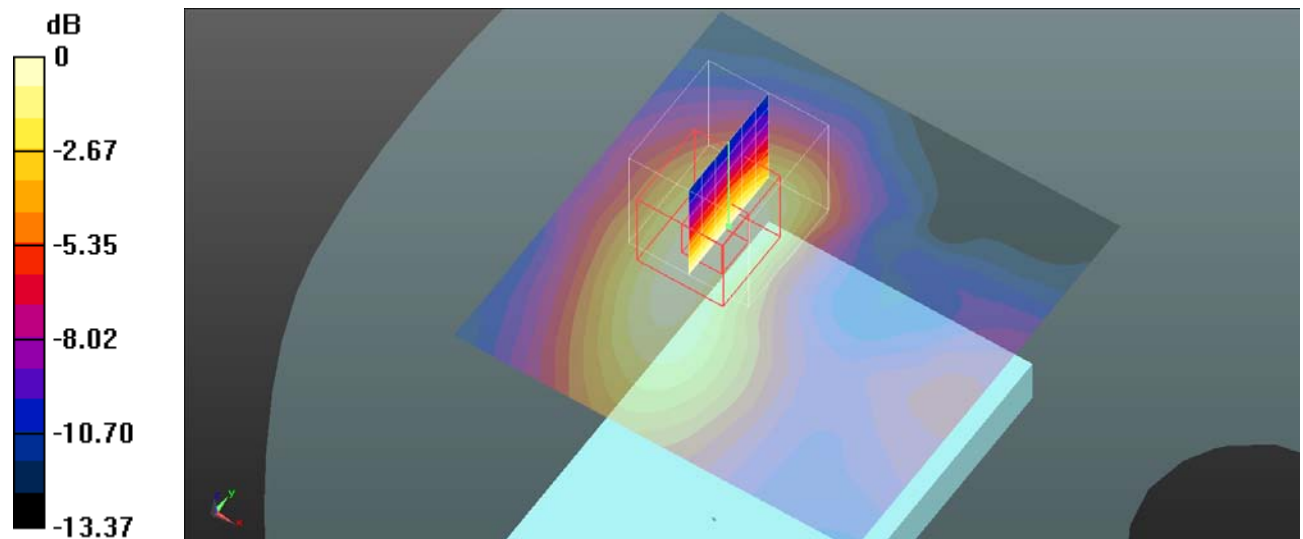

0 dB = 0.214 W/kg = -6.70 dBW/kg

Test Plot 24#:Procedure Name: LTE Band 41 50%RB Mid**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.889$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/LTE Band 41 50%RB Mid/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.175 W/kg


Body Front/LTE Band 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.000 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

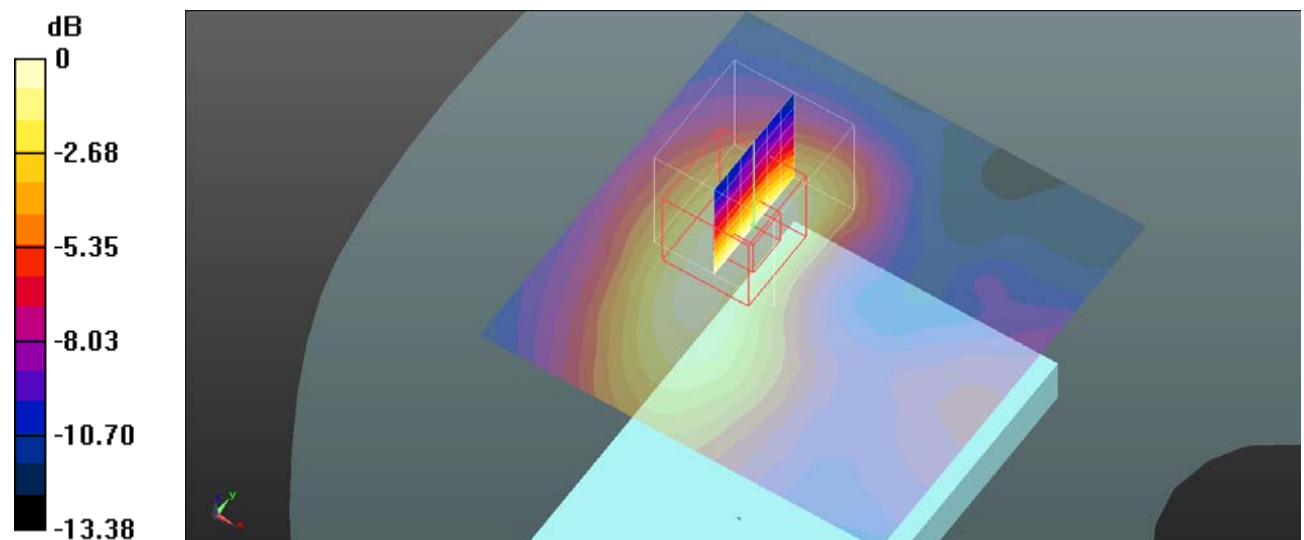

Test Plot 25#:Procedure Name: WLAN 802.11b**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.837$ S/m; $\epsilon_r = 38.612$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/WLAN 802.11b High/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0753 W/kg


Body Front/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.606 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0742 W/kg

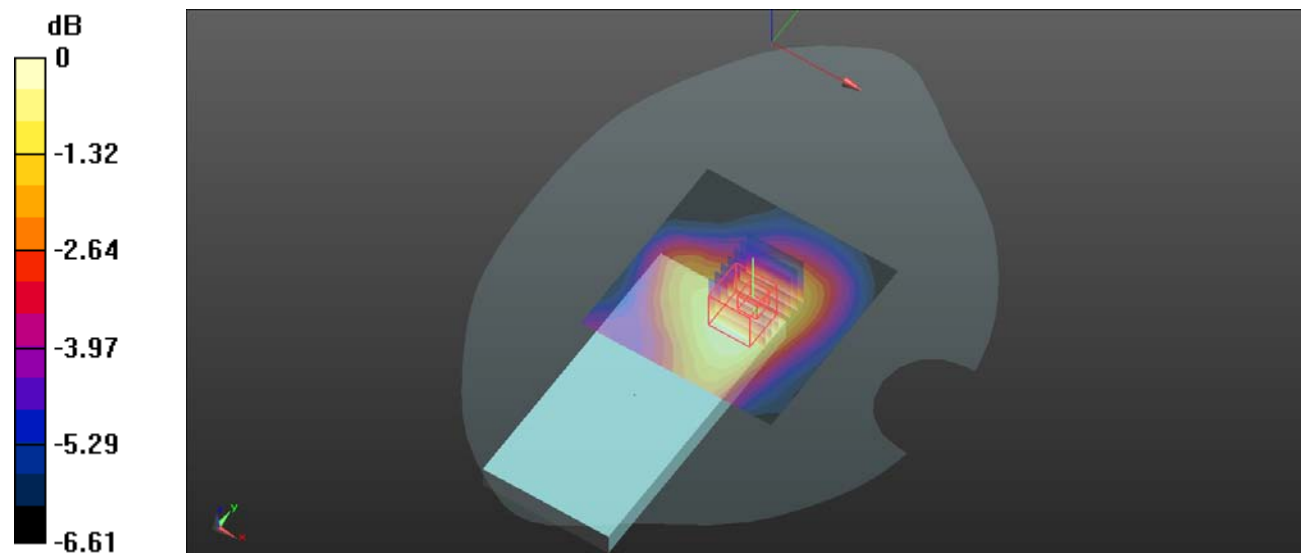

0 dB = 0.0742 W/kg = -11.30 dBW/kg

Test Plot 26#:Procedure Name: WLAN 5.2G 802.11a**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.677 \text{ S/m}$; $\epsilon_r = 36.84$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37) ; Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

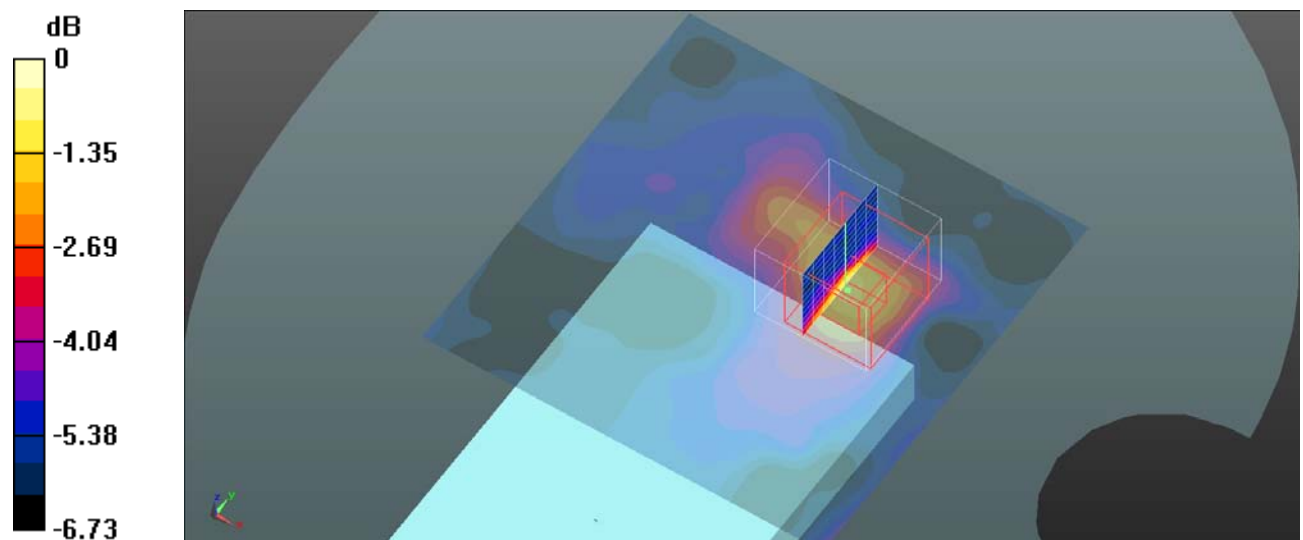Body Front/WLAN 5.2G 802.11a Low/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.112 W/kg **Body Front/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 3.262 V/m ; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.262 W/kg **SAR(1 g) = 0.099 W/kg ; SAR(10 g) = 0.061 W/kg** Maximum value of SAR (measured) = 0.146 W/kg 0 dB = 0.146 W/kg = -8.36 dBW/kg

Test Plot 27#:Procedure Name: WLAN 5.8G 802.11a**DUT: Mobile Phone; Type: smart; Serial: SZNS220126-03831E-SAA1-S1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 4.969$ S/m; $\epsilon_r = 36.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93) ; Calibrated: 2021/08/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4);

Body Front/WLAN 5.8G 802.11a Low/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.153 W/kg


Body Front/WLAN 5.8G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.737 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

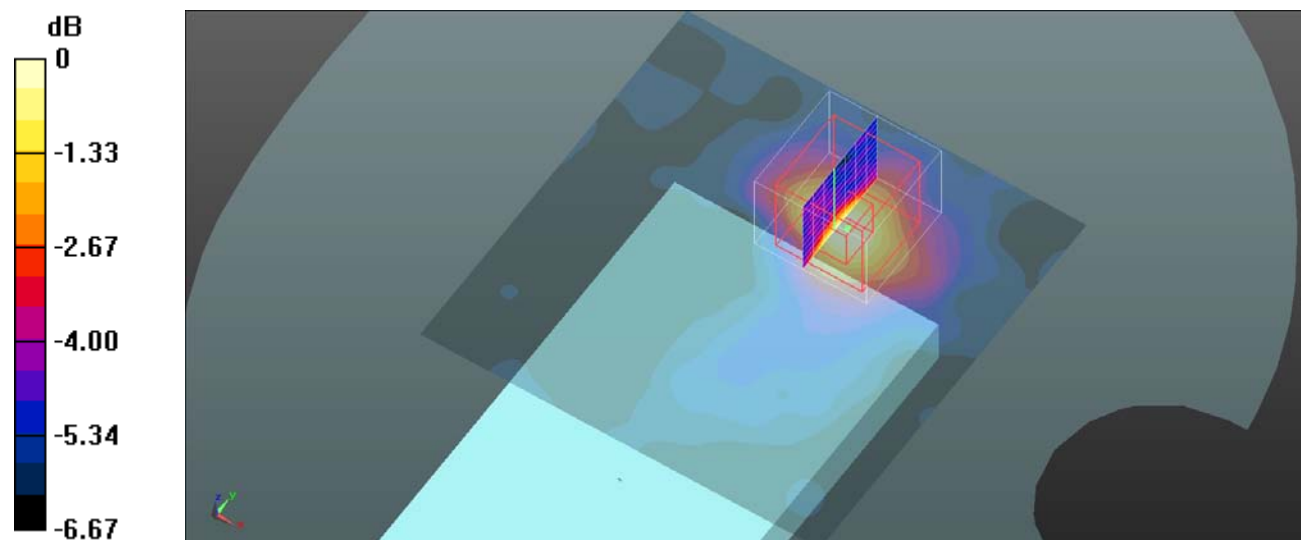

0 dB = 0.150 W/kg = -8.24 dBW/kg

APPENDIX A MEASUREMENT UNCERTAINTY

KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report

APPENDIX B EUT TEST POSITION PHOTOS

Please Refer to the Attachment.

APPENDIX C PROBE CALIBRATION CERTIFICATES

Please Refer to the Attachment.

APPENDIX D DIPOLE CALIBRATION CERTIFICATES

Please Refer to the Attachment.

******* END OF REPORT *******