



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Alpha Networks Inc.
Applicant Address	No.8 Li-shing 7th Rd., Science-based Industrial Park Hsinchu, 300 Taiwan
FCC ID	RRK-AP200

Product Name	Wireless AC1200 Concurrent Dual Band PoE Access Point
Brand Name	1. Canary networks 2. Netmag Technology
Model No.	AP200
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Mar. 03, 2014
Final Test Date	Sep. 18, 2014
Submission Type	Original Equipment
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	8
3.5. Table for Test Modes	9
3.6. Table for Testing Locations.....	11
3.7. Table for Multiple List.....	11
3.8. Table for Supporting Units	11
3.9. Table for Parameters of Test Software Setting	12
3.10. EUT Operation during Test	12
3.11. Duty Cycle	12
3.12. Test Configurations	13
4. TEST RESULT	16
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	20
4.3. 6dB Spectrum Bandwidth and 99% Occupied Bandwidth Measurement.....	28
4.4. Maximum Conducted Output Power Measurement.....	33
4.5. Power Spectral Density Measurement	37
4.6. Radiated Emissions Measurement	51
4.7. Band Edge Emissions Measurement	76
4.8. Frequency Stability Measurement	85
4.9. Antenna Requirements	87
5. LIST OF MEASURING EQUIPMENTS	88
6. MEASUREMENT UNCERTAINTY.....	90
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR432156-02AB	Rev. 01	Initial issue of report	Dec. 04, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless AC1200 Concurrent Dual Band PoE Access Point
Brand Name : 1. Canary networks
2. Netmag Technology
Model No. : AP200
Applicant : Alpha Networks Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 03, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.76 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	2.42 dB
4.5	15.407(a)	Power Spectral Density	Complies	2.26 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.02 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.01 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: 802.11ac MCS0/Nss1 (VHT20): 18.33 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.16 MHz ; 802.11ac MCS0/Nss1 (VHT80): 75.38 MHz Band 4: 802.11ac MCS0/Nss1 (VHT20): 17.69 MHz ; 802.11ac MCS0/Nss1 (VHT40): 35.76 MHz ; 802.11ac MCS0/Nss1 (VHT80): 75.38 MHz
Maximum Conducted Output Power	Band 1: 802.11ac MCS0/Nss1 (VHT20): 27.58 dBm ; 802.11ac MCS0/Nss1 (VHT40): 26.57 dBm ; 802.11ac MCS0/Nss1 (VHT80): 20.19 dBm Band 4: 802.11ac MCS0/Nss1 (VHT20): 27.50 dBm ; 802.11ac MCS0/Nss1 (VHT40): 24.63 dBm ; 802.11ac MCS0/Nss1 (VHT80): 22.00 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9
Channel Band Width (99%)	Band 1: 17.69 MHz ; Band 4: 16.53 MHz
Maximum Conducted Output Power	Band 1: 27.54 dBm ; Band 4: 27.57 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	☒ IP Based (Load Based) ☐ Frame Based
Beamforming Function	☐ With beamforming ☒ Without beamforming
Band 1 Information	☒ Point-to-multipoint ☐ Fixed point-to-point
	☒ Indoor
	☐ Outdoor

Antenna and Band width

Antenna	Two (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter	AMIGO	AMS9-1201000FU2	Input:100-240V~50/60Hz, 0.5A Output:12 V, 1.0 A
Other			
Wall-mounted rack*1			

3.3. Table for Filed Antenna

Ant.	Brand	P/N	Type	Connector	Gain (dBi)		Cable loss (dBi)		True Gain (dBi)	
					2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz
1	HONGLIN	290-20113	PIFA Antenna	I-PEX	2.67	-	0.47	-	2.2	-
2	HONGLIN	290-20113	PIFA Antenna	Murata	3.88	-	-	-	3.88	-
3	HONGLIN	290-20114	PIFA Antenna	Murata	-	Note 1	-	-	-	Note 1
4	HONGLIN	290-20114	PIFA Antenna	I-PEX	-	Note 1	-	Note 1	-	Note 1

Note 1:

Ant. 3

Frequency (MHz)	Gain (dBi)
5180	3.66
5190	3.66
5200	3.66
5210	3.66
5230	3.66
5240	3.66
5745	4.03
5755	4.03
5775	4.03
5785	4.03
5795	4.02
5825	4.02

Ant. 4

Frequency (MHz)	Gain (dBi)	Cable loss (dBi)	True Gain (dBi)
5180	3.51	0.46	3.05
5190	3.51	0.46	3.05
5200	3.51	0.46	3.05
5210	3.51	0.46	3.05
5230	3.51	0.46	3.05
5240	3.51	0.46	3.05
5745	5.1	0.46	4.64
5755	5.1	0.46	4.64
5775	5.1	0.46	4.64
5785	5.1	0.46	4.64
5795	4.9	0.46	4.44
5825	4.9	0.46	4.44

Note 2:

<2.4GHz>


For IEEE 802.11b/g/n mode (2TX/2RX)

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

<5GHz>

For IEEE 802.11a/n/ac mode (2TX, 2RX)

Ant. 3 and Ant. 4 could transmit/receive simultaneously.

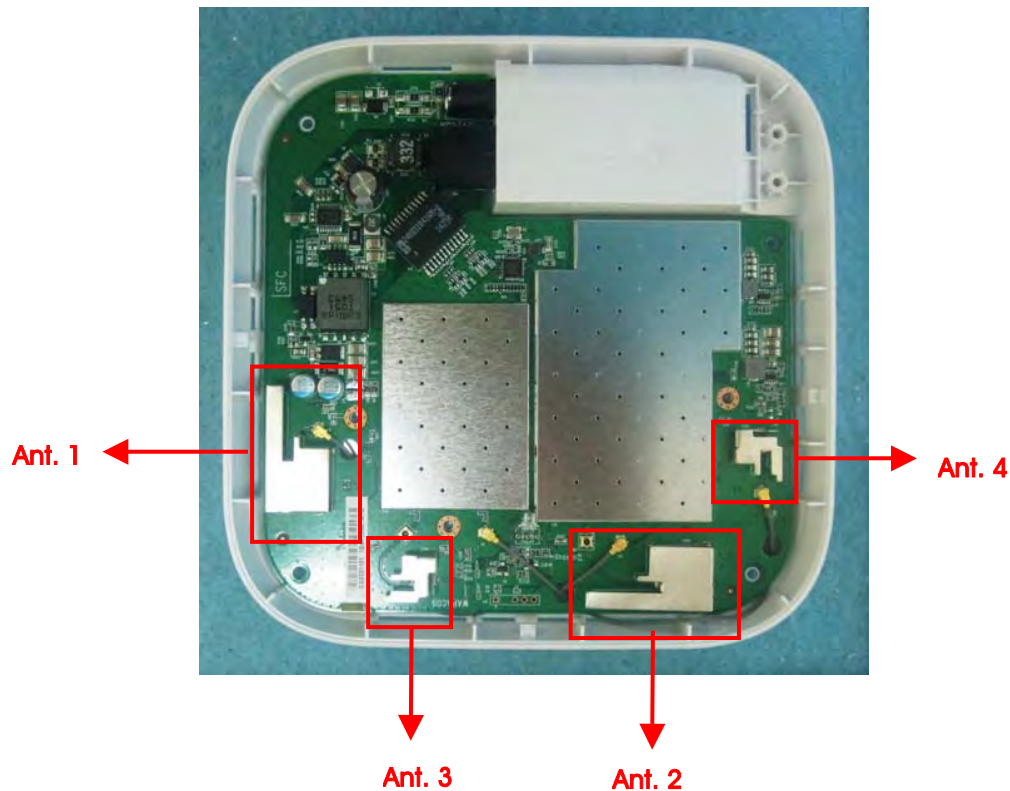

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	3+4
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	3+4
Power Spectral Density	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	3+4
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	3+4
26dB&6dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	3+4
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	3+4
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	3+4
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	3+4

Band Edge Emission	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	3+4
	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	3+4
Frequency Stability	Un-modulation		-	40	3+4

Note1: It was supplied power by Adapter or PoE for EUT, and the below Adapter or PoE is for measurement only, it would not be marketed. information in the following table:

Power	Manufacturers	Model	Rating
Adapter	FRECOM	F12W3-120100SPA	Input:100-240V~50/60Hz, 0.3A Output:12V, 1A
PoE	LB	SA06-20S48-V	N/A

Note2: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note3: The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT + Adapter (Model: AMS9-1201000FU2)

Mode 2. EUT + Adapter (Model: F12W3-120100SPA)

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test below 1GHz:

Mode 1. EUT laying + Adapter (Model: AMS9-1201000FU2)

Mode 2. EUT standing + Adapter (Model: AMS9-1201000FU2)

Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.

Mode 3. EUT laying + Adapter (Model: F12W3-120100SPA)

Mode 4. EUT laying + PoE

Mode 4 is the worst case, so it was selected to record in this test report.

For Radiated Emission test above 1GHz:

There are two modes of EUT, one is Stand of EUT, and the other is Laying of EUT.

After evaluating, Stand of EUT has been evaluated to be the worst case.

Consequently, measurement for Radiated Emission above 1GHz test will follow this same test mode.

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple List

The brand names in the following table are all refer to the identical product.

Brand Name	Description
Canary Networks	All the brands are identical, the difference brand for served as marketing strategy.
Netmag Technology	

3.8. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E6430	DoC
Adapter	FRECOM	F12W3-120100SPAU	N/A

For Test Site No: 03CH01-CB (below 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
NB	DELL	E6430	DoC
NB	DELL	D420	DoC
PoE	LB	SA06-20S48-V	N/A

For Test Site No: 03CH01-CB (above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
Adapter	FRECOM	F12W3-120100SPAU	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
PoE	LB	SA06-20S48-V	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS					
Frequency	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 VHT20	20.5	24	24	18	24	20

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS			
Frequency	5190 MHz	5230 MHz	5755 MHz	5795 MHz
MCS0/Nss1 VHT40	18.5	24	18	22

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS	
Frequency	5210 MHz	5775 MHz
MCS0/Nss1 VHT80	18	20

Power Parameters of IEEE 802.11a

Test Software Version	DOS					
Frequency	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	20.5	24	24	18.5	24	21

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.900	1.950	97.44%	0.11	0.53
802.11ac MCS0/Nss1 VHT40	0.920	0.960	95.83%	0.18	1.09
802.11ac MCS0/Nss1 VHT80	0.440	0.490	89.80%	0.47	2.27
802.11a	2.030	2.080	97.60%	0.11	0.49

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

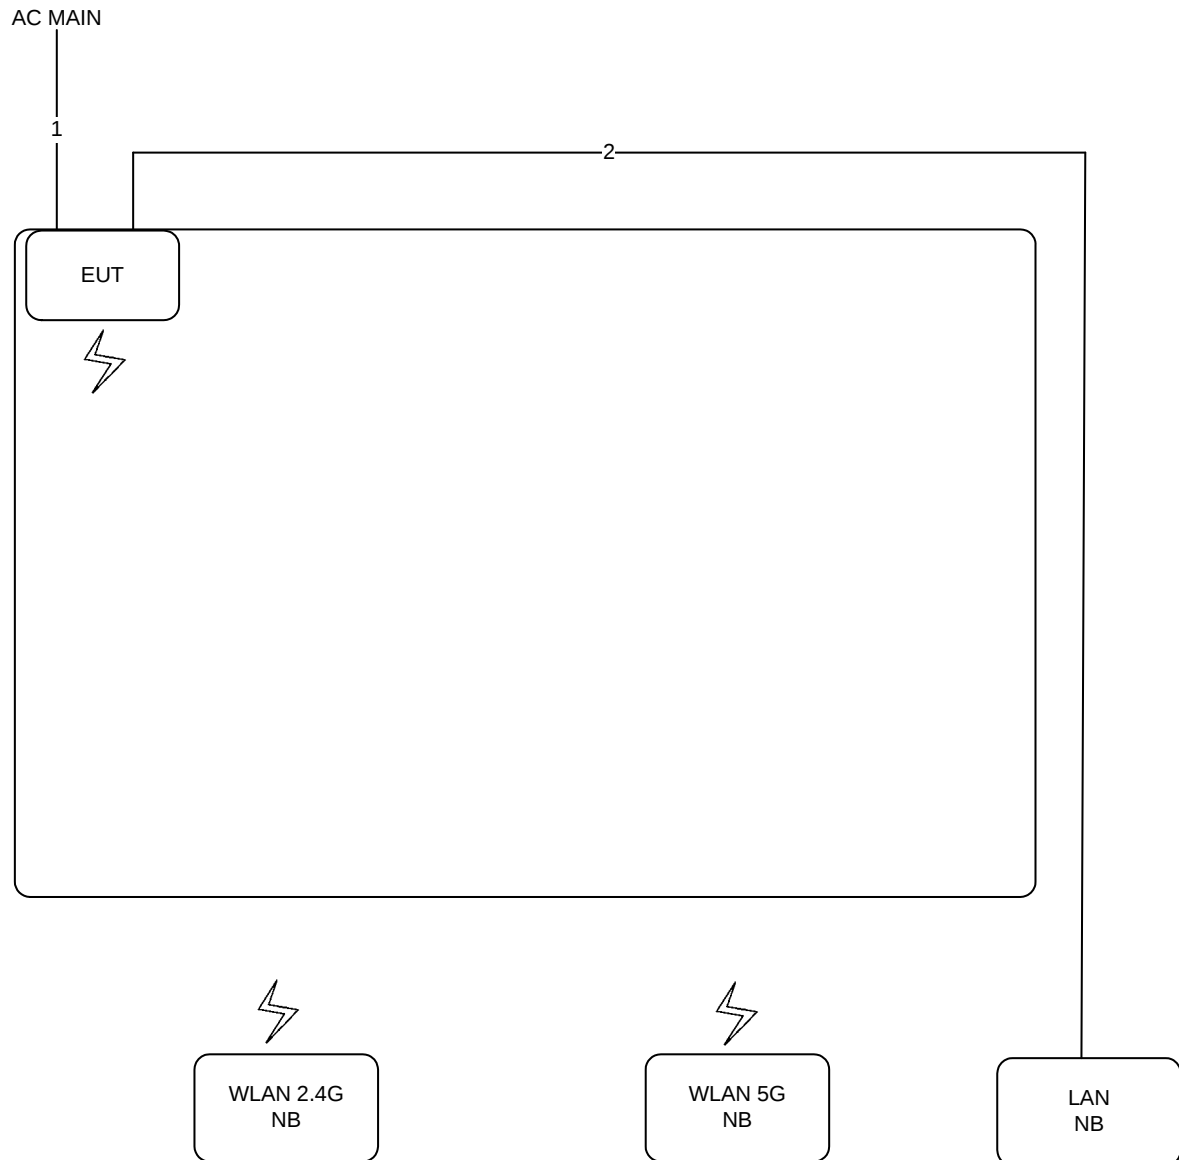

Item	Connection	Shielded	Length
1	AC Power Cable	No	1.8m
2	RJ-45 Cable	No	10m


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

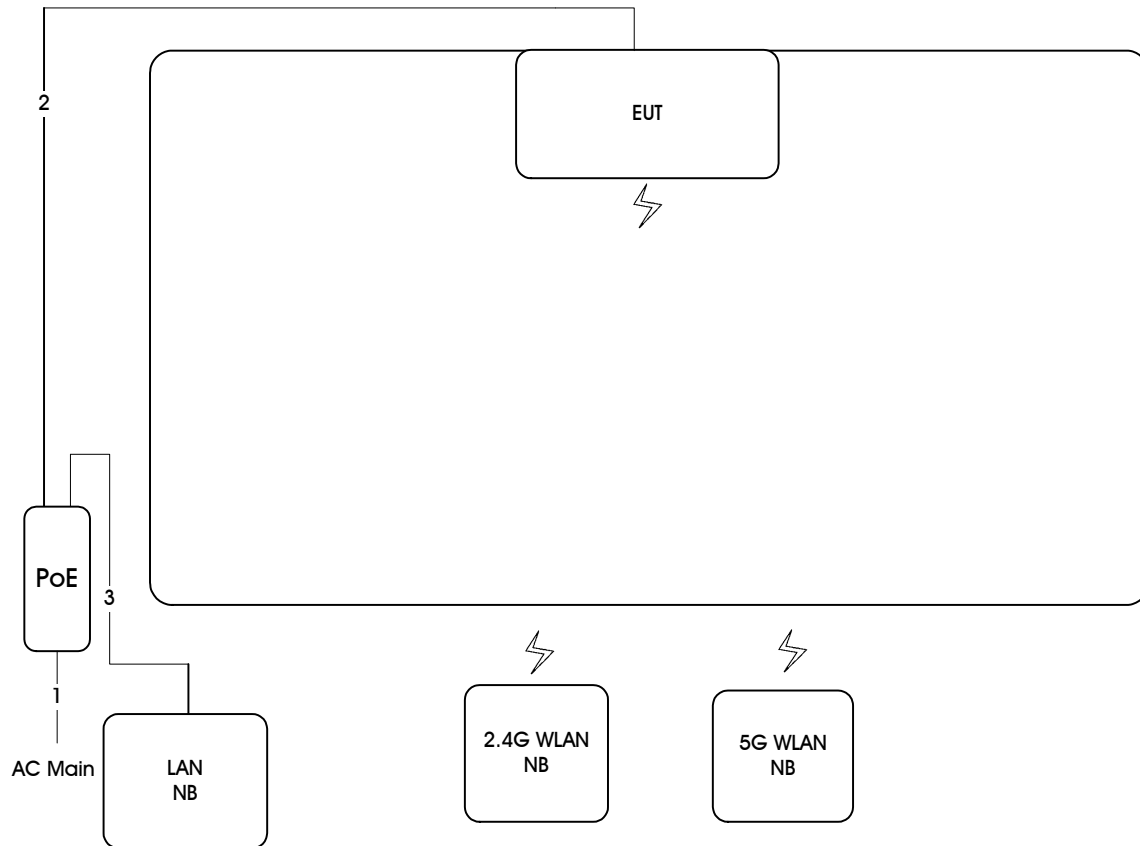

Item	Connection	Shielded	Length
1	Power Cable	No	1.8m
2	RJ-45 Cable	No	10m
3	RJ-45 Cable	No	1.5m

Test Configuration: above 1GHz

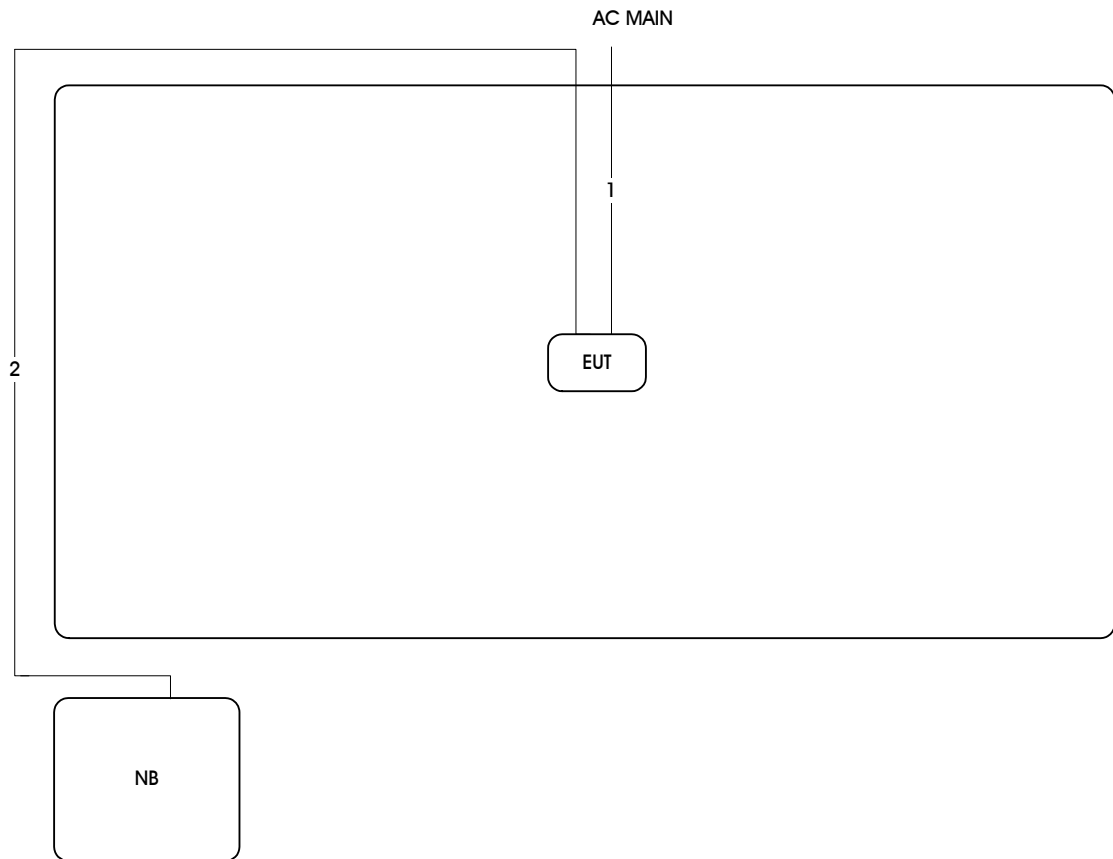

Item	Connection	Shielded	Length
1	Power Cable	No	1.2m
2	RJ-45 Cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

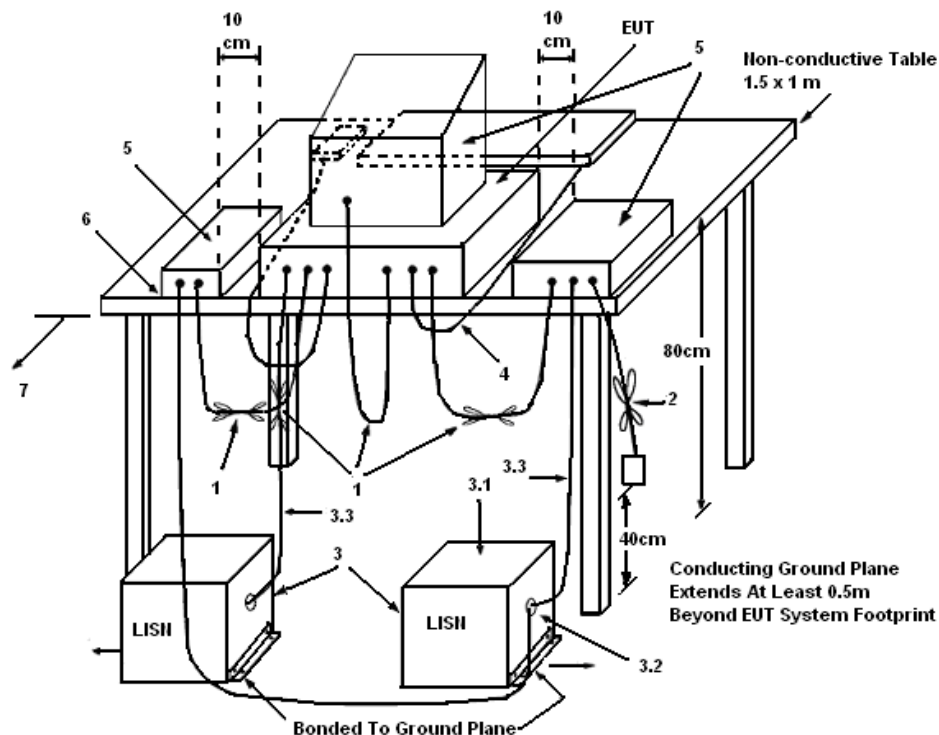

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

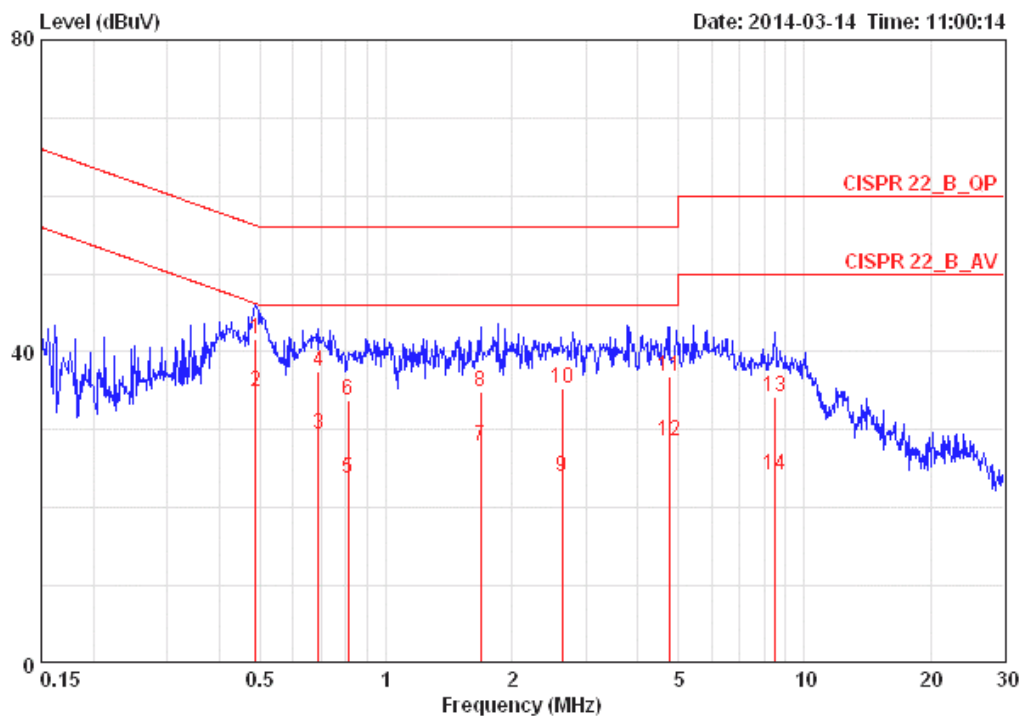

	Freq	Level	Over	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.48890	41.67	-14.51	56.19	0.15	41.32	0.20	LINE	QP
2	0.48890	34.96	-11.22	46.19	0.15	34.61	0.20	LINE	AVERAGE
3	0.68990	29.50	-16.51	46.00	0.16	29.14	0.20	LINE	AVERAGE
4	0.68990	37.60	-18.41	56.00	0.16	37.24	0.20	LINE	QP
5	0.81306	23.77	-22.23	46.00	0.16	23.41	0.20	LINE	AVERAGE
6	0.81306	33.85	-22.15	56.00	0.16	33.49	0.20	LINE	QP
7	1.680	27.83	-18.17	46.00	0.18	27.43	0.22	LINE	AVERAGE
8	1.680	34.82	-21.18	56.00	0.18	34.42	0.22	LINE	QP
9	2.636	23.96	-22.04	46.00	0.22	23.50	0.24	LINE	AVERAGE
10	2.636	35.21	-20.79	56.00	0.22	34.75	0.24	LINE	QP
11	4.746	36.95	-19.05	56.00	0.29	36.34	0.32	LINE	QP
12	4.746	28.53	-17.47	46.00	0.29	27.92	0.32	LINE	AVERAGE
13	8.501	34.15	-25.85	60.00	0.35	33.50	0.30	LINE	QP
14	8.501	24.16	-25.84	50.00	0.35	23.51	0.30	LINE	AVERAGE

Temperature	23°C	Humidity	54%
Test Engineer	Sin Chang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

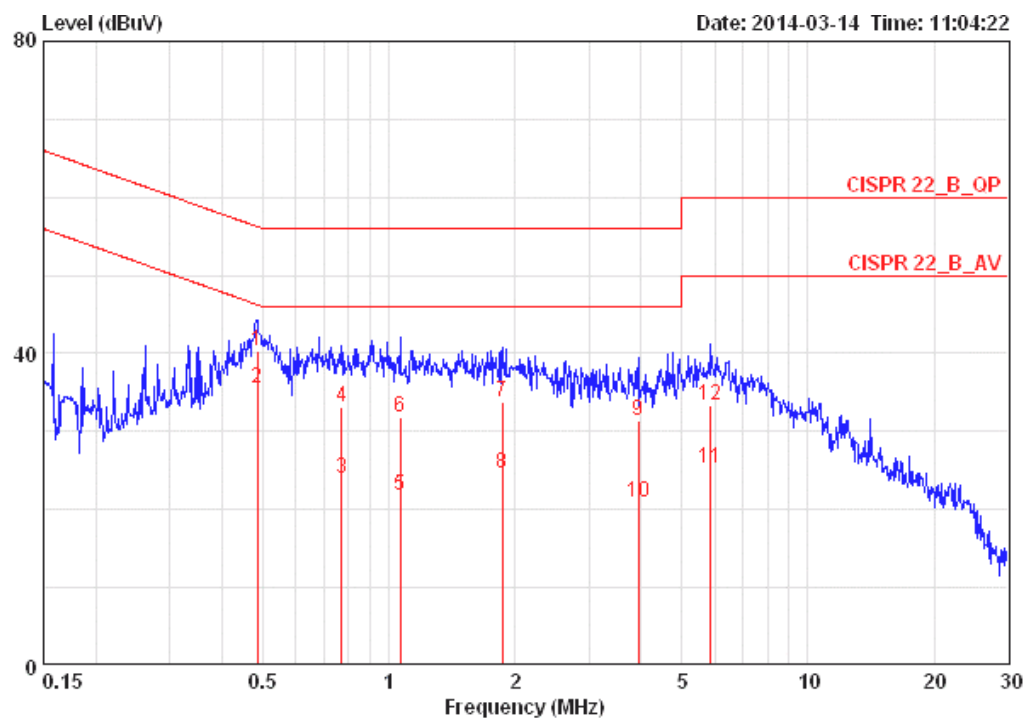

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.48632	40.29	-15.94	56.23	0.07	40.02	0.20	NEUTRAL	QP
2	0.48632	35.47	-10.76	46.23	0.07	35.20	0.20	NEUTRAL	AVERAGE
3	0.77110	23.94	-22.06	46.00	0.08	23.66	0.20	NEUTRAL	AVERAGE
4	0.77110	33.05	-22.95	56.00	0.08	32.77	0.20	NEUTRAL	QP
5	1.065	21.85	-24.15	46.00	0.08	21.57	0.20	NEUTRAL	AVERAGE
6	1.065	31.78	-24.22	56.00	0.08	31.50	0.20	NEUTRAL	QP
7	1.868	33.89	-22.11	56.00	0.11	33.56	0.23	NEUTRAL	QP
8	1.868	24.58	-21.42	46.00	0.11	24.25	0.23	NEUTRAL	AVERAGE
9	3.943	31.30	-24.70	56.00	0.13	30.87	0.30	NEUTRAL	QP
10	3.943	21.01	-24.99	46.00	0.13	20.58	0.30	NEUTRAL	AVERAGE
11	5.867	25.18	-24.82	50.00	0.17	24.68	0.33	NEUTRAL	AVERAGE
12	5.867	33.28	-26.72	60.00	0.17	32.78	0.33	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 + Ant. 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	21.66	18.07
40	5200 MHz	27.82	18.33
48	5240 MHz	26.92	18.33

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 + Ant. 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	41.28	36.15
46	5230 MHz	47.69	36.15

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 3 + Ant. 4


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	82.56	75.38

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 3 + Ant. 4


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.17	16.79
40	5200 MHz	31.41	17.69
48	5240 MHz	27.05	17.30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 + Ant. 4 / 5180 MHz

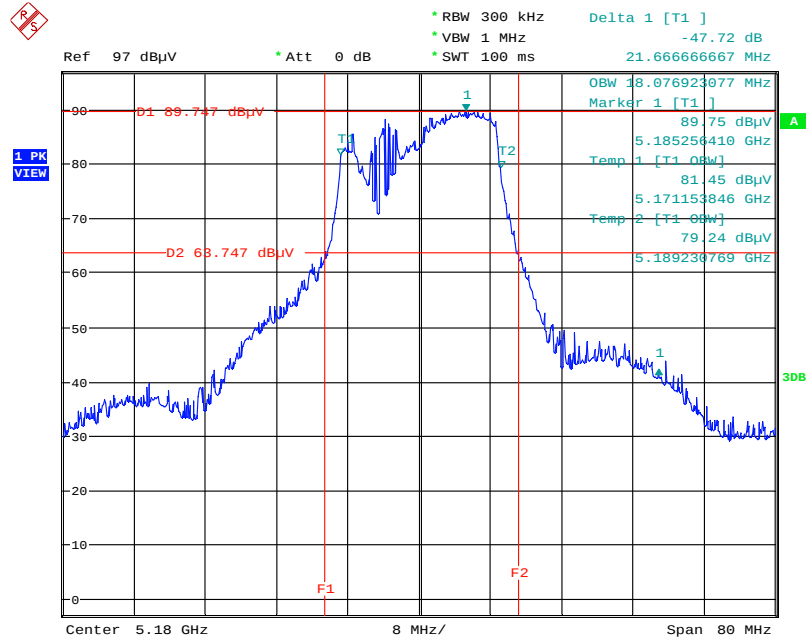


Date: 18.SEP.2014 18:18:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 + Ant. 4 / 5200 MHz

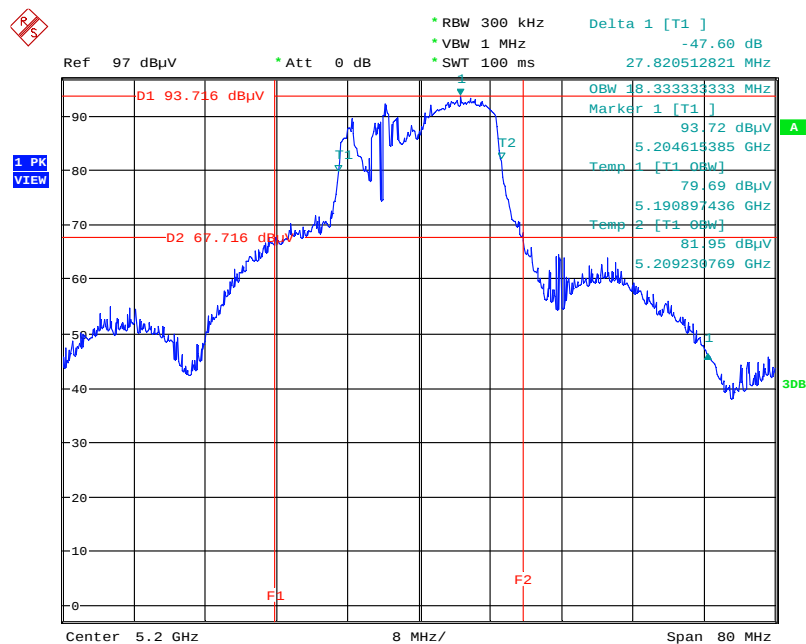


Date: 18.SEP.2014 18:19:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 + Ant. 4 / 5240 MHz

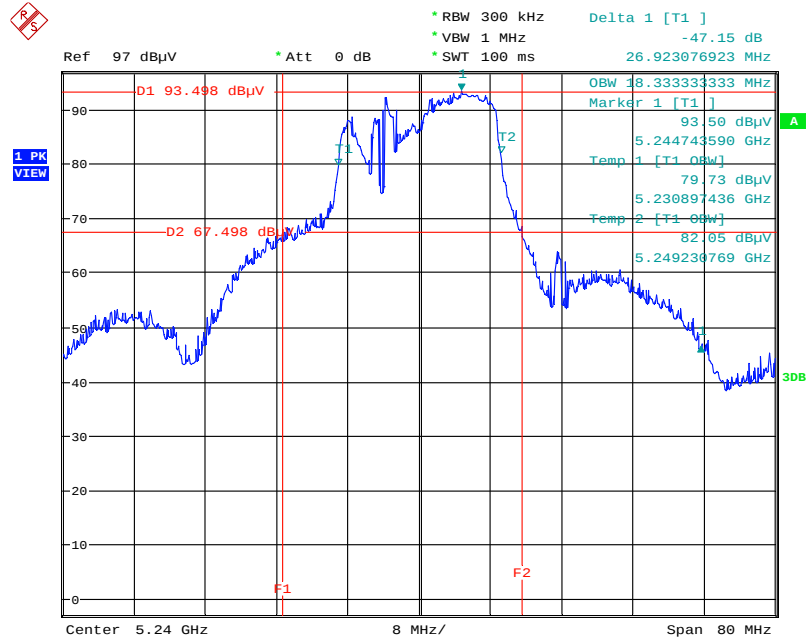


Date: 18.SEP.2014 18:19:59

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 + Ant. 4 / 5190 MHz

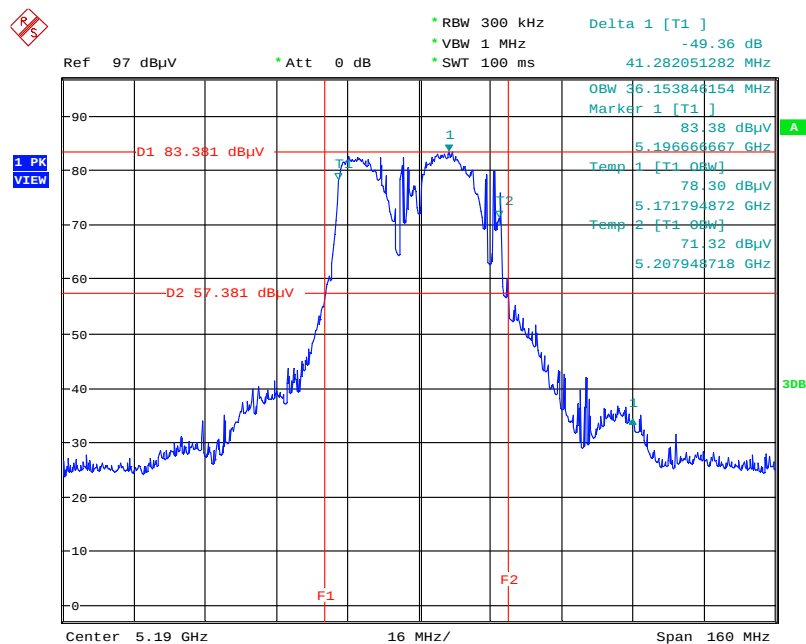


Date: 18.SEP.2014 19:36:36

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 + Ant. 4 / 5230 MHz

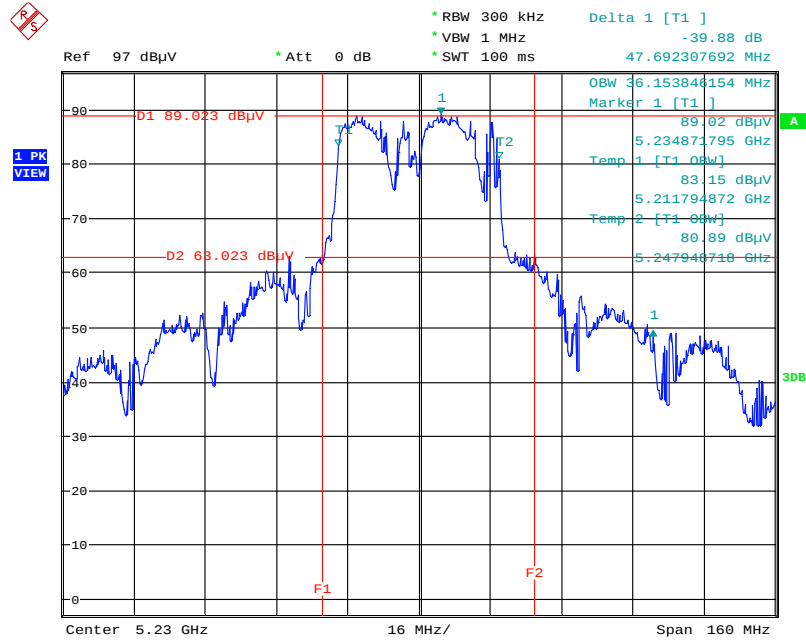


Date: 18.SEP.2014 19:37:33

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 3 + Ant. 4 / 5210 MHz

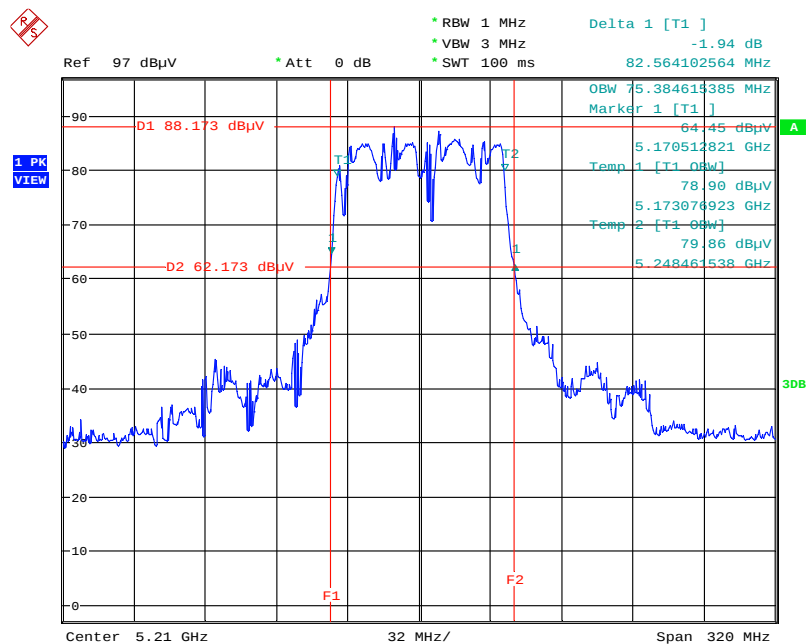


Date: 18.SEP.2014 19:43:03

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 / 5180 MHz

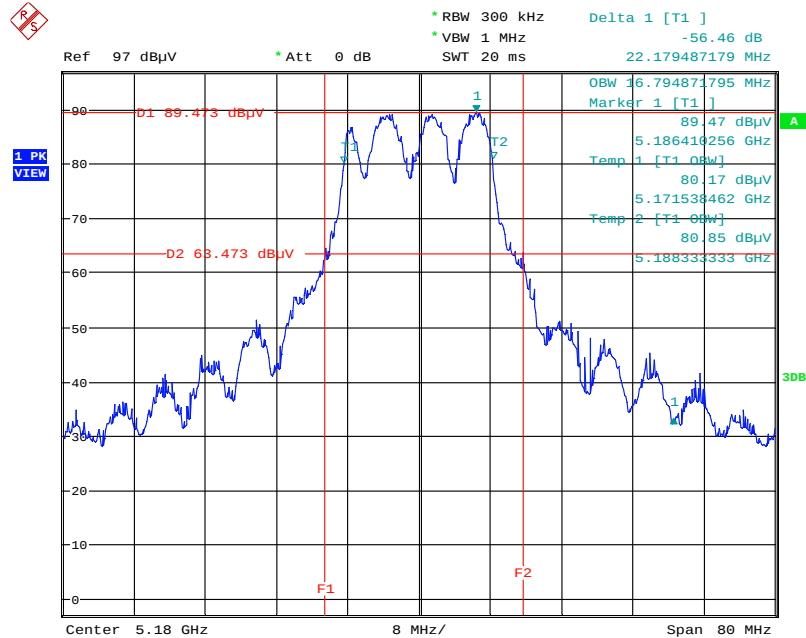


Date: 18.SEP.2014 18:12:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 / 5200 MHz

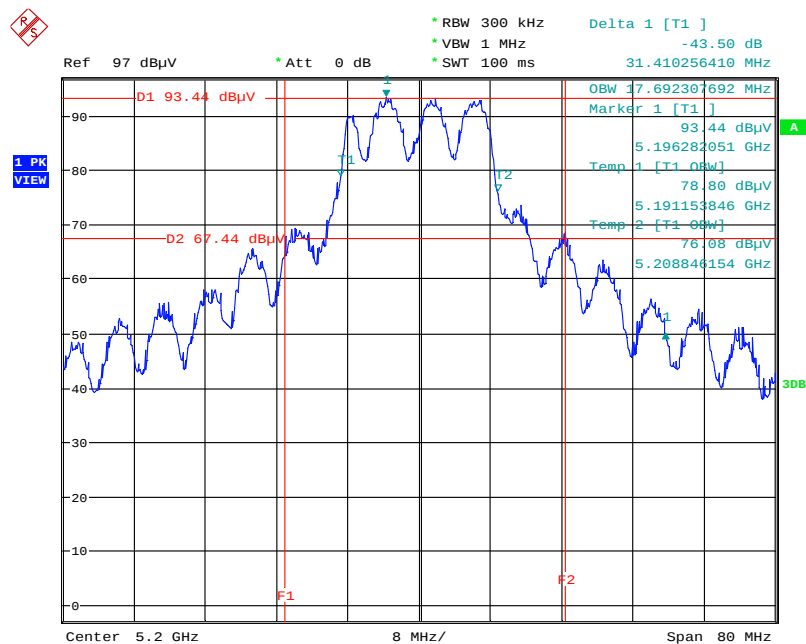

Date: 18.SEP.2014 18:13:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 / 5240 MHz

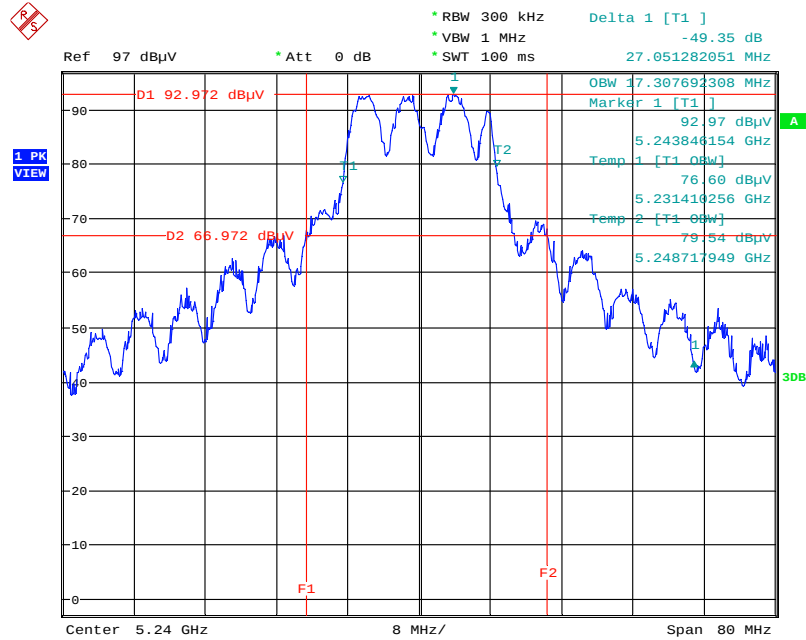

Date: 18.SEP.2014 18:13:46

4.3. 6dB Spectrum Bandwidth and 99% Occupied Bandwidth Measurement

4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 6dB Spectrum Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 + Ant. 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.64	17.56	500	Complies
157	5785 MHz	16.28	17.69	500	Complies
165	5825 MHz	13.78	17.62	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 + Ant. 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.51	35.76	500	Complies
159	5795 MHz	25.25	35.76	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 3 + Ant. 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	68.71	75.38	500	Complies

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a


Configuration IEEE 802.11a / Ant. 3 + Ant. 4

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.44	16.34	500	Complies
157	5785 MHz	15.70	16.53	500	Complies
165	5825 MHz	15.70	16.41	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 + Ant. 4 / 5825 MHz

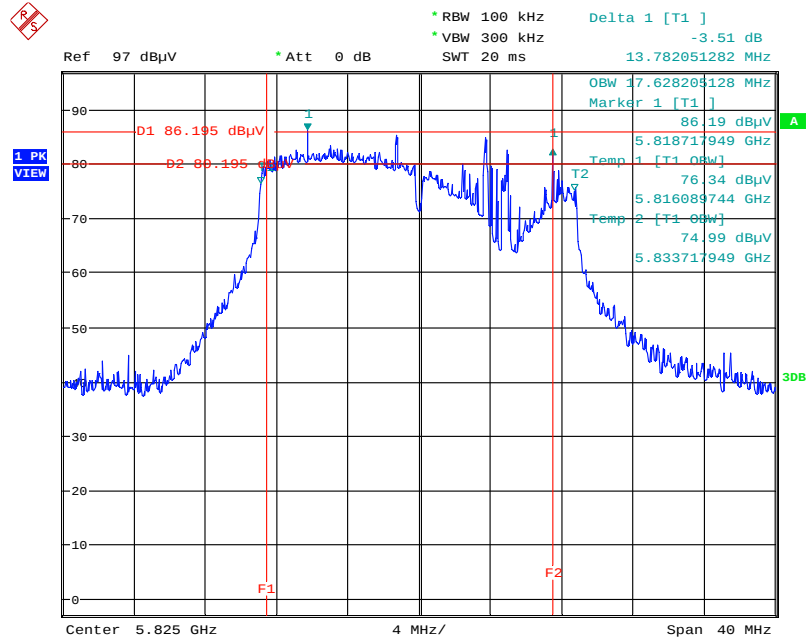

Date: 18.SEP.2014 18:05:51

6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 + Ant. 4 / 5795 MHz

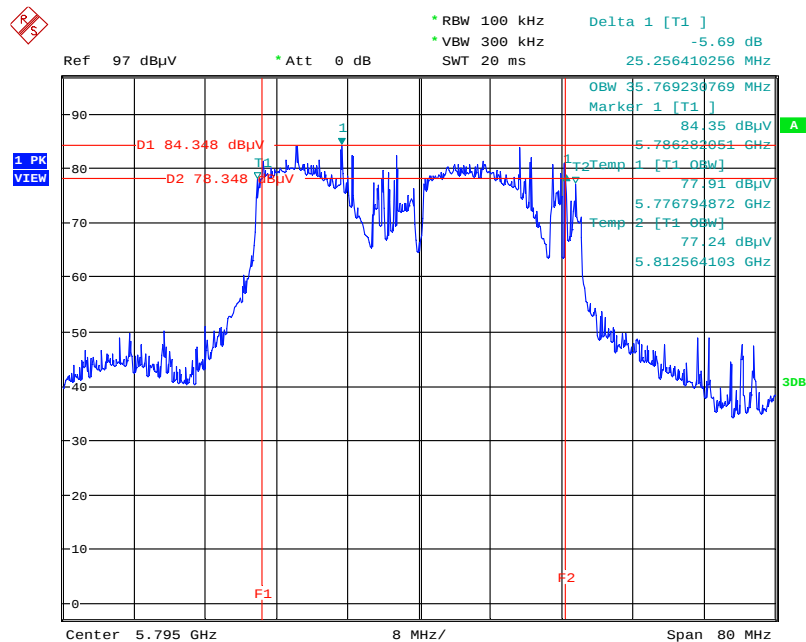

Date: 18.SEP.2014 18:08:21



Ref 97 dBμV Att 0 dB RBW 100 kHz VBW 300 kHz SWT 20 ms Delta 1 [T1] -45.22 dB 68.717948718 MHz


OBW 75.38461385 MHz
Marker 1 [T1]
78.83 dBμV
5.763717949 GHz
Temp 1 [T1 OBW]
70.16 dBμV
T2 5.737564103 GHz
Temp 2 [T1 OBW]
71.73 dBμV
5.812948718 GHz

D1 78.833 dBμV
D2 72.833 dBμV

1 PK VIEW

Center 5.775 GHz 16 MHz/ Span 160 MHz

6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 / 5745 MHz

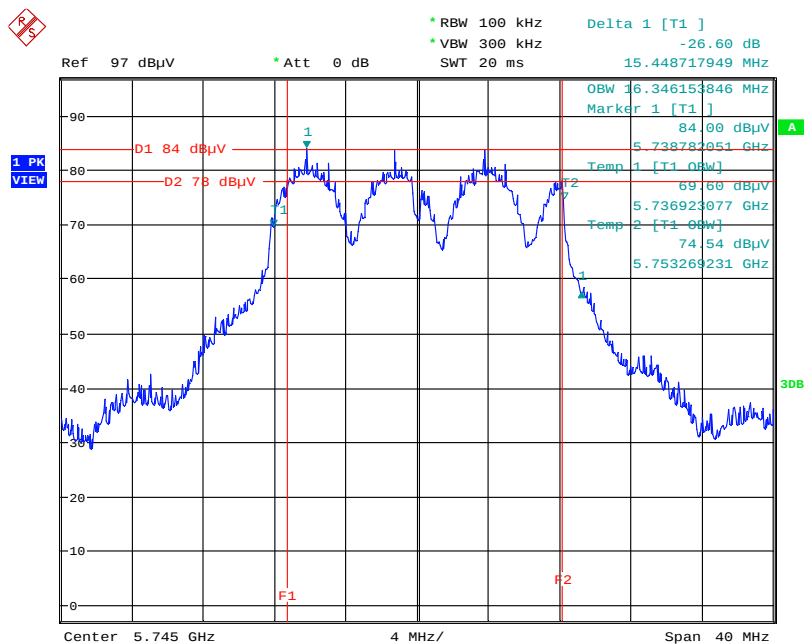

Issued Date : Dec. 04, 2014

4.4. Maximum Conducted Output Power Measurement

4.4.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725~5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4. Test Setup Layout

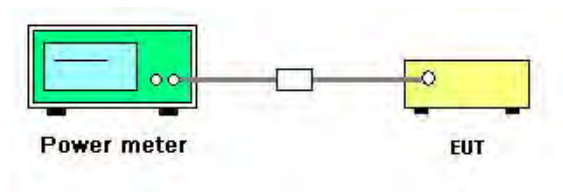

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Sep. 18, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Total		
36	5180 MHz	21.61	20.87	24.27	30.00	Complies
40	5200 MHz	24.95	24.15	27.58	30.00	Complies
48	5240 MHz	24.81	23.97	27.42	30.00	Complies
149	5745 MHz	17.34	19.03	21.28	30.00	Complies
157	5785 MHz	23.21	25.48	27.50	30.00	Complies
165	5825 MHz	19.16	21.08	23.24	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Total		
38	5190 MHz	18.44	18.02	21.25	30.00	Complies
46	5230 MHz	23.78	23.33	26.57	30.00	Complies
151	5755 MHz	16.53	18.19	20.45	30.00	Complies
159	5795 MHz	20.46	22.54	24.63	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Total		
42	5210 MHz	16.56	17.72	20.19	30.00	Complies
155	5775 MHz	17.82	19.91	22.00	30.00	Complies

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a
Test Date	Sep. 18, 2014		

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Total		
36	5180 MHz	21.53	21.03	24.30	30.00	Complies
40	5200 MHz	24.81	24.24	27.54	30.00	Complies
48	5240 MHz	24.86	24.05	27.48	30.00	Complies
149	5745 MHz	17.86	19.46	21.74	30.00	Complies
157	5785 MHz	23.28	25.54	27.57	30.00	Complies
165	5825 MHz	20.09	23.28	24.98	30.00	Complies

4.5. Power Spectral Density Measurement

4.5.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Range	Power Spectral Density limit
5.15~5.25 GHz	17 dBm/MHz
5.725~5.85 GHz	30 dBm/500kHz

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

For 5.15~5.25 GHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

For 5.725~5.85 GHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$RBW \geq 1/T$
VBW	$VBW \geq 3 RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.5.3. Test Procedures

For 5.15~5.25 GHz


1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

For 5.725~5.85 GHz


1. Test procedures refer KDB662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The measured result of PSD level must add $10\log(500\text{kHz/RBW})$ and the final result should ≤ 30 dBm.

4.5.4. Test Setup Layout

For 5.15~5.25 GHz

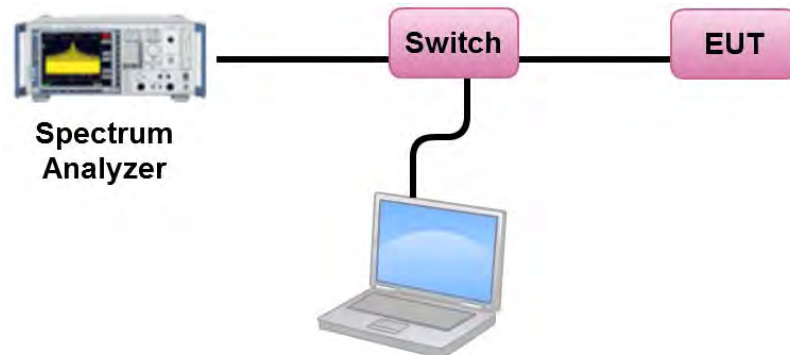

For 5.725~5.85 GHz

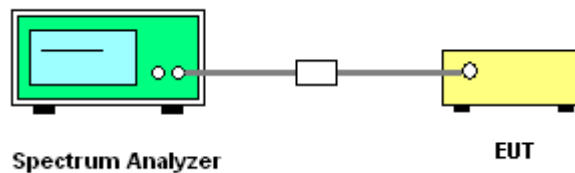

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Sep. 18, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 + Ant. 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	10.84	16.62	Complies
40	5200 MHz	14.36	16.62	Complies
48	5240 MHz	14.29	16.62	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{f=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} S_{f,k}^2 \right\}}{N_{ANT}} \right] = 6.38 \text{dBi} > 6 \text{dBi}, \text{So Band1 Limit } 17 - (6.38 - 6) = 16.62 \text{dBm/MHz}$$

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor	Total Power Density	Power Density Limit	Result
		Ant. 3	Ant. 4	Total		3kHz to 500kHz	dBm/500kHz	
149	5745 MHz	-6.80	-6.66	-3.72	22.22	18.50	28.64	Complies
157	5785 MHz	0.68	-1.93	2.58	22.22	24.80	28.64	Complies
165	5825 MHz	-4.63	-4.65	-1.63	22.22	20.59	28.75	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{f=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} S_{f,k}^2 \right\}}{N_{ANT}} \right] = 7.36 \text{dBi} > 6 \text{dBi}, \text{So } 5745 \text{MHz and } 5785 \text{MHz Power Density Limit} = 30 - (7.36 - 6) = 28.64 \text{dBm/500kHz}$$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{f=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} S_{f,k}^2 \right\}}{N_{ANT}} \right] = 7.25 \text{dBi} > 6 \text{dBi}, \text{So } 5825 \text{MHz Power Density Limit} = 30 - (7.25 - 6) = 28.75 \text{dBm/500kHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 + Ant. 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	4.96	16.62	Complies
46	5230 MHz	10.22	16.62	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{f=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} S_{f,k}^2 \right\}}{N_{ANT}} \right] = 6.38 \text{dBi} > 6 \text{dBi}, \text{So Band1 Limit } 17 - (6.38 - 6) = 16.62 \text{dBm/MHz}$$

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor	Total Power Density	Power Density Limit	Result
		Ant. 3	Ant. 4	Total		3kHz to 500kHz	dBm/500kHz	
151	5755 MHz	-9.70	-10.44	-7.04	22.22	15.18	28.64	Complies
159	5795 MHz	-5.90	-7.12	-3.46	22.22	18.76	28.75	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{FREQ}} S_{j,k}^2 \right\}}{N_{ANT}} \right] = 7.36 \text{dBi} > 6 \text{dBi}, \text{So } 5755 \text{MHz Power Density Limit} = 30 - (7.36 - 6) = 28.64 \text{dBm/500kHz}$$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{FREQ}} S_{j,k}^2 \right\}}{N_{ANT}} \right] = 7.25 \text{dBi} > 6 \text{dBi}, \text{So } 5795 \text{MHz Power Density Limit} = 30 - (7.25 - 6) = 28.75 \text{dBm/500kHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 3 + Ant. 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	0.94	16.62	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{FREQ}} S_{j,k}^2 \right\}}{N_{ANT}} \right] = 6.38 \text{dBi} > 6 \text{dBi}, \text{So Band1 Limit } 17 - (6.38 - 6) = 16.62 \text{dBm/MHz}$$

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor	Total Power Density	Power Density Limit	Result
		Ant. 3	Ant. 4	Total	3kHz to 500kHz	dBm/500kHz		
155	5775 MHz	-11.60	-11.30	-8.44	22.22	13.78	28.64	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{FREQ}} S_{j,k}^2 \right\}}{N_{ANT}} \right] = 7.36 \text{dBi} > 6 \text{dBi}, \text{So } 5775 \text{MHz Power Density Limit} = 30 - (7.36 - 6) = 28.64 \text{dBm/500kHz}$$

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a
Test Date	Sep. 18, 2014		

Configuration IEEE 802.11a / Ant. 3 + Ant. 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	10.95	16.62	Complies
40	5200 MHz	14.36	16.62	Complies
48	5240 MHz	14.23	16.62	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{BAND}} B_{f,k}^2 \right\}}{N_{ANT}} \right] = 6.38 \text{dBi} > 6 \text{dBi}, \text{So Band1 Limit } 17 - (6.38 - 6) = 16.62 \text{dBm/MHz}$$

Channel	Frequency	Power Density (dBm/3kHz)			BWCF factor	Total Power Density	Power Density Limit	Result
		Ant. 3	Ant. 4	Total		3kHz to 500kHz	dBm/500kHz	
149	5745 MHz	-4.47	-5.83	-2.09	22.22	20.13	28.64	Complies
157	5785 MHz	-0.50	-1.38	2.09	22.22	24.31	28.64	Complies
165	5825 MHz	-0.69	-3.68	1.08	22.22	23.30	28.75	Complies

Note:


$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{BAND}} B_{f,k}^2 \right\}}{N_{ANT}} \right] = 7.36 \text{dBi} > 6 \text{dBi}, \text{So } 5745 \text{MHz and } 5785 \text{MHz Power Density Limit} = 30 - (7.36 - 6) = 28.64 \text{dBm/500kHz}$$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{BAND}} B_{f,k}^2 \right\}}{N_{ANT}} \right] = 7.25 \text{dBi} > 6 \text{dBi}, \text{So } 5825 \text{MHz Power Density Limit} = 30 - (7.25 - 6) = 28.75 \text{dBm/500kHz}$$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 + Ant. 4 / 5200 MHz

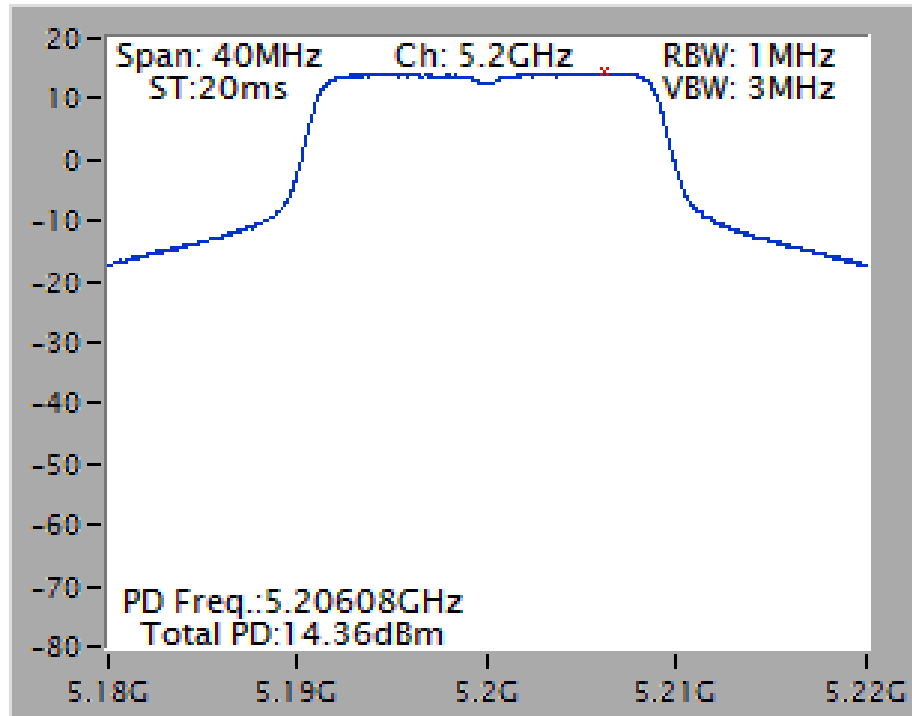


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 3 / 5785 MHz

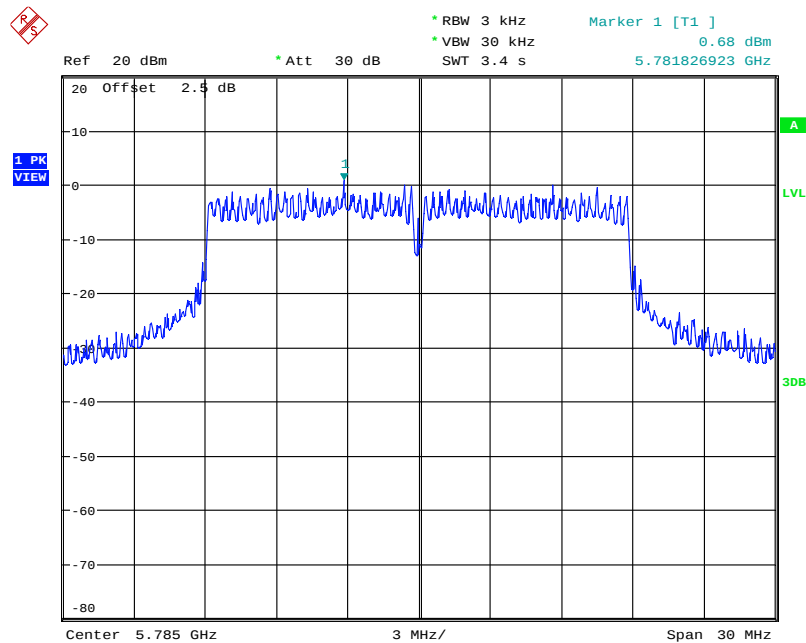


Date: 18.SEP.2014 17:40:54

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 4 / 5785 MHz

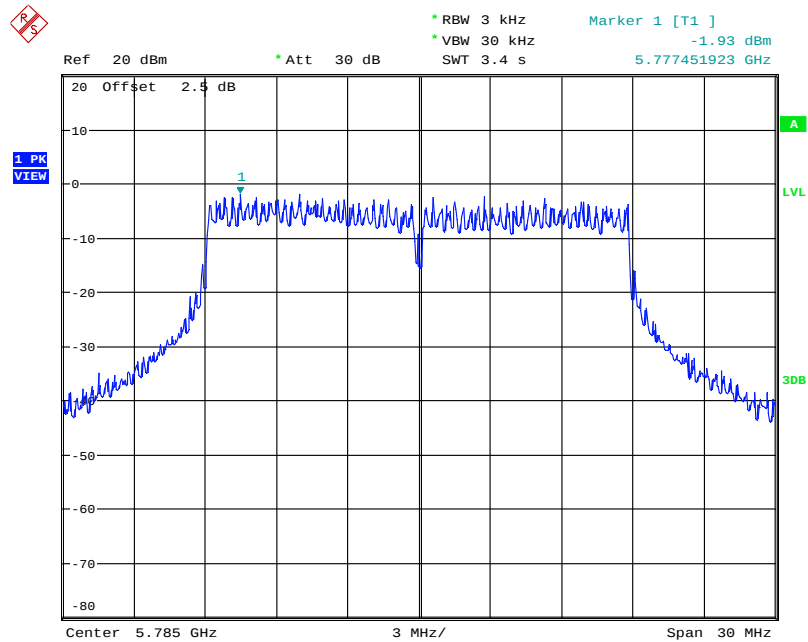


Date: 18.SEP.2014 17:41:44

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 + Ant. 4 / 5230 MHz

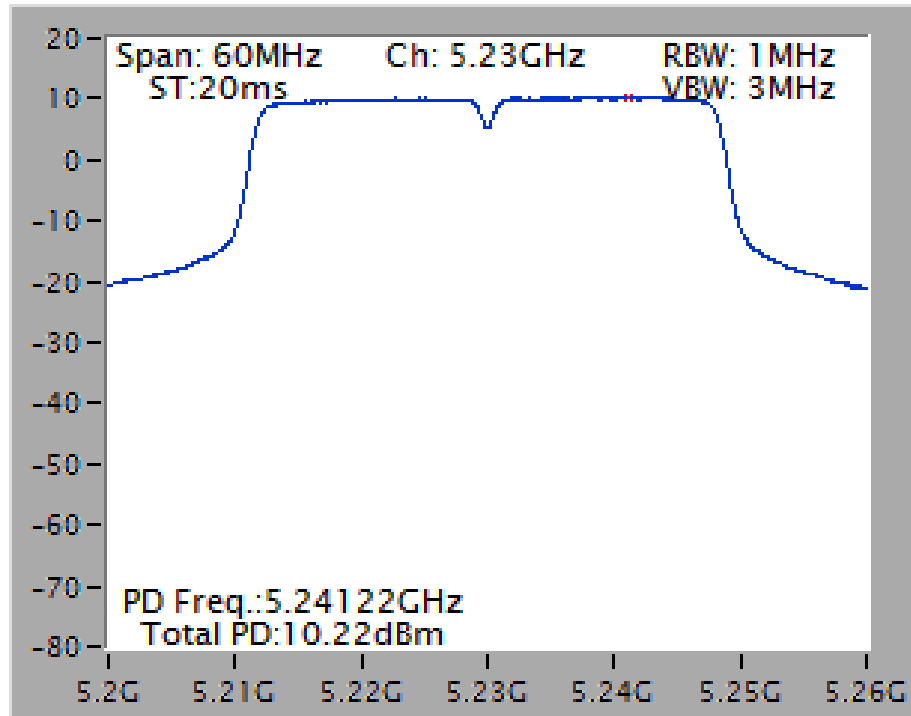


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 3 / 5795 MHz

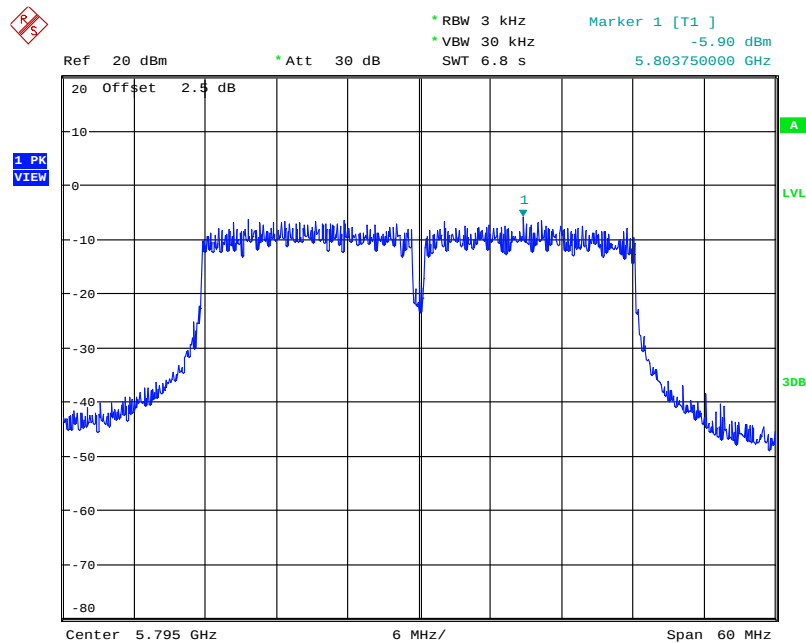


Date: 18.SEP.2014 17:47:40

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 4 / 5795 MHz

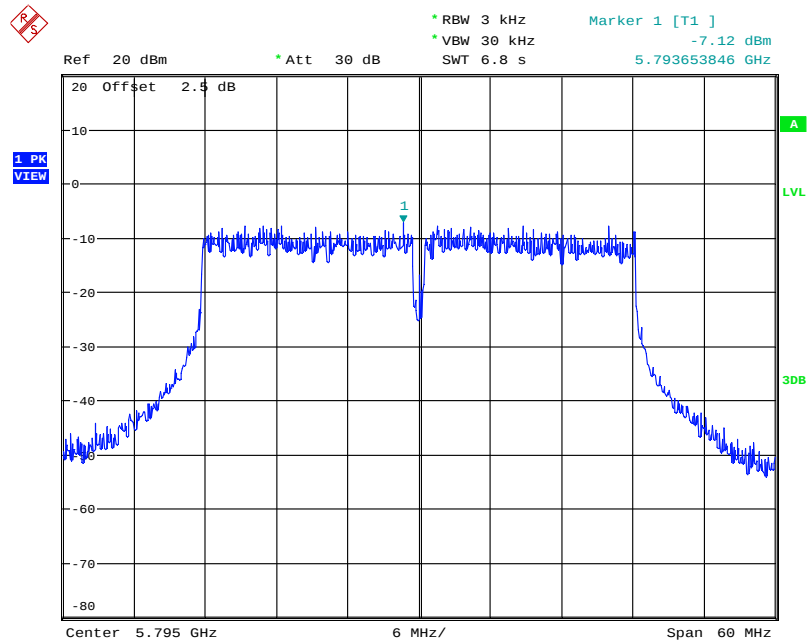


Date: 18.SEP.2014 17:46:48

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 3 + Ant. 4 / 5210 MHz

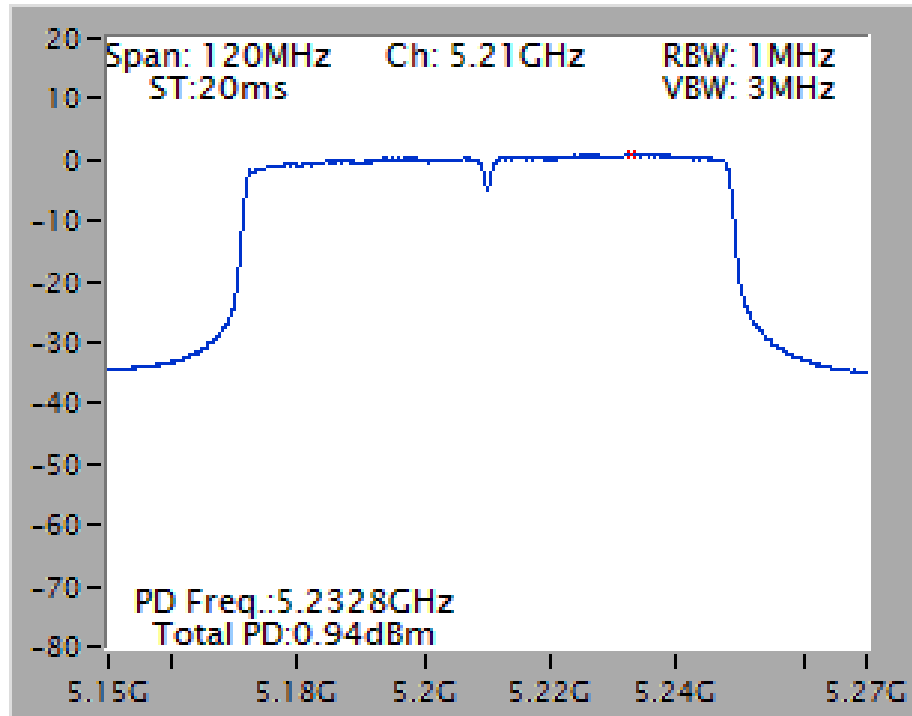


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 3 / 5775 MHz

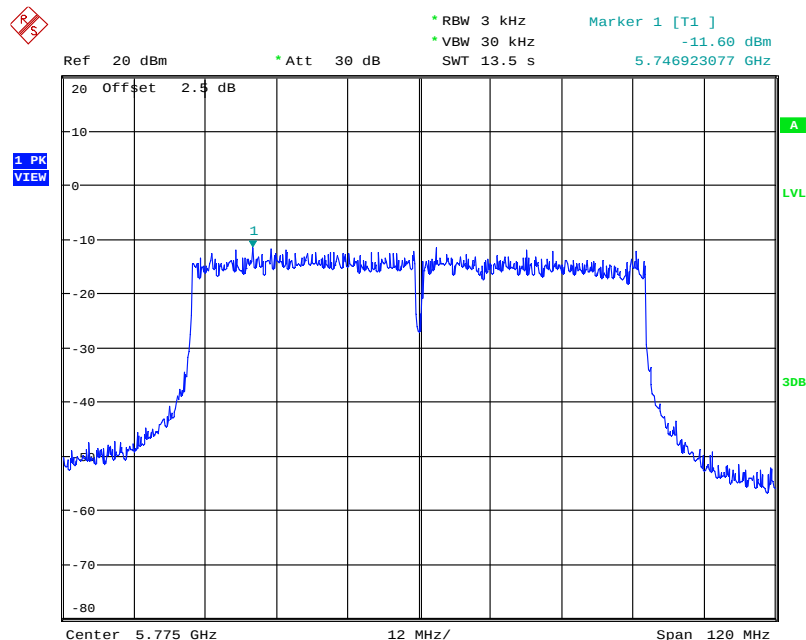


Date: 18.SEP.2014 17:49:01

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 4 / 5775 MHz

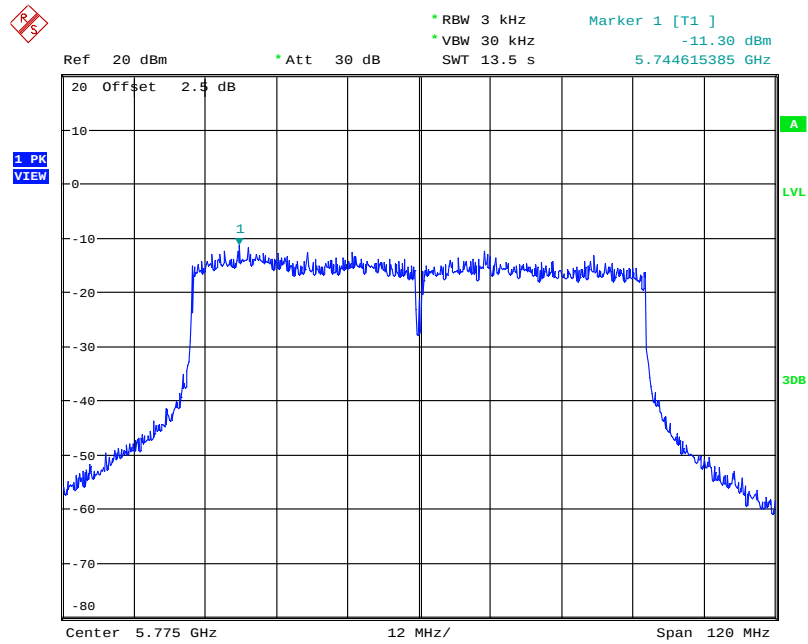


Date: 18.SEP.2014 17:51:03

Power Density Plot on Configuration IEEE 802.11a / Ant.3 + Ant.4 / 5200 MHz

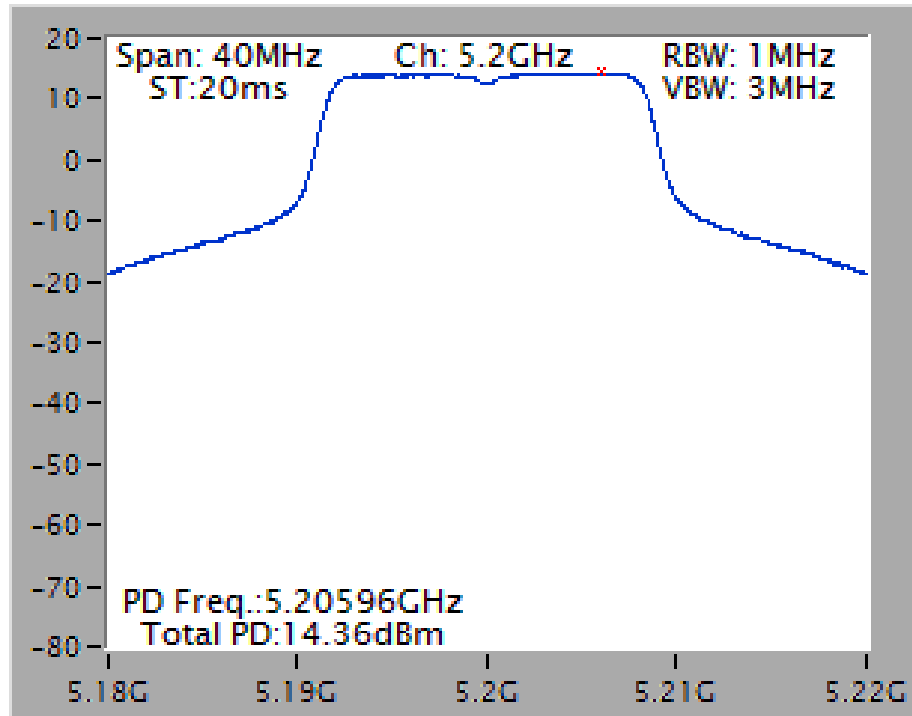


Power Density Plot on Configuration IEEE 802.11a / Ant.3 / 5785 MHz

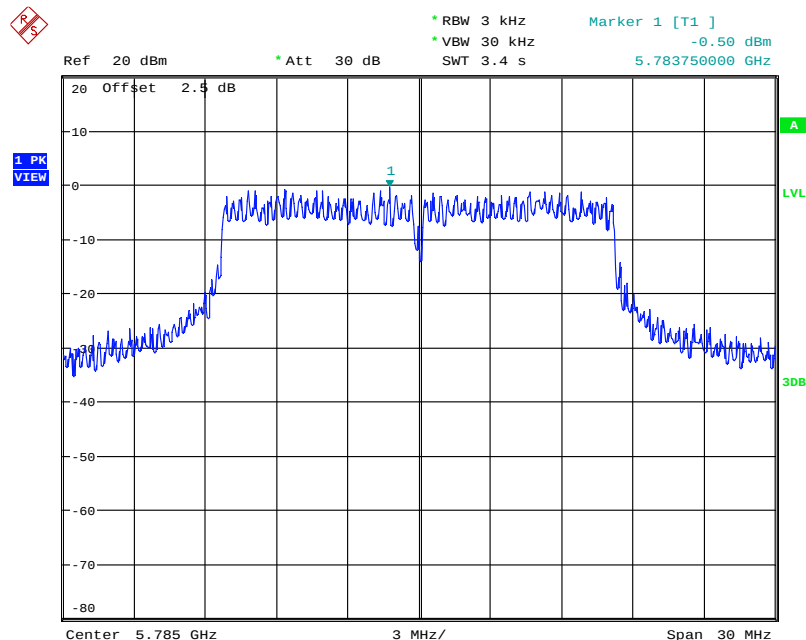

Date: 18.SEP.2014 17:36:03

Power Density Plot on Configuration IEEE 802.11a / Ant.4 / 5785 MHz

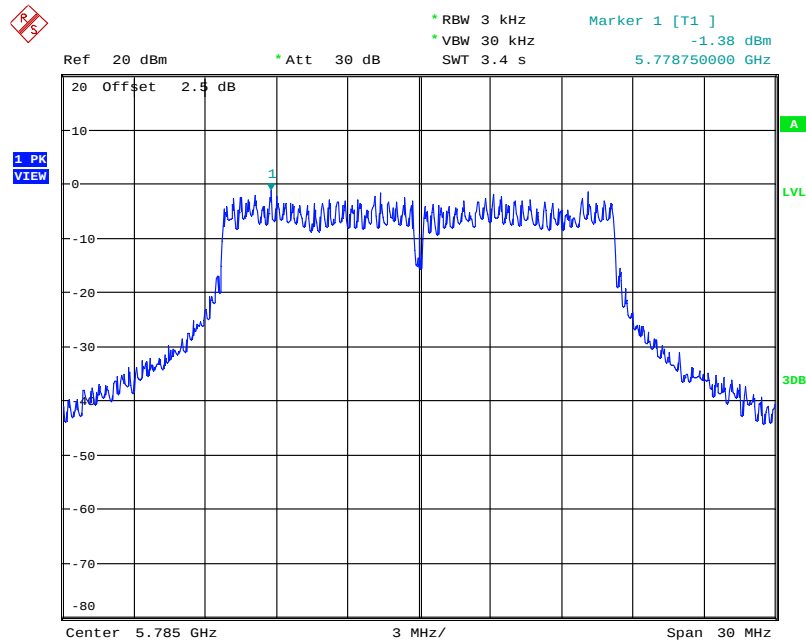

Date: 18.SEP.2014 17:35:19

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

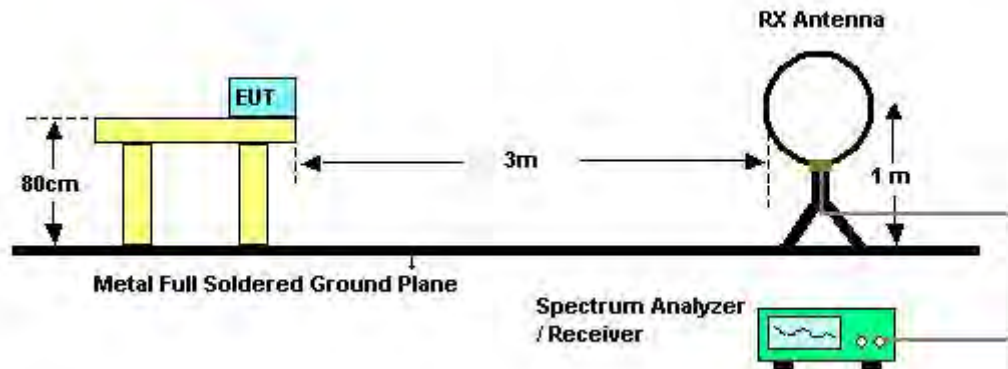

For Radiated Emissions: 30MHz~1GHz

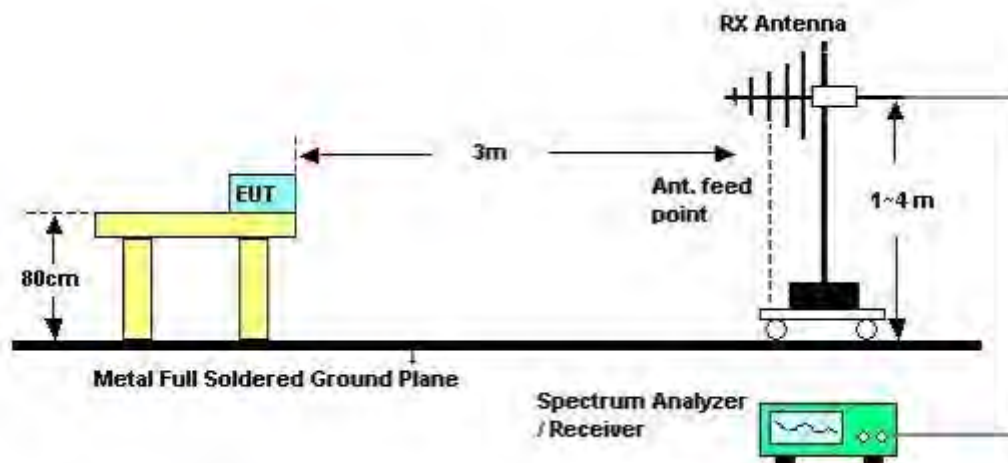

For Radiated Emissions: Above 1GHz

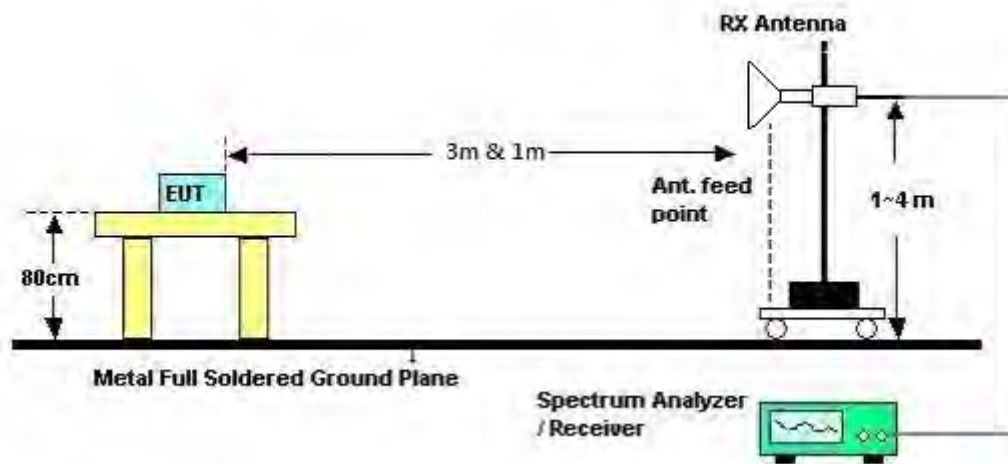

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25.1°C	Humidity	50%
Test Engineer	YC Chen	Configurations	Normal Link
Test Date	Mar. 24, 2014	Test Mode	Mode 4

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25.1°C	Humidity	50%
Test Engineer	YC Chen	Configurations	Normal Link
Test Mode	Mode 4		

Horizontal

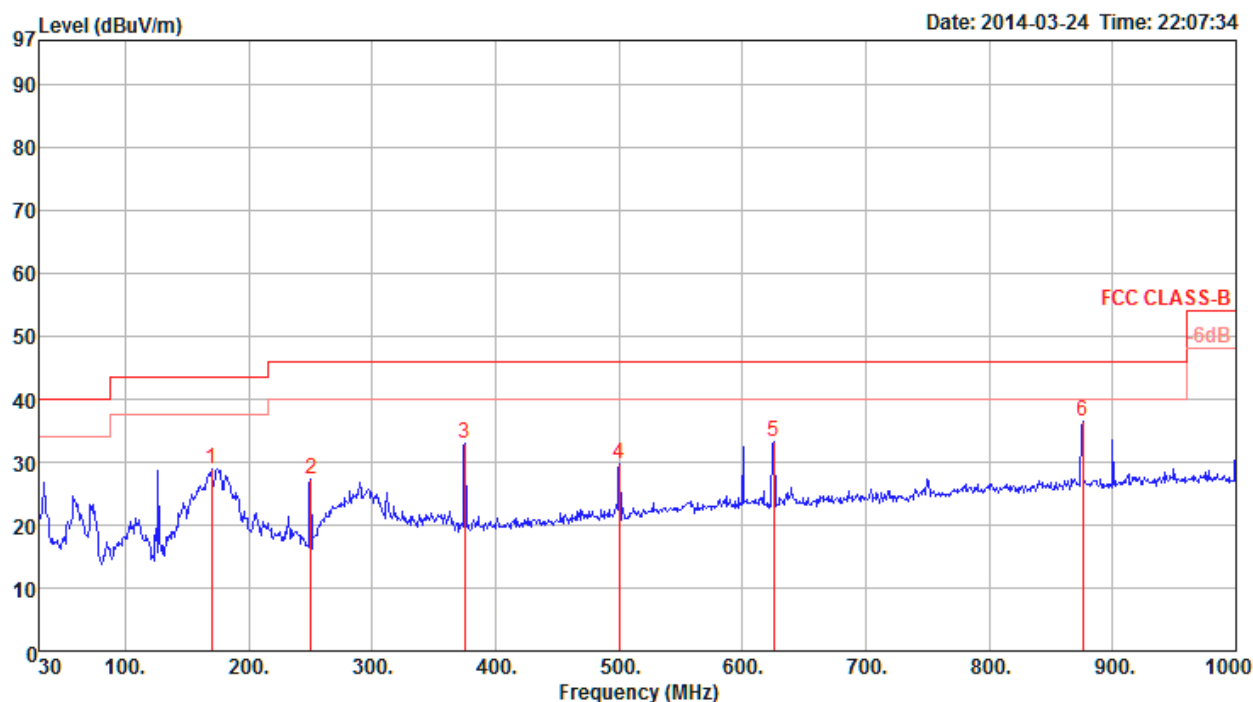

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	169.68	29.03	43.50	-14.47	44.10	1.94	27.41	-15.07	Peak	0	100	HORIZONTAL
2	250.19	27.32	46.00	-18.68	38.69	2.38	26.95	-11.37	Peak	0	100	HORIZONTAL
3	375.32	33.05	46.00	-12.95	41.36	2.89	27.26	-8.31	Peak	0	100	HORIZONTAL
4	500.45	29.66	46.00	-16.34	36.41	3.38	27.93	-6.75	Peak	0	100	HORIZONTAL
5	625.58	33.14	46.00	-12.86	37.10	3.82	27.58	-3.96	Peak	0	100	HORIZONTAL
6	875.84	36.46	46.00	-9.54	37.05	4.51	26.86	-0.59	Peak	0	100	HORIZONTAL

Vertical

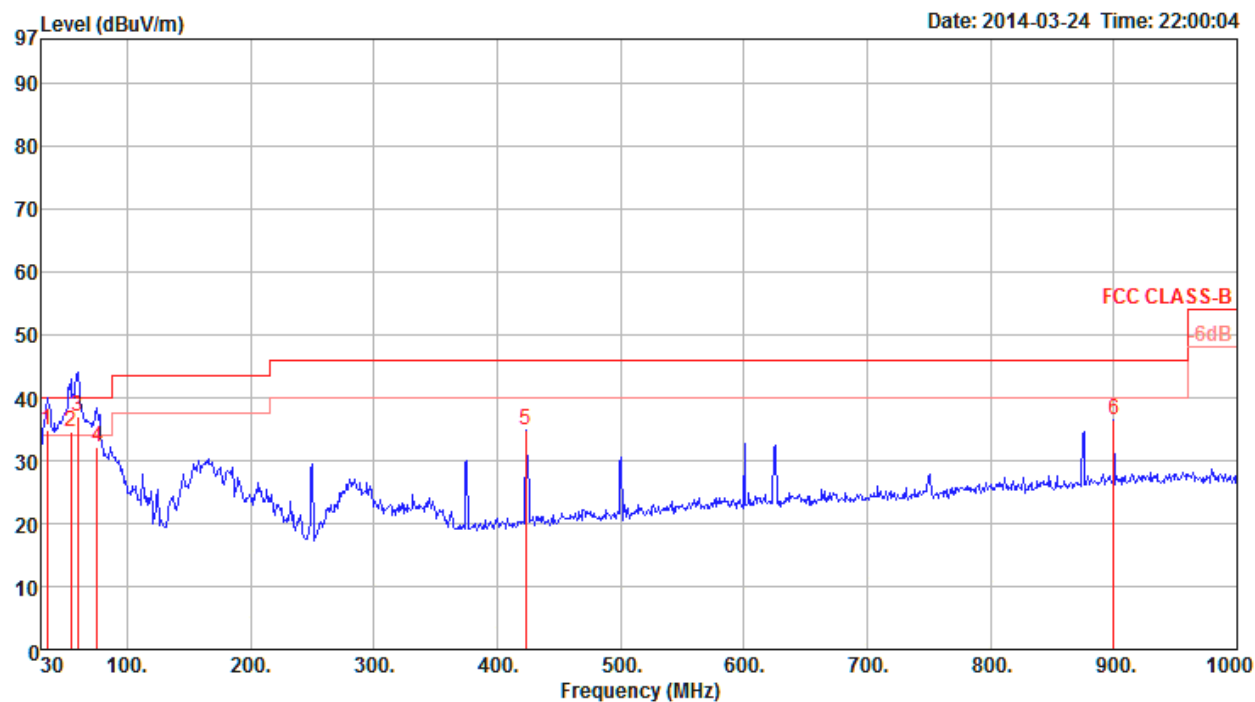

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	34.85	34.84	40.00	-5.16	45.12	0.92	28.00	-10.28	QP	145	100	VERTICAL
2	54.25	34.45	40.00	-5.55	53.23	1.12	27.90	-18.78	QP	17	100	VERTICAL
3	60.07	36.98	40.00	-3.02	56.99	1.17	27.98	-20.01	QP	219	100	VERTICAL
4	75.59	32.29	40.00	-7.71	51.67	1.30	27.92	-19.38	QP	128	100	VERTICAL
5	422.85	34.87	46.00	-11.13	42.66	3.10	27.67	-7.79	Peak	0	400	VERTICAL
6	900.09	36.52	46.00	-9.48	36.85	4.60	26.83	-0.33	Peak	0	400	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15540.00	44.32	54.00	-9.68	31.02	10.77	38.12	35.59	Average	100	246	HORIZONTAL
2	15540.00	57.89	74.00	-16.11	44.59	10.77	38.12	35.59	Peak	100	246	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15540.00	44.21	54.00	-9.79	30.91	10.77	38.12	35.59	Average	100	322	VERTICAL
2	15540.00	58.57	74.00	-15.43	45.27	10.77	38.12	35.59	Peak	100	322	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15600.00	43.43	54.00	-10.57	30.19	10.78	38.04	35.58	Average	100	89	HORIZONTAL
2	15600.00	57.61	74.00	-16.39	44.37	10.78	38.04	35.58	Peak	100	89	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15600.00	43.21	54.00	-10.79	29.97	10.78	38.04	35.58	Average	100	193	VERTICAL
2	15600.00	57.61	74.00	-16.39	44.37	10.78	38.04	35.58	Peak	100	193	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15720.00	44.51	54.00	-9.49	31.43	10.79	37.85	35.56 Average	101	54	HORIZONTAL
2	15720.00	57.20	74.00	-16.80	44.12	10.79	37.85	35.56 Peak	100	54	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15720.00	44.04	54.00	-9.96	30.96	10.79	37.85	35.56 Average	100	153	VERTICAL
2	15720.00	58.51	74.00	-15.49	45.43	10.79	37.85	35.56 Peak	100	153	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	11491.50	48.46	54.00	-5.54	38.08	6.74	38.30	34.66	Average	320	100	HORIZONTAL
2	11492.10	62.06	74.00	-11.94	51.68	6.74	38.30	34.66	Peak	320	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	11490.00	60.03	74.00	-13.97	49.65	6.74	38.30	34.66	Peak	345	100	VERTICAL
2	11491.20	46.48	54.00	-7.52	36.10	6.74	38.30	34.66	Average	345	100	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11570.50	61.34	74.00	-12.66	50.93	6.77	38.33	34.69	Peak	329	100	HORIZONTAL
2	11571.30	49.88	54.00	-4.12	39.47	6.77	38.33	34.69	Average	329	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableLoss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11553.50	53.66	74.00	-20.34	43.25	6.77	38.32	34.68	Peak	72	100	VERTICAL
2	11571.00	45.54	54.00	-8.46	35.13	6.77	38.33	34.69	Average	72	100	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	11650.40	57.44	74.00	-16.56	47.00	6.80	38.36	34.72	Peak	352	100	HORIZONTAL
2	11651.50	48.65	54.00	-5.35	38.21	6.80	38.36	34.72	Average	352	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	11651.70	44.63	54.00	-9.37	34.19	6.80	38.36	34.72	Average	18	100	VERTICAL
2	11668.20	51.32	74.00	-22.68	40.86	6.81	38.37	34.72	Peak	18	100	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15539.04	44.70	54.00	-9.30	31.40	10.77	38.12	35.59	Average	100	153	HORIZONTAL
2	15540.50	58.19	74.00	-15.81	44.89	10.77	38.12	35.59	Peak	100	153	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15539.36	44.49	54.00	-9.51	31.19	10.77	38.12	35.59	Average	100	123	VERTICAL
2	15540.76	58.05	74.00	-15.95	44.75	10.77	38.12	35.59	Peak	100	123	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.40	44.02	54.00	-9.98	30.88	10.79	37.91	35.56 Average	100	265	HORIZONTAL
2	15690.28	57.60	74.00	-16.40	44.46	10.79	37.91	35.56 Peak	100	265	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.08	57.46	74.00	-16.54	44.32	10.79	37.91	35.56 Peak	100	216	VERTICAL
2	15690.88	43.85	54.00	-10.15	30.71	10.79	37.91	35.56 Average	100	216	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11506.50	55.08	74.00	-18.92	44.69	6.75	38.30	34.66	Peak	312	100	HORIZONTAL
2	11511.30	42.01	54.00	-11.99	31.62	6.75	38.30	34.66	Average	312	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11490.60	38.91	54.00	-15.09	28.53	6.74	38.30	34.66	Average	102	100	VERTICAL
2	11528.70	50.79	74.00	-23.21	40.39	6.76	38.31	34.67	Peak	102	100	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	11589.40	57.15	74.00	-16.85	46.73	6.78	38.33	34.69	Peak	307	148	HORIZONTAL
2	11589.60	43.71	54.00	-10.29	33.29	6.78	38.33	34.69	Average	307	148	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	11593.60	42.76	54.00	-11.24	32.34	6.78	38.33	34.69	Average	134	100	VERTICAL
2	11597.00	51.98	74.00	-22.02	41.57	6.78	38.33	34.70	Peak	134	100	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15629.49	42.72	54.00	-11.28	29.52	10.78	37.99	35.57	Average	100	120 HORIZONTAL
2	15629.80	57.97	74.00	-16.03	44.77	10.78	37.99	35.57	Peak	100	120 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15630.91	57.92	74.00	-16.08	44.72	10.78	37.99	35.57	Peak	100	254 VERTICAL
2	15630.97	42.71	54.00	-11.29	29.51	10.78	37.99	35.57	Average	100	254 VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11486.00	54.13	74.00	-19.87	43.75	6.74	38.30	34.66	Peak	323	100 HORIZONTAL
2	11531.20	42.03	54.00	-11.97	31.63	6.76	38.31	34.67	Average	323	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableLoss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11513.60	50.71	74.00	-23.29	40.32	6.75	38.30	34.66	Peak	156	100	VERTICAL
2	11531.60	39.58	54.00	-14.42	29.18	6.76	38.31	34.67	Average	156	100	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 36 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15540.00	44.48	54.00	-9.52	31.18	10.77	38.12	35.59	Average	100	360	HORIZONTAL
2	15540.00	58.79	74.00	-15.21	45.49	10.77	38.12	35.59	Peak	100	360	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15540.00	44.39	54.00	-9.61	31.09	10.77	38.12	35.59	Average	100	65	VERTICAL
2	15540.00	57.59	74.00	-16.41	44.29	10.77	38.12	35.59	Peak	100	65	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 40 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15600.00	44.31	54.00	-9.69	31.07	10.78	38.04	35.58	Average	162	360	HORIZONTAL
2	15600.00	59.58	74.00	-14.42	46.34	10.78	38.04	35.58	Peak	162	360	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15600.00	46.54	54.00	-7.46	33.30	10.78	38.04	35.58	Average	167	29	VERTICAL
2	15600.00	62.15	74.00	-11.85	48.91	10.78	38.04	35.58	Peak	167	29	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 48 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15720.00	48.49	54.00	-5.51	35.41	10.79	37.85	35.56	Average	167	318	HORIZONTAL
2	15720.00	64.32	74.00	-9.68	51.24	10.79	37.85	35.56	Peak	167	318	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15720.00	48.93	54.00	-5.07	35.85	10.79	37.85	35.56	Average	181	0	VERTICAL
2	15720.00	64.88	74.00	-9.12	51.80	10.79	37.85	35.56	Peak	181	0	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 149 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11490.00	60.17	74.00	-13.83	49.79	6.74	38.30	34.66	Peak	329	100	HORIZONTAL
2	11490.50	47.19	54.00	-6.81	36.81	6.74	38.30	34.66	Average	329	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11490.20	59.11	74.00	-14.89	48.73	6.74	38.30	34.66	Peak	347	100	VERTICAL
2	11490.50	46.50	54.00	-7.50	36.12	6.74	38.30	34.66	Average	347	100	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 157 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11570.90	49.26	54.00	-4.74	38.85	6.77	38.33	34.69	Average	321	100	HORIZONTAL
2	11575.50	63.12	74.00	-10.88	52.71	6.77	38.33	34.69	Peak	321	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11567.80	55.54	74.00	-18.46	45.12	6.77	38.33	34.68	Peak	168	100	VERTICAL
2	11570.10	47.75	54.00	-6.25	37.34	6.77	38.33	34.69	Average	168	100	VERTICAL

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 165 / Ant.3 + Ant.4
Test Date	Sep. 08, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11650.20	48.15	54.00	-5.85	37.71	6.80	38.36	34.72	Average	345	100	HORIZONTAL
2	11654.30	57.16	74.00	-16.84	46.72	6.80	38.36	34.72	Peak	345	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11650.40	44.45	54.00	-9.55	34.01	6.80	38.36	34.72	Average	106	100	VERTICAL
2	11651.00	51.69	74.00	-22.31	41.25	6.80	38.36	34.72	Peak	106	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around band edges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant.3 + Ant.4
Test Date	Sep. 04, 2014		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5147.90	69.48	74.00	-4.52	64.54	6.13	34.01	35.20	Peak	191	50 HORIZONTAL
2	5150.00	53.94	54.00	-0.06	49.00	6.13	34.01	35.20	Average	191	50 HORIZONTAL
3	5175.80	115.77			110.78	6.15	34.04	35.20	Peak	191	50 HORIZONTAL
4	5176.10	103.86			98.87	6.15	34.04	35.20	Average	191	50 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5149.20	70.92	74.00	-3.08	65.98	6.13	34.01	35.20	Peak	180	55 HORIZONTAL
2	5150.00	53.96	54.00	-0.04	49.02	6.13	34.01	35.20	Average	180	55 HORIZONTAL
3	5194.40	120.41			115.37	6.16	34.08	35.20	Peak	180	55 HORIZONTAL
4	5194.80	108.76			103.69	6.16	34.11	35.20	Average	180	55 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5146.40	47.40	54.00	-6.60	42.46	6.13	34.01	35.20	Average	183	56 HORIZONTAL
2	5150.00	60.43	74.00	-13.57	55.49	6.13	34.01	35.20	Peak	183	56 HORIZONTAL
3	5234.00	109.66			104.50	6.18	34.18	35.20	Average	183	56 HORIZONTAL
4	5235.20	121.33			116.17	6.18	34.18	35.20	Peak	183	56 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5714.20	67.96	68.20	-0.24	61.85	6.44	34.87	35.20 Peak	173	286	HORIZONTAL
2	5724.80	71.83	78.20	-6.37	65.69	6.45	34.89	35.20 Peak	173	286	HORIZONTAL
3	5751.00	104.00			97.85	6.45	34.90	35.20 Average	173	286	HORIZONTAL
4	5751.20	116.29			110.14	6.45	34.90	35.20 Peak	173	286	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5713.00	62.58	68.20	-5.62	56.47	6.44	34.87	35.20 Peak	184	288	HORIZONTAL
2	5724.60	66.87	78.20	-11.33	60.73	6.45	34.89	35.20 Peak	184	288	HORIZONTAL
3	5789.80	119.51			113.31	6.47	34.93	35.20 Peak	184	288	HORIZONTAL
4	5791.00	109.93			103.72	6.47	34.94	35.20 Average	184	288	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5819.00	106.26			100.03	6.48	34.95	35.20 Average	182	290	HORIZONTAL
2	5821.00	118.80			112.57	6.48	34.95	35.20 Peak	182	290	HORIZONTAL
3	5850.60	68.95	78.20	-9.25	62.68	6.49	34.98	35.20 Peak	182	290	HORIZONTAL
4	5860.60	68.18	68.20	-0.02	61.89	6.50	34.99	35.20 Peak	182	290	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant.3 + Ant.4
Test Date	Sep. 04, 2014		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5148.40	53.48	54.00	-0.52	48.54	6.13	34.01	35.20	Average	189	55 HORIZONTAL
2	5148.80	68.53	74.00	-5.47	63.59	6.13	34.01	35.20	Peak	189	55 HORIZONTAL
3	5186.40	111.17			106.14	6.15	34.08	35.20	Peak	189	55 HORIZONTAL
4	5203.20	101.15			96.08	6.16	34.11	35.20	Average	189	55 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	53.98	54.00	-0.02	49.04	6.13	34.01	35.20	Average	189	53 HORIZONTAL
2	5150.00	68.63	74.00	-5.37	63.69	6.13	34.01	35.20	Peak	189	53 HORIZONTAL
3	5234.80	107.02			101.86	6.18	34.18	35.20	Average	189	53 HORIZONTAL
4	5234.80	116.79			111.63	6.18	34.18	35.20	Peak	189	53 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Channel 151

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5711.80	68.13	68.20	-0.07	62.02	6.44	34.87	35.20	Average	181	283	HORIZONTAL
2	5724.60	78.14	78.20	-0.06	72.00	6.45	34.89	35.20	Average	181	283	HORIZONTAL
3	5742.60	99.34			93.19	6.45	34.90	35.20	Peak	181	283	HORIZONTAL
4	5743.00	112.65			106.50	6.45	34.90	35.20	Average	181	283	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5789.40	116.54			110.34	6.47	34.93	35.20	Peak	180	288	HORIZONTAL
2	5789.80	102.86			96.66	6.47	34.93	35.20	Average	180	288	HORIZONTAL
3	5850.40	70.05	78.20	-8.15	63.78	6.49	34.98	35.20	Peak	180	288	HORIZONTAL
4	5862.40	68.19	68.20	-0.01	61.90	6.50	34.99	35.20	Peak	180	288	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5795 MHz.

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Ant. 3 + Ant. 4
Test Date	Sep. 04, 2014 ~ Sep. 06, 2014		

Channel 42

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5138.00	66.69	74.00	-7.31	61.79	6.12	33.98	35.20	Peak	182	295	HORIZONTAL
2	5146.80	53.65	54.00	-0.35	48.71	6.13	34.01	35.20	Average	182	295	HORIZONTAL
3	5198.80	110.28			105.21	6.16	34.11	35.20	Peak	182	295	HORIZONTAL
4	5226.80	96.88			91.75	6.18	34.15	35.20	Average	182	295	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 155

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5750.20	94.79			88.64	6.45	34.90	35.20	Average	182	288	HORIZONTAL
2	5763.80	114.21			108.04	6.46	34.91	35.20	Peak	182	288	HORIZONTAL
3	5850.00	69.92	78.20	-8.28	63.65	6.49	34.98	35.20	Peak	182	288	HORIZONTAL
4	5866.40	67.66	68.20	-0.54	61.37	6.50	34.99	35.20	Peak	182	288	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5775 MHz.

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant.3 + Ant.4
Test Date	Sep. 04, 2014		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5149.60	68.71	74.00	-5.29	63.77	6.13	34.01	35.20	Peak	180	59 HORIZONTAL
2	5150.00	52.24	54.00	-1.76	47.30	6.13	34.01	35.20	Average	180	59 HORIZONTAL
3	5201.20	109.22			104.15	6.16	34.11	35.20	Average	180	59 HORIZONTAL
4	5206.40	118.38			113.31	6.16	34.11	35.20	Peak	180	59 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5149.60	68.71	74.00	-5.29	63.77	6.13	34.01	35.20	Peak	180	59 HORIZONTAL
2	5150.00	52.24	54.00	-1.76	47.30	6.13	34.01	35.20	Average	180	59 HORIZONTAL
3	5201.20	109.22			104.15	6.16	34.11	35.20	Average	180	59 HORIZONTAL
4	5206.40	118.38			113.31	6.16	34.11	35.20	Peak	180	59 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5149.20	59.52	74.00	-14.48	54.58	6.13	34.01	35.20	Peak	184	52 HORIZONTAL
2	5150.00	46.86	54.00	-7.14	41.92	6.13	34.01	35.20	Average	184	52 HORIZONTAL
3	5236.00	118.48			113.32	6.18	34.18	35.20	Peak	184	52 HORIZONTAL
4	5236.40	109.20			104.04	6.18	34.18	35.20	Average	184	52 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25.1°C	Humidity	50%
Test Engineer	Mars Lin	Configurations	IEEE 802.11a CH 149, 157, 165 / Ant.3 + Ant.4
Test Date	Sep. 06, 2014		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5712.20	68.17	68.20	-0.03	62.06	6.44	34.87	35.20	Peak	186	286	HORIZONTAL
2	5725.00	72.44	78.20	-5.76	66.30	6.45	34.89	35.20	Peak	186	286	HORIZONTAL
3	5741.60	104.65			98.50	6.45	34.90	35.20	Average	186	286	HORIZONTAL
4	5751.40	116.57			110.42	6.45	34.90	35.20	Peak	186	286	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5708.20	63.29	68.20	-4.91	57.18	6.44	34.87	35.20	Peak	178	292	HORIZONTAL
2	5725.00	66.14	78.20	-12.06	60.00	6.45	34.89	35.20	Peak	178	292	HORIZONTAL
3	5781.00	119.52			113.33	6.46	34.93	35.20	Peak	178	292	HORIZONTAL
4	5781.40	109.84			103.65	6.46	34.93	35.20	Average	178	292	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5818.60	107.12			100.89	6.48	34.95	35.20	Average	185	291	HORIZONTAL
2	5819.00	119.00			112.77	6.48	34.95	35.20	Peak	185	291	HORIZONTAL
3	5850.40	70.98	78.20	-7.22	64.71	6.49	34.98	35.20	Peak	185	291	HORIZONTAL
4	5863.60	67.39	68.20	-0.81	61.10	6.50	34.99	35.20	Peak	185	291	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

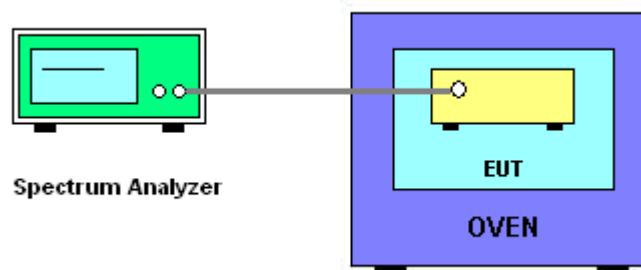

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Test Date	Sep. 18, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9732
110.00	5199.9875
93.50	5199.9964
Max. Deviation (MHz)	0.026800
Max. Deviation (ppm)	5.15

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5199.9798
10	5199.9844
20	5199.9875
30	5200.0058
40	5200.0134
50	5200.0212
Max. Deviation (MHz)	0.021200
Max. Deviation (ppm)	4.08

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Dec. 02, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 30, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Sep. 30, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%