




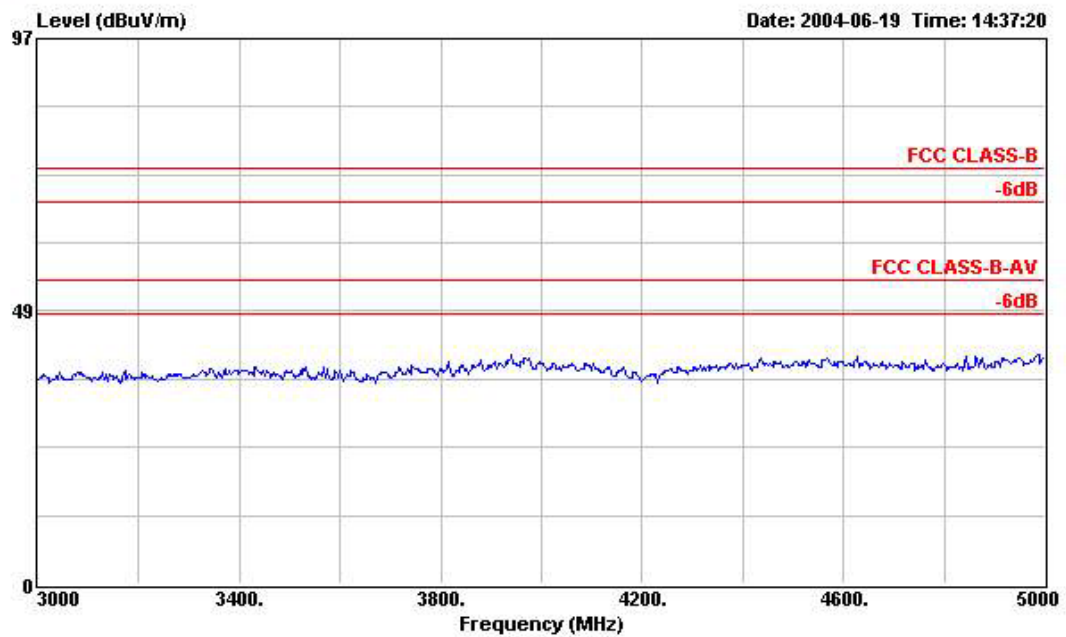

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11b TX CH11 2462MHz

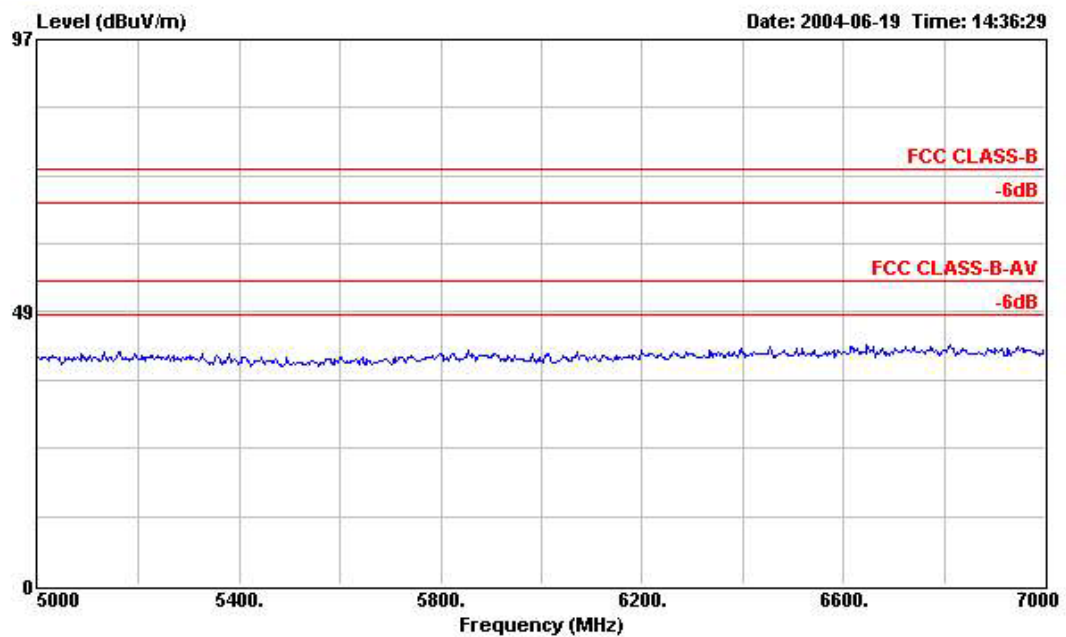

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11b TX CH11 2462MHz

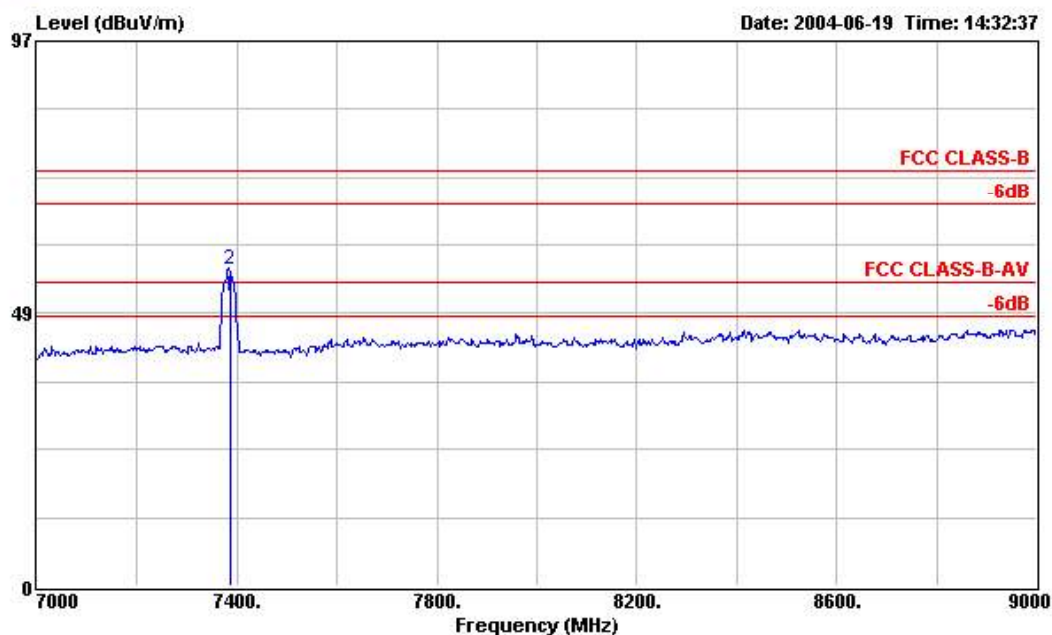


Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11b TX CH11 2462MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
			Limit	Line						Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7385.300	51.61	-2.39	54.00	54.91	36.46	2.76	42.52	Average	139	65
2	7385.300	56.32	-17.68	74.00	59.62	36.46	2.76	42.52	Peak	---	---

Mark:

Frequency from 73853MHz to 25000MHz, the emission emitted by the EUT is too low to be measured.

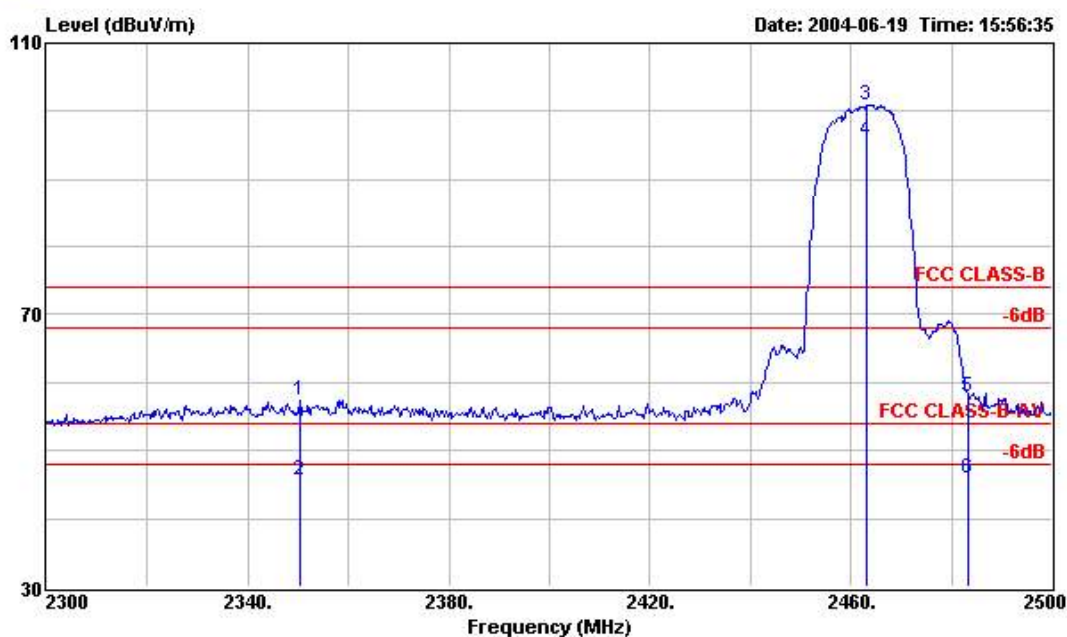


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11b TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2350.200	57.41	-16.59	74.00	27.65	28.04	1.72	0.00	Peak	---	---
2	2350.200	45.51	-8.49	54.00	15.75	28.04	1.72	0.00	Average	153	18
3 X	2463.000	100.98			70.85	28.34	1.79	0.00	Peak	---	---
4 X	2463.000	95.60			65.47	28.34	1.79	0.00	Average	150	15
5	2483.500	57.91	-16.09	74.00	27.73	28.39	1.79	0.00	Peak	---	---
6	2483.500	45.95	-8.05	54.00	15.77	28.39	1.79	0.00	Average	144	20

Remark: The "X" represent a fundamental frequency.

FCC TEST REPORT

Report No. :F452620

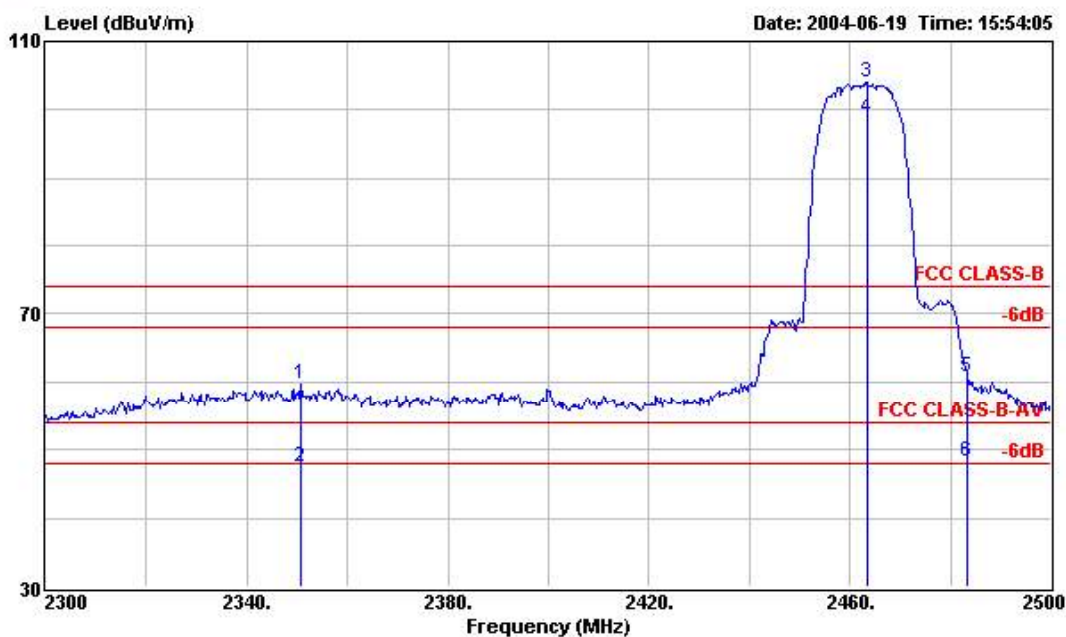

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11b TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2350.800	59.78	-14.22	74.00	30.02	28.04	1.72	0.00	Peak	---	---
2	2350.800	47.33	-6.67	54.00	17.57	28.04	1.72	0.00	Average	100	118
3 X	2463.600	103.92			73.79	28.34	1.79	0.00	Peak	---	---
4 X	2463.600	98.81			68.68	28.34	1.79	0.00	Average	100	120
5	2483.500	60.70	-13.30	74.00	30.52	28.39	1.79	0.00	Peak	---	---
6 !	2483.500	48.30	-5.70	54.00	18.12	28.39	1.79	0.00	Average	100	113

Remark: The "X" represent a fundamental frequency.

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Preamp	Limits	Emission	Margin	Detect	
Polarity	Factor	Loss		Factor					
(MHz)	(dB/m)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode	
2463.000	H	28.34	1.79	70.85	0.00	-	100.98	-	Peak
2463.000	H	28.34	1.79	65.47	0.00	-	95.60	-	AV
2463.600	V	28.34	1.79	73.79	0.00	-	103.92	-	Peak
2463.600	V	28.34	1.79	68.68	0.00	-	98.81	-	AV
7385.360	H	36.46	2.76	14.57	42.52	74.00	53.79	-20.21	Peak
7385.360	H	36.46	2.76	8.07	42.52	54.00	47.29	-6.71	AV
7385.300	V	36.46	2.76	17.10	42.52	74.00	56.32	-17.68	Peak
7385.300	V	36.46	2.76	12.39	42.52	54.00	51.61	-2.39	AV
9648.000	V/H	-	-	-	-	-	-	-	AV/Peak
12060.000	V/H	-	-	-	-	-	-	-	AV/Peak
14472.000	V/H	-	-	-	-	-	-	-	AV/Peak
16884.000	V/H	-	-	-	-	-	-	-	AV/Peak
19296.000	V/H	-	-	-	-	-	-	-	AV/Peak
21708.000	V/H	-	-	-	-	-	-	-	AV/Peak
24120.000	V/H	-	-	-	-	-	-	-	AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamp Factor


Test Engineer : 

Jay

7.4.4 Test Mode: Mode 4 (11g TX CH01)

- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :53%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

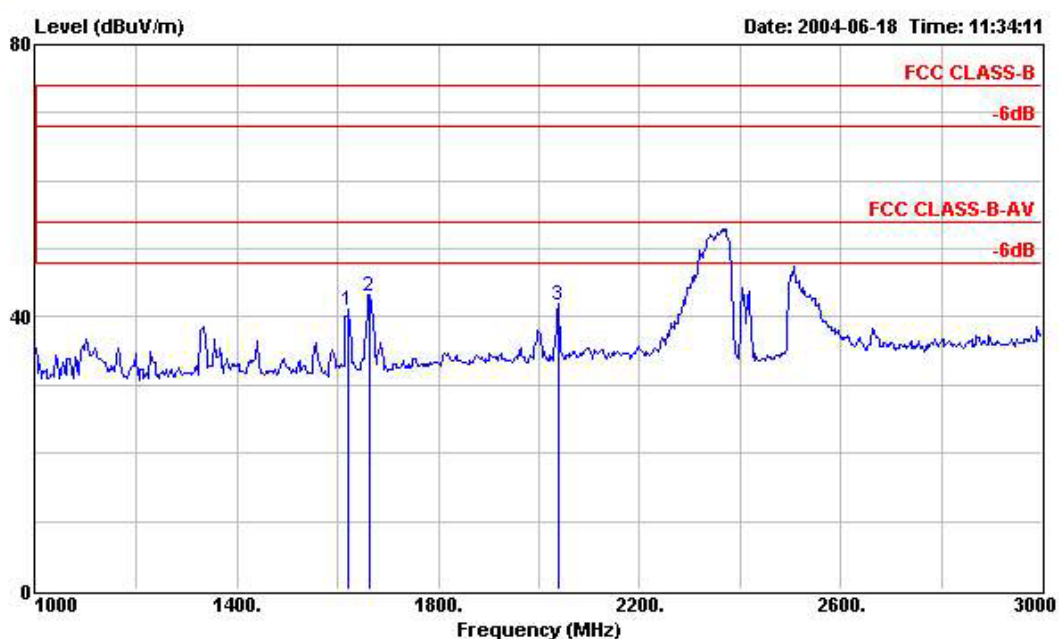


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1622.000	41.04	-32.96	74.00	54.49	25.71	1.52	40.68	Peak	---	---
2	1662.000	43.08	-30.92	74.00	56.38	25.86	1.54	40.70	Peak	---	---
3	2038.000	41.75	-32.25	74.00	53.82	27.21	1.65	40.93	Peak	---	---

FCC TEST REPORT


Report No. :F452620

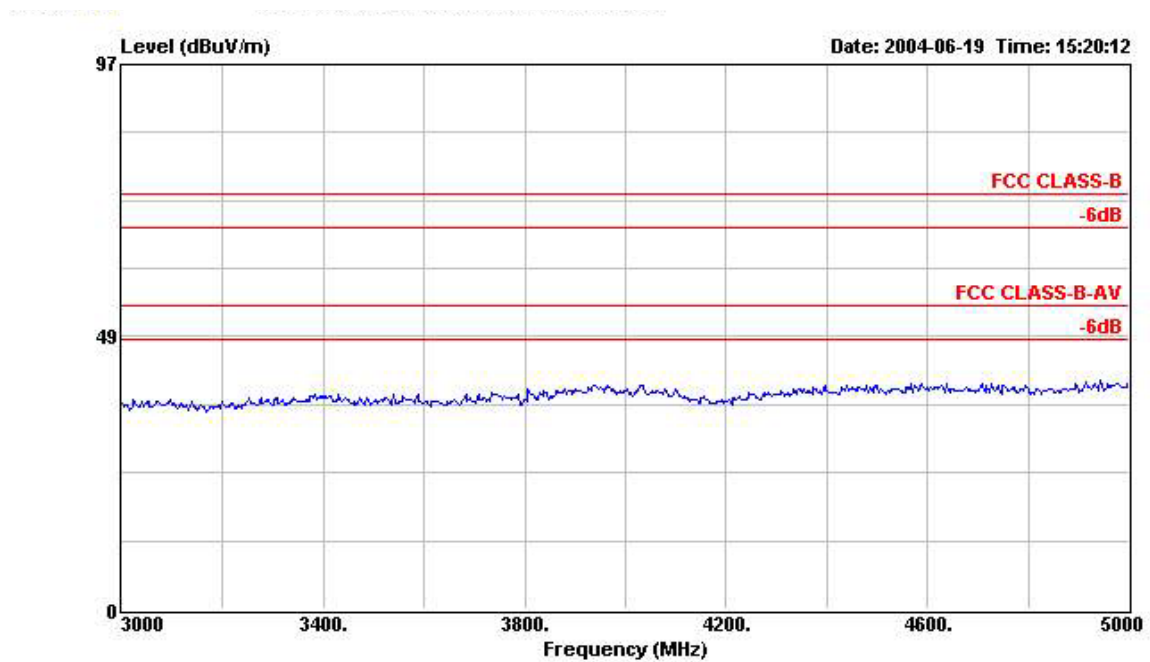


Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH01 2412MHz

FCC TEST REPORT

Report No. :F452620

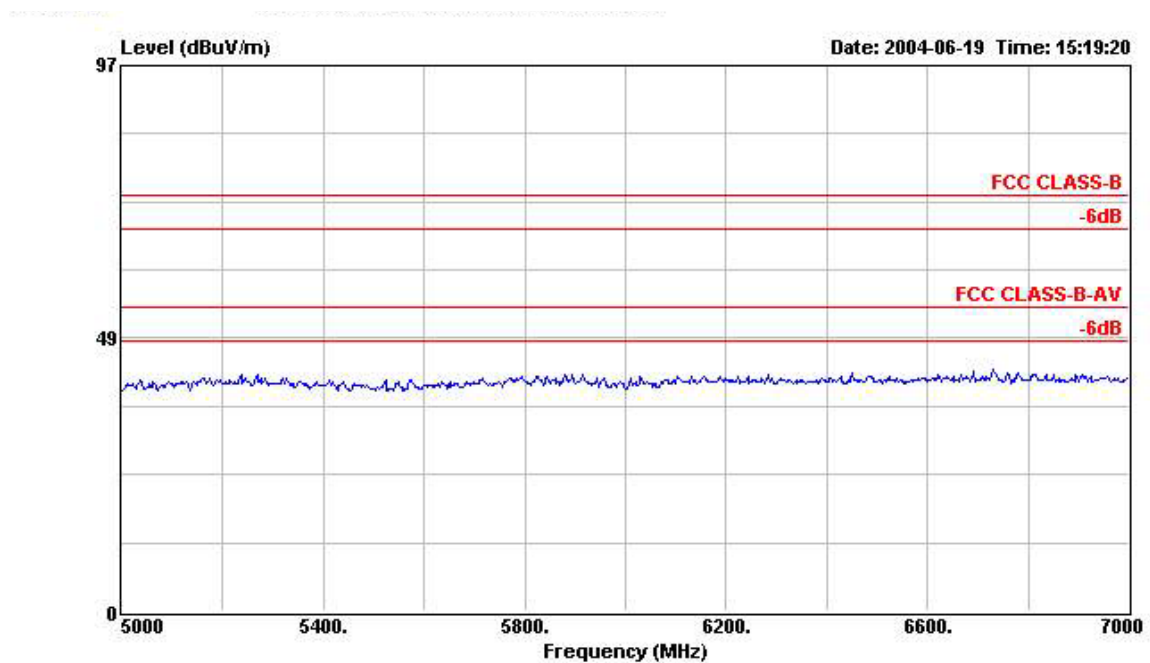

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH01 2412MHz

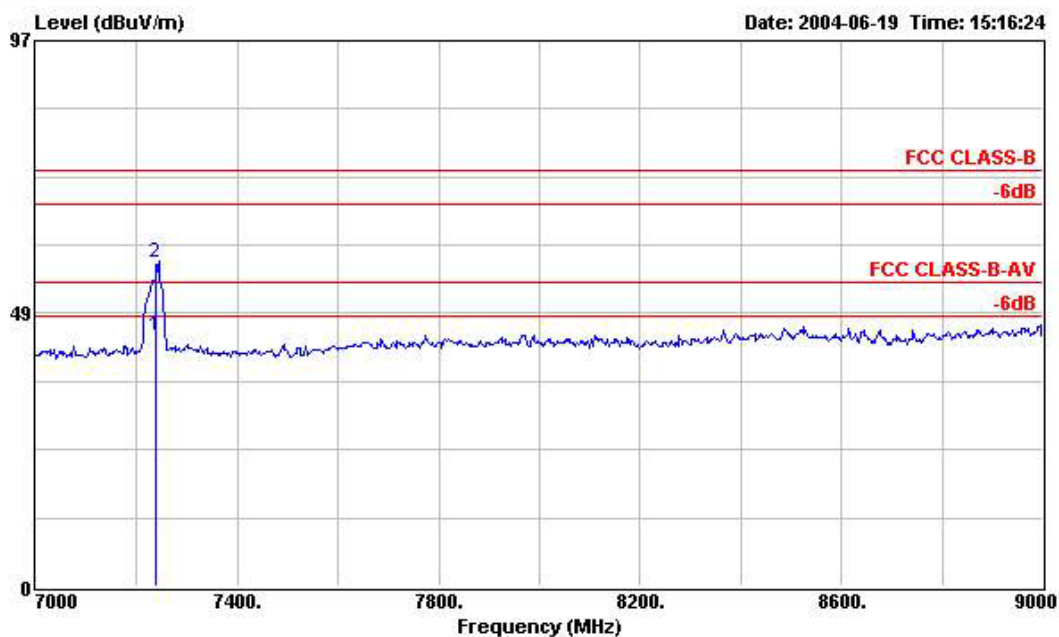


Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7239.160	44.52	-9.48	54.00	48.18	36.10	2.94	42.70	Average	100	332
2	7239.160	57.50	-16.50	74.00	61.16	36.10	2.94	42.70	Peak	---	---


Mark:

Frequency from 7239.16MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

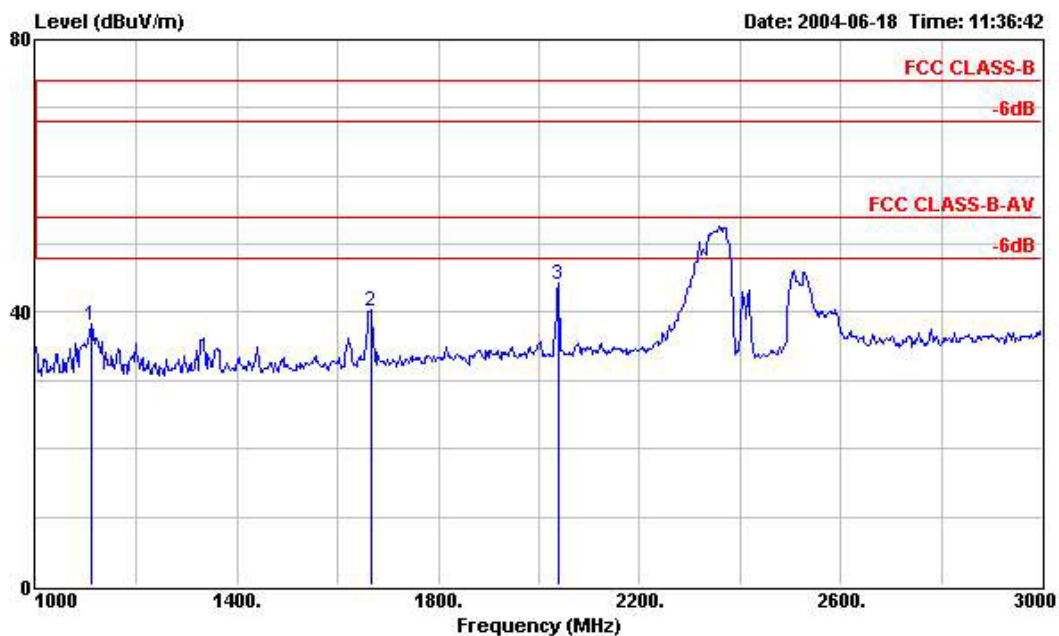


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH01 2412MHz


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1110.000	38.04	-35.96	74.00	52.90	24.13	1.23	40.22	Peak	---	---
2	1668.000	40.20	-33.80	74.00	53.48	25.88	1.55	40.71	Peak	---	---
3	2038.000	44.01	-29.99	74.00	56.08	27.21	1.65	40.93	Peak	---	---

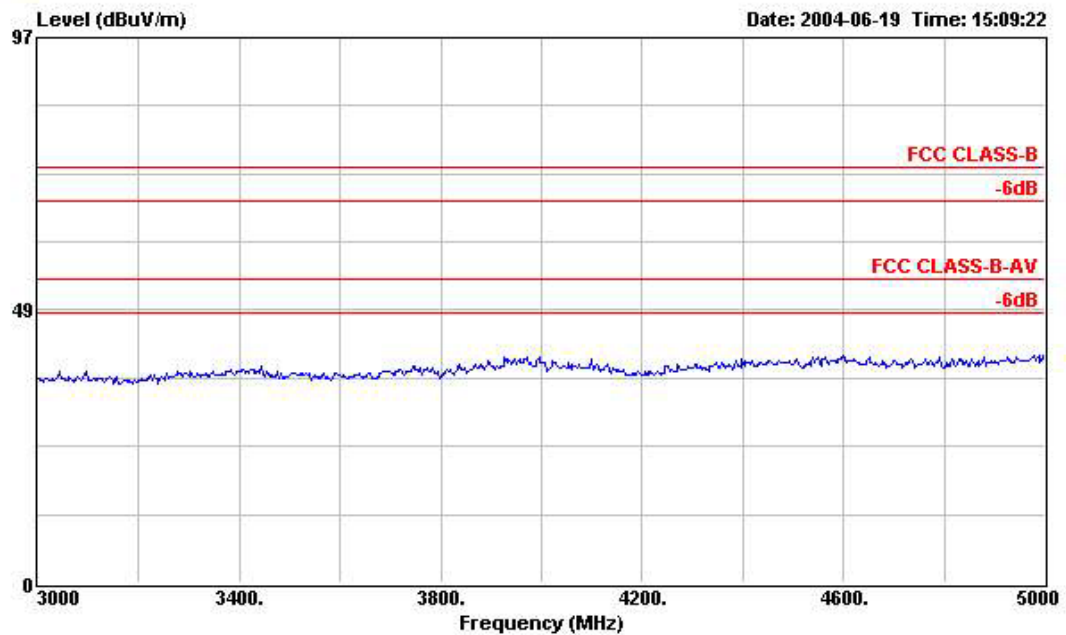

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH01 2412MHz

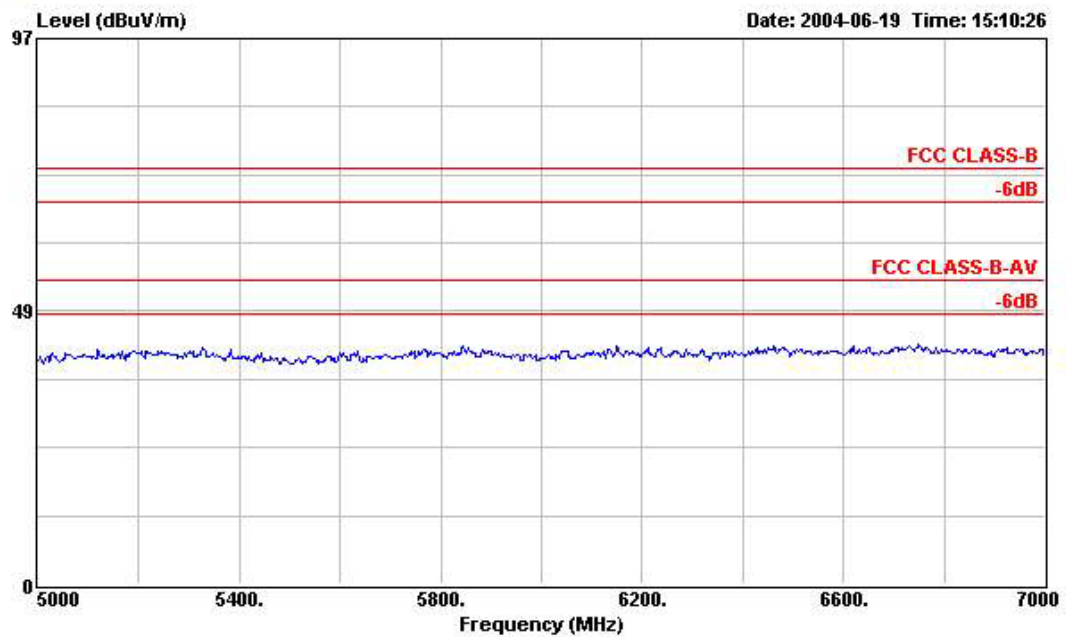

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH01 2412MHz

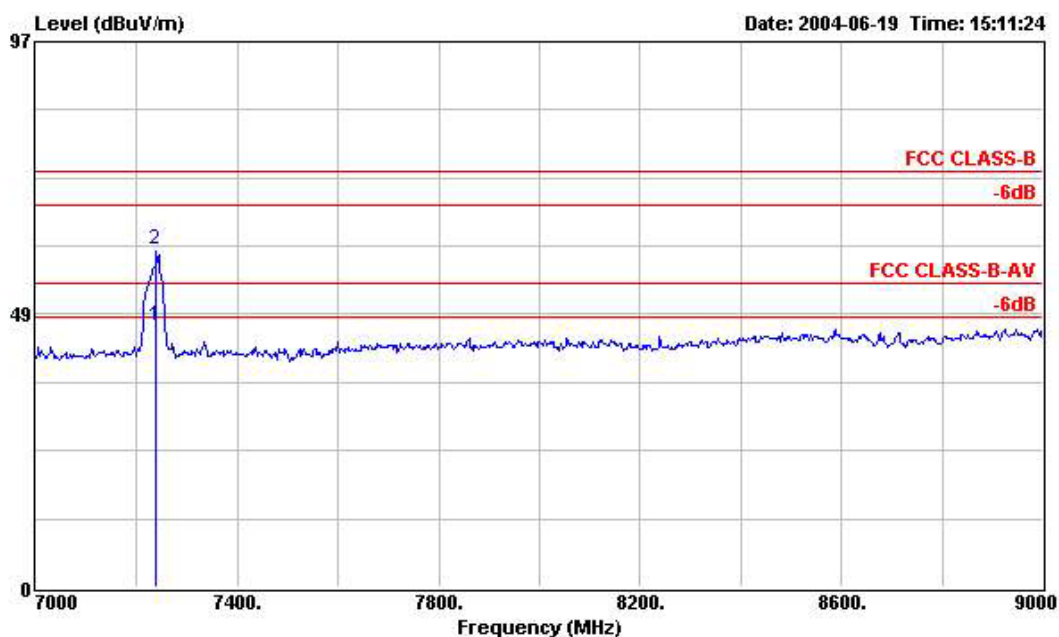


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH01 2412MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7239.060	46.39	-7.61	54.00	50.05	36.10	2.94	42.70	Average	150	351
2	7239.060	60.11	-13.89	74.00	63.77	36.10	2.94	42.70	Peak	---	---

Mark:


Frequency from 7239.06MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

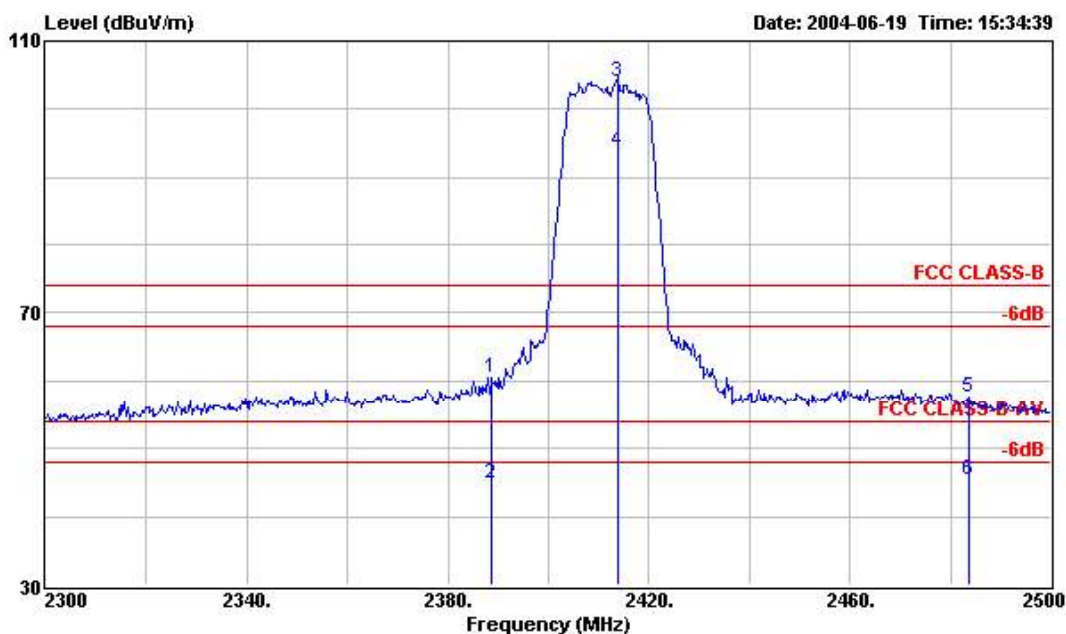

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2388.600	60.55	-13.45	74.00	30.67	28.14	1.74	0.00	Peak	---	---
2	2388.600	44.94	-9.06	54.00	15.06	28.14	1.74	0.00	Average	100	121
3 X	2414.000	104.01			74.04	28.21	1.76	0.00	Peak	---	---
4 X	2414.000	93.93			63.96	28.21	1.76	0.00	Average	100	161
5	2483.800	57.67	-16.33	74.00	27.49	28.39	1.79	0.00	Peak	---	---
6	2483.800	45.33	-8.67	54.00	15.15	28.39	1.79	0.00	Average	100	138

Remark: The "X" represent a fundamental frequency.

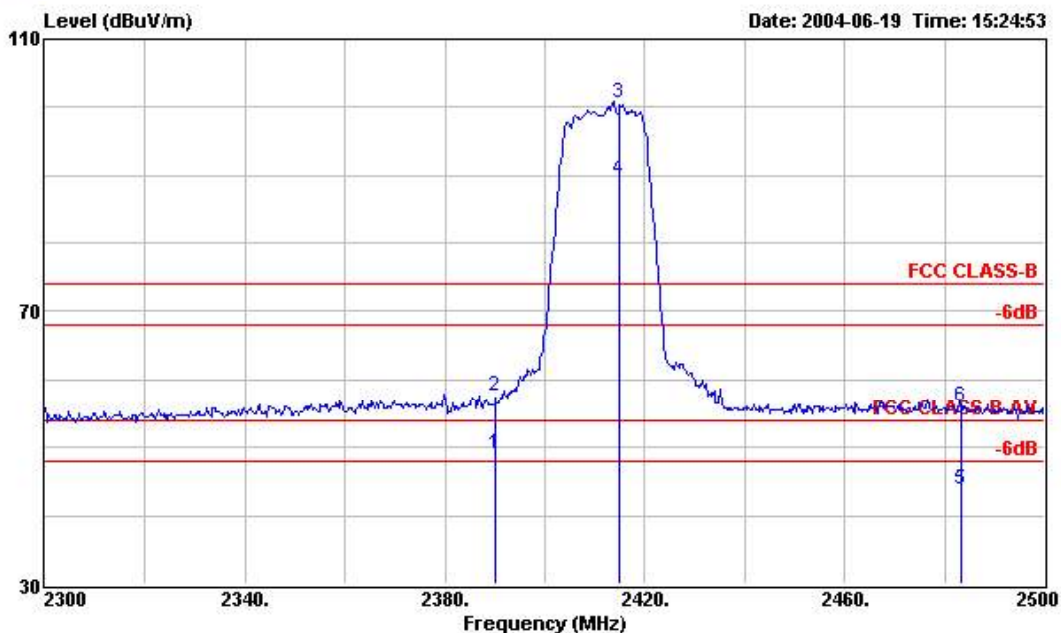

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	2390.000	49.14	-4.86	54.00	19.26	28.14	1.74	0.00	Average	124	277
2	2390.000	57.52	-16.48	74.00	27.64	28.14	1.74	0.00	Peak	---	---
3 X	2415.000	100.63			70.66	28.21	1.76	0.00	Peak	---	---
4 X	2415.000	89.45			59.48	28.21	1.76	0.00	Average	118	264
5	2483.500	43.80	-10.20	54.00	13.62	28.39	1.79	0.00	Average	115	276
6	2483.500	56.13	-17.87	74.00	25.95	28.39	1.79	0.00	Peak	---	---

Remark: The "X" represent a fundamental frequency.

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Preamp	Limits	Emission	Margin	Detect	
Polarity	Factor	Loss		Factor					
(MHz)	(dB/m)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode	
2414.000	H	28.21	1.76	74.04	0.00	-	104.01	-	Peak
2414.000	H	28.21	1.76	63.96	0.00	-	93.93	-	Av
2415.000	V	28.21	1.76	70.66	0.00	-	100.63	-	Peak
2415.000	V	28.21	1.76	59.48	0.00	-	89.45	-	Av
7239.160	H	36.10	2.94	18.46	42.70	74.00	57.50	-16.50	Peak
7239.160	H	36.10	2.94	5.48	42.70	54.00	44.52	-9.48	Av
7239.060	V	36.10	2.94	21.07	42.70	74.00	60.11	-13.89	Peak
7239.060	V	36.10	2.94	7.35	42.70	54.00	46.39	-7.61	Av
9648.000	V/H	-	-	-	-	-	-	-	AV/Peak
12060.000	V/H	-	-	-	-	-	-	-	AV/Peak
14472.000	V/H	-	-	-	-	-	-	-	AV/Peak
16884.000	V/H	-	-	-	-	-	-	-	AV/Peak
19296.000	V/H	-	-	-	-	-	-	-	AV/Peak
21708.000	V/H	-	-	-	-	-	-	-	AV/Peak
24120.000	V/H	-	-	-	-	-	-	-	AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamp Factor

Test Engineer :




Jay

7.4.5 Test Mode: Mode 5 (11g TX CH06)


- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :53%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

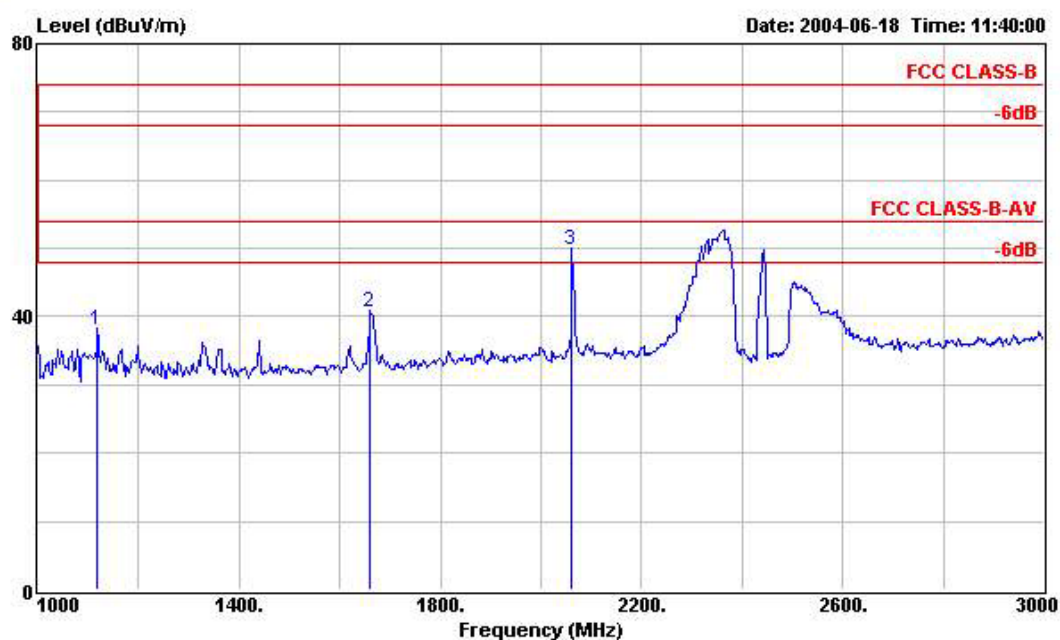


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1118.000	38.13	-35.87	74.00	52.97	24.16	1.23	40.23	Peak	---	---
2	1660.000	40.76	-33.24	74.00	54.07	25.85	1.54	40.70	Peak	---	---
3	2062.000	49.68	-24.32	74.00	61.69	27.27	1.66	40.94	Peak	---	---

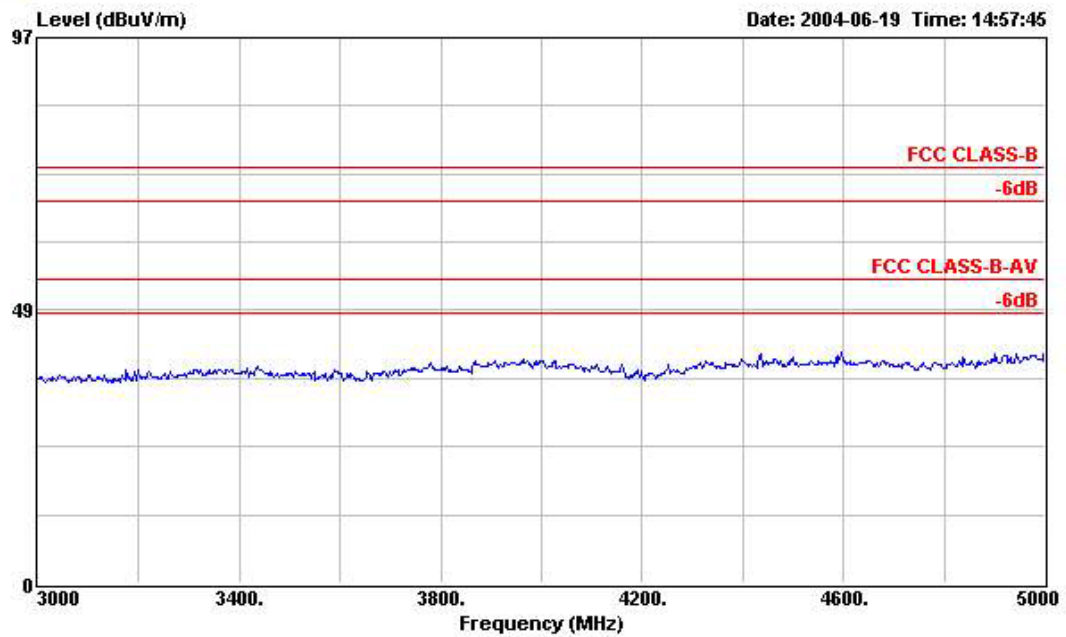


Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH06 2437MHz

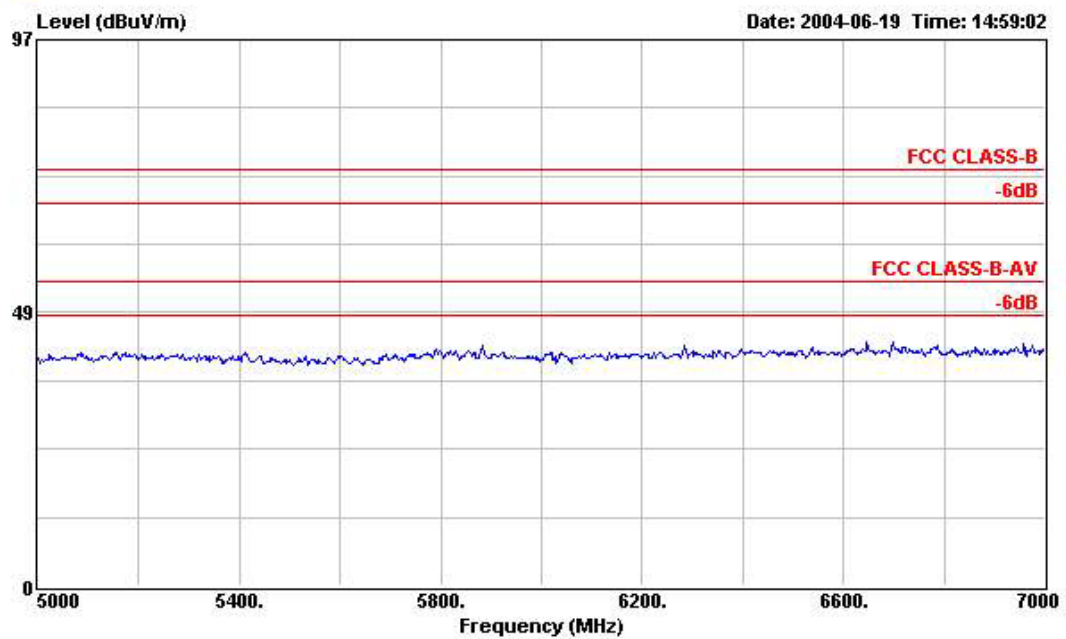

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH06 2437MHz

FCC TEST REPORT

Report No. :F452620

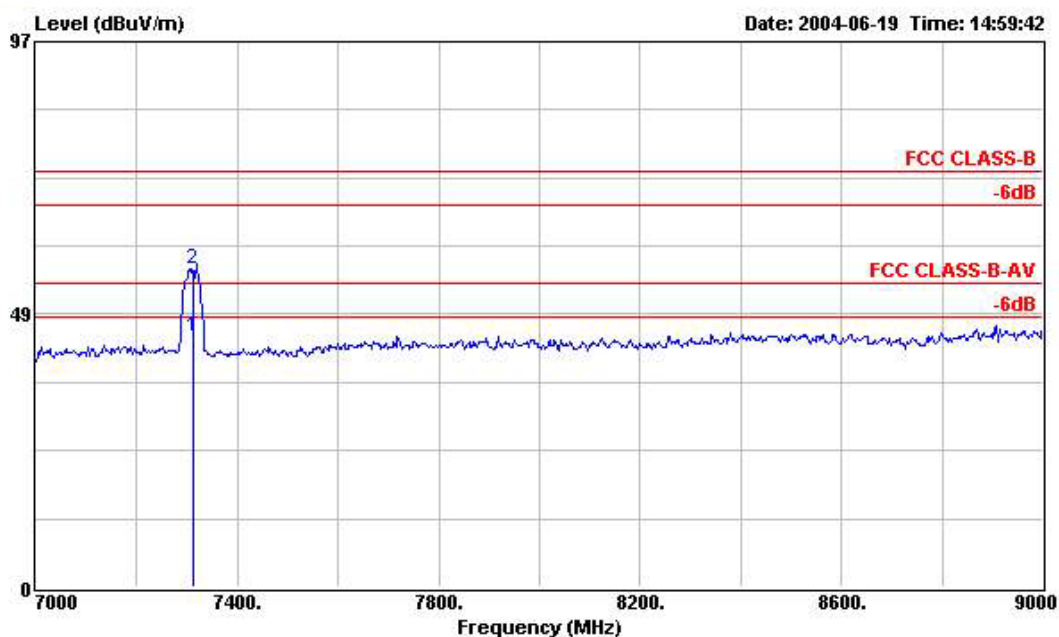


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH06 2437MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7311.160	44.46	-9.54	54.00	47.94	36.28	2.85	42.61	Average	100	31
2	7311.160	56.59	-17.41	74.00	60.07	36.28	2.85	42.61	Peak	---	---


Mark:

Frequency from 7311.16MHz to 25000MHz, the emission emitted by the EUT is too low to be measured.

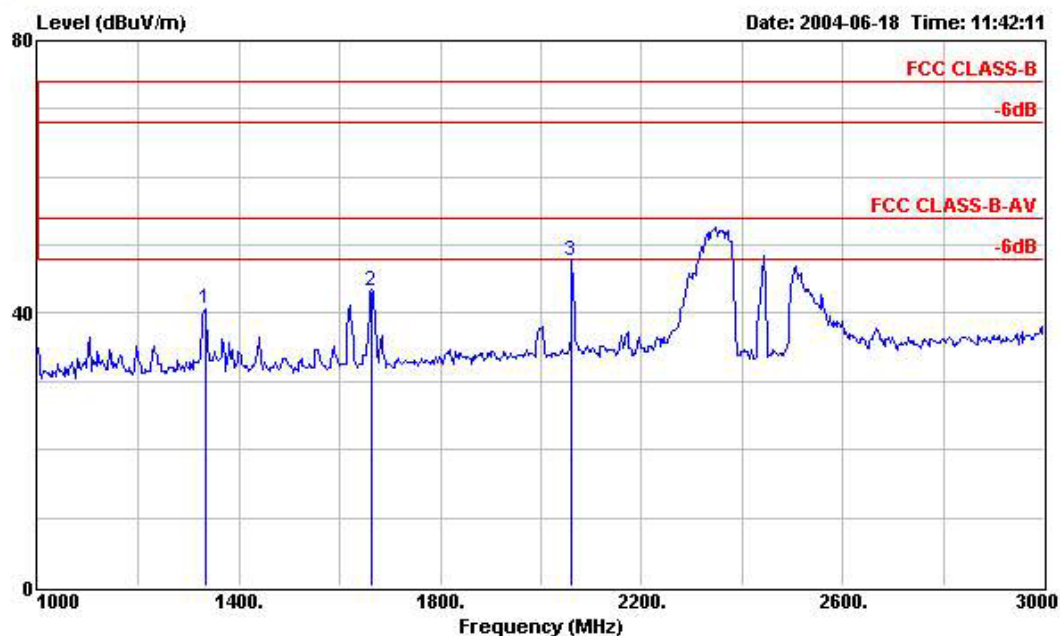


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH06 2437MHz


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1332.000	40.60	-33.40	74.00	54.92	24.77	1.35	40.44	Peak	---	---
2	1662.000	43.36	-30.64	74.00	56.66	25.86	1.54	40.70	Peak	---	---
3	2062.000	47.71	-26.29	74.00	59.72	27.27	1.66	40.94	Peak	---	---

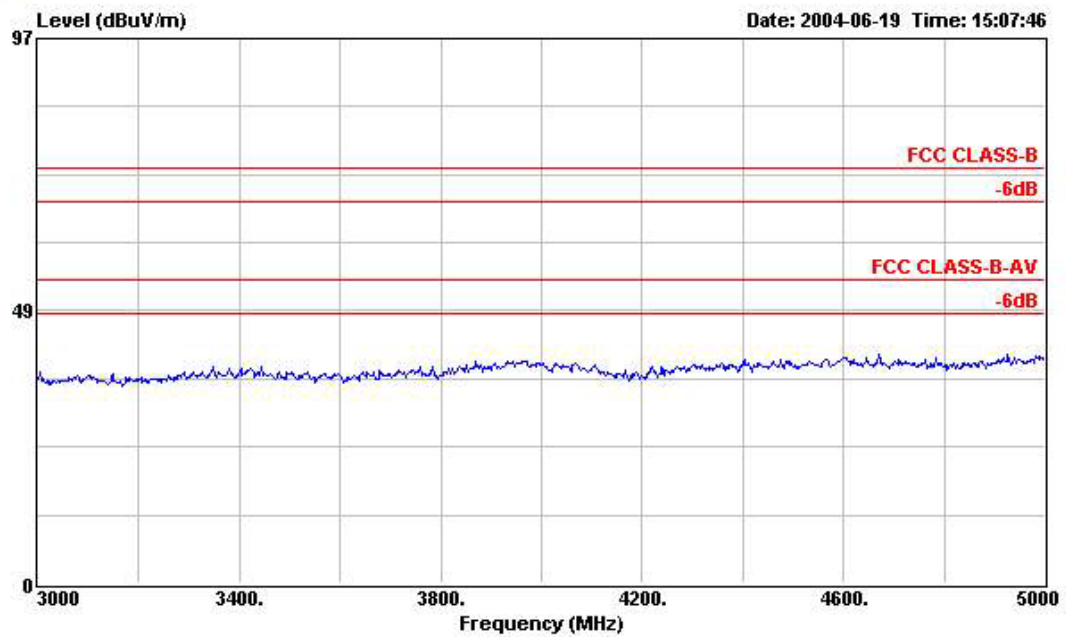

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH06 2437MHz

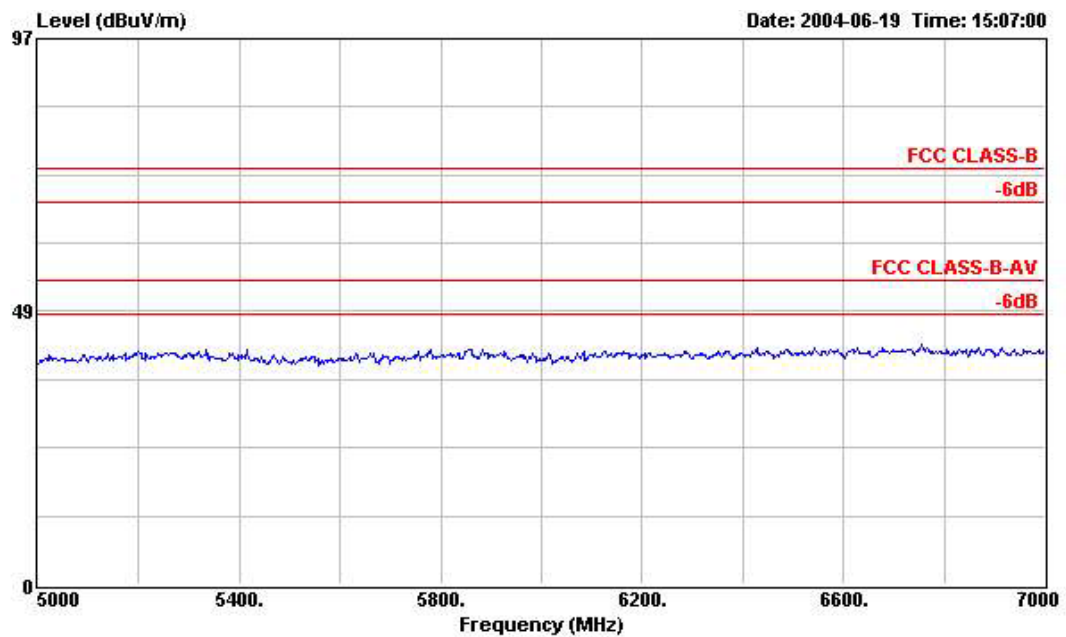

Site : 03CH03-HY
Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
EUT : USB downgo
Power : AC 110V / 60Hz
Model : EW-7317Ug
Memo : 11g TX CH06 2437MHz

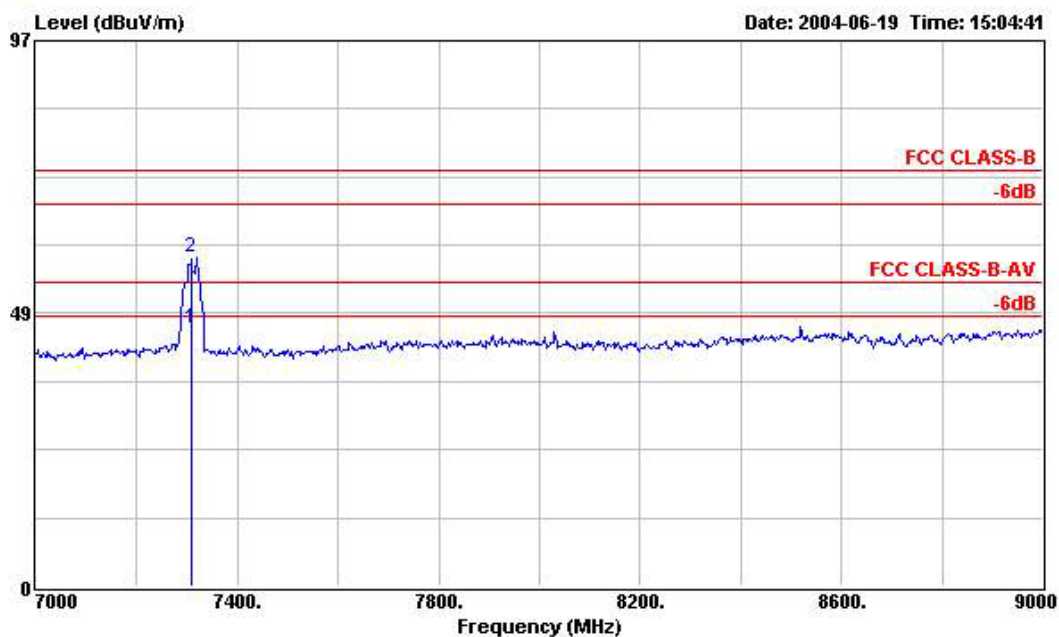

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH06 2437MHz


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7308.000	45.92	-8.08	54.00	49.41	36.27	2.86	42.62	Average	100	332
2	7308.000	58.38	-15.62	74.00	61.87	36.27	2.86	42.62	Peak	---	---

Mark:

Frequency from 7308MHz to 25000MHz, the emission emitted by the EUT is too low to be measured.

FCC TEST REPORT


Report No. :F452620

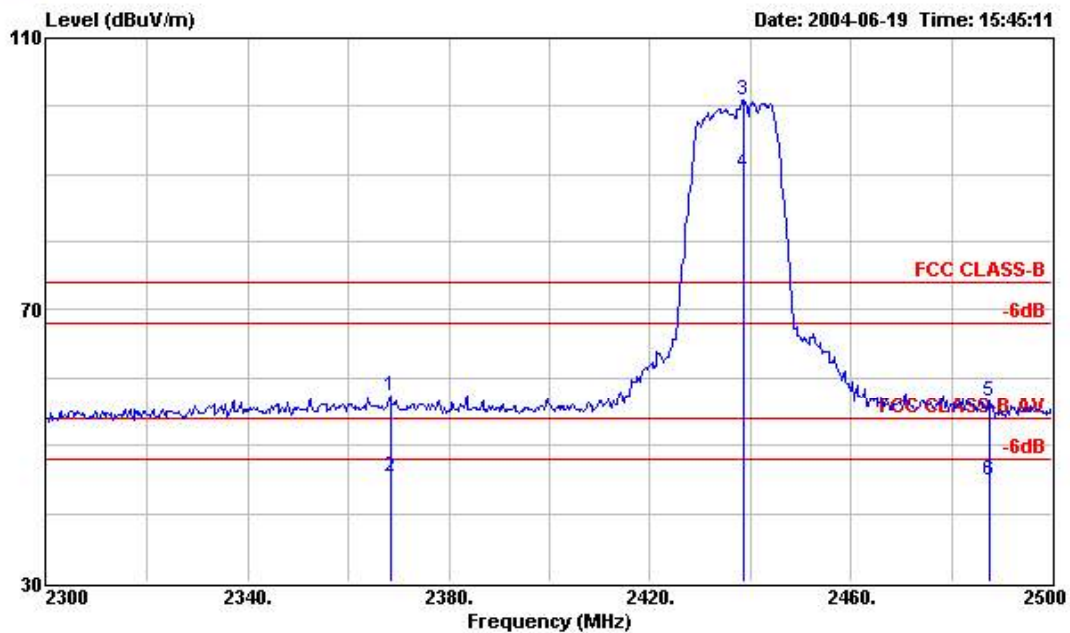

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 HORIZONTAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH06 2437MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	Remark	Pos	Pos
1	2368.400	57.43	-16.57	74.00	27.61	28.09	1.73	0.00	Peak	---	---
2	2368.400	45.37	-8.63	54.00	15.55	28.09	1.73	0.00	Average	100	311
3 X	2438.800	100.95			70.91	28.27	1.77	0.00	Peak	---	---
4 X	2438.800	90.17			60.13	28.27	1.77	0.00	Average	100	300
5	2487.600	56.46	-17.54	74.00	26.27	28.40	1.79	0.00	Peak	---	---
6	2487.600	44.77	-9.23	54.00	14.58	28.40	1.79	0.00	Average	100	297

Remark: The "X" represent a fundamental frequency.

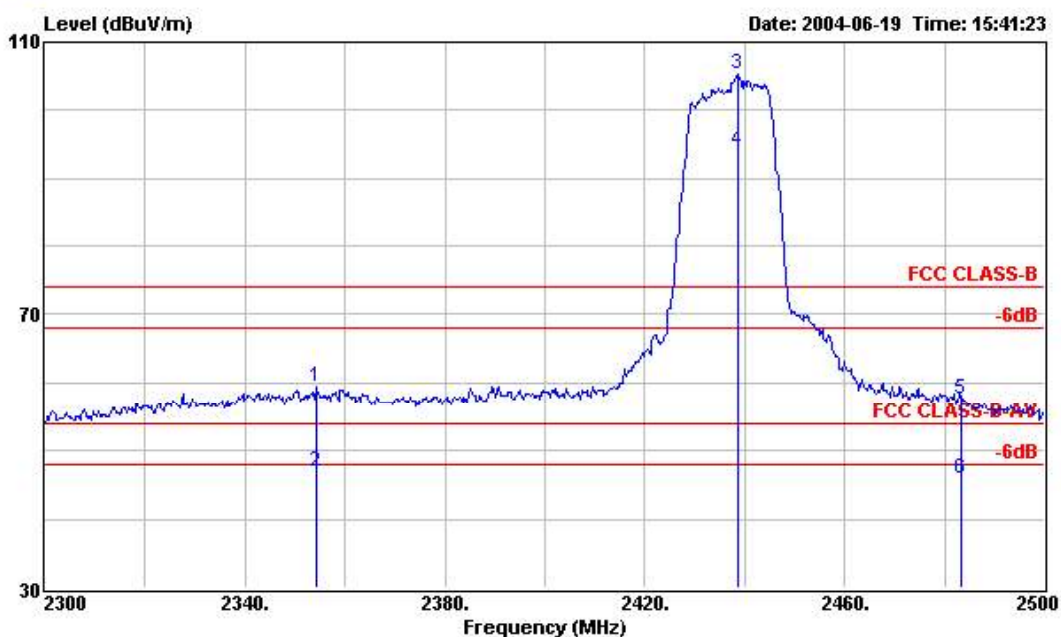

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m HORN-ANT-6821 VERTICAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2354.200	59.43	-14.57	74.00	29.66	28.05	1.72	0.00	Peak	---	---
2	2354.200	46.91	-7.09	54.00	17.14	28.05	1.72	0.00	Average	115	315
3 X	2438.800	105.28			75.24	28.27	1.77	0.00	Peak	---	---
4 X	2438.800	94.22			64.18	28.27	1.77	0.00	Average	113	339
5	2483.500	57.73	-16.27	74.00	27.55	28.39	1.79	0.00	Peak	---	---
6	2483.500	45.96	-8.04	54.00	15.78	28.39	1.79	0.00	Average	110	337

Remark: The "X" represent a fundamental frequency.

■ Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Preamp	Limits	Emission	Margin	Detect	
Polarity	Factor	Loss		Factor					
(MHz)	(dB/m)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode	
2438.800	H	28.27	1.77	70.91	0.00	-	100.95	-	Peak
2438.800	H	28.27	1.77	60.13	0.00	-	90.17	-	Av
2438.800	V	28.27	1.77	75.24	0.00	-	105.28	-	Peak
2438.800	V	28.27	1.77	64.18	0.00	-	94.22	-	Av
7311.160	H	36.28	2.85	17.46	42.61	74.00	56.59	-17.41	Peak
7311.160	H	36.28	2.85	5.33	42.61	54.00	44.46	-9.54	Av
7308.000	V	36.27	2.86	19.25	42.62	74.00	58.38	-15.62	Peak
7308.000	V	36.27	2.86	6.79	42.62	54.00	45.92	-8.08	Av
9648.000	V/H	-	-	-	-	-	-	-	AV/Peak
12060.000	V/H	-	-	-	-	-	-	-	AV/Peak
14472.000	V/H	-	-	-	-	-	-	-	AV/Peak
16884.000	V/H	-	-	-	-	-	-	-	AV/Peak
19296.000	V/H	-	-	-	-	-	-	-	AV/Peak
21708.000	V/H	-	-	-	-	-	-	-	AV/Peak
24120.000	V/H	-	-	-	-	-	-	-	AV/Peak

Remark:

1. The emission emitted by the EUT is too low to be measured except the emission listed above,
2. Reading = Reading on SA-Preamp Factor


Test Engineer :

Jay

7.4.6 Test Mode: Mode 6 (11g TX CH11)

- Test Distance : 3 m
- Temperature : 23°C
- Relative Humidity :53%
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

■ The test that passed at minimum margin was marked by the frame in the following table.

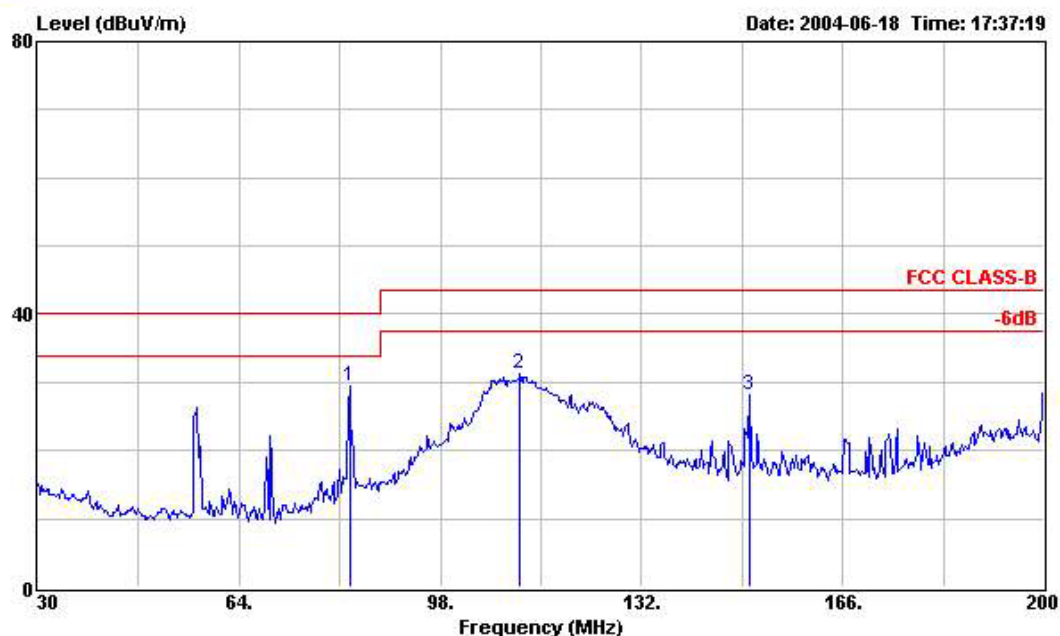


Site : 03CH03-HY
 Condition : FCC CLASS-B 3m BIC-9124--301 HORIZONTAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	82.700	29.56	-10.44	40.00	46.26	9.67	1.56	27.93	Peak	---	---
2	111.430	31.21	-12.29	43.50	46.75	10.46	1.88	27.88	Peak	---	---
3	150.190	28.14	-15.36	43.50	41.29	12.39	2.26	27.80	Peak	---	---

FCC TEST REPORT

Report No. :F452620

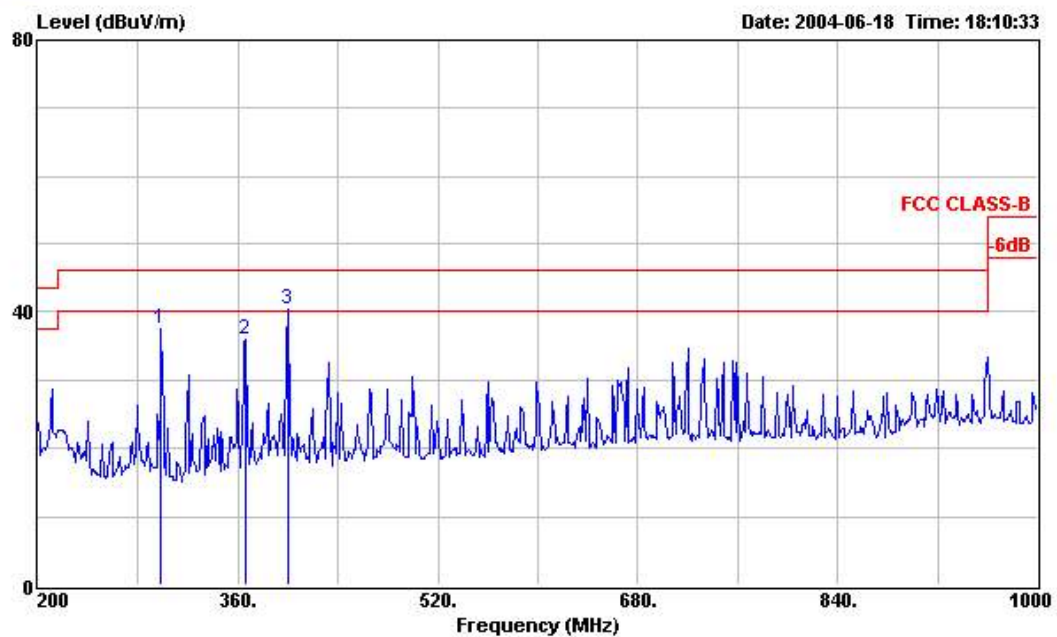

Site : 03CH03-HY
 Condition : FCC CLASS-B 3m LOG-9111-221 HORIZONTAL
 EUT : USB downgo
 Power : AC 110V / 60Hz
 Model : EW-7317Ug
 Memo : 11g TX CH11 2462MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	298.400	37.44	-8.56	46.00	48.51	13.16	3.08	27.31	Peak	---	---
2	365.600	35.87	-10.13	46.00	44.88	15.27	3.35	27.63	Peak	---	---
3	400.000	40.48	-5.52	46.00	49.02	15.79	3.47	27.80	Peak	155	347