

FCC TEST REPORT

For

Sky Phone LLC

SKY F3P

Model No.: SKY F3P

Prepared For : Sky Phone LLC
Address : 1348 Washington Av. Suite 350, Miami Beach, FL 33139 United States

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217110081W2
Date of Test : Nov. 01~13, 2017
Date of Report : Nov. 28, 2017

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. Description Of Test Setup.....	7
1.6. Test Equipment List.....	9
1.7. Measurement Uncertainty.....	10
1.8. Description of Test Facility.....	10
2. Summary of Test.....	11
2.1. Summary of test result.....	11
2.2. Test mode.....	11
3. RF Output Power Test.....	13
3.1. Test Standard and Limit.....	13
3.2. Test Setup.....	13
3.3. Test Procedure.....	13
3.4. Test Data.....	13
4. Peak-Average Ratio.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	16
4.4. Test Dat.....	16
5. Modulation Characteristic.....	18
6. Occupied Bandwidth.....	19
6.1. Test Standard and Limit.....	19
6.2. Test Setup.....	19
6.3. Test Procedure.....	19
6.4. Test Data.....	19
7. Spurious Emissions at Antenna Terminals.....	23
7.1. Test Standard and Limit.....	23
7.2. Test Setup.....	23
7.3. Test Procedure.....	23
7.4. Test Data.....	23
8. Spurious Radiated Emissions.....	31
8.1. Test Standard and Limit.....	31
8.2. Test Setup.....	31
8.3. Test Procedure.....	31
8.4. Test Data.....	31
9. Band Edge Compliance.....	37
9.1. Test Standard and Limit.....	37
9.2. Test Setup.....	37
9.3. Test Procedure.....	37

9.4. Test Data.....	37
10. Frequency Stability.....	44
10.1. Test Standard and Limit.....	44
10.2. Test Setup.....	44
10.3. Test Procedure.....	44
10.4. Test Data.....	44
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	48
APPENDIX II -- PHOTOGRAPH.....	49

Anbotek

TEST REPORT

Applicant : Sky Phone LLC
Manufacturer : Maysun Info Technology Co., Ltd
Product Name : SKY F3P
Model No. : SKY F3P
Trade Mark : SKY DEVICES
Rating(s) : Input DC 5V, 0.5A (Battery DC 3.7V, 1000mAh)

Test Standard(s) : FCC PART 2, FCC Part 22(H), FCC Part 24(E)

Test Method(s) : ANSI/TIAC603 D: 2010

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Nov. 01~13, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Sky Phone LLC
Address	:	1348 Washington Av. Suite 350, Miami Beach, FL 33139 United States
Manufacturer	:	Maysun Info Technology Co., Ltd
Address	:	10th floor, B10 Building, Lilang Industrial Zone, Buji Town, Longgang District, Shenzhen

1.2. Description of Device (EUT)

Product Name	:	SKY F3P
Model No.	:	SKY F3P
Trade Mark	:	SKY DEVICES
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter DC 3.7V Battery inside
Product Description	:	Operation Frequency: GSM850 TX:824.2~848.8 MHz; RX:869.2~893.8 MHz PCS1900 TX:1850.2~1909.8 MHz; RX:1930.2~1989.8 MHz UMTS-FDD Band 2 TX:1852.4~1907.6 MHz; RX: 1932.4~1987.6 MHz
	:	Modulation Type: GPRS: GMSK UMTS-FDD: QPSK
	:	Antenna Type: PIFA Antenna
	:	Antenna Gain(Peak): 0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for GSM and WCDMA		

1.3. Auxiliary Equipment Used During Test

N/A	:	N/A
-----	---	-----


1.4. Description of Test Modes

The following is the description of how the EUT is exercised during testing.



Test	Description Of Operation
Emissions Testing	The EUT was communicating with base station and set to work at maximum output power.
Others Testing	The EUT was communicating with base station and set to work at maximum output power.

1.5. Description Of Test Setup

1.5.1 Conducted Test Setup

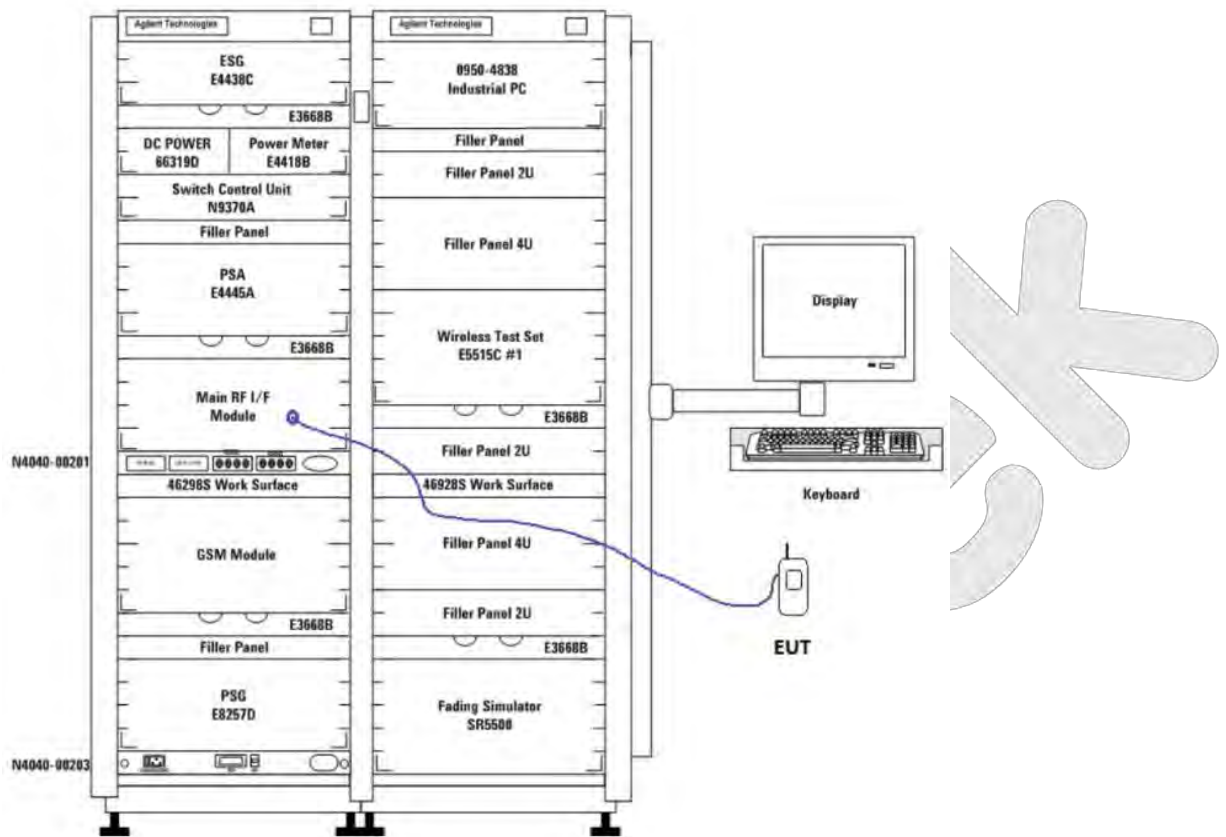

1.5.2 Radiated Test Setup

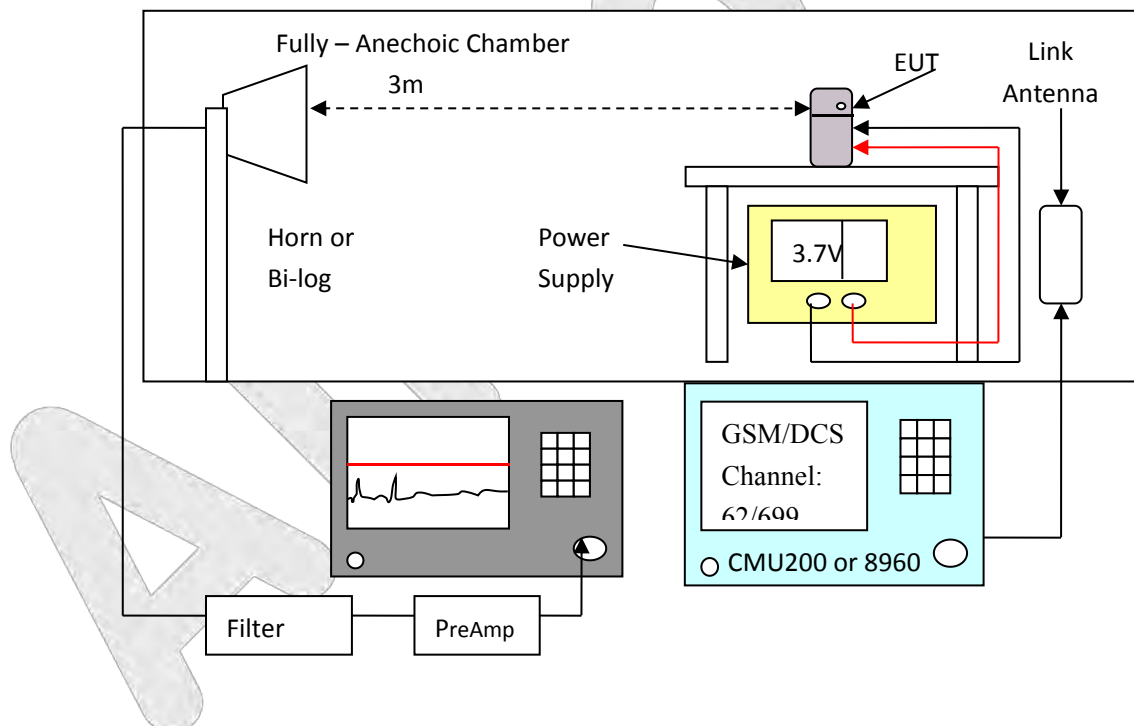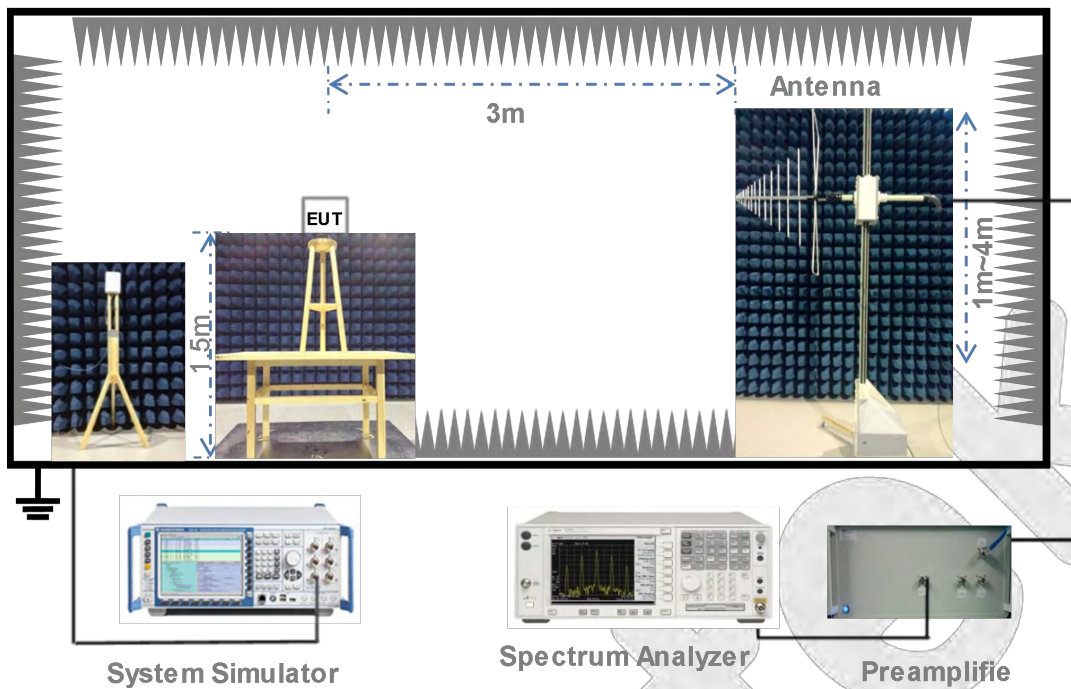

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	DAER	RPR3006W	15100041SN045	May 27, 2017	1 Year
13.	Power Sensor	DAER	RPR3006W	15100041SN046	May 27, 2017	1 Year
14.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
17.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
18.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year
19	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year

1.7. Measurement Uncertainty

Maximum measurement uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$
RF output power, conducted	$\pm 1,5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 6 \text{ dB}$
Temperature	$\pm 1 \text{ }^{\circ} \text{C}$
Humidity	$\pm 5 \%$
DC and low frequency voltages	$\pm 3 \%$
Time	$\pm 5 \%$
Duty Cycle	$\pm 5 \%$

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited.

at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test

2.1. Summary of test result

FCC Rules	Description of Test	Result
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10); § 27.50(d.4)	RF Output Power	Compliance
§ 24.232 (d); § 27.50(d)	Peak-Average Ratio	Compliance
§ 2.1047	Modulation Characteristics	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238; § 27.53(a.5)	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a); § 27.53(h)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a); § 27.53(h)	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a); § 27.53(h)	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; § 27.5(h); § 27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

2.2. Test mode

During all testing, EUT is in link mode with base station emulator at maximum power level in each test mode and channel as below:

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

Mode	Channel	Frequency(MHz)
UMTS BAND II	9262	1852.4
	9400	1880.0
	9538	1907.6


Mode	Channel	Frequency(MHz)
GSM 850	128	824.2
	190	836.6
	251	848.8
PCS 1900	512	1850.2
	661	1880.0
	810	1909.8

3. RF Output Power Test

3.1. Test Standard and Limit

Spec	Item	Requirement
§22.913 (a)	a)	ERP:38.45dBm
§24.232 (c)	b)	EIRP:33dBm

3.2. Test Setup

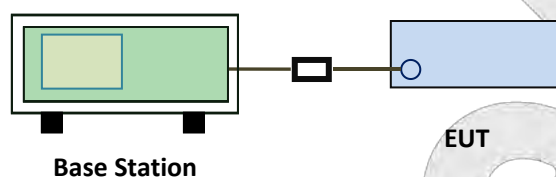

3.3. Test Procedure

For Conducted Power:

The transmitter output port was connected to base station.

Set EUT at maximum power through base station.

Select lowest, middle, and highest channels for each band and different test mode.

For ERP/EIRP:

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$.

3.4. Test Data

Please to see the following pages

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	31.15	31.45	31.66	31 ± 1	29.19	29.47	29.74	29 ± 1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	30.49	31.02	30.77	31 ± 0.6	28.76	29.15	29.02	29 ± 1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	30.24	30.17	30.40	30 ± 0.5	28.21	28.44	28.68	28 ± 1
GPRS Multi-Slot Class 12 (4 uplink) GMSK (4 uplink),GMSK	28.97	29.04	29.19	29 ± 1	26.32	26.47	26.36	26 ± 1
Remark : GPRS, CS1 coding scheme. Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link								

UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)
RMC 12.2kbps	9262	1852.4	21.62
	9400	1880.0	21.54
	9538	1907.6	21.44

Radiated Output power

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	10.92	V	7.88	0.85	17.95	33
1852.4	11.45	H	7.88	0.85	18.48	33
1880	11.04	V	7.88	0.85	18.07	33
1880	11.76	H	7.88	0.85	18.69	33
1907.6	10.98	V	7.86	0.85	17.99	33
1907.6	11.52	H	7.86	0.85	18.53	33

ERP & EIRP ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	19.49	V	6.8	0.53	25.76	38.45
824.2	19.26	H	6.8	0.53	25.53	38.45
836.6	19.64	V	6.8	0.53	25.91	38.45
836.6	19.78	H	6.8	0.53	26.05	38.45
848.8	19.17	V	6.9	0.53	25.54	38.45
848.8	19.56	H	6.9	0.53	25.93	38.45

EIRP for PCS Band (Part 24E)


Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	14.36	V	7.88	0.85	21.39	33
1850.2	15.27	H	7.88	0.85	22.30	33
1880	14.54	V	7.88	0.85	21.57	33
1880	15.25	H	7.88	0.85	22.28	33
1909.8	14.33	V	7.86	0.85	21.34	33
1909.8	15.47	H	7.86	0.85	22.48	33

4. Peak-Average Ratio

4.1. Test Standard and Limit

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2. Test Setup

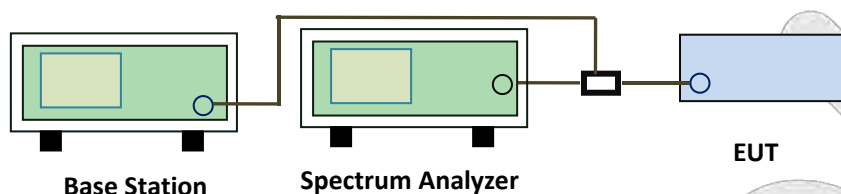

4.3. Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.4. Test Dat

GSM 1900

Frequency (MHz)	Peak-Average Ratio(PAR)
1850.2	3.02
1880.0	2.39
1909.8	3.70

GPRS 1900

Frequency (MHz)	Peak-Average Ratio(PAR)
1850.2	2.74
1880.0	3.01
1909.8	2.64

WCDMA1900

Frequency (MHz)	Peak-Average Ratio(PAR)
1852.4	2.11
1880.0	2.15
1907.6	2.16

Anbotek

5. Modulation Characteristic

According to FCC § 2.1047(d), Part 22H, 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


Anbotek

6. Occupied Bandwidth

6.1. Test Standard and Limit

Spec	Item	Requirement
§2.1049, §22.917, §22.905 §24.238	a)	99% Occupied Bandwidth(kHz)
	b)	26 dB Bandwidth(kHz)

6.2. Test Setup

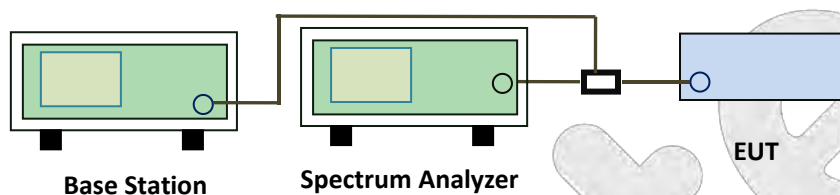

6.3. Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.
The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.

6.4. Test Data

Cellular Band (Part 22H) result

GSM850

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
128	824.2	245.62	317.80
190	836.6	243.44	318.00
251	848.8	248.27	319.80

GPRS850

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
128	824.2	246.46	315.6
190	836.6	243.65	315.6
251	848.8	245.31	320.1

PCS Band (Part 24E) result

GSM1900

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
512	1850.2	243.87	321.40
661	1880.0	248.76	325.10
810	1909.8	246.62	319.50


GPRS 1900


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
512	1850.2	245.43	318.0
661	1880.0	249.39	325.1
810	1909.8	245.55	315.7

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1151	4.858
9400	1880.0	4.1232	4.895
9538	1907.6	4.2302	4.870

Test Plots

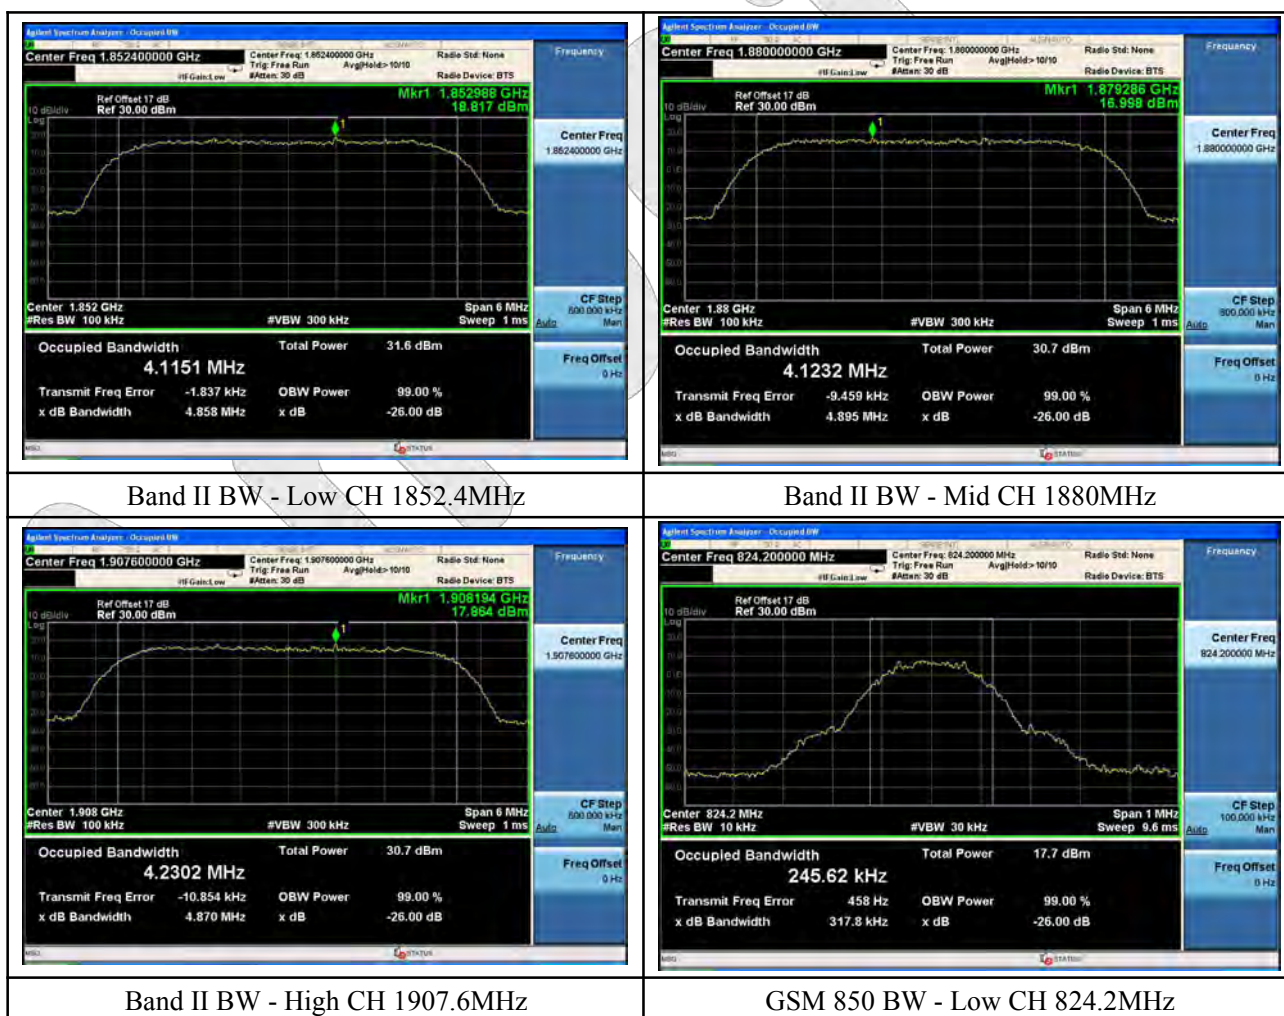

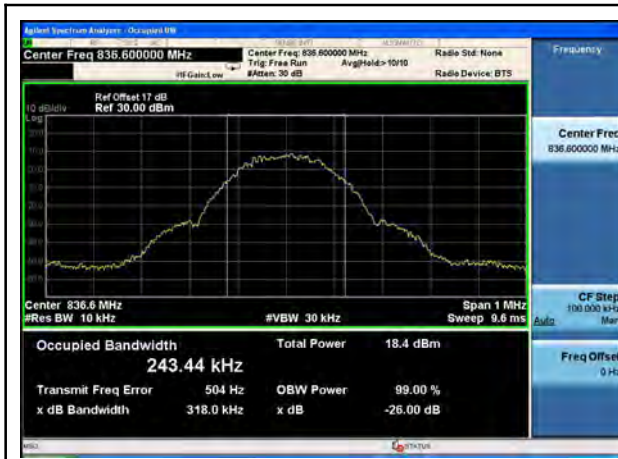

GSM 850 BW - Mid CH 836.6MHz



GSM 850 BW - High CH 848.8MHz



PCS 1900 BW - Low CH 1850.2MHz




PCS 1900 BW - Mid CH 1880MHz



PCS 1900 BW - High CH 1909.8MHz



GPRS 850 BW - Low CH 824.2MHz

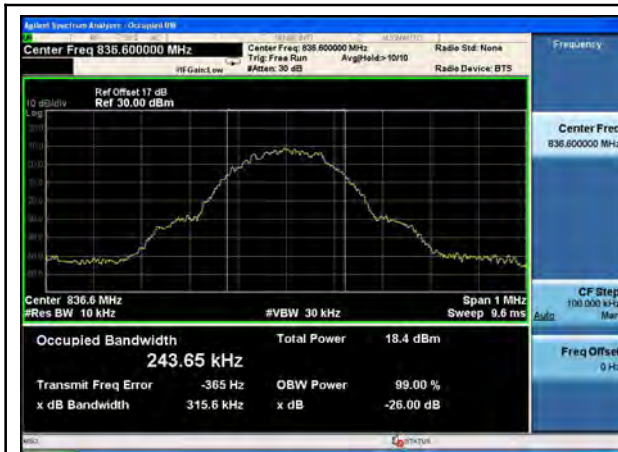

GPRS 850 BW - Mid CH 836.6MHz




GPRS 850 BW - High CH 848.8MHz



GPRS 1900 BW - Low CH 1850.2MHz



GPRS 1900 BW - Mid CH 1880MHz

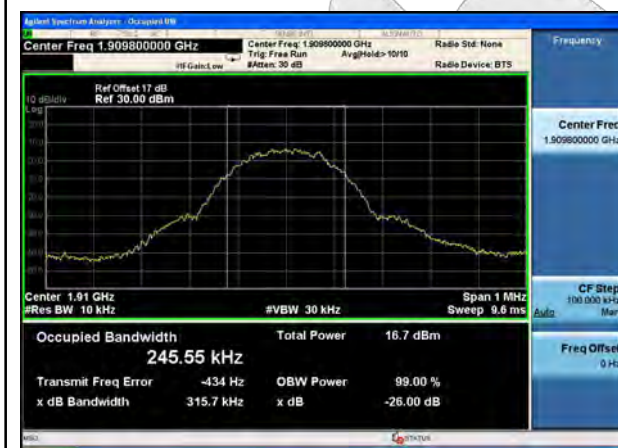


GPRS 1900 BW - High CH 1909.8MHz

7. Spurious Emissions at Antenna Terminals

7.1. Test Standard and Limit

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency outside the frequency band by at least $(43 + 10 \log P)$ dB, in this case, -13dBm.

7.2. Test Setup

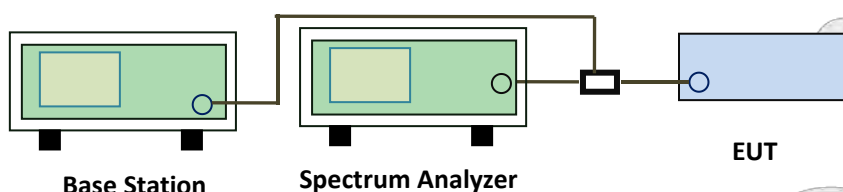


7.3. Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.
The Band Edges of low and high channels for the highest RF powers were measured.
Setting RBW as roughly BW/100.



7.4. Test Data


Test Plots

Cellular Band (Part 22H) result

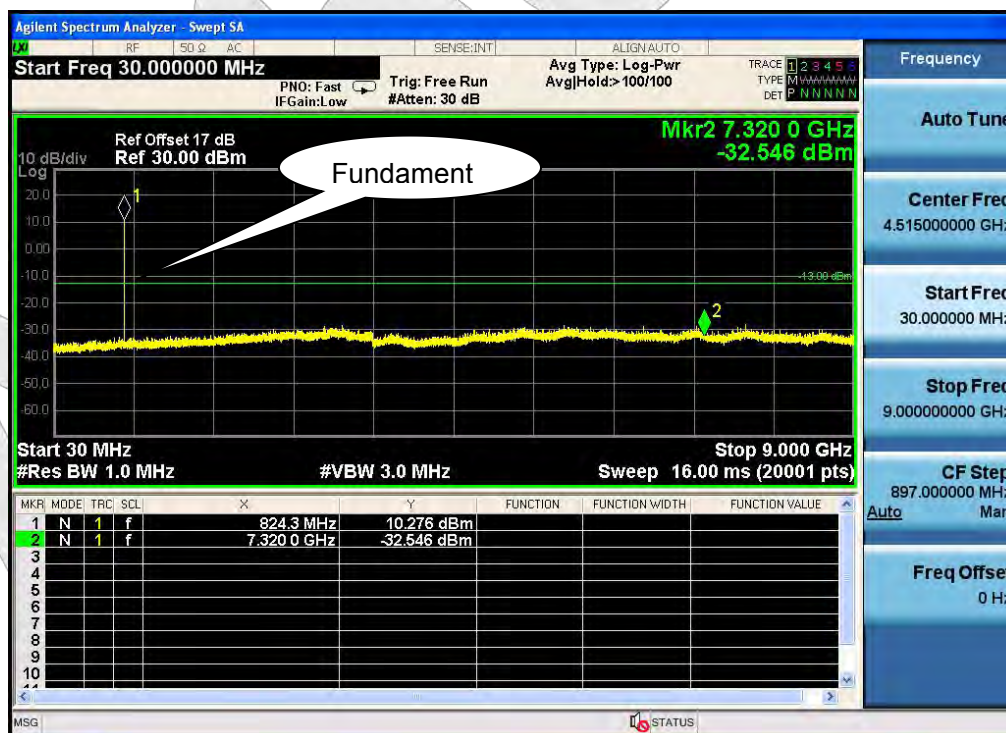


Test Mode:GSM 850 - Low Channel

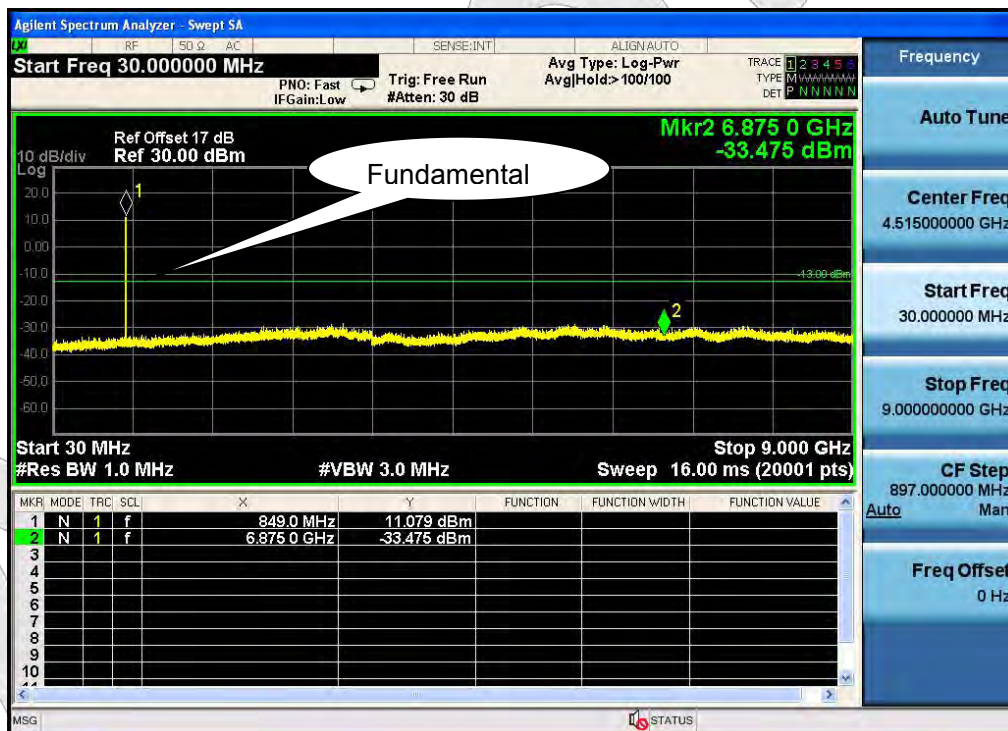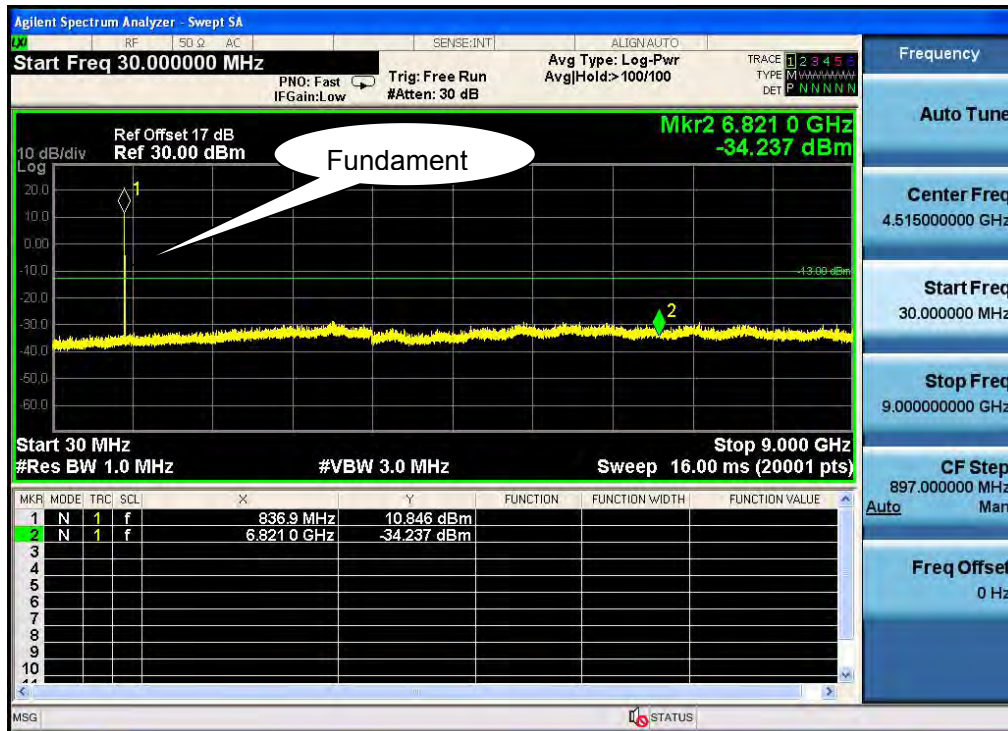


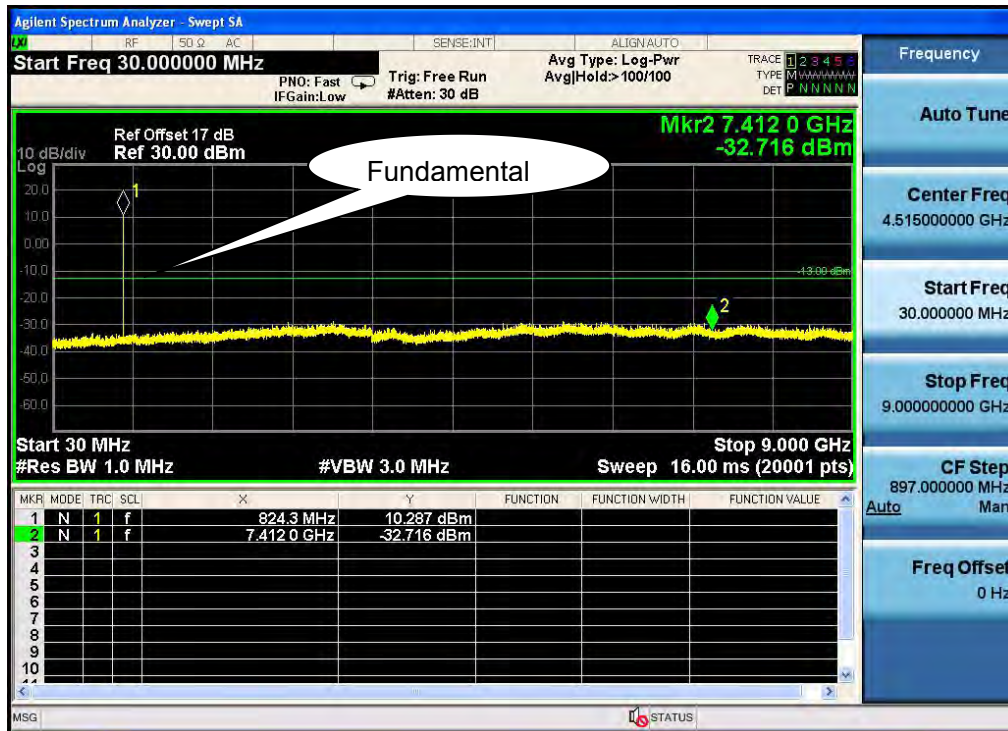

Test Mode:GPRS 850 - Low Channel

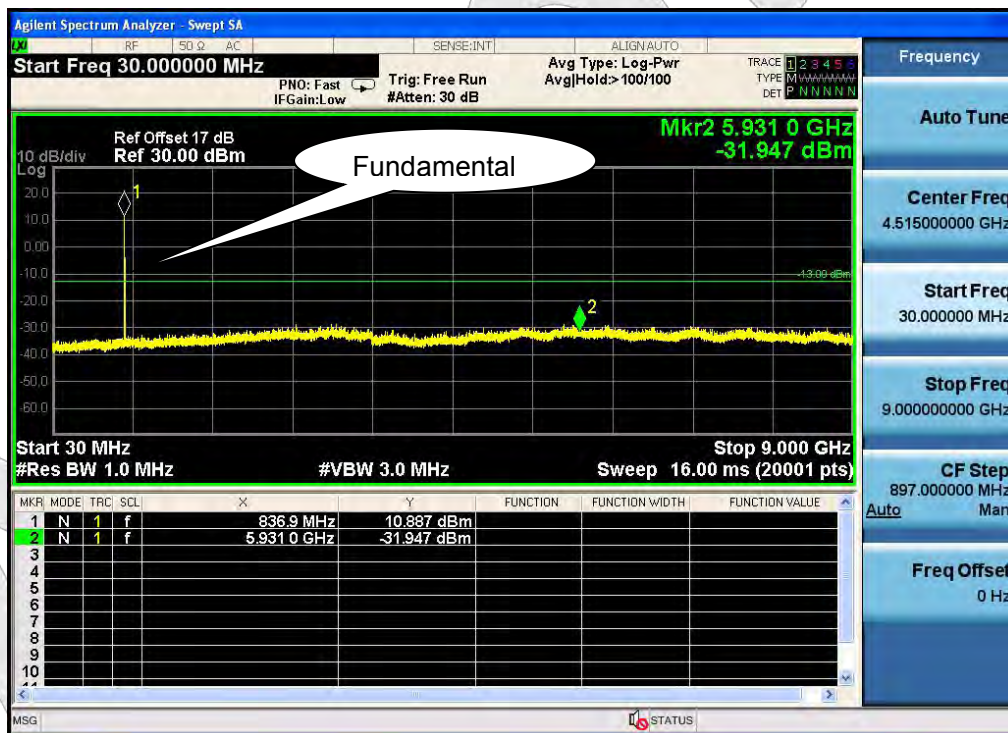


Test Mode:GPRS 850 - Middle Channel

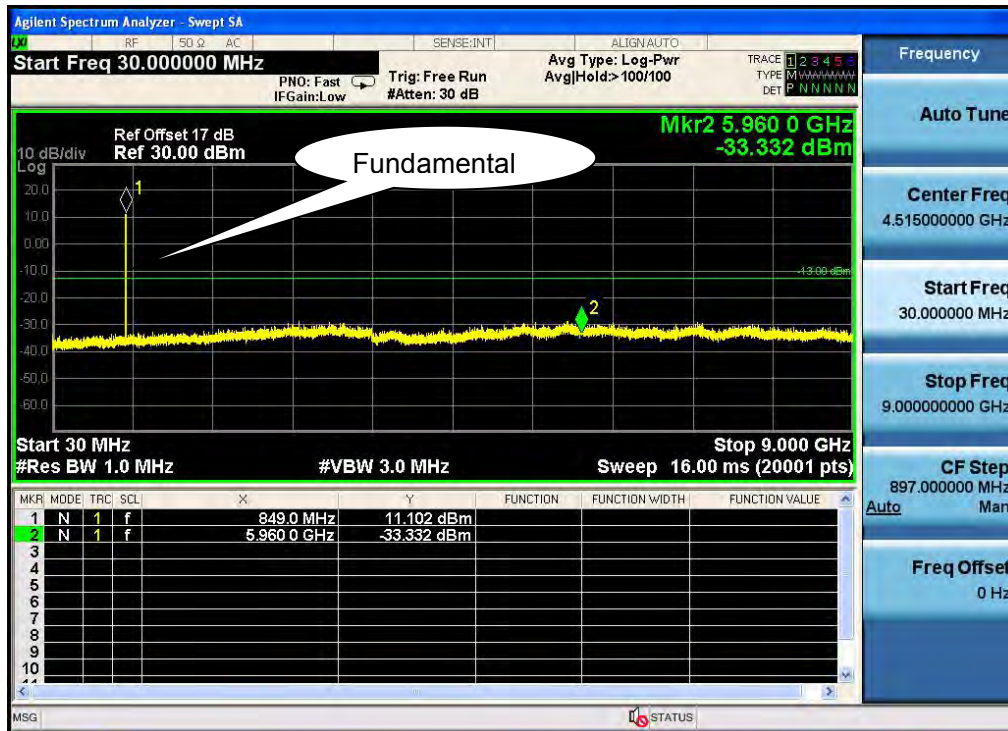


Test Mode:GPRS 850 - High Channel


PCS Band (Part24E) result

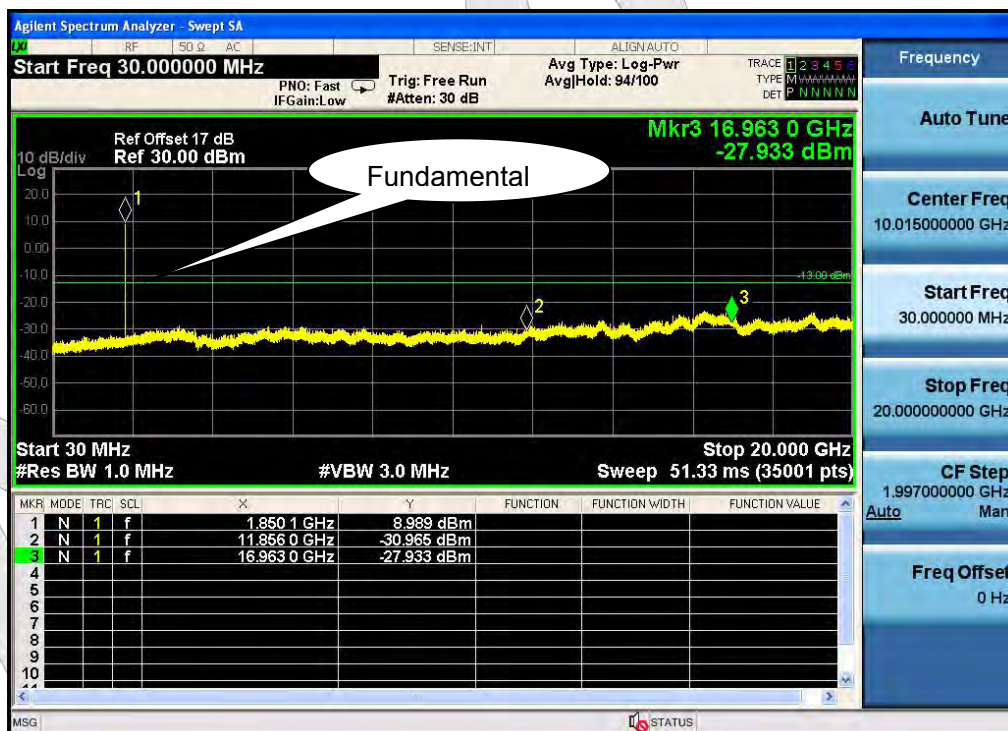


Test Mode:PCS1900 - Low Channel

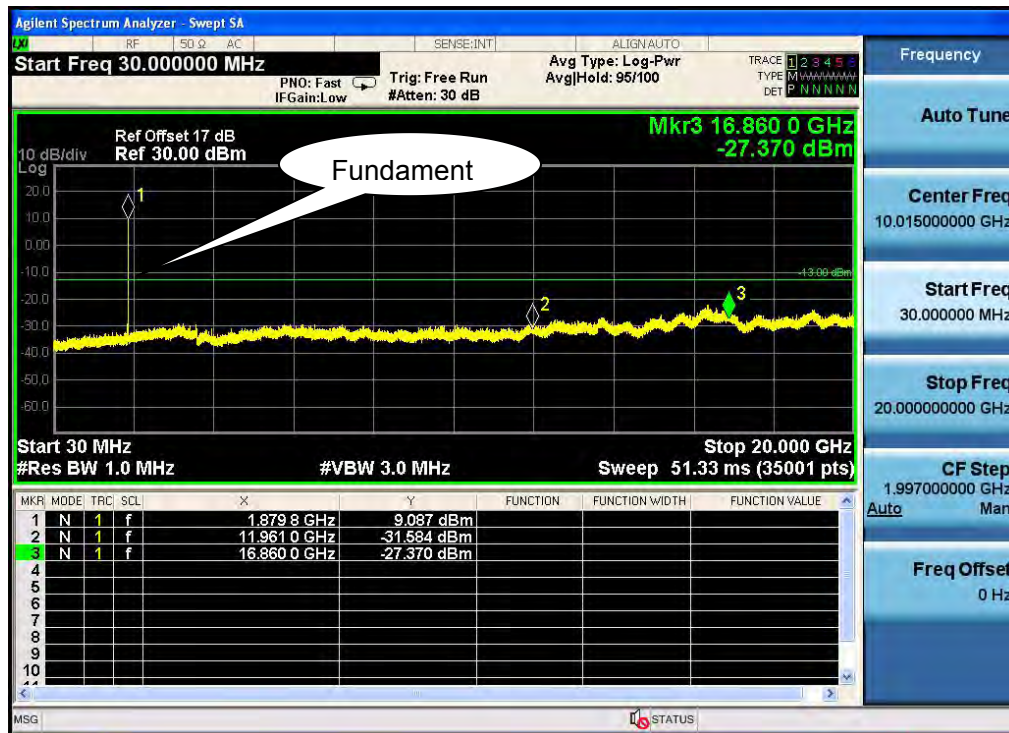


Test Mode:PCS1900 - Middle Channel

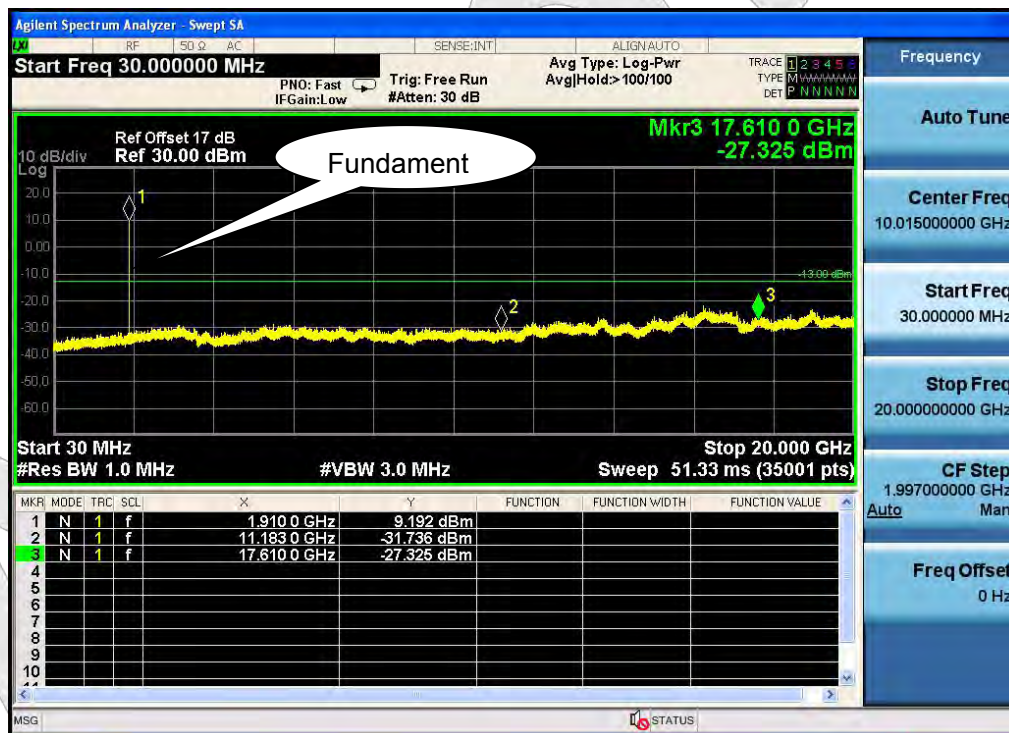


Test Mode:PCS1900 - High Channel

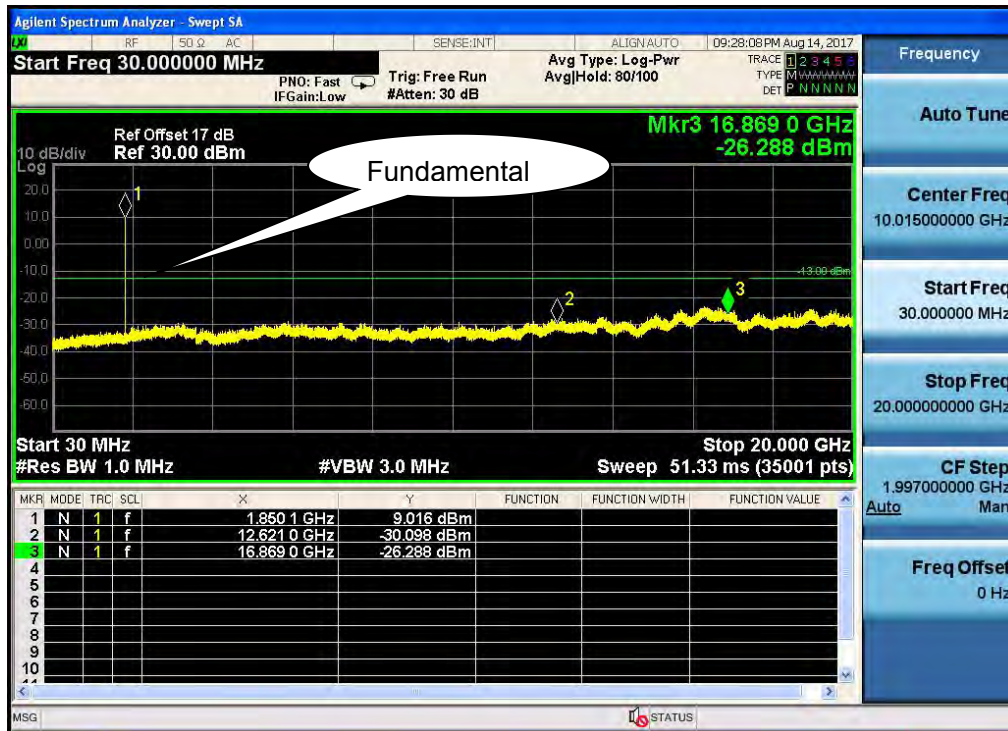

Test Mode:GPRS 1900 - Low Channel

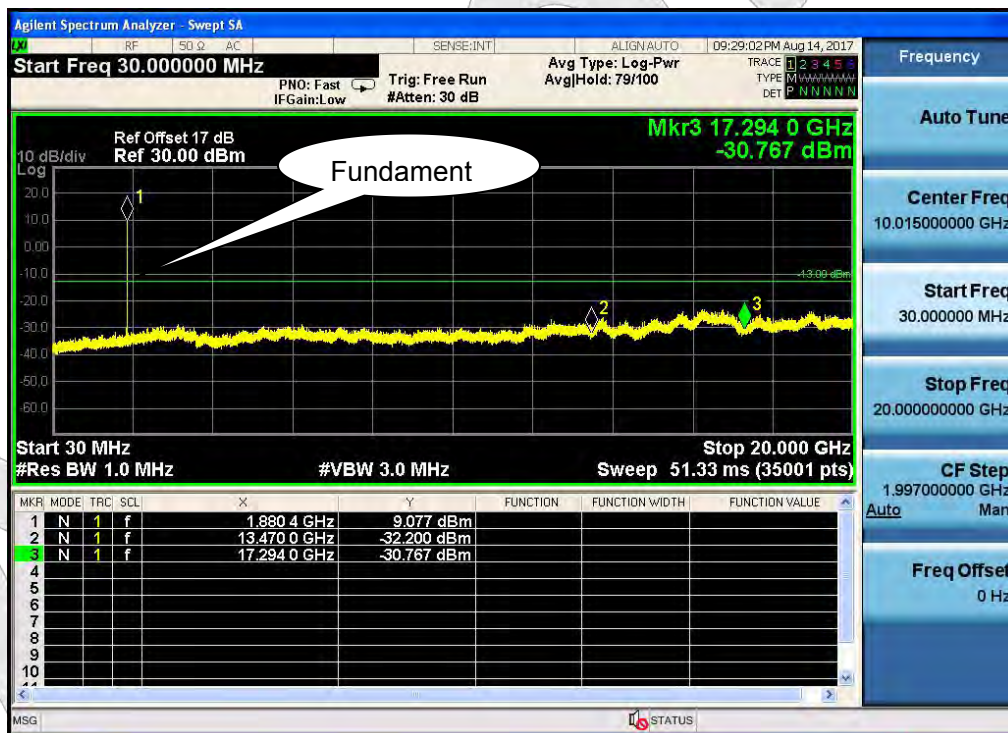


Test Mode:GPRS 1900 - Middle Channel

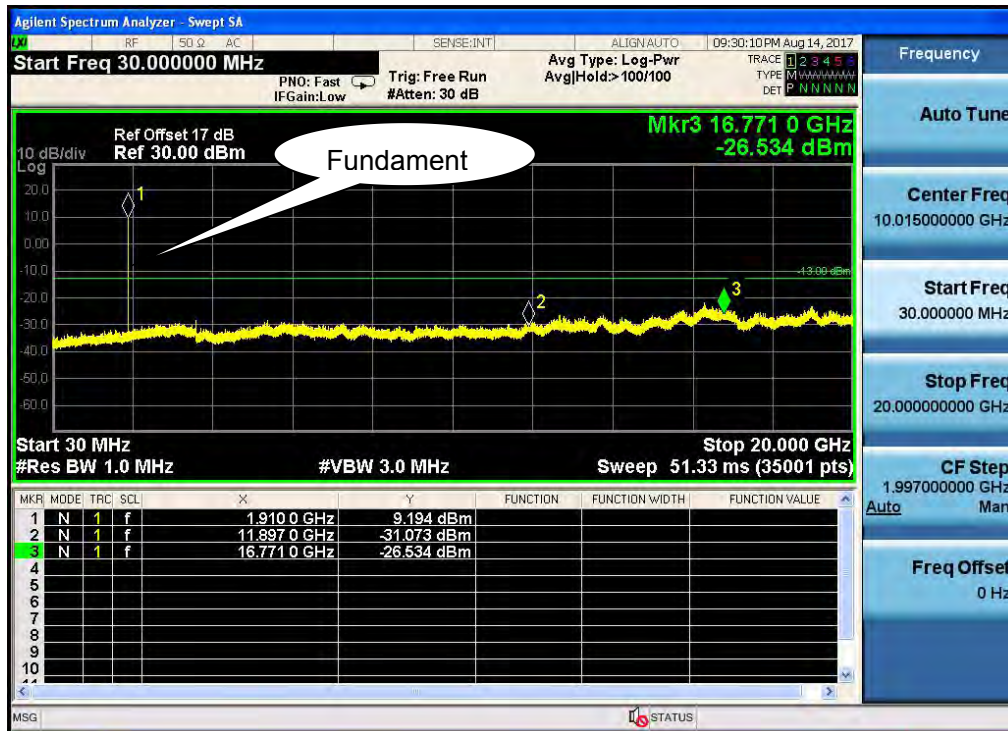


Test Mode:GPRS 1900 - High Channel


UMTS-FDD Band II (Part 24E)

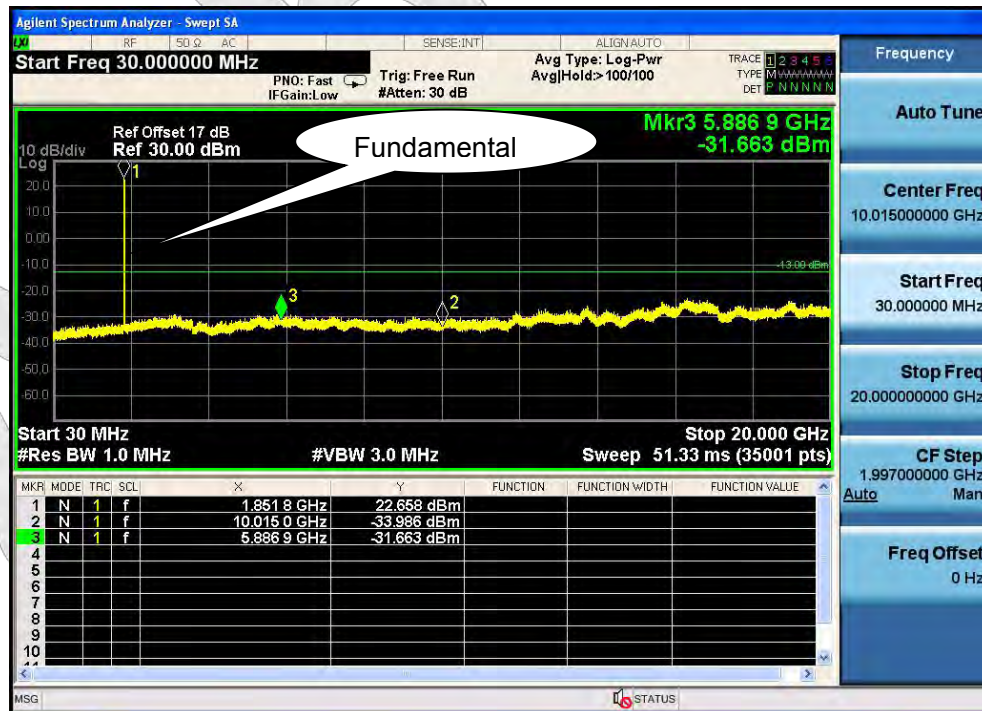

Test Mode: Band II - Low Channel

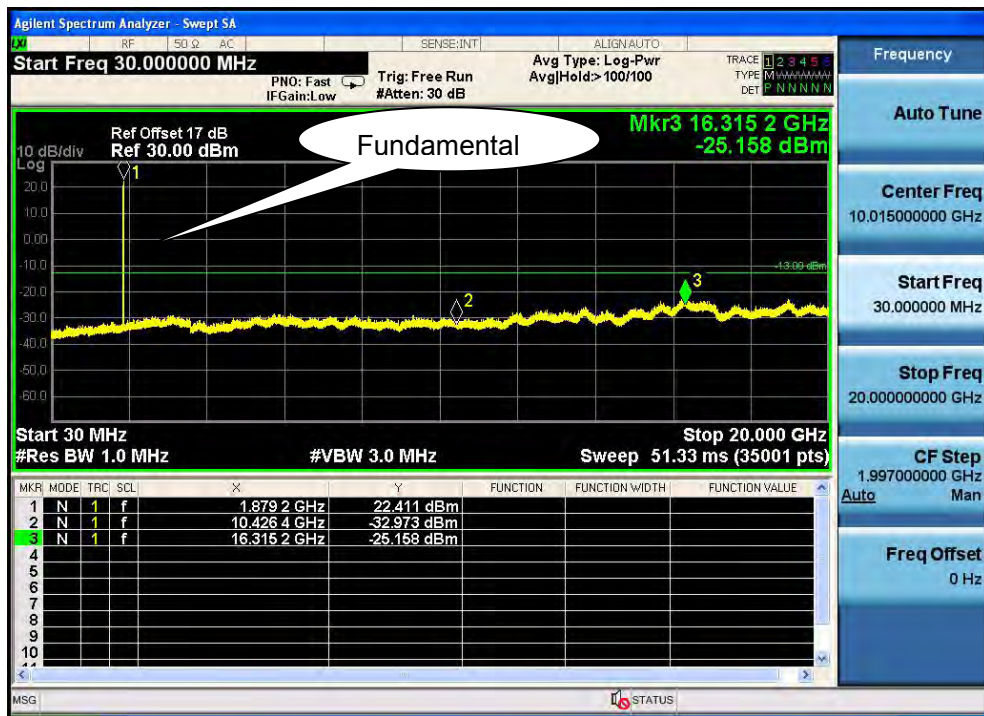

Test Mode: Band II - Middle Channel

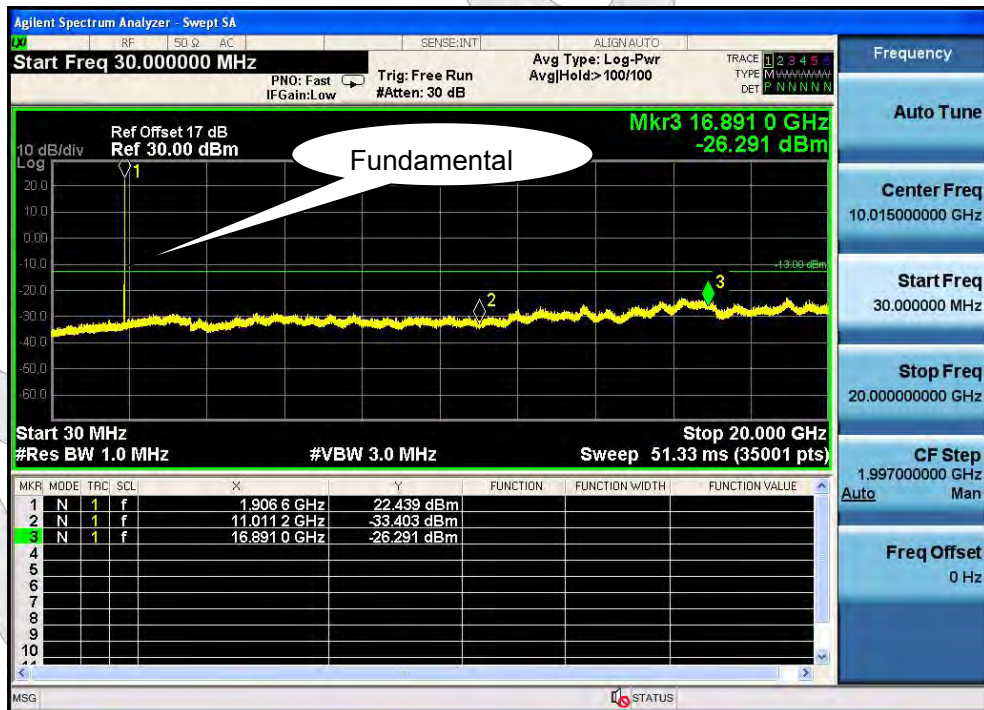


Test Mode: Band II - High Channel

8. Spurious Radiated Emissions

8.1. Test Standard and Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

8.2. Test Setup

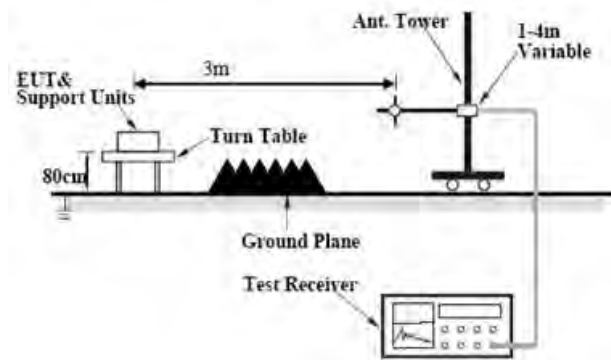

8.3. Test Procedure

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Sample Calculation:

EUT Field Strength = Raw Amplitude (dB μ V/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)

8.4. Test Data

Cellular Band (Part 22H) result

GSM 850 Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-41.26	V	7.95	0.78	-34.09	-13	-21.09
1648.4	-41.63	H	7.95	0.78	-34.46	-13	-21.46
268.1	-51.14	V	5.40	0.24	-45.98	-13	-32.98
685.4	-50.74	H	7.00	0.39	-44.13	-13	-31.13

GSM 850 Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-41.59	V	7.95	0.78	-34.42	-13	-21.42
1673.2	-41.57	H	7.95	0.78	-34.40	-13	-21.40
269.3	-52.14	V	5.40	0.24	-46.98	-13	-33.98
686.2	-50.28	H	7.00	0.39	-43.67	-13	-30.67

GSM 850 High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-41.74	V	7.95	0.78	-34.57	-13	-21.57
1697.6	-41.16	H	7.95	0.78	-33.99	-13	-20.99
267.8	-53.82	V	5.40	0.24	-48.66	-13	-35.66
684.9	-50.41	H	7.00	0.39	-43.80	-13	-30.80

GPRS 850 Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-42.19	V	7.95	0.78	-34.55	-13	-21.55
1648.4	-42.26	H	7.95	0.78	-34.77	-13	-21.77
268.1	-52.33	V	5.40	0.24	-46.12	-13	-33.12
685.4	-51.38	H	7.00	0.39	-45.44	-13	-32.44

GPRS 850 Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-42.14	V	7.95	0.78	-35.42	-13	-22.42
1673.2	-42.33	H	7.95	0.78	-35.48	-13	-22.48
269.3	-53.34	V	5.40	0.24	-48.69	-13	-35.69
686.2	-51.18	H	7.00	0.39	-44.69	-13	-31.69

GPRS 850 High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-41.66	V	7.95	0.78	-34.88	-13	-21.88
1697.6	-41.79	H	7.95	0.78	-34.48	-13	-21.48
267.8	-53.94	V	5.40	0.24	-47.52	-13	-34.52
684.9	-51.22	H	7.00	0.39	-42.86	-13	-29.86

PCS Band (Part24E) result

GSM 1900 Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1652.8	-46.75	V	7.95	0.78	-39.58	-13	-26.58
1652.8	-46.17	H	7.95	0.78	-39.00	-13	-26.00
268.5	-54.78	V	5.40	0.24	-49.62	-13	-36.62
689.2	-51.48	H	7.00	0.39	-44.87	-13	-31.87

GSM 1900 Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1670	-48.72	V	7.95	0.78	-41.55	-13	-28.55
1670	-47.26	H	7.95	0.78	-40.09	-13	-27.09
269.4	-54.57	V	5.40	0.24	-49.41	-13	-36.41
689.6	-51.67	H	7.00	0.39	-45.06	-13	-32.06

GSM 1900 High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1693.2	-48.73	V	7.95	0.78	-41.56	-13	-28.56
1693.2	-47.38	H	7.95	0.78	-40.21	-13	-27.21
267.2	-54.83	V	5.40	0.24	-49.67	-13	-36.67
684.4	-51.72	H	7.00	0.39	-45.11	-13	-32.11

GPRS 1900 Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1652.8	-45.89	V	7.95	0.78	-37.58	-13	-24.58
1652.8	-45.29	H	7.95	0.78	-37.15	-13	-24.15
268.5	-53.66	V	5.40	0.24	-48.77	-13	-35.77
689.2	-51.28	H	7.00	0.39	-43.69	-13	-30.69

GPRS 1900 Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1670	-47.79	V	7.95	0.78	-40.44	-13	-27.44
1670	-46.33	H	7.95	0.78	-39.11	-13	-26.11
269.4	-53.28	V	5.40	0.24	-48.36	-13	-35.36
689.6	-50.48	H	7.00	0.39	-44.22	-13	-31.22

GPRS 1900 High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1693.2	-48.34	V	7.95	0.78	-41.27	-13	-28.27
1693.2	-47.45	H	7.95	0.78	-40.25	-13	-27.25
267.2	-53.74	V	5.40	0.24	-49.65	-13	-36.65
684.4	-50.19	H	7.00	0.39	-45.23	-13	-32.23

UMTS-FDD Band II (Part 24E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3704.8	-47.39	V	10.25	2.73	-41.03	-13	
3704.8	-49.87	H	10.25	2.73	-42.50	-13	
269.5	-53.45	V	5.40	0.24	-49.03	-13	
690.2	-50.78	H	7.00	0.39	-45.01	-13	

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-48.66	V	10.25	2.73	-40.59	-13	
3760	-50.31	H	10.25	2.73	-41.79	-13	
270.6	-55.06	V	5.40	0.24	-48.36	-13	
690.3	-51.27	H	7.00	0.39	-44.66	-13	

High channel


Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3815.2	-48.42	V	10.36	2.73	-40.79	-13	
3815.2	-49.72	H	10.36	2.73	-42.09	-13	
270.7	-55.64	V	5.40	0.24	-50.48	-13	
689.1	-49.21	H	7.00	0.39	-42.60	-13	

9. Band Edge Compliance

9.1. Test Standard and Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

9.2. Test Setup

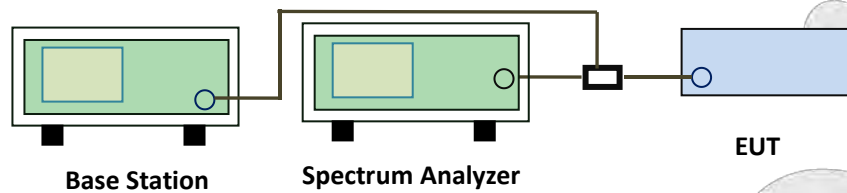

9.3. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured.

9.4. Test Data

Cellular Band (Part 22H) result GSM 850

Frequency (MHz)	Emission (dBm)	Limit (dBm)
824	-38.333	-13
849	-37.038	-13

GPRS 850

Frequency (MHz)	Emission (dBm)	Limit (dBm)
824	-37.823	-13
849	-38.238	-13

PCS Band (Part24E) result GSM 1900

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850	-39.617	-13
1910	-37.582	-13

GPRS 1900

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850	-39.238	-13
1910	-39.722	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850	-24.786	-13
1910	-27.119	-13

Test Plots


Cellular Band (Part 22H) result



Test Mode: GSM850 - Low Channel



Test Mode: GSM850 - High Channel

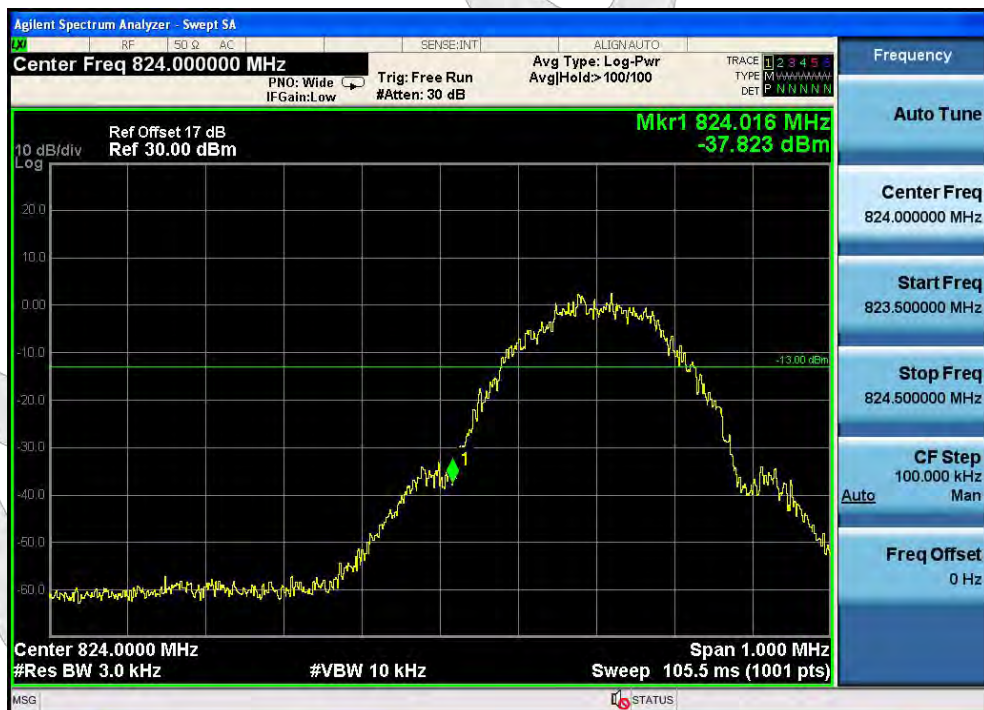

Test Mode: GPRS 850 - Low Channel



Test Mode: GPRS 850 - High Channel


PCS Band (Part24E) result



Test Mode: PCS1900 - Low Channel



Test Mode: PCS1900 - High Channel

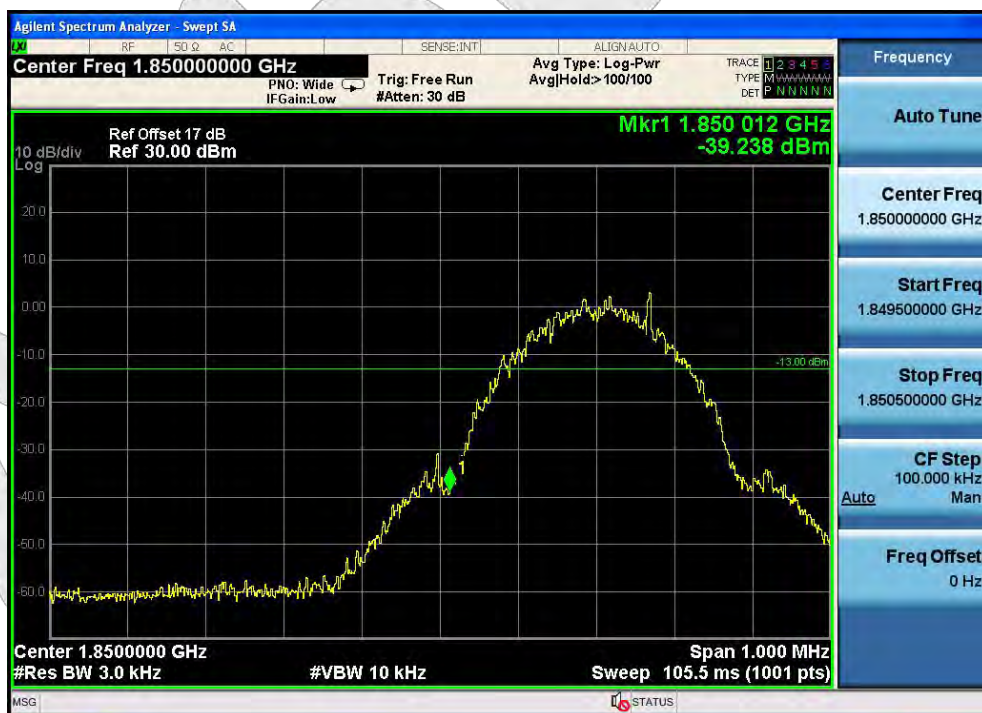

Test Mode: GPRS 1900 - Low Channel



Test Mode: GPRS 1900 - High Channel

UMTS-FDD Band II (Part 24E)



Test Mode: Band II - Low Channel



Test Mode: Band II - High Channel

10. Frequency Stability

10.1. Test Standard and Limit


According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 29.	.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.

10.2. Test Setup

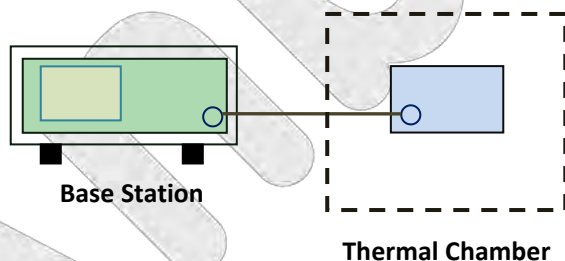

10.3. Test Procedure

A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.

Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

10.4. Test Data

Cellular Band (Part 22H) result

GSM 850

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	21	0.0251	2.5
0		20	0.0239	2.5
10		17	0.0203	2.5
20		12	0.0143	2.5
30		15	0.0179	2.5
40		20	0.0239	2.5
50		25	0.0299	2.5
55		32	0.0383	2.5
25	4.2	21	0.0251	2.5
	3.5	23	0.0275	2.5

GPRS 850

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	27	0.0327	2.5
0		19	0.0221	2.5
10		17	0.0203	2.5
20		12	0.0143	2.5
30		11	0.0138	2.5
40		20	0.0239	2.5
50		25	0.0299	2.5
55		11	0.0138	2.5
25	4.2	10	0.0132	2.5
	3.5	10	0.0132	2.5

PCS Band (Part 24E) result

GSM 1900

Middle Channel, $f_0 = 1880\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	29	0.0154	2.5
0		22	0.0132	2.5
10		19	0.0109	2.5
20		12	0.0095	2.5
30		18	0.0101	2.5
40		21	0.0121	2.5
50		23	0.0129	2.5
55		28	0.0141	2.5
25	4.2	9	0.0053	2.5
	3.5	10	0.0065	2.5

GPRS 1900


Middle Channel, $f_0 = 1880\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	18	0.0101	2.5
0		19	0.0109	2.5
10		19	0.0109	2.5
20		10	0.0065	2.5
30		18	0.0101	2.5
40		10	0.0060	2.5
50		23	0.0129	2.5
55		17	0.0098	2.5
25	4.2	12	0.0081	2.5
	3.5	10	0.0065	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	10	0.0053	2.5
0		8	0.0043	2.5
10		5	0.0027	2.5
20		4	0.0021	2.5
30		6	0.0032	2.5
40		7	0.0037	2.5
50		9	0.0048	2.5
55		15	0.0080	2.5
25	4.2	12	0.0064	2.5
	3.5	15	0.0080	2.5

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test

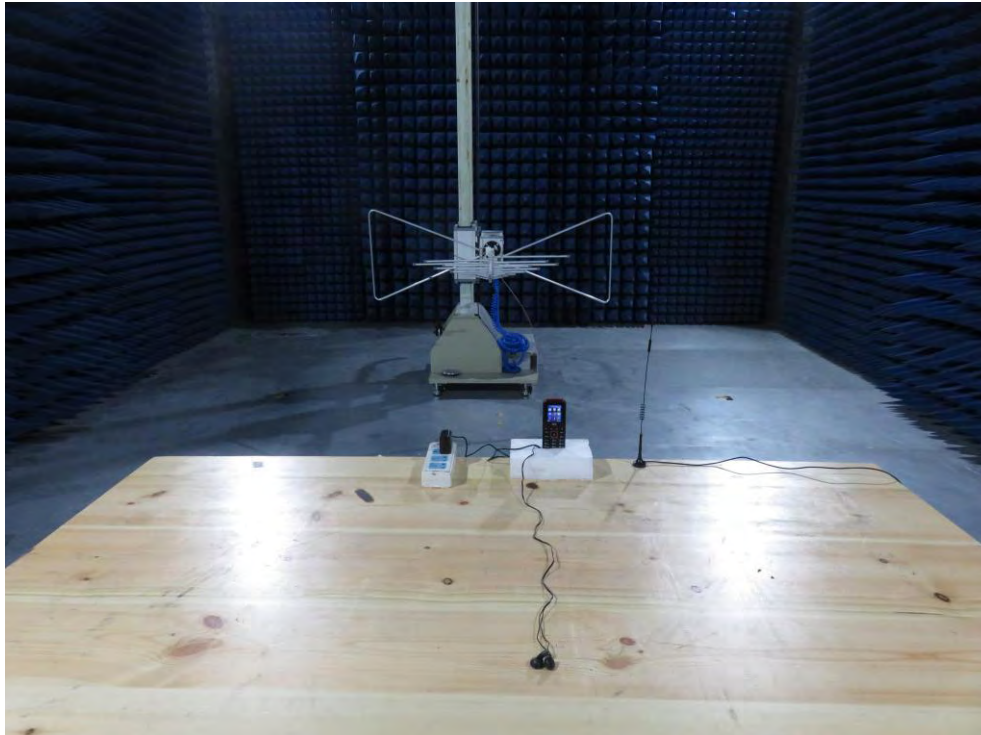

APPENDIX II -- PHOTOGRAPH

Reference to the test report No.R0217110081W1

-----End of Report-----

Anbotek