KTL Test Report:	0R02490.2
Applicant:	EXI Wireless Systems Inc. Suite 100-13551 Commerce Parkway Richmond, BC V6V 2L1
Equipment Under Test: (E.U.T.)	ECOLITE Controller
FCC ID:	HE7 ELC
In Accordance With:	FCC Part 15, Subpart C, Paragraph 15.209 General Limits For Low Power Transmitters
Tested By:	KTL Ottawa Inc. 3325 River Road, R.R. 5 Ottawa, Ontario K1V 1H2
Tested By: Authorized By:	3325 River Road, R.R. 5
·	3325 River Road, R.R. 5 Ottawa, Ontario K1V 1H2

KTL Ottawa

FCC PART 15, SUBPART C PARAGRAPH 15.209 PROJECT NO.: 0R02490.2

 $EQUIPMENT: ECOLITE\ Controller$

FCC ID: HE7 ELC

Table Of Contents

Section 1.	Summary Of Test Results	3
	General Equipment Specification	
Section 3.	Powerline Conducted Emissions	(
Section 4.	Radiated Emissions	.1(
Section 5.	Occupied Bandwidth	. 14
Section 6.	Test Equipment List	. 16
Annex A	Test Diagrams	\mathbf{A}_{1}

EQUIPMENT: ECOLITE Controller

FCC ID: HE7 ELC

Section 1. Summary Of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Subpart C for low power devices. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated Emissions were made on an open area test site.

	New Submission		Production Unit
	Class II Permissive Change		Pre-Production Unit
D X T	Equipment Code		
	THIS TEST REPORT RELATES ONLY TO	THE I	ΓΕΜ(S) TESTED.
THE FOLL	OWING DEVIATIONS FROM, ADDITIONS TEST SPECIFICATIONS HAVE See "Summary of Test I	BEEN I	
	NVLAP		
	NVLAP LAB CODE: 10	00351-0	

KTL Ottawa Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

DATE:

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. KTL Ottawa Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

Kevin Carr, Technologist

TESTED BY:

EQUIPMENT: ECOLITE Controller

FCC ID: HE7 ELC

Summary Of Test Data

Name Of Test	Para. No.	Result
Powerline Conducted Emissions	15.207	Complies
Radiated Emissions	15.209	Complies
Occupied Bandwidth	Not Specified	Complies

Footnotes For N/A's:

Test Conditions:

Indoor Temperature: 24 °C

Humidity: 35 %

Outdoor Temperature: 24 °C

Humidity: 35 %

EQUIPMENT: ECOLITE Controller

unique connector:

FCC ID: HE7 ELC

Section 2. General Equipment Specifica	ation
--	-------

Manufacturer:	EXI Wireless Systems Inc.				
Model No.:	ECOLITE Controller				
Serial No.:	EL002				
Date Received In Laboratory:	May 25, 2000				
KTL Identification No.:	Item #1				
Frequency Range:	307 kHz				
Operating Frequency(ies) of Sample:	307 kHz				
Modulation:	PWM				
Emission Designator:	11K8L1D				
Integral Antenna	Yes No				

Note: If antenna is not integral to transmitter explain method of attachment and type of

EQUIPMENT: ECOLITE Controller

FCC ID: HE7 ELC

Section 3. Powerline Conducted Emissions

Para. No.: 15.207

Test Performed By: Kevin Carr **Date of Test:** May 30, 2000

Minimum Standard:

Frequency (MHz)	Maximum Powerline Conducted RF Voltage		
(1,222)	μV dBμV		
0.45 - 30.0	250	48	

Test Results: Complies. See attached graph(s).


Measurement Data: See attached graph(s).

Method of Measurement: (Procedure ANSI C63.4-1992)


Measurements were made using a spectrum analyzer with 10 kHz RBW, Peak Detector. Any emissions that are close to the limit are measured using a test receiver with 10 kHz bandwidth, CISPR Quasi-Peak Detector.

Conductor	Frequency (MHz)	CISPR (dBµV)	Average (dBµV)	BB/NB	BB Corr. (dB)	Result (dBµV)
Phase	7.69	42.1	-1.5	BB	-13	29.1
Neutral	7.69	38.7	-1.6	BB	-13	25.7

FCC ID: HE7 ELC

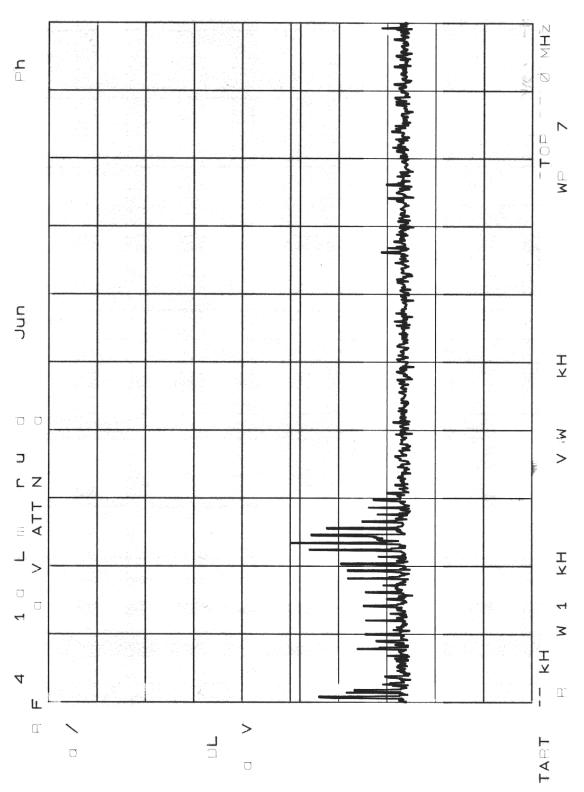

EQUIPMENT: ECOLITE Controller FCC ID: HE7 ELC

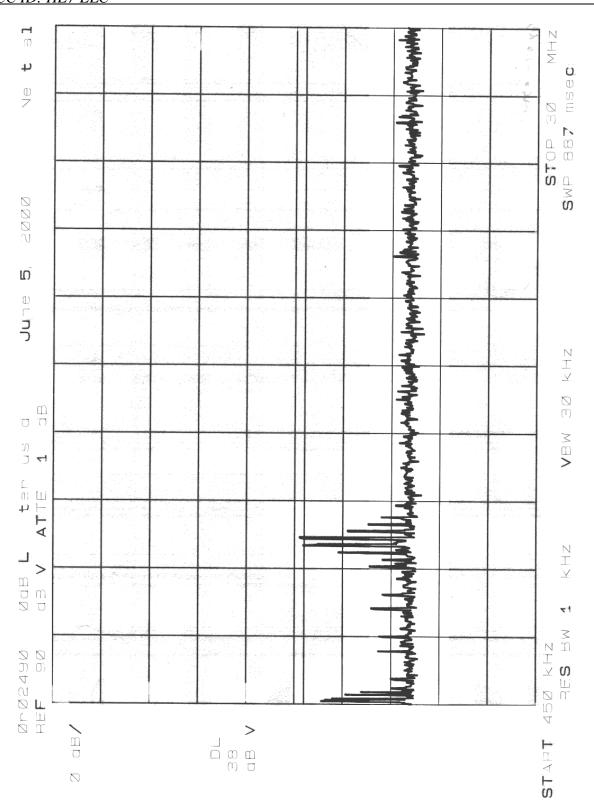


FCC ID: HE7 ELC

Conducted Photographs (Worst Case Configuration)

Side View



Front View

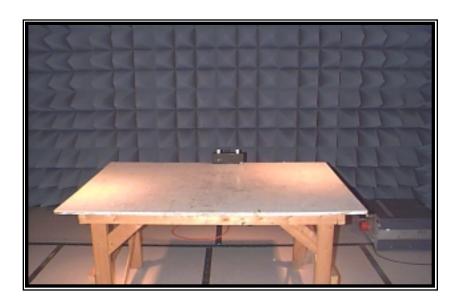

EQUIPMENT: ECOLITE Controller

FCC ID: HE7 ELC

Section 4. Radiated Emissions

Para. No.: 15.209

Test Performed By: Kevin Carr **Date of Test:** June 3, 2000

Minimum Standard:

The field strength of emissions from the device shall not exceed the following limits.

Fundamental (MHz)	Field Strength (µV/m)	Field Strength (dBµV)
0.009 - 0.490	2400/F(kHz) @ 300m	
0.490 - 1.705	24000/F(kHz) @ 30m	_
1.705 - 30	30 @ 30m	_
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

Test Results: Complies. The worst-case emission level is 5 dB μ V/m @ 30m at

0.921 MHz. This is 23.3 dB below the specification limit.

Measurement Data: (Procedure ANSI C63.4-1992)

Page 10 of 16

EQUIPMENT: ECOLITE Controller

FCC ID: HE7 ELC

Test Data - Radiated Emissions

Freq. (MHz)	Ant. *	Pol. (V/H)	RCVD Signal (dBµV/m)	Ant. Factor (dB)**	Amp. Gain (dB)***	Dist. Corr. (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
0.307	Loop						-9.4	17.9	27.3
0.614	Loop		59.7			-59	0.7	31.8	31.1
0.921	Loop		64.0			-59	5.0	28.3	23.3
1.228	Loop		60.8			-59	1.8	25.8	24.0
1.535	Loop		51.2			-59	-7.8	23.9	31.7
1.842	Loop		45.3			-59	-13.7	29.5	43.2
2.149	Loop		41.8			-59	-17.2	29.5	46.7

Notes:

B/C = Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole

* Re-measured using dipole antenna.

** Includes cable loss when amplifier is not used.

*** Includes cable loss.

() Denotes failing emission level.

N.D. = Not Detected


All emissions except for fundamental were measured at 1m and extrapolated to 30m using an inverse square law extrapolation factor. The fundamental emissions of 307 kHz was measured at 3, 5 and 10m and extrapolated to 300m using an extrapolation factor derived from the measurement data. See attached graph.

All measurements were made using a CISPR detector. The E.U.T. was tested on 3 axis in order to determine the strongest emissions.

EQUIPMENT: ECOLITE Controller FCC ID: HE7 ELC

Measurement Data: Fundamental at 307 kHz Measured at 3, 5, and 10 m and Extrapolated to 300 m

	Log	Field			Derived
Measurement	Measurement	Strength			Extrapolation
Distance (m)	Distance	(dBuV/m)			(dBuV/m)
3	0.477121255	100.4	SLOPE=	-54.5	99.7
5	0.698970004	86.4	INTERCEPT=	125.7	87.6
10	1	71.7			71.2
300	2.477121255				-9.4

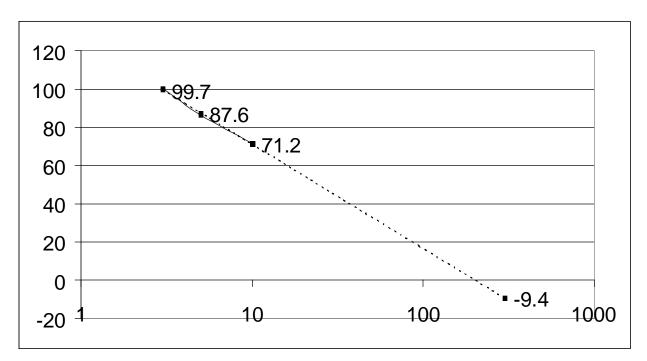

FCC ID: HE7 ELC

Radiated Photographs (Worst Case Configuration)

Front View



EQUIPMENT: ECOLITE Controller

FCC ID: HE7 ELC

Section 5. Occupied Bandwidth

Para. No.: Not Applicable

Test Performed By: Kevin Carr **Date of Test:** May 31, 2000


Minimum Standard: Not specified.

Test Results: The 99% power occupied bandwidth is 11.8 kHz.

Measurement Data: See attached graph(s).

Page 14 of 16

FCC ID: HE7 ELC

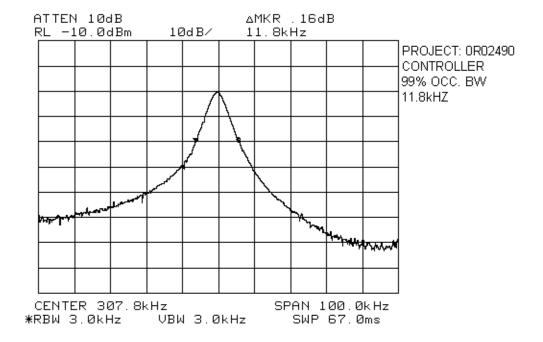

EQUIPMENT: ECOLITE Controller

FCC ID: HE7 ELC

Section 6. Test Equipment List

Equipment List - Conducted Emissions - Shielded Room #1

CAL Cycle	Equipment	Manufacturer	Model #	Serial/Asset #	Last Cal.	Next Cal.
1Year	LISN	Rohde & Schwarz	ESH2-Z5	890485/017	Aug. 24/99	Aug. 24/00
1Year	Receiver	Rohde & Schwarz	ESH3	892473/002	Nov. 23/99	Nov. 23/00

Equipment List - Radiated Emissions

CAL Cycle	Equipment	Manufacturer	Model #	Serial/Asset #	Last Cal.	Next Cal.
2 Year	Active Loop Antenna	Rohde & Schwarz	HFH2-Z2	FA000631	Feb. 9/00	Feb. 9/02

Cal Cycle	Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
1 Year	Spectrum Analyzer	Hewlett Packard	8564E	3846A01407	May 31/99	May 31/00
1 Year	Spectrum Analyzer-1	Hewlett Packard	8566B	2311A02238	Nov. 6/99	Nov. 6/00
1 Year	Spectrum Analyzer Display-	Hewlett Packard	8566B	2314A04759	Nov. 6/99	Nov. 6/00
	1					

NA: Not Applicable NCR: No Cal Required COU: CAL On Use

EQUIPMENT: ECOLITE Controller

FCC ID: HE7 ELC

Annex A


Test Diagrams

Page A1 of A2


 $EQUIPMENT: ECOLITE\ Controller$

FCC ID: HE7 ELC


Conducted Emissions

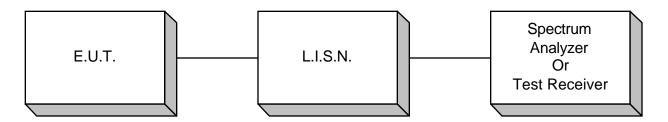

Radiated Prescan

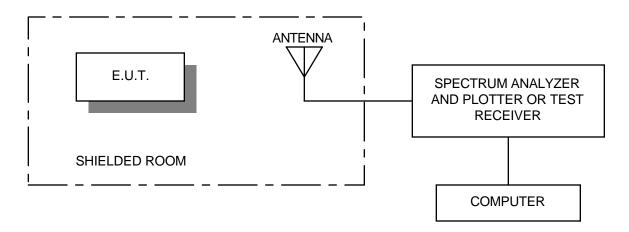

Test Site For Radiated Emissions

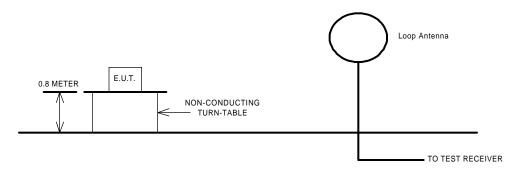

The spectrum was searched up to the 10^{th} harmonic of the fundamental frequency of operation.