



FCC PART 15, SUBPART C
ISED C RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Actiontec Electronics, Inc.

3301 Olcott Street,
Santa Clara, CA 95054, USA

FCC ID: LNQC3000A
IC: 2496A-C3000A

Report Type: Original Report	Product Type: 802.11n and 802.11ac Wi-Fi Router
Prepared By: Troy Pandhumsoporn Test Engineer	
Report Number: R1711062-247	
Report Date: 2017-03-07	
Reviewed By: Jin Yang RF Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" Rev. 2.0

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.3 Objective.....	5
1.4 Related Submittal(s)/Grant(s)	5
1.5 Test Methodology	5
1.6 Measurement Uncertainty	6
1.7 Test Facility Registrations	6
1.8 Test Facility Accreditations	6
2 System Test Configuration.....	9
2.1 Justification	9
2.2 EUT Exercise Software.....	9
2.3 Duty Cycle Correction Factor	10
2.4 Equipment Modifications.....	11
2.5 Local Support Equipment	11
2.6 Support Equipment	11
2.7 Power Supply/Adapter	11
2.8 Interface Ports and Cabling.....	12
2.9 Hardware Version	12
3 Summary of Test Results	13
4 FCC §15.203 & ISEDC RSS-Gen §8.3 - Antenna Requirements	14
4.1 Applicable Standards	14
4.2 Antenna Description	15
5 FCC §2.1091, §15.247(i) & ISEDC RSS-102 - RF Exposure.....	16
5.1 Applicable Standards	16
5.2 MPE Prediction.....	17
5.3 MPE Results	17
5.4 RF exposure evaluation exemption for IC	18
6 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions.....	19
6.1 Applicable Standards	19
6.2 Test Setup	19
6.3 Test Procedure	19
6.4 Corrected Amplitude and Margin Calculation	20
6.5 Test Setup Block Diagram	20
6.6 Test Equipment List and Details.....	21
6.7 Test Environmental Conditions	21
6.8 Summary of Test Results	21
6.9 Conducted Emissions Test Plots and Data.....	22
7 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions.....	24
7.1 Applicable Standards	24
7.2 Test Setup	26
7.3 Test Procedure	26
7.4 Corrected Amplitude and Margin Calculation	26
7.5 Test Equipment List and Details.....	27
7.6 Test Environmental Conditions	27
7.7 Summary of Test Results	27
7.8 Radiated Emissions Test Results	28
8 FCC §15.247(a) (2) & ISEDC RSS-247 §5.2 -Emission Bandwidth	38
8.1 Applicable Standards	38
8.2 Measurement Procedure.....	38

8.3	Test Equipment List and Details.....	38
8.4	Test Environmental Conditions	38
8.5	Test Results.....	39
9	FCC §15.247(b) (3) & ISEDC RSS-247 §5.4 (4) - Output Power Measurement	64
9.1	Applicable Standards	64
9.2	Measurement Procedure.....	64
9.3	Test Equipment List and Details.....	64
9.4	Test Environmental Conditions	64
9.5	Test Results.....	65
10	FCC §15.247(d) & ISEDC RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges.....	66
10.1	Applicable Standards	66
10.2	Measurement Procedure.....	66
10.3	Test Equipment List and Details.....	66
10.4	Test Environmental Conditions	66
10.5	Test Results.....	67
11	FCC §15.247(e) & ISEDC RSS-247 §5.2(2) - Power Spectral Density.....	73
11.1	Applicable Standards	73
11.2	Measurement Procedure.....	73
11.3	Test Equipment List and Details.....	73
11.4	Test Environmental Conditions	73
11.5	Test Results.....	74
12	FCC §15.247(d) & ISEDC RSS-247 §5.5, RSS-GEN §8.9 - Spurious Emissions at Antenna Terminals	87
12.1	Applicable Standards	87
12.2	Test Procedure	87
12.3	Test Equipment List and Details.....	87
12.4	Test Environmental Conditions	88
12.5	Test Results.....	88
13	Annex A - FCC & ISED Equipment Labeling Requirements	106
13.1	FCC ID Label Requirements	106
13.2	IC Label Requirements	106
13.3	Label Contents and Location	107
14	Annex B -Photographs	108
15	Annex C (Informative) - Declaration of Similarity Letter	109
16	Annex D (Informative) - A2LA Electrical Testing Certificate.....	110

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1711062-247	Original Report	2018-03-07

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Actiontec Electronics, Inc.* and their product model: *C3000A*, and multiple model: *T3260*, FCC ID: LNQC3000A; IC: 2496A-C3000A or the “EUT” as referred to in this report. It is an 802.11n and 802.11ac Wi-Fi Router.

1.2 Mechanical Description of EUT

The EUT measures approximately 232 (H) x 79 (W) x 40(D) mm and weighs approximately 578.5 g.

The data gathered are from a typical production sample provided by the manufacturer with board serial number: AEI6040400219, assigned by Actiontec Electronics, Inc.

1.3 Objective

This report is prepared on behalf of *Actiontec Electronics, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules and ISED RSS-247 Issue 2, February 2017.

The objective is to determine compliance with FCC Part 15.247 and ISED RSS-247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart E, Equipment NII with FCC ID: LNQC3000A

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.7 Test Facility Registrations

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide

range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify

- For the USA (Federal Communications Commission):
 - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
 - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
 - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
 - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
 - 2 All Scope 2-Licensed Personal Mobile Radio Services;
 - 3 All Scope 3-Licensed General Mobile and Fixed Radio Services;
 - 4 All Scope 4-Licensed Maritime and Aviation Radio Services;
 - 5 All Scope 5-Licensed Fixed Microwave Radio Services
 - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
 - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
 - 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes and Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)

- for Imaging Equipment (ver. 2.0)
- for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I and Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2004/108/EC US-EU EMC and Telecom MRA CAB
 - o Radio and Teleterminal Equipment (RandTTE) Directive 1995/5/EC US -EU EMC and Telecom MRA CAB
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I and Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I and Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v04.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test firmware used was CRT 5.0, Firmware Version: CAX001-31.165L.4A-MFG2B, provided by *Actiontec Electronics, Inc.*, the software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting
802.11b	2412	21
	2437	25
	2462	20.5
802.11g	2412	18
	2437	25
	2462	16
802.11n20	2412	17
	2437	25
	2462	15.5
802.11n40	2422	14.5
	2437	17.5
	2452	13.5

Data Rates Tested:

802.11b mode: 1Mbps

802.11g mode: 6Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v04 section 6.0:

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).


Radio Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11b	8.408	8.447	99.54	0.02
802.11g	2.059	2.707	76.06	1.19
802.11n20	1.904	2.02	94.25	0.256
802.11n40	0.943	1.043	90.41	0.437

Duty Cycle = On Time (ms)/ Period (ms)


Duty Cycle Correction Factor (dB) = $10 \cdot \log(1/\text{Duty Cycle})$

Please refer to the following plots.


802.11b mode

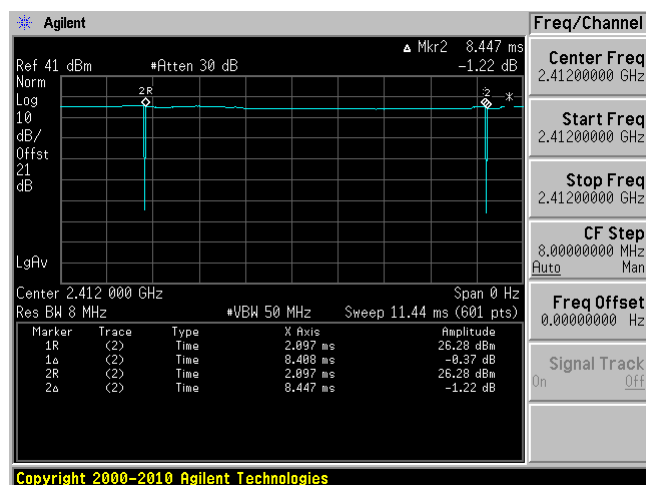


802.11g mode

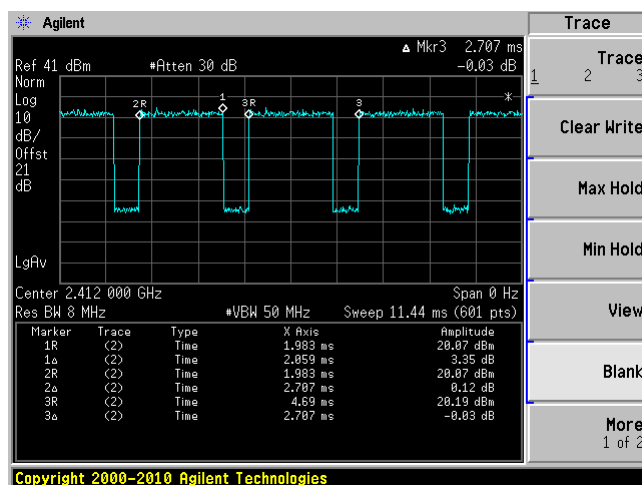

802.11n20 mode

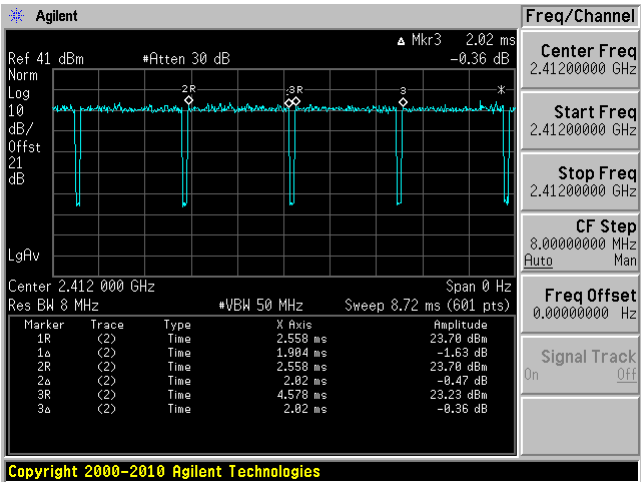

802.11n40 mode

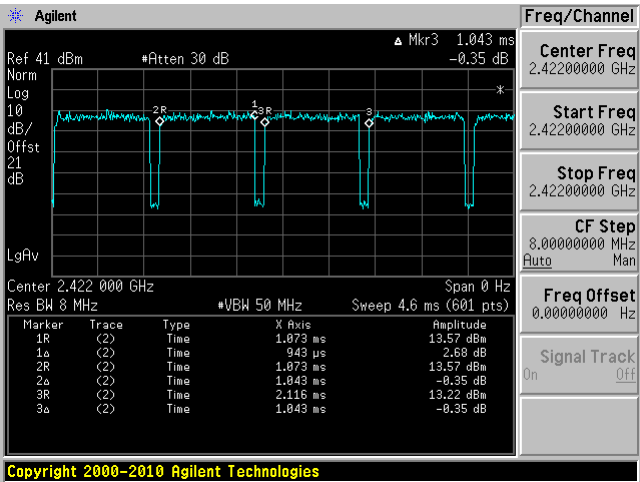

2.4 Equipment Modifications

N/A

2.5 Local Support Equipment

Manufacturer	Description	Model
Dell	Laptop	Latitude E7450

2.6 Support Equipment

There was no support equipment included, or intended for use with EUT during these tests.

2.7 Power Supply/Adapter

Manufacturer	Description	Model
Actiontec	12VDC 2A Power Adapter	CDS024T-W120U

2.8 Interface Ports and Cabling

Cable Description	Length (m)	To	From
U.F.L to SMA pigtail (1X)	< 1 m	EUT	PSA
Ethernet Cable (Yellow)	> 1 m	Laptop	EUT
RF Cable (2X)	< 1 m	EUT	PSA

2.9 Hardware Version

Manufacturer	Description	Model
Actiontec	Board Serial Number: AEI6040400219 PCB_B BOM_C	C3000A

3 Summary of Test Results

Results reported relate only to the product tested.

FCC and ISED Rules	Description of Test	Results
FCC §15.203 ISED RSS-Gen §8.3	Antenna Requirement	Compliant
FCC §15.207 ISED RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §2.1091, §15.247(i) ISED RSS-102	RF Exposure	Compliant
FCC §2.1051, §15.247 (d) ISED RSS-247 §5.5	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247 (d) ISED RSS-247 §5.5 ISED RSS-Gen §8.9 and §8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) ISED RSS-247 §5.2 (1)	6 dB and 99% Emission Bandwidth	Compliant
FCC §15.247(b)(3) ISED RSS-247 §5.4 (4)	Maximum Peak Output Power	Compliant
FCC §15.247(d) ISED RSS-247 §5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e) ISED RSS-247 §5.2 (2)	Power Spectral Density	Compliant

4 FCC §15.203 & ISEDC RSS-Gen §8.3 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §8.3: Transmitter Antenna

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the license-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

License-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the license-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of license-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. 9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

4.2 Antenna Description

The antennas used by the EUT are permanent attached antennas. The following antenna specifications were provided by the applicant.

Frequency Range (GHz)	PCB No. and Gain (dBi)			Correlated Gain (dBi)
	X6	X4	X5	
2.40	-6.100	-0.896	1.535	3.479
2.45	-8.662	0.141	3.428	4.384
2.50	-9.263	1.679	3.024	4.695

Frequency Range (GHz)	PCB No. and Gain (dBi)				Correlated Gain (dBi)
	X13	X7	X12	X15	
5.15	2.353	3.001	-3.782	-3.146	6.165
5.25	2.435	2.760	-5.916	-3.282	5.776
5.35	3.872	3.229	-9.772	-4.280	5.906
5.725	5.287	0.914	-6.033	-7.128	5.775
5.825	3.069	2.960	-5.396	-6.626	5.651

5 FCC §2.1091, §15.247(i) & ISEDC RSS-102 - RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of IC RSS-102 must be followed concerning the exposure of humans to RF field

According to ISED RSS-102 Issue 5:

2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 MPE Results

Standalone 2.4 GHz Wi-Fi

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>29.05</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>803.526</u>
<u>Prediction distance (cm):</u>	<u>30</u>
<u>Prediction frequency (MHz):</u>	<u>2437</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>4.384</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>2.744</u>
<u>Power density of prediction frequency at 30.0 cm (mW/cm²):</u>	<u>0.195</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 30 cm is 0.195 mW/cm². Limit is 1.0 mW/cm².

Standalone 5 GHz Wi-Fi

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>27.77</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>598.412</u>
<u>Prediction distance (cm):</u>	<u>30</u>
<u>Prediction frequency (MHz):</u>	<u>5755</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>5.775</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>3.7801</u>
<u>Power density of prediction frequency at 30.0 cm (mW/cm²):</u>	<u>0.2</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 30 cm is 0.2 mW/cm². Limit is 1.0 mW/cm².

The conducted power used for MPE calculation is the total power across all chains, and the maximum antenna gain used for MPE calculation is the directional gain.

5 GHz WiFi and 2.4 GHz bands can transmit simultaneously. Per FCC KDB 447498, when RF sources have difference frequencies, the fraction of the FCC power density limit shall be determined and the sum of all fractional components shall be less than 1.

Frequency Band	Max Conducted Power(dBm)	Evaluated Distance (cm)	Worst-Case MPE (mW/cm ²)	MPE Limit (mW/cm ²)	Worst-Case MPE Ratios	Sum of MPE Ratios	Limit
Worst Case							
2.4 GHz Wi-Fi	29.05	30	0.195	1.0	19.5 %	39.5 %	100 %
5 GHz Wi-Fi	27.77	30	0.200	1.0	20 %		

5.4 RF exposure evaluation exemption for IC

$$2.4\text{GHz WiFi: } 29.05 + 4.384 \text{ dBi} = 33.434 \text{ dBm} < 1.31 \times 10^{-2} f^{0.6834} = 2.7030 \text{ W} = 34.318 \text{ dBm}$$

Therefore the RF exposure is not required.

The conducted power used for RF exposure evaluation is the total power across all chains, and the maximum antenna gain used for RF exposure evaluation is the directional gain.

6 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 and ISEDC RSS-Gen §8.8 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207 and ISEDC RSS-Gen §8.8 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

6.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Setup Block Diagram

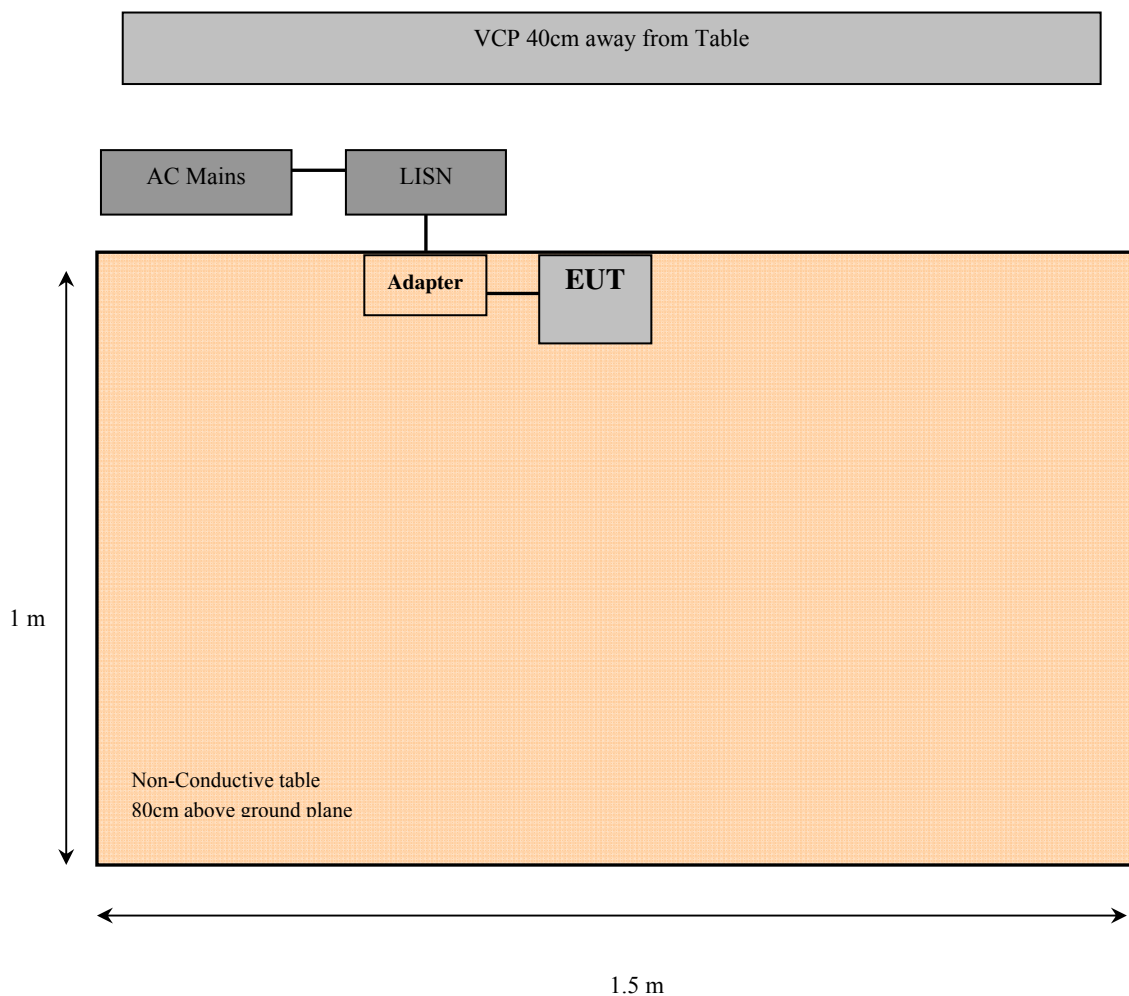

6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-06-23	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2017-07-25	1 year
Keysight Technologies	RF Limiter	11867A	MY42242931	2018-02-05	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2017-03-13	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2017-04-24	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.7 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	101.31 kPa

The testing was performed by Harry Zhao on 2018-02-13 in 5 chamber 3.

6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC 15C and ISEDC RSS-Gen standard's conducted emissions limits, with the margin reading of:


2.4 GHz Wi-Fi, g mode, 2437 MHz

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-6.47	0.150061	Neutral	0.15-30

6.9 Conducted Emissions Test Plots and Data


2.4 GHz Wi-Fi, g mode, 2437 MHz

120 V, 60 Hz – Line

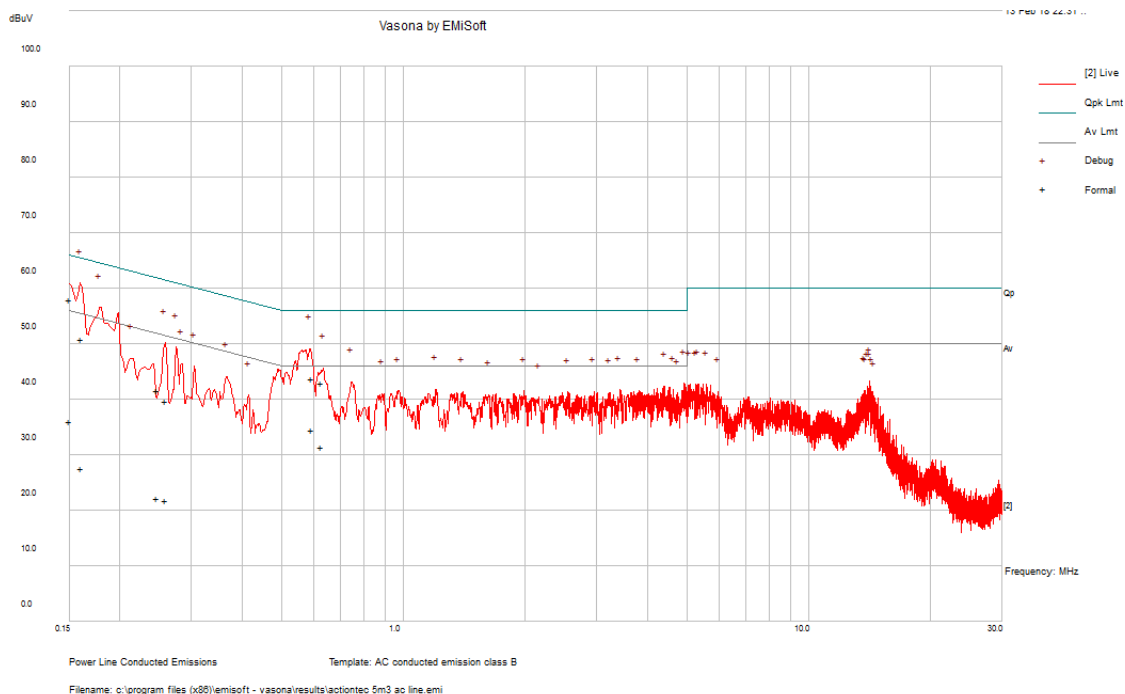

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.15	58.06	Line	66	-7.94	QP
0.595539	43.84	Line	56	-12.16	QP
0.161099	50.98	Line	65.41	-14.43	QP
0.62702	43.07	Line	56	-12.93	QP
0.247183	41.75	Line	61.85	-20.1	QP
0.259293	39.67	Line	61.45	-21.78	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.15	36.01	Line	56	-19.99	Ave.
0.595539	34.59	Line	46	-11.41	Ave.
0.161099	27.7	Line	55.41	-27.71	Ave.
0.62702	31.46	Line	46	-14.54	Ave.
0.247183	22.18	Line	51.85	-29.67	Ave.
0.259293	21.79	Line	51.45	-29.66	Ave.

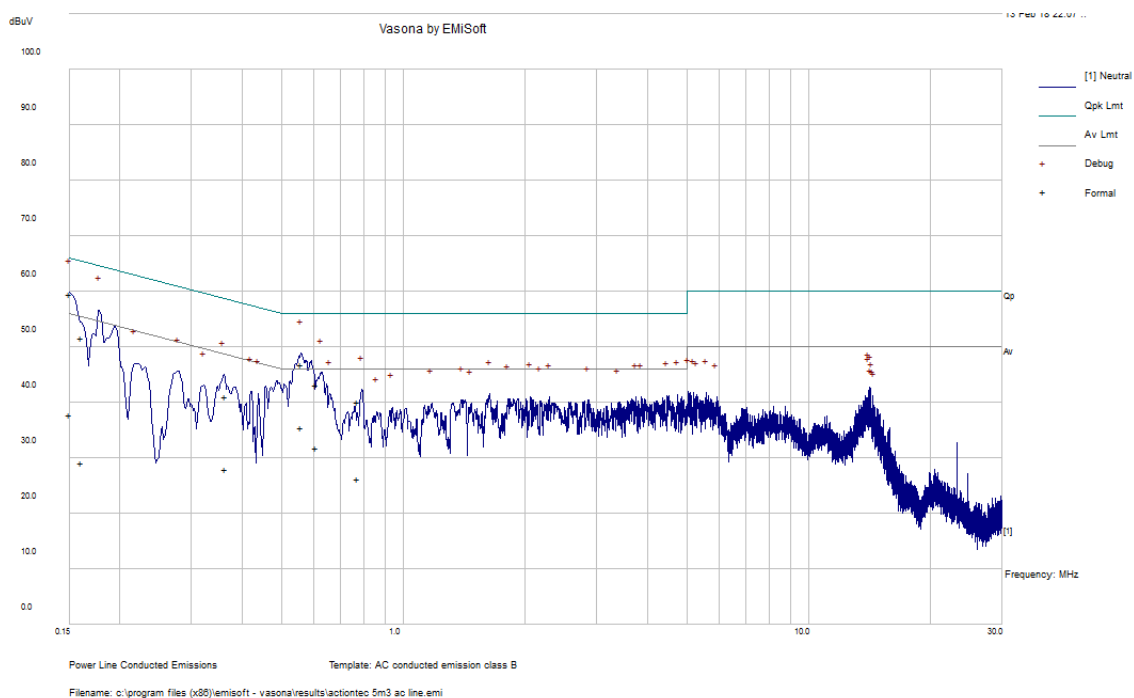120 V, 60 Hz – Neutral

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150061	59.53	Neutral	66	-6.47	QP
0.560273	46.79	Neutral	56	-9.21	QP
0.160217	51.56	Neutral	65.45	-13.89	QP
0.611044	43.21	Neutral	56	-12.79	QP
0.364816	41.07	Neutral	58.62	-17.55	QP
0.773613	40.2	Neutral	56	-15.8	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150061	37.83	Neutral	56	-18.17	Ave.
0.560273	35.47	Neutral	46	-10.53	Ave.
0.160217	29.11	Neutral	55.45	-26.34	Ave.
0.611044	31.84	Neutral	46	-14.16	Ave.
0.364816	28.03	Neutral	48.62	-20.59	Ave.
0.773613	26.27	Neutral	46	-19.73	Ave.

7 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISED RSS-Gen 8.9,

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 or Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 4 – General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for license-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

As per ISED RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

(1) Peak: $\text{RBW} = 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto}$

(2) Average: $\text{RBW} = 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto}$

7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2015-07-11	31 Months
Agilent	Amplifier, Pre	8447D	2944A06639	2017-06-28	1 year
Wisewave	Antenna, Horn 18-26.5GHz	ARH-4223-02	10555-02	2017-12-15	2 years
AH Systems	Pre-Amplifier 18-40GHz	PAM-1840VH	170	2017-02-28	14 Months
-	N-Type Cable	-	C00014	Each time ¹	N/A
Agilent	Pre-Amplifier	8449B	3147A00400	2017-06-15	1 year
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2017-03-27	2 years
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

7.6 Test Environmental Conditions

Temperature:	20-22 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa

The testing was performed by Troy Pandhumsoporn 2018-02-02 to 2018-02-13 in 5m chamber 3.

7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C and ISEDC RSS-247 standard's radiated emissions limits, and had the worst margin of:


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, channel
-0.40	2483.5	Vertical	n20 mode, high channel

Please refer to the following table and plots for specific test result details

7.8 Radiated Emissions Test Results

1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

2.4 GHz Wi-Fi, g mode, 2437 MHz

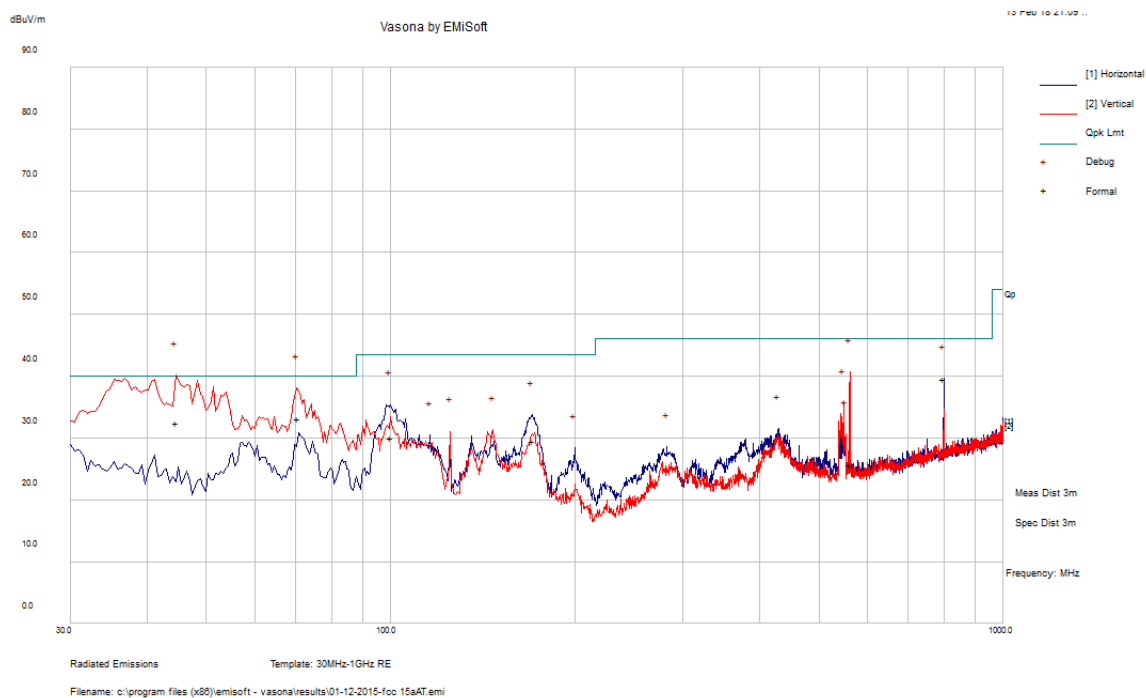

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
44.72425	32.52	149	V	323	40	-7.48	QP
70.5015	33.22	133	V	303	40	-6.78	QP
561.7478	25.77	101	V	70	46	-20.23	QP
799.1933	39.56	101	H	305	46	-6.44	QP
99.93825	30.11	175	H	243	43.5	-13.39	QP
170.338	29.61	166	H	152	43.5	-13.89	QP

2) 1–25 GHz Measured at 3 meters

802.11b mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	64.99	216	202	H	28.93	5.76	0	99.68	-	-	PK
2412	62.38	216	202	H	28.93	5.76	0	97.07	-	-	AV
2412	74.37	23	294	V	28.93	5.76	0	109.06	-	-	PK
2412	71.91	23	294	V	28.93	5.76	0	106.60	-	-	AV
2390	27.38	0	100	H	28.93	5.76	0	62.07	74.00	-11.93	PK
2390	15.28	0	100	H	28.93	5.76	0	49.97	54.00	-4.03	AV
2390	27.66	0	189	V	28.93	5.76	0	62.35	74.00	-11.65	PK
2390	16.53	0	189	V	28.93	5.76	0	51.22	54.00	-2.78	AV
4824	47.04	137	155	H	32.56	9.36	36.361	52.60	74.00	-21.40	PK
4824	38.06	137	155	H	32.56	9.36	36.361	43.62	54.00	-10.38	AV
4824	47.34	81	246	V	32.56	9.36	36.361	52.90	74.00	-21.10	PK
4824	37.77	81	246	V	32.56	9.36	36.361	43.33	54.00	-10.67	AV
7236	44.20	0	100	H	36.88	12.01	36.38	56.71	74.00	-17.29	PK
7236	32.60	0	100	H	36.88	12.01	36.38	45.11	54.00	-8.89	AV
7236	44.42	0	100	V	36.88	12.01	36.38	56.93	74.00	-17.07	PK
7236	32.47	0	100	V	36.88	12.01	36.38	44.98	54.00	-9.02	AV
Middle Channel 2437 MHz											
2437	67.24	219	225	H	29.19	5.76	0.00	102.19	-	-	PK
2437	64.29	219	225	H	28.93	5.76	0	98.98	-	-	AVE
2437	70.62	156	159	V	28.93	5.76	0	105.31	-	-	PK
2437	68.07	156	159	V	28.93	5.76	0	102.76	-	-	AVE
4874	46.89	0	225	H	32.53	9.46	36.33	52.55	74.00	-21.45	PK
4874	39.00	0	225	H	32.53	9.46	36.33	44.66	54.00	-9.34	AV
4874	47.85	65	225	V	32.53	9.46	36.33	53.51	74.00	-20.49	PK
4874	40.30	65	225	V	32.53	9.46	36.33	45.96	54.00	-8.04	AV
7311	44.70	0	100	H	36.99	11.97	36.40	57.26	74.00	-16.74	PK
7311	33.03	0	100	H	36.99	11.97	36.40	45.59	54.00	-8.41	AV
7311	45.18	0	100	V	36.99	11.97	36.40	57.74	74.00	-16.26	PK
7311	33.08	0	100	V	36.99	11.97	36.40	45.64	54.00	-8.36	AV

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel 2462 MHz											
2462	64.61	223	136	H	29.19	5.86	0.00	99.66	-	-	PK
2462	62.08	223	136	H	29.19	5.86	0.00	97.13	-	-	AV
2462	73.52	14	225	V	29.19	5.86	0.00	108.57	-	-	PK
2462	70.96	14	225	V	29.19	5.86	0.00	106.01	-	-	AV
2483.5	27.76	0	100	H	29.18	5.86	0.00	62.80	74.00	-11.20	PK
2483.5	15.67	0	100	H	29.18	5.86	0.00	50.71	54.00	-3.29	AV
2483.5	27.52	33	167	V	29.18	5.86	0.00	62.56	74.00	-11.44	PK
2483.5	18.37	33	167	V	29.18	5.86	0.00	53.41	54.00	-0.59	AV
4924	47.81	87	250	V	32.70	9.42	36.33	53.60	74.00	-20.41	PK
4924	39.47	87	250	V	32.70	9.42	36.33	45.26	54.00	-8.75	AV
7386	45.30	0	100	V	37.10	12.01	36.41	58.01	74.00	-15.99	PK
7386	32.57	0	100	V	37.10	12.01	36.41	45.28	54.00	-8.72	AV

802.11g mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	66.04	224	118	H	28.93	5.76	0	100.73	-	-	PK
2412	56.59	224	118	H	28.93	5.76	0	91.28	-	-	AV
2412	73.29	1	300	V	28.93	5.76	0	107.98	-	-	PK
2412	64.76	1	300	V	28.93	5.76	0	99.45	-	-	AV
2390	27.39	0	100	H	28.93	5.76	0	62.08	74.00	-11.92	PK
2390	15.09	0	100	H	28.93	5.76	0	49.78	54.00	-4.22	AV
2390	32.85	5	300	V	28.93	5.76	0	67.54	74.00	-6.46	PK
2390	18.89	5	300	V	28.93	5.76	0	53.58	54.00	-0.42	AV
4824	45.89	0	100	H	32.56	9.36	35.77	52.04	74.00	-21.96	PK
4824	34.14	0	100	H	32.56	9.36	35.77	40.29	54.00	-13.71	AV
4824	46.22	0	100	V	32.56	9.36	35.77	52.37	74.00	-21.63	PK
4824	34.51	0	100	V	32.56	9.36	35.77	40.66	54.00	-13.34	AV
7236	44.91	0	100	H	36.88	12.01	36.15	57.65	74.00	-16.35	PK
7236	33.02	0	100	H	36.88	12.01	36.15	45.76	54.00	-8.24	AV
7236	45.31	89	100	V	36.88	12.01	36.15	58.05	74.00	-15.95	PK
7236	33.21	89	100	V	36.88	12.01	36.15	45.95	54.00	-8.05	AV
Middle Channel 2437 MHz											
2437	71.27	219	150	H	29.19	5.76	0.00	106.22	-	-	PK
2437	62.68	219	150	H	29.19	5.76	0.00	97.63	-	-	AV
2437	79.14	53	255	V	29.19	5.76	0.00	114.09	-	-	PK
2437	72.92	53	255	V	29.19	5.76	0.00	107.87	-	-	AV
4874	45.95	0	100	H	32.53	9.46	35.76	52.17	74.00	-21.83	PK
4874	33.84	0	100	H	32.53	9.46	35.76	40.06	54.00	-13.94	AV
4874	45.89	0	100	V	32.53	9.46	35.76	52.11	74.00	-21.89	PK
4874	33.54	0	100	V	32.53	9.46	35.76	39.76	54.00	-14.24	AV
7311	44.68	0	100	H	36.99	11.97	36.15	57.49	74.00	-16.51	PK
7311	33.17	0	100	H	36.99	11.97	36.15	45.98	54.00	-8.02	AV
7311	44.48	0	100	V	36.99	11.97	36.15	57.29	74.00	-16.71	PK
7311	32.74	0	100	V	36.99	11.97	36.15	45.55	54.00	-8.45	AV

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel 2462 MHz											
2462	68.59	223	193	H	29.19	5.86	0.00	103.64	-	-	PK
2462	59.48	223	193	H	29.19	5.86	0.00	94.53	-	-	AV
2462	71.77	38	112	V	29.19	5.86	0.00	106.82	-	-	PK
2462	62.71	38	112	V	29.19	5.86	0.00	97.76	-	-	AV
2483.5	27.27	0	100	H	29.18	5.86	0.00	62.31	74.00	-11.69	PK
2483.5	15.92	0	100	H	29.18	5.86	0.00	50.96	54.00	-3.04	AV
2483.5	33.10	12	246	V	29.18	5.86	0.00	68.14	74.00	-5.86	PK
2483.5	18.35	12	246	V	29.18	5.86	0.00	53.39	54.00	-0.61	AV
4924	44.84	0	100	H	32.70	9.42	35.76	51.19	74.00	-22.81	PK
4924	32.89	0	100	H	32.70	9.42	35.76	39.24	54.00	-14.76	AV
4924	44.64	0	100	V	32.70	9.42	35.76	50.99	74.00	-23.01	PK
4924	32.98	0	100	V	32.70	9.42	35.76	39.33	54.00	-14.67	AV
7386	44.34	0	100	H	36.88	12.01	36.18	57.05	74.00	-16.95	PK
7386	32.65	0	100	H	36.88	12.01	36.18	45.36	54.00	-8.64	AV
7386	44.81	0	100	V	36.88	12.01	36.18	57.52	74.00	-16.48	PK
7386	32.72	0	100	V	36.88	12.01	36.18	45.43	54.00	-8.57	AV

802.11n20 mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	68.36	216	151	H	28.93	5.76	0	103.05	-	-	PK
2412	58.49	216	151	H	28.93	5.76	0	93.18	-	-	AV
2412	72.77	0	296	V	28.93	5.76	0	107.46	-	-	PK
2412	64.18	0	296	V	28.93	5.76	0	98.87	-	-	AV
2390	29.52	217	242	H	28.93	5.76	0	64.21	74.00	-9.79	PK
2390	17.22	217	242	H	28.93	5.76	0	51.91	54.00	-2.09	AV
2390	34.19	0	151	V	28.93	5.76	0	68.88	74.00	-5.12	PK
2390	18.81	0	151	V	28.93	5.76	0	53.50	54.00	-0.50	AV
4824	44.99	0	100	H	32.56	9.36	35.77	51.14	74.00	-22.86	PK
4824	33.88	0	100	H	32.56	9.36	35.77	40.03	54.00	-13.97	AV
4824	45.75	0	100	V	32.56	9.36	35.77	51.90	74.00	-22.10	PK
4824	33.87	0	100	V	32.56	9.36	35.77	40.02	54.00	-13.98	AV
7236	44.53	0	100	H	36.88	12.01	36.15	57.27	74.00	-16.73	PK
7236	32.33	0	100	H	36.88	12.01	36.15	45.07	54.00	-8.93	AV
7236	44.04	0	100	V	36.88	12.01	36.15	56.78	74.00	-17.22	PK
7236	32.78	0	100	V	36.88	12.01	36.15	45.52	54.00	-8.48	AV
Middle Channel 2437 MHz											
2437	74.84	224	164	H	29.19	5.76	0.00	109.79	-	-	PK
2437	65.54	224	164	H	29.19	5.76	0.00	100.49	-	-	AV
2437	80.09	36	295	V	29.19	5.76	0.00	115.04	-	-	PK
2437	71.08	36	295	V	29.19	5.76	0.00	106.03	-	-	AV
4874	45.33	0	100	H	32.53	9.46	35.76	51.55	74.00	-22.45	PK
4874	33.99	0	100	H	32.53	9.46	35.76	40.21	54.00	-13.79	AV
4874	45.12	0	100	V	32.53	9.46	35.76	51.34	74.00	-22.66	PK
4874	33.22	0	100	V	32.53	9.46	35.76	39.44	54.00	-14.56	AV
7311	44.64	0	100	H	36.99	11.97	36.15	57.45	74.00	-16.55	PK
7311	33.69	0	100	H	36.99	11.97	36.15	46.50	54.00	-7.50	AV
7311	45.15	0	100	V	36.99	11.97	36.15	57.96	74.00	-16.04	PK
7311	33.58	0	100	V	36.99	11.97	36.15	46.39	54.00	-7.61	AV

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel 2462 MHz											
2462	66.51	219	178	H	29.19	5.86	0.00	101.56	-	-	PK
2462	57.20	219	178	H	29.19	5.86	0.00	92.25	-	-	AV
2462	70.26	0	294	V	29.19	5.86	0.00	105.31	-	-	PK
2462	60.85	0	294	V	29.19	5.86	0.00	95.90	-	-	AV
2483.5	29.89	223	220	H	29.18	5.86	0.00	64.93	74.00	-9.07	PK
2483.5	17.35	223	220	H	29.18	5.86	0.00	52.39	54.00	-1.61	AV
2483.5	33.05	28	150	V	29.18	5.86	0.00	68.09	74.00	-5.91	PK
2483.5	18.56	28	150	V	29.18	5.86	0.00	53.60	54.00	-0.40	AV
4924	45.15	0	100	H	32.70	9.42	35.76	51.50	74.00	-22.50	PK
4924	33.98	0	100	H	32.70	9.42	35.76	40.33	54.00	-13.67	AV
4924	45.01	0	100	V	32.70	9.42	35.76	51.36	74.00	-22.64	PK
4924	33.96	0	100	V	32.70	9.42	35.76	40.31	54.00	-13.69	AV
7386	44.50	0	100	H	36.88	12.01	36.18	57.21	74.00	-16.79	PK
7386	33.22	0	100	H	36.88	12.01	36.18	45.93	54.00	-8.07	AV
7386	44.47	0	100	V	36.88	12.01	36.18	57.18	74.00	-16.82	PK
7386	33.42	0	100	V	36.88	12.01	36.18	46.13	54.00	-7.87	AV

802.11n40 mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2422 MHz											
2422	62.09	218	153	H	28.93	5.76	0	96.78	-	-	PK
2422	53.21	218	153	H	28.93	5.76	0	87.90	-	-	AV
2422	67.23	14	282	V	28.93	5.76	0	101.92	-	-	PK
2422	58.27	14	282	V	28.93	5.76	0	92.96	-	-	AV
2390	28.17	207	205	H	28.93	5.76	0	62.86	74.00	-11.14	PK
2390	16.59	207	205	H	28.93	5.76	0	51.28	54.00	-2.72	AV
2390	31.00	0	300	V	28.93	5.76	0	65.69	74.00	-8.31	PK
2390	18.72	0	300	V	28.93	5.76	0	53.41	54.00	-0.59	AV
4844	45.44	0	100	H	32.56	9.36	35.77	51.59	74.00	-22.41	PK
4844	34.17	0	100	H	32.56	9.36	35.77	40.32	54.00	-13.68	AV
4844	46.19	0	100	V	32.56	9.36	35.77	52.34	74.00	-21.66	PK
4844	35.42	0	100	V	32.56	9.36	35.77	41.57	54.00	-12.43	AV
7266	45.24	0	100	H	36.88	12.01	36.15	57.98	74.00	-16.02	PK
7266	33.99	0	100	H	36.88	12.01	36.15	46.73	54.00	-7.27	AV
7266	44.46	0	100	V	36.88	12.01	36.15	57.20	74.00	-16.80	PK
7266	34.10	0	100	V	36.88	12.01	36.15	46.84	54.00	-7.16	AV
Middle Channel 2437 MHz											
2437	65.52	224	152	H	29.19	5.76	0.00	100.47	-	-	PK
2437	50.91	224	152	H	29.19	5.76	0.00	85.86	-	-	AV
2437	67.80	27	152	V	29.19	5.76	0.00	102.75	-	-	PK
2437	53.36	27	152	V	29.19	5.76	0.00	88.31	-	-	AV
4874	45.87	0	100	H	32.53	9.46	35.76	52.09	74.00	-21.91	PK
4874	34.83	0	100	H	32.53	9.46	35.76	41.05	54.00	-12.95	AV
4874	45.96	0	100	V	32.53	9.46	35.76	52.18	74.00	-21.82	PK
4874	34.92	0	100	V	32.53	9.46	35.76	41.14	54.00	-12.86	AV
7311	44.49	0	100	H	36.99	11.97	36.15	57.30	74.00	-16.70	PK
7311	33.86	0	100	H	36.99	11.97	36.15	46.67	54.00	-7.33	AV
7311	45.12	0	100	V	36.99	11.97	36.15	57.93	74.00	-16.07	PK
7311	33.76	0	100	V	36.99	11.97	36.15	46.57	54.00	-7.43	AV


Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel 2452 MHz											
2452	60.92	220	201	H	29.19	5.86	0.00	95.97	-	-	PK
2452	46.20	220	201	H	29.19	5.86	0.00	81.25	-	-	AV
2452	64.03	32	100	V	29.19	5.86	0.00	99.08	-	-	PK
2452	50.82	32	100	V	29.19	5.86	0.00	85.87	-	-	AV
2483.5	29.88	0	100	H	29.18	5.86	0.00	64.92	74.00	-9.08	PK
2483.5	18.31	0	100	H	29.18	5.86	0.00	53.35	54.00	-0.65	AV
2483.5	30.79	0	151	V	29.18	5.86	0.00	65.83	74.00	-8.17	PK
2483.5	18.34	0	151	V	29.18	5.86	0.00	53.38	54.00	-0.62	AV
4904	45.55	0	100	H	32.70	9.42	35.76	51.90	74.00	-22.10	PK
4904	34.06	0	100	H	32.70	9.42	35.76	40.41	54.00	-13.59	AV
4904	45.58	0	100	V	32.70	9.42	35.76	51.93	74.00	-22.07	PK
4904	34.27	0	100	V	32.70	9.42	35.76	40.62	54.00	-13.38	AV
7356	44.08	0	100	H	36.88	12.01	36.18	56.79	74.00	-17.21	PK
7356	32.93	0	100	H	36.88	12.01	36.18	45.64	54.00	-8.36	AV
7356	43.10	0	100	V	36.88	12.01	36.18	55.81	74.00	-18.19	PK
7356	32.98	0	100	V	36.88	12.01	36.18	45.69	54.00	-8.31	AV

Note: Duty Cycle Correction Factor has been added to the measurements.


The worst case g mode Middle Channel has been listed below.

1 GHz – 18 GHz

This test was performed with a 2.4 – 2.4835GHz band reject filter.

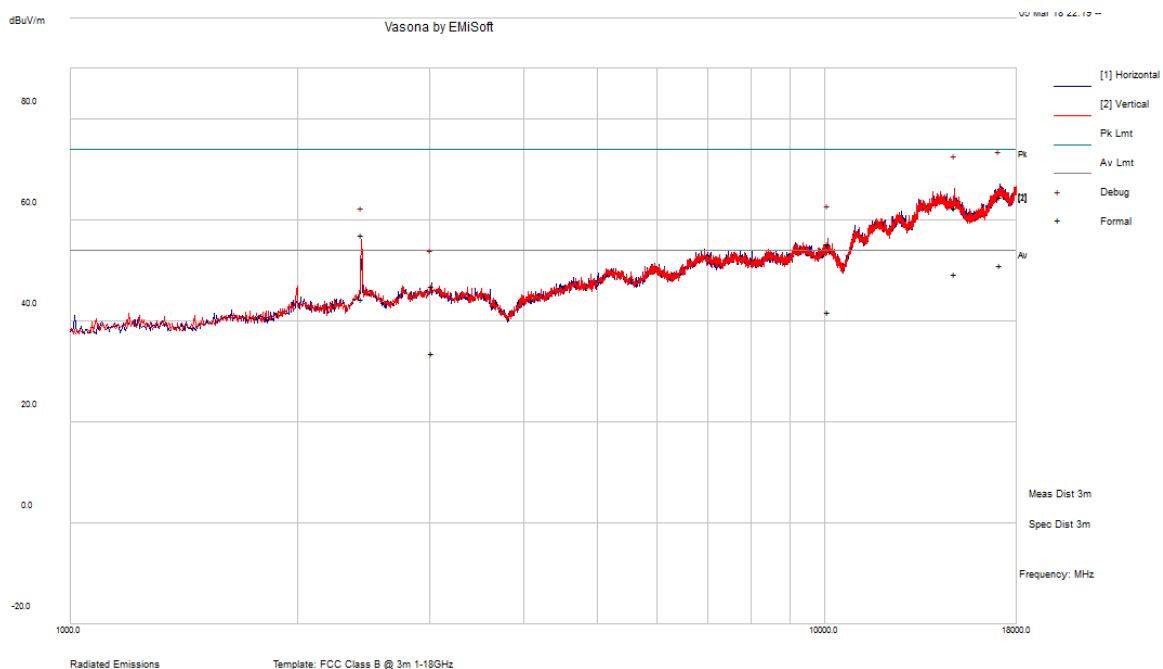

18 GHz – 26.5 GHz

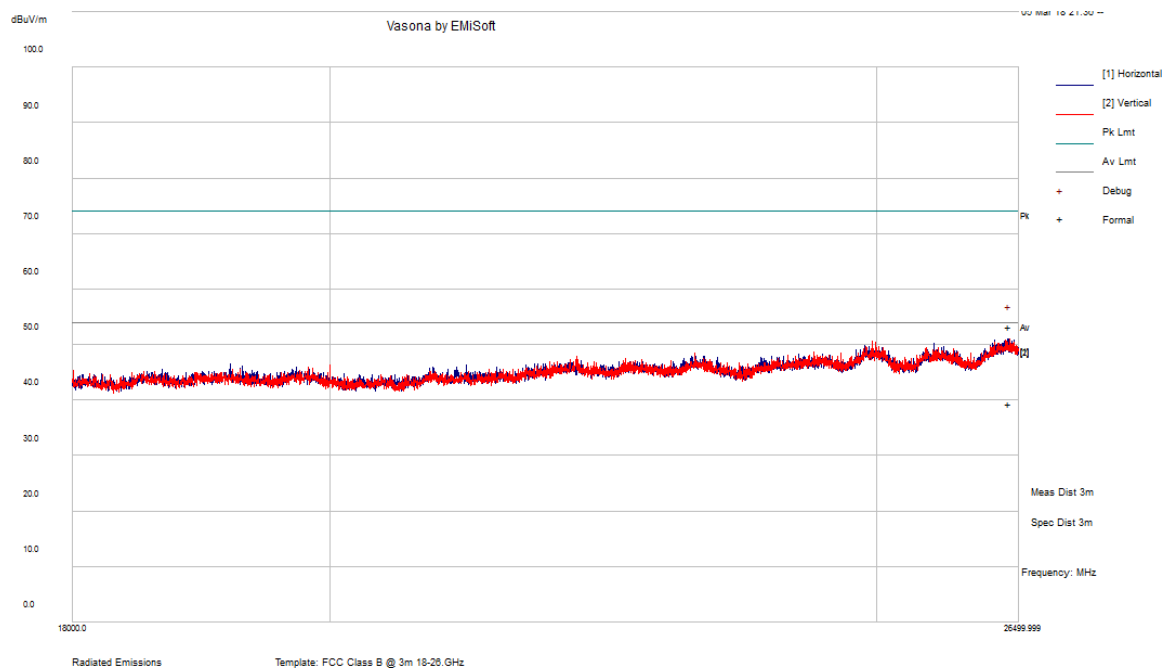

8 FCC §15.247(a) (2) & ISEDC RSS-247 §5.2 -Emission Bandwidth

8.1 Applicable Standards

According to ECFR §15.247(a) (2) and ISEDC RSS-247 §5.2, systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

8.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Troy Pandhumsoporn on 2018-02-12 in RF site.

8.5 Test Results


Channel	Frequency (MHz)	99 % OBW (MHz)			6 dB OBW (MHz)			6 dB OBW Limit (kHz)	Result
		Chain 0	Chain 1	Chain 2	Chain 0	Chain 1	Chain 2		
802.11b									
Low	2412	11.86	12.02	11.90	9.09	9.09	9.09	≥ 500	Pass
Middle	2437	12.29	12.53	12.09	9.10	9.57	9.07	≥ 500	Pass
High	2462	11.95	12.24	11.94	9.09	9.09	9.07	≥ 500	Pass
802.11g									
Low	2412	16.71	16.65	16.70	16.40	16.38	16.43	≥ 500	Pass
Middle	2437	19.41	21.20	18.04	16.37	15.77	16.37	≥ 500	Pass
High	2462	16.72	16.64	16.69	16.42	16.40	16.45	≥ 500	Pass
802.11n20									
Low	2412	17.82	17.75	17.75	17.63	17.64	17.65	≥ 500	Pass
Middle	2437	19.23	21.69	18.34	17.62	17.61	17.62	≥ 500	Pass
High	2462	17.88	17.81	17.78	17.64	17.66	17.65	≥ 500	Pass
802.11n40									
Low	2422	36.28	36.16	36.25	36.42	36.45	36.46	≥ 500	Pass
Middle	2437	36.32	36.19	36.23	36.41	35.87	36.42	≥ 500	Pass
High	2452	36.28	36.13	36.21	36.40	36.42	36.42	≥ 500	Pass

Please refer to the following plots for detailed test results.


6 dB Emission Bandwidth

802.11b mode Chain 0


Low Channel 2412 MHz

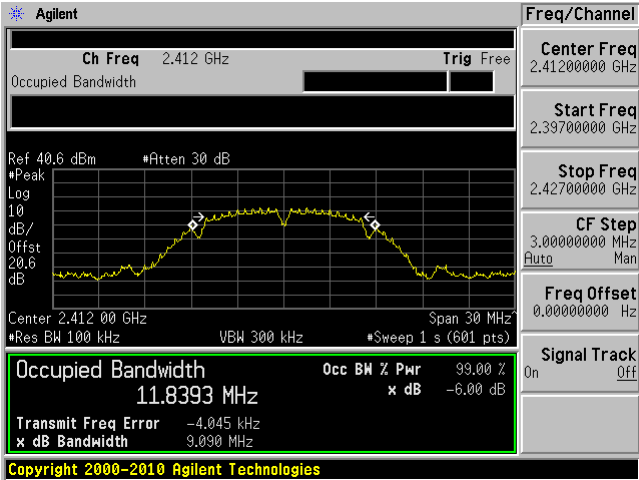

Middle Channel 2437 MHz

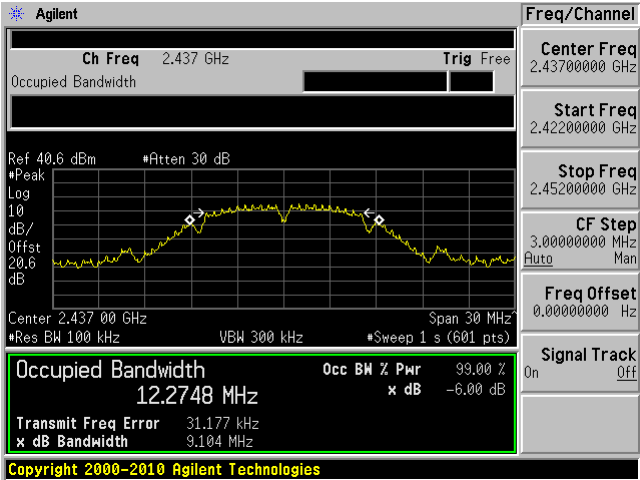


High Channel 2462 MHz

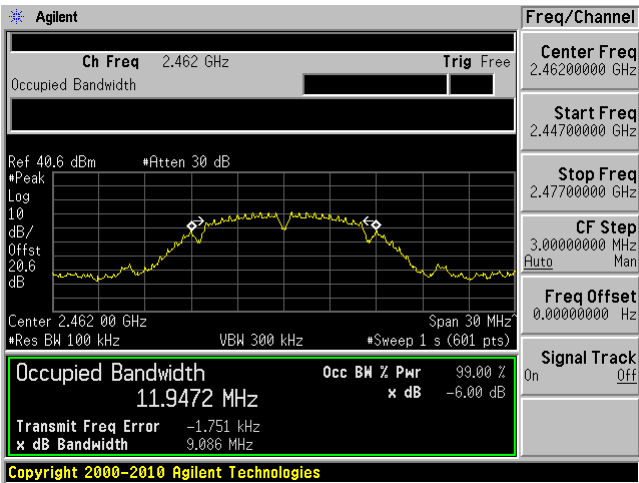


802.11b mode Chain 1


Low Channel 2412 MHz

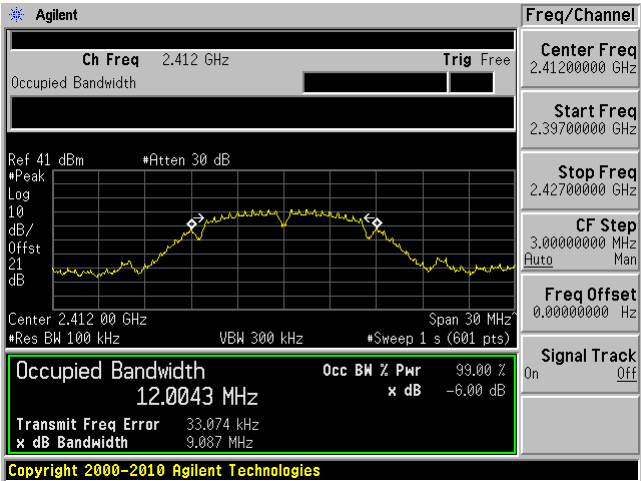

Middle Channel 2437 MHz

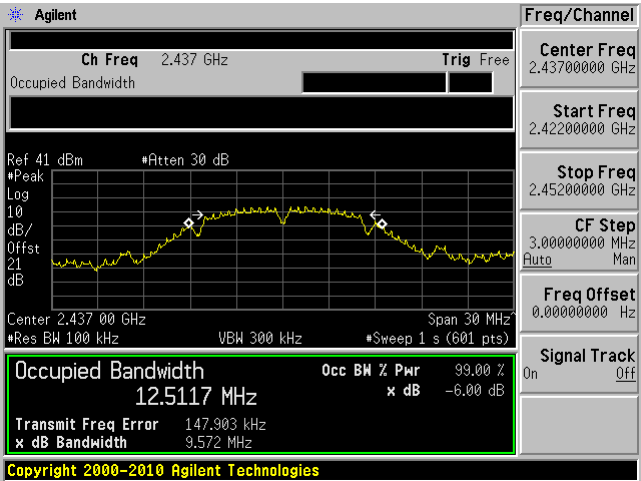


High Channel 2462 MHz

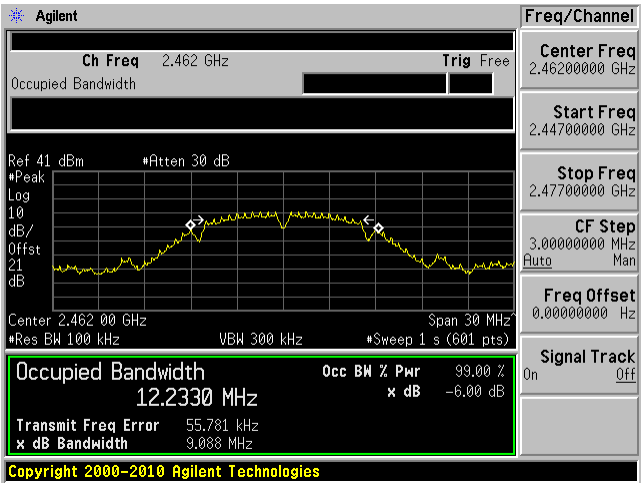


802.11b mode Chain 2


Low Channel 2412 MHz

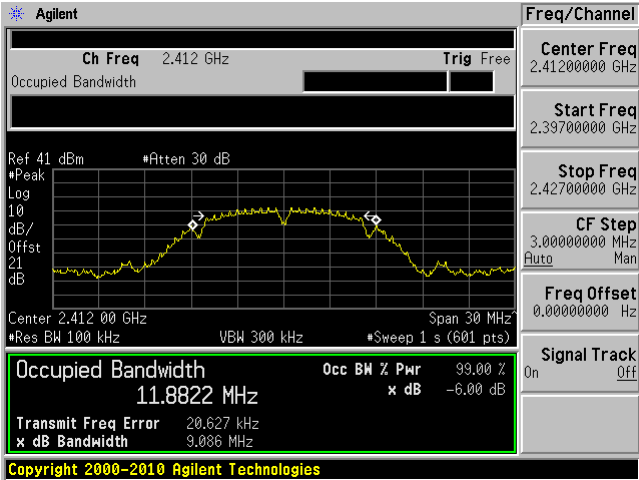

Middle Channel 2437 MHz

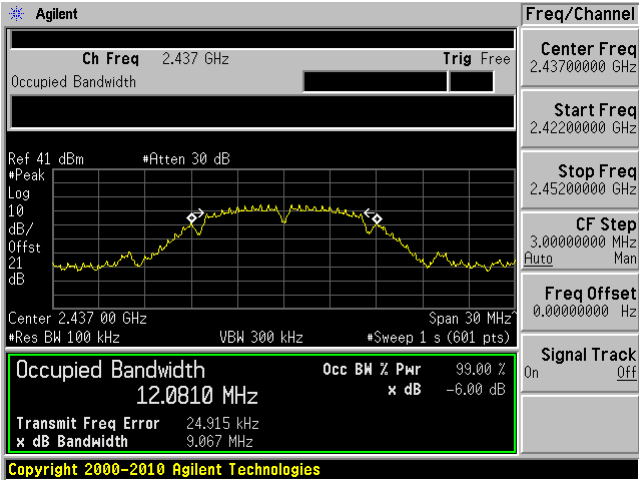


High Channel 2462 MHz

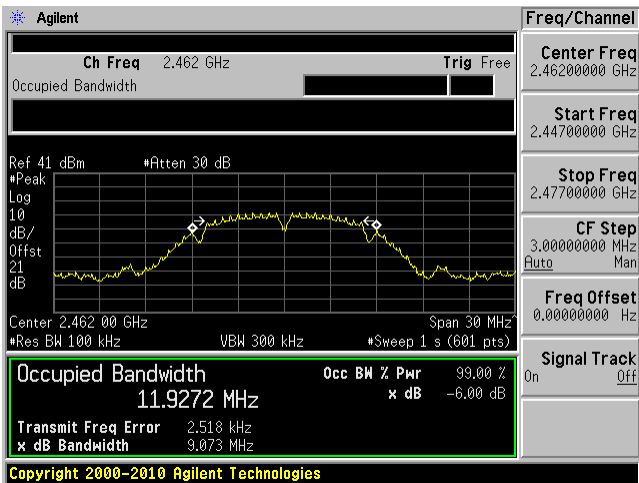


802.11g mode Chain 0


Low Channel 2412 MHz

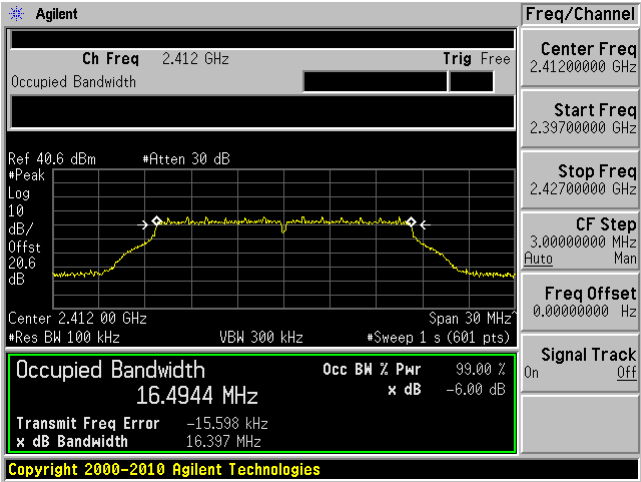

Middle Channel 2437 MHz

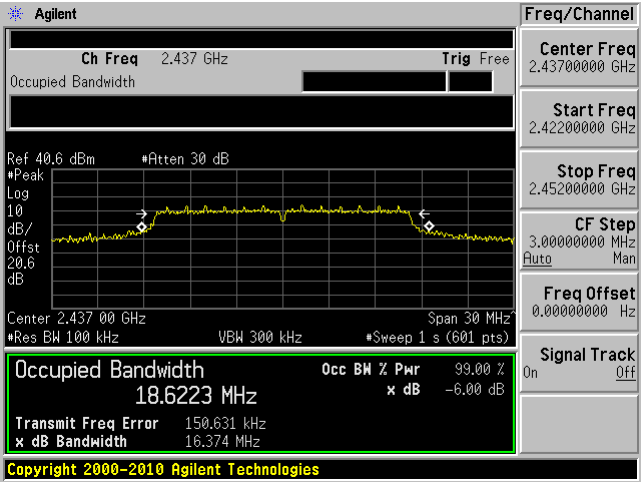


High Channel 2462 MHz

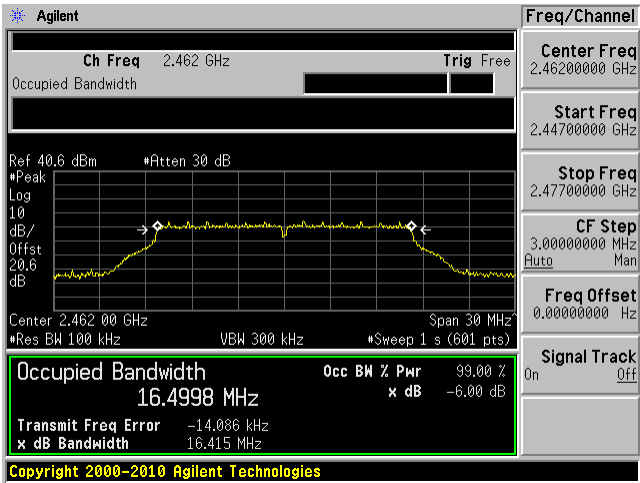


802.11g mode Chain 1


Low Channel 2412 MHz

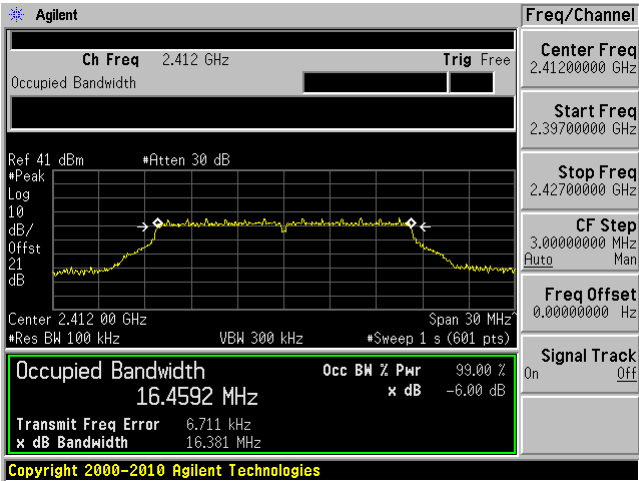

Middle Channel 2437 MHz

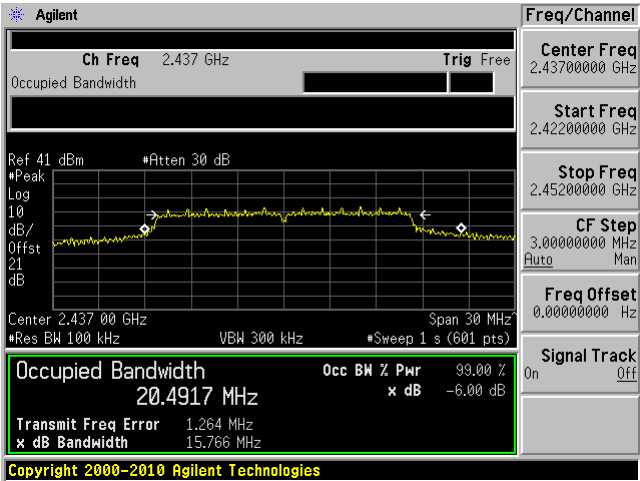


High Channel 2462 MHz

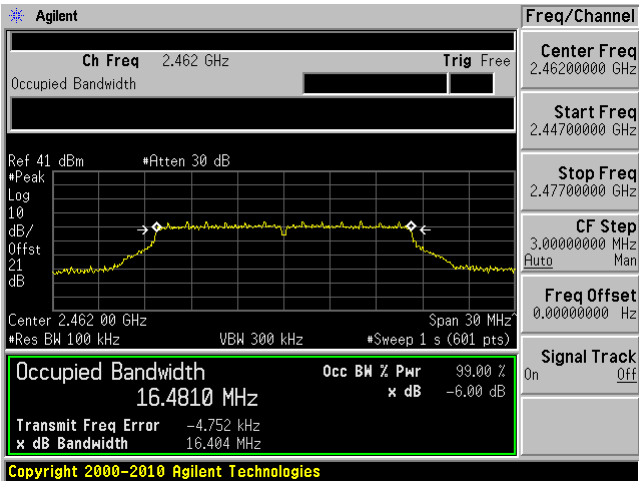


802.11g mode Chain 2


Low Channel 2412 MHz

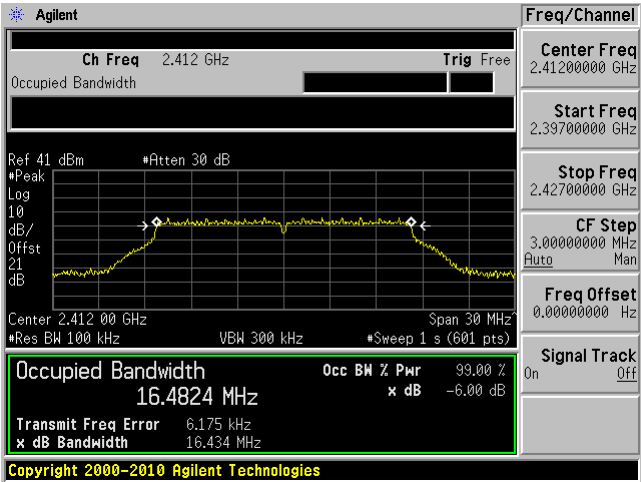

Middle Channel 2437 MHz

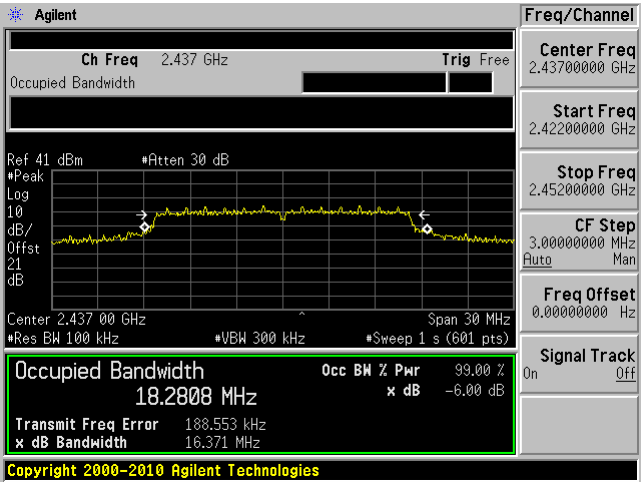


High Channel 2462 MHz

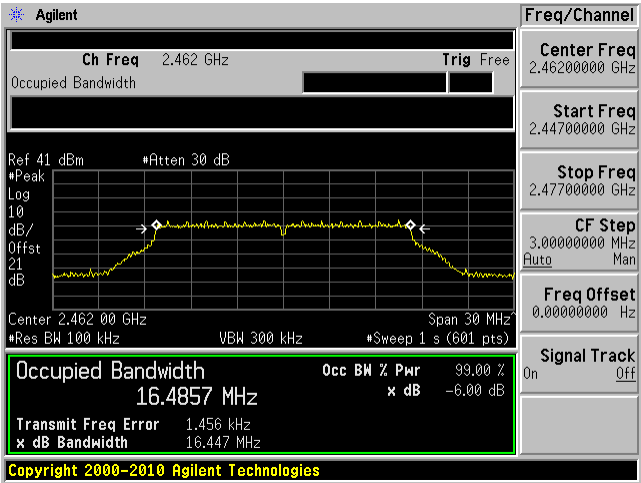


802.11n20 mode Chain 0


Low Channel 2412 MHz

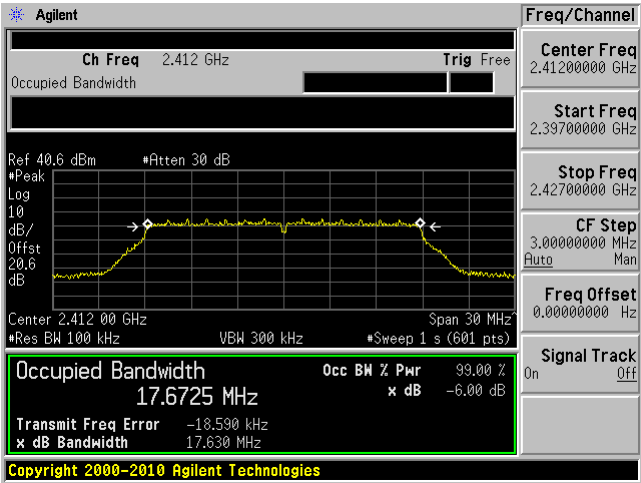

Middle Channel 2437 MHz

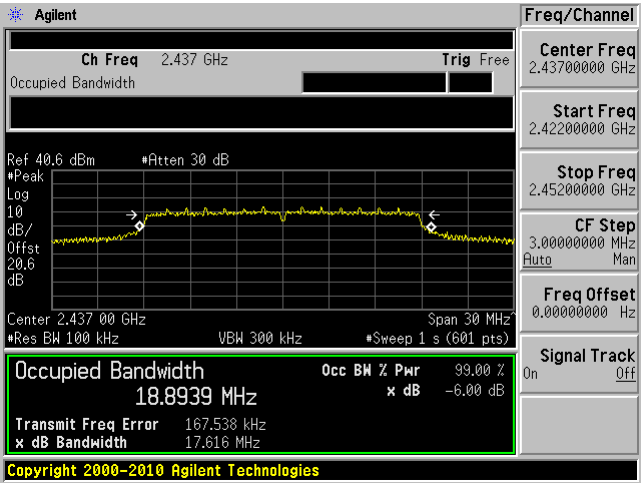


High Channel 2462 MHz

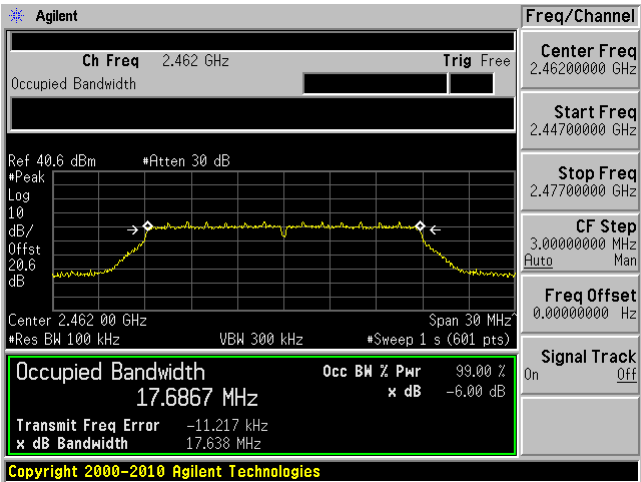


802.11n20 mode Chain 1


Low Channel 2412 MHz

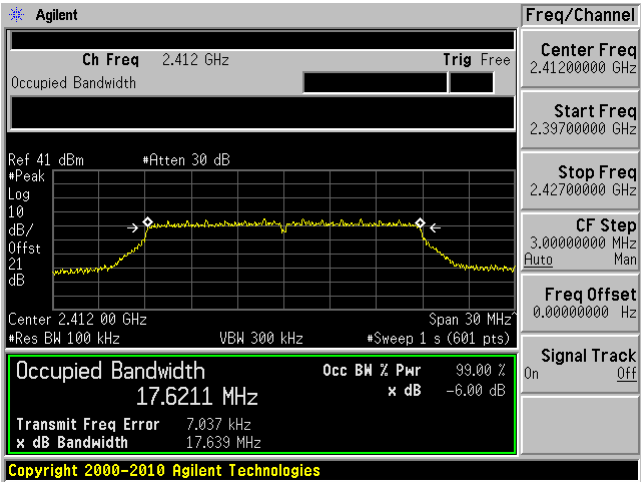

Middle Channel 2437 MHz

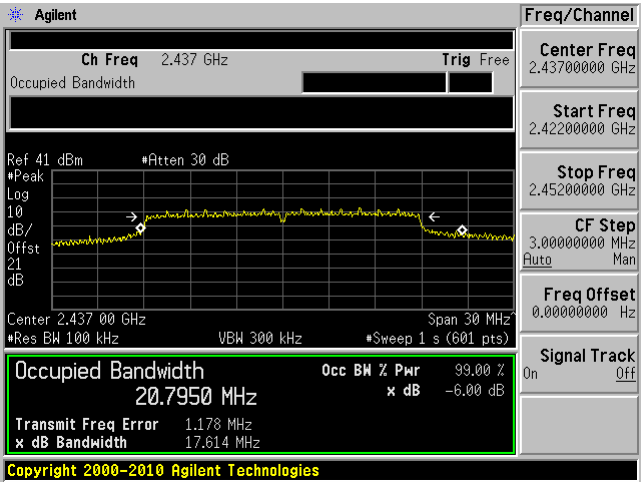


High Channel 2462 MHz

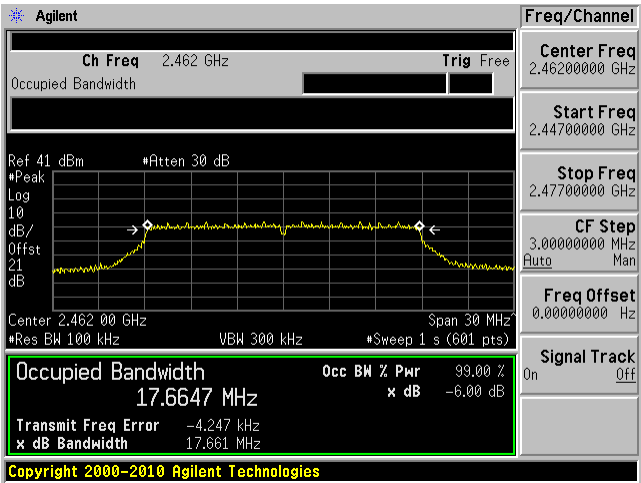


802.11n20 mode Chain 2


Low Channel 2412 MHz

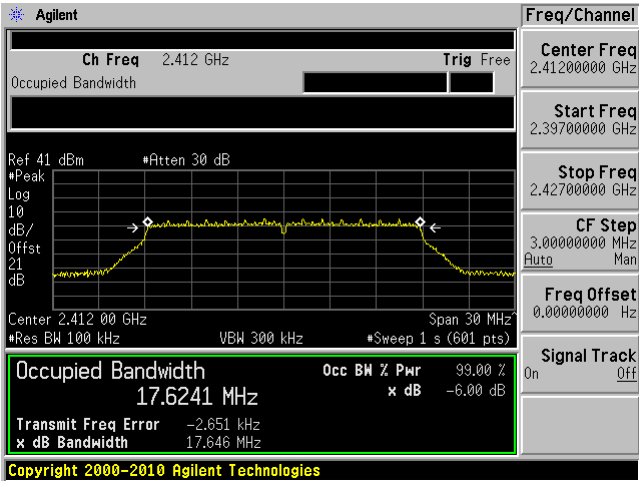

Middle Channel 2437 MHz

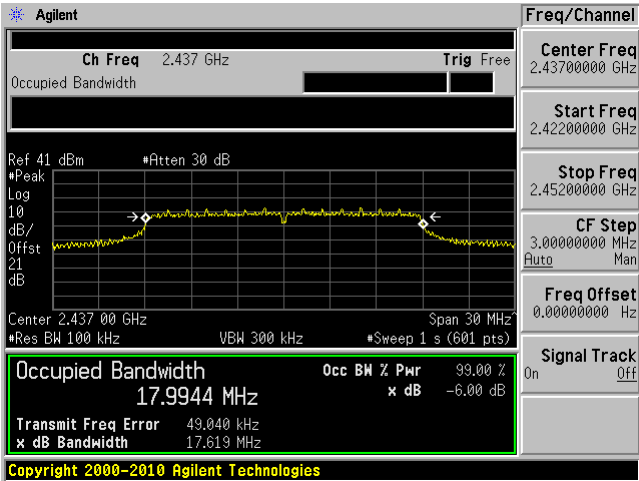


High Channel 2462 MHz

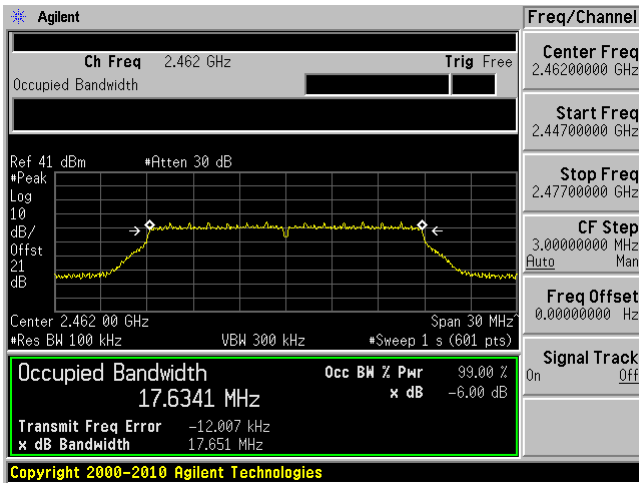


802.11n40 mode Chain 0


Low Channel 2422 MHz

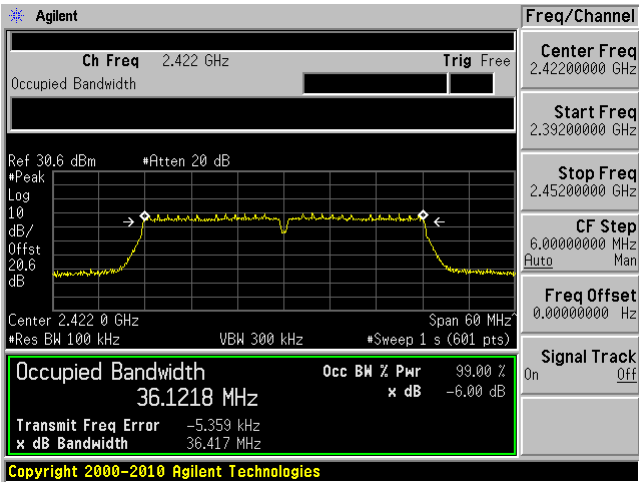

Middle Channel 2437 MHz

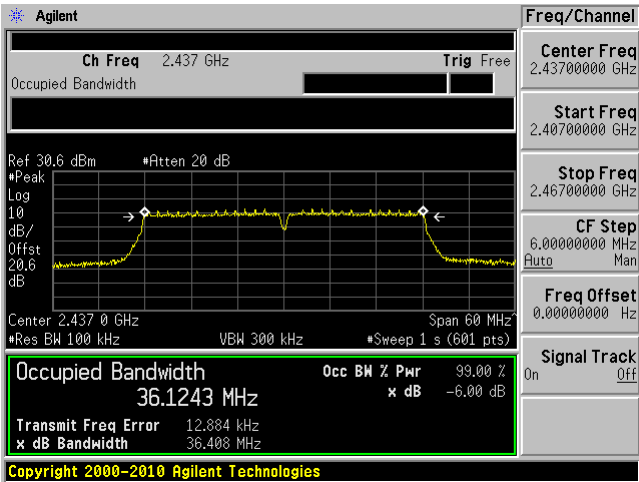


High Channel 2452 MHz

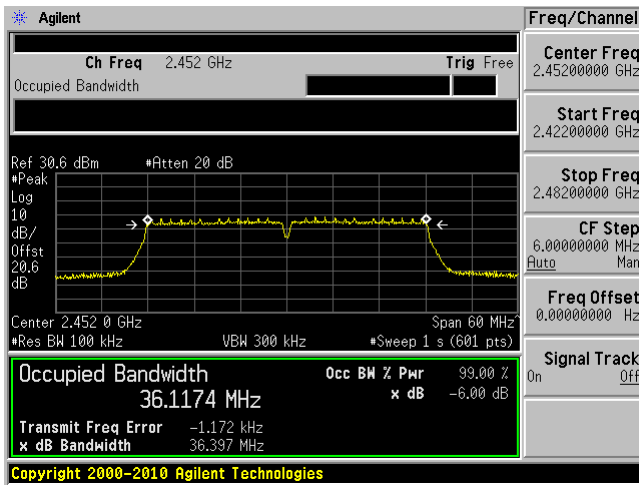


802.11n40 mode Chain 1


Low Channel 2422 MHz

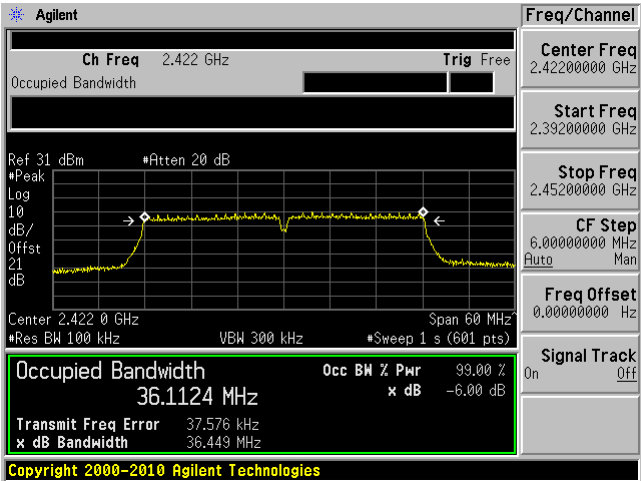

Middle Channel 2437 MHz

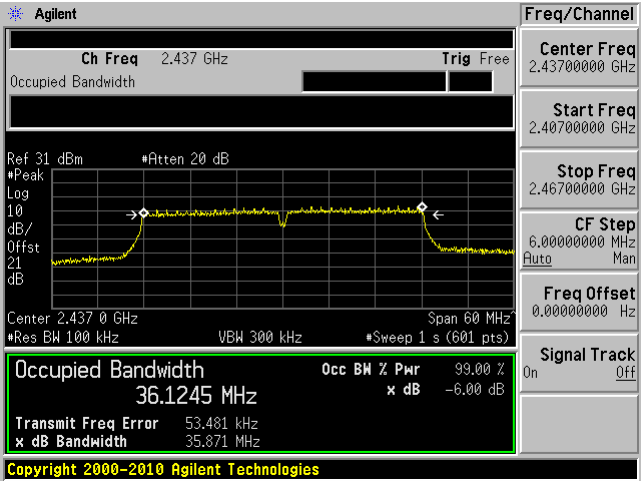


High Channel 2452 MHz

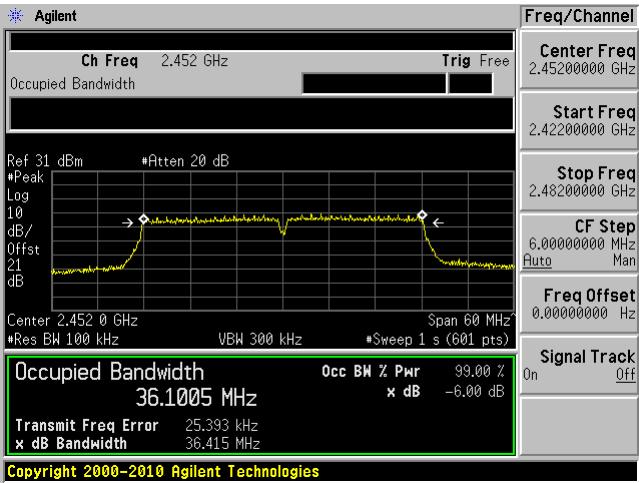


802.11n40 mode Chain 2


Low Channel 2422 MHz

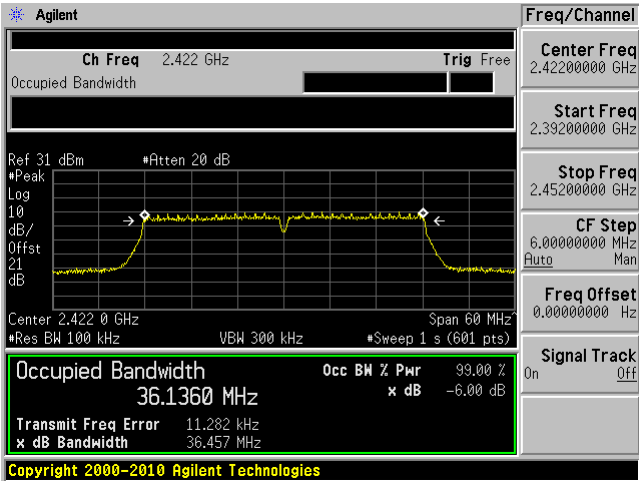

Middle Channel 2437 MHz

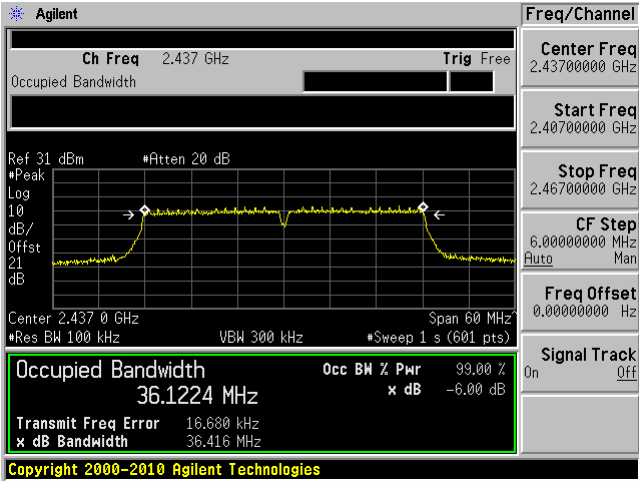


High Channel 2452 MHz

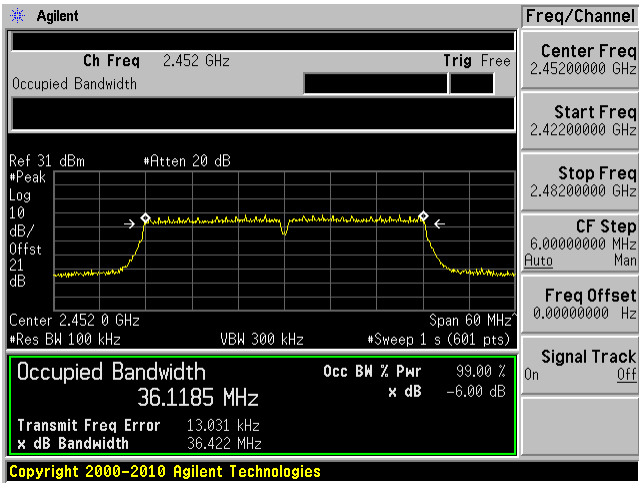


99% Emission Bandwidth

802.11b mode Chain 0


Low Channel 2412 MHz

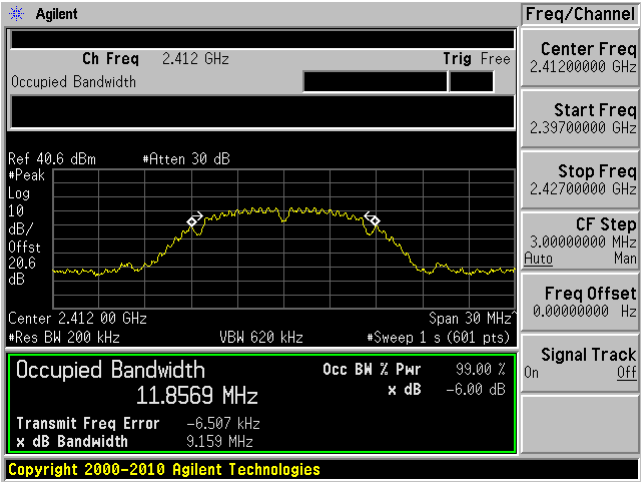

Middle Channel 2437 MHz

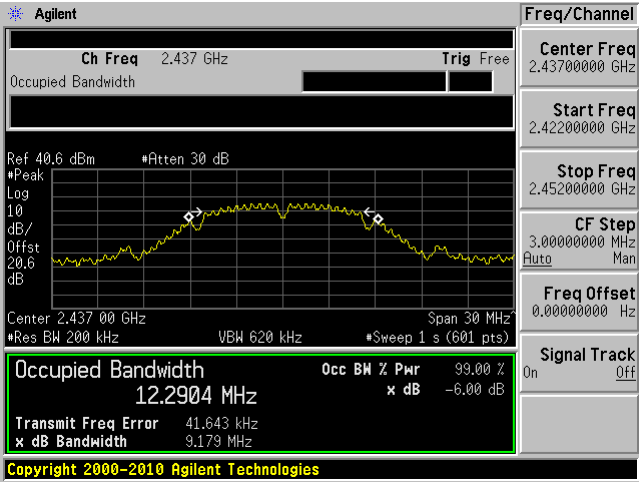


High Channel 2462 MHz

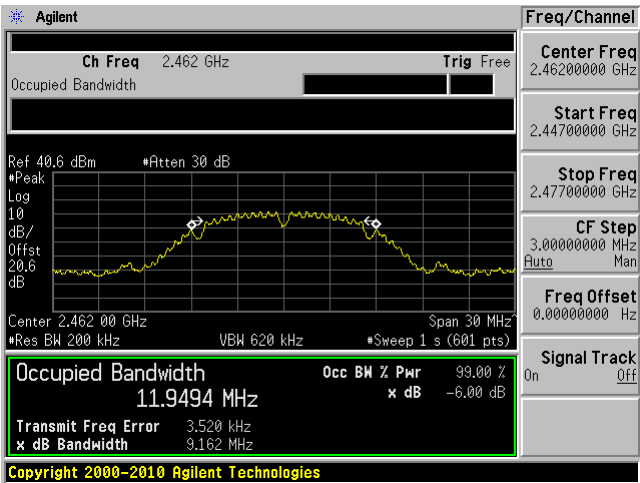


802.11b mode Chain 1


Low Channel 2412 MHz

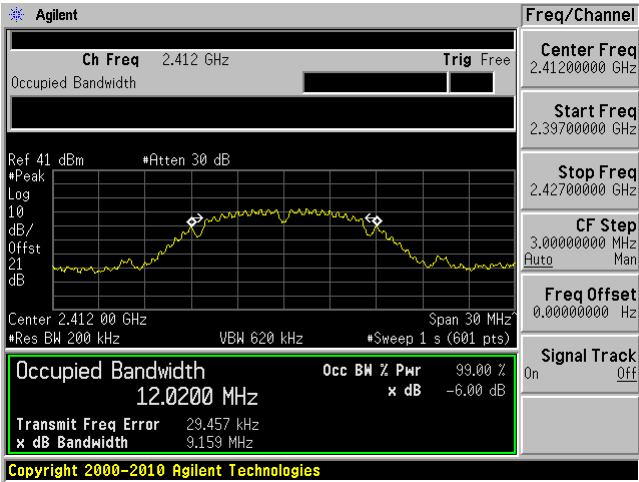

Middle Channel 2437 MHz

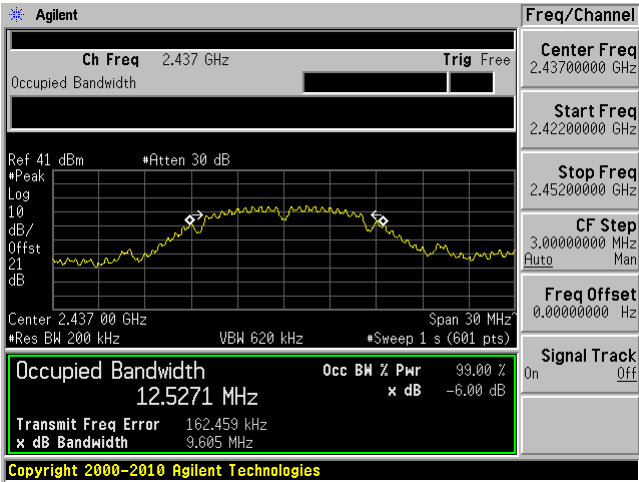


High Channel 2462 MHz

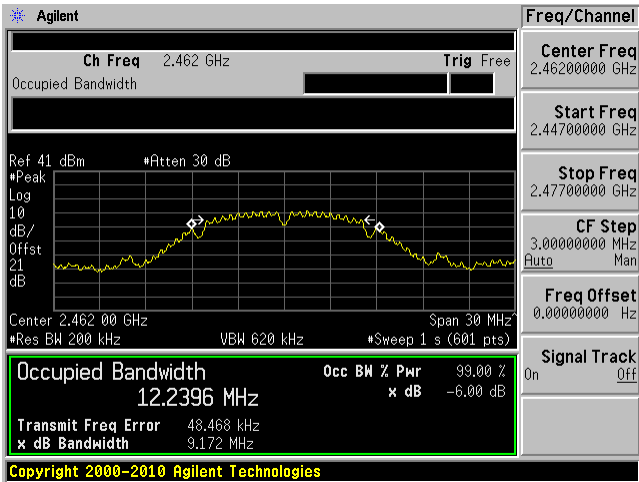


802.11b mode Chain 2


Low Channel 2412 MHz

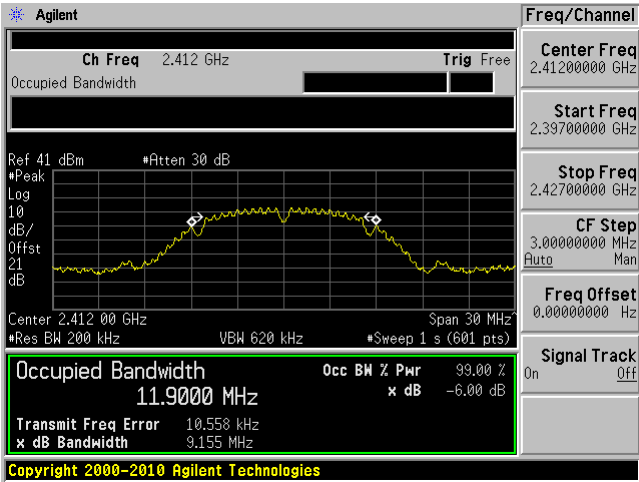

Middle Channel 2437 MHz

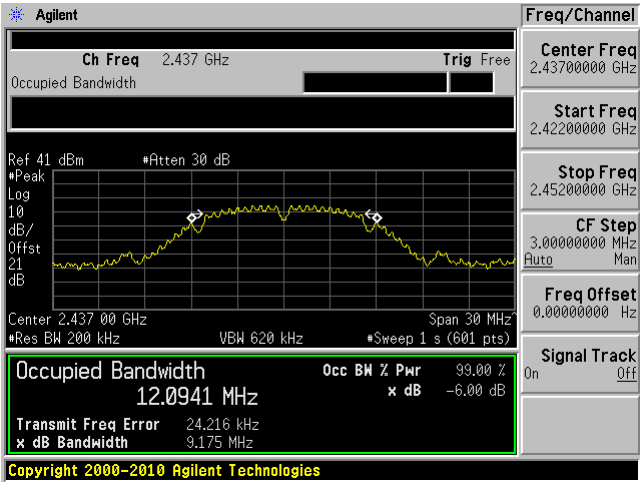


High Channel 2462 MHz

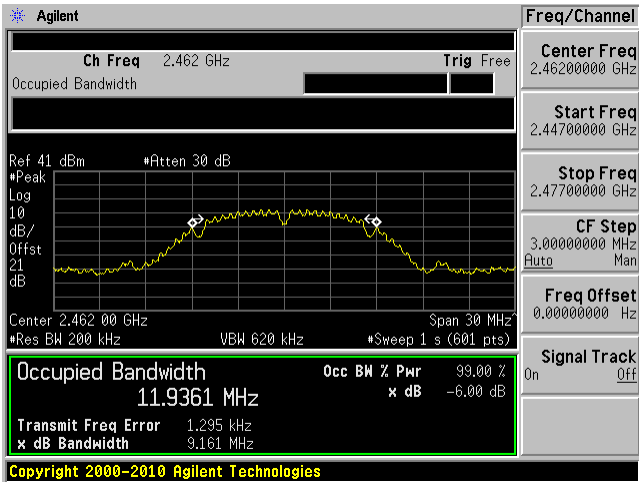


802.11g mode Chain 0


Low Channel 2412 MHz

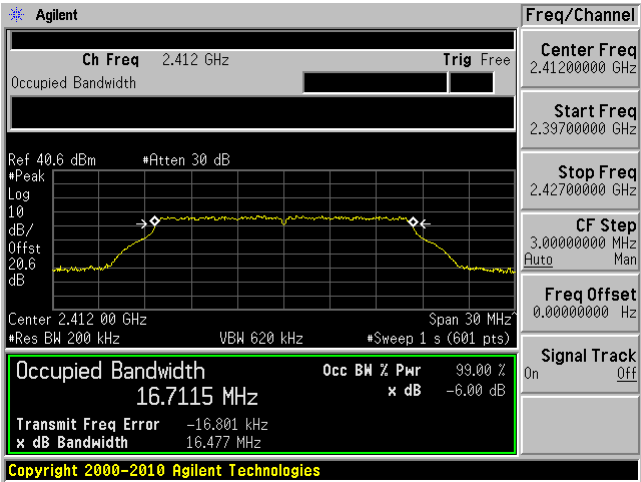

Middle Channel 2437 MHz

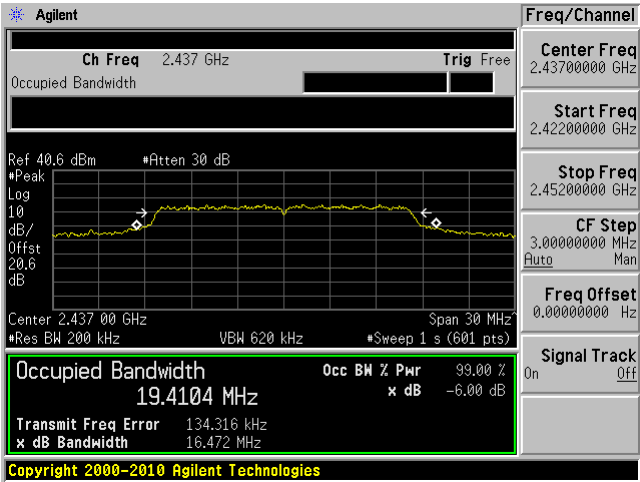


High Channel 2462 MHz

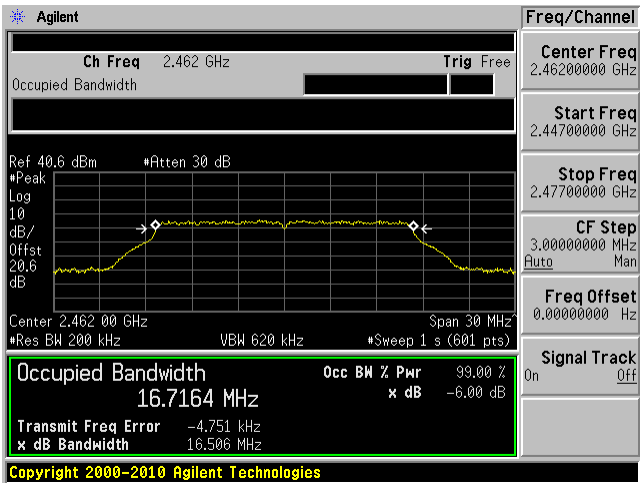


802.11g mode Chain 1


Low Channel 2412 MHz

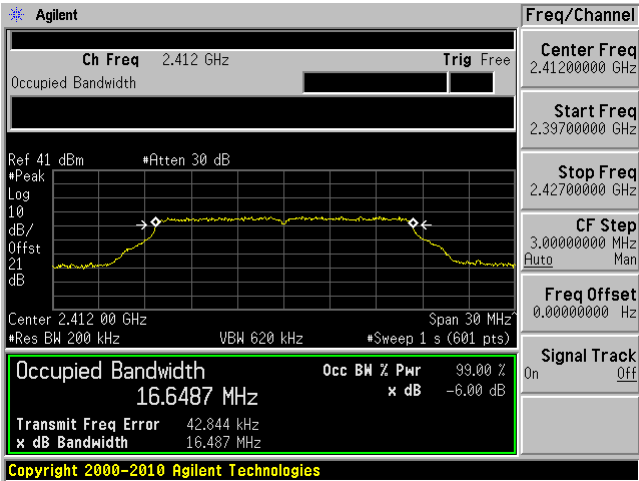

Middle Channel 2437 MHz

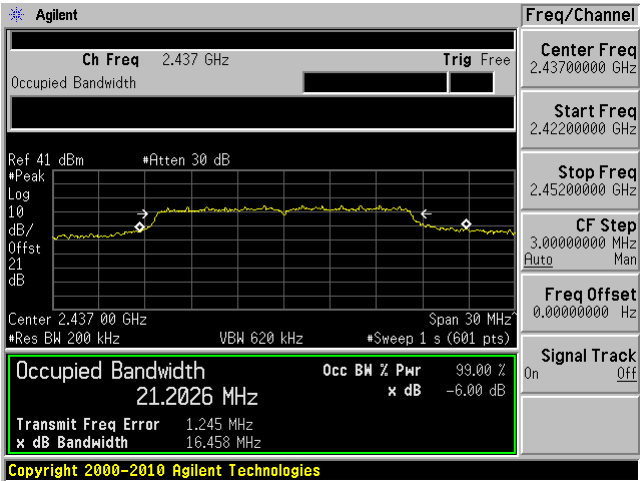


High Channel 2462 MHz

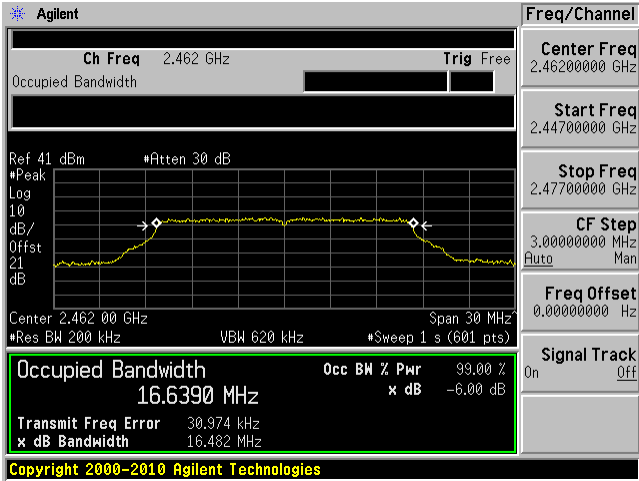


802.11g mode Chain 2


Low Channel 2412 MHz

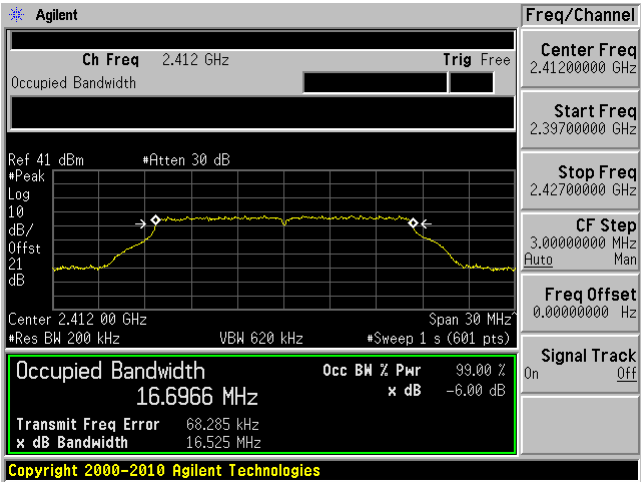

Middle Channel 2437 MHz

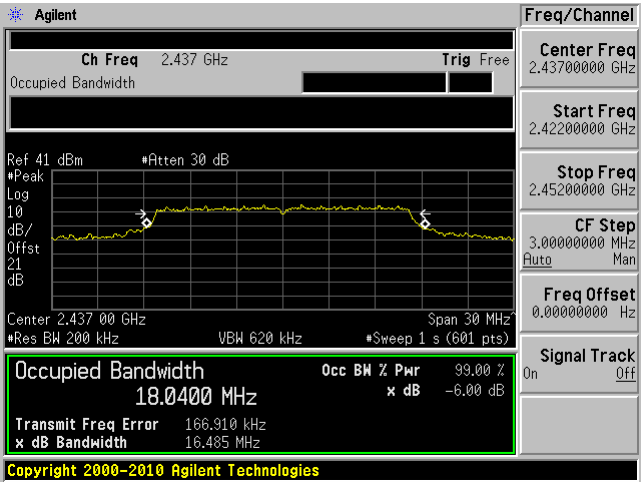


High Channel 2462 MHz

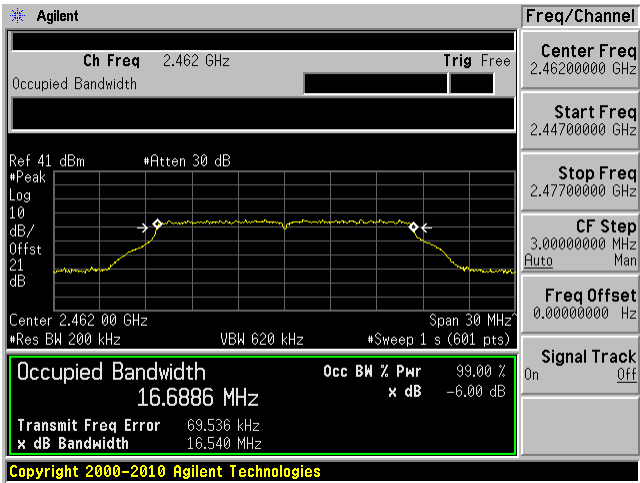


802.11n20 mode Chain 0


Low Channel 2412 MHz

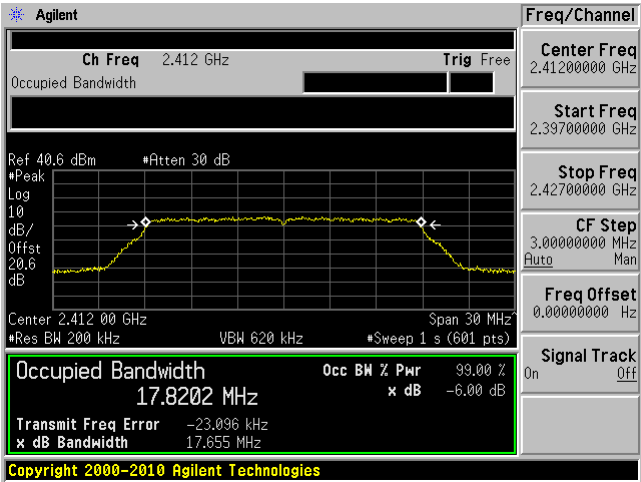

Middle Channel 2437 MHz

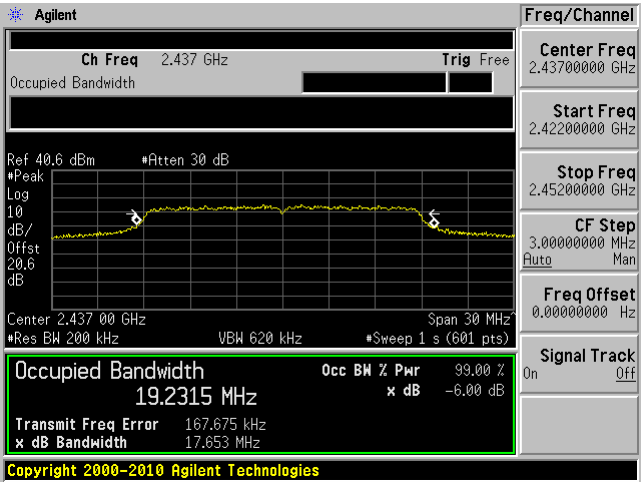


High Channel 2462 MHz

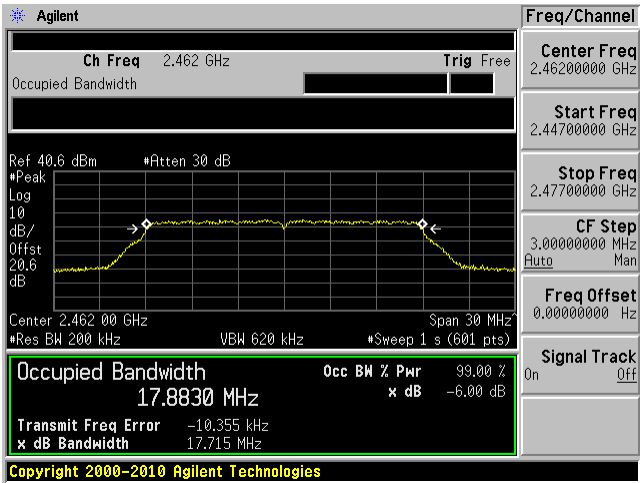


802.11n20 mode Chain 1


Low Channel 2412 MHz

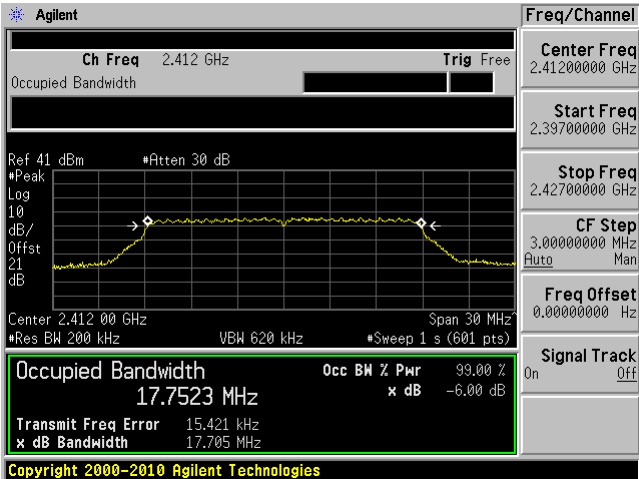

Middle Channel 2437 MHz

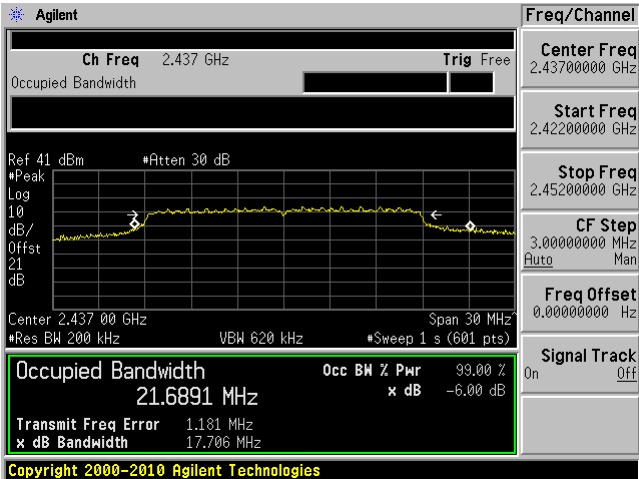


High Channel 2462 MHz

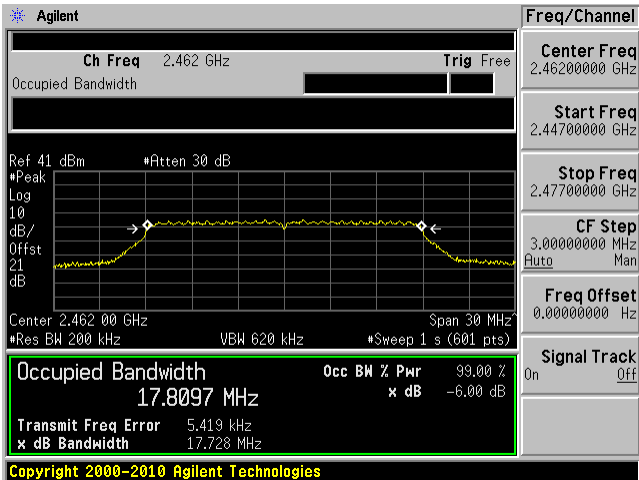


802.11n20 mode Chain 2


Low Channel 2412 MHz

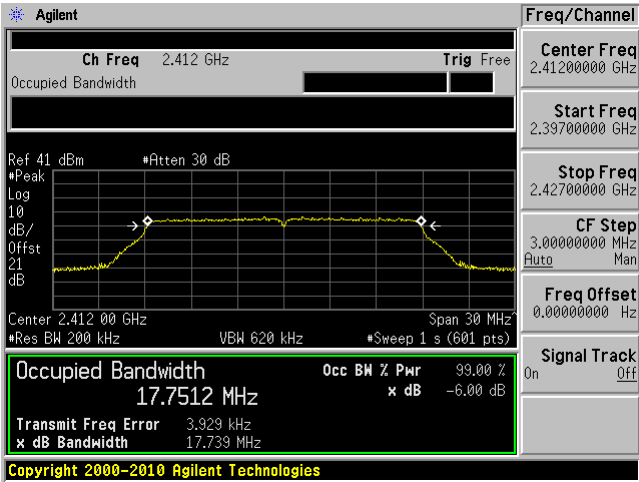

Middle Channel 2437 MHz

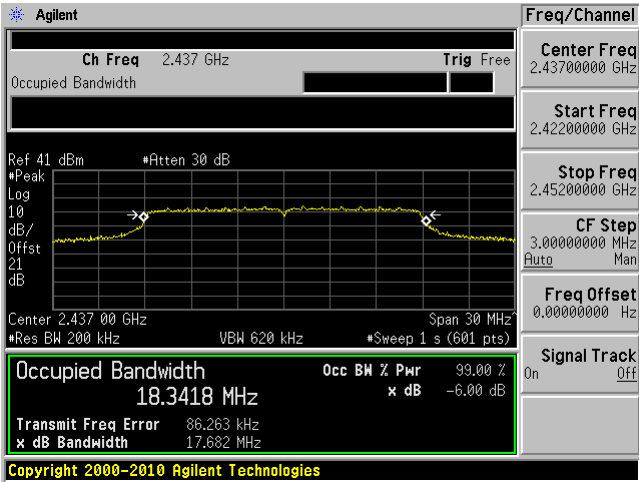


High Channel 2462 MHz

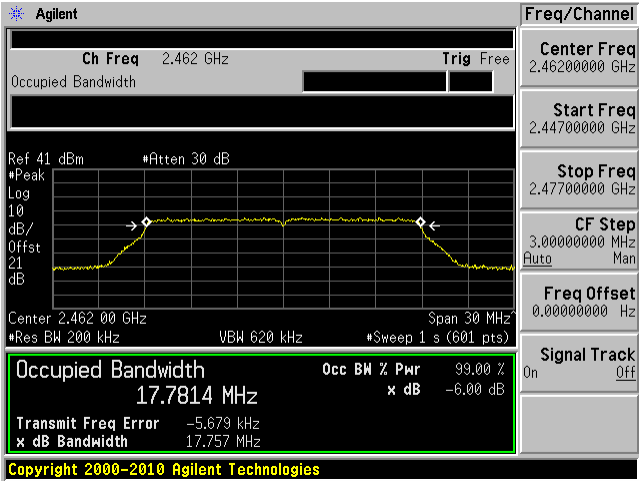


802.11n40 mode Chain 0


Low Channel 2422 MHz

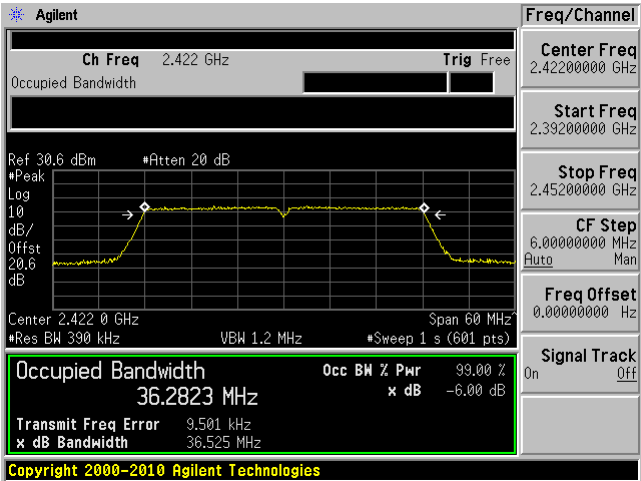

Middle Channel 2437 MHz

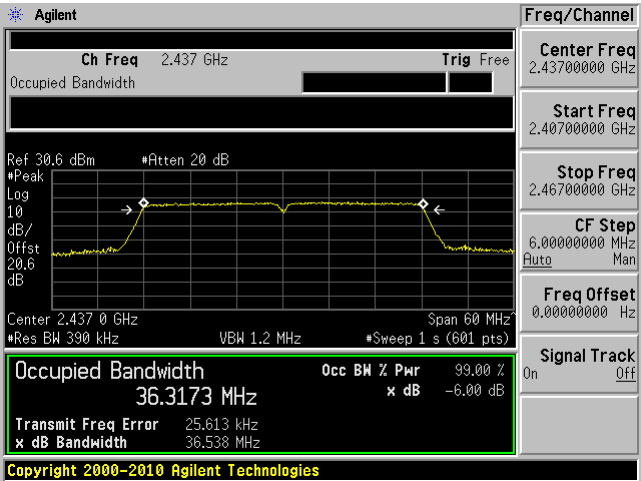


High Channel 2452 MHz

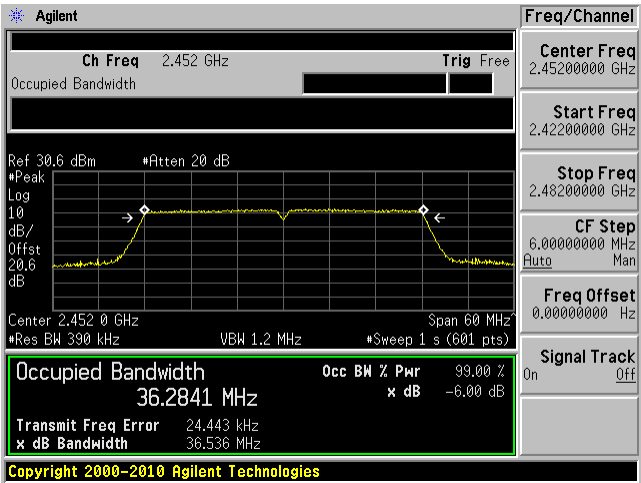


802.11n40 mode Chain 1


Low Channel 2422 MHz

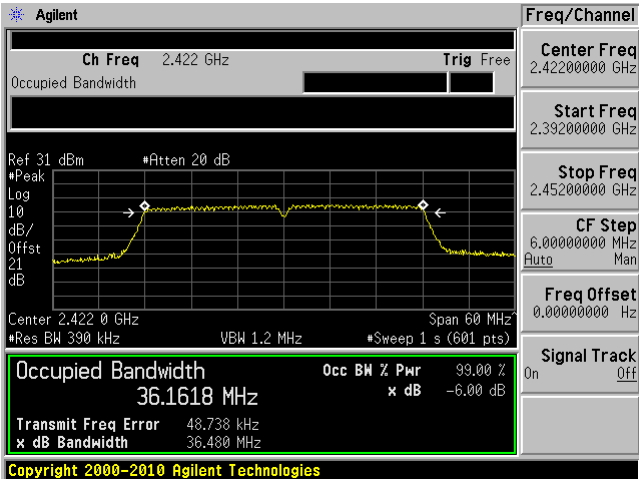

Middle Channel 2437 MHz

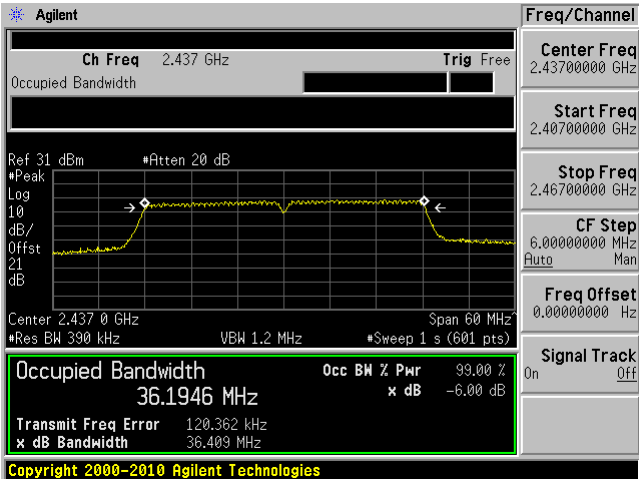


High Channel 2452 MHz

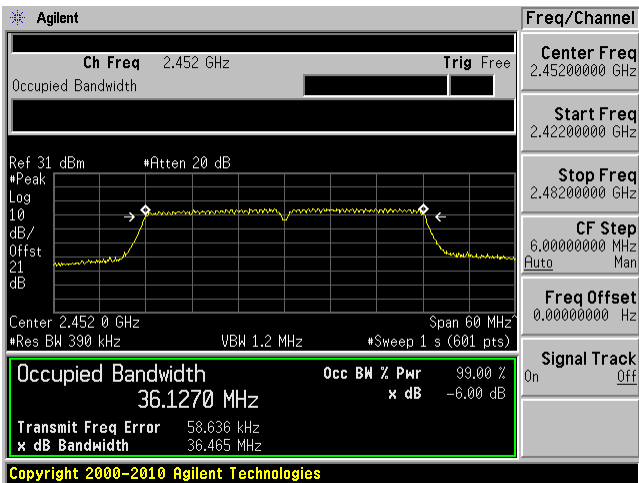


802.11n40 mode Chain 2


Low Channel 2422 MHz

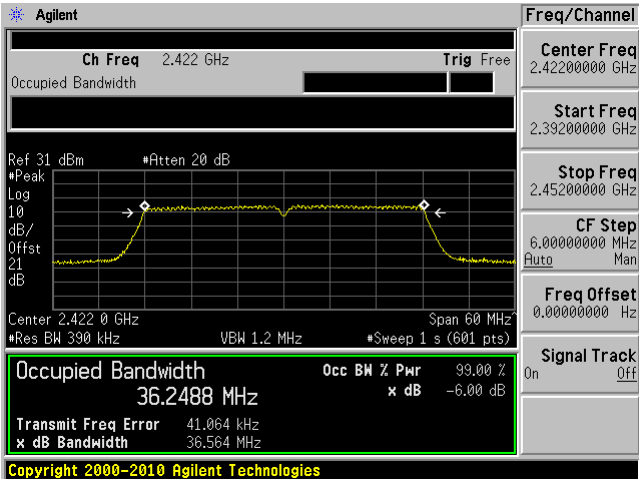

Middle Channel 2437 MHz

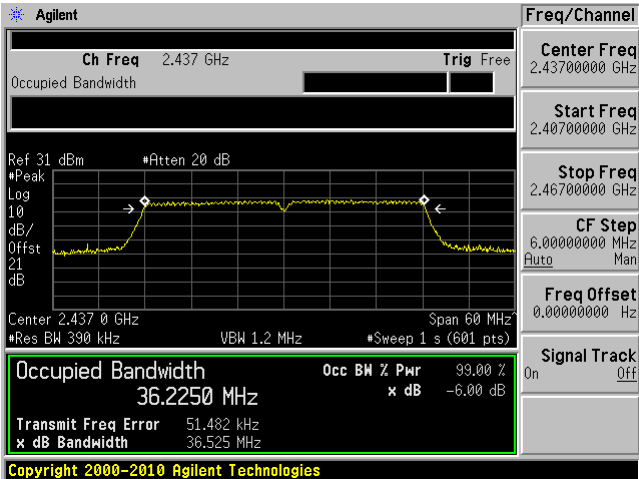

High Channel 2452 MHz

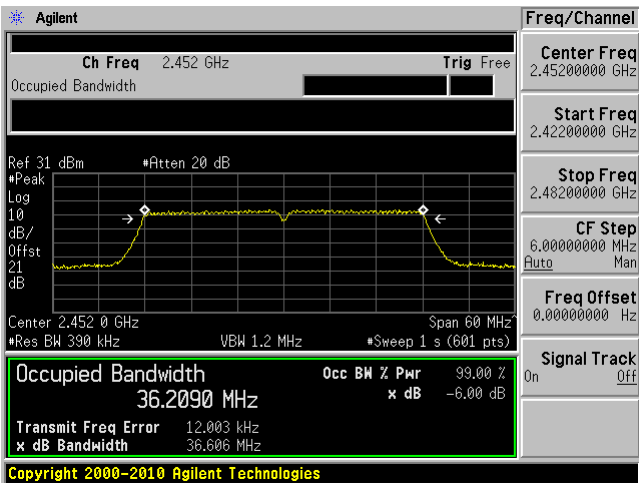

9 FCC §15.247(b) (3) & ISEDC RSS-247 §5.4 (4) - Output Power Measurement

9.1 Applicable Standards

According to ECFR §15.247(b) (3) and ISEDC RSS-247 §5.4 (4) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

9.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 9: Fundamental emission output power

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
ETS- Lingerin	Power Sensor	7002-006	160097	2016-12-05	2 years
-	RF Cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Troy Pandhumsoporn on 2018-02-12 in RF site.

9.5 Test Results

Average Output Power

Channel	Frequency (MHz)	Conducted Output Power (dBm)				Output Power Limit (dBm)	Antenna Directional Gain (dBi)	Total EIRP (dBm)	EIRP Limit (dBm)	Result
		Chain 0	Chain 1	Chain 2	Total					
802.11b										
Low	2412	21.42	20.67	21.85	26.11	30	3.479	29.59	36	Pass
Middle	2437	24.43	23.19	23.77	28.60	30	4.384	32.98	36	Pass
High	2462	20.65	20.25	21.4	25.56	30	4.695	30.26	36	Pass
802.11g										
Low	2412	17.78	17.35	18.05	22.51	30	3.479	25.99	36	Pass
Middle	2437	24.72	23.72	24.34	29.05	30	4.384	33.43	36	Pass
High	2462	15.75	15.49	16.11	20.56	30	4.695	25.25	36	Pass
802.11n20										
Low	2412	17.03	16.8	17.3	21.82	30	3.479	25.30	36	Pass
Middle	2437	24.45	23.3	23.76	28.63	30	4.384	33.02	36	Pass
High	2462	15.41	15.67	15.82	20.41	30	4.695	25.10	36	Pass
802.11n40										
Low	2422	13.91	13.88	13.93	18.68	30	3.479	22.16	36	Pass
Middle	2437	17.32	17.03	17.47	22.05	30	4.384	26.43	36	Pass
High	2452	12.9	13.05	12.8	17.69	30	4.695	22.54	36	Pass

Note: the directional gain is less than 6dBi, thus no reduction to the limit.

Note: Duty Cycle correction factor has already been added to the measurement.

10 FCC §15.247(d) & ISEDC RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges

10.1 Applicable Standards

According to ECFR §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISEDC RSS-247 §5.5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

10.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 13: Band-edge measurements

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2017-02-24	1 year
-	RF Cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions


Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Troy Pandhumsoporn on 2018-02-12 in RF site.


10.5 Test Results

802.11b mode Chain 0

Low Channel 2412 MHz

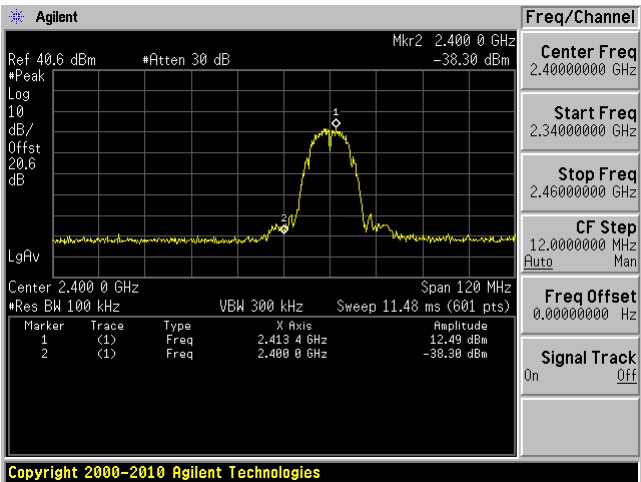


High Channel 2462 MHz

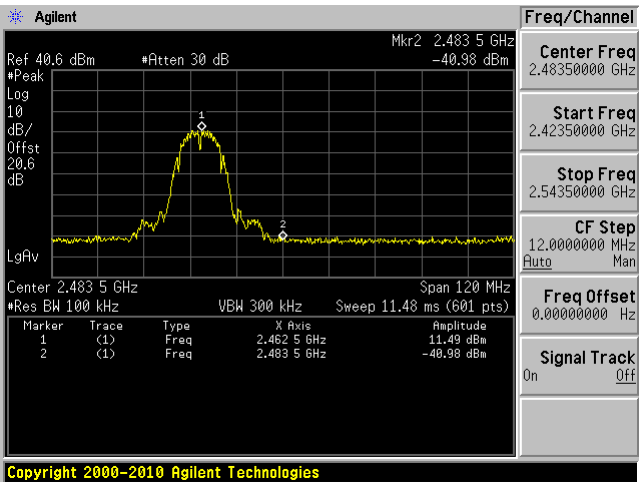


802.11b mode Chain 1

Low Channel 2412 MHz

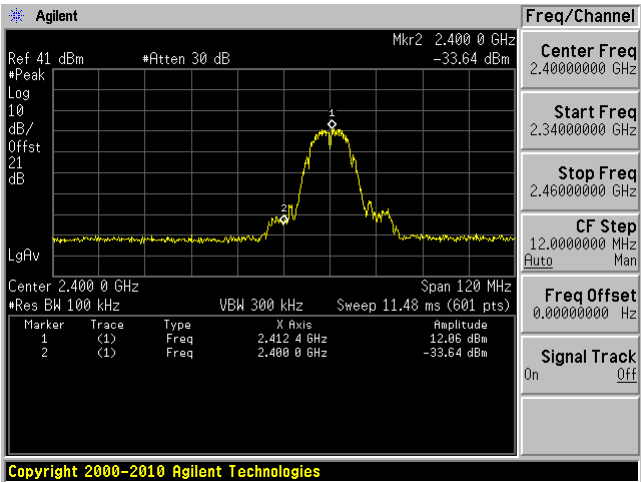


High Channel 2462 MHz

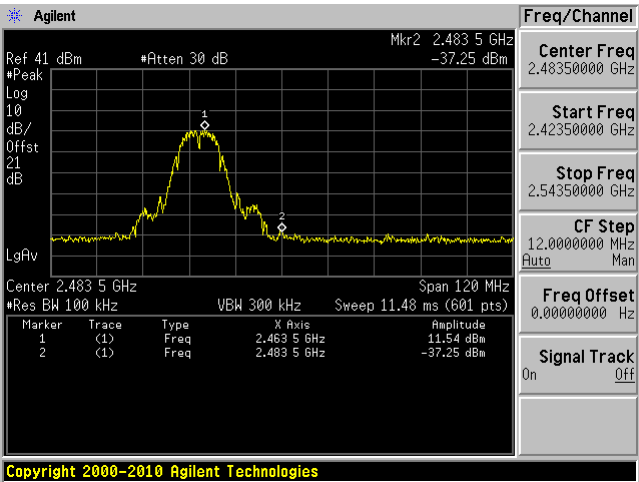


802.11b mode Chain 2

Low Channel 2412 MHz

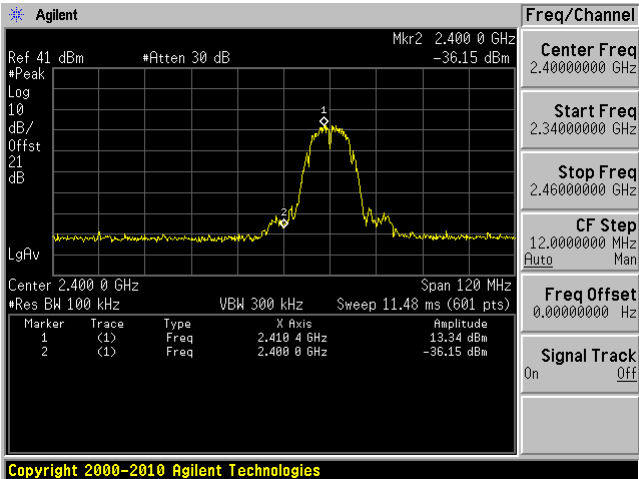


High Channel 2462 MHz

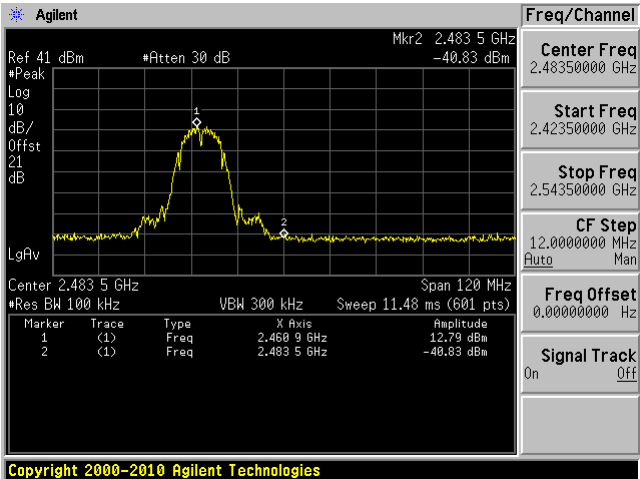


802.11g mode Chain 0

Low Channel 2412 MHz

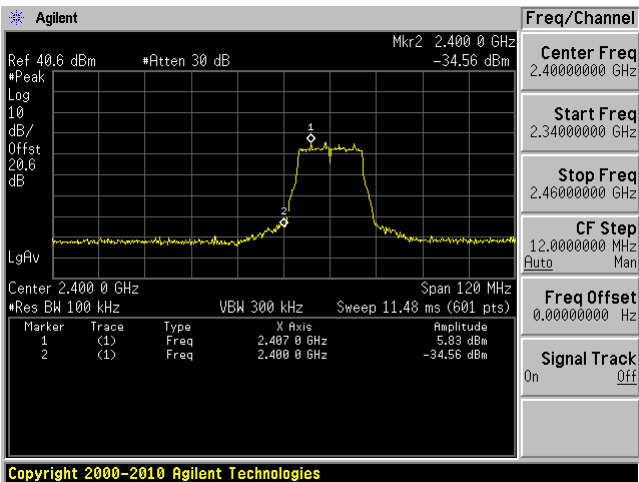


High Channel 2462 MHz

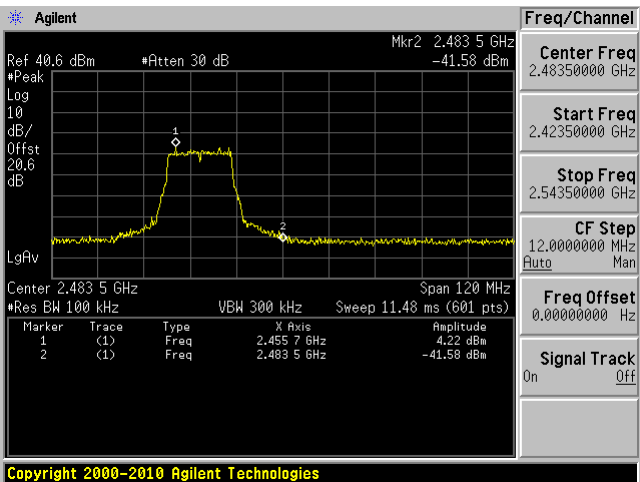


802.11g mode Chain 1

Low Channel 2412 MHz

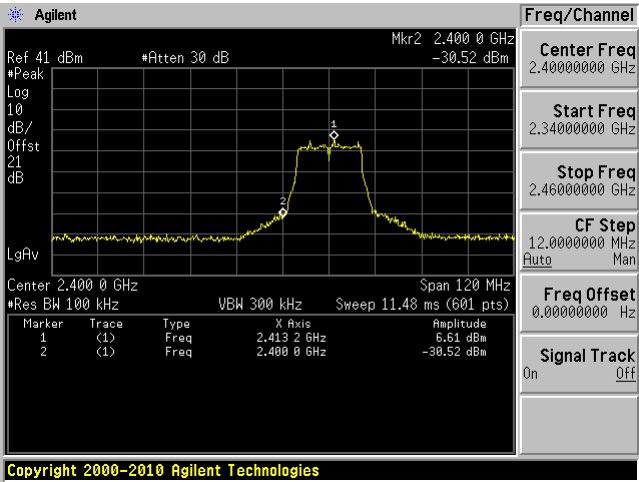


High Channel 2462 MHz

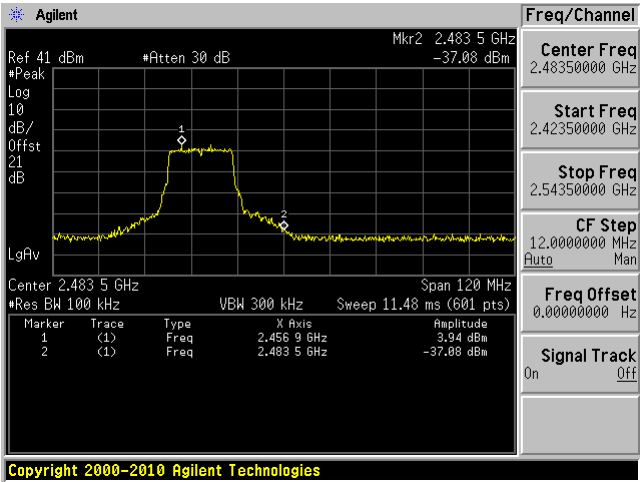


802.11g mode Chain 2

Low Channel 2412 MHz

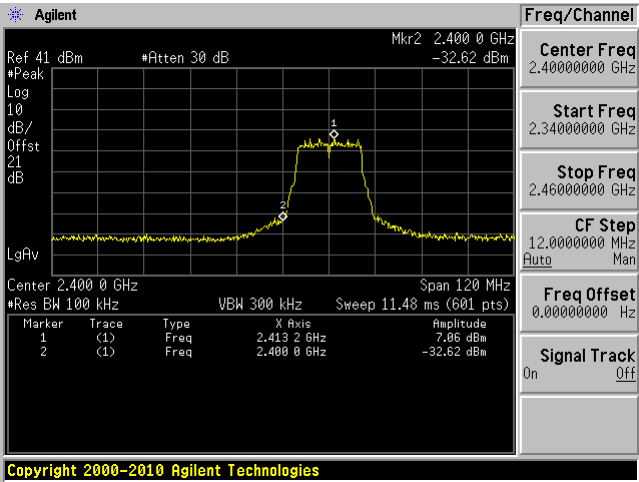


High Channel 2462 MHz

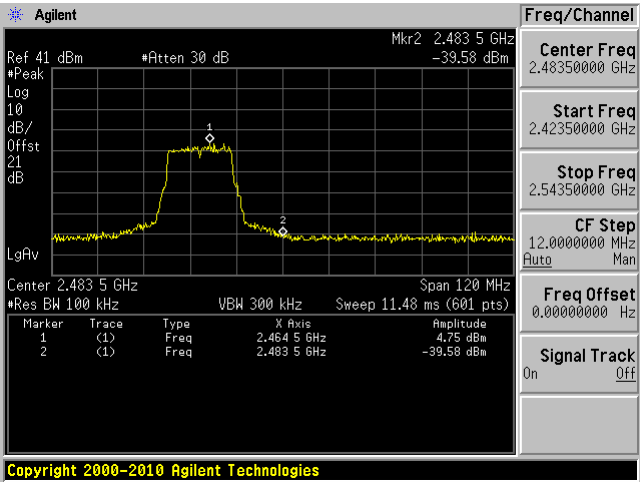


802.11n20 mode Chain 0

Low Channel 2412 MHz

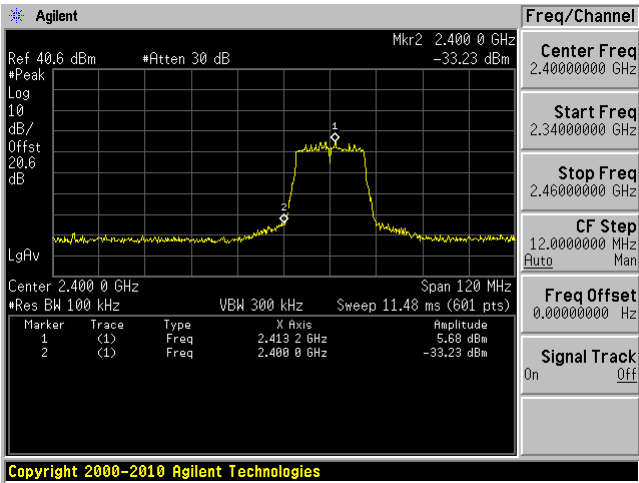


High Channel 2462 MHz

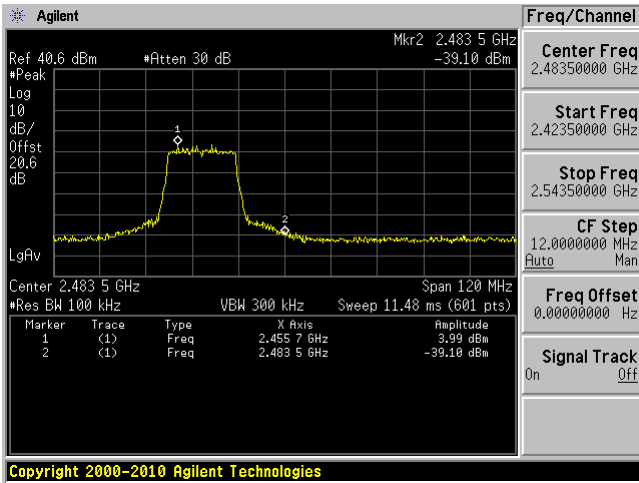


802.11n20 mode Chain 1

Low Channel 2412 MHz

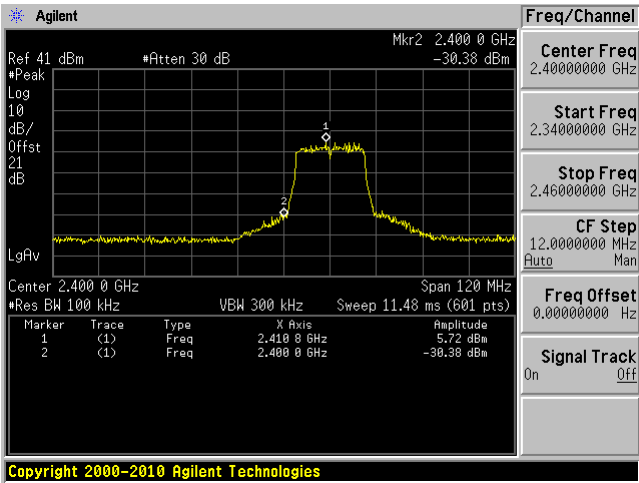


High Channel 2462 MHz

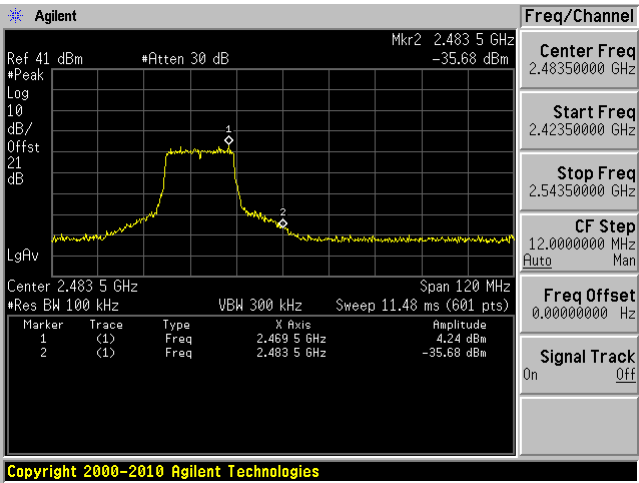


802.11n20 mode Chain 2

Low Channel 2412 MHz

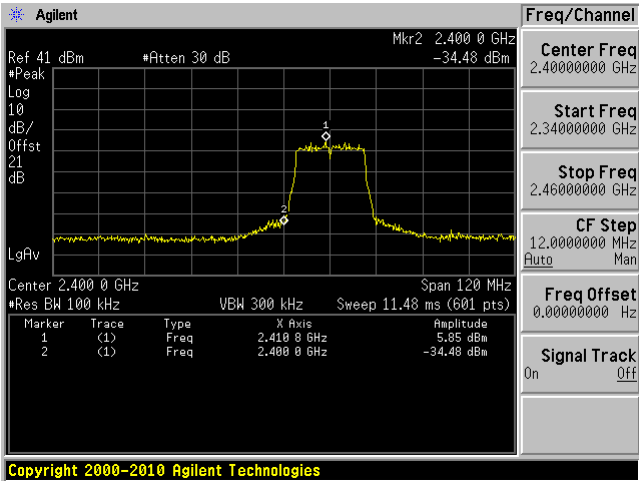


High Channel 2462 MHz

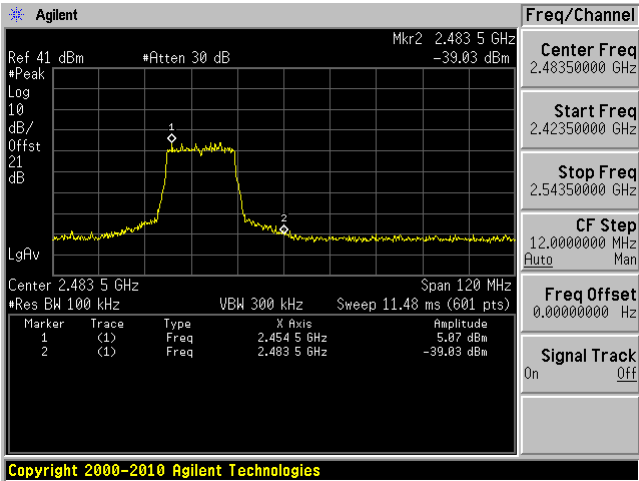


802.11n40 mode Chain 0

Low Channel 2422 MHz

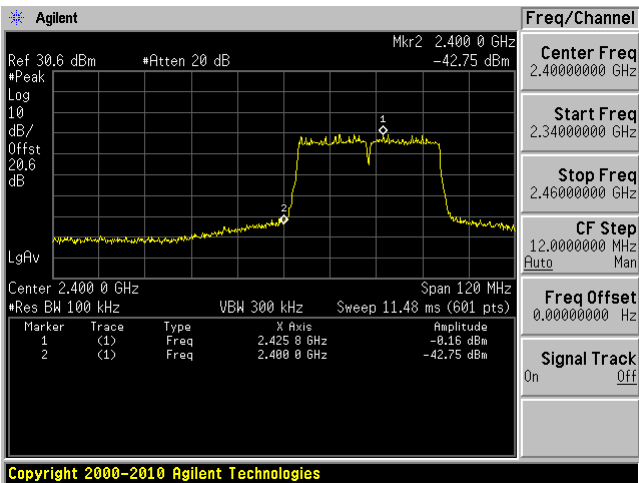


High Channel 2452 MHz

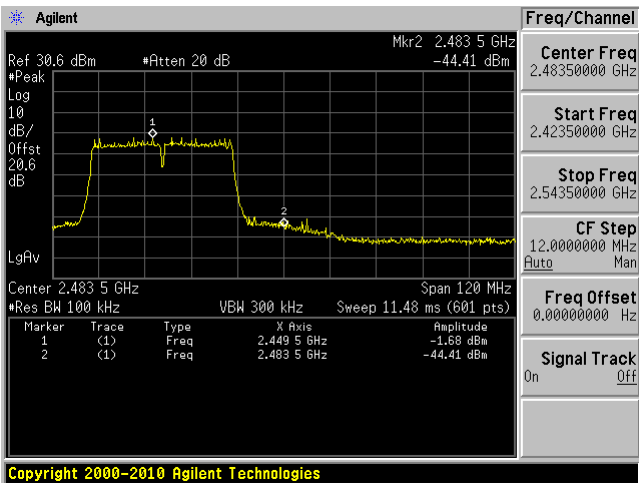


802.11n40 mode Chain 1

Low Channel 2422 MHz

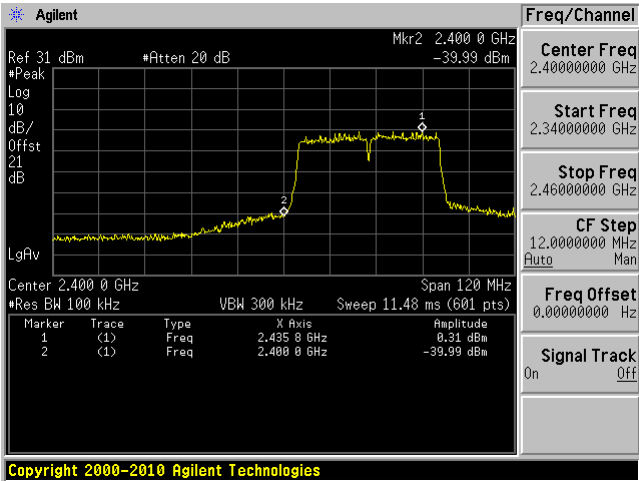


High Channel 2452 MHz

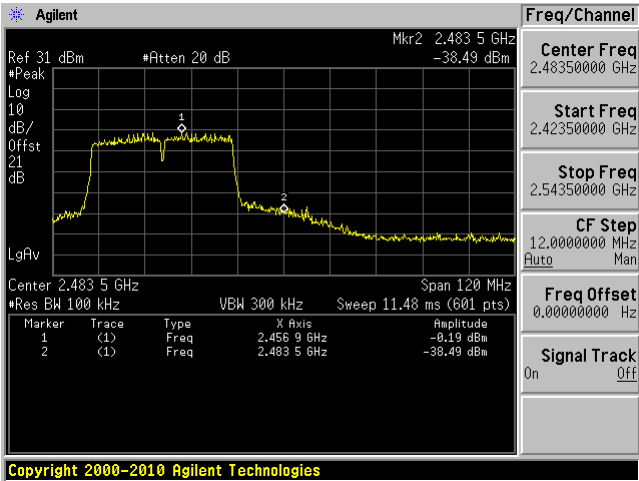


802.11n40 mode Chain 2

Low Channel 2422 MHz

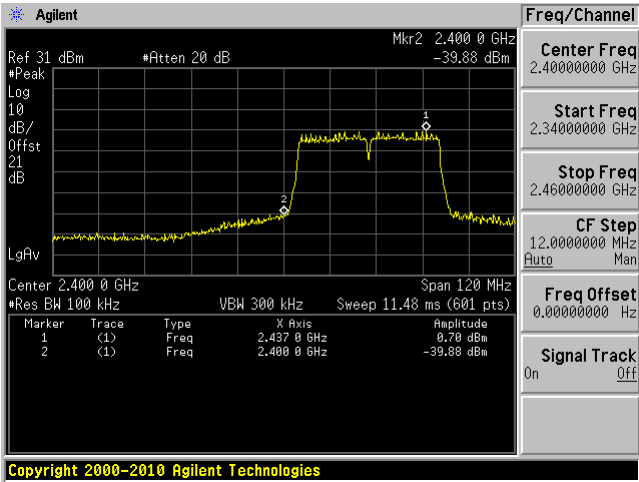

High Channel 2452 MHz

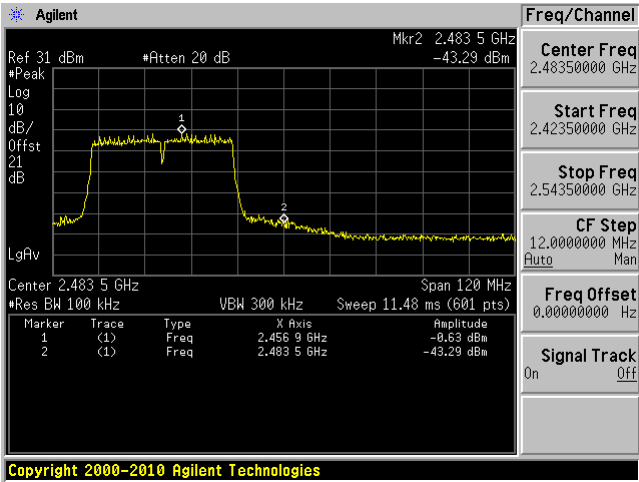

11 FCC §15.247(e) & ISEDC RSS-247 §5.2(2) - Power Spectral Density

11.1 Applicable Standards

According to ECFR §15.247(e) and RSS-247 §5.2 (2) , for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10: Maximum power spectral density level in the fundamental emission.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2017-02-24	1 year
-	RF Cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

11.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Troy Pandhumsoporn on 2017-02-12 in RF site.


11.5 Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)
		Chain 0	Chain 1	Chain 2	Total	
802.11b						
Low	2412	-1.24	-1.40	-0.75	3.65	8
Middle	2437	0.95	1.39	1.46	6.04	8
High	2462	-1.83	-2.17	-0.78	3.22	8
802.11g						
Low	2412	-6.88	-7.20	-5.70	-1.77	8
Middle	2437	-0.05	-0.94	0.6	4.69	8
High	2462	-8.98	-8.00	-8.22	-3.61	8
802.11n20						
Low	2412	-7.04	-7.41	-7.14	-2.42	8
Middle	2437	0.49	-0.44	0.62	5.02	8
High	2462	-9.27	-9.00	-8.97	-4.31	8
802.11n20						
Low	2422	-13.56	-12.57	-12.64	-8.13	8
Middle	2437	-9.91	-9.05	-8.90	-4.49	8
High	2452	-14.49	-14.21	-13.64	-9.33	8


Note: the directional gain is less than 6dBi, thus no reduction to the limit.
Please refer to the following plots for detailed test results

802.11b mode Chain 0


Low Channel 2412 MHz

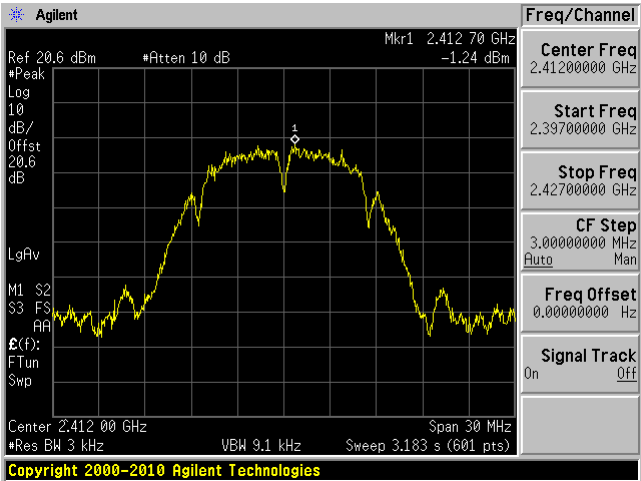

Middle Channel 2437 MHz

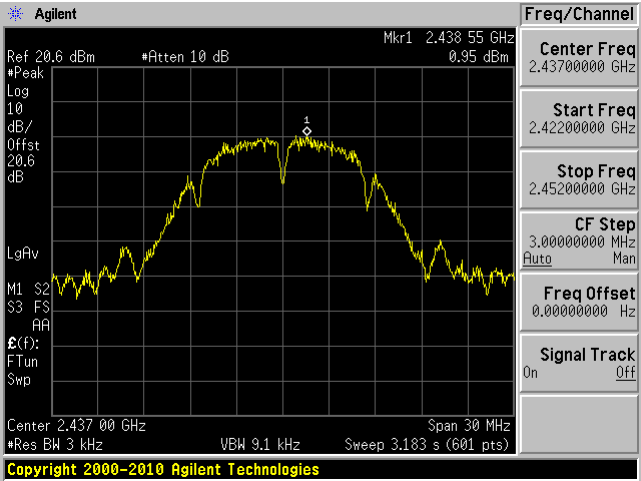


High Channel 2462 MHz

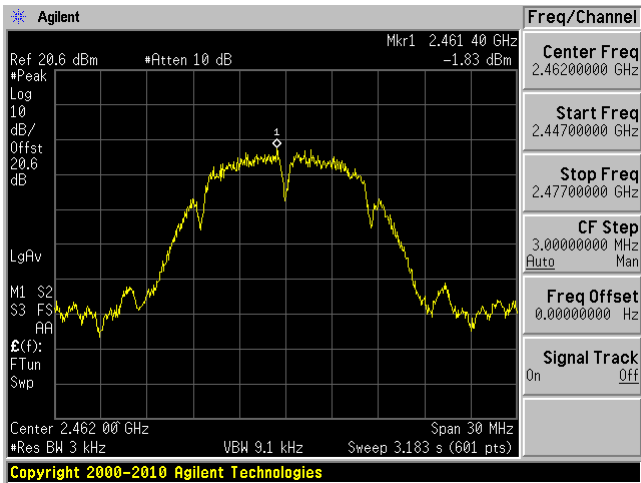


802.11b mode Chain 1


Low Channel 2412 MHz

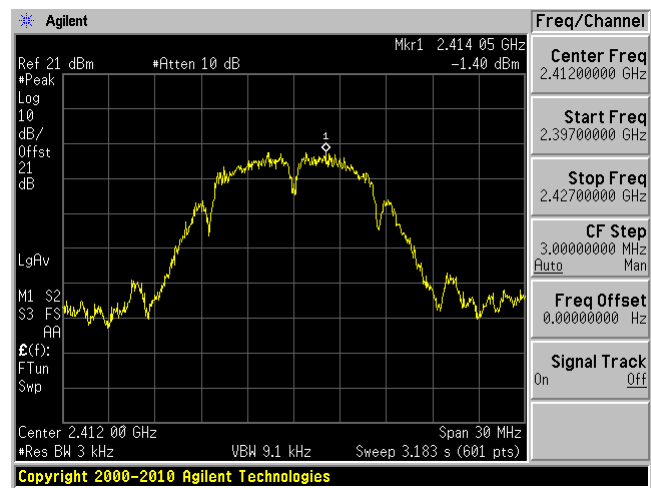

Middle Channel 2437 MHz

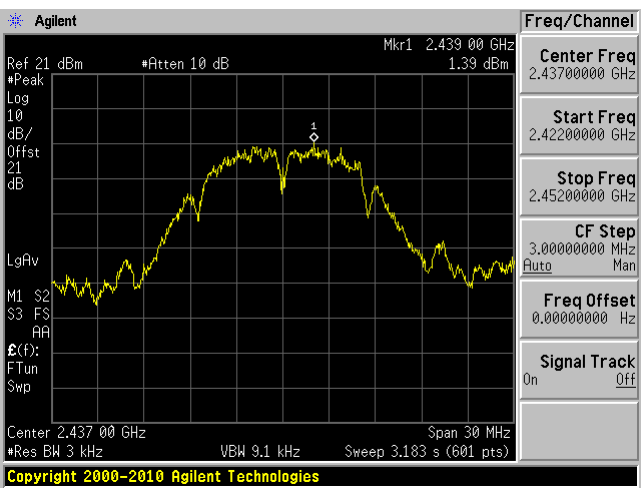


High Channel 2462 MHz

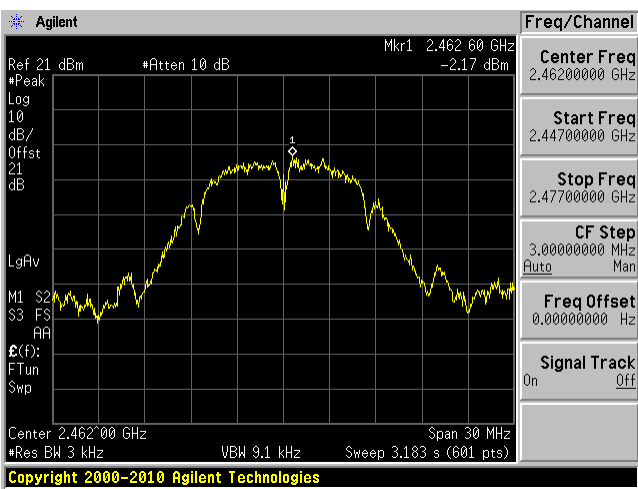


802.11b mode Chain 2


Low Channel 2412 MHz

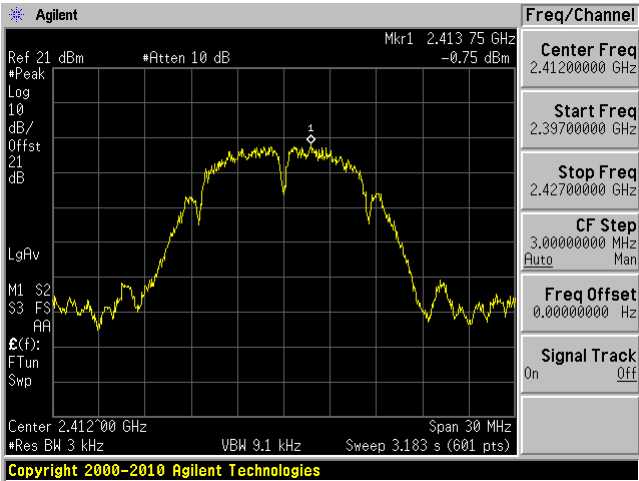

Middle Channel 2437 MHz

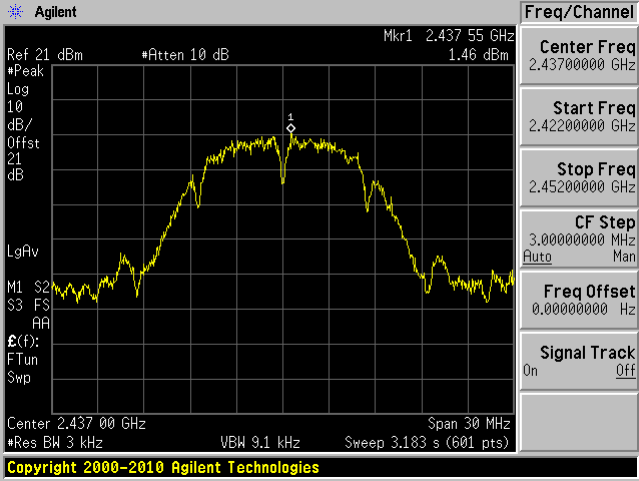


High Channel 2462 MHz

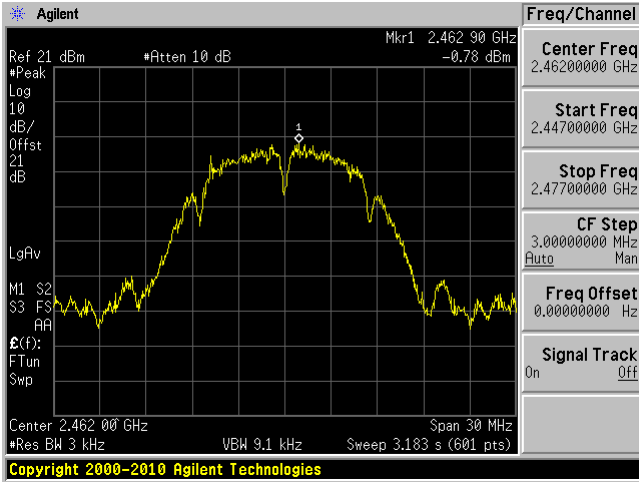


802.11g mode Chain 0


Low Channel 2412 MHz

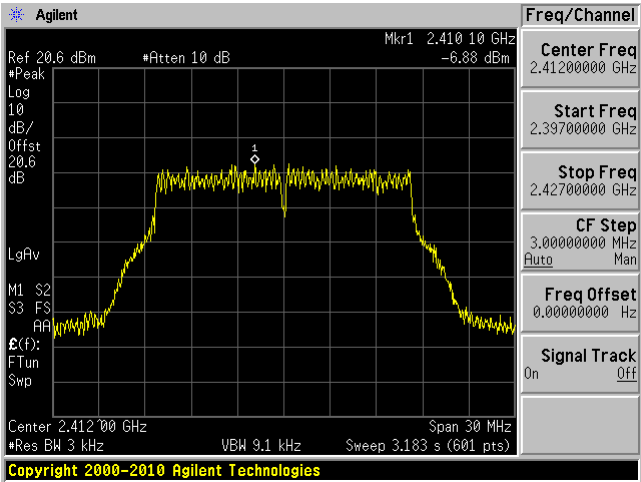

Middle Channel 2437 MHz

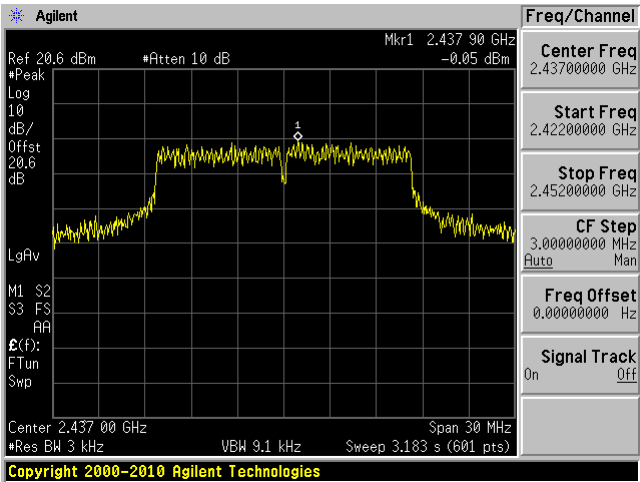


High Channel 2462 MHz

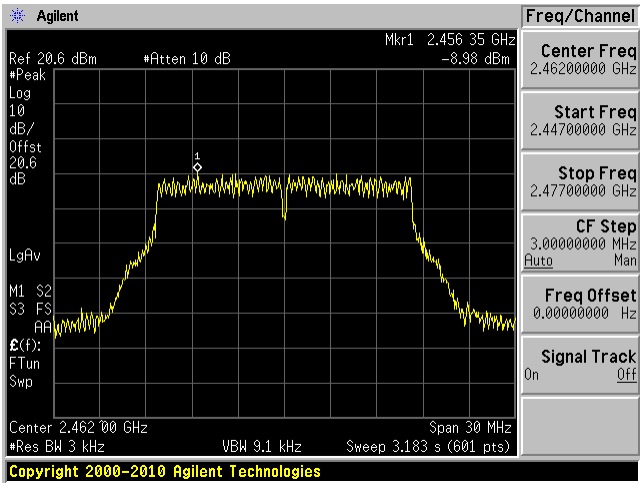


802.11g mode Chain 1


Low Channel 2412 MHz

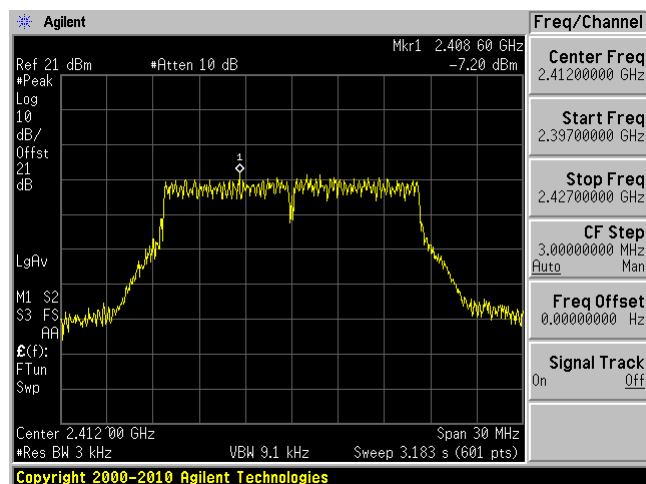

Middle Channel 2437 MHz

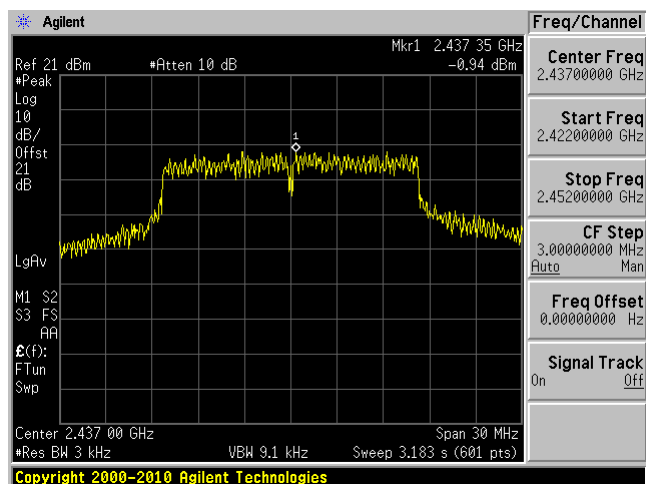


High Channel 2462 MHz

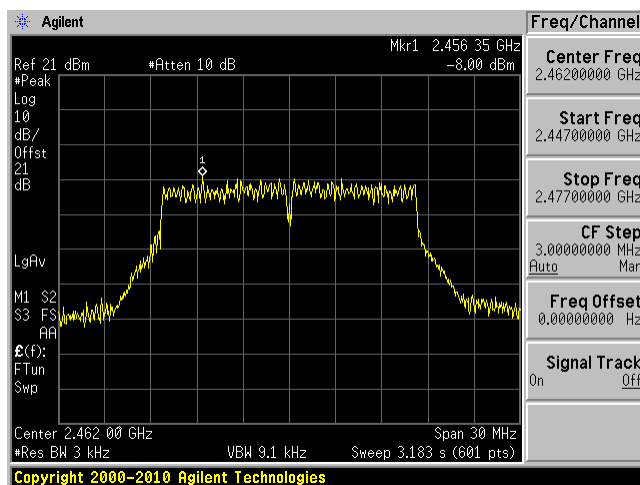


802.11g mode Chain 2


Low Channel 2412 MHz

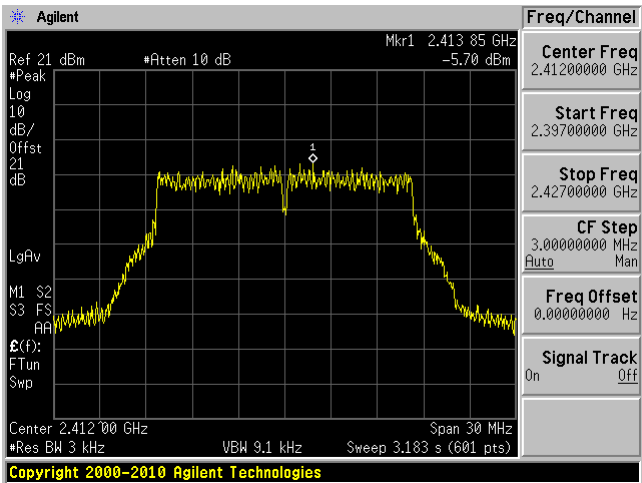

Middle Channel 2437 MHz

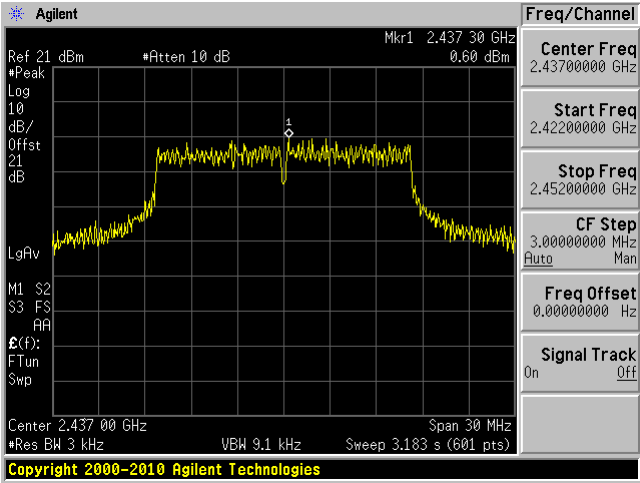


High Channel 2462 MHz

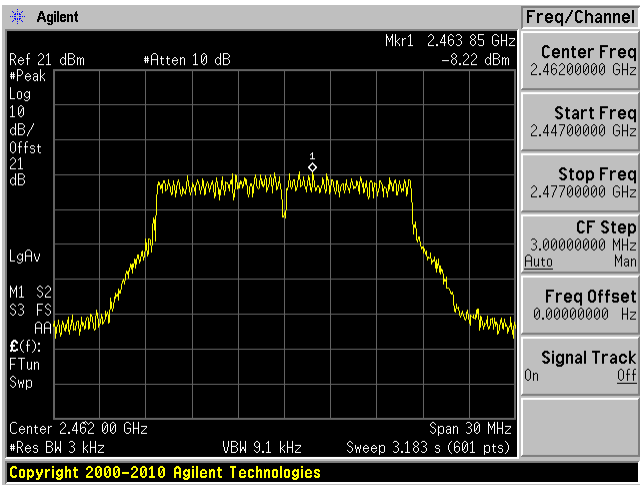


802.11n20 mode Chain 0


Low Channel 2412 MHz

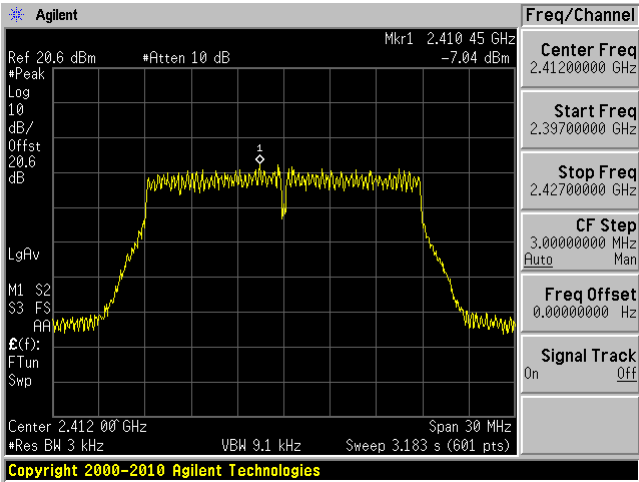

Middle Channel 2437 MHz

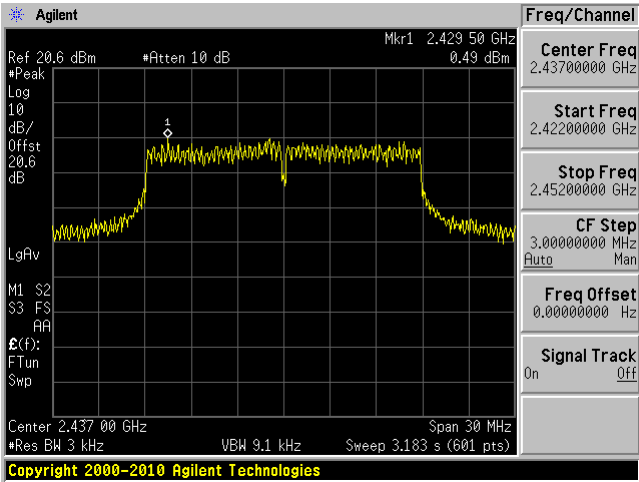


High Channel 2462 MHz

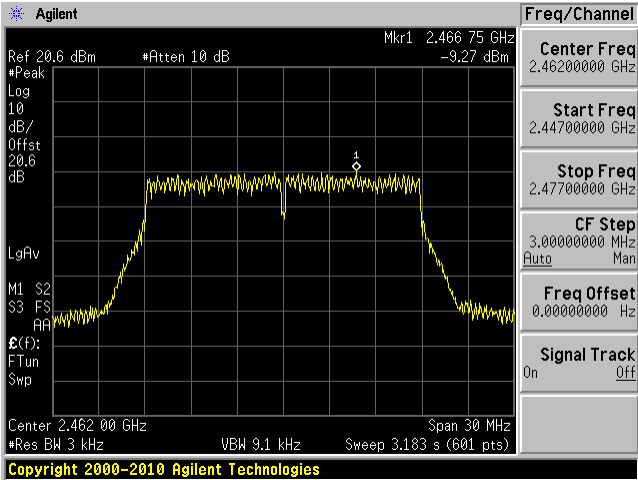


802.11n20 mode Chain 1


Low Channel 2412 MHz

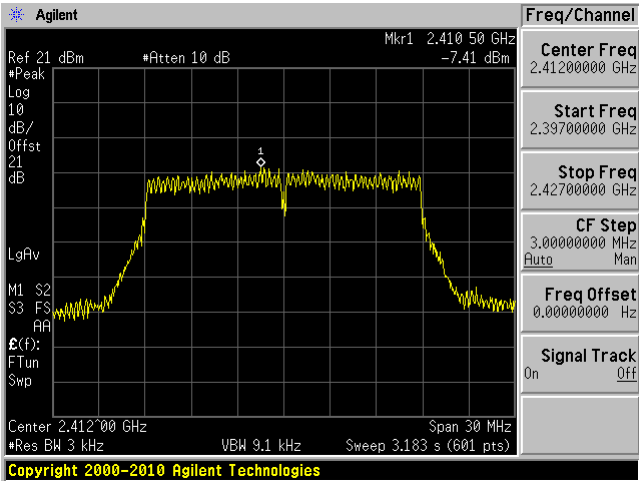

Middle Channel 2437 MHz

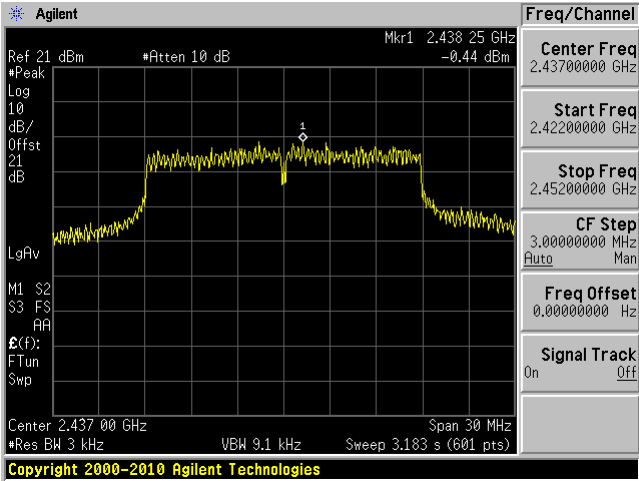


High Channel 2462 MHz

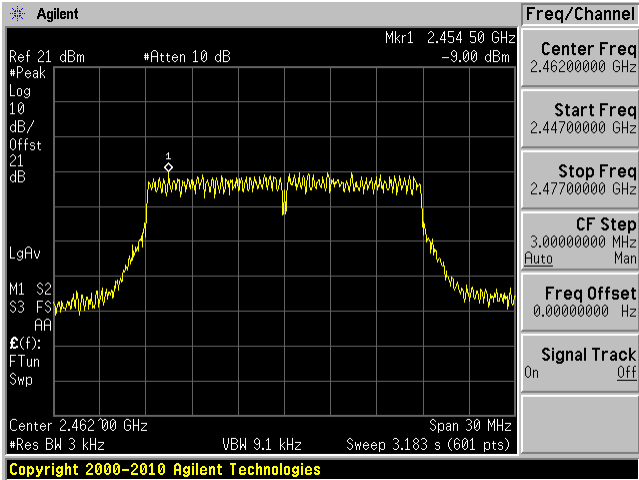


802.11n20 mode Chain 2


Low Channel 2412 MHz

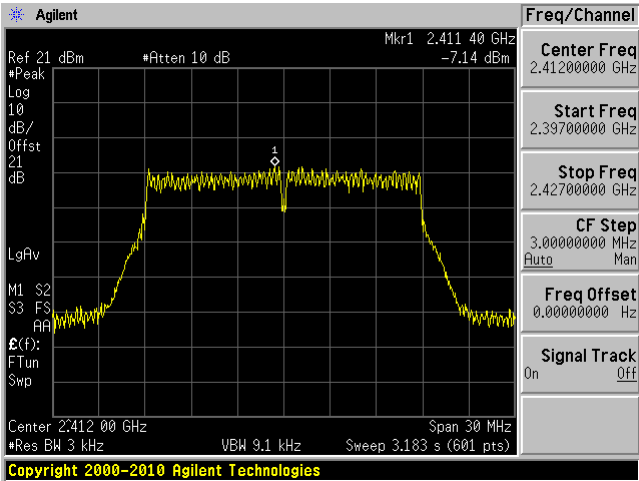

Middle Channel 2437 MHz

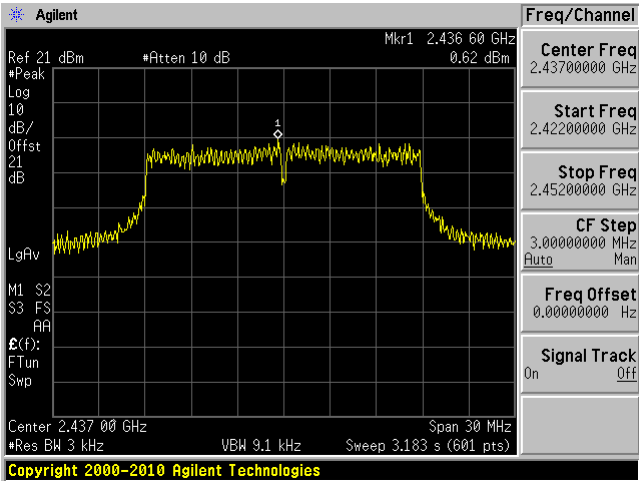


High Channel 2462 MHz

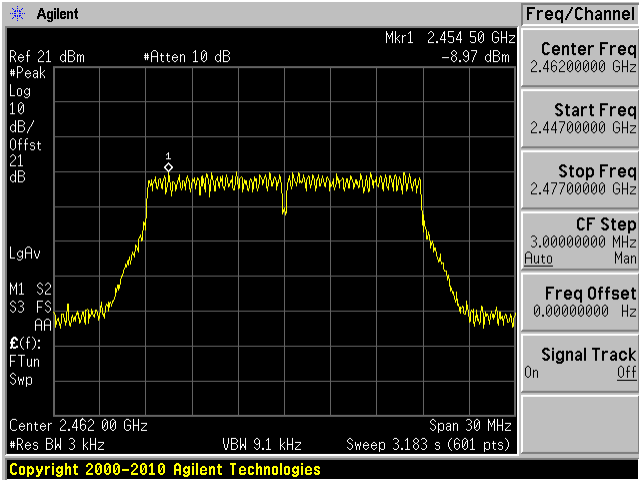


802.11n40 mode Chain 0


Low Channel 2422 MHz

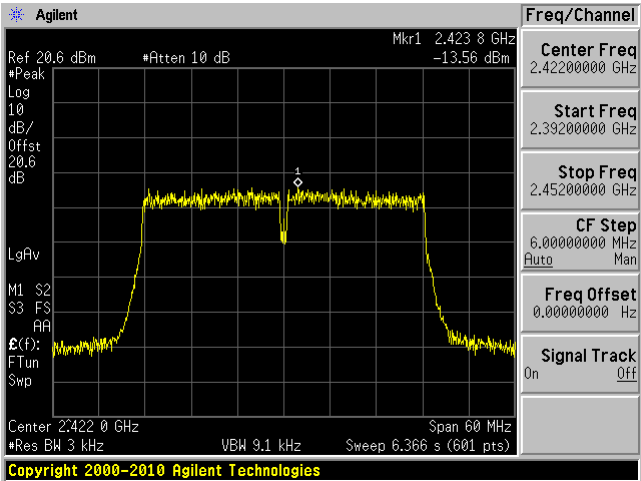

Middle Channel 2437 MHz

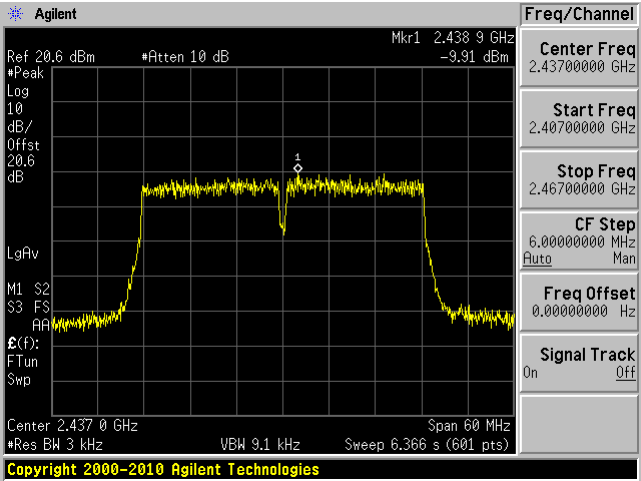


High Channel 2452 MHz

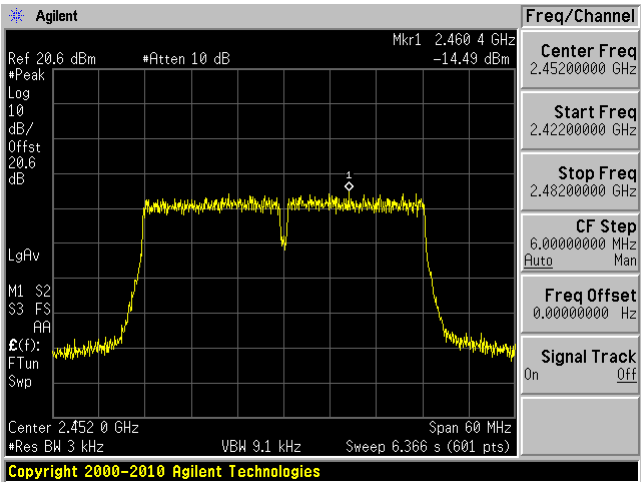


802.11n40 mode Chain 1


Low Channel 2422 MHz

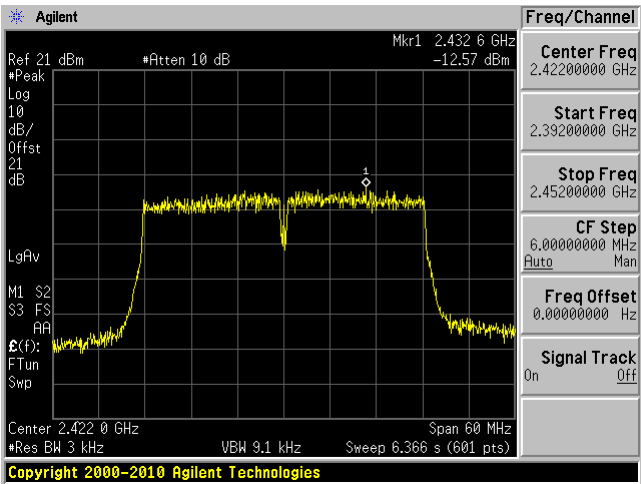

Middle Channel 2437 MHz

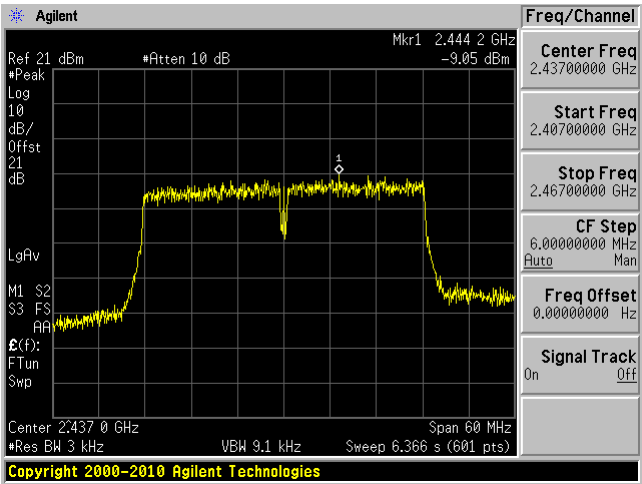


High Channel 2452 MHz

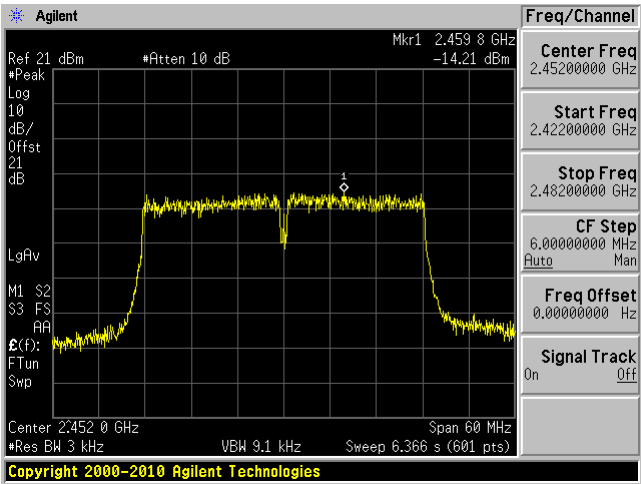


802.11n40 mode Chain 2


Low Channel 2422 MHz

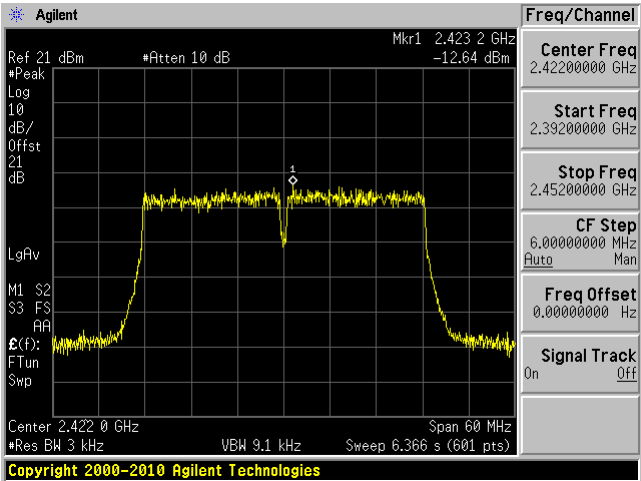

Middle Channel 2437 MHz

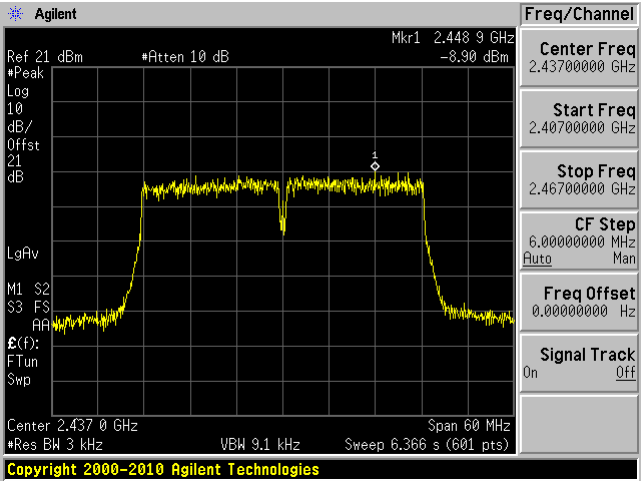

High Channel 2452 MHz

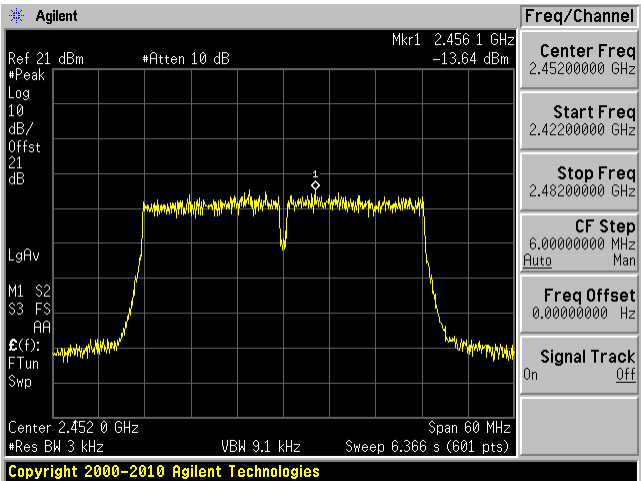

12 FCC §15.247(d) & ISEDC RSS-247 §5.5, RSS-GEN §8.9 - Spurious Emissions at Antenna Terminals

12.1 Applicable Standards

For ECFR §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

12.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.*

12.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa


The testing was performed by Troy Pandhumsoporn on 2018-02-12 in RF site.

12.5 Test Results


Please refer to following plots.

802.11b mode Chain 0


Low Channel 30MHz – 3 GHz

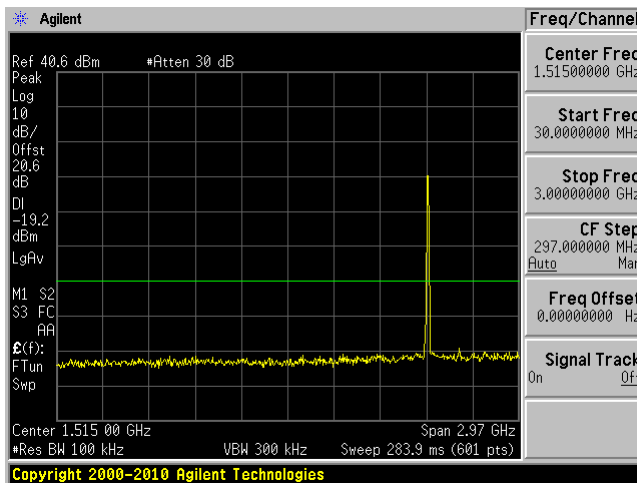


Low Channel 3 GHz – 26 GHz

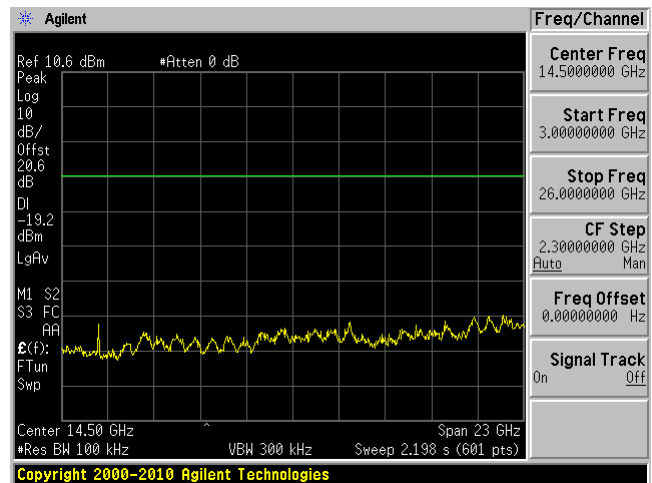


Middle Channel 30 MHz – 3 GHz

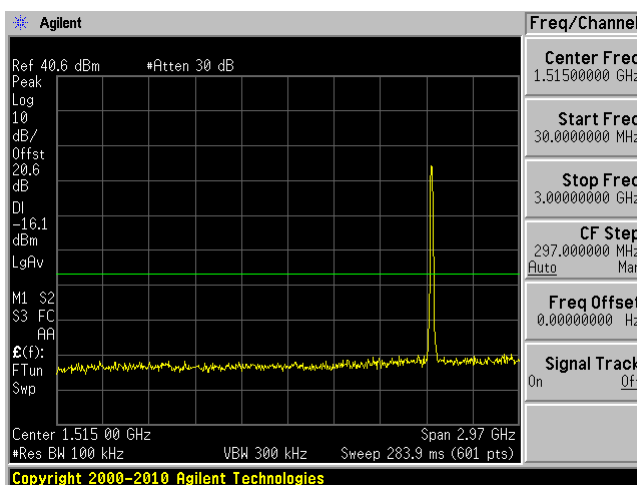


Middle Channel 3 GHz – 26 GHz

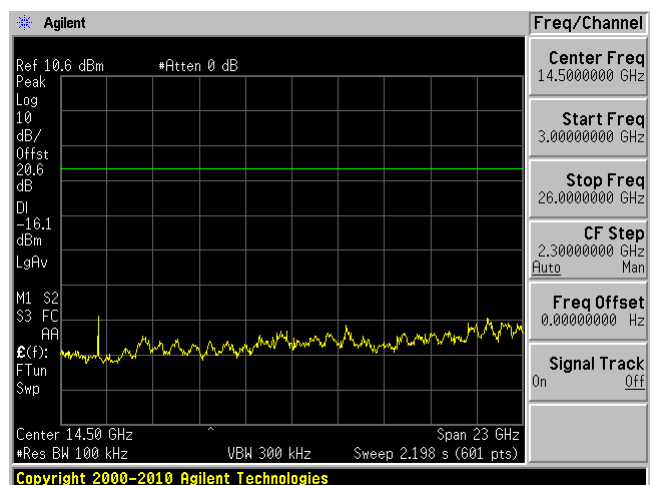

High Channel 30 MHz – 3 GHz

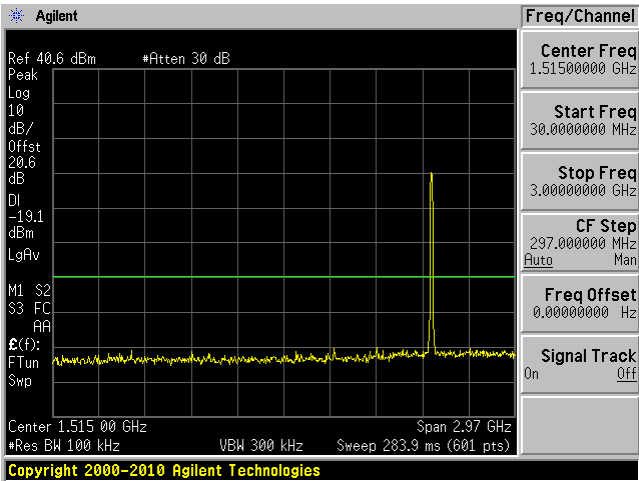


High Channel 3 GHz – 26 GHz

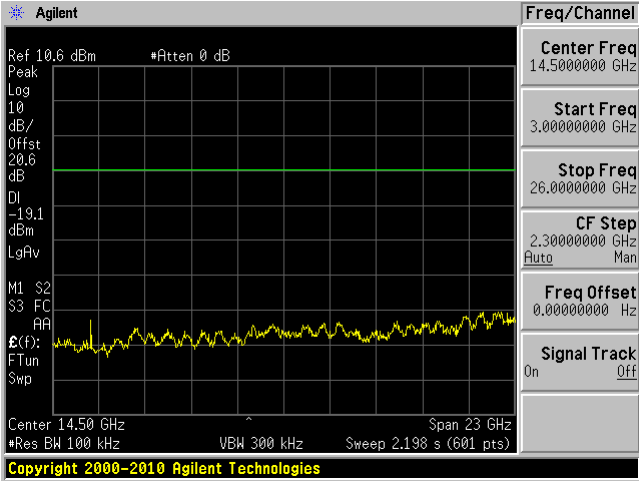


802.11b mode Chain 1


Low Channel 30MHz – 3 GHz

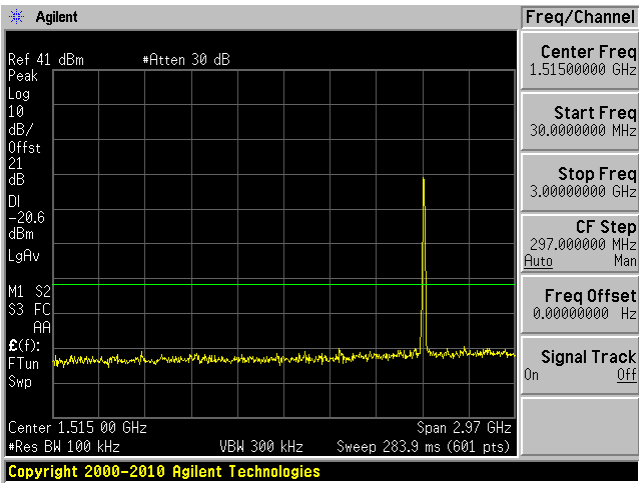


Low Channel 3 GHz – 26 GHz

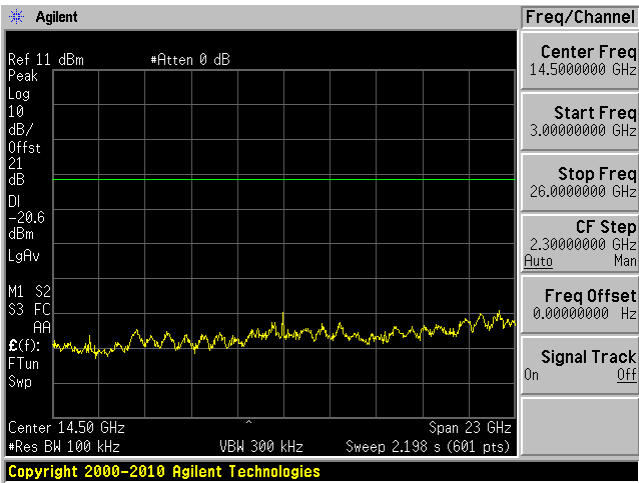


Middle Channel 30 MHz – 3 GHz

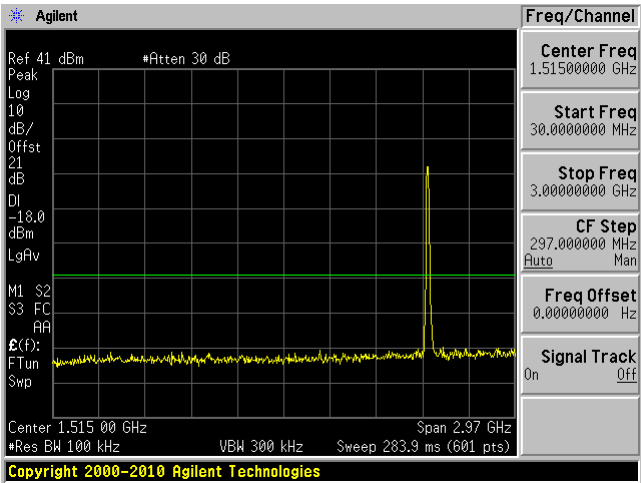


Middle Channel 3 GHz – 26 GHz

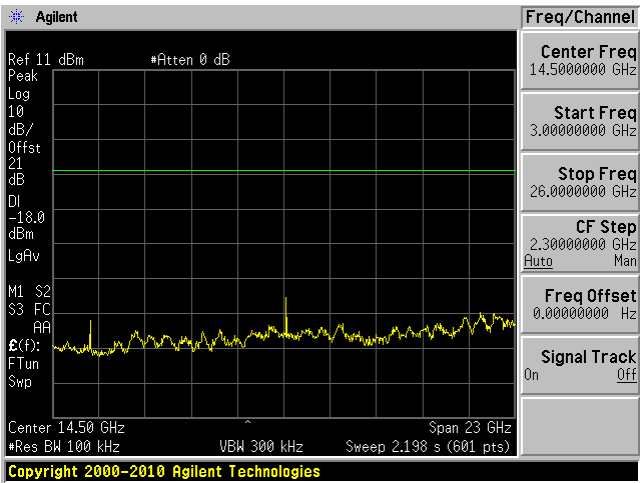

High Channel 30 MHz – 3 GHz

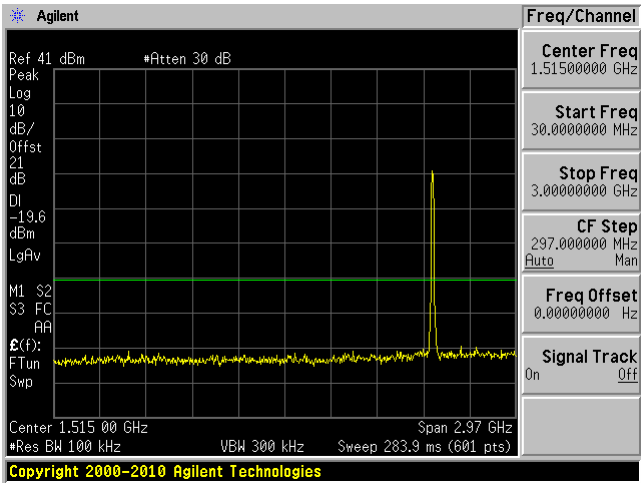


High Channel 3 GHz – 26 GHz

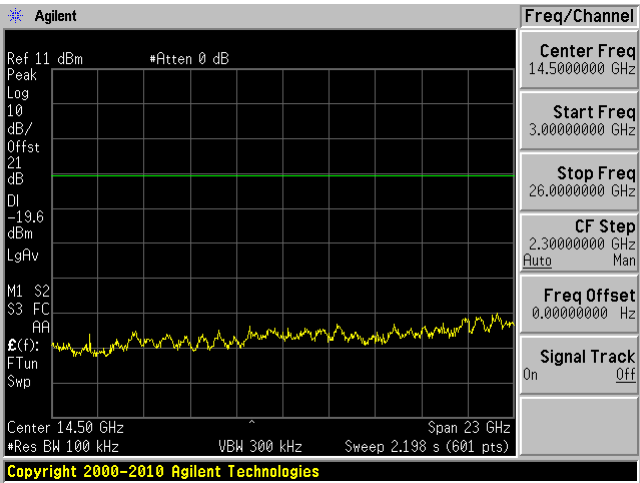


802.11b mode Chain 2


Low Channel 30MHz – 3 GHz

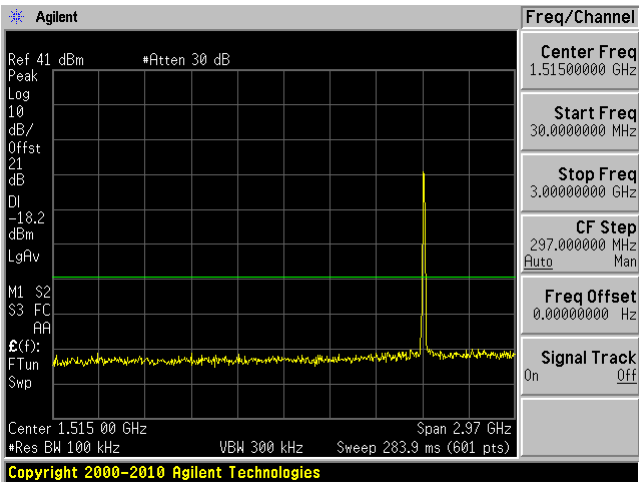


Low Channel 3 GHz – 26 GHz

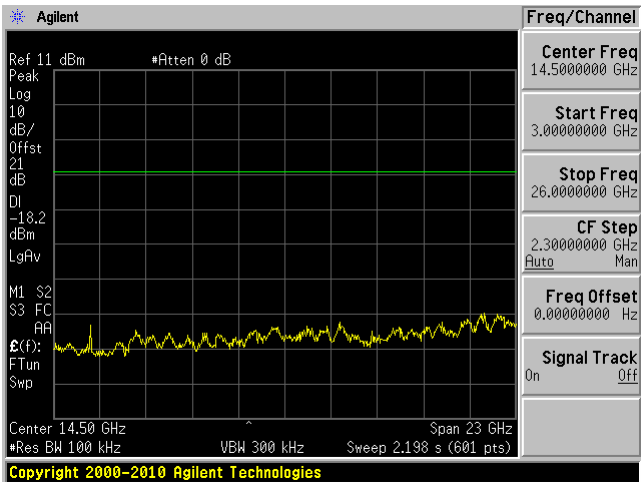


Middle Channel 30 MHz – 3 GHz

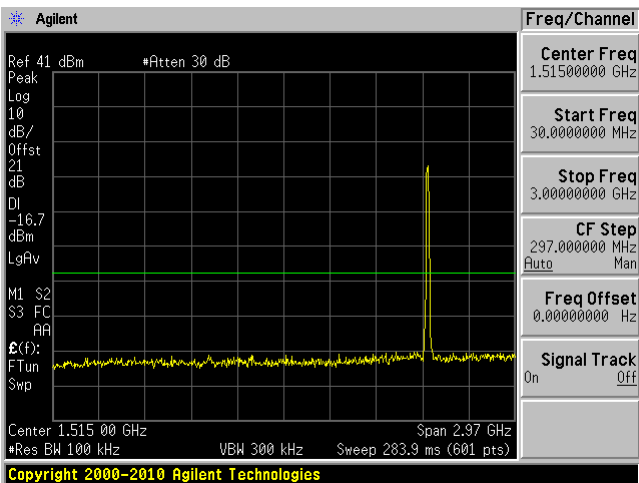


Middle Channel 3 GHz – 26 GHz

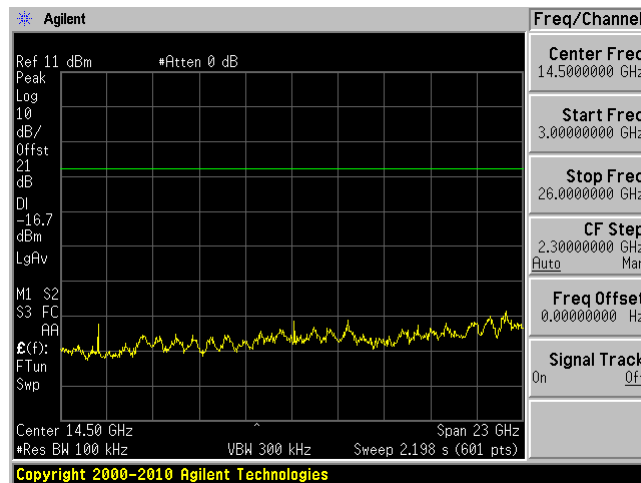

High Channel 30 MHz – 3 GHz

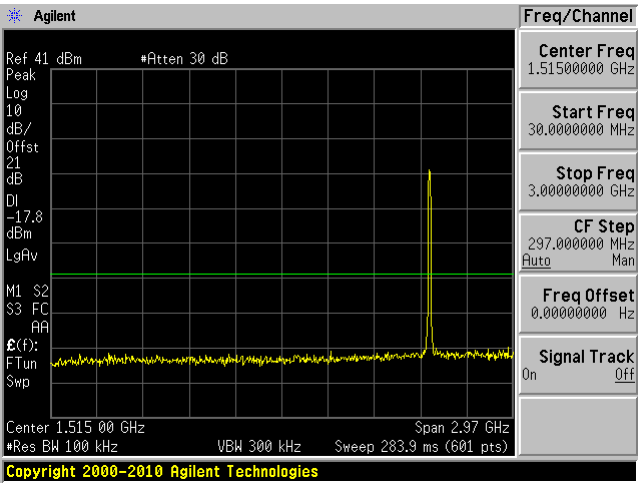


High Channel 3 GHz – 26 GHz

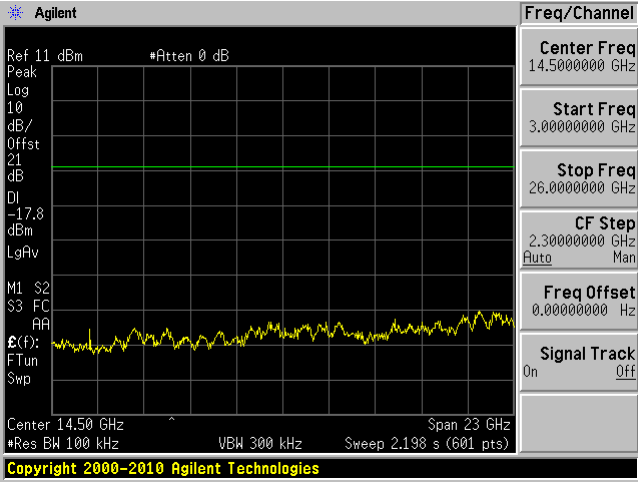


802.11g mode Chain 0


Low Channel 30 MHz – 3 GHz

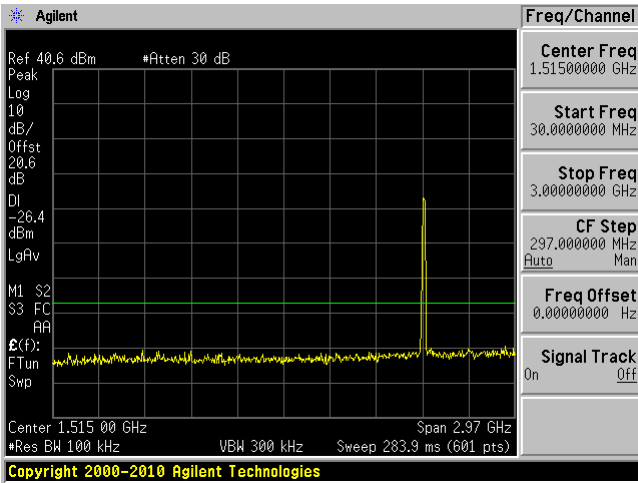


Low Channel 3 GHz – 26 GHz

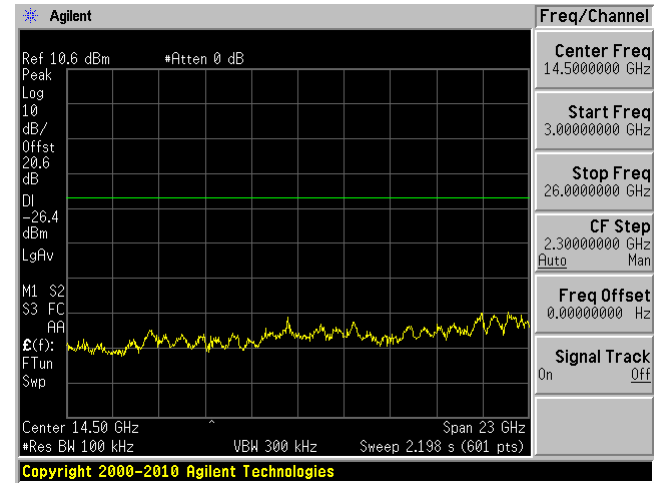


Middle Channel 30 MHz – 3 GHz

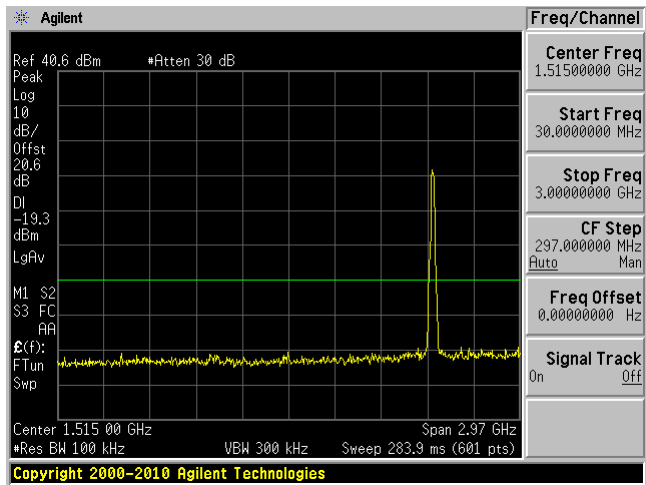


Middle Channel 3 GHz – 26 GHz

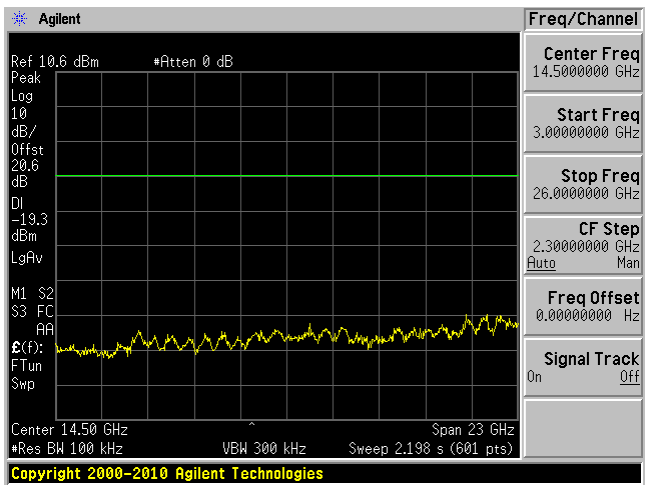

High Channel 30 MHz – 3 GHz

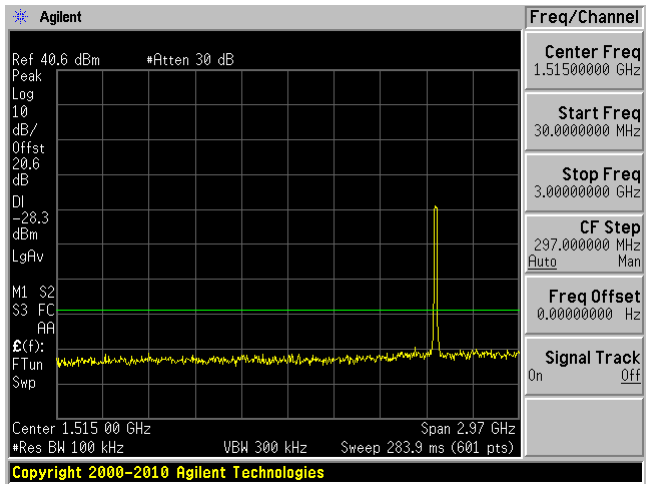


High Channel 3 GHz – 26 GHz

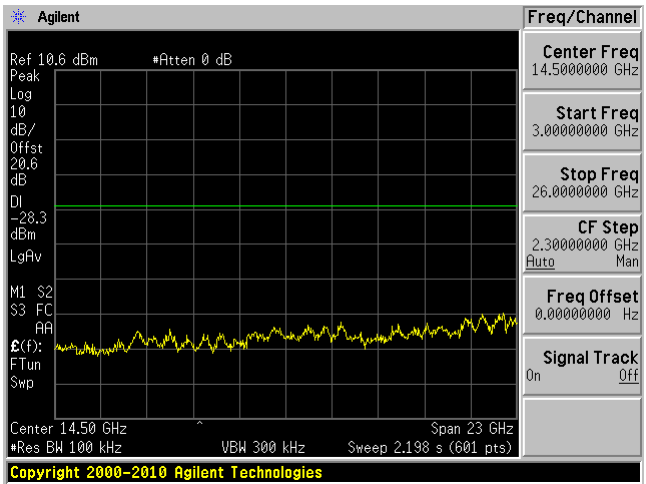


802.11g mode Chain 1


Low Channel 30 MHz – 3 GHz

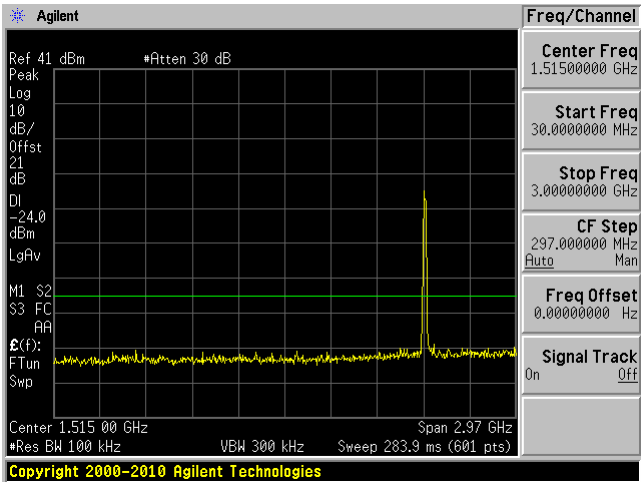


Low Channel 3 GHz – 26 GHz

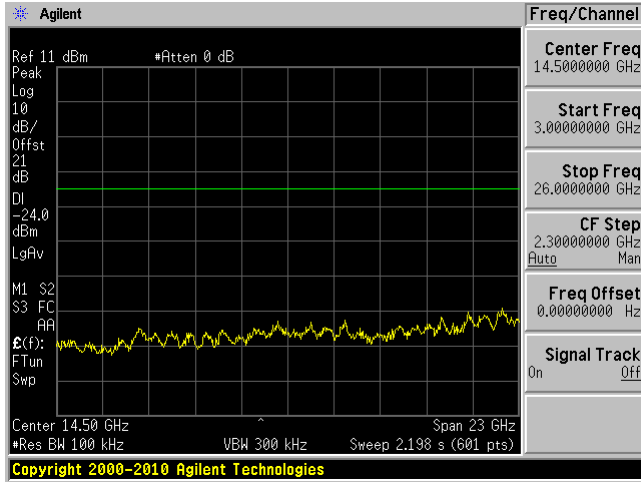


Middle Channel 30 MHz – 3 GHz

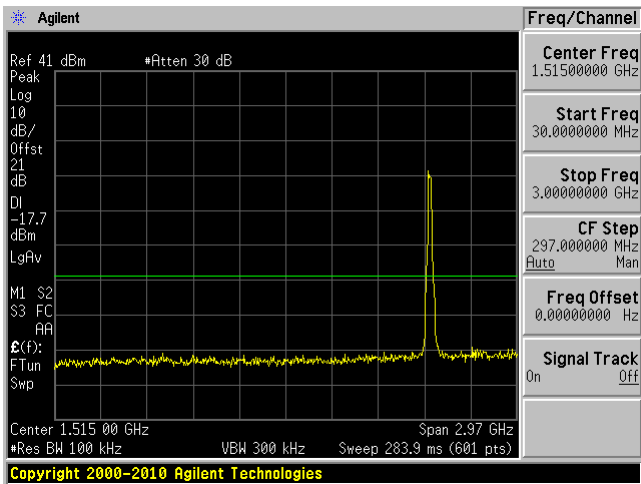


Middle Channel 3 GHz – 26 GHz

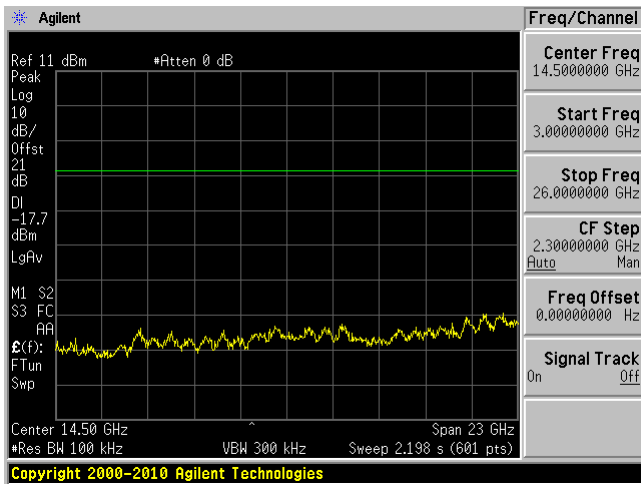

High Channel 30 MHz – 3 GHz

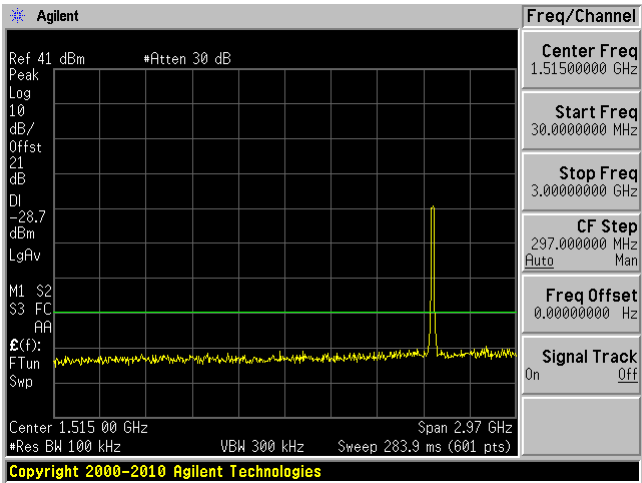


High Channel 3 GHz – 26 GHz

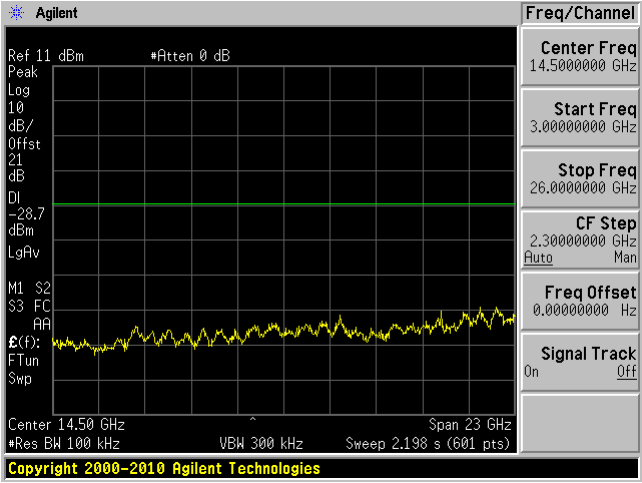


802.11g mode Chain 2


Low Channel 30 MHz – 3 GHz

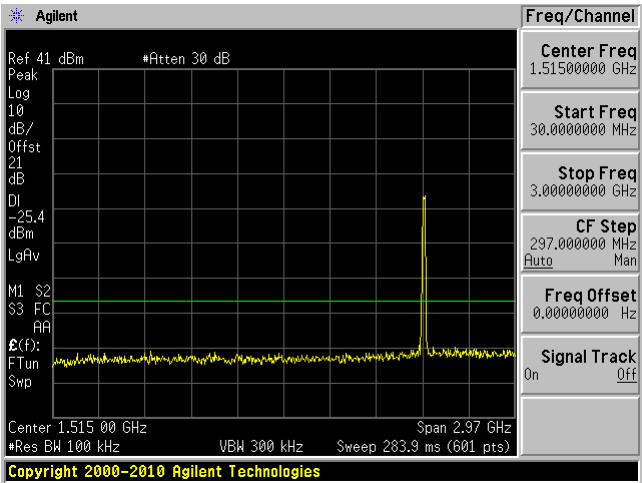


Low Channel 3 GHz – 26 GHz

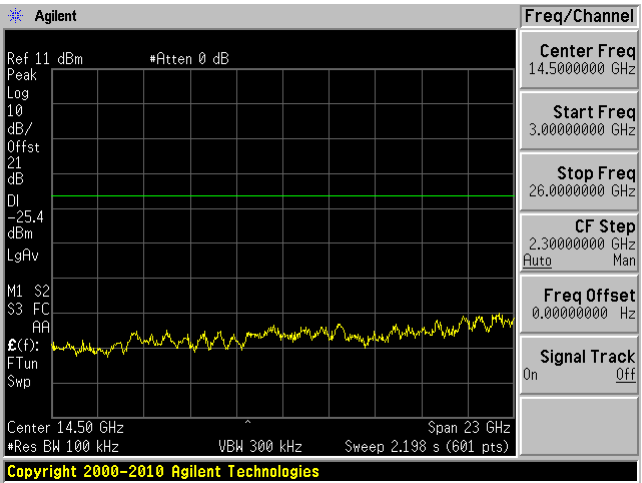


Middle Channel 30 MHz – 3 GHz

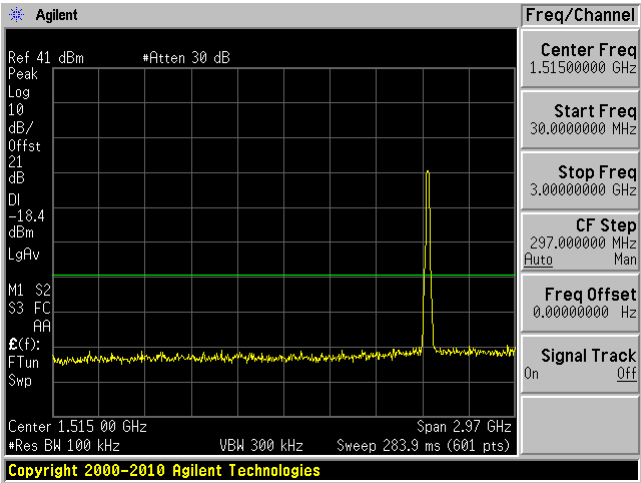


Middle Channel 3 GHz – 26 GHz

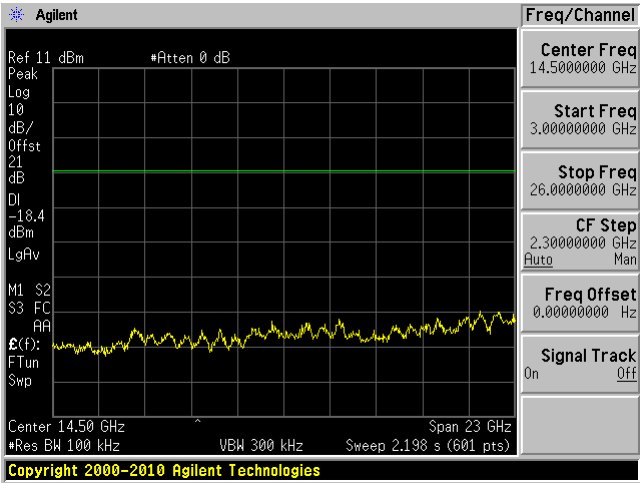

High Channel 30 MHz – 3 GHz

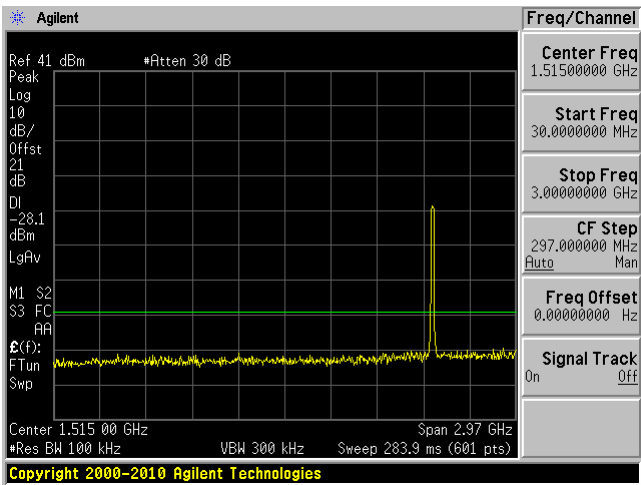


High Channel 3 GHz – 26 GHz

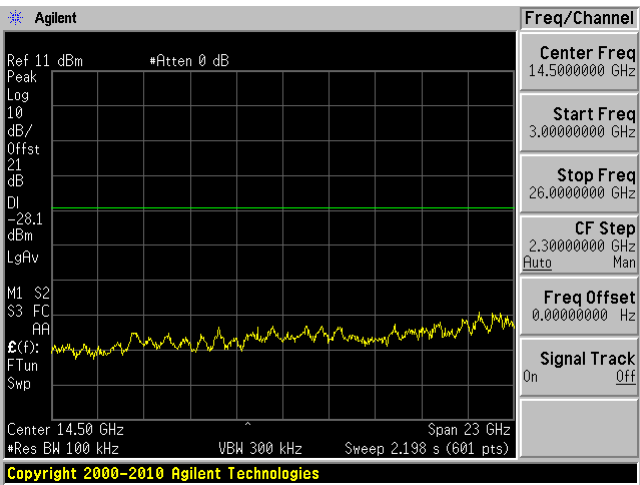


802.11n20 mode Chain 0


Low Channel 30 MHz – 3 GHz

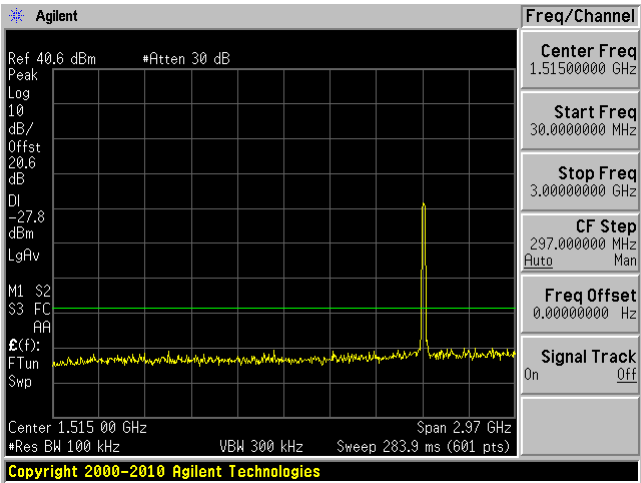


Low Channel 3 GHz – 26 GHz

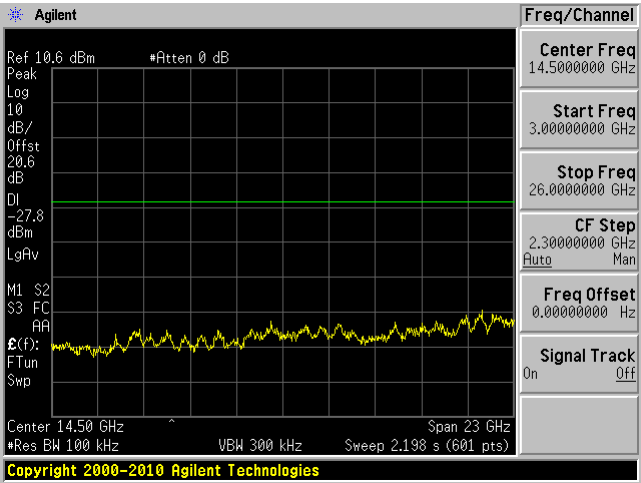


Middle Channel 30 MHz – 3 GHz

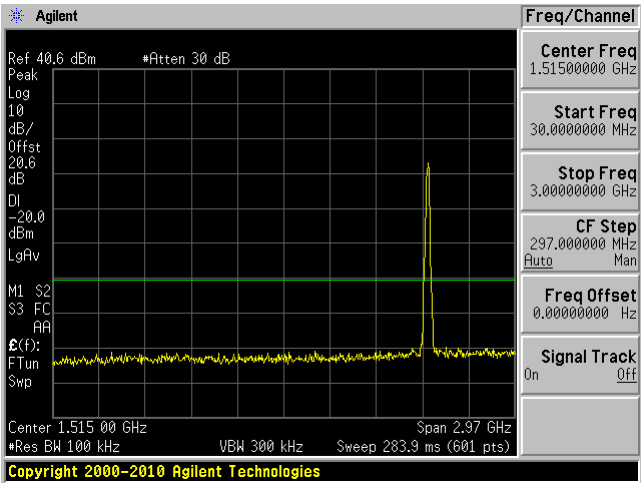


Middle Channel 3 GHz – 26 GHz

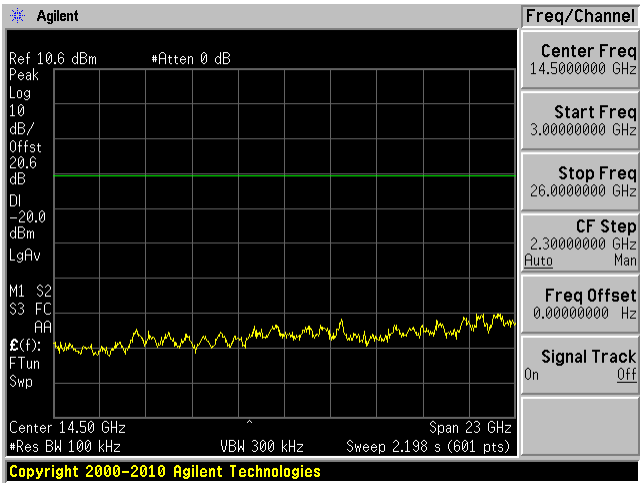

High Channel 30 MHz – 3 GHz

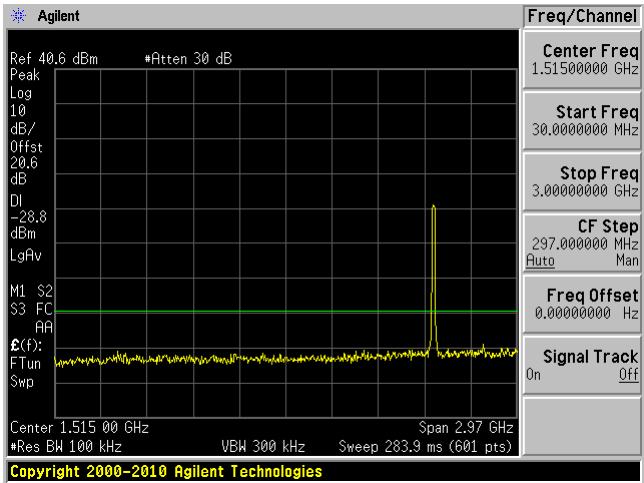


High Channel 3 GHz – 26 GHz

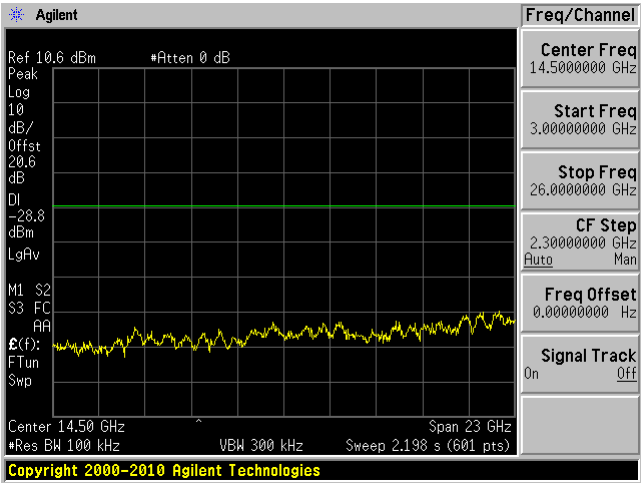


802.11n20 mode Chain 1


Low Channel 30 MHz – 3 GHz

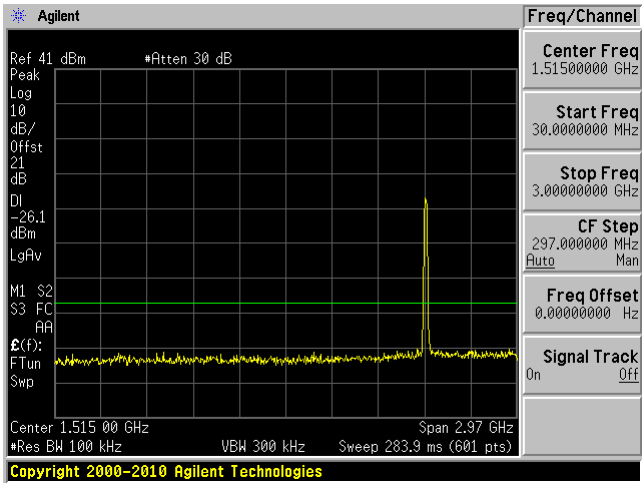


Low Channel 3 GHz – 26 GHz

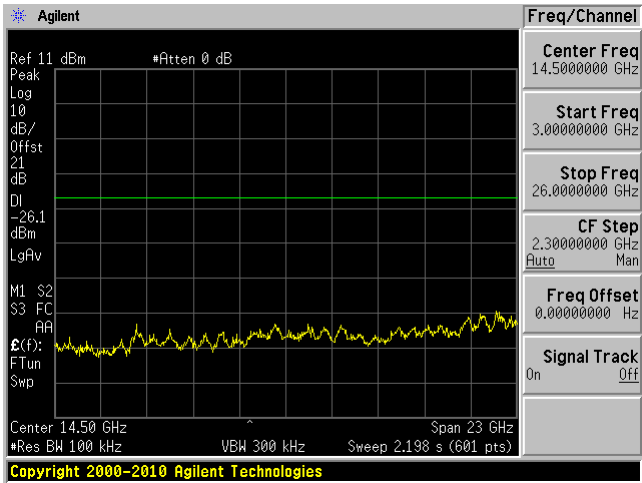


Middle Channel 30 MHz – 3 GHz

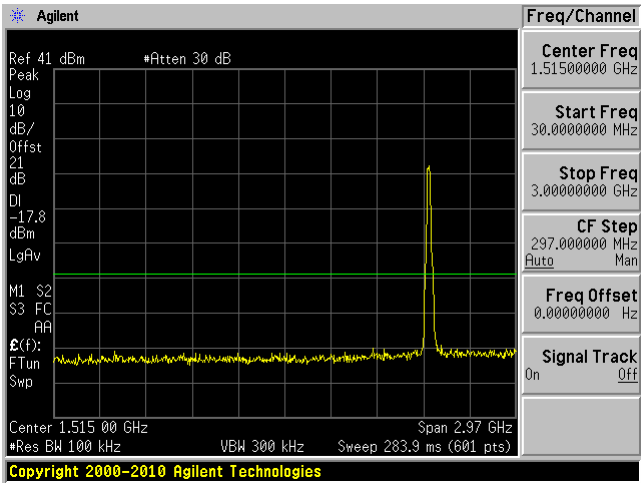


Middle Channel 3 GHz – 26 GHz

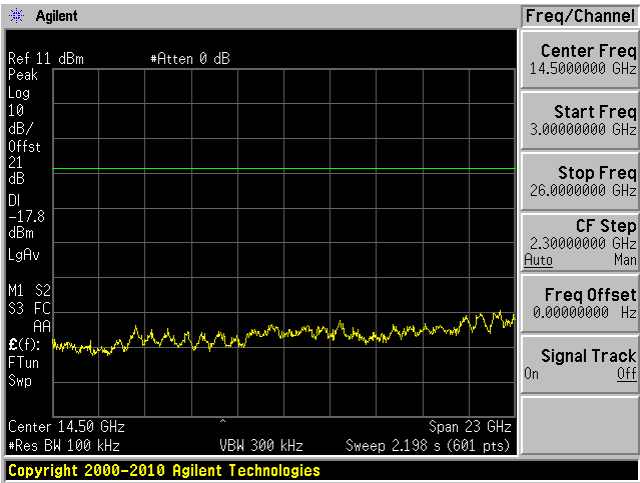

High Channel 30 MHz – 3 GHz

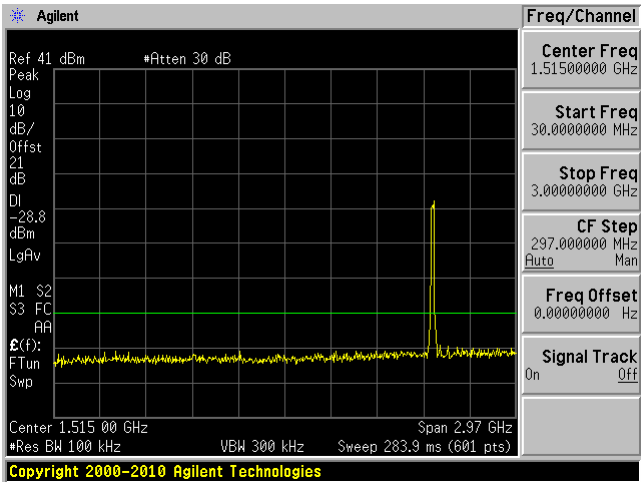


High Channel 3 GHz – 26 GHz

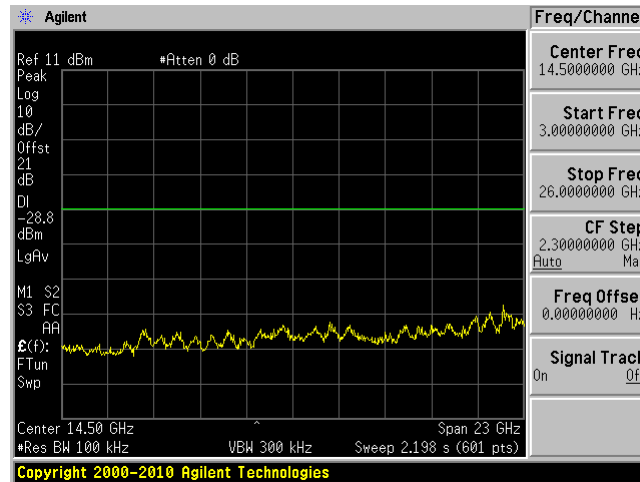


802.11n20 mode Chain 2


Low Channel 30 MHz – 3 GHz

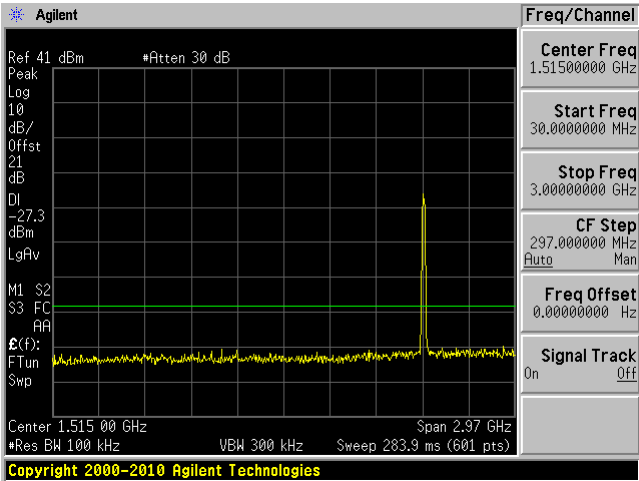


Low Channel 3 GHz – 26 GHz

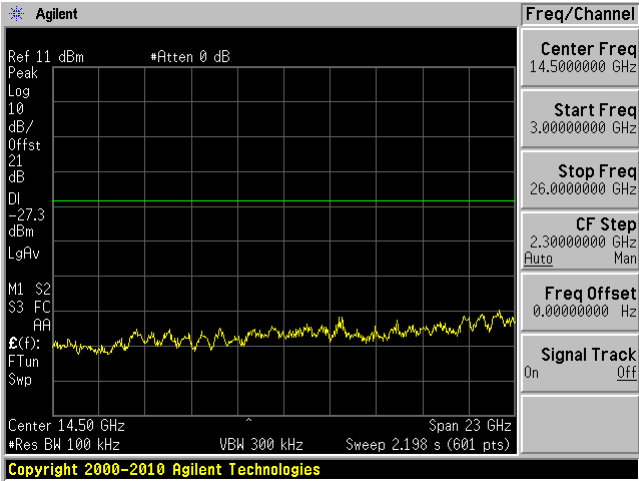


Middle Channel 30 MHz – 3 GHz

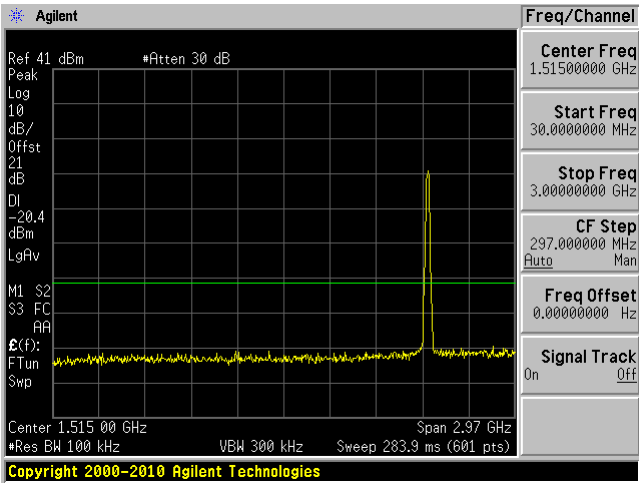


Middle Channel 3 GHz – 26 GHz

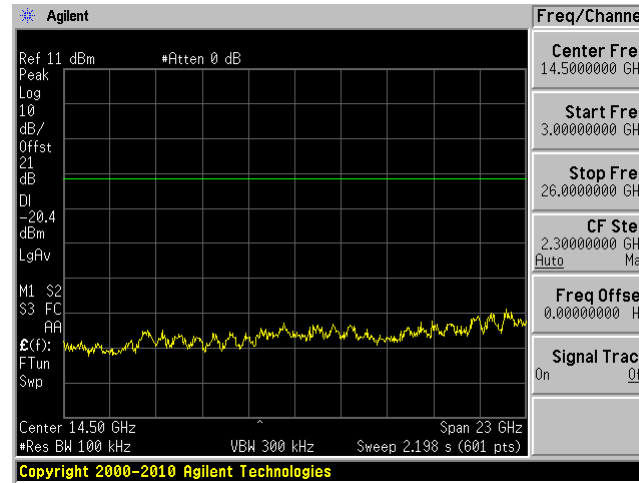

High Channel 30 MHz – 3 GHz

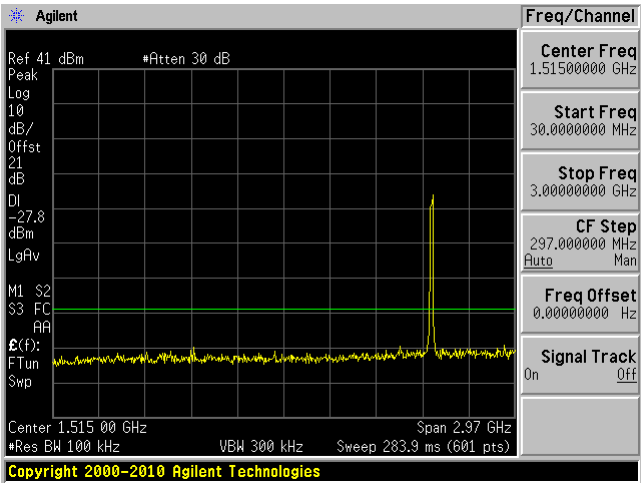


High Channel 3 GHz – 26 GHz

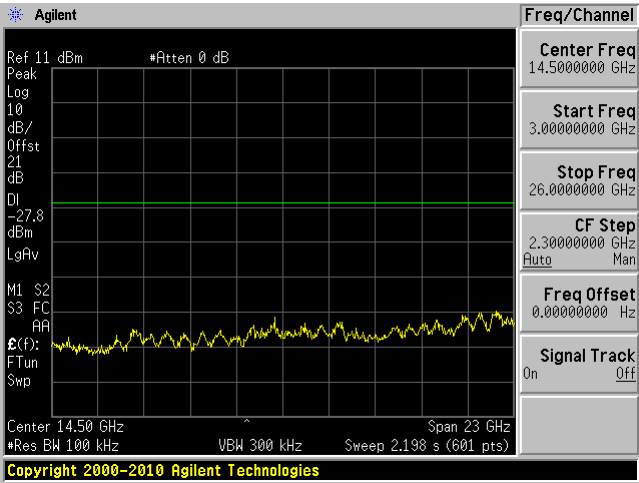


802.11n40 mode Chain 0


Low Channel 30 MHz – 3 GHz

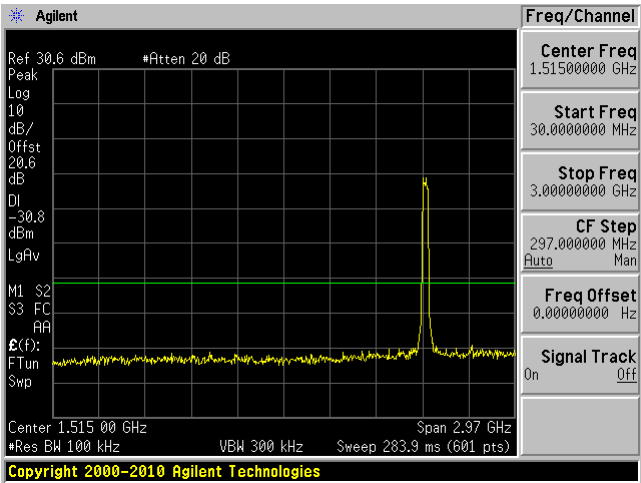


Low Channel 3 GHz – 26 GHz

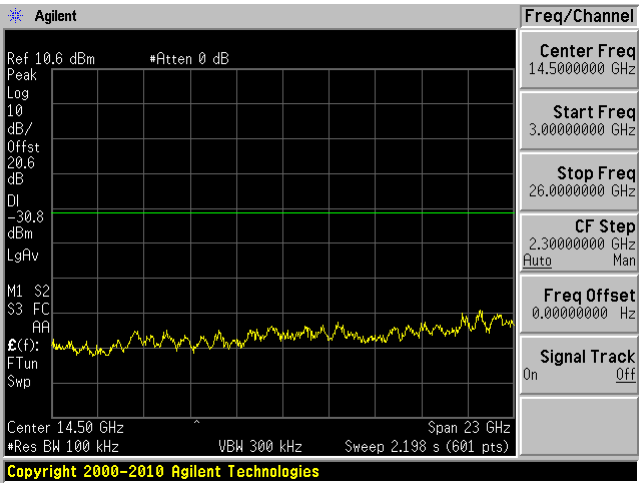


Middle Channel 30 MHz – 3 GHz

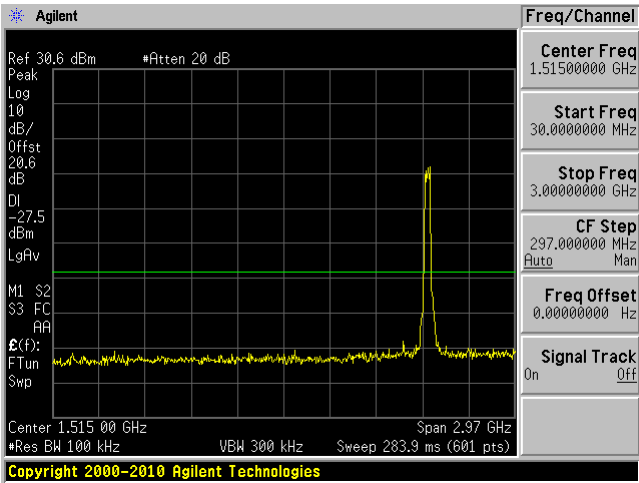


Middle Channel 3 GHz – 26 GHz

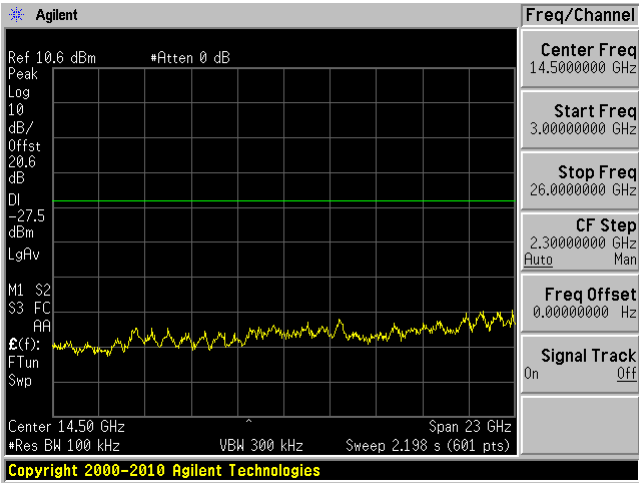

High Channel 30 MHz – 3 GHz

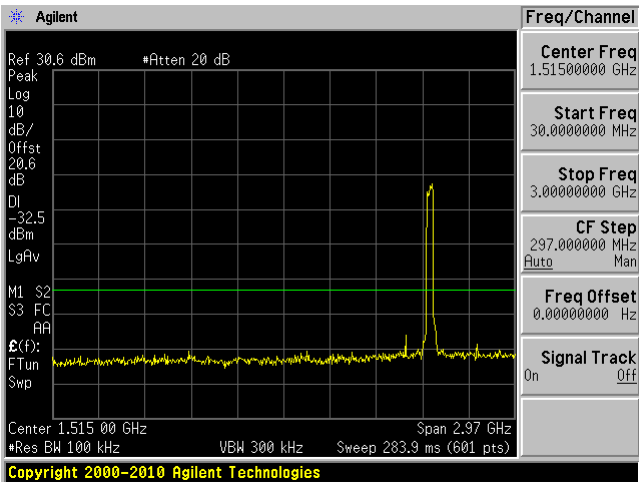


High Channel 3 GHz – 26 GHz

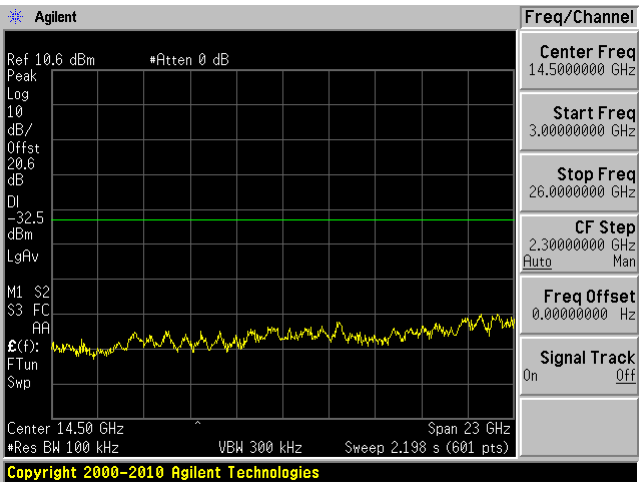


802.11n40 mode Chain 1


Low Channel 30 MHz – 3 GHz

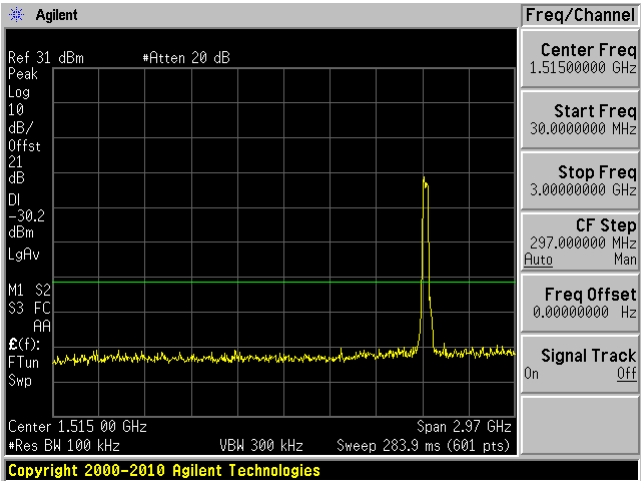


Low Channel 3 GHz – 26 GHz

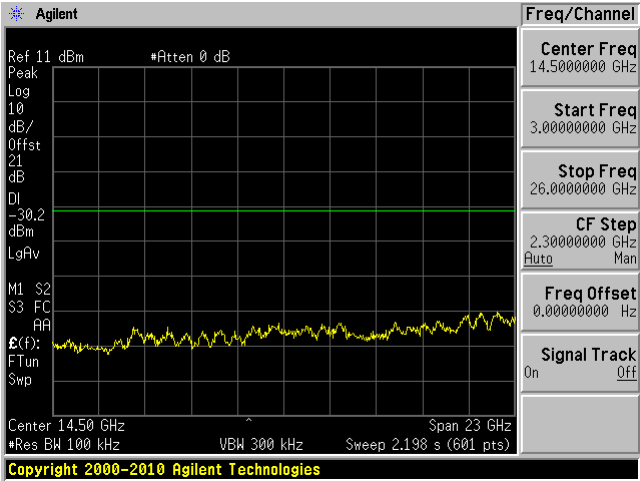


Middle Channel 30 MHz – 3 GHz

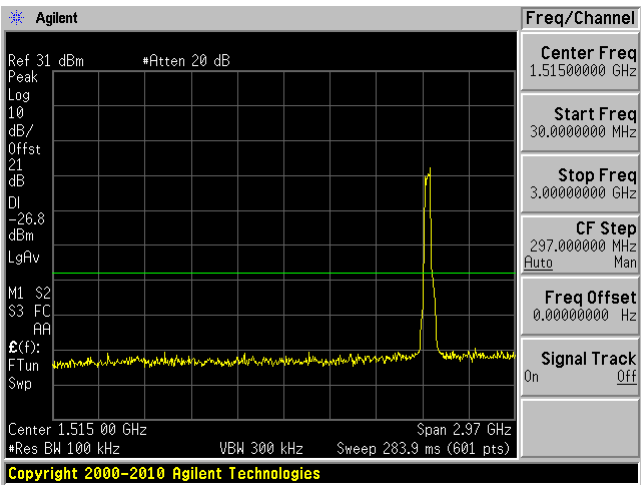


Middle Channel 3 GHz – 26 GHz

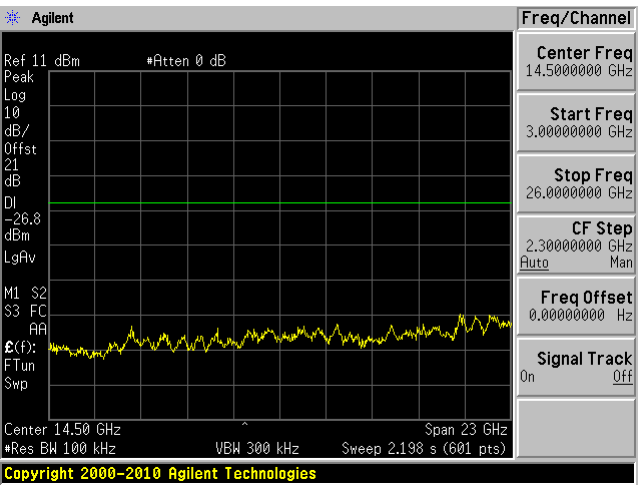

High Channel 30 MHz – 3 GHz

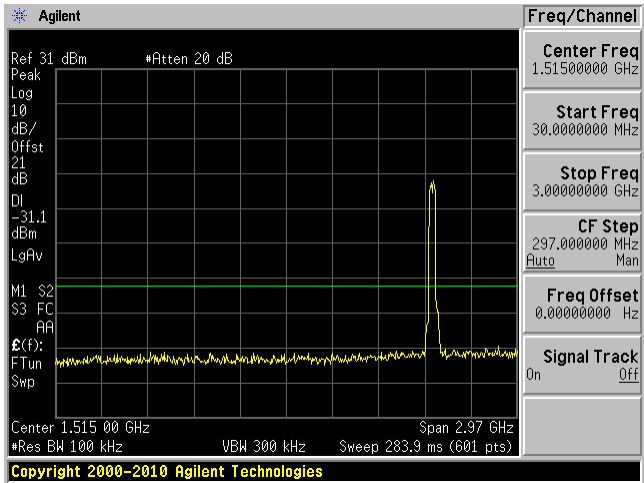


High Channel 3 GHz – 26 GHz

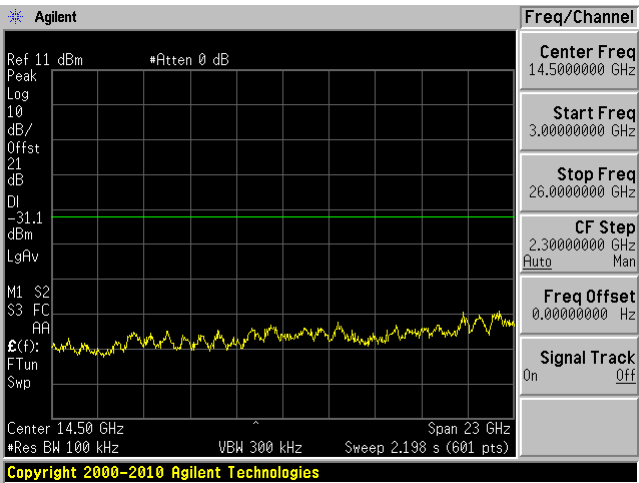


802.11n40 mode Chain 2


Low Channel 30 MHz – 3 GHz

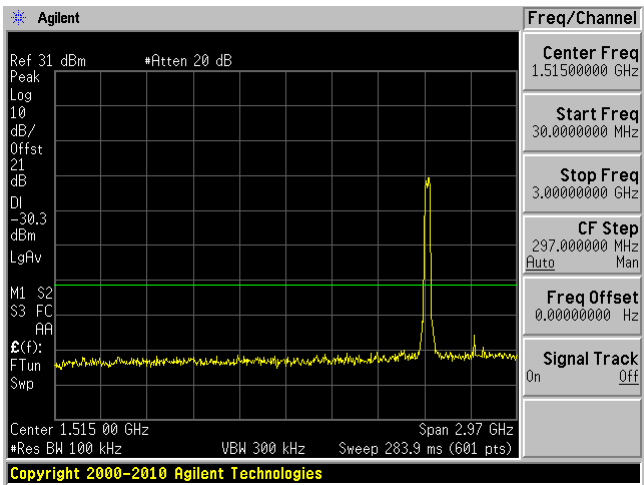


Low Channel 3 GHz – 26 GHz

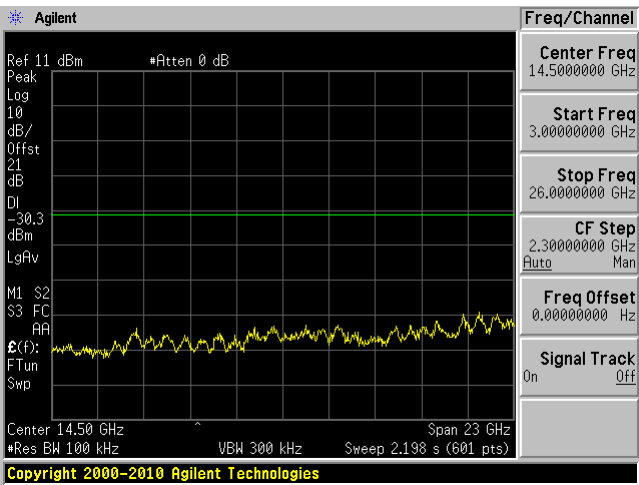


Middle Channel 30 MHz – 3 GHz

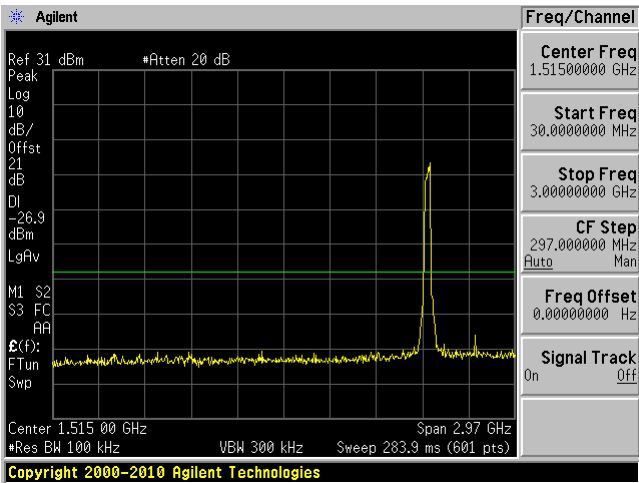


Middle Channel 3 GHz – 26 GHz

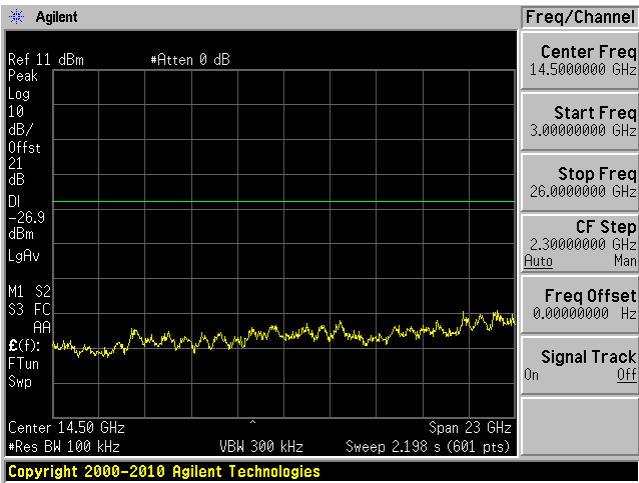

High Channel 30 MHz – 3 GHz

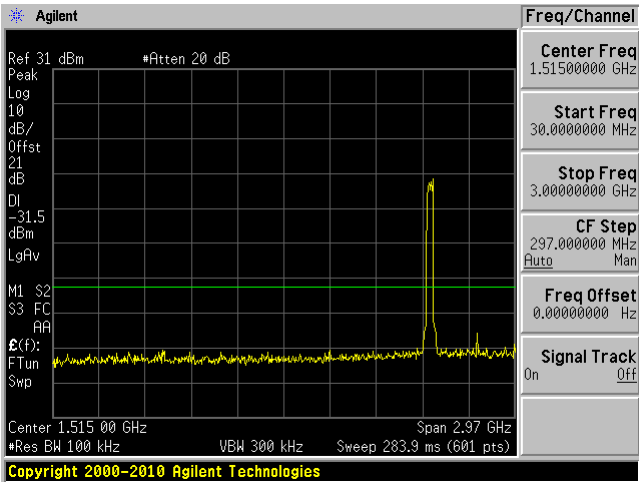

High Channel 3 GHz – 26 GHz

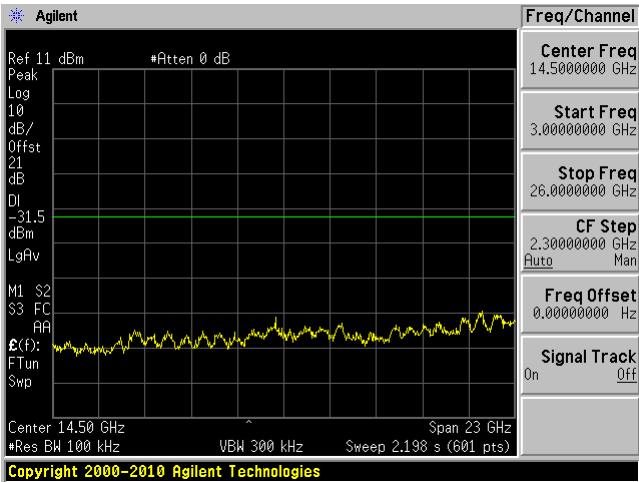

13 Annex A - FCC & ISED Equipment Labeling Requirements

13.1 FCC ID Label Requirements

As per FCC §2.925,

(a) Each equipment covered in an application for equipment authorization shall bear a nameplate or label listing the following:

(1) FCC Identifier consisting of the two elements in the exact order specified in §2.926. The FCC Identifier shall be preceded by the term FCC ID in capital letters on a single line, and shall be of a type size large enough to be legible without the aid of magnification.

Example: FCC ID: XXX123

Where: XXX—Grantee Code, 123—Equipment Product Code

As per FCC §15.19,

(a) In addition to the requirements in part 2 of this chapter, a device subject to certification, or verification shall be labeled as follows:

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified above is required to be affixed only to the main control unit. If the EUT is integrated within another device then a label affixed to the host shall also state, "Contains FCC ID: XXXXXX"

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

13.2 IC Label Requirements

As per IC RSP-100 Section 3.1, the certification number shall appear as follows:

IC: XXXXXX-YYYYYYYY

Where:


- The letters "IC:" indicate that this is an Innovation, Science and Economic Development Canada's certification number, but they are not part of the certification number. XXXXXXYYYYYYYYYYY is the ISED certification number.
- XXXXXX is the CN assigned by Innovation, Science and Economic Development Canada. Newly assigned CNs will be made up of five numeric characters (e.g. "20001") whereas existing CNs may consist of up to five numeric characters followed by an alphabetic character (e.g. "21A" or "15589J").
- YYYYYYYYYYYY is the Unique Product Number (UPN) assigned by the applicant, made up of a maximum of 11 alphanumeric characters.
- The CN and UPN are limited to capital alphabetic characters (A-Z) and numerals (0-9) only. The use of punctuation marks or other symbols, including "wildcard" characters, is not permitted.

- The HVIN may contain punctuation marks or symbols but they shall not represent any indeterminate (“wildcard”) characters.

As per RSS-Gen §2.1 Equipment Labeling:

The application for equipment certification shall be submitted in accordance with Industry Canada’s Radio Standards Procedure RSP-100, Radio Equipment Certification Procedure which sets out the requirements for certification and labelling of radio apparatus. RSP-100 shall be used in conjunction with RSS-Gen and other Radio Standards Specifications (RSSs) specifically applicable to the type of radio apparatus for which certification is sought.

13.3 Label Contents and Location

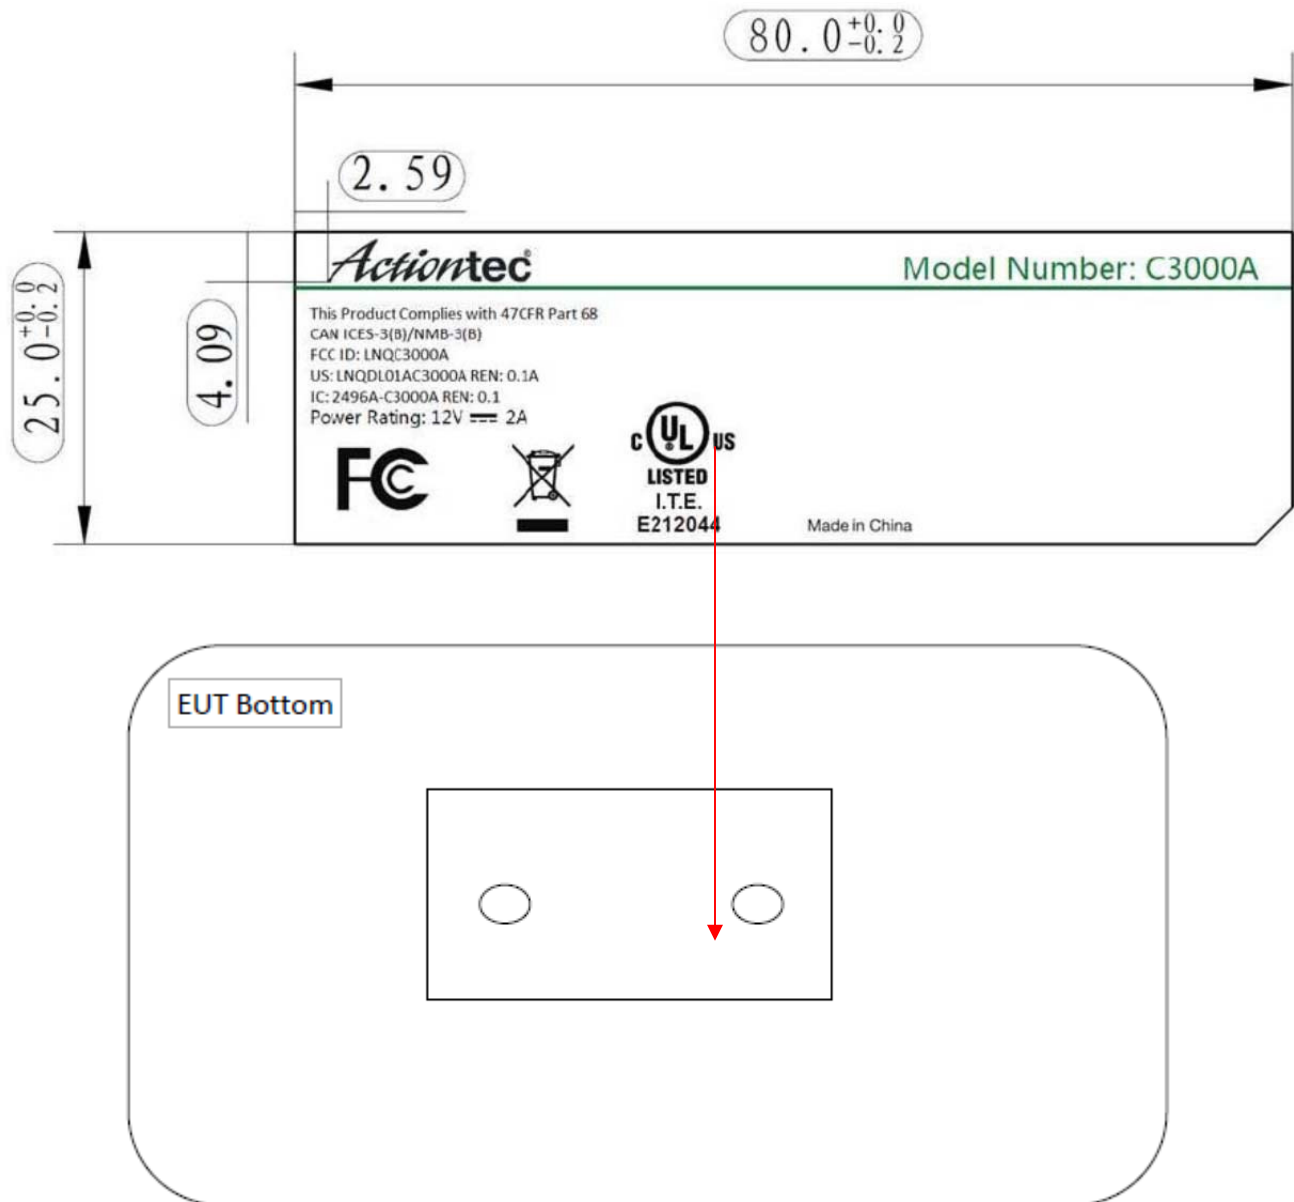

14 Annex B -Photographs

Please see attachments:

- Exhibit A – EUT Test Setup Photographs
- Exhibit B – EUT External Photographs
- Exhibit C – EUT Internal Photographs

15 Annex C (Informative) - Declaration of Similarity Letter



DECLARATION OF SIMILARITY

February 6, 2018

To:

FEDERAL COMMUNICATIONS COMMISSIONS
Authorization and Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046

Innovation, Science and Economic Development Canada
Certification and Engineering Bureau
P.O. Box 11490, Station 'H'
3701 Carling Ave., Building 94
Ottawa, Ontario K2H 8S2
Canada

Dear Sir or Madam:

We Actiontec Electronics, Inc. hereby declare that product: *802.11n and 802.11ac Wi-Fi Router*, model(s): *T3260* is electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as model: *C3000A* tested by BACL, the results of which are featured in BACL project: *R1711062*.

Models C3000A and T3260 are identical in hardware design. The purpose for 2 model numbers is to clarify specifically for one large customer versus generic consumer products.

Please contact me should there be need for any additional clarification or information.

Best Regards,

A handwritten signature in blue ink, appearing to read "Angela Yao", with a horizontal line underneath.

Angela Yao / Sr. Program Manager
Actiontec Electronics, Inc.
3301 Olcott Street,
Santa Clara, CA 95054
Phone: (408) 752-7700
Email: ayao@actiontec.com

3301 Olcott Street
Santa Clara, CA 95054

408-752-7700
Actiontec.com

16 Annex D (Informative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of A2LA R222 - Specific Requirements - EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 30th day of August 2016.

A handwritten signature in blue ink, appearing to read 'J. C. Burt'.

Senior Director of Quality & Communications
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2018

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

----- END OF REPORT -----