



Product Service

Report on the FCC and IC Testing of the SEW-EURODRIVE GmbH & Co KG

Model: MAXO-MS/M/SM-GIOP

In accordance with FCC 47 CFR Part 15C and ISED
Canada RSS-210 and ISED Canada RSS-GEN

Prepared for: SEW-EURODRIVE GmbH & Co KG
Ernst-Blickle-Straße 42
D-76646 Bruchsal

FCC ID: VEB-28272528
IC: 7177A-28272528

COMMERCIAL-IN-CONFIDENCE

Date: 2020-03-02
Document Number: TR-42980-93334-02 | Issue: 02



Product Service

Choose certainty.
Add value.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Michael Ingerl	2020-03-02	 SIGN-ID 478614
Authorized Signatory	Markus Biberger	2020-03-02	 SIGN-ID 478781

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and ISED Canada RSS-210 and ISED Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Michael Ingerl	2020-03-02	 SIGN-ID 478615

Laboratory Accreditation

DAkkS Reg. No. D-PL-11321-11-02

Laboratory recognition

Registration No. BNetzA-CAB-16/21-15

ISED Canada test site registration

3050A-2

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C, 47 CFR 2.1091, ISED Canada RSS-210 and ISED Canada RSS-GEN, Issue 10 (12-2019) and Issue 05 (03-2019).

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2021 TÜV SÜD Product Service.



Product Service

Contents

1	Report Summary	3
1.1	Report Modification Record.....	3
1.2	Introduction.....	3
1.3	Brief Summary of Results	4
1.4	Product Information	5
1.5	Deviations from the Standard.....	5
1.6	EUT Modification Record	6
1.7	Test Location	6
2	Test Details	7
2.1	Field Strength of any Emission	7
2.2	Frequency Tolerance Under Temperature Variations.....	12
2.3	20 dB Bandwidth	14
2.4	Restricted Band Edges.....	17
2.5	AC Power Line Conducted Emissions	19
2.6	Exposure of Humans to RF Fields and SAR exclusion threshold.....	23
3	Test Equipment Information	26
3.1	General Test Equipment Used	26
4	Measurement Uncertainty	27

- Annexes:**
TR-42980-93334-02 Ed.1 Annex A
TR-42980-93334-02 Ed.1 Annex B
TR-42980-93334-02 Ed.1 Annex C



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2020-11-24
2	Correction of typing error in Model Number	2021-03-02

Table 1

1.2 Introduction

Applicant	SEW-EURODRIVE GmbH & Co KG
Manufacturer	SEW-EURODRIVE GmbH & Co KG
Model Number(s)	MAXO-MS/M/SM-GIOP (Tested EUT) MAXO-MS/M/SM-GIP (Variant without connection for optical track guidance)
Serial Number(s)	---
Hardware Version(s)	---
Software Version(s)	---
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Issue 10 (12-2019) and Issue 05 (03-2019), 47 CFR 2.1091, 47 CFR 1.1310, KDB 447498 D01, RSS-102 Issue 5
Test Plan/Issue/Date	---
Order Number	28272528
Date of Receipt of EUT	2020-11-04
Start of Test	2020-11-05
Finish of Test	2020-11-19
Name of Engineer(s)	Michael Ingerl
Related Document(s)	ANSI C63.10 (2013) ANSI C63.4 (2014)



Product Service

1.3 Brief Summary

of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and ISED Canada RSS-210, ISED Canada RSS-GEN, 47 CFR 2.1091, KDB 447498 D01 and RSS-102 Issue 5 is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: 24V DC Powered – Continuous transmitting				
2.1	15.225 (a)(b)(c)(d), B.1 to B.9, 6.5 and 6.6.	Field Strength of any Emission	Pass	ANSI C63.10 (2013)
2.2	15.225 (e), B.1 to B.9 and 6.11.	Frequency Tolerance Under Temperature Variations	Pass	ANSI C63.10 (2013)
2.3	15.215 (c), N/A and 6.7	20 dB Bandwidth	Pass	ANSI C63.10 (2013)
2.4	15.205, 7.1 and 8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.5	15.207 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.10 (2013)
2.6	RSS-210, 47 CFR 2.1091	Exposure of Humans to RF Fields and SAR exclusion threshold	Pass	ANSI C63.4 (2014)

Table 2



1.4 Product Information

1.4.1 Technical Description

Equipment characteristics	
Type designation:	MAXO-MS/M/SM-GIOP (Tested EUT) MAXO-MS/M/SM-GIP (Variant without connection for optical track guidance)
Type of equipment:	RFID Reader
Application ¹ :	Inductive Applications
Equipment class:	Equipment for fixed use
Kind of equipment	Transceiver
Operating Frequency:	13.56 MHz
Channel spacing:	Wideband
Number of RF channels:	1
Antenna:	PCB-Antenna
Temperature Range:	-20 C to 40 C
Power supply:	DC supplied Nominal: 24 V Minimum: 18 V Maximum: 30 V Nominal frequency: DC

1.5 Deviations from the Standard

None



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

1.7 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing Test Laboratory.

Test Name	Name of Engineer(s)
Configuration and Mode: 24V DC Powered – Continuous transmitting	
Field Strength of any Emission	Michael Ingerl
Frequency Tolerance Under Temperature Variations	Michael Ingerl
20 dB Bandwidth	Michael Ingerl
Restricted Band Edges	Michael Ingerl
AC Power Line Conducted Emissions	Michael Ingerl
Exposure of Humans to RF Fields and SAR exclusion threshold	Michael Ingerl

Table 4

Office Address:

Äußere Frühlingstraße 45
94315 Straubing
Germany



2 Test Details

2.1 Field Strength of any Emission

2.1.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.225 (a)(b)(c)(d), B.1 to B.9, 6.5 and 6.6.

2.1.2 Equipment Under Test and Modification State

MAXO-MS/M/SM-GIOP, S/N: --- - Modification State 0

2.1.3 Date of Test

2020-11-05

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.3, 6.4 and 6.5.

Measurements were made at a distance of 3 m. The limit lines shown on the plot were extrapolated from either 300 m or 30 m to the measurement distance of 3 m in accordance with ANSI C63.10 Clause 6.4.4.2.

2.1.5 Environmental Conditions

Ambient Temperature	21.0 °C
Relative Humidity	32.0 %


2.1.6 Test Results

24V DC Powered – Continuous transmitting



Product Service


Frequency MHz	Quasi-Peak Level (dBµV/m) at 3 m	Quasi-Peak Level (dBµV/m) at 30 m
13.56	64.46	24.50

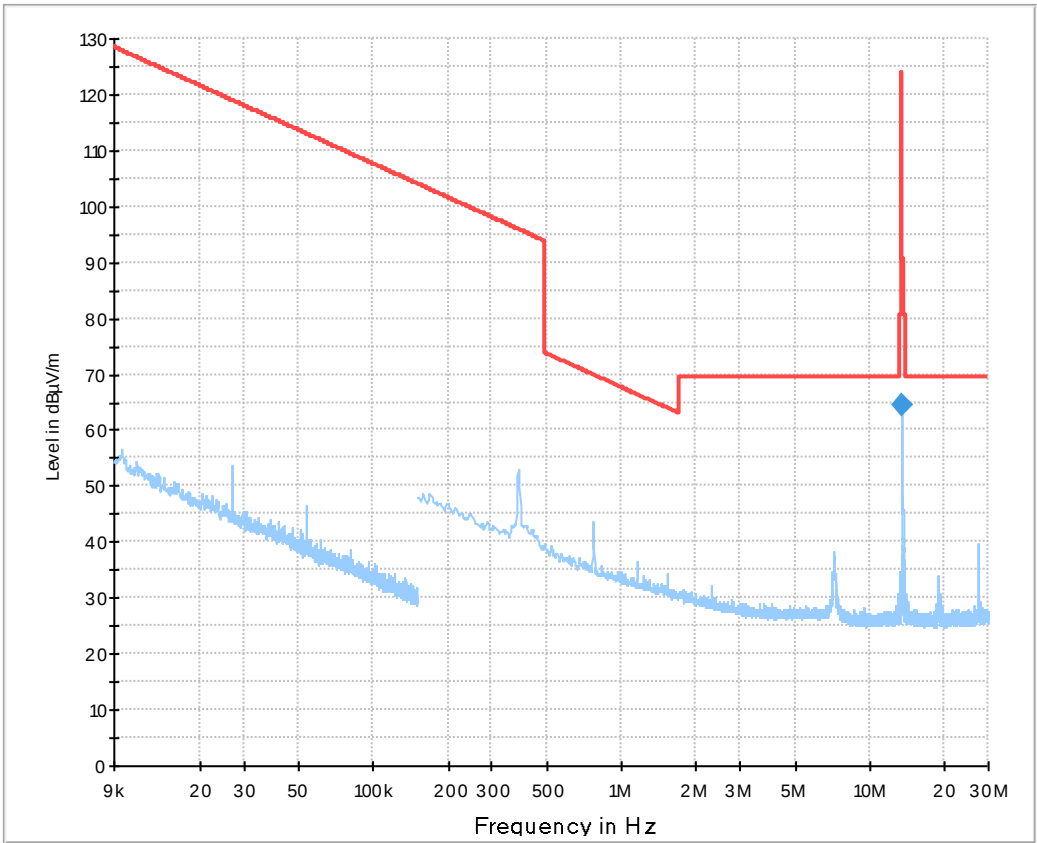

Preview Result 1H-PK+
Final_Result PK+

FCC Part 15.225 Electric Field strength 3m
Final_Result AVG

9 kHz to 30 MHz

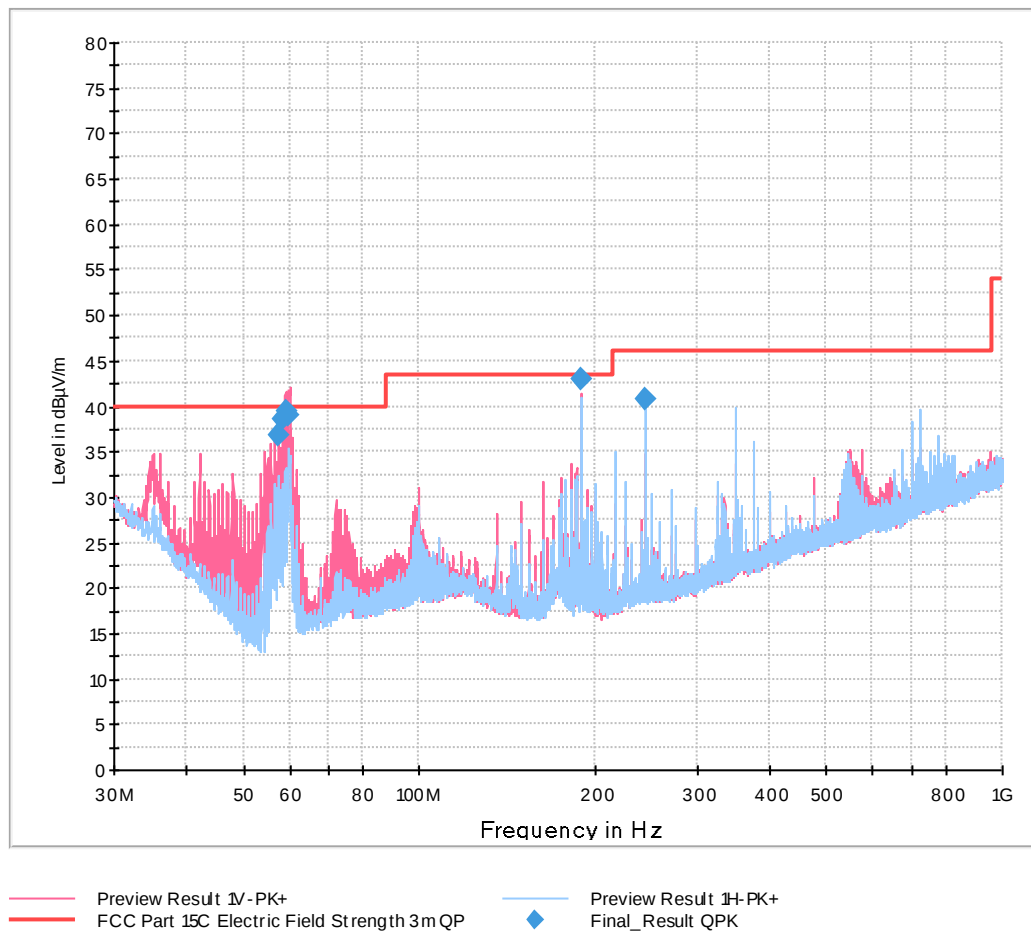

30 MHz to 1 GHz

Final Results 1:

Frequency	QuasiPeak	Limit	Margin	Meas. Time	Bandwidth	Height	Pol	Azimuth	Corr.
MHz	dBμV/m	dBμV/m	dB	ms	kHz	cm		deg	dB
57.420000	36.90	40.00	3.10	1000.0	120.000	125.0	V	74.0	12.0
58.230000	38.58	40.00	1.42	1000.0	120.000	105.0	V	120.0	12.2
59.040000	39.45	40.00	0.55	1000.0	120.000	269.0	V	111.0	12.4
59.850000	39.03	40.00	0.97	1000.0	120.000	230.0	V	112.0	12.6
189.840000	42.99	43.50	0.51	1000.0	120.000	125.0	H	201.0	15.9
244.080000	40.83	46.02	5.19	1000.0	120.000	125.0	H	-6.0	17.6



FCC 47 CFR Part 15, Limit Clause 15.225 (a)(b)(c)(d)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 m.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 m.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 m.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1705 to 30	30	30
30 to 88	100**	3
88 to 216	150**	3
216 to 960	200**	3
Above 960	500	5

Table 5 - FCC Radiated Emission Limit



ISED Canada RSS-210, Limit Clause B.6

The field strength of any emission shall not exceed the following limits:

- (a) 15.848 mW/m (84 dBμV/m) at 30 m, within the band 13.553 – 13.567 MHz.
- (b) 334 μV/m (50.5 dBμV/m) at 30 m, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz.
- (c) 106 μV/m (40.5 dBμV/m) at 30 m, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz.
- (d) RSS-GEN general field strength limits for frequencies outside the band 13.110 – 14.010 MHz.

ISED Canada RSS-GEN, Limit Clause

Frequency	Electric Field Strength (μV/m)	Magnetic Field Strength (H-Field) (μA/m)	Measurement Distance (m)
9 - 490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490 - 1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1,705 kHz - 30 MHz	30	N/A	30

Table 6 - ISED Canada Radiated Emission Limit - Less than 30 MHz

Frequency (MHz)	Field Strength (μV/m at 3 m)
30 - 88	100
88 - 216	150
216 - 960	200
> 960	500

Table 7 - ISED Canada Radiated Emission Limit - 30 MHz to 1 GHz

2.1.7 Test Location and Test Equipment Used

This test was carried out in a Semi anechoic room - cabin no. 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2021-03-31
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2022-11-30
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A

Table 8

TU - Traceability Unscheduled
O/P Mon – Output Monitored using calibrated equipment
N/A - Not Applicable



2.2 Frequency Tolerance Under Temperature Variations

2.2.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.225 (e), B.1 to B.9 and 6.11.

2.2.2 Equipment Under Test and Modification State

MAXO-MS/M/SM-GIOP, S/N: --- - Modification State 0

2.2.3 Date of Test

2020-11-12

2.2.4 Test Method

2.2.5 Environmental Conditions

Ambient Temperature 22.0 °C
Relative Humidity 32.0 %

2.2.6 Test Results

24V DC Powered – Continuous transmitting

Temperature	Voltage	Measured Frequency (MHz)	Frequency Error (ppm)	Frequency Deviation (%)
-20.0 °C	24.0V	13.560586	11.615	0.001161
-10.0 °C	24.0V	13.560532	7.607	0.000761
0.0 °C	24.0V	13.560508	5.877	0.000588
+10.0 °C	24.0V	13.560479	3.731	0.000373
+20.0 °C	24.0V	13.560428	0.000	0.000000
+30.0 °C	24.0V	13.560397	-2.316	-0.000232
+40.0 °C	24.0V	13.560442	0.966	0.000097
+50.0 °C	24.0V	13.560477	3.584	0.000358

Table 9 - Frequency Tolerance Under Temperature Variation

Temperature	Voltage	Measured Frequency (MHz)	Frequency Error (ppm)	Frequency Deviation (%)
+20.0 °C	20.4V	13.560421	-0.553	-0.000055
+20.0 °C	24.0V	13.560428	0.000	0.000000
+20.0 °C	27.6V	13.560440	0.831	0.000083

Table 10 - Frequency Tolerance Under Voltage Variation



FCC 47 CFR Part 15, Limit Clause 15.225 (e)

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency.

ISED Canada RSS-210, Limit Clause B.6

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm)

2.2.7 Test Location and Test Equipment Used

This test was carried out in Non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2021-01-31
Climatic test chamber	Feutron Klimasimulation	KPK200-2	19868	18	2021-08-31

Table 11

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



2.3 20 dB Bandwidth

2.3.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.215 (c), N/A and 6.7

2.3.2 Equipment Under Test and Modification State

MAXO-MS/M/SM-GIOP, S/N: --- - Modification State 0

2.3.3 Date of Test

2020-11-12

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.9.1.

2.3.5 Environmental Conditions


Ambient Temperature 22.0 °C
Relative Humidity 32.0 %

2.3.6 Test Results

24V DC Powered – Continuous transmitting


Frequency (MHz)	20 dB Bandwidth (Hz)	99% Occupied Bandwidth (Hz)	F _{LOWER} (MHz)	F _{UPPER} (MHz)
13.56	130215	421737	13.495189	13.625404

Table 12

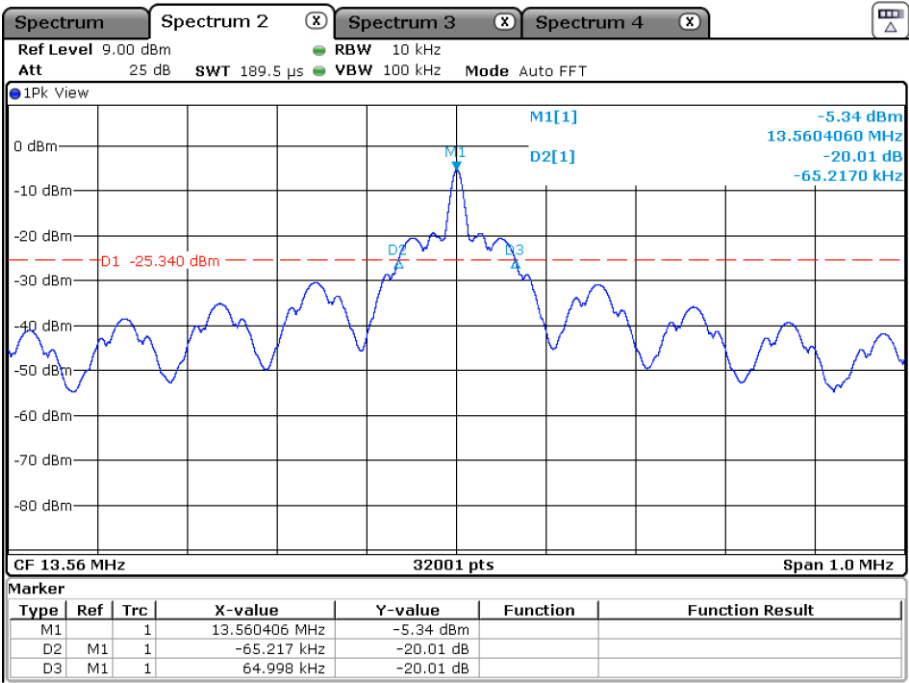

Date: 12.NOV.2020 11:37:14

Figure 1 - 20 dB Bandwidth

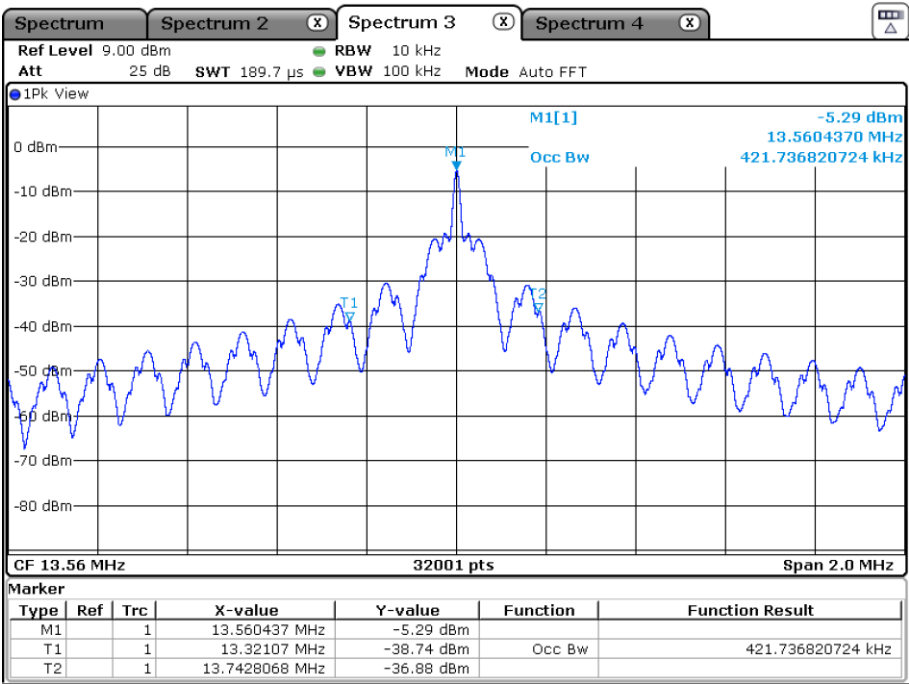

Date: 12.NOV.2020 11:38:05

Figure 2 - 99% Occupied Bandwidth



FCC 47 CFR Part 15, Limit Clause 15.215 (c)

The 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

ISED Canada RSS 210 and ISED Canada RSS GEN, Limit Clause

None specified.

2.3.7 Test Location and Test Equipment Used

This test was carried out in Non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2021-01-31
Climatic test chamber	Feutron Klimasimulation	KPK200-2	19868	18	2021-08-31

Table 13

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



Product Service

2.4 Restricted Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.205, 7.1 and 8.10

2.4.2 Equipment Under Test and Modification State

MAXO-MS/M/SM-GIOP, S/N: --- - Modification State 0

2.4.3 Date of Test

2020-11-05

2.4.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.13.1.

Plots for average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.3.

Final average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.2.

2.4.5 Environmental Conditions

Ambient Temperature	21.0 °C
Relative Humidity	32.0 %

2.4.6 Test Results

No restricted band in the range



FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54

Table 14

ISED Canada RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (μV/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

Table 15

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

2.4.7 Test Location and Test Equipment Used

This test was carried out in a Semi anechoic room - cabin no. 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2021-03-31
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2022-11-30
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A

Table 16

TU - Traceability Unscheduled
 O/P Mon – Output Monitored using calibrated equipment
 N/A - Not Applicable



Product Service

2.5 AC Power Line Conducted Emissions

2.5.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.207, N/A and 8.8

2.5.2 Equipment Under Test and Modification State

MAXO-MS/M/SM-GIOP, S/N: --- - Modification State 0

2.5.3 Date of Test

2020-11-19

2.5.4 Test Method

2.5.5 Environmental Conditions


Ambient Temperature	23.0 °C
Relative Humidity	30.0 %

2.5.6 Test Results

24V DC Powered – Continuous transmitting



Product Service

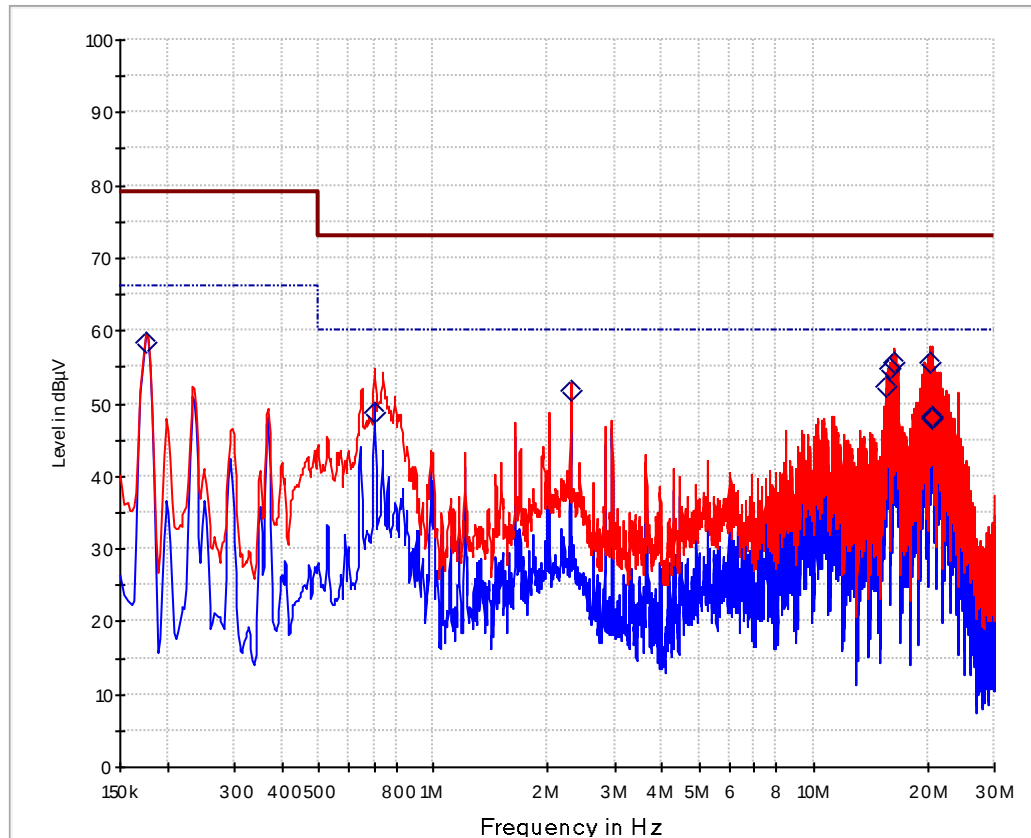


— Preview Result 2-AVG * Preview Result 1-PK+ — FCC 15.107 Class A QP
 - - - - - FCC 15.107 Class A AV Final_Result QPK ◇ Final_Result CAV

Line Plus - 150 kHz to 30 MHz

Final Results 1:

Frequency MHz	CAverage dBμV	Limit dBμV	Margin dB	Meas. Time ms	Bandwidth kHz	Corr. dB
0.174750	58.49	66.00	7.51	1000.0	9.000	10.0
0.701250	48.89	60.00	11.11	1000.0	9.000	10.0
2.301000	51.93	60.00	8.07	1000.0	9.000	10.1
15.654750	52.27	60.00	7.73	1000.0	9.000	10.4
16.001250	54.95	60.00	5.05	1000.0	9.000	10.4
16.334250	55.56	60.00	4.44	1000.0	9.000	10.4
20.346000	55.57	60.00	4.43	1000.0	9.000	10.2
20.494500	48.09	60.00	11.91	1000.0	9.000	10.2
20.654250	47.98	60.00	12.02	1000.0	9.000	10.2

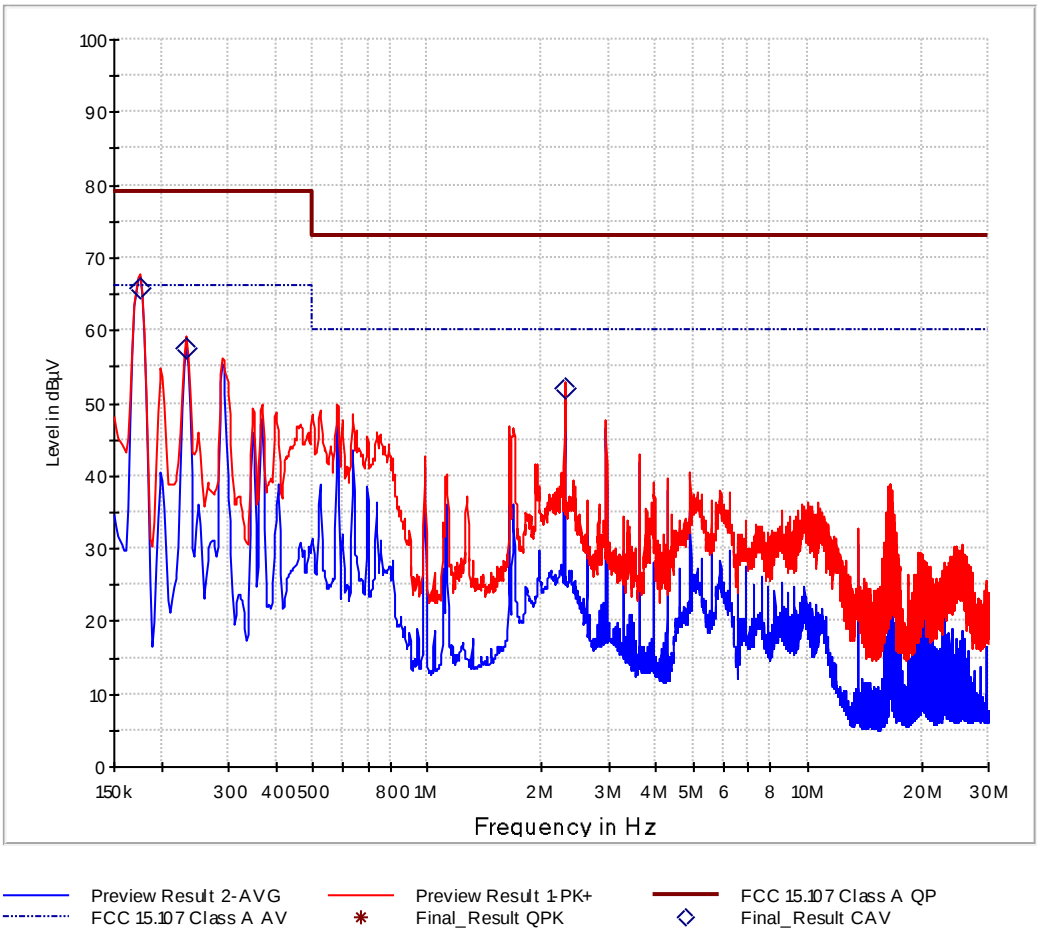

Line Minus - 150 kHz to 30 MHz

Final Results 1:

Frequency MHz	CAverage dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	Corr. dB
0.174750	65.73	66.00	0.27	1000.0	9.000	10.0
0.231000	57.62	66.00	8.38	1000.0	9.000	10.0
2.301000	52.11	60.00	7.89	1000.0	9.000	10.1



FCC 47 CFR Part 15, Limit Clause 15.207 and ISED Canada RSS-GEN, Limit Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

Table 17

*Decreases with the logarithm of the frequency.

2.5.7 Test Location and Test Equipment Used

This test was carried out in Shielded room - cabin no. 9.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde & Schwarz	ESU8	19904	18	2021-01-31
V-network	Rohde & Schwarz	ESH 3-Z6	19461	36	2022-12-31
V-network	Rohde & Schwarz	ESH 3-Z6	19080	24	2021-07-31
V-network	Rohde & Schwarz	ENV216	39908	12	2021-03-31
EMC measurement software	Rohde & Schwarz	EMC32 V10.60.00	44377	N/A	N/A

Table 18

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



2.6 Exposure of Humans to RF Fields and SAR exclusion threshold

2.6.1 Specification Reference

ISED Canada RSS-102 Issue 5, section 2.5
KDB 447498 D01 V06, section 4.3.1
47 CFR 2.1091
47 CFR 1.1310

2.6.2 Equipment Under Test and Modification State

MAXO-MS/M/SM-GIOP, S/N: --- - Modification State 0

2.6.3 Date of Test

2020-11-05 and 2020-11-11

2.6.4 Test Results

24V DC Powered – Continuous transmitting

In accordance with KDB 447498 D01 v06:

$$S = \frac{EIRP}{4\pi R^2}$$

S= power density
R= distance to the center of radiation of the antenna

Operating frequency	Measured maximum EIRP [dBm]	Measured maximum EIRP [μ W]	Duty cycle [%]	MPE-Value [mW/cm ²]	MPE-Limit [mW/cm ²]	Margin to Limit [mW/cm ²]
13.56 MHz	-30.60	0.87	100	0.0000173	0.9800	0.97998

The measurements results comply with the FCC Limit per 47 CFR 2.1091 for the uncontrolled RF Exposure of mobile devices.



<i>Specifications:</i>	RSS-102, Issue 5, Section 4, Table 4, Uncontrolled Environment SPR-002, Issue 1
<i>Comment:</i>	---

<i>Test procedure:</i>	IEC 62236-1, Section 4.2 "Measurement to show accordance to the reference levels"			
<i>Test distance:</i>	20 cm			
<i>Limit:</i>	<i>Frequency Range (MHz)</i>	<i>Electric Field (V/m_{rms})</i>	<i>Magnetic Field (A/m_{rms})</i>	<i>Reference Periode (min)</i>
	10-20	27.46	0.0728	6
	300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	6
	f in MHz			
<i>Test positions:</i>	All surfaces: The antenna was moved all over the equipment under test using a test distance as stated above.			

Measured maximum value (V/m)	Maximum Limit at 433.92 MHz (V/m)	Margin to reference value (V/m)
2.28	27.46	25.18

Measured maximum value (A/m)	Maximum Limit at 433.92 MHz (A/m)	Margin to reference value (A/m)
0.0091	0.0728	0.0637



2.6.5 Test Location and Test Equipment Used

This test was carried out in a Semi anechoic room - cabin no. 11 and a non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2021-03-31
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2022-11-30
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A
Electromagnetic radiation meter	Narda Safety	EMR-200	19590	36	2022-11-30
Electric field probe	Narda Safety	Type 8.3	19591	36	2022-11-30
Magnetic field probe	Narda Safety	Type 12.1	19592	36	2022-11-30

Table 19

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



3 Test Equipment Information

3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde&Schwarz	ESW44	39897	12	2021-03-31
ULTRALOG antenna	Rohde&Schwarz	HL562E	39969	36	2022-11-30
Loop antenna	Schwarzbeck	FMZB 1519B	44334	36	2023-01-31
EMC measurement software	Rohde&Schwarz	EMC32 V10.50.10	42986	N/A	N/A
EMI test receiver	Rohde & Schwarz	ESU8	19904	18	2021-01-31
V-network	Rohde & Schwarz	ESH 3-Z6	19461	36	2022-12-31
V-network	Rohde & Schwarz	ESH 3-Z6	19080	24	2021-07-31
V-network	Rohde & Schwarz	ENV216	39908	12	2021-03-31
EMC measurement software	Rohde & Schwarz	EMC32 V10.60.00	44377	N/A	N/A
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2021-01-31
Climatic test chamber	Feutron Klimasimulation	KPK200-2	19868	18	2021-08-31
Electromagnetic radiation meter	Narda Safety	EMR-200	19590	36	2022-11-30
Electric field probe	Narda Safety	Type 8.3	19591	36	2022-11-30
Magnetic field probe	Narda Safety	Type 12.1	19592	36	2022-11-30

Table 20

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Testing			
Test Name	kp	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	$\pm 1.14 \%$	2
RF-Frequency error	1.96	$\pm 1 \cdot 10^{-7}$	7
RF-Power, conducted carrier	2	$\pm 0.079 \text{ dB}$	2
RF-Power uncertainty for given BER	1.96	$+0.94 \text{ dB} / -1.05$	7
RF power, conducted, spurious emissions	1.96	$+1.4 \text{ dB} / -1.6 \text{ dB}$	7
RF power, radiated			
25 MHz – 4 GHz	1.96	$+3.6 \text{ dB} / -5.2 \text{ dB}$	8
1 GHz – 18 GHz	1.96	$+3.8 \text{ dB} / -5.6 \text{ dB}$	8
18 GHz – 26.5 GHz	1.96	$+3.4 \text{ dB} / -4.5 \text{ dB}$	8
40 GHz – 170 GHz	1.96	$+4.2 \text{ dB} / -7.1 \text{ dB}$	8
Spectral Power Density, conducted	2.0	$\pm 0.53 \text{ dB}$	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	$\pm 2.89 \%$	2
6 kHz – 25 kHz	2	$\pm 0.2 \text{ dB}$	2
Maximum frequency deviation for FM	2	$\pm 2.89 \%$	2
Adjacent channel power 25 MHz – 1 GHz	2	$\pm 2.31 \%$	2
Temperature	2	$\pm 0.39 \text{ K}$	4
(Relative) Humidity	2	$\pm 2.28 \%$	2
DC- and low frequency AC voltage			
DC voltage	2	$\pm 0.01 \%$	2
AC voltage up to 1 kHz	2	$\pm 1.2 \%$	2
Time	2	$\pm 0.6 \%$	2

Table 21



Radio Interference Emission Testing			
Test Name	kp	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Field strength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			4
Voltage Changes, Voltage Fluctuations and Flicker			4

Table 22



Immunity Testing			
Test Name	kp	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

Table 23



Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2.05$, providing a level of confidence of $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 7:

The expanded uncertainty reported according to ETSI TR 100 028 V1.4.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$