



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

Date of Report: December 1, 2003

Date of Submission: January 9, 2004

Federal Communications Commission

Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Kenwood USA Corporation

Equipment: TK-2202

FCC ID: ALH36913210

FCC Rules: 2, 22, 74, 90, 95J, Confidentiality

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, reading 'Morton Flom, P. Eng.' with a stylized, cursive script.

Morton Flom, P. Eng.

enclosure(s)

cc: Applicant

MF/jmm

## List of Exhibits

(FCC **Certification** (Transmitters) - Revised 9/28/98)

Applicant: Kenwood USA Corporation

FCC ID: ALH36913210

### By Applicant:

- |   |   |
|---|---|
| 1. Letter of Authorization                | x |
| 2. Identification Drawings, 2.1033(c)(11) |   |
| <u>x</u> Label                            |   |
| <u>x</u> Location of Label                |   |
| <u>x</u> Compliance Statement             |   |
| <u>x</u> Location of Compliance Statement |   |
| 3. Photographs, 2.1033(c)(12)             | x |
| 4. Documentation: 2.1033(c)               |   |
| (3) User Manual                           | x |
| (9) Tune Up Info                          | x |
| (10) Schematic Diagram                    | x |
| (10) Circuit Description                  | x |
| Block Diagram                             | x |
| Active Devices                            | x |
| 5. Part 90.203(e) & (g) Attestation       | x |
| 6. SAR Report by Celltech Labs Inc.       | x |

### By M.F.A. Inc.:

- A. Testimonial & Statement of Certification



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

## **Transmitter Certification**

of

**FCC ID: ALH36913210**

Model: TK-2202

to

**Federal Communications Commission**

Rule Part(s) 2, 22, 74, 90, 95J, Confidentiality

Date of report: December 1, 2003

### **On the Behalf of the Applicant:**

Kenwood USA Corporation

### **At the Request of:**

P.O. JB-F-006

Kenwood USA Corporation  
Communications Division  
3975 Johns Creek Court, Suite 300  
Suwanee, GA 30024

Attention of:

Joel E. Berger, Research & Development  
JBerger@kenwoodusa.com  
(678) 474-4722; FAX: -4731

Supervised by:

A handwritten signature in black ink that reads 'M. Flom P. Eng.' The signature is written in a cursive, stylized font.

Morton Flom, P. Eng.

**The Applicant has been cautioned as to the following:****15.21 Information to the User.**

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**15.27(a) Special Accessories.**

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

## Table of Contents

<b>Rule</b>	<b>Description</b>	<b>Page</b>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	6
	Standard Test Conditions and Engineering Practices	7
2.1046(a)	Carrier Output Power (Conducted)	8
2.1046(a)	ERP Carrier Power (Radiated)	10
2.1051	Unwanted Emissions (Transmitter Conducted)	11
2.1053(a)	Field Strength of Spurious Radiation	15
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	19
90.214	Transient Frequency Behavior	24
2.1047(a)	Audio Low Pass Filter (Voice Input)	30
2.1047(a)	Audio Frequency Response	33
2.1047(b)	Modulation Limiting	35
2.1055(a)(1)	Frequency Stability (Temperature Variation)	38
2.1055(b)(1)	Frequency Stability (Voltage Variation)	41
2.202(g)	Necessary Bandwidth and Emission Bandwidth	42

Page Number 1 of 42.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

a)

**Test Report**

b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d03c0002

d) Client: Kenwood USA Corporation  
Communications Division  
3975 Johns Creek Court, Suite 300  
Suwanee, GA 30024

e) Identification: TK-2202  
FCC ID: ALH36913210  
EUT Description: VHF/FM Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: December 1, 2003  
EUT Received: November 5, 2003

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

Page Number 2 of 42.

### List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,  
Volume II, Part 2 and to

2, 22, 74, 90, 95J, Confidentiality

Sub-part 2.1033

(c)(1): **Name and Address of Applicant:**

Kenwood USA Corporation  
Communications Division  
3975 Johns Creek Court, Suite 300  
Suwanee, GA 30024

**Manufacturer:**

Kenwood Electronics Technologies PTE Ltd.  
1 Ang Mo Kio Street 63  
Singapore 569110

(c)(2): **FCC ID:** ALH36913210

**Model Number:** TK-2202

(c)(3): **Instruction Manual(s):**

Please see attached exhibits

(c)(4): **Type of Emission:** 16K0F3E, 11K0F3E

(c)(5): **Frequency Range, MHz:** 136 to 174

(c)(6): **Power Rating, Watts:** 1 to 5  
       \_\_\_ Switchable                    \_\_\_ x Variable                    \_\_\_ N/A

**FCC Grant Note:**

BE - The output power is continuously variable from the value listed in this entry to 15%-20% of the value listed.

(c)(7): **Maximum Power Rating, Watts:** 300

**DUT Results:**

Passes \_\_\_ x \_\_\_ Fails \_\_\_

Page Number

3 of 42.

### **Information for Push-To-Talk Devices**

Type and number of antenna to be used for this device:

Two, whip

Maximum antenna gain for antenna indicated above:

0 dBd

Can this device sustain continuous operation with respect to its hardware capabilities and allowable operating functions?

No

Other hardware or operating restrictions that could limit a person's RF Exposure:

See Owner's Manual

Source-based time-averaging (see 2.1093 of rules) applicable to reduce the average output power:

No

If device has headset and belt-clip accessories that would allow body-worn operations, what is the minimum separation distance between the antenna and the user's body in this operating configuration?

1.5 cm

Can device access wire-line services to make phone calls, either directly or through an operator?

No

Can specific operating instructions be given to users to eliminate any potential RF Exposure concerns for both front-of-the-face and body-worn operating configurations?

See Owner's Manual

Other applicable information the applicant may provide that can serve as effective means for ensuring RF Exposure compliance:

See Owner's Manual



Page Number

4 of 42.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.



**THE AMERICAN  
ASSOCIATION  
FOR LABORATORY  
ACCREDITATION**

**ACCREDITED LABORATORY**

A2LA has accredited

**M. FLOM ASSOCIATES, INC.**  
**Chandler, AZ**

for technical competence in the field of

**Electrical (EMC) Testing**


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002.

Presented this 2<sup>nd</sup> day of March, 2001.



*Peter M. Flom*  
President  
For the Accreditation Council  
Certificate Number 1008.01  
Valid to December 31, 2002

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



**American Association for Laboratory Accreditation**

SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999

M. FLOM ASSOCIATES, INC.  
Electronic Testing Laboratory  
3356 North San Marcos Place, Suite 107  
Chandler, AZ 85225  
Morton Flom Phone: 480 926 3100

**ELECTRICAL (EMC)**

Valid to: December 31, 2002 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-2000, CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; IEC 61000-3-2; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438
Harmonic Currents	EN 61000-3-2
Fluctuation and Flicker	EN 61000-3-3
RF Immunity	EN: 50082-1, 50082-2, 55024; AS/NZS 4251.1
Electrostatic Discharge (ESD)	EN 61000-4-2
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
Voltage Dips, Short Interruptions, and Line Voltage Variations	EN 61000-4-11
47 CFR (FCC)	Parts: 2, 18, 21, 22, 23, 24, 25, 26, 27, 74, 80, 87, 90, 95, 97, 101 (excluding SAR Testing)
Power Frequency Magnetic Field Immunity	EN 61000-4-8
Immunity to Conducted Disturbances	EN 61000-4-6

(A2LA Cert. No. 1008.01) 08/01/02

Page 1 of 1

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

Page Number 5 of 42.

Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid-state device:

Collector Current, A	=	1.8
Collector Voltage, Vdc	=	7.5
Supply Voltage, Vdc	=	7.5Vdc

(c)(9): **Tune-Up Procedure:**

Please see attached exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please see attached exhibits

(c)(11): **Label Information:**

Please see attached exhibits

(c)(12): **Photographs:**

Please see attached exhibits

(c)(13): **Digital Modulation Description:**

☐ Attached Exhibits  
☒ N/A

(c)(14): **Test and Measurement Data:**

Follows

Page Number

6 of 42.

Sub-part

2.1033(c)(14):**Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- ☐ 21 – Domestic Public Fixed Radio Services
- ☒ 22 – Public Mobile Services
- ☐ 22 Subpart H - Cellular Radiotelephone Service
- ☐ 22.901(d) - Alternative technologies and auxiliary services
- ☐ 23 – International Fixed Public Radiocommunication services
- ☐ 24 – Personal Communications Services
- ☒ 74 Subpart H - Low Power Auxiliary Stations
- ☐ 80 – Stations in the Maritime Services
- ☐ 80 Subpart E - General Technical Standards
- ☐ 80 Subpart F - Equipment Authorization for Compulsory Ships
- ☐ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- ☐ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- ☐ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- ☐ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- ☐ 80 Subpart V - Emergency Position Indicating Radio Beacons (EPIRB'S)
- ☐ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- ☐ 80 Subpart X - Voluntary Radio Installations
- ☐ 87 – Aviation Services
- ☒ 90 – Private Land Mobile Radio Services
- ☐ 94 – Private Operational-Fixed Microwave Service
- ☐ 95 Subpart A - General Mobile Radio Service (GMRS)
- ☐ 95 Subpart C - Radio Control (R/C) Radio Service
- ☐ 95 Subpart D - Citizens Band (CB) Radio Service
- ☐ 95 Subpart E - Family Radio Service
- ☐ 95 Subpart F - Interactive Video and Data Service (IVDS)
- ☒ 95 Subpart J
- ☐ 97 - Amateur Radio Service
- ☐ 101 – Fixed Microwave Services

**Standard Test Conditions  
and  
Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

Page Number 8 of 42.

**Name of Test:** Carrier Output Power (Conducted)

**Specification:** 47 CFR 2.1046(a)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

**Test Equipment:** As per attached page

### Measurement Procedure

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an RF Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .

### Measurement Results (Worst case)

Frequency of Carrier, MHz = 155.1, 136.1, 173.9  
Ambient Temperature = 22° C +/- 3° C

Power Setting	RF Power, Watts
Low	1
High	5


Performed by:



Daniel M. Dillon, Test Engineer

Transmitter Power Conducted Measurements

Test A. RF Power Output  
Test B. Frequency Stability

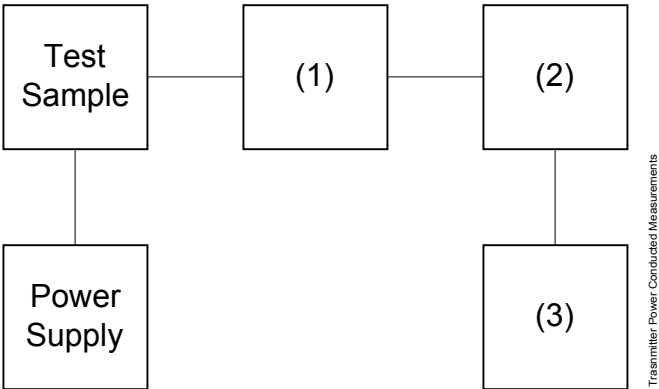

Asset	Description	s/n
(1)	<b>Coaxial Attenuator</b>	
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(2)	<b>Power Meters</b>	
X i00020	HP 8901A Power Mode	2105A01087
(3)	<b>Frequency Counter</b>	
X i00020	HP 8901A Frequency Mode	2105A01087

Page Number 10 of 42.


**Name of Test:** ERP Carrier Power (Radiated)

**Specification:** TIA/EIA 603A (Substitution Method)

**2.2.17.1 Definition:** The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

**2.2.17.2 Method of Measurement:**

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

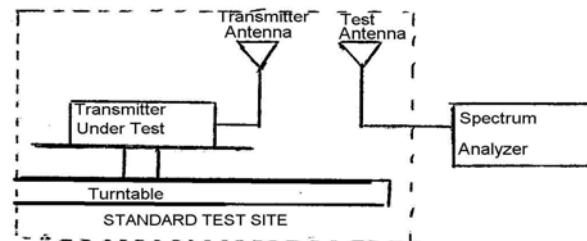

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \sum 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

**Results**

	136.100 MHz		155.100 MHz		173.900 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	23.5	0.3	29.4	-0.5	32.1	1.3
45°	26.6	0.3	27.6	-0.5	32.1	1.3
90°	29.6	0.3	29.4	-0.5	31.7	1.3
135°	27.6	0.3	33.2	-0.5	31.5	1.3
180°	20.1	0.3	31.9	-0.5	32.3	1.3
225°	32.7	0.3	30.7	-0.5	31.8	1.3
270°	24.3	0.3	29.4	-0.5	32.4	1.3
315°	30.1	0.3	31.9	-0.5	31.5	1.3
<hr/>						
	136.100 MHz		155.100 MHz		173.900 MHz	
Av. Radiated Power:	27.11 dbm		29.94 dbm		33.23 dbm	

Page Number 11 of 42.

**Name of Test:** Unwanted Emissions (Transmitter Conducted)

**Specification:** 47 CFR 2.1051

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

**Test Equipment:** As per attached page

### Measurement Procedure

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.

3. Measurement Results: Attached for worst case

Frequency of carrier, MHz	=	155.1, 136.1, 173.9
Spectrum Searched, GHz	=	0 to 10 x $F_c$
Maximum Response, Hz	=	2820
All Other Emissions	=	$\geq 20$ dB Below Limit

Performed by:




Daniel M. Dillon, Test Engineer



Transmitter Spurious Emission

Test A. Occupied Bandwidth (In-Band Spurious)  
Test B. Out-Of-Band Spurious

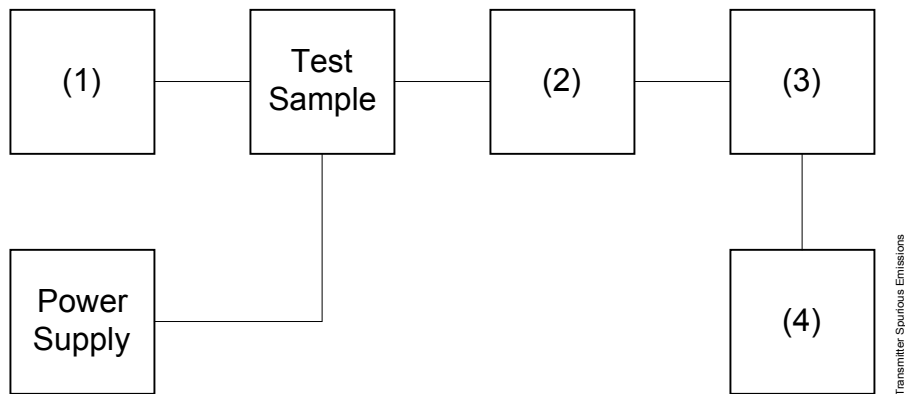

Asset	Description	s/n
(1) <b>Audio Oscillator/Generator</b>		
X i00017	HP 8903A Audio Analyzer	2216A01753
i00002	HP 3336B Synthesizer / Level Gen.	1931A01465
(2) <b>Coaxial Attenuator</b>		
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i0012/3	NARDA 766 (10 dB)	7802 or 7802A
(3) <b>Filters; Notch, HP, LP, BP</b>		
i00126	Eagle TNF-1 Notch Filter	100-250
i00125	Eagle TNF-1 Notch Filter	50-60
i00124	Eagle TNF-1 Notch Filter	250-850
(4) <b>Spectrum Analyzer</b>		
X i00048	HP 8566B Spectrum Analyzer	2511A01467
i00029	HP 8563E Spectrum Analyzer	3213A00104

Page Number 13 of 42.

**Name of Test:** Unwanted Emissions (Transmitter Conducted)

Limit(s), dBc  $-(50+10 \times \text{LOG } P) = -50$  (1 Watt)  
 $-(50+10 \times \text{LOG } P) = -57$  (5 Watts)

g03b0096: 2003-Nov-06 Thu 11:49:00

State: 1:Low Power

Ambient Temperature: 22° C +/- 3° C

Frequency Tuned, MHz	Frequency Emission, MHz	Level, dBm	Level, dBc
136.100000	272.203000	-32.6	-62.9
155.100000	310.206000	-32.1	-62.4
173.900000	347.803500	-42.8	-73.1
136.100000	408.311000	-52.5	-82.8
155.100000	465.286000	-53.9	-84.2
173.900000	521.914500	-53.7	-84
136.100000	544.286000	-53.5	-83.8
155.100000	620.484000	-52.3	-82.6
136.100000	680.604500	-52.9	-83.2
173.900000	695.752000	-53.7	-84
155.100000	775.467500	-52.7	-83
136.100000	816.358000	-53.1	-83.4
173.900000	869.356000	-52.8	-83.1
155.100000	930.789000	-53.7	-84
136.100000	952.462000	-52.9	-83.2
173.900000	1043.487500	-52.3	-82.6
155.100000	1085.562000	-54	-84.3
136.100000	1088.583000	-52.9	-83.2
173.900000	1217.385000	-52.9	-83.2
136.100000	1224.725500	-53.1	-83.4
155.100000	1240.940500	-52.8	-83.1
136.100000	1360.876500	-53	-83.3
173.900000	1391.212000	-50.8	-81.1
155.100000	1396.021000	-53.5	-83.8
136.100000	1497.017500	-53.1	-83.4
155.100000	1551.073500	-52.5	-82.8
173.900000	1565.000000	-52.2	-82.5
136.100000	1633.318000	-53.6	-83.9
155.100000	1706.263500	-52	-82.3
173.900000	1738.971000	-51.6	-81.9
136.100000	1769.287500	-52.2	-82.5
155.100000	1861.265500	-52.4	-82.7
136.100000	1905.413000	-52.4	-82.7
173.900000	1912.735500	-52.3	-82.6
155.100000	2016.543500	-52.4	-82.7
136.100000	2041.449500	-51.6	-81.9
173.900000	2086.590000	-52.7	-83
155.100000	2171.212500	-51.7	-82
173.900000	2260.859000	-51.1	-81.4
155.100000	2326.259000	-51.2	-81.5
173.900000	2434.616500	-52	-82.3
173.900000	2608.702000	-54.1	-84.4

g03b0095: 2003-Nov-06 Thu 11:42:00

State: 2:High Power

Ambient Temperature: 22° C +/- 3° C

Frequency Tuned, MHz	Frequency Emission, MHz	Level, dBm	Level, dBc
136.100000	272.203000	-29.7	-66.2
155.100000	310.208000	-29.4	-65.9
173.900000	347.807000	-39.8	-76.3
136.100000	408.112000	-43.3	-79.8
155.100000	465.316000	-42.9	-79.4
173.900000	521.823500	-42.1	-78.6
136.100000	544.584500	-43.1	-79.6
155.100000	620.405500	-41.2	-77.7
136.100000	680.370000	-43.5	-80
173.900000	695.350000	-43.6	-80.1
155.100000	775.459500	-43.2	-79.7
136.100000	816.673500	-43.3	-79.8
173.900000	869.731500	-43.3	-79.8
155.100000	930.371000	-44.1	-80.6
136.100000	952.547500	-42.6	-79.1
173.900000	1043.289500	-42.6	-79.1
155.100000	1085.927500	-42.1	-78.6
136.100000	1088.753000	-43.8	-80.3
173.900000	1217.081500	-42.8	-79.3
136.100000	1224.922000	-43.6	-80.1
155.100000	1241.013500	-43.2	-79.7
136.100000	1361.151500	-44.5	-81
173.900000	1391.259500	-42.4	-78.9
155.100000	1395.773500	-43	-79.5
136.100000	1497.177500	-42.8	-79.3
155.100000	1550.877000	-43.2	-79.7
173.900000	1565.180500	-42.3	-78.8
136.100000	1633.299500	-42.2	-78.7
155.100000	1705.945000	-43.6	-80.1
173.900000	1738.864000	-43.1	-79.6
136.100000	1769.527000	-42.2	-78.7
155.100000	1861.399500	-43.2	-79.7
136.100000	1905.626500	-43	-79.5
173.900000	1912.692000	-42	-78.5
155.100000	2016.123500	-42.5	-79
136.100000	2041.566000	-42.4	-78.9
173.900000	2086.900000	-41.9	-78.4
155.100000	2171.259000	-41	-77.5
173.900000	2260.545000	-42.4	-78.9
155.100000	2326.621000	-41.7	-78.2
173.900000	2434.575500	-41.6	-78.1
173.900000	2608.429000	-44.6	-81.1



Performed by:

Daniel M. Dillon, Test Engineer

Page Number 15 of 42.

**Name of Test:** Field Strength of Spurious Radiation

**Specification:** 47 CFR 2.1053(a)


**Guide:** ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

### Measurement Procedure

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

#### 1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
  - 2) Video Bandwidth  $\geq 3$  times Resolution Bandwidth, or 30 kHz (22.917)
  - 3) Sweep Speed  $\leq 2000$  Hz/second
  - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

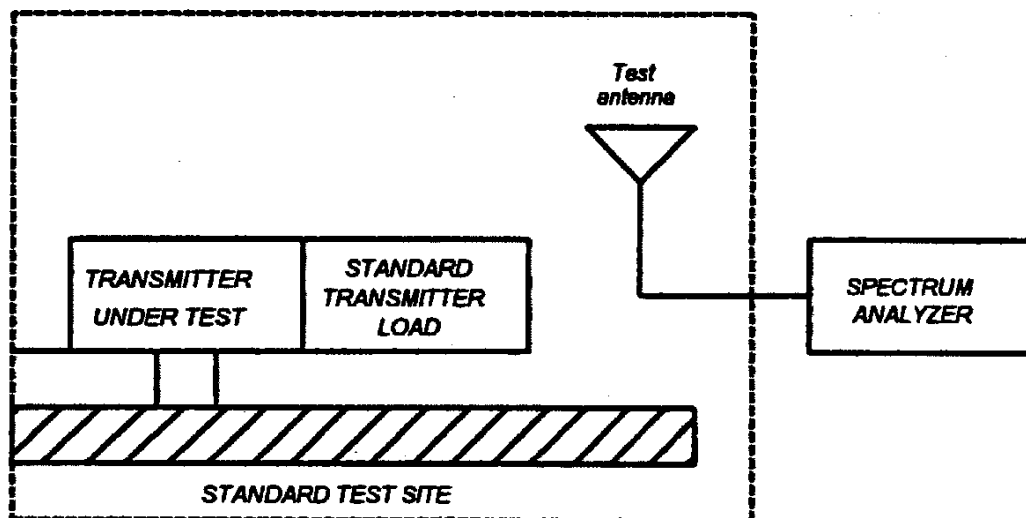

Page Number 16 of 42.

**Name of Test:** Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

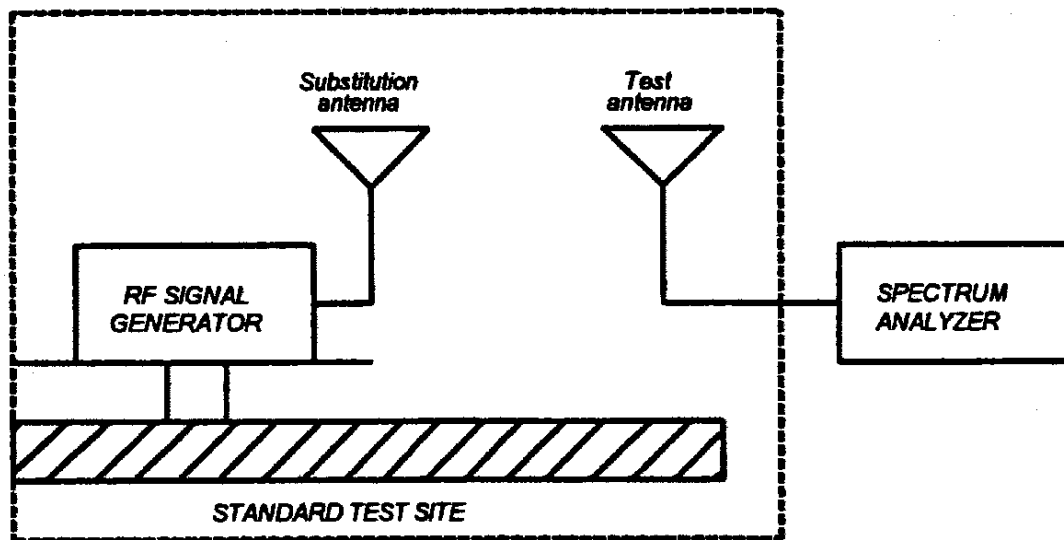

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Page Number 17 of 42.

**Name of Test:** Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

$$\text{Radiated spurious emissions dB} = 10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l)}$$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

**Test Equipment:**

	Asset	Description	s/n	Cycle	Last Cal
<b>Transducer</b>					
	i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-03
X	i00089	April 2001 200MHz-1GHz	001500	12 mo.	Sep-03
X	i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Jan-03
<b>Amplifier</b>					
X	i00028	HP 8449A	2749A00121	12 mo.	May-03
<b>Spectrum Analyzer</b>					
X	i00029	HP 8563E	3213A00104	12 mo.	May-03
X	i00033	HP 85462A	3625A00357	12 mo.	Aug-03
<b>Substitution Generator</b>					
X	i00067	HP 8920A Communication TS	3345U01242	12 mo.	Oct-03
	i00207	HP 8753D Network Analyzer	3410A08514	12 mo.	Jul-03

**Microphone, Antenna Port, and Cabling**

Microphone	<u>Yes</u>	Cable Length	<u>1.0</u> Meters	Antenna Gain	<u>0 dBd</u>
Antenna Port Terminated	<u>Yes</u>	Load	<u>N/A</u>		
All Ports Terminated by Load	<u>Yes</u>	Peripheral	<u>Yes</u>		

Page Number 18 of 42.

**Name of Test:** Field Strength of Spurious Radiation


g03b0105: 2003-Nov-11 Tue 14:27:00

STATE: 2:High Power

Ambient Temperature: 22° C +/- 3° C

Frequency Tuned, MHz	Frequency Emission, MHz	ERP, dBm	ERP, dBc
136.100000	272.198800	-33.2	≤ -70.7
136.100000	408.298800	-44.8	≤ -70.7
136.100000	544.398800	-50.1	≤ -70.7
136.100000	680.498800	-50	≤ -70.7
136.100000	816.617000	-54.2	≤ -70.7
136.100000	952.700130	-64.3	≤ -70.7
136.100000	1088.799500	-58.9	≤ -70.7
136.100000	1224.897630	-61.7	≤ -70.7
136.100000	1361.001000	-64	≤ -70.7

Performed by:



Daniel M. Dillon, Test Engineer

Page Number 19 of 42.

**Name of Test:** Emission Masks (Occupied Bandwidth)

**Specification:** 47 CFR 2.1049(c)(1)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

**Test Equipment:** As per previous page

### Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5/\pm 1.25$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. Measurement Results: Attached




Page Number 20 of 42.

**Name of Test:** Emission Masks (Occupied Bandwidth)

g03b0093: 2003-Nov-06 Thu 10:34:00

State: 1:Low Power

Ambient Temperature: 22° C +/- 3° C

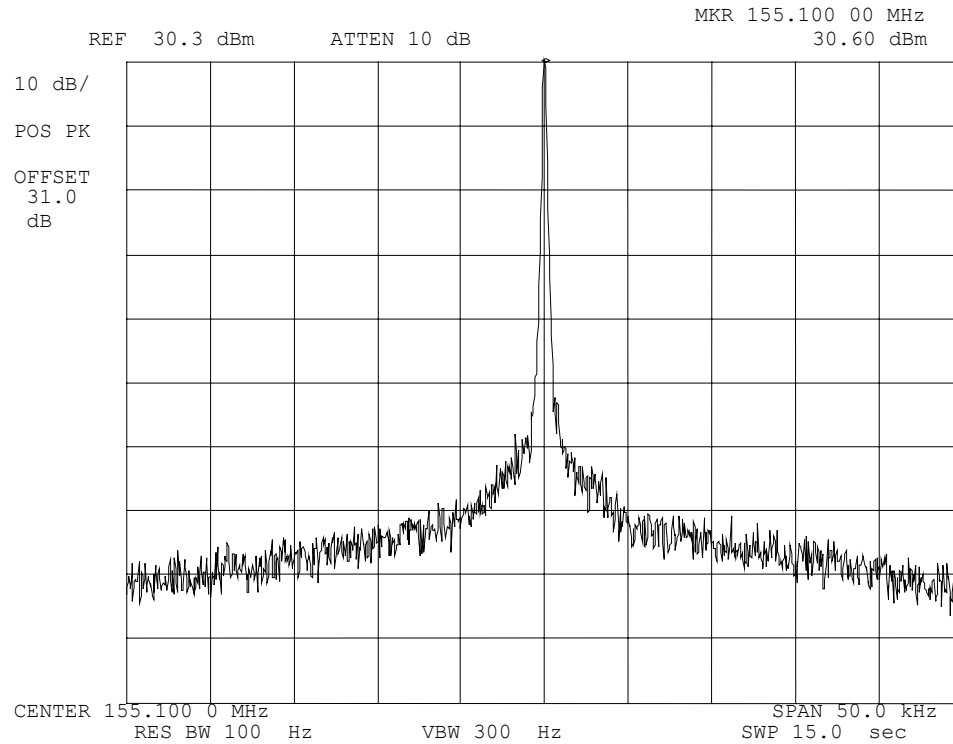Power:  
Modulation:LOW  
NONE

Performed by:

Daniel M. Dillon, Test Engineer

Page Number


21 of 42.

**Name of Test:** Emission Masks (Occupied Bandwidth)

g03b0094: 2003-Nov-06 Thu 10:38:00

State: 1:Low Power

Ambient Temperature: 22° C +/- 3° C

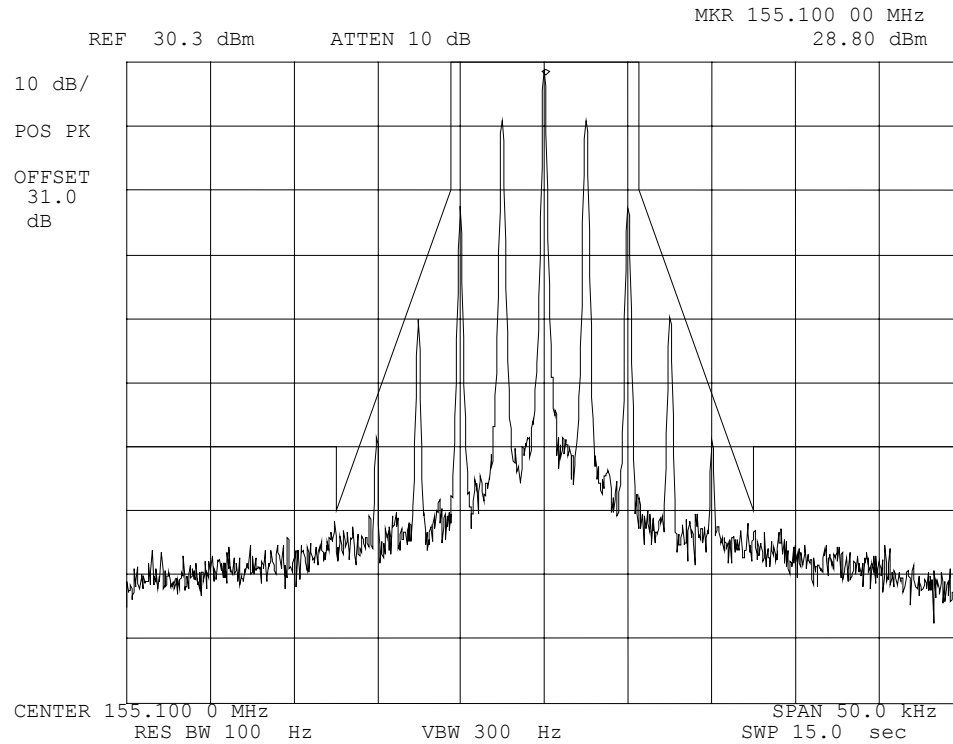

Power:

LOW

Modulation:

VOICE: 2500 Hz SINE WAVE

MASK: D, VHF/UHF 12.5kHz BW

Performed by:

Daniel M. Dillon, Test Engineer


Page Number 22 of 42.

**Name of Test:** Emission Masks (Occupied Bandwidth)

g03b0091: 2003-Nov-06 Thu 10:22:00

State: 2:High Power

Ambient Temperature: 22° C +/- 3° C

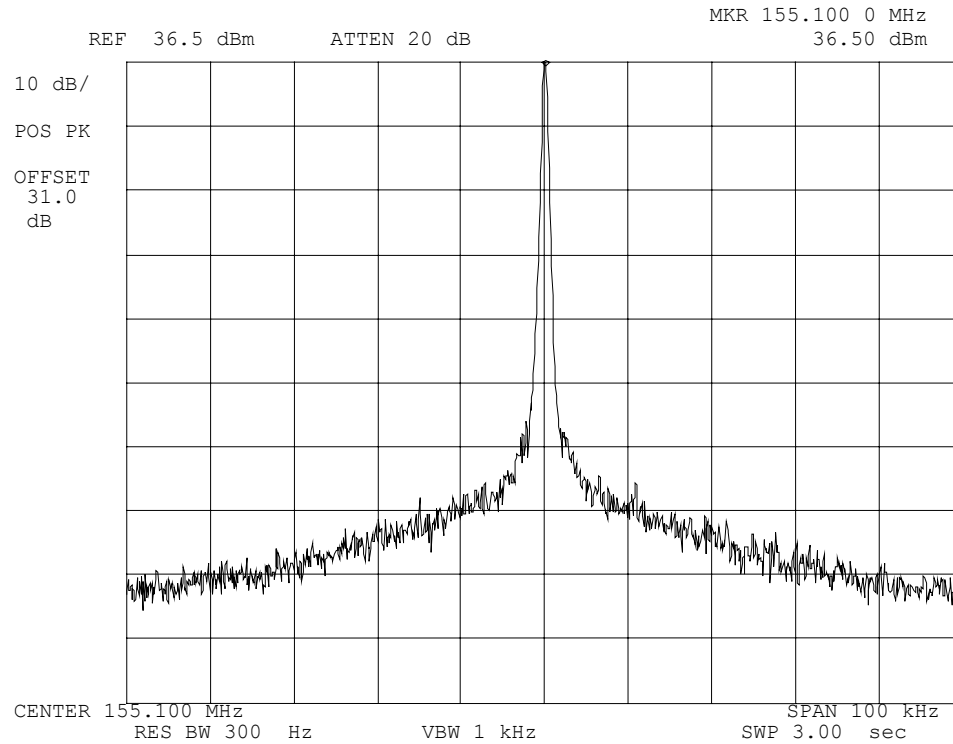

Power:

HIGH

Modulation:

NONE

Performed by:

Daniel M. Dillon, Test Engineer


Page Number 23 of 42.

**Name of Test:** Emission Masks (Occupied Bandwidth)

g03b0092: 2003-Nov-06 Thu 10:30:00

State: 2:High Power

Ambient Temperature: 22° C +/- 3° C

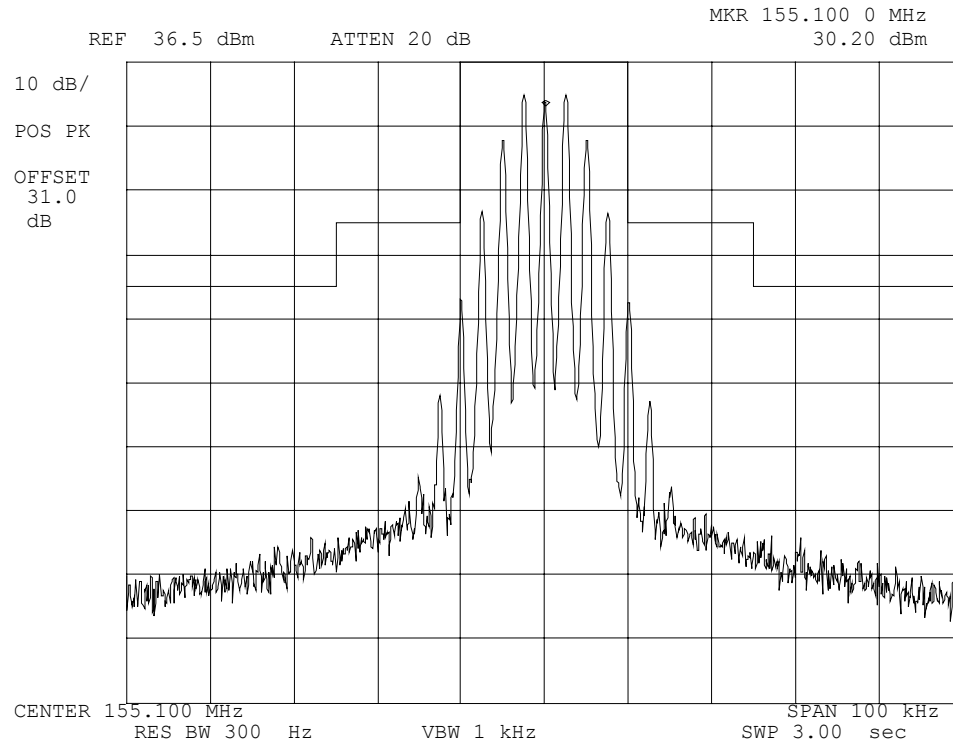

Power:  
Modulation:

HIGH  
VOICE: 2500 Hz SINE WAVE  
MASK: B, VHF/UHF 25kHz, w/LPF

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 24 of 42.

**Name of Test:** Transient Frequency Behavior  
**Specification:** 47 CFR 90.214  
**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.19

**Test Equipment:** As per attached page

### Measurement Procedure


- A) The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
- B) The transmitter was turned on.
- C) Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded.
- D) The transmitter was turned off.
- E) An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step C) above, measured at the output of the combiner. This level was then fixed for the remainder of the test.
- F) The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
- G) The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded.
- H) The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

Performed by:



Daniel M. Dillon, Test Engineer

Transient Frequency Behavior

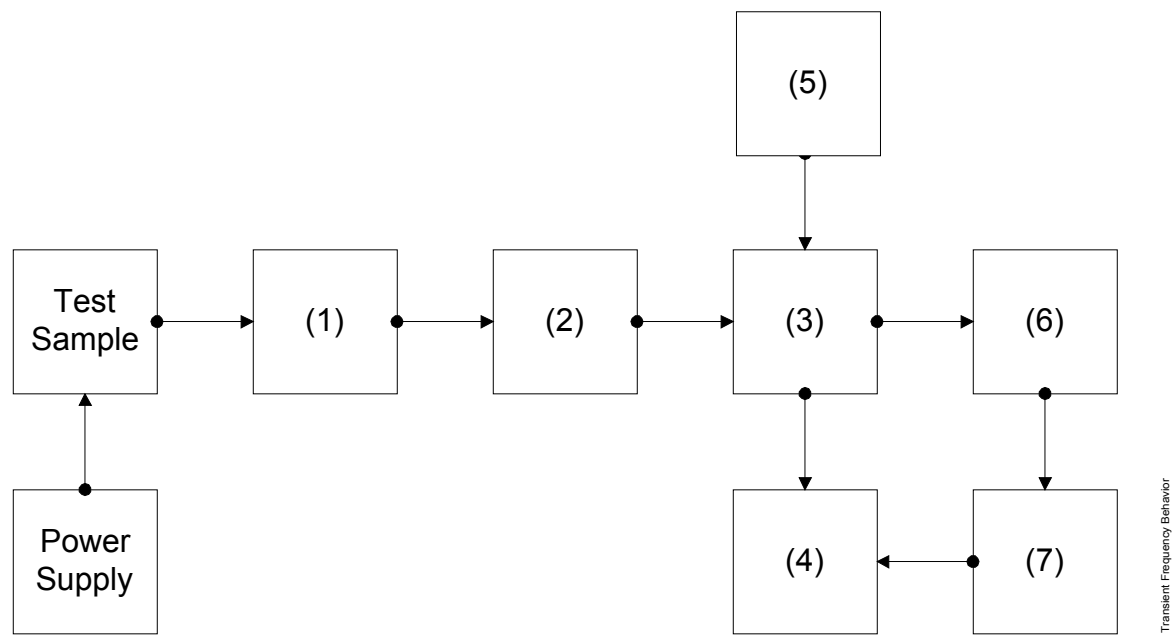

Asset	Description	s/n
(1) <b>Attenuator</b>	(Removed after 1st step)	
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
(2) <b>Attenuator</b>		
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(3) <b>Combiner</b>		
X i00154	4 x 25 $\Omega$ Combiner	154
(4) <b>Crystal Decoder</b>		
X i00159	HP 8470B Crystal Detector	1822A10054
(5) <b>RF Signal Generator</b>		
X i00067	HP 8920A Communication TS	3345U01242
(6) <b>Modulation Analyzer</b>		
X i00020	HP 8901A Modulation Meter	2105A01087
(7) <b>Oscilloscope</b>		
X i00030	HP 54502A Digital Oscilloscope	2927A00209

Page Number


26 of 42.

**Name of Test:** Transient Frequency Behavior

g03b0097: 2003-Nov-06 Thu 13:17:00

State: 0:General

Ambient Temperature: 22° C +/- 3° C

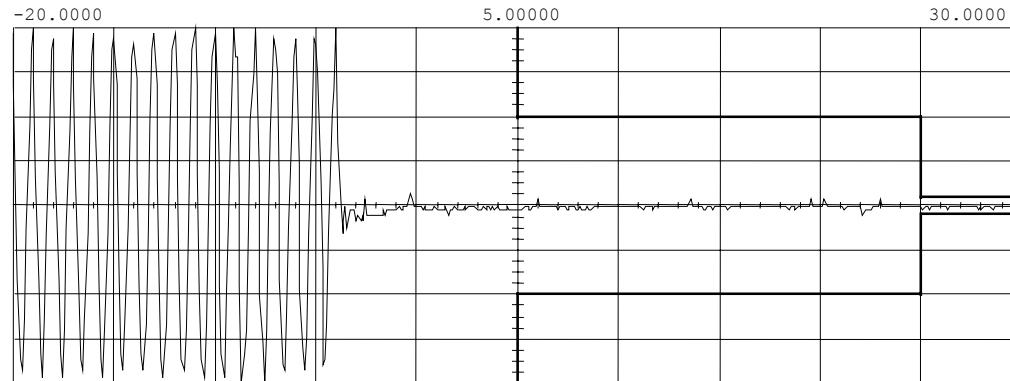

Main	Timebase	Delay/Pos	Left	Measurements
-	5.00 ms/div	-20.0000 ms		V p-p (c1) = 31.750 mV
				frequency (c1) = 1.00200 kHz
Channel 1	Sensitivity	Offset	Probe	
	127 mV/div	0.00000 V	1.000 :1	
Trigger mode :				
On Negative Edge Of				
Trigger				
- Chan2 = -950.000 mV (noise)				
Holdoff = -40.000				


Power:  
Modulation:  
Description:

n/a  
Ref Gen=25 kHz Deviation  
CARRIER ON TIME

Performed by:

Daniel M. Dillon, Test Engineer

**Name of Test:** Transient Frequency Behavior  
g03b0098: 2003-Nov-06 Thu 13:22:00  
State: 0:General Ambient Temperature: 22° C +/- 3° C

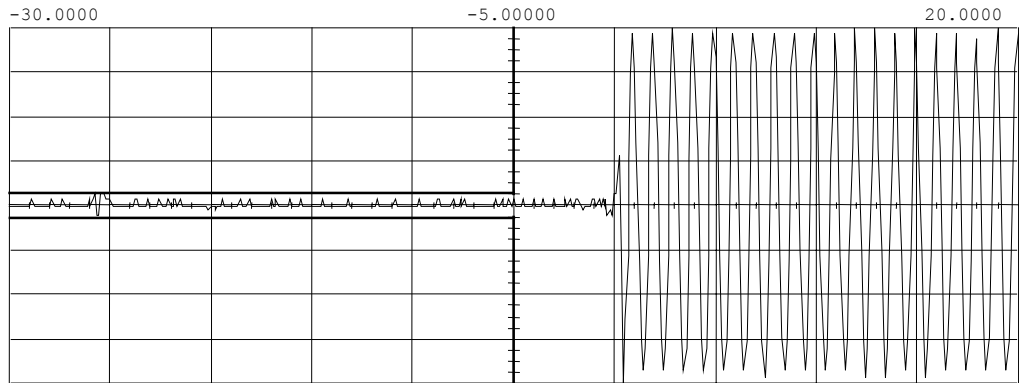

Main	Timebase	Delay/Pos	Right	Measurements
-	5.00 ms/div	20.0000 ms		V p-p (c1) = 127.000 mV
				frequency (c1) = 1.00200 kHz
Channel 1	Sensitivity	Offset	Probe	
	127 mV/div	0.00000 V	1.000 :1	
Trigger mode :				
On Positive Edge Of				
Trigger				
- Chan2 = -100.000 mV (noise				
Holdoff = -40.000				


Power:	n/a
Modulation:	Ref Gen=25 kHz Deviation
Description:	CARRIER OFF TIME

Performed by:

Daniel M. Dillon, Test Engineer



**Name of Test:** Transient Frequency Behavior  
g03b0099: 2003-Nov-06 Thu 13:33:00  
State: 0:General Ambient Temperature: 22° C +/- 3° C

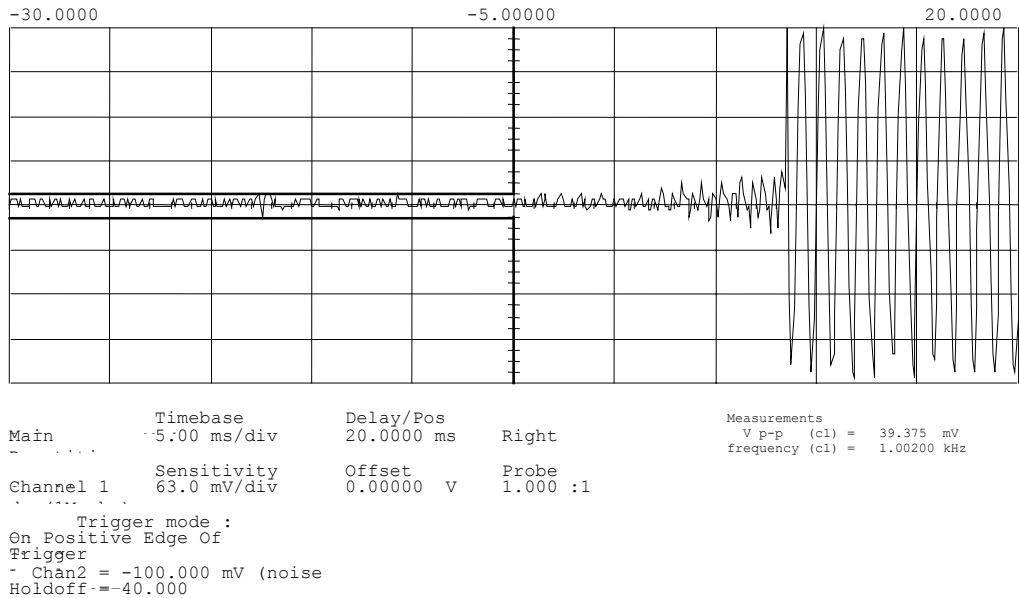

Power: n/a  
Modulation: Ref Gen=12.5 kHz Deviation  
Description: CARRIER OFF TIME

Performed by:

Daniel M. Dillon, Test Engineer

Page Number


29 of 42.

**Name of Test:** Transient Frequency Behavior

g03b0100: 2003-Nov-06 Thu 13:35:00

State: 0:General

Ambient Temperature: 22° C +/- 3° C

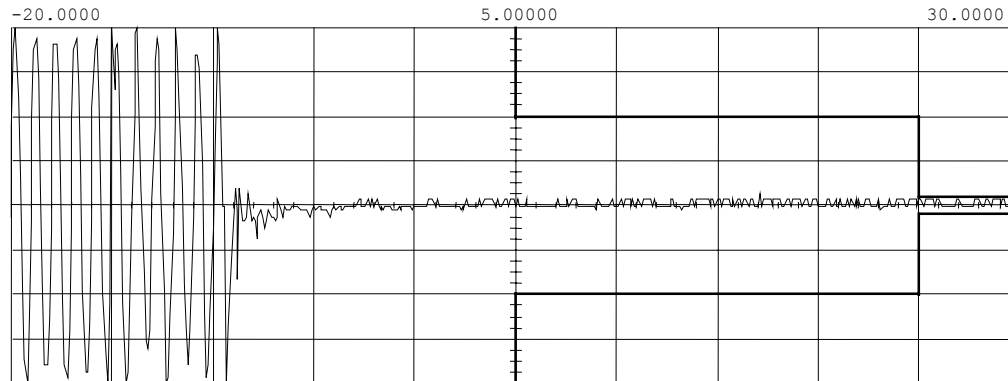

Main Timebase Delay/Pos  
5.00 ms/div -20.0000 ms Left  
Channel 1 Sensitivity Offset Probe  
63.0 mV/div 0.00000 V 1.000 :1  
Trigger mode :  
On Negative Edge Of  
Trigger  
Chan2 = -450.000 mV (noise)  
Holdoff = -40.000

Measurements  
V p-p (c1) = 39.375 mV  
frequency (c1) = 1.00200 kHz

Power:  
Modulation:  
Description:

n/a  
Ref Gen=12.5 kHz Deviation  
CARRIER ON TIME

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 30 of 42.

**Name of Test:** Audio Low Pass Filter (Voice Input)

**Specification:** 47 CFR 2.1047(a)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.15


**Test Equipment:** As per attached page

### **Measurement Procedure**

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. Measurement Results: Attached

Transmitter Test Set-Up

- Test A. Modulation Capability/Distortion
- Test B. Audio Frequency Response
- Test C. Hum and Noise Level
- Test D. Response of Low Pass Filter
- Test E. Modulation Limiting

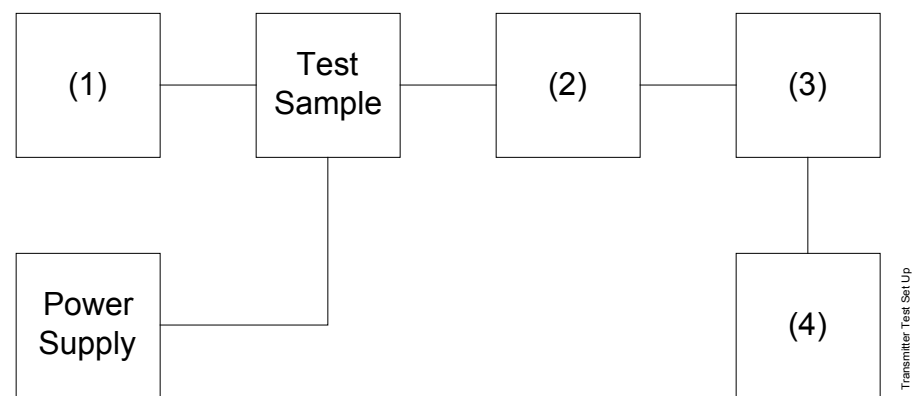

Asset	Description	s/n
(1) <b>Audio Oscillator</b>		
X i00002	HP 3336B Synthesizer / Level Gen.	1931A01465
(2) <b>Coaxial Attenuator</b>		
i00122/3	NARDA 766 (10dB)10	7802 or 7802A
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
(3) <b>Modulation Analyzer</b>		
X i00020	HP 8901A Modulation Meter	2105A01087
(4) <b>Audio Analyzer</b>		
X i00001	HP 3586B Selective Level Meter	1928A01360

Page Number


32 of 42.

**Name of Test:** Audio Low Pass Filter (Voice Input)

g03b0009: 2003-Nov-06 Thu 14:04:00

State: 0:General

Ambient Temperature: 22° C +/- 3° C

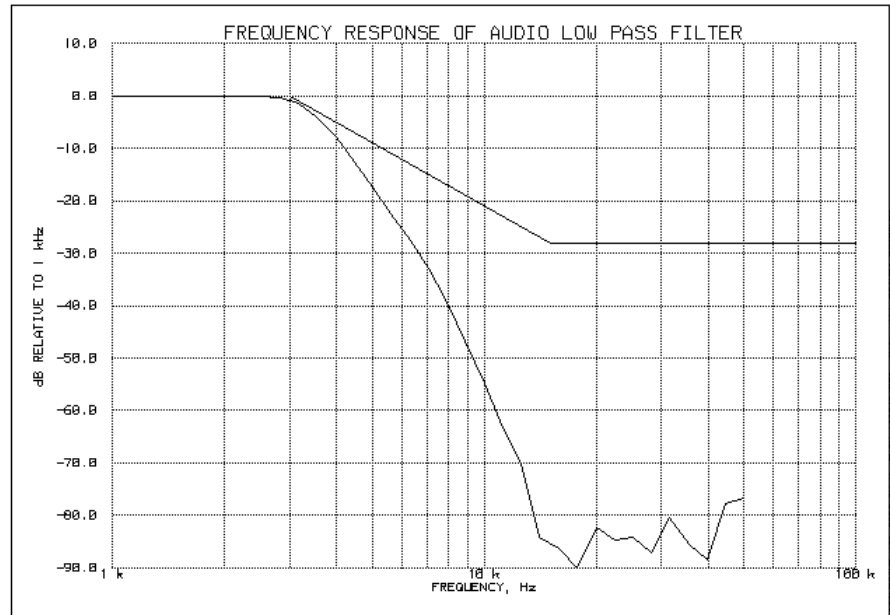

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 33 of 42.

**Name of Test:** Audio Frequency Response

**Specification:** 47 CFR 2.1047(a)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

**Test Equipment:** As per previous page

### **Measurement Procedure**

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. Measurement Results: Attached


Page Number 34 of 42.

**Name of Test:** Audio Frequency Response

g03b0010: 2003-Nov-06 Thu 14:11:00

State: 0:General

Ambient Temperature: 22° C +/- 3° C

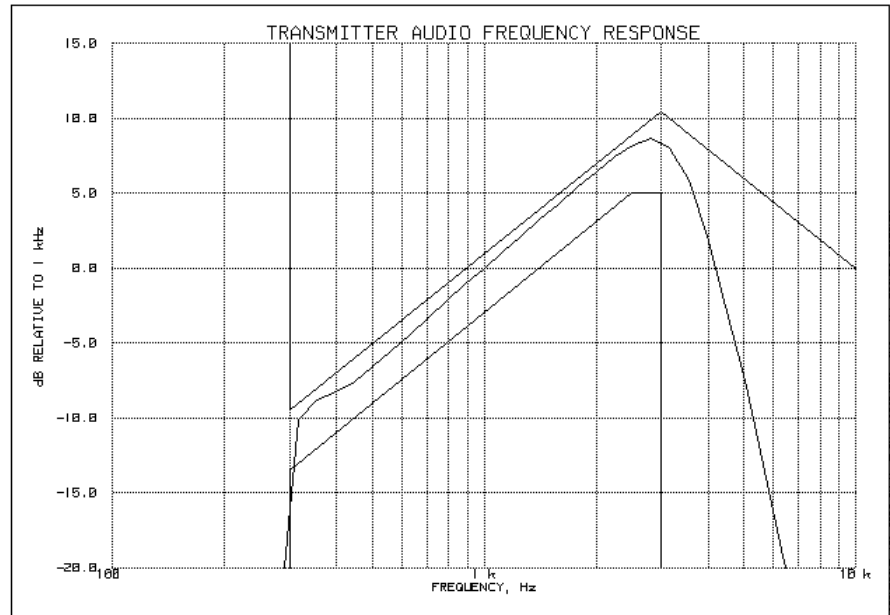

Frequency of Maximum Audio Response, Hz = 2820

Additional points:

Frequency, Hz	Level, dB
300	-10.38
20000	-33.83
30000	-33.63
50000	-33.45

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 35 of 42.

**Name of Test:** Modulation Limiting

**Specification:** 47 CFR 2.1047(b)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.3

**Test Equipment:** As per previous page

### **Measurement Procedure**

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation ( $\pm 1.5$  kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. Measurement Results: Attached




Page Number

36 of 42.


**Name of Test:** Modulation Limiting  
g03b0011: 2003-Nov-06 Thu 14:17:00  
State: 0:General

Ambient Temperature: 22° C +/- 3° C

Positive  
Peaks:

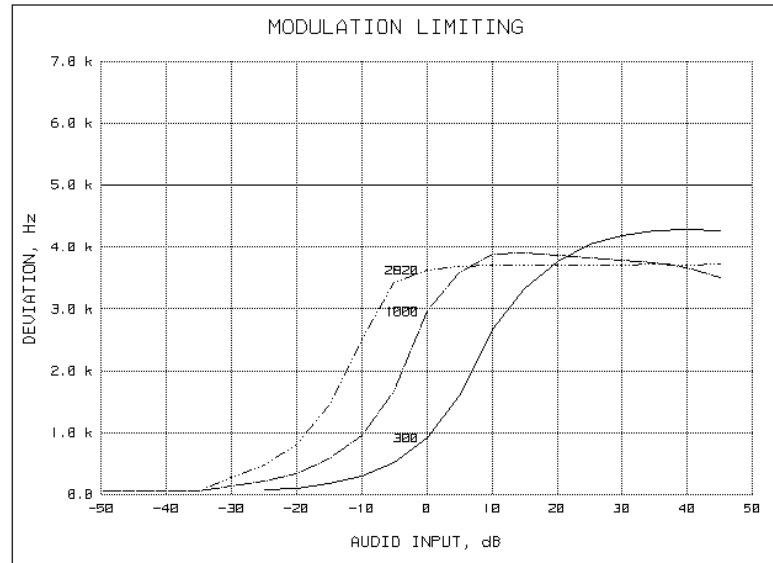

Negative  
Peaks:

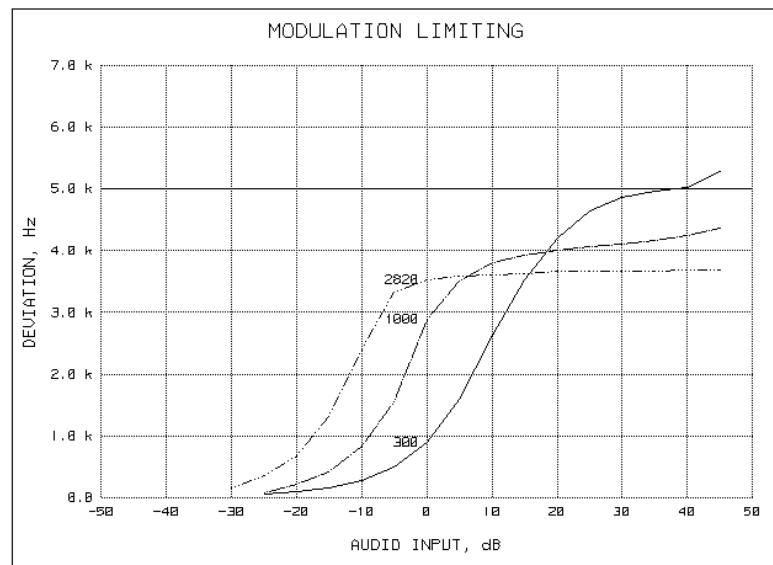

Performed by:

Daniel M. Dillon, Test Engineer


Page Number

37 of 42.


**Name of Test:** Modulation Limiting  
g03b0012: 2003-Nov-06 Thu 14:22:00  
State: 0:General

Ambient Temperature: 22° C +/- 3° C

Positive  
Peaks:

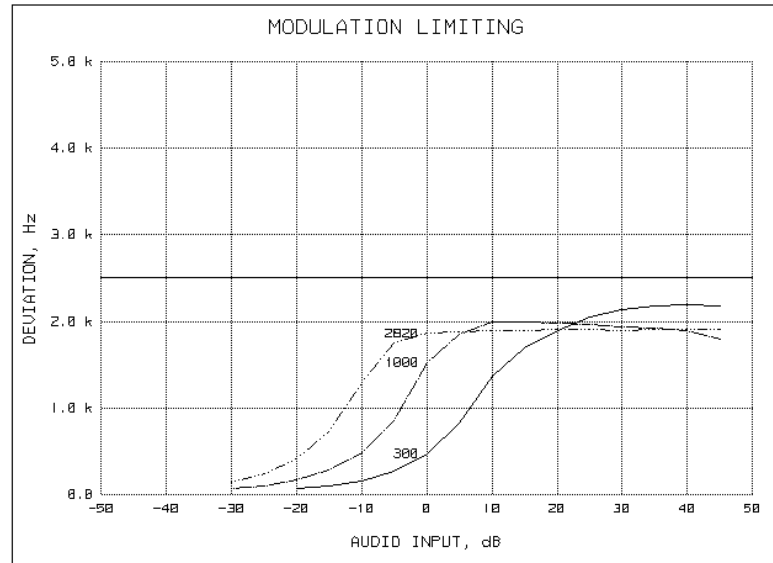

Negative  
Peaks:

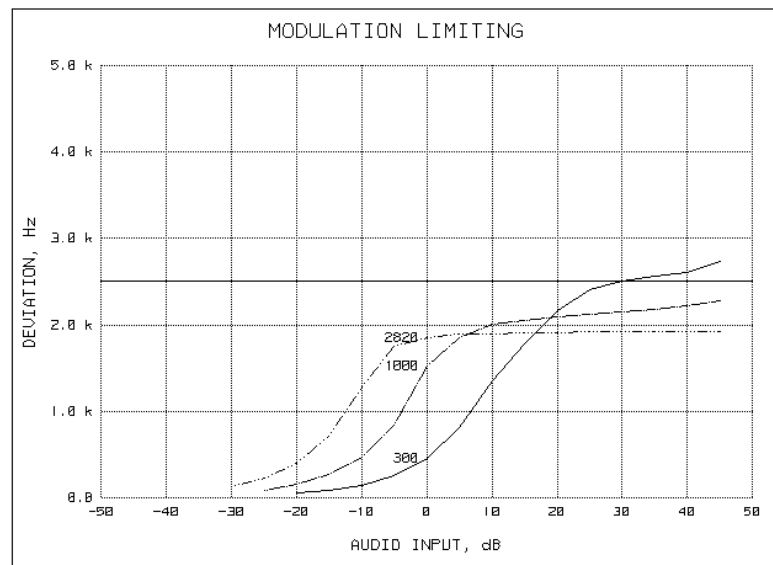

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 38 of 42.

**Name of Test:** Frequency Stability (Temperature Variation)

**Specification:** 47 CFR 2.1055(a)(1)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

**Test Conditions:** As Indicated


**Test Equipment:** As per previous page

### **Measurement Procedure**

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Measurement Results: Attached

Transmitter Test Set-Up

Frequency Stability: Temperature Variation  
Frequency Stability: Voltage Variation

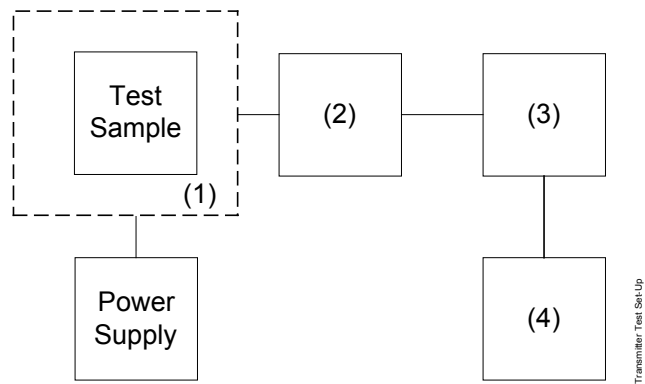

Asset	Description	s/n
(1) <b>Temperature, Humidity, Vibration</b>		
X i00027	Tenney Temp. Chamber	9083-765-234
(2) <b>Coaxial Attenuator</b>		
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(3) <b>RF Power</b>		
X i00067	HP 8920A Communications TS	3345U01242
(4) <b>Frequency Counter</b>		
X i00067	HP 8920A Communications TS	3345U01242

Page Number


40 of 42.

**Name of Test:** Frequency Stability (Temperature Variation)

g03b0057: 2003-Nov-19 Wed 08:07:42

State: 0:General

Ambient Temperature: 22° C +/- 3° C

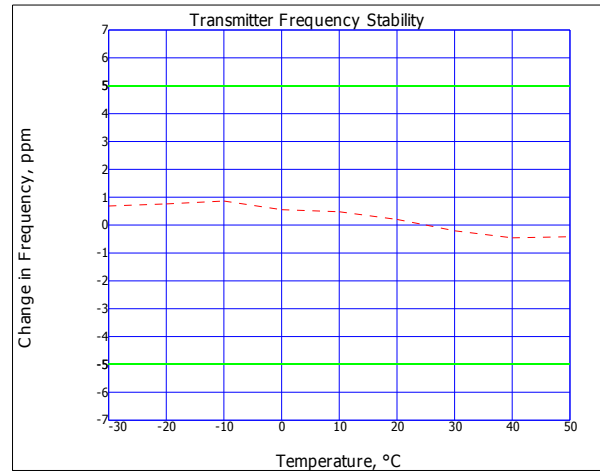

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 41 of 42.

**Name of Test:** Frequency Stability (Voltage Variation)

**Specification:** 47 CFR 2.1055(d)(1)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

**Test Equipment:** As per previous page

### Measurement Procedure

1. The EUT was placed in a temperature chamber at  $25 \pm 5^\circ\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

**Results:** Frequency Stability (Voltage Variation)

g03b0101: 2003-Nov-06 Thu 13:51:34

State: 0:General

Ambient Temperature:  $22^\circ\text{C} \pm 3^\circ\text{C}$

Limit, ppm = 5  
 Limit, Hz = 776  
 Battery End Point (Voltage) = 6.2

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
115	8.6	155.099890	110	.71
100	7.5	155.099890	110	.71
85	6.4	155.099890	110	.71
83	6.2	155.099890	110	.71

Performed by:



Daniel M. Dillon, Test Engineer

Page Number 42 of 42.

**Name of Test:** Necessary Bandwidth and Emission Bandwidth

**Specification:** 47 CFR 2.202(g)

Modulation = 16K0F3E

**Necessary Bandwidth Calculation:**

Maximum Modulation (M), kHz	= 3
Maximum Deviation (D), kHz	= 5
Constant Factor (K)	= 1
Necessary Bandwidth ( $B_N$ ), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 16.0

Modulation = 11K0F3E

**Necessary Bandwidth Calculation:**

Maximum Modulation (M), kHz	= 3
Maximum Deviation (D), kHz	= 2.5
Constant Factor (K)	= 1
Necessary Bandwidth ( $B_N$ ), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 11.0

Performed by:



Daniel M. Dillon, Test Engineer

END OF TEST REPORT

**Testimonial  
and  
Statement of Certification**

**This is to Certify:**

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:

A handwritten signature in black ink, appearing to read "M. Flom P. Eng.", with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.