





WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

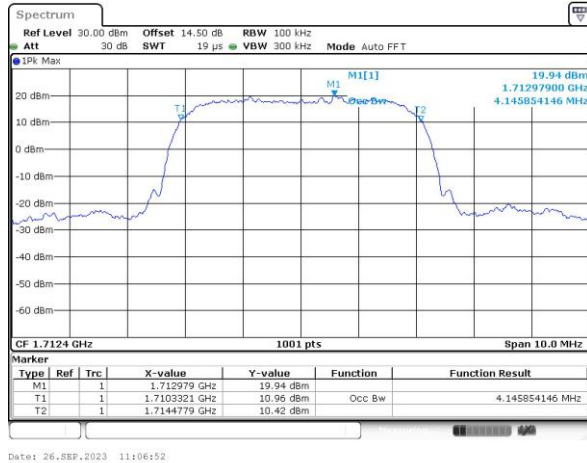

Middle Channel

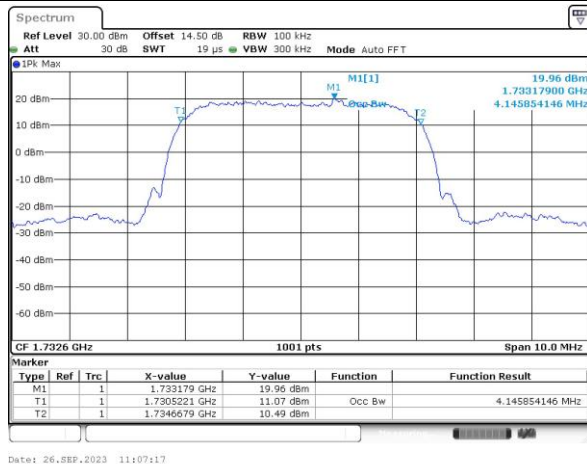

Highest Channel

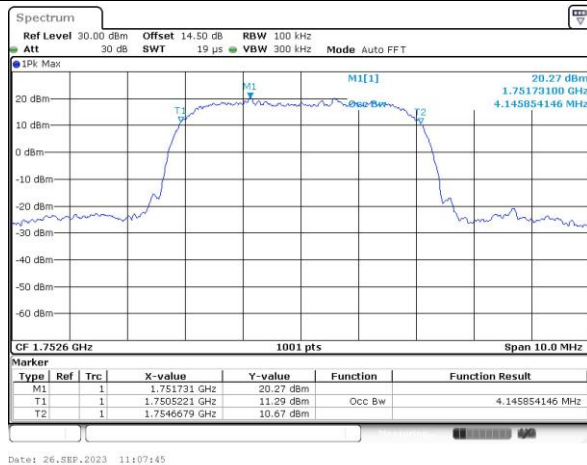




Conducted Band Edge

WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

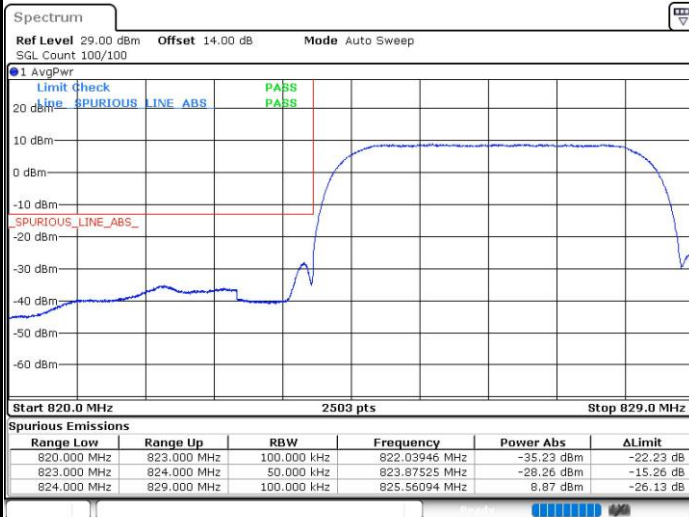


Highest Band Edge




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

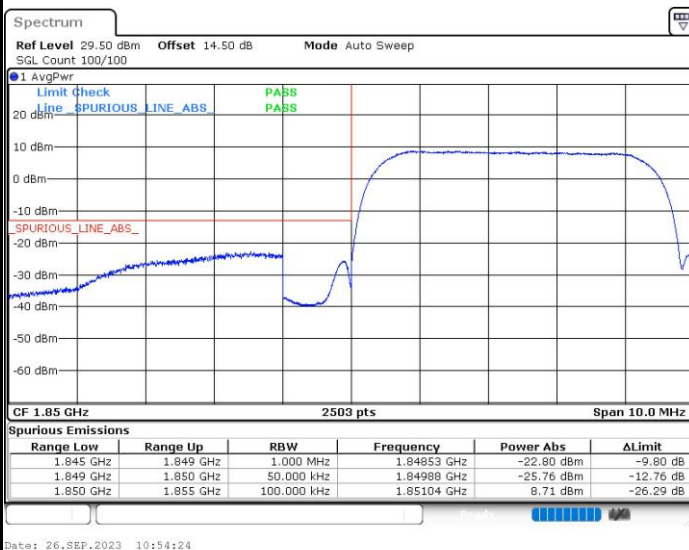


Highest Band Edge

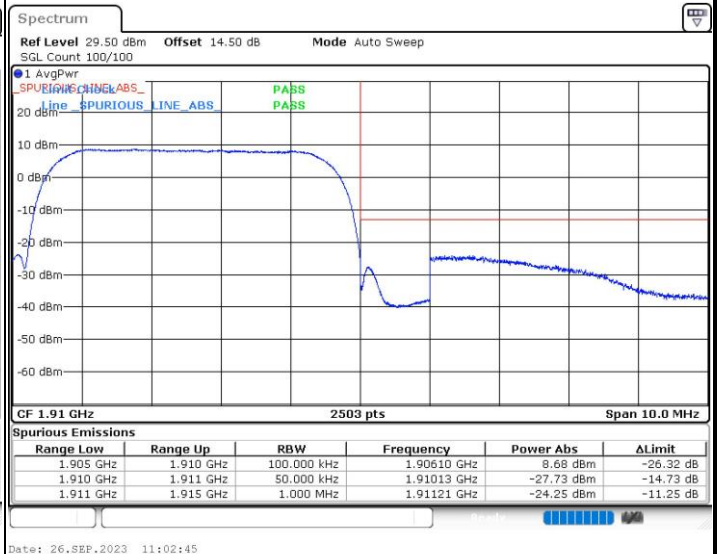




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

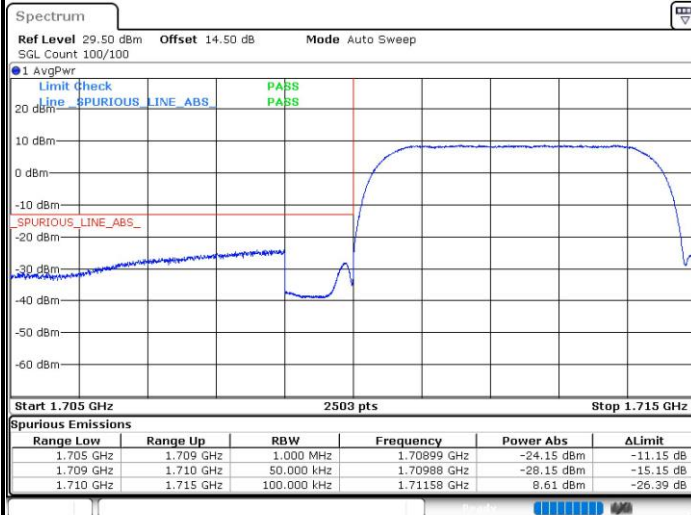

Highest Band Edge

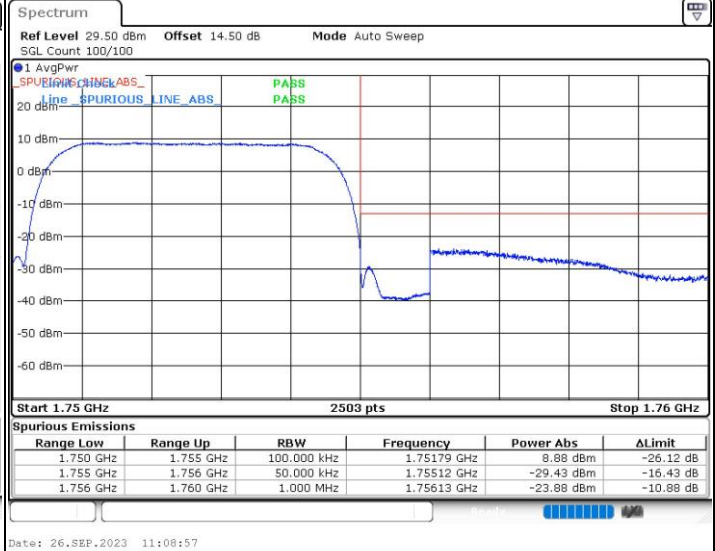




Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

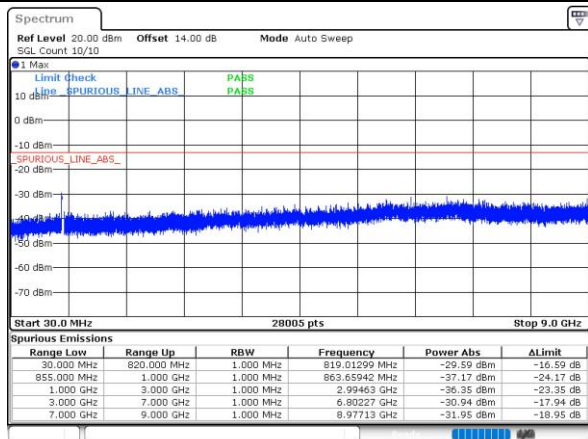

Date: 26.SEP.2023 11:21:43


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

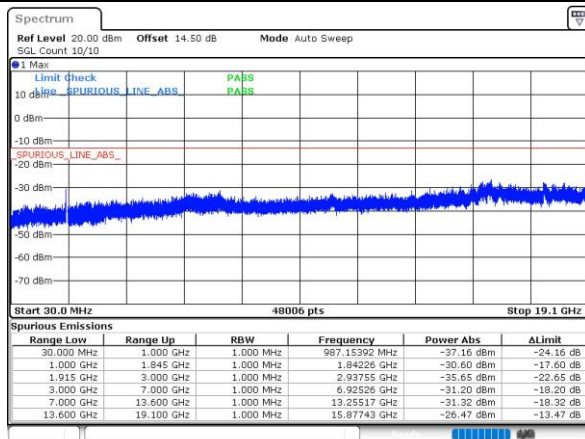


Date: 26.SEP.2023 10:58:05

Middle Channel

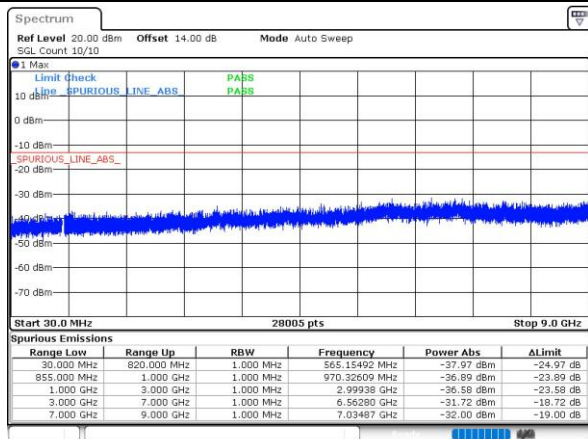


Date: 26.SEP.2023 11:22:06

Middle Channel

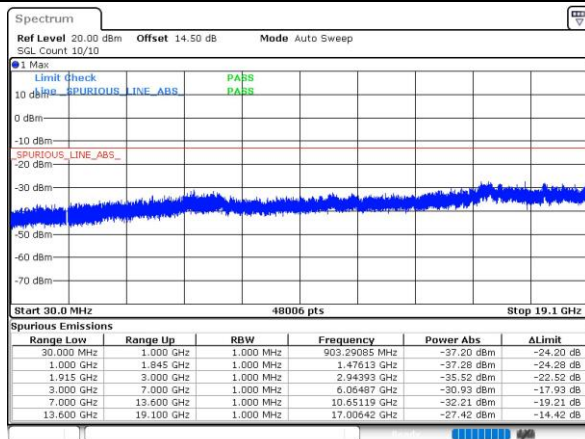


Date: 26.SEP.2023 11:08:53

Highest Channel

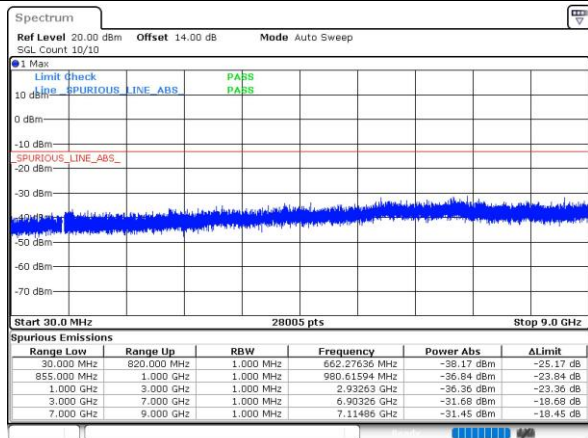

Date: 26.SEP.2023 11:22:29

Highest Channel

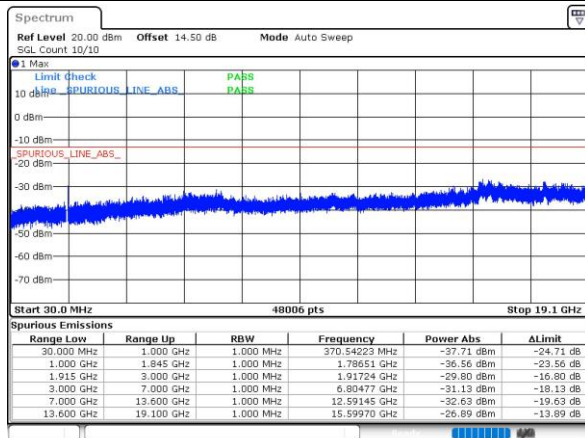


Date: 26.SEP.2023 11:04:00




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

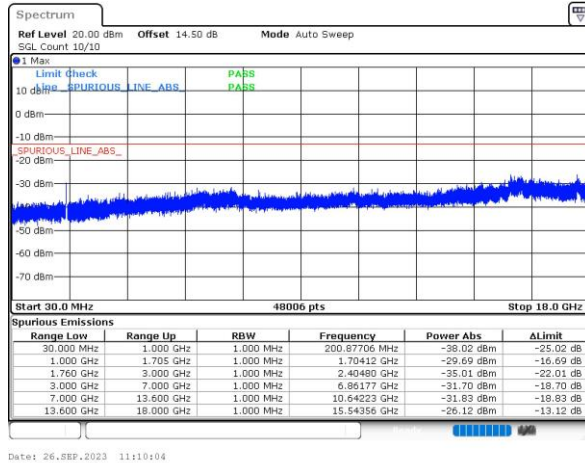

Middle Channel

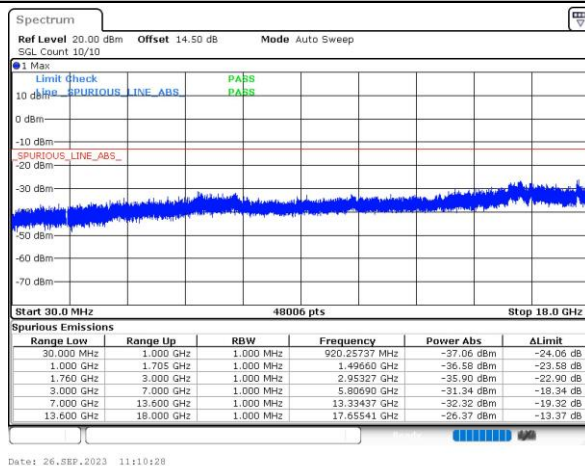

Highest Channel

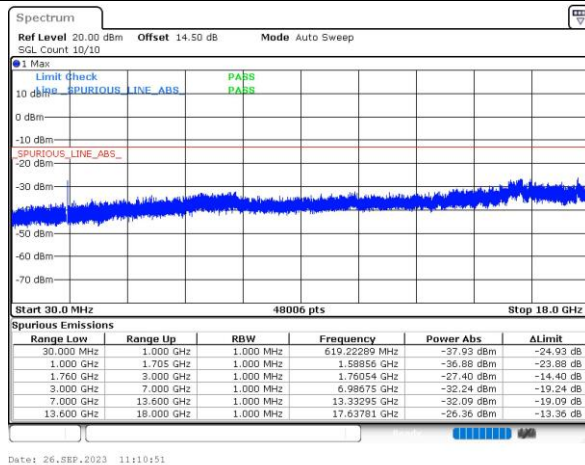

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0006	PASS
40	Normal Voltage	0.0003	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0003	
0	Normal Voltage	0.0004	
-10	Normal Voltage	0.0008	
-20	Normal Voltage	0.0009	
-30	Normal Voltage	0.0010	
20	Maximum Voltage	0.0005	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0002	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0007	PASS
40	Normal Voltage	0.0003	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0003	
0	Normal Voltage	0.0005	
-10	Normal Voltage	0.0009	
-20	Normal Voltage	0.0010	
-30	Normal Voltage	0.0010	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0002	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0014	PASS
40	Normal Voltage	0.0007	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0006	
0	Normal Voltage	0.0010	
-10	Normal Voltage	0.0018	
-20	Normal Voltage	0.0020	
-30	Normal Voltage	0.0022	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0005	

Note:

1. Normal Voltage = 3.89V. ; Battery End Point (BEP) = 3.45 V. ; Maximum Voltage =4.45 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Jia Kuang	Temperature :	22~25°C
		Relative Humidity :	48~52%

Note: RSE Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test.

GSM850 (GPRS 1 Tx slots) Ant.0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-63.02	-13	-50.02	-70.53	-66.27	4.00	9.40	H
	2509.2	-63.13	-13	-50.13	-75.41	-66.70	4.88	10.60	H
	3345.6	-64.31	-13	-51.31	-79.39	-69.24	5.52	12.60	H
	1672.8	-65.65	-13	-52.65	-73.35	-68.90	4.00	9.40	V
	2509.2	-64.54	-13	-51.54	-76.94	-68.11	4.88	10.60	V
	3345.6	-64.17	-13	-51.17	-79.27	-69.10	5.52	12.60	V

GSM850 (EDGE 1 Tx slots) Ant.0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-63.04	-13	-50.04	-70.55	-66.29	4.00	9.40	H
	2509.2	-62.81	-13	-49.81	-75.09	-66.38	4.88	10.60	H
	3345.6	-64.07	-13	-51.07	-79.15	-69.00	5.52	12.60	H
	1672.8	-66.25	-13	-53.25	-73.95	-69.50	4.00	9.40	V
	2509.2	-63.98	-13	-50.98	-76.38	-67.55	4.88	10.60	V
	3345.6	-64.75	-13	-51.75	-79.85	-69.68	5.52	12.60	V

GSM1900 (GPRS 1 Tx slots) Ant.2									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-63.28	-13	-50.28	-79.97	-70.03	5.85	12.60	H
	5640	-60.45	-13	-47.45	-81.29	-66.25	7.30	13.10	H
	7520	-56.52	-13	-43.52	-80.86	-59.67	8.35	11.50	H
	3760	-64.08	-13	-51.08	-80.33	-70.83	5.85	12.60	V
	5640	-61.89	-13	-48.89	-81.52	-67.69	7.30	13.10	V
	7520	-55.50	-13	-42.50	-80.26	-58.65	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE 1 Tx slots) Ant.2

Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-63.29	-13	-50.29	-79.98	-70.04	5.85	12.60	H
	5640	-60.43	-13	-47.43	-81.27	-66.23	7.30	13.10	H
	7520	-55.96	-13	-42.96	-80.30	-59.11	8.35	11.50	H
	3760	-63.96	-13	-50.96	-80.21	-70.71	5.85	12.60	V
	5640	-61.62	-13	-48.62	-81.25	-67.42	7.30	13.10	V
	7520	-55.52	-13	-42.52	-80.28	-58.67	8.35	11.50	V

WCDMA Band V(RMC 12.2Kbps) Ant.0

Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-68.16	-13	-55.16	-75.67	-71.41	4.00	9.40	H
	2509.2	-65.60	-13	-52.60	-77.88	-69.17	4.88	10.60	H
	3345.6	-64.38	-13	-51.38	-79.46	-69.31	5.52	12.60	H
	1672.8	-68.16	-13	-55.16	-75.86	-71.41	4.00	9.40	V
	2509.2	-65.56	-13	-52.56	-77.96	-69.13	4.88	10.60	V
	3345.6	-64.19	-13	-51.19	-79.29	-69.12	5.52	12.60	V

WCDMA Band II(RMC 12.2Kbps) Ant.2

Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-63.26	-13	-50.26	-79.95	-70.01	5.85	12.60	H
	5640	-60.27	-13	-47.27	-81.11	-66.07	7.30	13.10	H
	7520	-55.71	-13	-42.71	-80.05	-58.86	8.35	11.50	H
	3760	-63.85	-13	-50.85	-80.1	-70.60	5.85	12.60	V
	5640	-61.07	-13	-48.07	-80.7	-66.87	7.30	13.10	V
	7520	-55.33	-13	-42.33	-80.09	-58.48	8.35	11.50	V

WCDMA Band IV(RMC 12.2Kbps) Ant.2

Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465.2	-63.96	-13	-50.96	-79.27	-70.81	5.65	12.50	H
	5197.8	-61.42	-13	-48.42	-81.28	-67.09	7.13	12.80	H
	6930.4	-57.18	-13	-44.18	-80.19	-60.58	8.40	11.80	H
	3465.2	-64.13	-13	-51.13	-79.47	-70.98	5.65	12.50	V
	5197.8	-61.40	-13	-48.40	-80.88	-67.07	7.13	12.80	V
	6930.4	-57.23	-13	-44.23	-80.53	-60.63	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.