


Shenzhen Huaxia Testing Technology Co., Ltd.

Report No.: CQASZ20220300464E-01

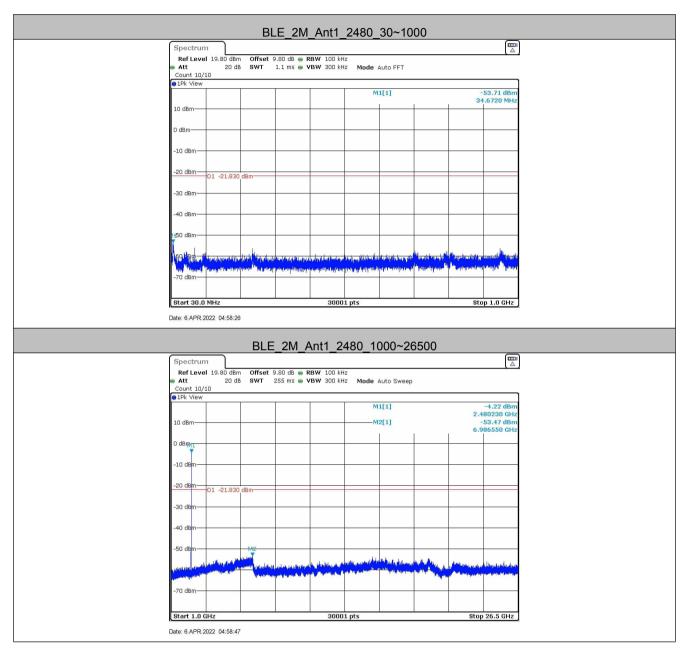

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.




5.8 Radiated Spurious Emission & Restricted bands

5.8.1 Spurious Emissions										
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10 2013									
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)									
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark				
	0.009MHz-0.090MHz F		Peak	10kHz	z 30kHz	Peak				
	0.009MHz-0.090MHz Average		10kHz	30kHz	Average					
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	30kHz	Quasi-peak				
	0.110MHz-0.490MH	z	Peak	10kHz	30kHz	Peak				
	0.110MHz-0.490MH	z	Average	10kHz	30kHz	Average				
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak				
	Above 1GHz		Peak	1MHz	3MHz	Peak				
			Peak	1MHz	10Hz	Average				
Limit:	ll Frequency I		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measuremen distance (m)				
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30				
	1.705MHz-30MHz		30	-	-	30				
	30MHz-88MHz		100	40.0	Quasi-peak	. 3				
	88MHz-216MHz		150	43.5	Quasi-peak	. 3				
	216MHz-960MHz		200	46.0	Quasi-peak	. 3				
	960MHz-1GHz 500		500	54.0	Quasi-peak	. 3				
	Above 1GHz 500 54.0 A				Average	3				
	Note: 15.35(b), Unless otherwise specified, the limit on peak frequency emissions is 20dB above the maximum permitted average em limit applicable to the equipment under test. This peak limit applies to the peak emission level radiated by the device.									





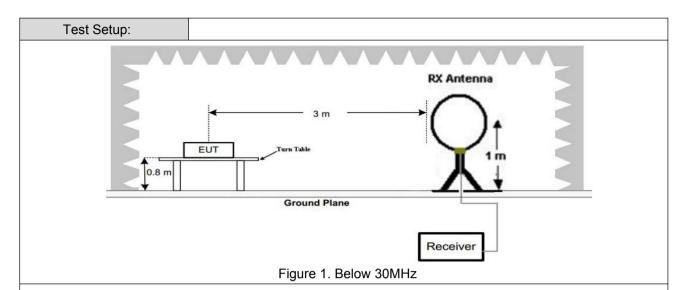

Antenna Tower

AE EUT

Jam

Ground Reference Plane

Test Receiver

Test Receiver

AE EUT

Ground Rafeeros Plane

Test Receiver

Angolar

Controller

Figure 2. 30MHz to 1GHz

Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

Note: For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both




Shenzhen Huaxia Testing Technology Co., Ltd.

	horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	 f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Transmitting mode.
Final Test Mode:	Through Pre-scan, find the 1Mbps of data type and GFSK modulation is the worst case.
	For below 1GHz part, through pre-scan, the worst case is the highest channel.
	Only the worst case is recorded in the report.
Test Results:	Pass






Radiated Emission below 1GHz

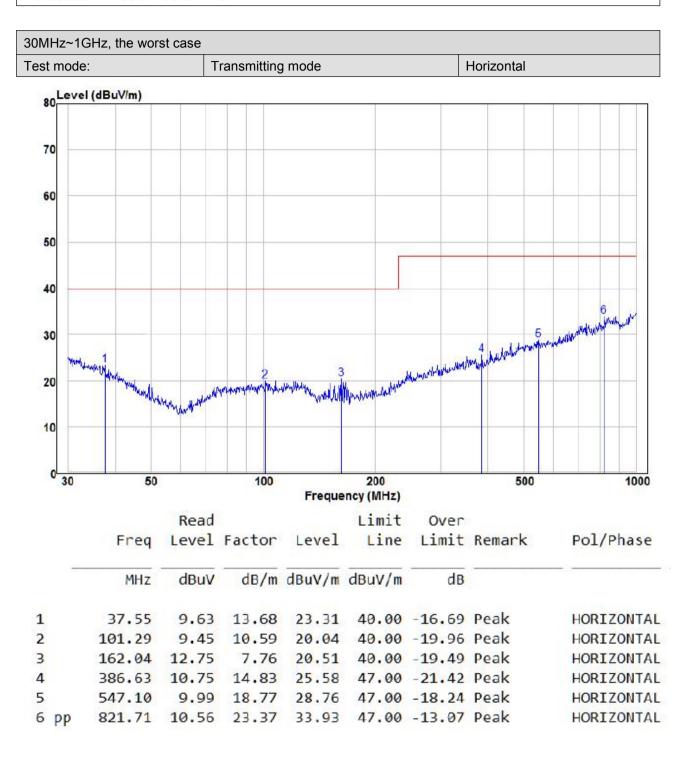



30MHz~1GHz, the worst case					
Test mode:	Transmitting mode	Vertical			

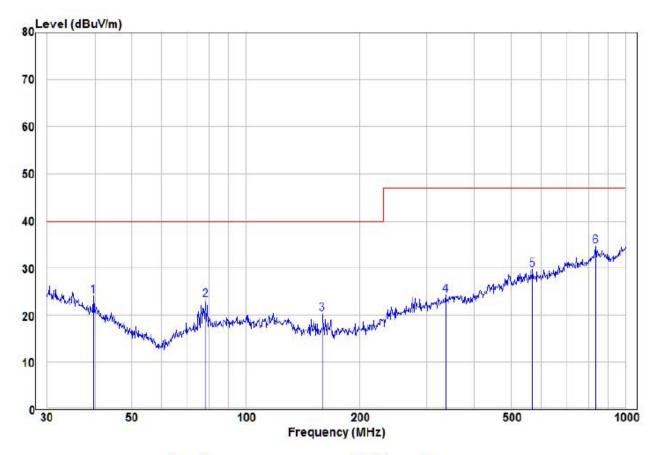

	Freq	Read Level	Factor	Level	Limit Line		Remark	Pol/Phase
-	MHz	dBuV	dB/m	dBuV/m	dBuV/m	——dB		
1	39.71	11.18	12.90	24.08	40.00	-15.92	Peak	VERTICAL
2	78.41	13.60	9.53	23.13	49.00	-16.87	Peak	VERTICAL
3	159.23	12.45	7.84	20.29	40.00	-19.71	Peak	VERTICAL
4	336.04	9.65	14.61	24.26	47.00	-22.74	Peak	VERTICAL
5	570.61	10.66	19.01	29.67	47.00	-17.33	Peak	VERTICAL
6 pp	836.24	10.57	24.12	34.69	47.00	-12.31	Peak	VERTICAL





Transmitter Emission above 1GHz

Worse case m	ode:	GFSK(1Mbp	s)	Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
2390	54.21	-9.2	45.01	74	-28.99	Peak	н
2400	55.22	-9.39	45.83	74	-28.17	Peak	Н
4804	51.93	-4.33	47.60	74	-26.40	Peak	Н
7206	49.41	1.01	50.42	74	-23.58	Peak	Н
2390	53.66	-9.2	44.46	74	-29.54	Peak	V
2400	50.67	-9.39	41.28	74	-32.72	Peak	V
4804	54.68	-4.33	50.35	74	-23.65	Peak	V
7206	50.85	1.01	51.86	74	-22.14	Peak	V

Worse case m	ode:	GFSK(1Mbp	s)	Test chann	est channel:		
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
4880	52.91	-4.11	48.80	74	-25.20	peak	Н
7320	50.29	1.51	51.80	74	-22.20	peak	Н
4880	51.99	-4.11	47.88	74	-26.12	peak	V
7320	49.06	1.51	50.57	74	-23.43	peak	V


Worse case m	ode:	GFSK(1Mbps	s)	Test chann	el:	Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
2483.5	56.54	-9.29	47.25	74	-26.75	Peak	Н
4960	51.86	-4.04	47.82	74	-26.18	Peak	Н
7440	48.31	1.57	49.88	74	-24.12	Peak	Н
2483.5	58.02	-9.29	48.73	74	-25.27	Peak	V
4960	49.81	-4.04	45.77	74	-28.23	Peak	V
7440	49.39	1.57	50.96	74	-23.04	Peak	V


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission



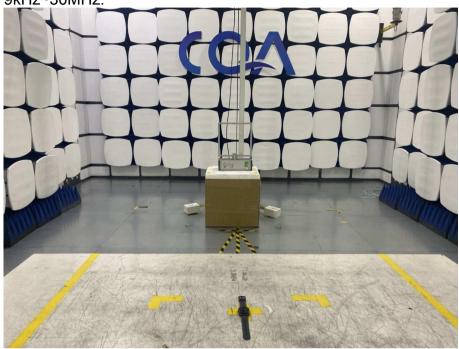

30MHz~1GHz:

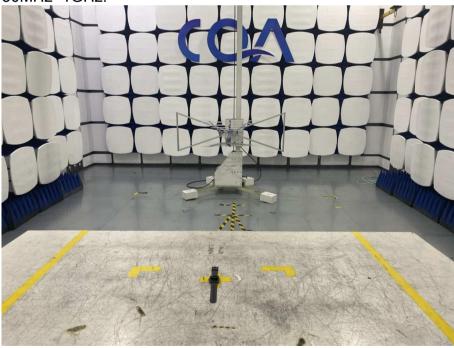



6.2 Conducted Emissions Test Setup



7 Photographs - EUT Constructional Details






























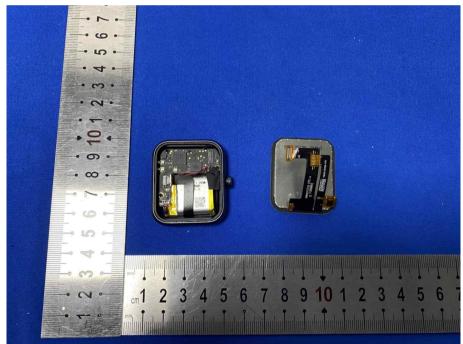






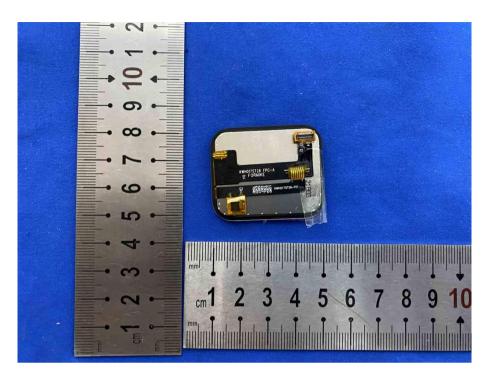


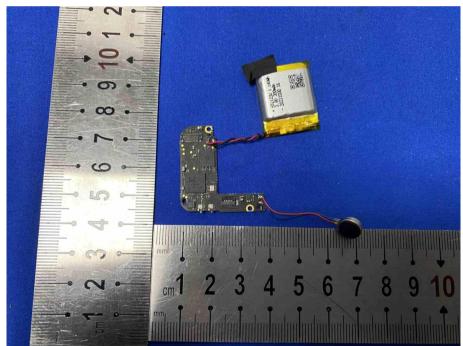






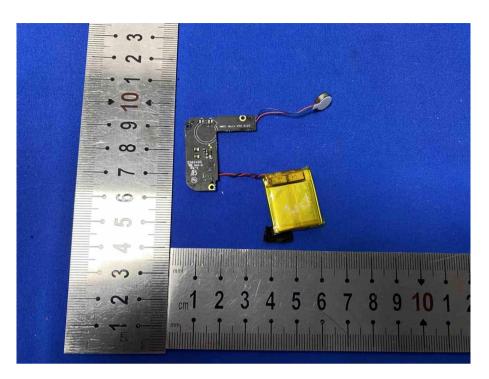

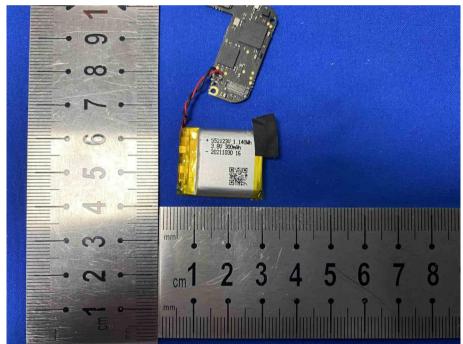





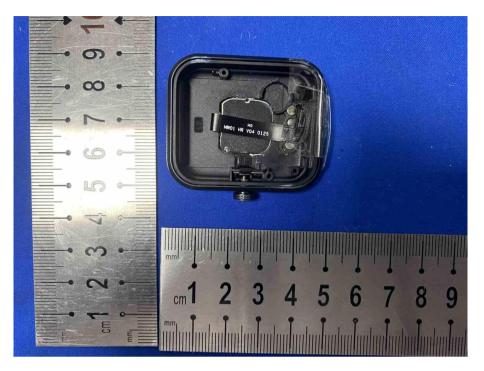



*** END OF REPORT ***