



EMI - TEST REPORT

- FCC 15.247 -

Type / Model Name : WRTZ-2000

Product Description : UHF RFID Reader

Applicant : Checkpoint Sytems

Address : Brentanostr. 27 - 29
D-69434 Hirschhorn

Manufacturer : Checkpoint Systems Inc.

Address : 101 Wolf Drive, Thorofare
New Jersey, USA 08086

Licence holder : Checkpoint Sytems

Address : Brentanostr. 27 - 29
D-69434 Hirschhorn

Test Result according to the standards listed in clause 1 test standards:

POSITIVE

Test Report No. : T39158-00-08HU

28. April 2015

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-01
D-PL-12030-01-02

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>SUMMARY</u>	4
3	<u>EQUIPMENT UNDER TEST</u>	5
3.1	Photo documentation of the EUT – Detailed photos see Attachment A	5
3.2	Test setup	5
3.3	Power supply system utilised	5
3.4	Short description of the EUT	5
4	<u>TEST ENVIRONMENT</u>	7
4.1	Address of the test laboratory	7
4.2	Statement regarding the usage of logos in test reports	7
4.3	Environmental conditions	7
4.4	Statement of the measurement uncertainty	7
4.5	Measurement Protocol for FCC, VCCI and AUSTEL	8
5	<u>TEST CONDITIONS AND RESULTS</u>	9
5.1	Conducted emissions	9
5.2	20 dB bandwidth	17
5.3	Maximum peak conducted output power	21
5.4	Spurious RF conducted emissions	23
5.5	Spurious radiated emissions	29
5.6	Hopping sequence	35
5.7	Equal hopping frequency use	36
5.8	Receiver input bandwidth	36
5.9	Dwell time	37
5.10	Channel separation	40
5.11	Quantity of hopping channels	42
5.12	Antenna application	44
5.13	Maximum permissible exposure (MPE) – See Attachment B	45
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	46

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2014)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart B - Unintentional Radiators (October, 2014)

Part 15, Subpart B, Section 15.107	AC Line conducted emissions,
Part 15, Subpart B, Section 15.109	Radiated emissions, general requirements

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2014)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

Part 1, Subpart I, Section 1.1310	Radiofrequency radiation exposure limits
Part 1, Subpart 2, Section 2.1093	Radiofrequency radiation exposure evaluation: portable device

OET Bulletin 65, 65A, 65B, 65C Edition 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

ANSI C63.10: 2009	Testing Unlicensed Wireless Devices
ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
CISPR 16-4-2: 2003	Uncertainty in EMC measurement
CISPR 22: 2005 EN 55022: 2006	Information technology equipment

2 SUMMARY

GENERAL REMARKS:

The frequency range was scanned from 9 kHz to 10 GHz.

All emissions not reported in this test report were more than 10 dB below the specified limit.

The EuT is a frequency hopping system using 50 channels in the frequency band from 902 to 928 MHz.

The device transmits to each antenna in turn (not all at the same time). This function is controlled via software from the manufacturer and can not be changed from the user.

All radiated tests were performed with the following antenna type and power supply:

- Antenna: PAM915UN1CP01SK110MM
- Power supply: XP Power AEB70US12

This equipment was provided by the manufacturer for testing.

For detailed information about the UHF RFID Reader and the antennas please refer to the user manual.

The EuT is declared as Class B digital device.

It is not possible to set the EuT only in receiving mode.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 10. December 2014

Testing concluded on : 16. March 2015

Checked by:

Tested by:


Klaus Gegenfurtner
Teamleader Radio

Markus Huber

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EUT – Detailed photos see Attachment A

3.2 Test setup

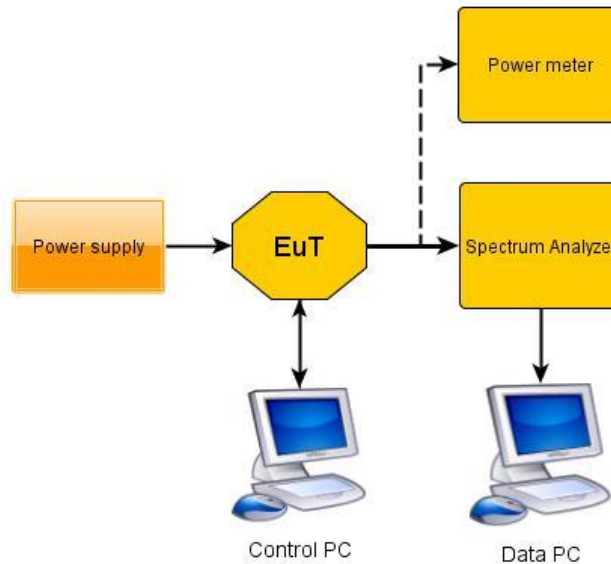

3.3 Power supply system utilised

Power supply voltage: : 100-240 V / 50-60 Hz / 1 ϕ , 12 V DC

3.4 Short description of the EUT

The EuT is a UHF RFID reader system. It can read active and passive Tags in the frequency range from 902 to 928 MHz.

Number of tested samples: 2
Serial number: Prototype (REV00) and 006 (REV02)

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TAG reading mode supplying 30.0 dBm

- Standby mode

-

-

FCC ID: DO4WRTZ2000

EUT configuration:**The following peripheral devices and interface cables were connected during the measurements:**

- | | |
|----------------------------|--|
| - <u>Test software</u> | Model : <u>Supplied by manufacturer</u> |
| - <u>Lap Top</u> | Model : <u>Supplied by CSA Group Bayern GmbH</u> |
| - <u>Antenna</u> | Model : <u>PAM915UN1CP01SK110MM</u> |
| - <u>Power supply</u> | Model : <u>XP Power AEB70US12</u> |
| - _____ | Model : _____ |
| - _____ | Model : _____ |
| - _____ | Model : _____ |
| - _____ | Model : _____ |
| - customer specific cables | |

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Statement regarding the usage of logos in test reports

The accreditation and notification body logos displayed in this test report are only valid for standards listed in the accreditation or notification scope of CSA Group Bayern GmbH.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.5 Measurement Protocol for FCC, VCCI and AUSTEL

4.5.1 GENERAL INFORMATION

4.5.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.10: 2009, Testing Unlicensed Wireless Devices."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.5.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.5.1.3 Determination of worst case measurement conditions

All radiated tests were performed with following antenna type and power supply:

- Antenna: PAM9158UN1CP01SK110MM
- Power Setting: 30.0 dBm
- Power supply: XP Power AEB70US12

All conducted test were performed with the XP power supply and an external 20 dB/50 W attenuator (02-02/50-10-001) and antenna cable (02-02/50-14-002).

The conducted output power and the spurious emissions radiated (9 kHz up to 30 MHz up to 1 GHz) were performed with the WRTZ-2000 (REV02) and the above named equipment to show the compliance to the regulation.

Both tests were performed on 16. March 2015.

The complete tests were performed with the WRTZ-2000 (REV00) and the same equipment. These tests were performed from 10. December 2014 up to 14. January 2015.

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up

See Attachment C

5.1.3 Applicable standard

According to FCC Part 15C, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

5.1.4 Description of Measurement

The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a line impedance stabilization network (LISN) with 50 Ω/50 μH (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded.

To convert between dBμV and μV, the following conversions apply:

$$\text{dB}\mu\text{V} = 20 \log \mu\text{V}$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz
Min. limit margin 1.02 dB at 0.507 MHz

The requirements are **FULFILLED**.


Remarks: For detailed test result please refer to following test protocols.

FCC ID: DO4WRTZ2000

5.1.6 Test protocol

Test point L1
 Operation mode: Tag reading mode supplying 30.0 dBm
 Remarks:

Result: Passed

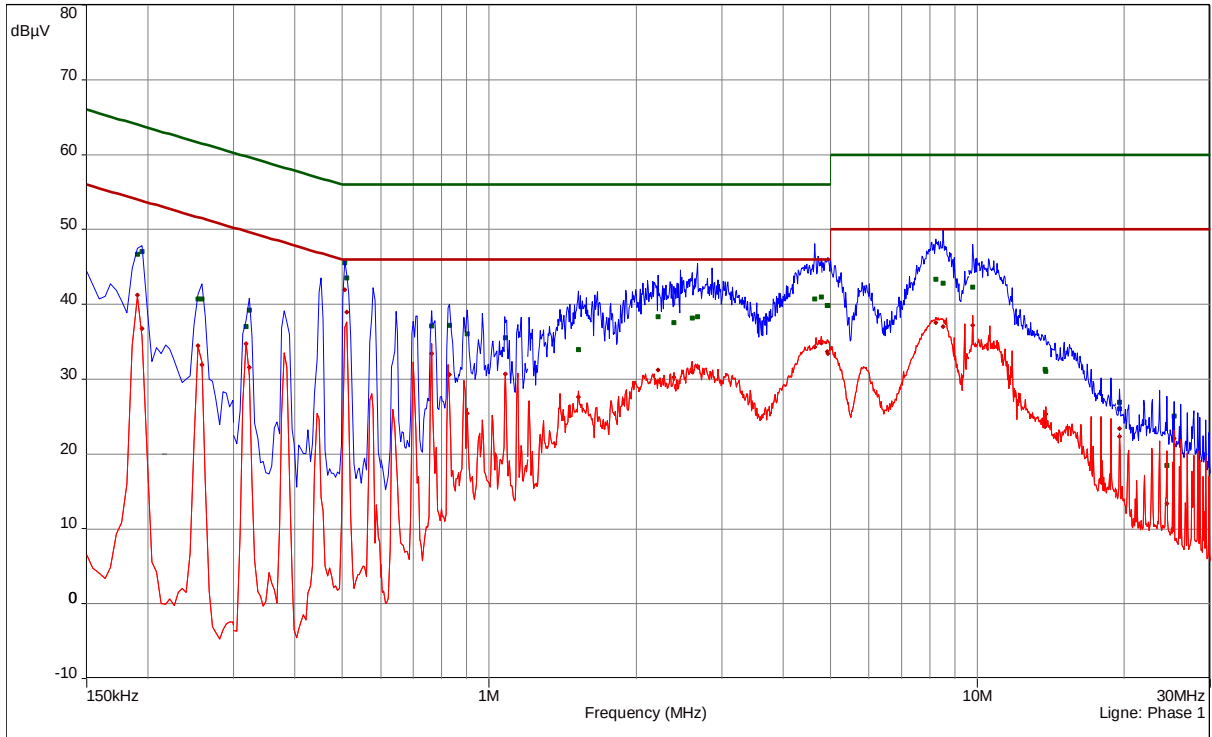

CISPR 22/CISPR22B

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line
0.1905	1	46.68	17.33	64.01	41.23	12.78	54.01	Phase 1
0.195	1	47.04	16.78	63.82	36.77	17.05	53.82	Phase 1
0.2535	1	40.71	20.93	61.64	34.5	17.14	51.64	Phase 1
0.258	1	40.71	20.79	61.5	31.97	19.53	51.5	Phase 1
0.318	2	37.05	22.71	59.76	34.72	15.04	49.76	Phase 1
0.3225	2	39.27	20.38	59.64	31.59	18.06	49.64	Phase 1
0.507	2	45.52	10.48	56	41.97	4.03	46	Phase 1
0.5115	2	43.56	12.44	56	38.97	7.03	46	Phase 1
0.762	3	37.09	18.91	56	33.4	12.6	46	Phase 1
0.8295	3	37.17	18.83	56	30.57	15.43	46	Phase 1
0.9015	3	36.07	19.93	56	25.44	20.56	46	Phase 1


FCC ID: DO4WRTZ2000

freq	SR	QP	margin	limit	AV	margin	limit	line
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB	
1.0815	3	35.55	20.45	56	30.7	15.3	46	Phase 1
1.524	4	33.96	22.04	56	27.62	18.38	46	Phase 1
2.2215	4	38.31	17.69	56	31.2	14.8	46	Phase 1
2.3925	4	37.57	18.43	56	30.23	15.77	46	Phase 1
2.607	5	38.14	17.86	56	30.98	15.02	46	Phase 1
2.67	5	38.38	17.62	56	31.62	14.38	46	Phase 1
4.65	5	40.69	15.31	56	34.3	11.7	46	Phase 1
4.794	5	40.95	15.05	56	34.81	11.19	46	Phase 1
4.9215	6	39.81	16.19	56	33.65	12.35	46	Phase 1
4.9395	6	39.83	16.17	56	33.38	12.62	46	Phase 1
8.229	6	43.33	16.67	60	37.52	12.48	50	Phase 1
8.517	6	42.85	17.15	60	37	13	50	Phase 1
9.78	7	42.33	17.67	60	37.18	12.82	50	Phase 1
13.7625	7	31.32	28.68	60	23.68	26.32	50	Phase 1
13.794	7	31.05	28.95	60	25.35	24.65	50	Phase 1
19.5645	8	26.91	33.09	60	23.37	26.63	50	Phase 1
19.569	8	26.07	33.93	60	22.34	27.66	50	Phase 1
24.4515	8	18.48	41.52	60	13.35	36.65	50	Phase 1
25.2705	8	25.06	34.94	60	22.04	27.96	50	Phase 1

FCC ID: DO4WRTZ2000

Test point: N
 Operation mode: Tag reading mode supplying 30.0 dBm
 Remarks:

Result: Passed

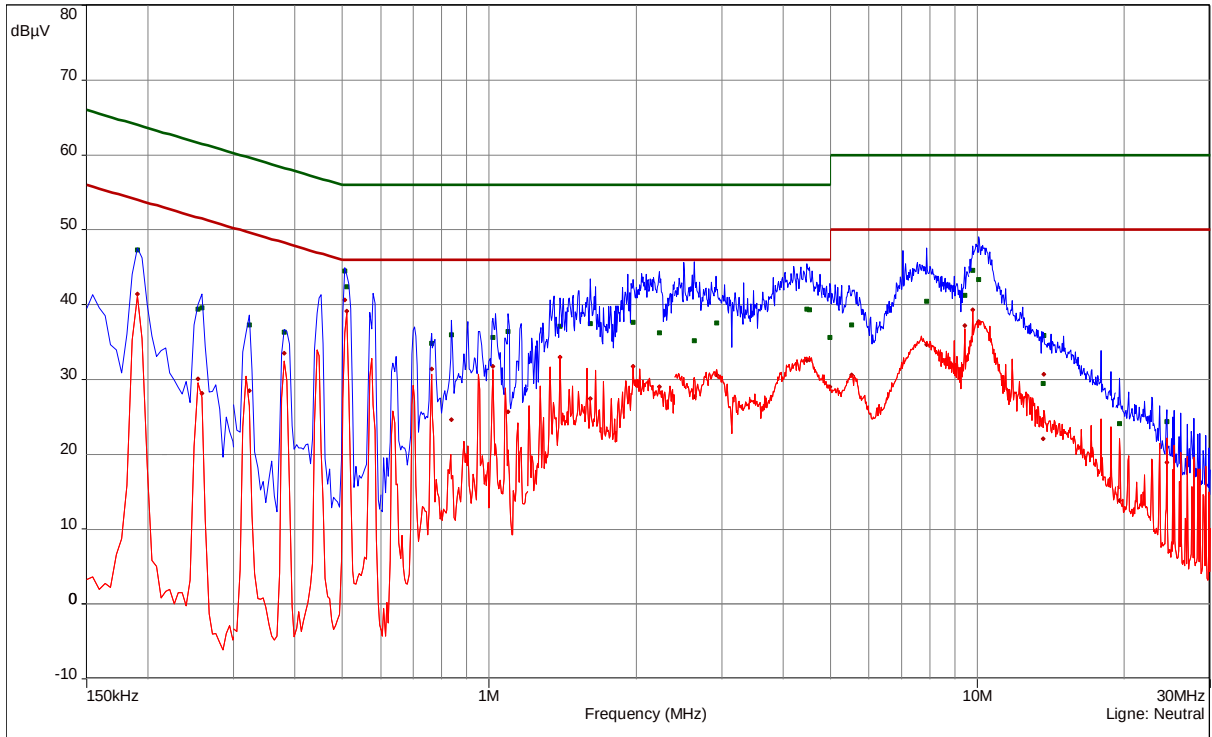

CISPR 22/CISPR22B

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line
0.1905	9	47.28	16.73	64.01	41.4	12.61	54.01	Neutral
0.2535	9	39.42	22.22	61.64	30.12	21.52	51.64	Neutral
0.258	9	39.56	21.94	61.5	28.15	23.35	51.5	Neutral
0.3225	10	37.31	22.34	59.64	28.47	21.18	49.64	Neutral
0.381	10	36.31	21.95	58.26	33.53	14.73	48.26	Neutral
0.507	10	44.52	11.48	56	40.59	5.41	46	Neutral
0.5115	10	42.42	13.58	56	39.13	6.87	46	Neutral
0.762	11	34.86	21.14	56	31.38	14.62	46	Neutral
0.8385	11	35.93	20.07	56	24.67	21.33	46	Neutral


FCC ID: DO4WRTZ2000

freq	SR	QP	margin	limit	AV	margin	limit	line
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB	
1.0185	11	35.64	20.36	56	31.74	14.26	46	Neutral
1.095	11	36.45	19.55	56	25.68	20.32	46	Neutral
1.398	12	37.14	18.86	56	32.98	13.02	46	Neutral
1.614	12	37.5	18.5	56	27.43	18.57	46	Neutral
1.9695	12	37.6	18.4	56	31.74	14.26	46	Neutral
2.235	12	36.27	19.73	56	29.04	16.96	46	Neutral
2.634	13	35.21	20.79	56	27.74	18.26	46	Neutral
2.9265	13	37.55	18.45	56	30.58	15.42	46	Neutral
4.479	13	39.37	16.63	56	32.59	13.41	46	Neutral
4.533	13	39.32	16.68	56	32.64	13.36	46	Neutral
4.9935	14	35.64	20.36	56	29.04	16.96	46	Neutral
5.529	14	37.26	22.74	60	30.64	19.36	50	Neutral
7.8735	14	40.49	19.51	60	34.65	15.35	50	Neutral
9.417	14	41.23	18.77	60	37.16	12.84	50	Neutral
9.7845	15	44.59	15.41	60	39.32	10.68	50	Neutral
10.05	15	43.36	16.64	60	37.7	12.3	50	Neutral
13.6545	15	29.45	30.55	60	22.1	27.9	50	Neutral
13.668	15	35.9	24.1	60	30.73	19.27	50	Neutral
19.5645	16	24.13	35.87	60	13.85	36.15	50	Neutral
24.4605	16	24.41	35.59	60	18.92	31.08	50	Neutral

FCC ID: DO4WRTZ2000

Test point L1
Operation mode: Standby mode
Remarks:

Result: Passed

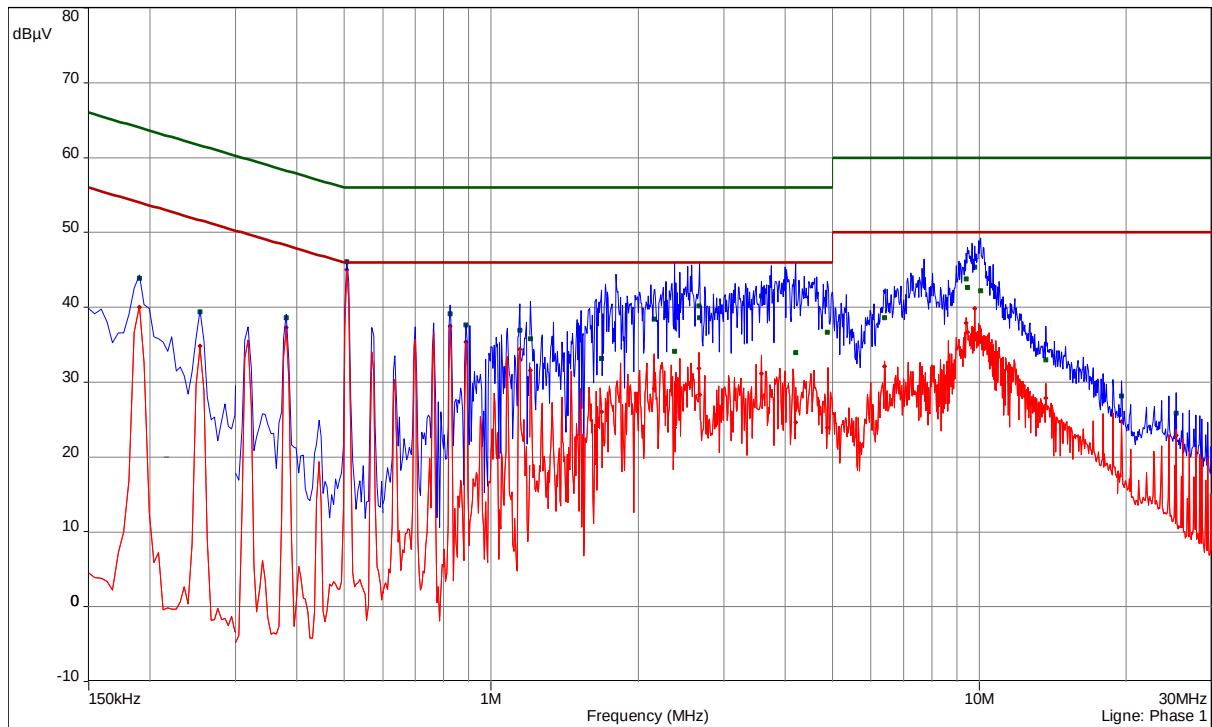

CISPR 22/CISPR22B

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line
0.1905	1	43.84	20.17	64.01	40.05	13.96	54.01	Phase 1
0.2535	1	39.36	22.28	61.64	34.8	16.84	51.64	Phase 1
0.381	2	38.57	19.69	58.26	37.26	11	48.26	Phase 1
0.507	2	46.12	9.88	56	44.98	1.02	46	Phase 1
0.825	3	39.11	16.89	56	37.49	8.51	46	Phase 1
0.888	3	37.61	18.39	56	35.39	10.61	46	Phase 1
1.1445	3	36.91	19.09	56	34.39	11.61	46	Phase 1
1.2045	4	35.77	20.23	56	31.56	14.44	46	Phase 1
1.6815	4	33.15	22.85	56	26.03	19.97	46	Phase 1

FCC ID: DO4WRTZ2000

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line
2.1585	4	38.42	17.58	56	29.09	16.91	46	Phase 1
2.3745	4	34.08	21.92	56	23.94	22.06	46	Phase 1
2.6655	5	40.22	15.78	56	31.85	14.15	46	Phase 1
2.6745	5	38.64	17.36	56	28.31	17.69	46	Phase 1
3.579	5	41.54	14.46	56	31.13	14.87	46	Phase 1
4.209	5	33.97	22.03	56	24.61	21.39	46	Phase 1
4.881	6	36.65	19.35	56	23.91	22.09	46	Phase 1
6.402	6	38.58	21.42	60	32.15	17.85	50	Phase 1
9.4035	6	43.81	16.19	60	37.93	12.07	50	Phase 1
9.462	6	42.65	17.35	60	36.7	13.3	50	Phase 1
9.7845	7	45.35	14.65	60	39.82	10.18	50	Phase 1
10.0455	7	42.24	17.76	60	35.43	14.57	50	Phase 1
13.6635	7	32.95	27.05	60	27.85	22.15	50	Phase 1
19.5735	8	28.13	31.87	60	24.69	25.31	50	Phase 1
25.284	8	25.83	34.17	60	22.9	27.1	50	Phase 1

FCC ID: DO4WRTZ2000

Test point


N

Operation mode:

Standby mode

Remarks:

Result: Passed

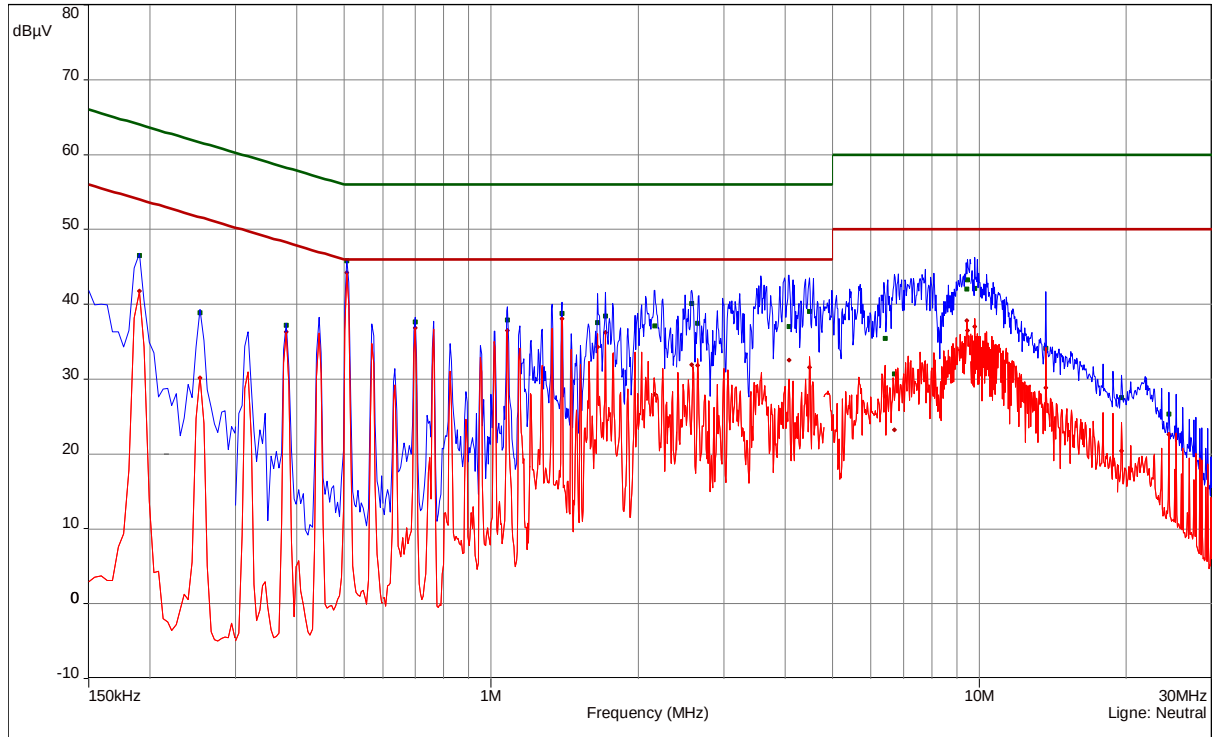

CISPR 22/CISPR22B

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line
0.1905	9	46.56	17.45	64.01	41.78	12.23	54.01	Neutral
0.2535	9	38.88	22.76	61.64	30.19	21.45	51.64	Neutral
0.381	10	37.17	21.09	58.26	36.3	11.96	48.26	Neutral
0.507	10	45.8	10.2	56	44.21	1.79	46	Neutral
0.699	11	37.62	18.38	56	36.85	9.15	46	Neutral
1.0815	11	37.89	18.11	56	36.51	9.49	46	Neutral
1.398	12	38.8	17.2	56	38.08	7.92	46	Neutral
1.6545	12	37.52	18.48	56	34.33	11.67	46	Neutral
1.713	12	38.43	17.57	56	36.26	9.74	46	Neutral
2.1675	12	37.1	18.9	56	27.98	18.02	46	Neutral
2.5755	13	40.14	15.86	56	31.95	14.05	46	Neutral
2.652	13	37.46	18.54	56	31.88	14.12	46	Neutral
4.0785	13	37.02	18.98	56	32.56	13.44	46	Neutral
4.4925	13	39.04	16.96	56	31.55	14.45	46	Neutral
6.4065	14	35.44	24.56	60	27.72	22.28	50	Neutral
6.708	14	30.71	29.29	60	23.19	26.81	50	Neutral
9.4215	14	42.07	17.93	60	37.8	12.2	50	Neutral
9.4665	14	43.25	16.75	60	36.49	13.51	50	Neutral
9.789	15	42.15	17.85	60	37	13	50	Neutral
13.6635	15	34.15	25.85	60	28.88	21.12	50	Neutral
19.569	16	27.55	32.45	60	20.41	29.59	50	Neutral
24.4695	16	25.37	34.63	60	22.62	27.38	50	Neutral

FCC ID: DO4WRTZ2000

5.2 20 dB bandwidth

For test instruments and accessories used see section 6 Part MB.

5.2.1 Description of the test location

Test location: Shielded room S4

5.2.2 Photo documentation of the test set-up

See Attachment C

5.2.1 Applicable standard

According to FCC Part 15C, Section 15.247(a):

Frequency hopping systems shall have hopping carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.2.2 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or the first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

5.2.3 Test result

Power setting 30.0 dBm:

Channel No.	-20 dB Bandwidth below peak (kHz)
CH 1 (902.75 MHz)	83.40
CH 25 (914.75 MHz)	82.80
CH 50 (927.25 MHz)	82.20

Bandwidth limit according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	Limit -20 db bandwidth (kHz)
902-928	≥ 50	< 250

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: DO4WRTZ2000

5.2.4 Test protocol

Channel 1
902.75 MHz




*RBW 1 kHz Marker 1 [T1]
VBW 3 kHz -3.01 dBm
SWT 300 ms 902.708600000 MHz

Ref 30 dBm

Att 40 dB

1 PK
VIEW

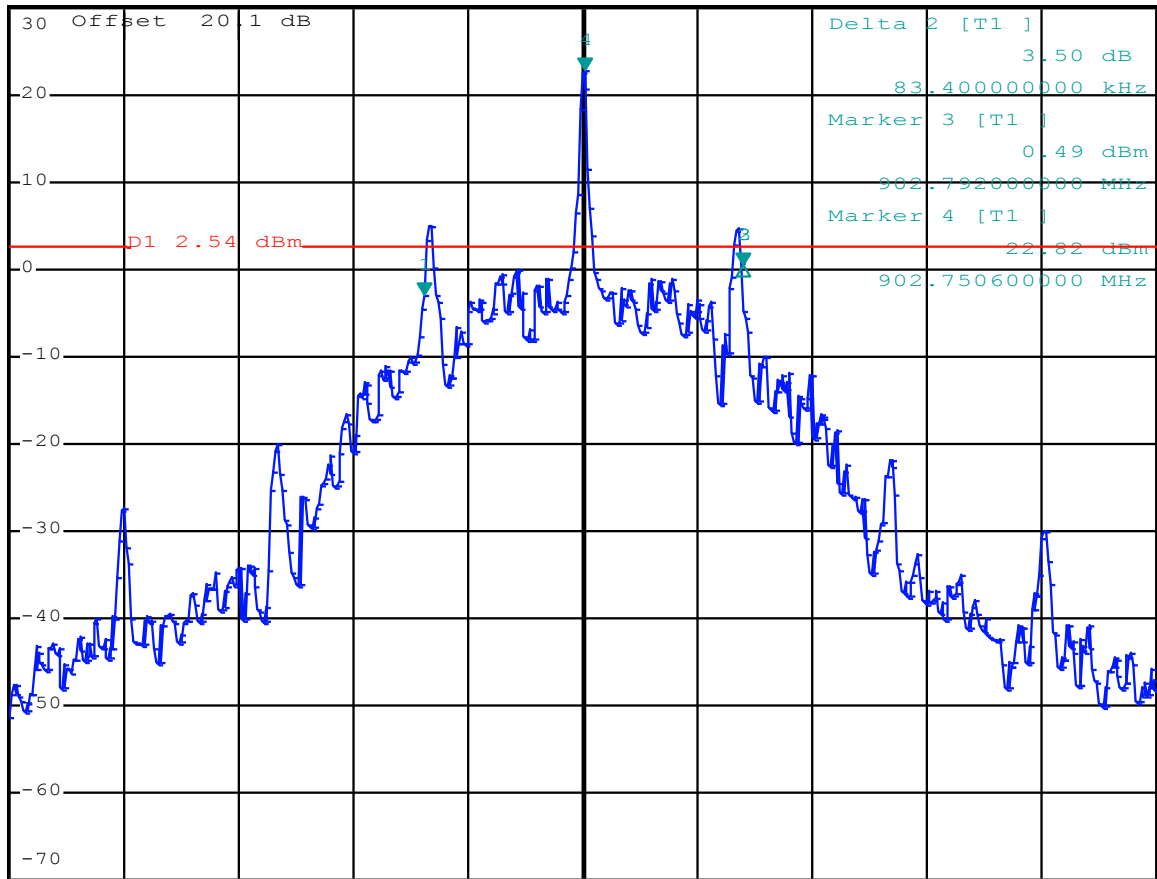

Center 902.75 MHz

30 kHz/


Span 300 kHz

FCC ID: DO4WRTZ2000

Channel 50
927.25 MHz



*RBW 1 kHz Marker 1 [T1]
VBW 3 kHz 2.86 dBm
Ref 30 dBm Att 40 dB SWT 300 ms 927.209575000 MHz

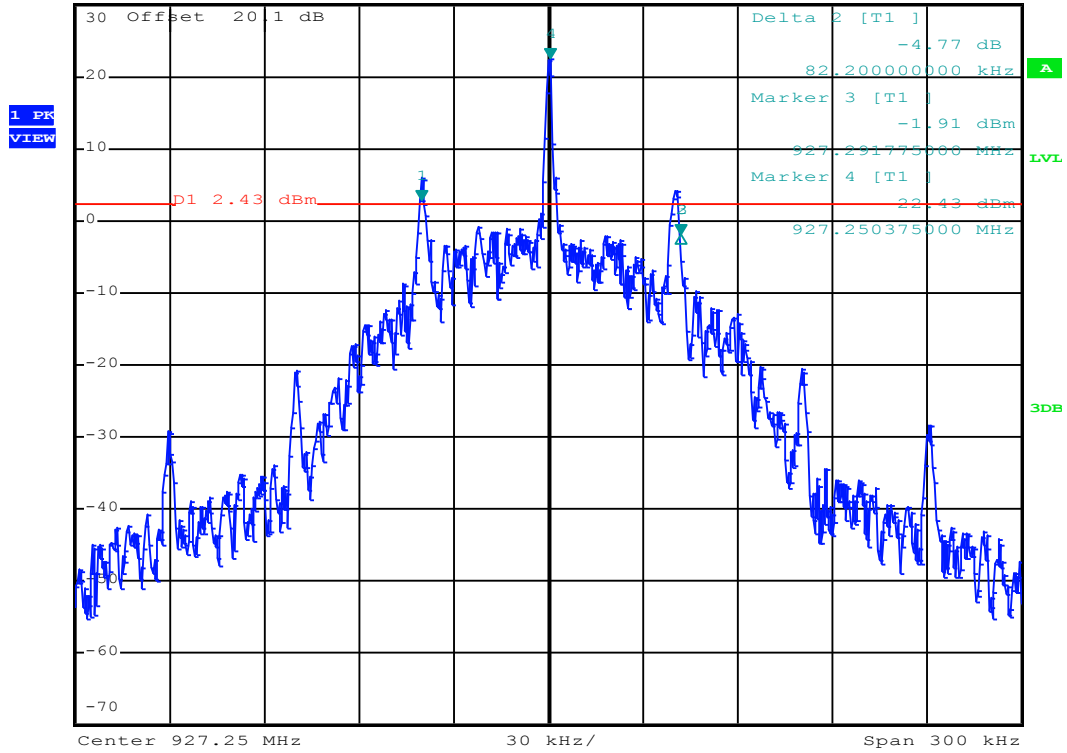

FCC ID: DO4WRTZ2000**5.3 Maximum peak conducted output power**

For test instruments and accessories used see section 6 Part CPC 2.

5.3.1 Description of the test location

Test location: Shielded room S4

5.3.2 Photo documentation of the test set-up

See Attachment C

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.247(b)(2):

For frequency hopping systems operating in the 902-928 MHz band the maximum peak conducted output power shall not exceed the limit of 1 watt for systems employing at least 50 hopping channels.

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode using the assigned frequency.

Spectrum analyser settings:

RBW	300 kHz	Sweep time	5 ms (Auto)
VBW	1 MHz	Power Mode	Max. hold
Detector	Peak	Span	25 0 kHz

FCC ID: DO4WRTZ2000

5.3.5 Test result

- a.) Power setting 30.0 dBm – WRTZ-2000 (REV00)
= Antenna gain: 4.5 dBi

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Delta (dB)
1	902.75	23.27	30.0	-6.73
25	914.75	22.99	30.0	-7.01
50	927.25	22.84	30.0	-7.16

- b.) Power setting 30.0 dBm – WRTZ-2000 (REV02)
= Antenna gain: 4.5 dBi

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Delta (dB)
1	902.75	23.18	30.0	-6.82
25	914.75	22.79	30.0	-7.21
50	927.25	22.57	30.0	-7.43

Note: Test cable loss and fixed attenuation of 20 dB are included in the analyzer reading (Transducer factor).

Peak Power Limit according to FCC Part 15C, Section 15.247(b)(2):

Frequency (MHz)	Hopping channels	Hop. CH carrier frequ. separation	Peak Power Limit	
			(dBm)	(W)
902-928	≥ 50		30	1.0

The requirements are **FULFILLED**.

Remarks:

FCC ID: DO4WRTZ2000**5.4 Spurious RF conducted emissions**

For test instruments and accessories used see section 6 Part **SEC1, SEC2 and SEC3**.

5.4.1 Description of the test location

Test location: Shielded room S4

5.4.2 Photo documentation of the test set-up

See Attachment C

5.4.3 Applicable standard

According to FCC Part 15C, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency band 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

5.4.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode at the assigned frequency.

Spectrum analyzer settings:

RBW	100 kHz
VBW	300 kHz
Detector	Max. peak
Trace:	Max. hold
Sweep time	auto

FCC ID: DO4WRTZ2000

5.4.5 Test result

Power setting 30.0 dBm

Hopping frequency from 902.75 to 927.25 MHz, max. level 23.00 dBm			
Frequency (MHz)	Peak power * (dBm)	Limit (-20 dB) (dBm)	Delta (dB)
2741.3	-52.19	3.00	-55.19

* Fixed attenuation of 20 dB is included in the Peak power.

The requirements are **FULFILLED**.

Remarks:

All spurious emissions falling in restricted bands have been measured radiated.

For detailed results please refer to following test protocols.



In the frequency range from 9 kHz to 30 MHz no emissions could be measured.

Test was performed in frequency hopping mode from 902.75 to 927.25 MHz.

This mode represents the worst case mode of the EuT.


FCC ID: DO4WRTZ2000

Conducted RF emission from 9 kHz to 30 MHz

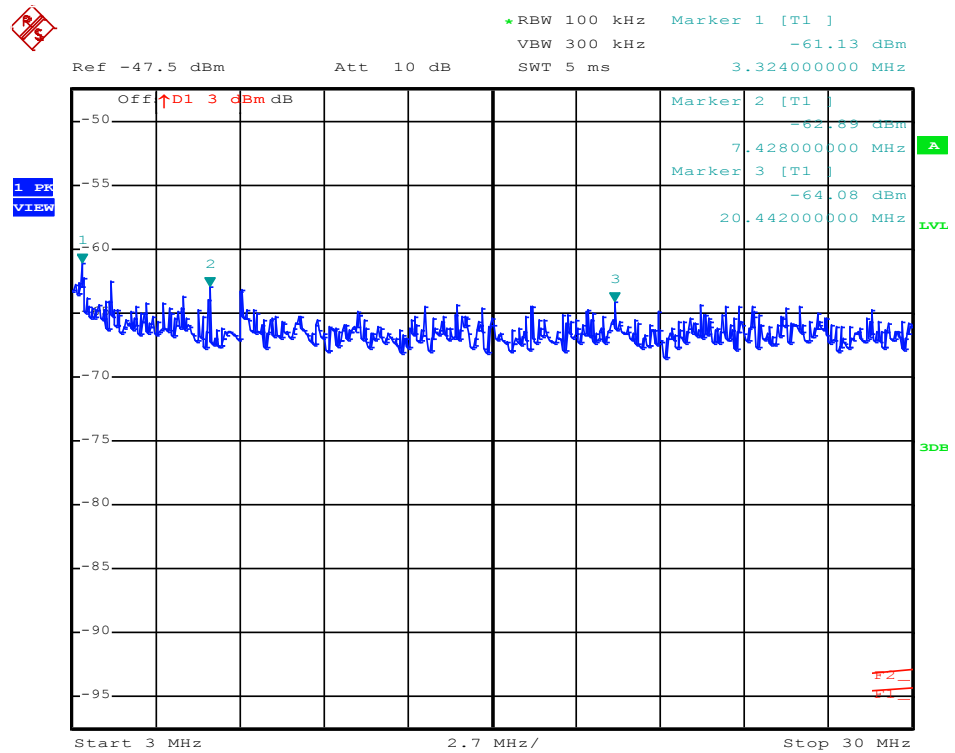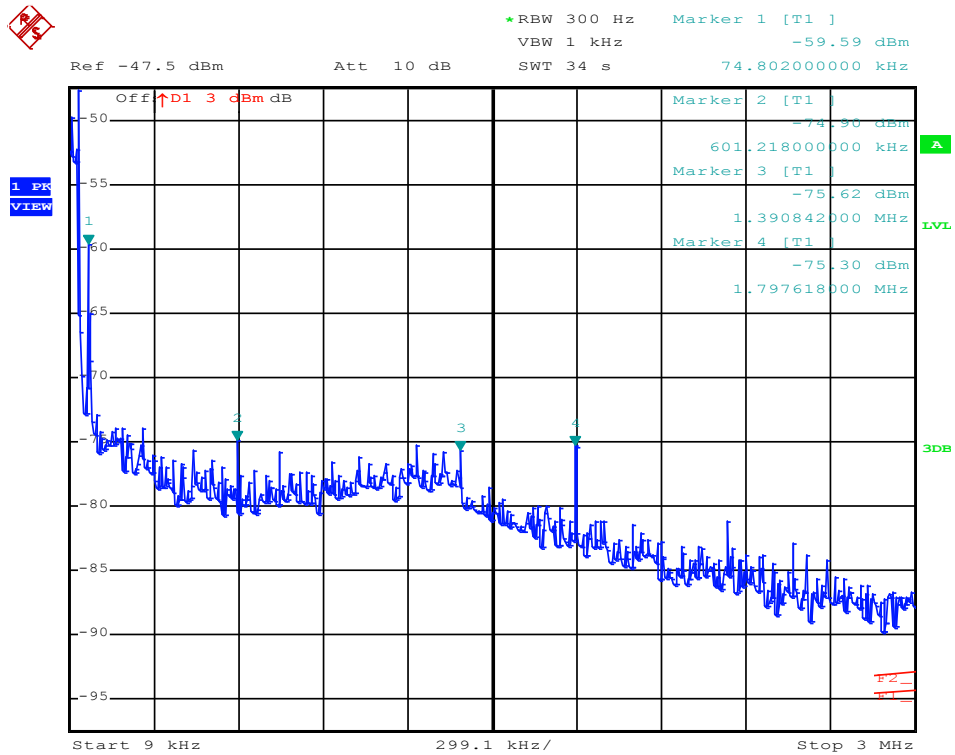

FCC ID: DO4WRTZ2000

Conducted RF emission from 30 to 1000 MHz

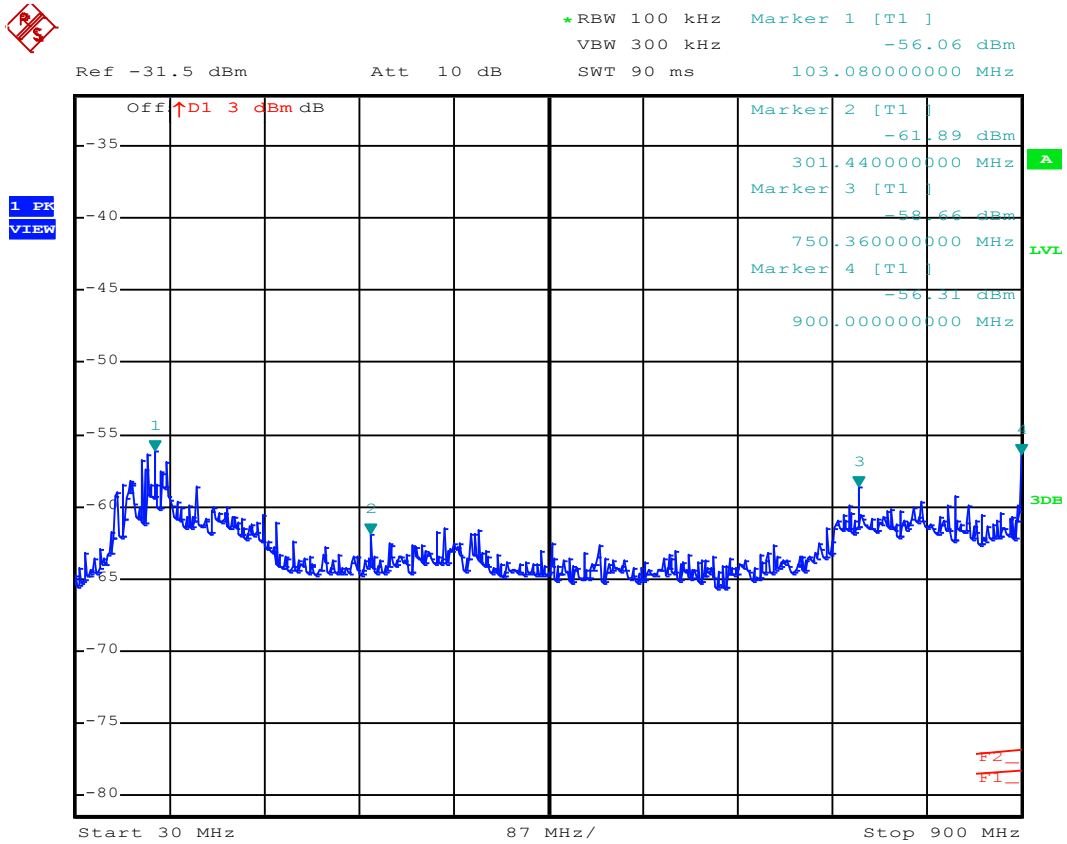

FCC ID: DO4WRTZ2000
Conducted RF emission from 30 to 1000 MHz
(Band edge)



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 23.00 dBm
SWT 5 ms 908.76000000 MHz


Ref 42 dBm

Att 60 dB

SWT 5 ms


908.76000000 MHz

1 PK
VIEW

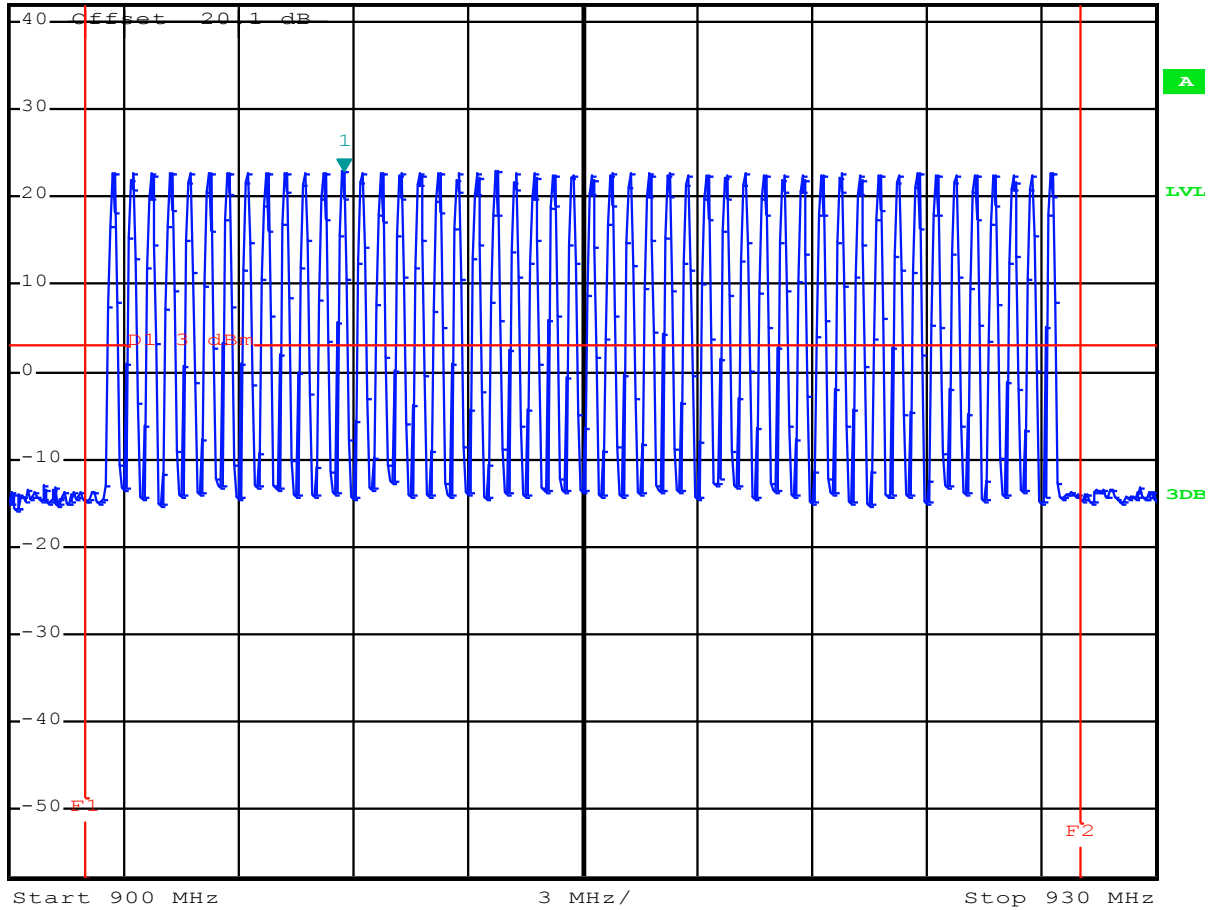


FCC ID: DO4WRTZ2000

Conducted RF emission from 1 to 10 GHz

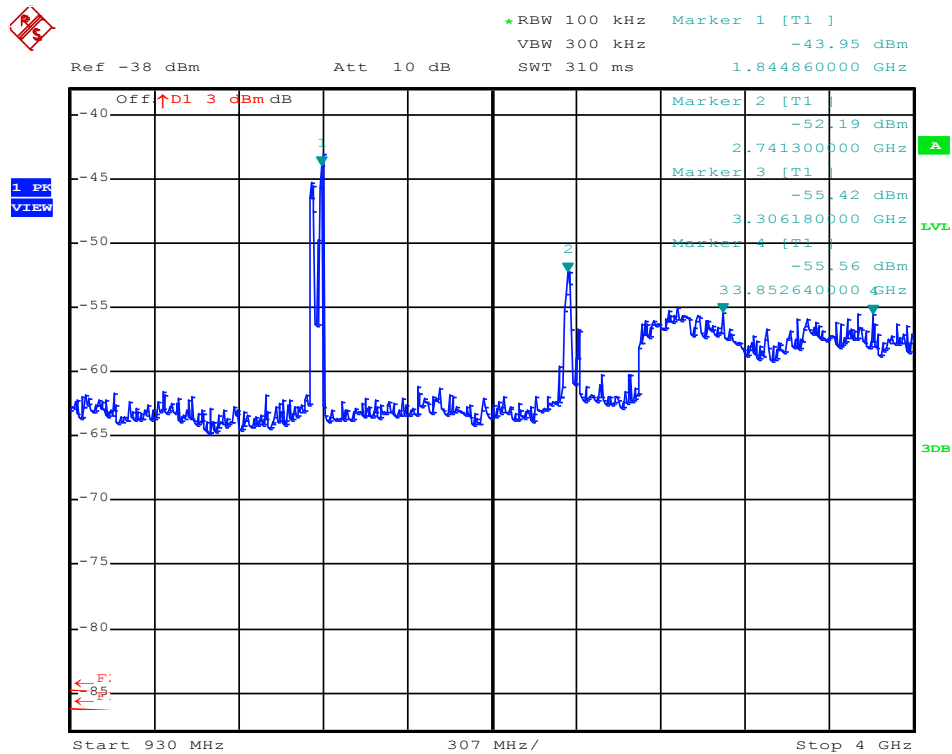

Note: Signal level No.2 is located in restricted band.

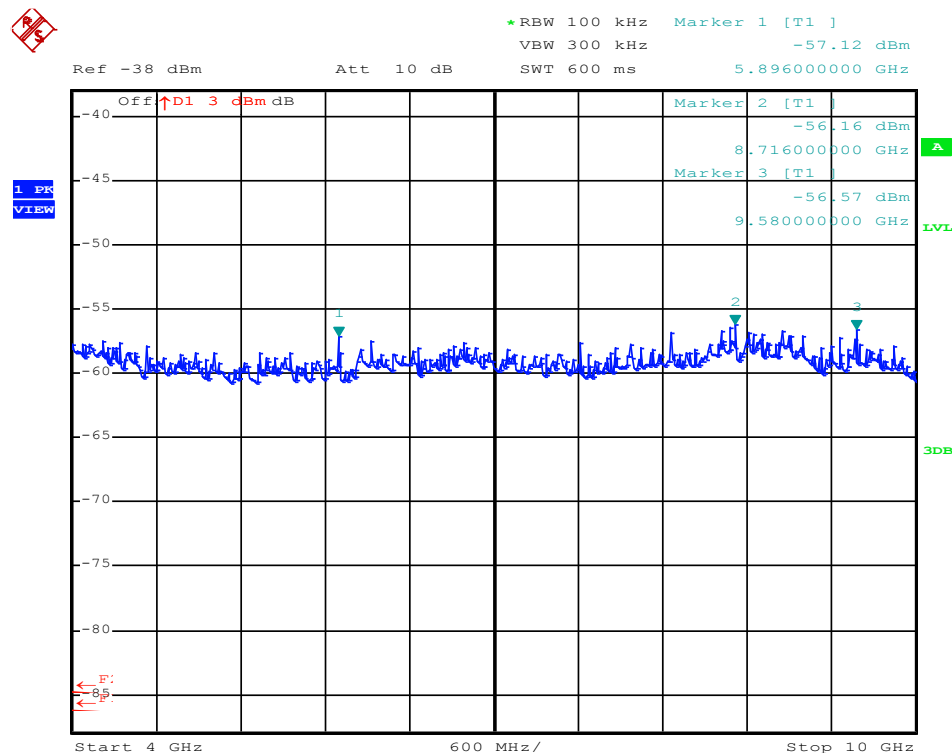

FCC ID: DO4WRTZ2000**5.5 Spurious radiated emissions**

For test instruments and accessories used see section 6 Part **SER 1, SER 2, SER 3.**

5.5.1 Description of the test location

Test location: OATS1
Test distance: 3 metres

Test location: Anechoic Chamber A1
Test distance: 3 metres

5.5.2 Photo documentation of the test set-up

See Attachment C

5.5.3 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency bands 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a) (see Section 15.205(c)).

5.5.4 Description of Measurement

Radiated spurious emissions from the EUT are measured in the frequency range of 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linear polarized antennas. The measurements are made with 120 kHz bandwidth and quasi-peak detection (200 Hz, 9 kHz up to 30 MHz). The EUT was placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the equipment under test will be in accordance to ANSI C63.4. The antenna was positioned 3 metres horizontally from the EUT. To locate maximum emissions from the EUT the antenna is shifted in height from 1 to 4 metres, after the EUT is rotated 360 degrees. The measurement scan is made in horizontal and vertical polarization of the antenna.

For the radiated measurement up from 1 GHz to maximum frequency as specified in Section 15.33, a spectrum analyzer and appropriate linear polarized antennas are used. The EUT is placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the EUT will be in accordance to ANSI C63.4. The antenna was positioned 3 m horizontally from the EUT. To locate maximum emissions the EUT was rotated 360 degrees in the fully anechoic chamber. The measurement scan is made in horizontal and vertical polarization of the antenna. For testing above 1 GHz, if the emission level of the EUT in peak mode complies with the average limit is 20 dB lower, then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.

FCC ID: DO4WRTZ2000

5.5.5 Test result

5.5.5.1 Radiated emission test $f < 1$ GHz

Frequency [kHz]	L: QP [dB μ V]	L: AV [dB μ V]	Bandwidth [kHz]	Correct. [dB]	L: QP [dB μ V/m]	L: AV [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
536.8	24.1	19.7	9.0	20	44.1	39.7	73.0	-33.3
1073.6	23.4	18.0	9.0	20	43.4	38.0	67.0	-29.0
1342.0	21.6	15.9	9.0	20	41.6	35.9	65.0	-29.1

Note: At both revisions REV00 and REV02, no unwanted emissions from the EuT could be measured in the relevant frequency ranges and each antenna with the different power setting. Only ambient noises could be detected!

WRTZ – 2000(REV00):

The table shows an extract of the critical values:

The position of the RJ45 cables in the rear of the reader has an influence of the size of the measured values.

Frequency (MHz)	Reading Vert. (dB μ V)	Reading Hor. (dB μ V)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dB μ V/m)	Level Hor. (dB μ V/m)	Limit (dB μ V/m)	Dlimit (dB)
73,7030	24,2		12,6		36,8		40,0	-3,2
74,1716	24,8		12,5		37,3		40,0	-2,7
74,9906	25,6		12,3		37,9		40,0	-2,1
74,9933	21,5		12,3		33,8		40,0	-6,2
75,8130	17,6		12,1		29,7		40,0	-10,3
76,6258	14,8		11,9		26,7		40,0	-13,3
77,4418	22,0		11,7		33,7		40,0	-6,3
87,4970	28,1		10,2		38,3		40,0	-1,7
100,4060	17,4		10,7		28,1		43,5	-15,4
112,4993	17,2		12,4		29,6		43,5	-13,9
140,2381	22,1	15,9	14,7	13,1	36,8	29,0	43,5	-6,7
159,0100	21,5		15,8		37,3		43,5	-6,2
273,1343	28,4		15,9		44,3		46,0	-1,7
287,0658	25,4		16,5		41,9		46,0	-4,1
351,3360	21,5		18,6		40,1		46,0	-5,9
575,0008	8,3	11,0	25,3	25,2	33,6	36,2	46,0	-9,8
750,0000	12,3	9,8	28,7	28,8	41,0	38,6	46,0	-5,0

FCC ID: DO4WRTZ2000

The table shows an extract of the critical values:

The position of the RJ45 cables in the rear of the reader has an influence of the size of the measured values.

Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
800,0000	2,8	8,2	30,0	30,3	32,8	38,5	46,0	-7,5
62,4950		11,0		14,4		25,4	40,0	-14,6
62,7863		10,9		14,4		25,3	40,0	-14,7
73,8403		2,8		13,0		15,8	40,0	-24,2
74,2051		6,9		12,9		19,8	40,0	-20,2
75,0108		14,3		12,7		27,0	40,0	-13,0
87,2292		18,2		9,6		27,8	40,0	-12,2
112,5017		18,6		11,1		29,7	43,5	-13,8
141,0444		20,3		13,2		33,5	43,5	-10,0
141,8668		22,4		13,2		35,6	43,5	-7,9
200,0000	27,4	21,6	11,9	10,4	39,3	32,0	43,5	-4,2
257,5963		27,1		14,6		41,7	46,0	-4,3
287,8668		28,2		16,2		44,4	46,0	-1,6
378,2520		15,8		19,1		34,9	46,0	-11,1
500,0120		20,1		24,0		44,1	46,0	-1,9
550,0000	10,8	16,3	24,9	24,8	35,7	41,1	46,0	-4,9

FCC ID: DO4WRTZ2000

WRTZ – 2000(REV02):

The position of the RJ45 cables in the rear of the reader has an influence of the size of the measured values.								
Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
73,7030	19,7	22,3	12,6	13,1	32,3	35,4	40,0	-4,6
74,3953	19,0	20,8	12,5	12,9	31,5	33,7	40,0	-6,3
74,9906	19,1	25,0	12,3	12,7	31,4	37,7	40,0	-2,3
74,9933	18,6	23,4	12,3	12,7	30,9	36,1	40,0	-3,9
75,8130	15,2		12,1		27,3		40,0	-12,7
76,6258	11,9		11,9		23,8		40,0	-16,2
77,6611	20,3	25,0	11,6	11,9	31,9	36,9	40,0	-3,1
87,4970	27,6		10,2		37,8		40,0	-2,2
100,4060	15,2		10,7		25,9		43,5	-17,6
112,4993	16,9	20,8	12,4	11,1	29,3	31,9	43,5	-11,6
140,1186	19,9	13,5	14,7	13,1	34,6	26,6	43,5	-8,9
158,7235	22,3	12,9	15,8	14,4	38,1	27,3	43,5	-5,4
273,5176	24,2	18,7	15,9	15,4	40,1	34,1	46,0	-5,9
287,2559	19,4	22,1	16,5	16,2	35,9	38,3	46,0	-7,7
351,5152	14,5	22,3	18,6	18,4	33,1	40,7	46,0	-5,3
575,0008	7,9	11,9	25,3	25,2	33,2	37,1	46,0	-8,9
750,0000	9,5	7,4	28,7	28,8	38,2	36,2	46,0	-7,8
800,0257	6,8	5,6	30,0	30,3	36,8	35,9	46,0	-9,2
62,4950		10,8		14,4		25,2	40,0	-14,8
73,7001		10,3		13,1		23,4	40,0	-16,6
74,2571		7,4		12,9		20,3	40,0	-19,7
75,3300		19,0		12,6		31,6	40,0	-8,4
87,4686		19,3		9,6		28,9	40,0	-11,1
112,5017		23,8		11,1		34,9	43,5	-8,6
140,9311		15,9		13,2		29,1	43,5	-14,4
141,7277		20,3		13,2		33,5	43,5	-10,0
200,0000	23,2	18,7	11,9	10,4	35,1	29,1	43,5	-8,4
257,5963		26,8		14,6		41,4	46,0	-4,6
287,5368		24,0		16,2		40,2	46,0	-5,8
378,2260		16,1		19,1		35,2	46,0	-10,8
500,0120	18,7	19,8	24,2	24,0	42,9	43,8	46,0	-2,2
550,0000	10,2	16,0	24,9	24,8	35,1	40,8	46,0	-5,2

FCC ID: DO4WRTZ2000

5.5.5.2 Radiated emission test f > 1GHz

- Power setting 30.0 dBm
- Antenna: PAM915UN1CP01SK110MM

Frequency (GHz)	L: PK (dBμV)	L: AV (dBμV)	Bandwidth (kHz)	Correct. (dB)	L: PK dB(μV/m)	L: AV dB(μV/m)	Limit AV dB(μV/m)	Delta (dB)
2.710	47.5	42.9	1000	3.7	51.2	46.6	54.0	-7.4
2.752	46.8	39.7	1000	3.4	50.2	43.1	54.0	-10.9
3.613	42.8	37.5	1000	2.5	45.3	40.0	54.0	-14.0

*) Average values were measured with spectrum analyzer by the following settings

RBW: 1 MHz
VBW: 10 Hz
Sweep: Auto

Radiated limits according to FCC Part 15C, Section 15.209(a) for spurious emissions:

Frequency (MHz)	Field strength of spurious emissions		Measurement distance
	(μV/m)	dB(μV/m)	(metres)
0.009 - 0.490	2400/F(kHz)		300
0.490 - 1.705	24000/F(kHz)		30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

FCC ID: DO4WRTZ2000

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209: (Refer to section 5.5.5.1)

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

The requirements are **FULFILLED**.

Remarks: During the test the EUT was set into TX continuous mode with normal modulation.

The measurement was performed up to the 10th harmonic (10000 MHz).

Test was performed in frequency hopping mode from 902.75 to 927.25 MHz.

This mode represents the worst case mode of the EuT.


5.6 Hopping sequence

Requirement according to FCC Part 15C, Section 15.247(a):

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.

Remarks: The channel is represented by a pseudo-random hopping sequence hopping through the 50
RF-channels.
For detailed information about the hopping sequence, please refer to user manual to the
subpoint "Theory of Operation".

5.6.1 Test protocol

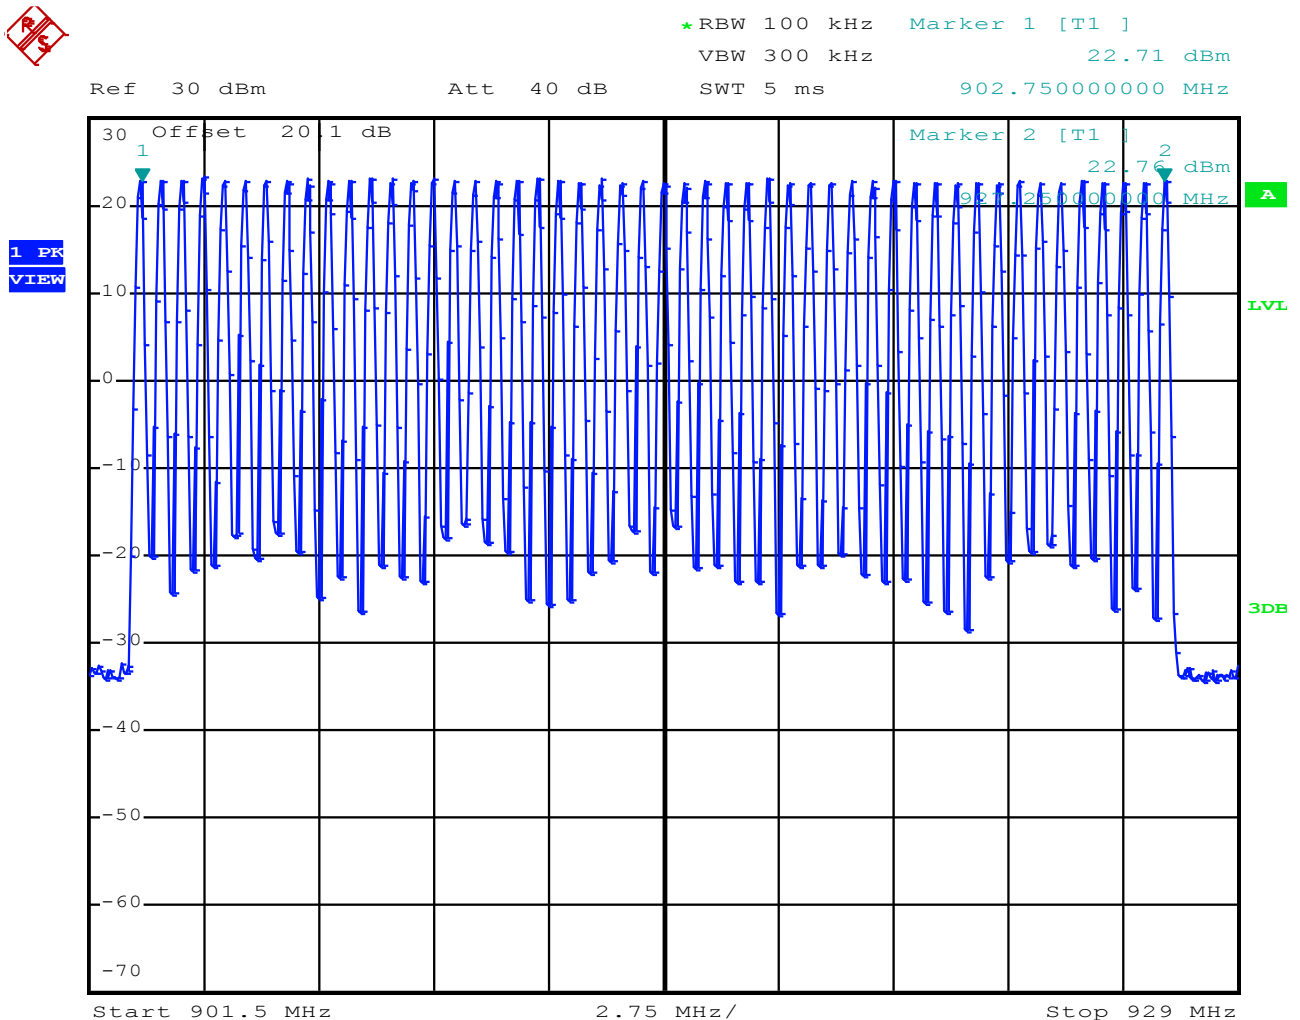

FCC ID: DO4WRTZ2000**5.7 Equal hopping frequency use**

Requirement according to FCC Part 15C, Section 15.247(a):
Each frequency must be used equally on the average by each transmitter.

Remarks: The device fulfills the requirement according to FCC Part 15C, Section 15.247(a).
The manufacturer declares in the system manual that this function is controlled via software.
For detailed information about the hopping sequence, please refer to user manual to the
subpoint "Theory of Operation".

5.8 Receiver input bandwidth

Requirement according to FCC Part 15C, Section 15.247(a):
The system receivers shall have input bandwidth that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signal.

Remarks: The receiver bandwidth is equal to the transmitter bandwidth in the 50 hopping channel mode.
(Declared by the manufacturer.)
For detailed information about the hopping sequence, please refer to user manual to the
subpoint "Theory of Operation".

FCC ID: DO4WRTZ2000

5.9 Dwell time

For test instruments and accessories used see section 6 Part DC.

5.9.1 Description of the test location

Test location: Shielded room S4

5.9.2 Photo documentation of the test set-up

See Attachment C

5.9.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(i):

Frequency hopping systems operating in the 902-928 MHz band: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

5.9.4 Description of Measurement

The measurement was done using a spectrum analyser in time domain function and able to store the maximum time of a period. This time period has been stored and added up the appropriate time intervals the hopping system has applied this channel.

5.9.5 Test result

Channel frequency (MHz)	Pulse Time (ms)	Number of Bursts (in 1 time period)	Dwell time (ms)
914.75	10	27	400

Requirement according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	time of one period (s)	Limit dwell time, AV (ms)
902-928	≥ 50	20	< 400



The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.


FCC ID: DO4WRTZ2000

5.9.6 Test protocol

Time of occupancy (Dwell time)

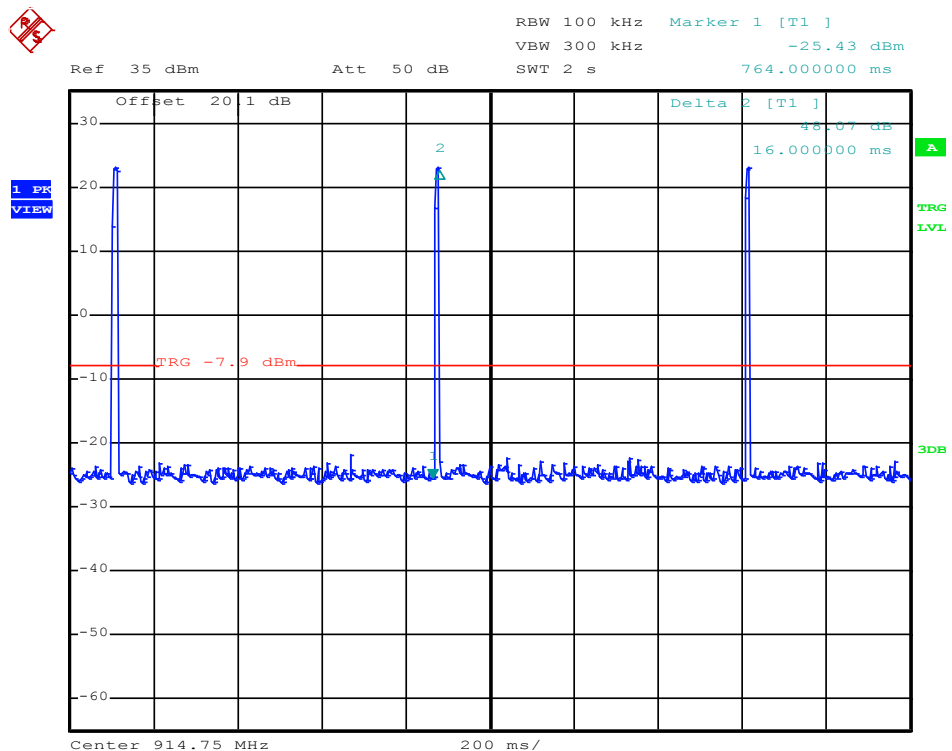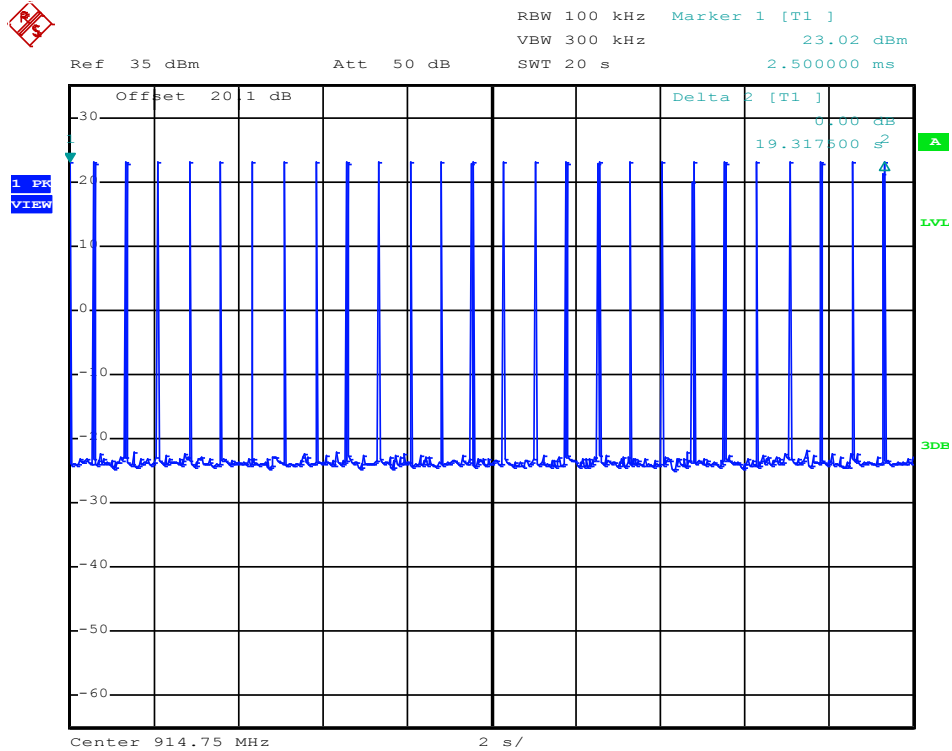

FCC ID: DO4WRTZ2000

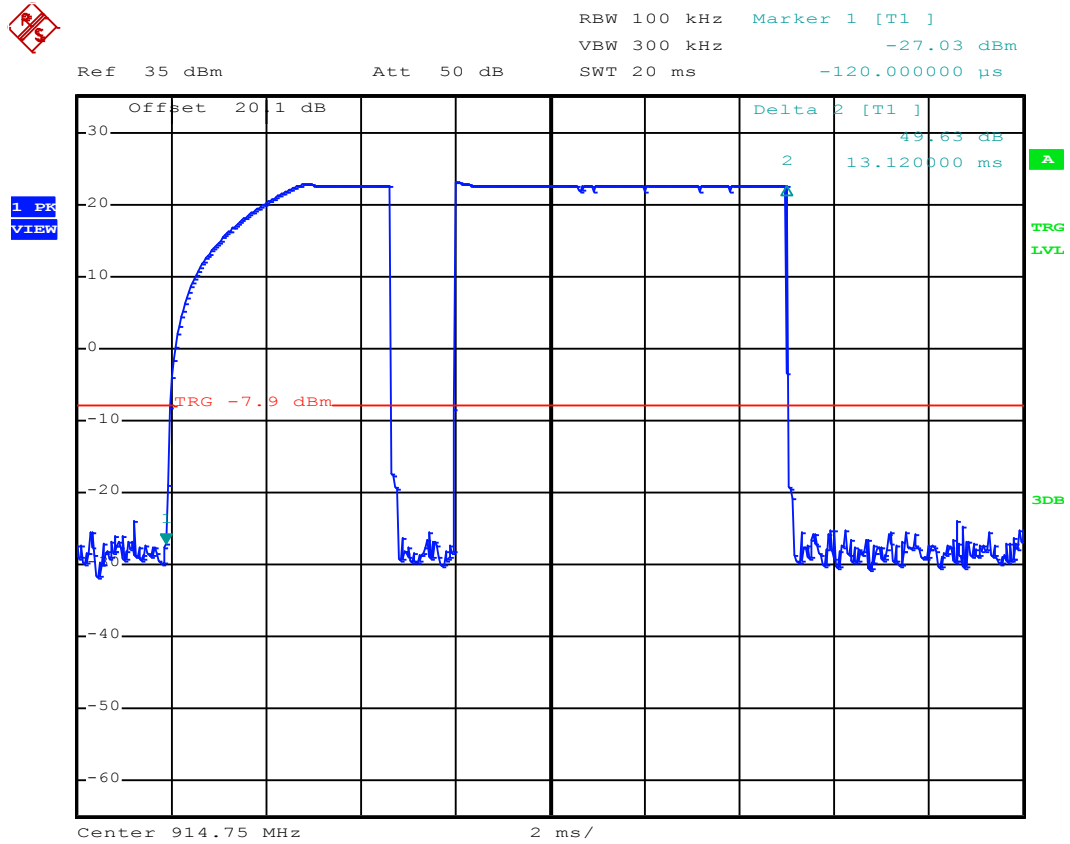

5.10 Channel separation

For test instruments and accessories used see section 6 Part MB.

5.10.1 Description of the test location

Test location: Shielded room S4

5.10.2 Photo documentation of the test set-up

See Attachment C

5.10.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.10.4 Description of Measurement

This measurement was done by using a spectrum analyser. The Span of the analyzer was set wide enough to capture 2 frequencies. The result of the channel separation was compared with the 20 dB bandwidth and recorded.

5.10.5 Test result

Channel 1 (MHz)	Channel 2 (MHz)	Channel separation (kHz)
902.75	903.25	500

FCC ID: DO4WRTZ2000

Limit according to FCC Part 15C, Section 15.247(a):


Frequency (MHz)	Hopping channels	Limit channel separation (kHz)
All systems		> 25 kHz or 20 dB bandwidth, which ever is greater
2400-2483.5	≥ 15	

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

5.10.6 Test protocol

Channel separation

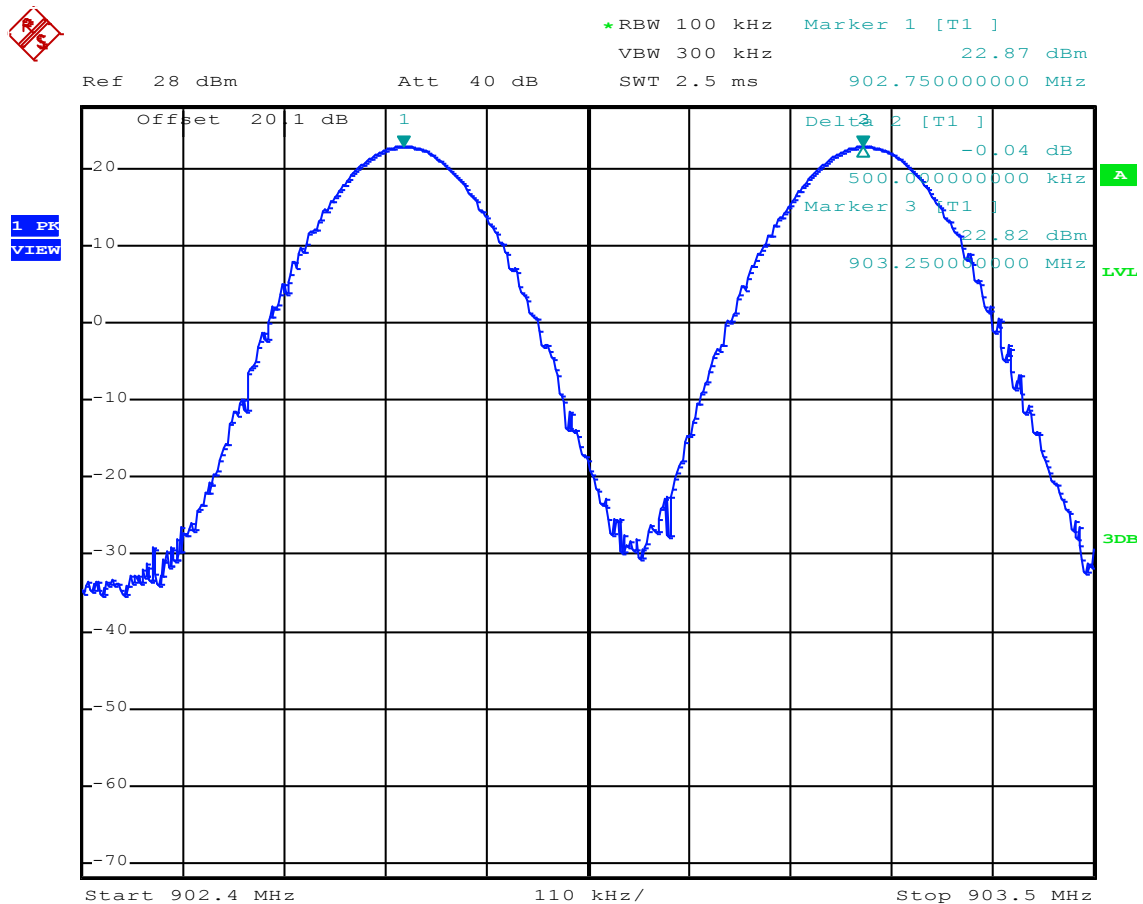

5.11 Quantity of hopping channels

For test instruments and accessories used see section 6 Part **MB**.

5.11.1 Description of the test location

Test location: Shielded room S4

5.11.2 Photo documentation of the test set-up

See Attachment C

5.11.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1)(i):

For frequency hopping systems operating in the 902-928 MHz band: If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

5.11.4 Description of Measurement

This measurement was done by using a spectrum analyser. The EuT was transmitting at its maximum data rate. The Span of the analyzer was set wide enough to capture the frequency band from 902-928 MHz.

5.11.5 Test result

Hopping channel frequency range	Quantity of hopping channels value	Quantity of hopping channels minimum limit
902-928 MHz	50	50

Limit according to FCC Part 15C, Section 15.247(1):

Frequency range (MHz)	LIMIT (Quantity of Hopping Channels)			
	20dB Bandwidth < 250kHz	20dB Bandwidth > 250kHz	20dB Bandwidth < 1 MHz	20dB Bandwidth > 1MHz
902 - 928	50	25	---	---

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: DO4WRTZ2000

5.11.6 Test protocol

Quantity of hopping channel



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 22.71 dBm
SWT 5 ms 902.75000000 MHz


Ref 30 dBm

Att 40 dB

SWT 5 ms

902.75000000 MHz

1 PK
VIEW

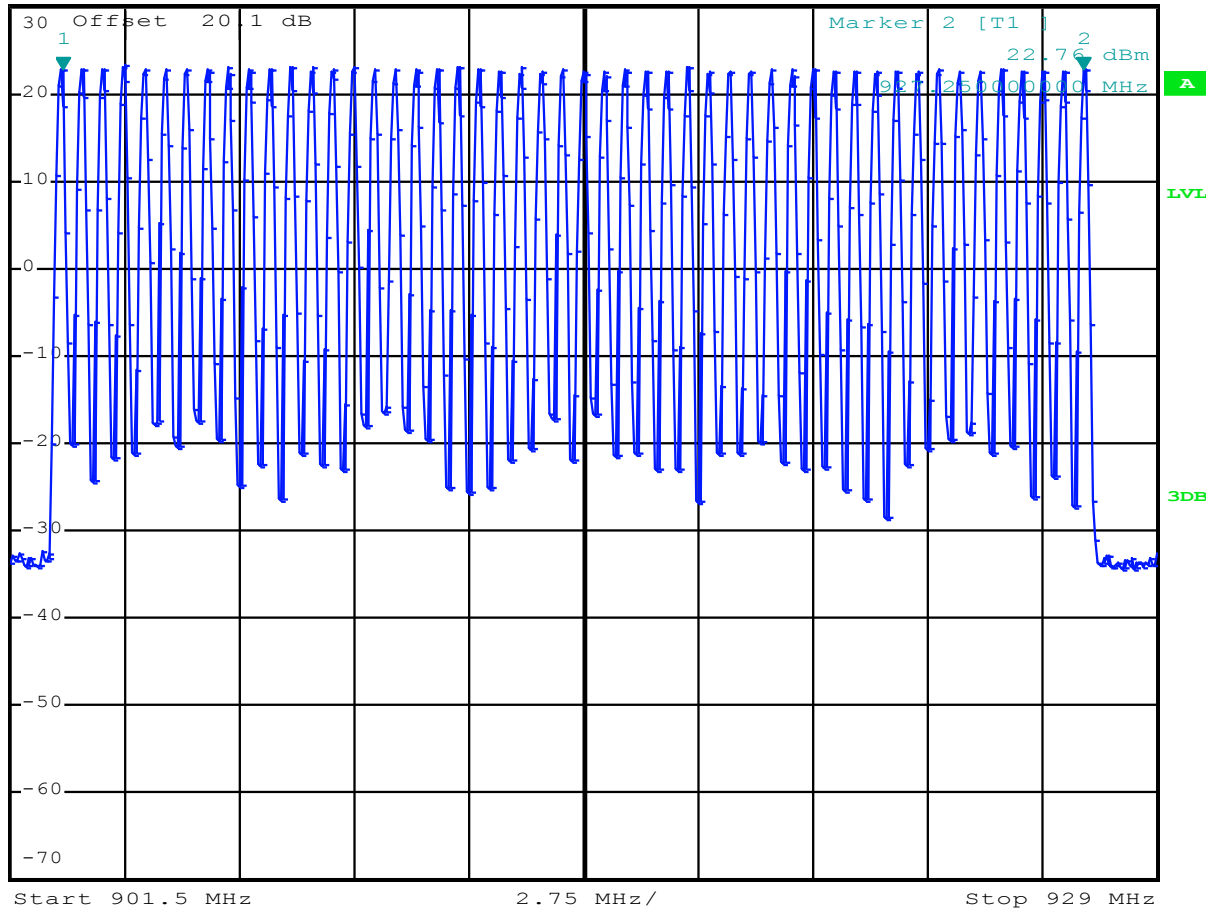

5.12 Antenna application

5.12.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has reverse SMA plugs to connect the defined antennas supplied by the manufacturer.
All supplied antennas meet the requirements of part 15.203 and 15.204.

5.12.2 Antenna requirements

According to FCC Part 15C, Section 15.247 (b)(4):

The conducted output power limit specified in paragraph (b) of 15.247 is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2) and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The necessary output power reduction depends on the used antenna type. The value of output power have to be reduced is controlled by firmware of the EUT and will be automatically set by selecting the antenna.

- Electrical Characteristics:

Antenna

1	Ceramic Antenna model	80mmx80mmx6mm
2	Frequency Range	902-928MHz
3	Center Frequency	915±3MHz
4	V. S. W. R	1.5:1
5	Band Width (V. S. W. R<1.5:1)	> 22MHz
6	Impedance	50 ohm
7	Gain(Typical)	4.5dBic (Without Cable) Based on 340mm×270mm ground plane
8	Polarization	RHCP

FCC ID: DO4WRTZ2000**5.13 Maximum permissible exposure (MPE) – See Attachment B**

For test instruments and accessories used see section 6 Part **CPC 2**.

5.13.1 Description of the test location

Test location: None

5.13.2 Applicable standard

According to FCC Part 15, Section 15.247(i):

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

The test methods used comply with ANSI/IEEE C95.1, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz".

This test report shows the compliance with the limits for Maximum Permissible Exposure (MPE) specified in FCC Part 1, Section 1.1310 and the criteria to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in FCC Part 1, Section 1.1307(b).

5.13.3 Description of Measurement

The maximum total power input to the antenna has been measured conducted as described in clause 5.3 of this document. Through the Friis transmission formula, the known maximum gain of the antenna and the maximum power, the MPE can be calculated in a defined distance away from the product.

Friis transmission formula:
$$P_d = \frac{P_{out} * G}{4 * \pi * r^2}$$

where

P_d = power density (mW/cm²)

P_{out} = output power to antenna (mW)

G = gain of antenna (linear scale)

r = distance between antenna and observation point (cm)

Remarks: For detailed test result please refer Attachment B.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	ESHS 30	02-02/03-05-002	17/07/2015	17/07/2014		
	ESH 2 - Z 5	02-02/20-05-004	18/10/2015	18/10/2014	02/03/2015	02/09/2014
	N-4000-BNC	02-02/50-05-138				
	N-1500-N	02-02/50-05-140				
	ESH 3 - Z 2	02-02/50-05-155	19/11/2015	19/11/2014	19/05/2015	19/11/2014
	SP 103 /3.5-60	02-02/50-05-182				
CPC 2	FSP 40	02-02/11-11-001	02/10/2015	02/10/2014		
	THS730A	02-02/13-05-007				
	Inmet 18N50W-20 dB	02-02/50-10-001				
	NSP 3630	02-02/50-14-015				
DC	FSP 40	02-02/11-11-001	02/10/2015	02/10/2014		
	THS730A	02-02/13-05-007				
	Inmet 18N50W-20 dB	02-02/50-10-001				
	NSP 3630	02-02/50-14-015				
MB	FSP 40	02-02/11-11-001	02/10/2015	02/10/2014		
	THS730A	02-02/13-05-007				
	Inmet 18N50W-20 dB	02-02/50-10-001				
	NSP 3630	02-02/50-14-015				
SEC 1-3	FSP 40	02-02/11-11-001	02/10/2015	02/10/2014		
	THS730A	02-02/13-05-007				
	WHJS 1000-10EE	02-02/50-05-070				
	Inmet 18N50W-20 dB	02-02/50-10-001				
	NSP 3630	02-02/50-14-015				
SER 1	ESR 7	02-02/03-13-001	03/06/2015	03/06/2014		
	HFH 2 - Z 2	02-02/24-05-020	26/08/2015	26/08/2014	13/02/2015	13/02/2014
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
SER 2	ESVS 30	02-02/03-05-006	03/07/2015	03/07/2014		
	VULB 9168	02-02/24-05-005	08/04/2015	08/04/2014	04/03/2015	04/09/2014
	S10162-B	02-02/50-05-031				
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
SER 3	FSP 40	02-02/11-11-001	02/10/2015	02/10/2014		
	AFS5-12001800-18-10P-6	02-02/17-06-002				
	AFS4-01000400-10-10P-4	02-02/17-13-002				
	AMF-4F-04001200-15-10P	02-02/17-13-003				
	3117	02-02/24-05-009	07/05/2015	07/05/2014		
	Sucoflex N-2000-SMA	02-02/50-05-075				
	SF104/11N/11N/1500MM	02-02/50-13-015				