

17.12 SAR test plots for LTE Band26(Range 824 - 849 MHz)

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start0 831.5MHz Edge1 0mm Power Reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,

E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 55.905$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2016/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 35.94 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

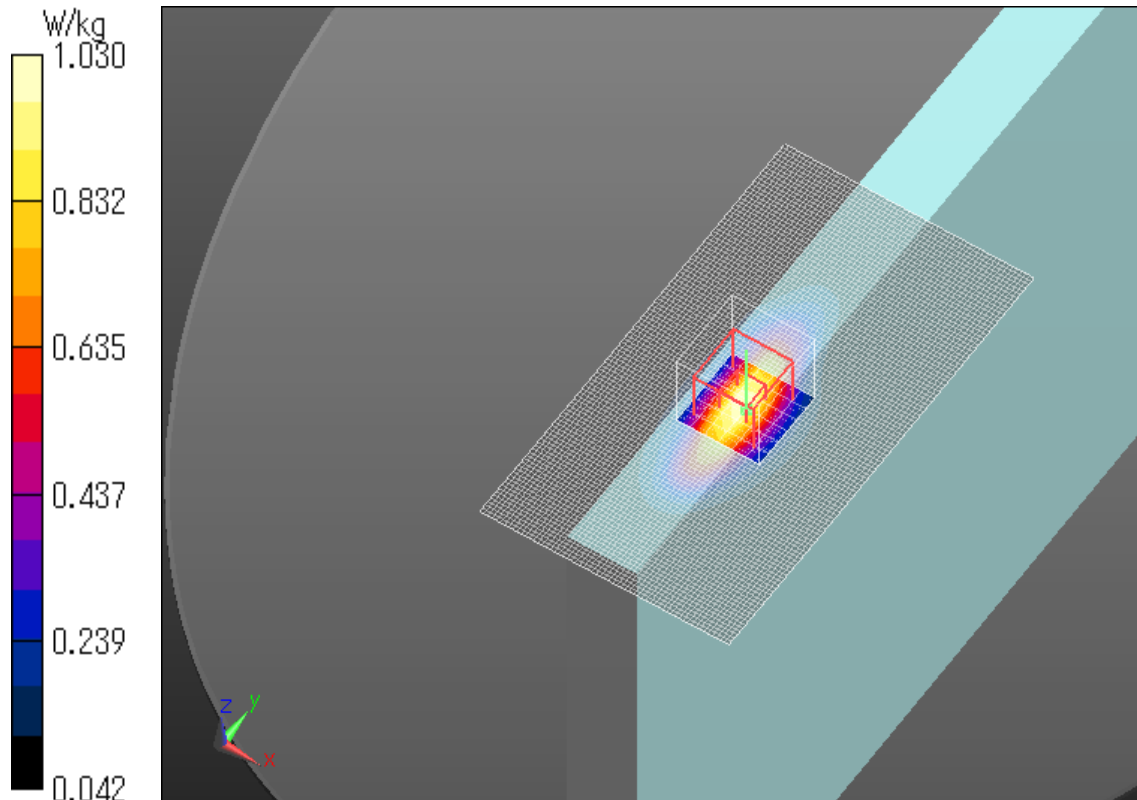

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 836.5MHz Edge1 0mm Power Reduction


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.868$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.07 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 36.48 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 1.46 W/kg
SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.414 W/kg
Maximum value of SAR (measured) = 1.06 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

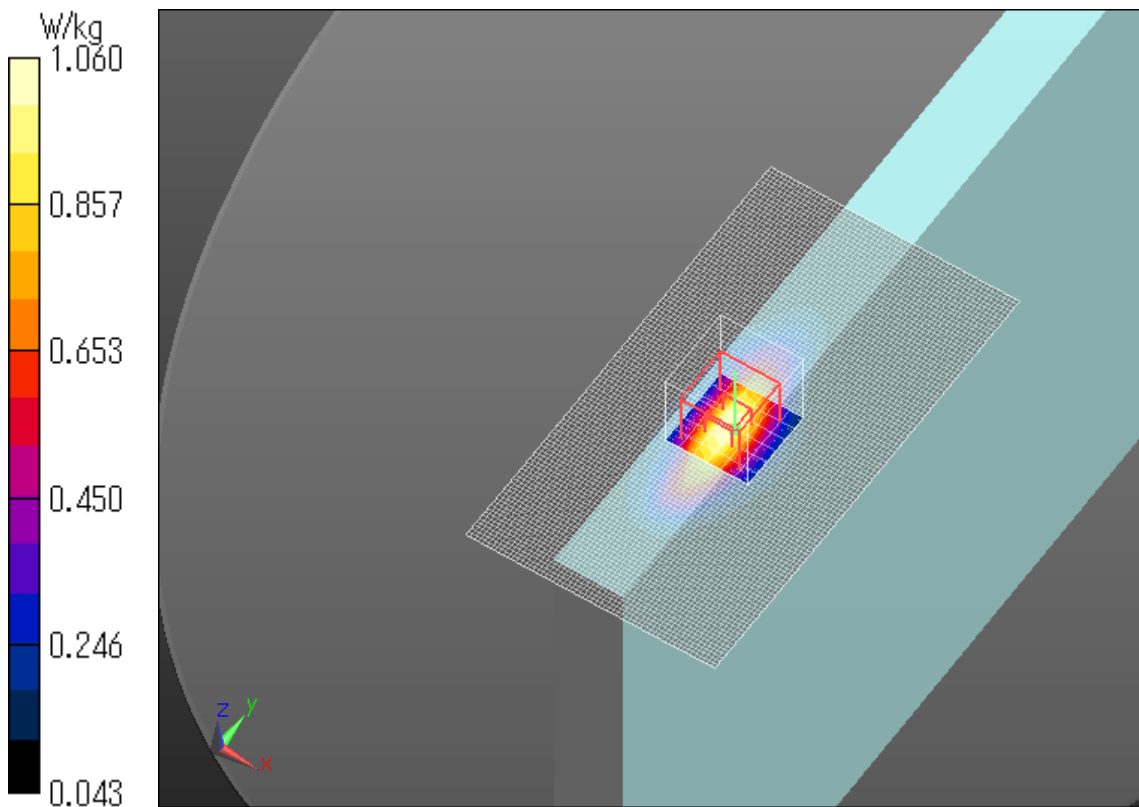

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 841.5MHz Edge1 0mm Power Reduction


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 55.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 36.62 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.422 W/kg
Maximum value of SAR (measured) = 1.09 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

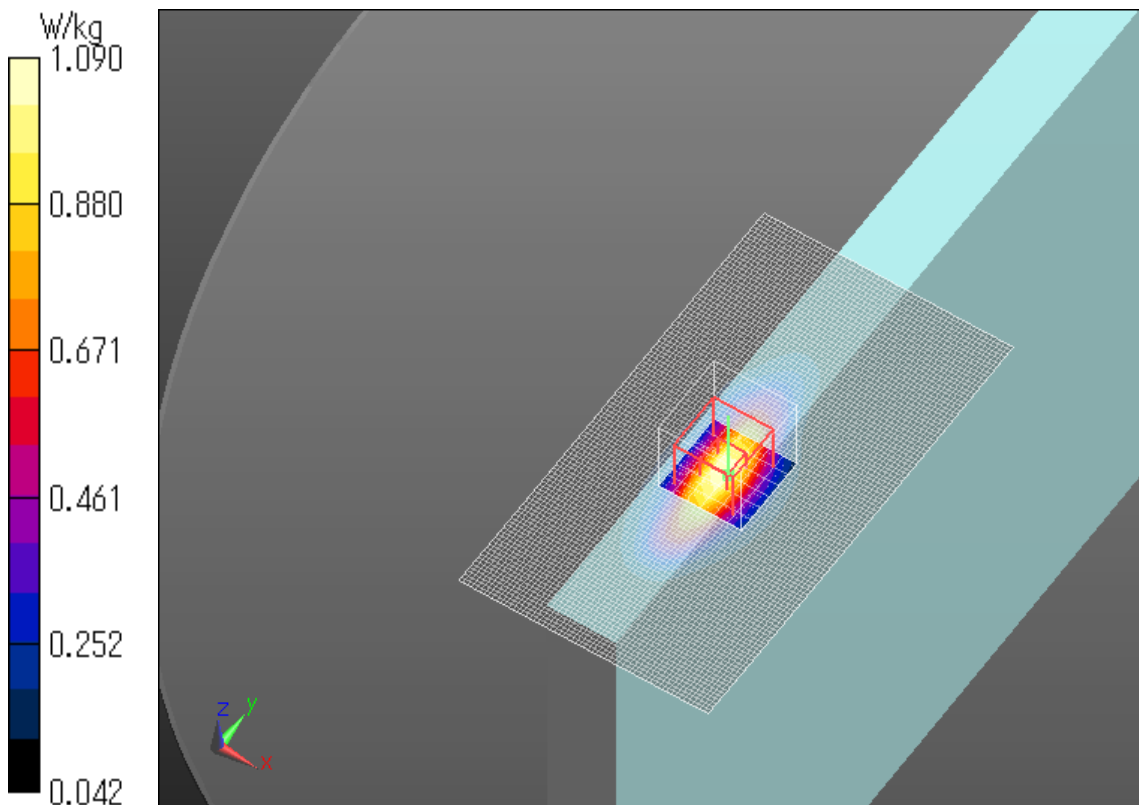

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start19 831.5MHz Edge1 0mm Power Reduction


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 55.905$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 36.77 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.767 W/kg; SAR(10 g) = 0.416 W/kg
Maximum value of SAR (measured) = 1.08 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

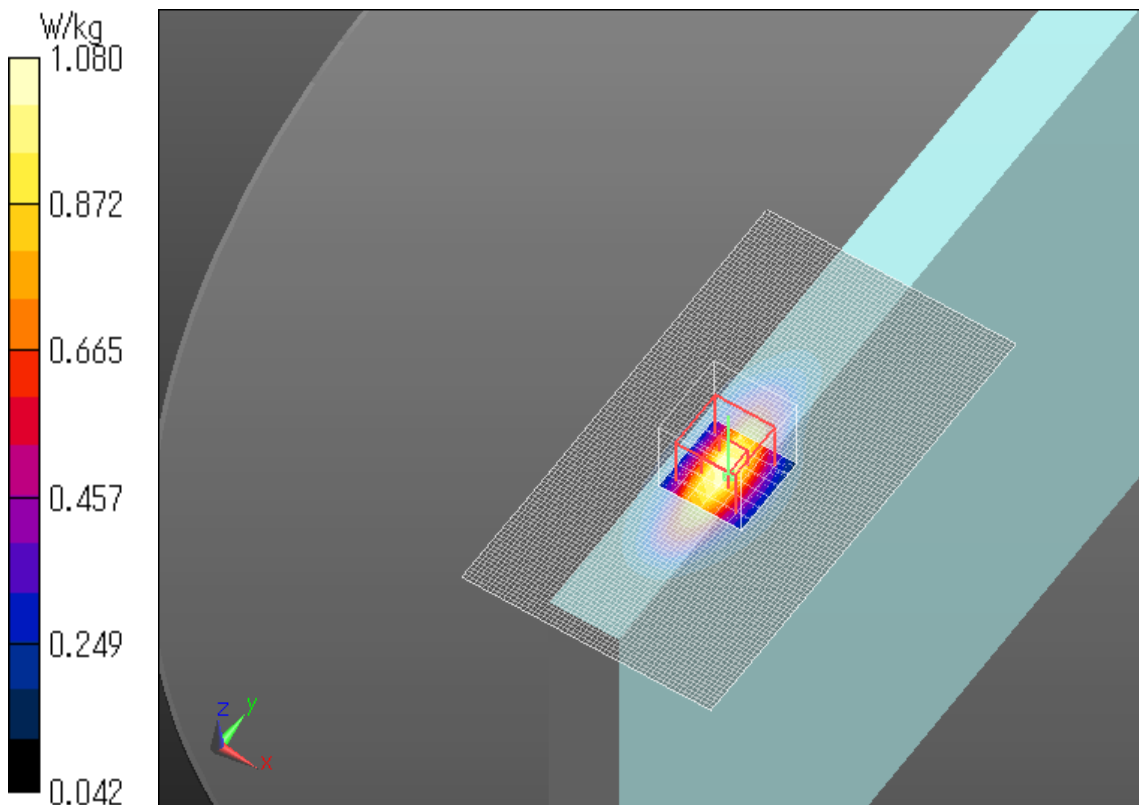

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start19 836.5MHz Edge1 0mm Power Reduction


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.868$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 37.04 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.425 W/kg
Maximum value of SAR (measured) = 1.09 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

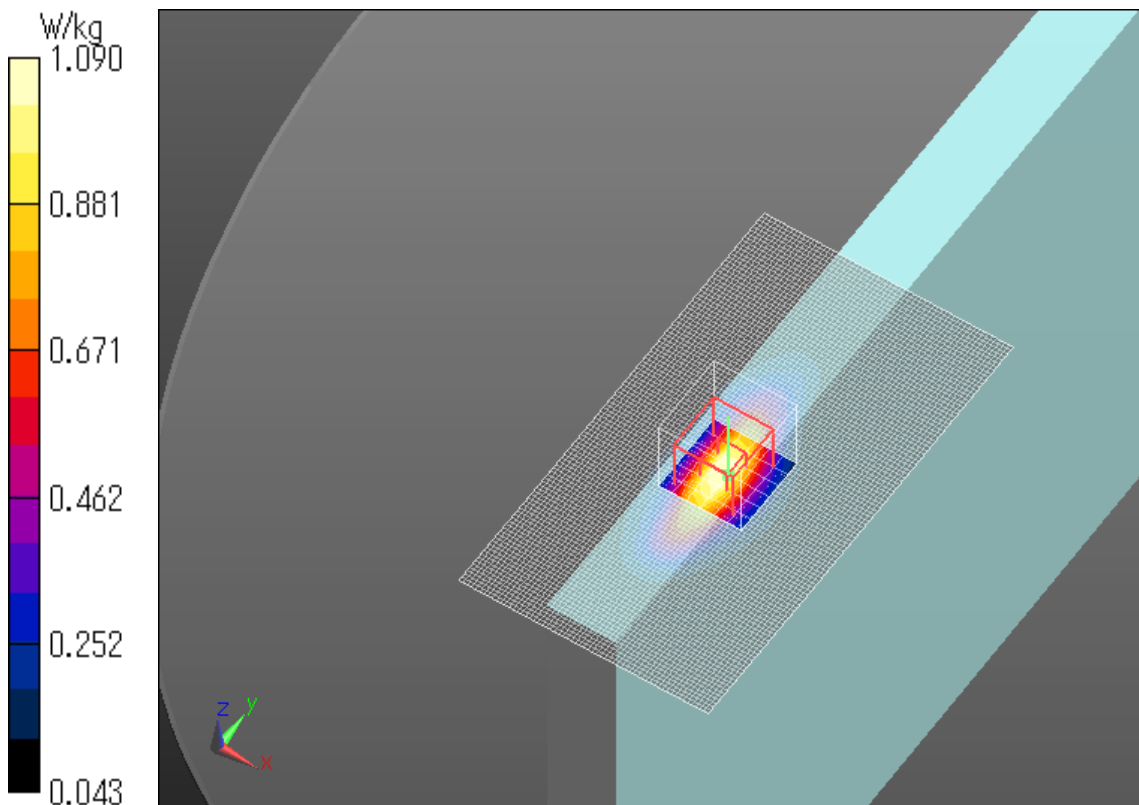

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start39 841.5MHz Edge1 0mm Power Reduction


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 55.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 37.21 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.431 W/kg
Maximum value of SAR (measured) = 1.11 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

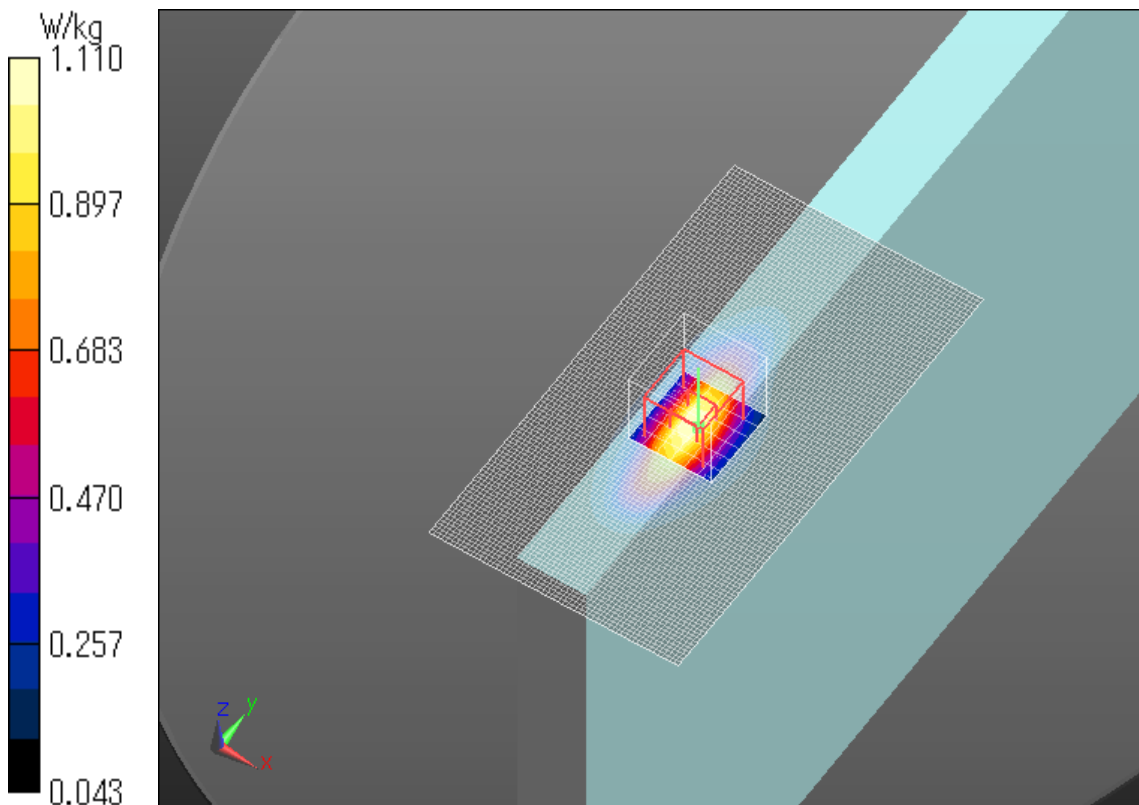

LTE Band26 (Range 824 - 849MHz) QPSK Allocation75 Start0 841.5MHz Edge1 0mm Power Reduction


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 55.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 37.06 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.429 W/kg
Maximum value of SAR (measured) = 1.11 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

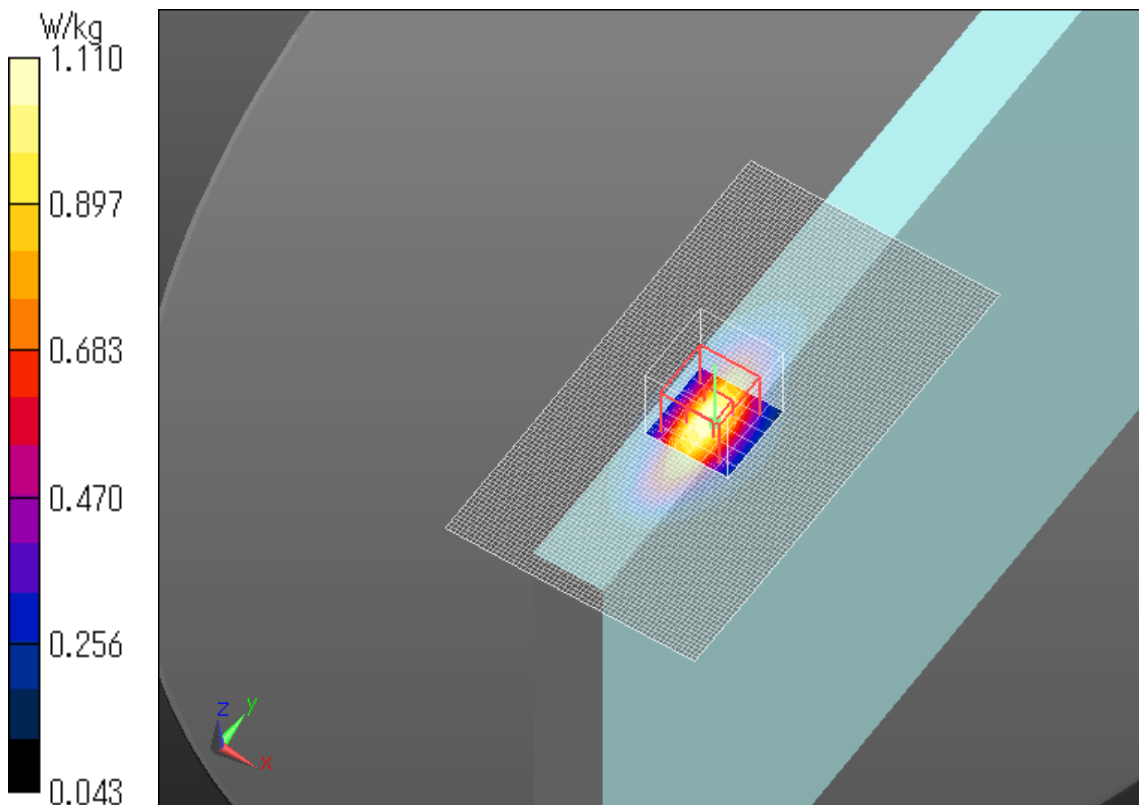

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start0 831.5MHz Rear 0mm Power Reduction


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 55.905$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.416 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 22.43 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.484 W/kg
SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.216 W/kg
Maximum value of SAR (measured) = 0.412 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

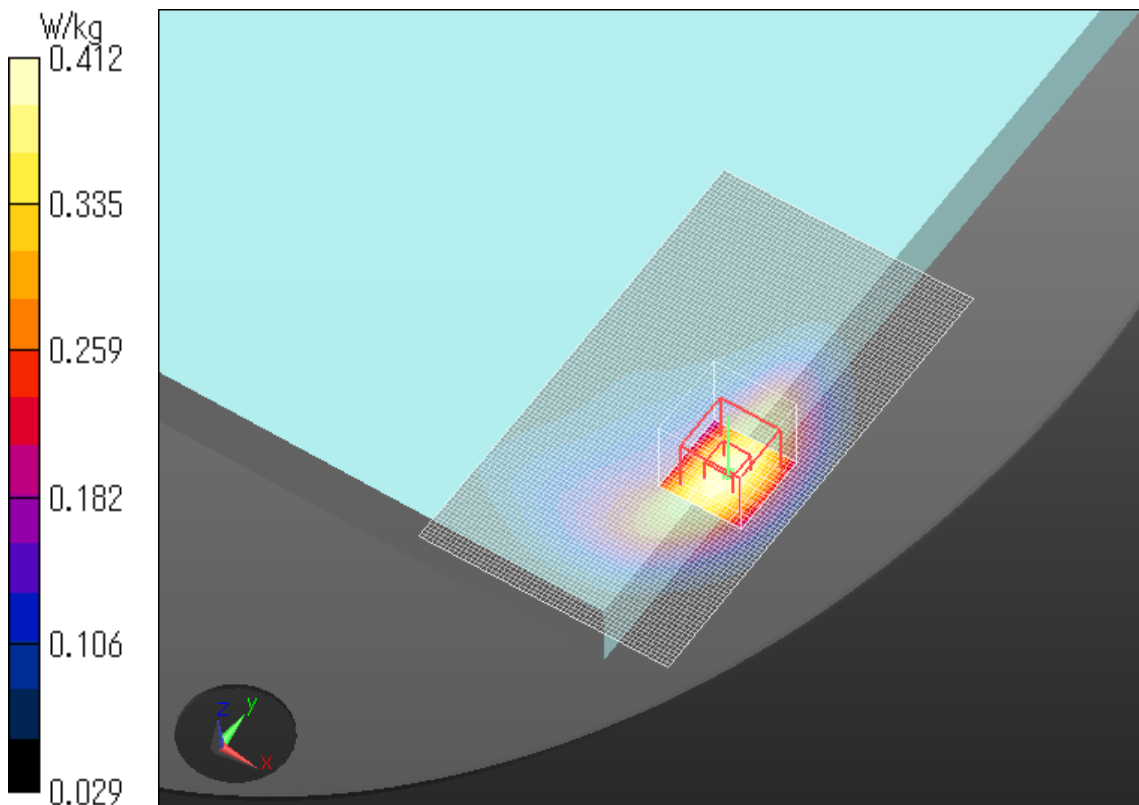

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start19 831.5MHz Rear 0mm Power Reduction


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 55.905$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.395 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 21.88 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.462 W/kg
SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.205 W/kg
Maximum value of SAR (measured) = 0.393 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

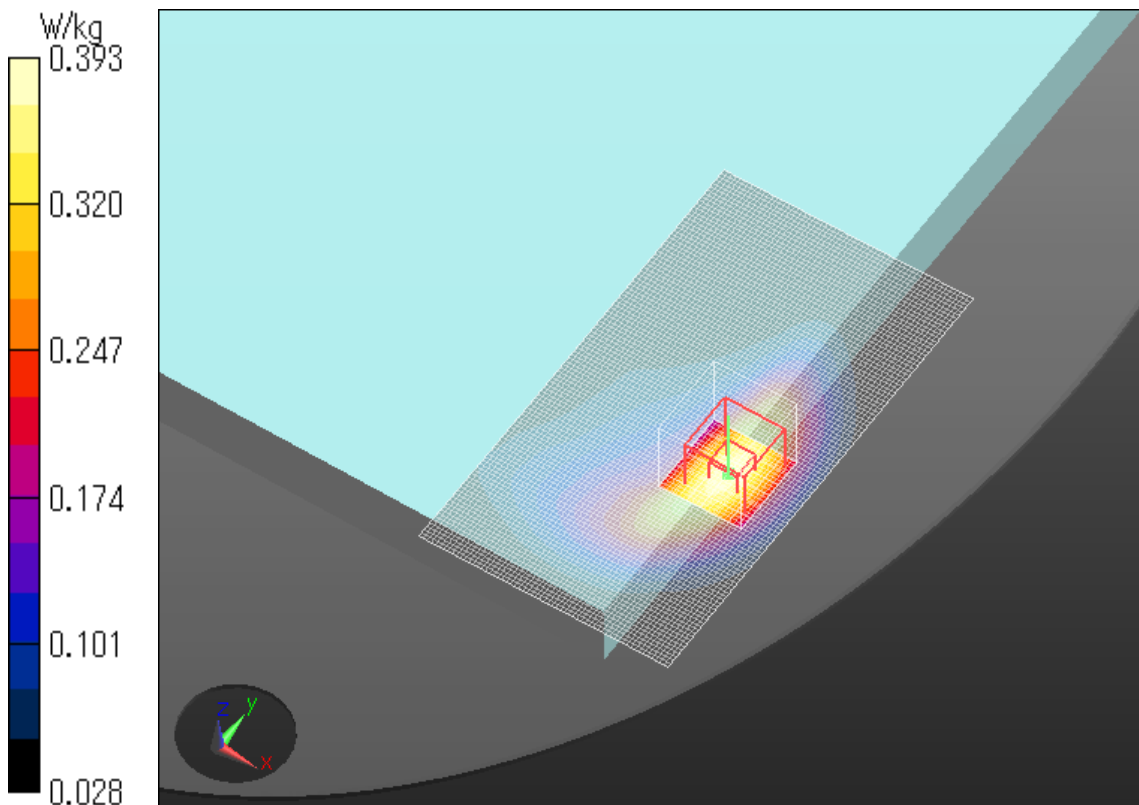

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 836.5MHz Edge1 37mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.868$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.132 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 12.57 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.149 W/kg
SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.080 W/kg
Maximum value of SAR (measured) = 0.132 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

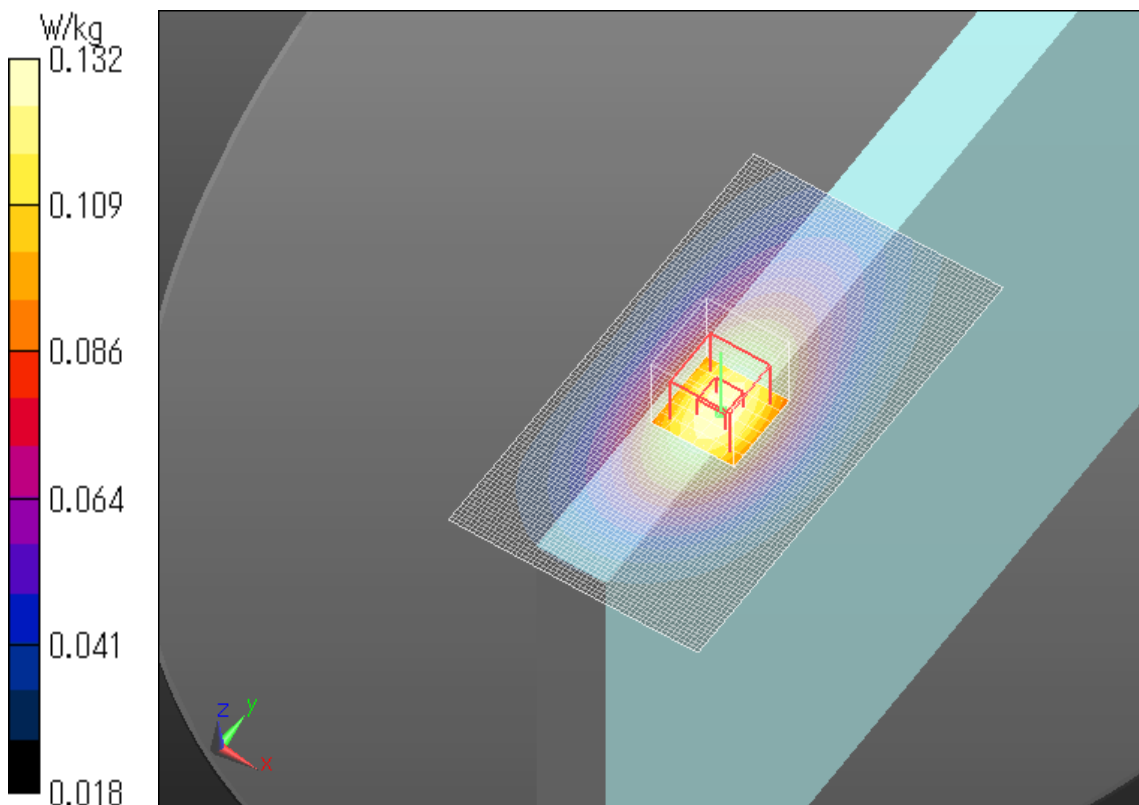

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start39 841.5MHz Edge1 37mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 55.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.109 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.38 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.124 W/kg
SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.066 W/kg
Maximum value of SAR (measured) = 0.109 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

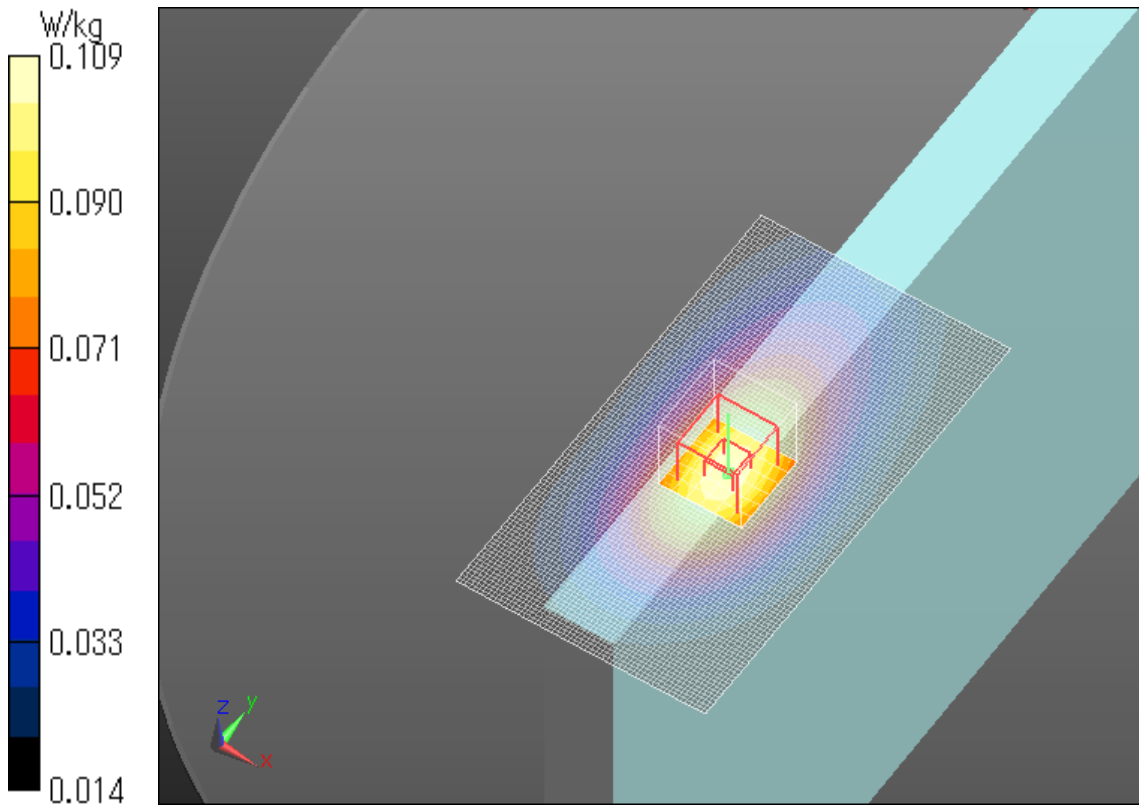

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 836.5MHz Edge2 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.868$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0128 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.086 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.0170 W/kg
SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00693 W/kg
Maximum value of SAR (measured) = 0.0134 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

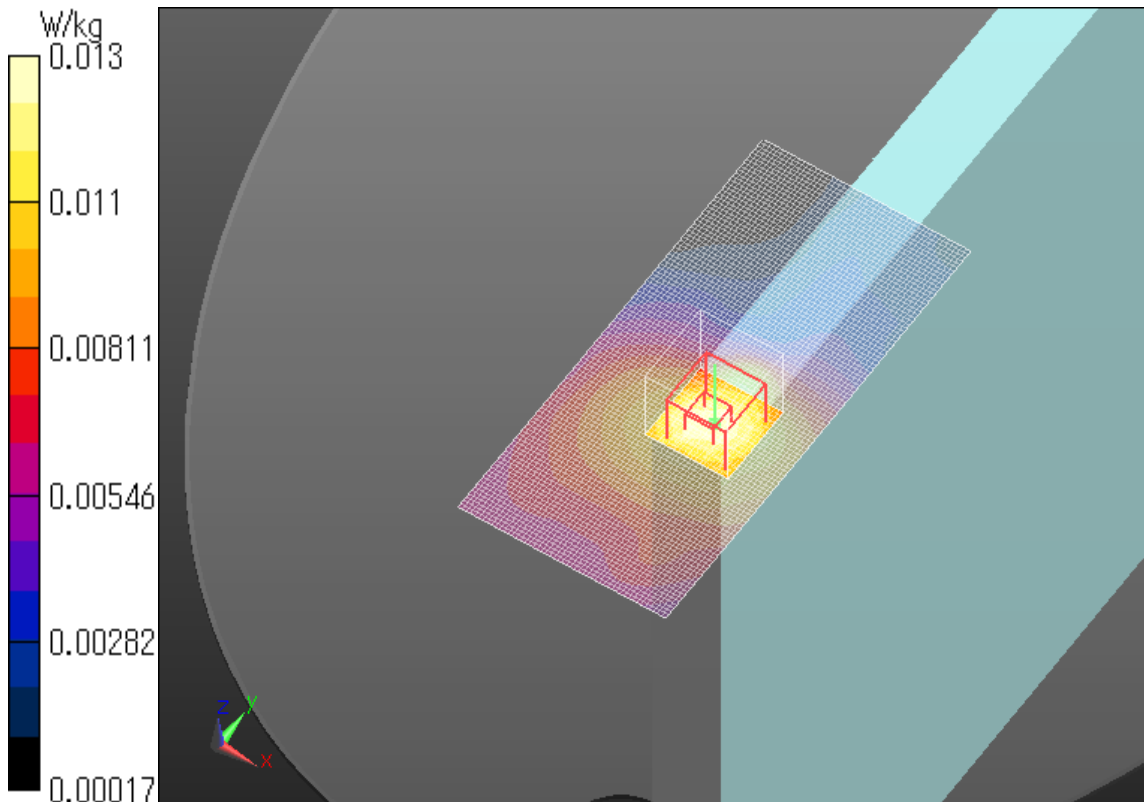

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start39 841.5MHz Edge2 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 55.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.00754 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.175 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.00995 W/kg
SAR(1 g) = 0.00618 W/kg; SAR(10 g) = 0.0041 W/kg
Maximum value of SAR (measured) = 0.00807 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

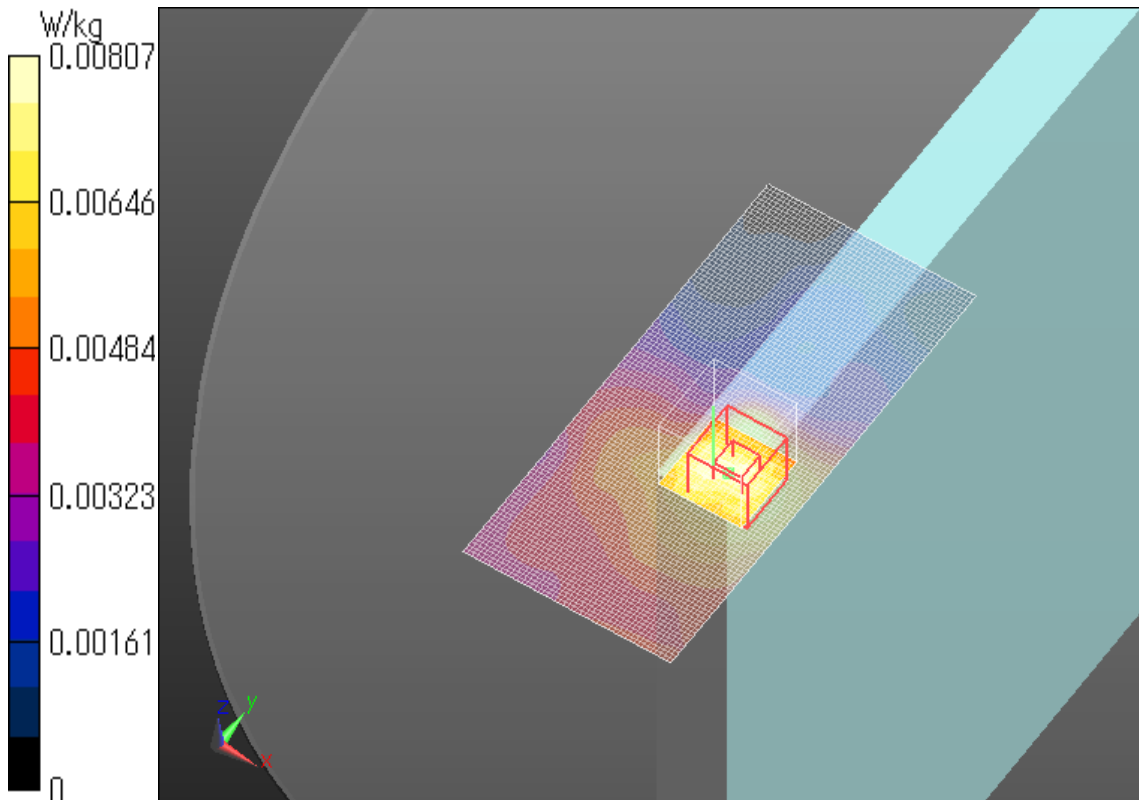

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 836.5MHz Edge2 tilt 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.974$ S/m; $\epsilon_r = 54.66$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.6, 9.6, 9.6); Calibrated: 2016/05/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2016/05/13
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0210 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 4.836 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.0290 W/kg
SAR(1 g) = 0.016 W/kg
Maximum value of SAR (measured) = 0.0218 W/kg

Date: 2017/02/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

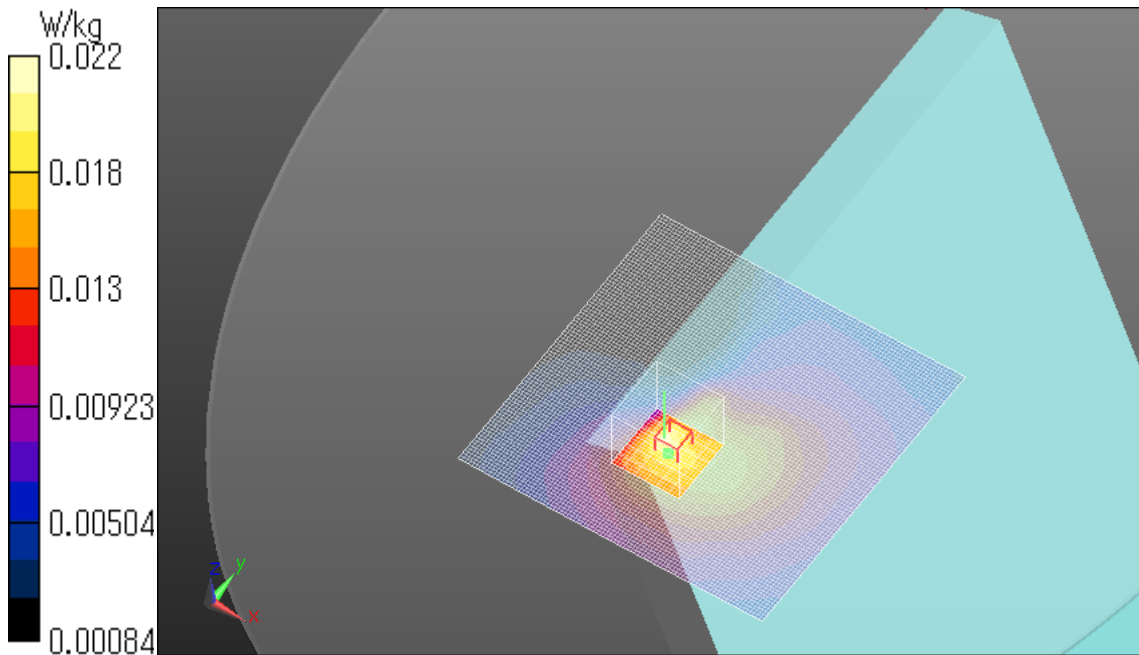

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start39 841.5MHz Edge2 tilt 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.978$ S/m; $\epsilon_r = 54.602$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.6, 9.6, 9.6); Calibrated: 2016/05/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2016/05/13
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0121 W/kg

Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.274 V/m; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 0.0150 W/kg
SAR(1 g) = 0.00849 W/kg
Maximum value of SAR (measured) = 0.0113 W/kg

Date: 2017/02/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

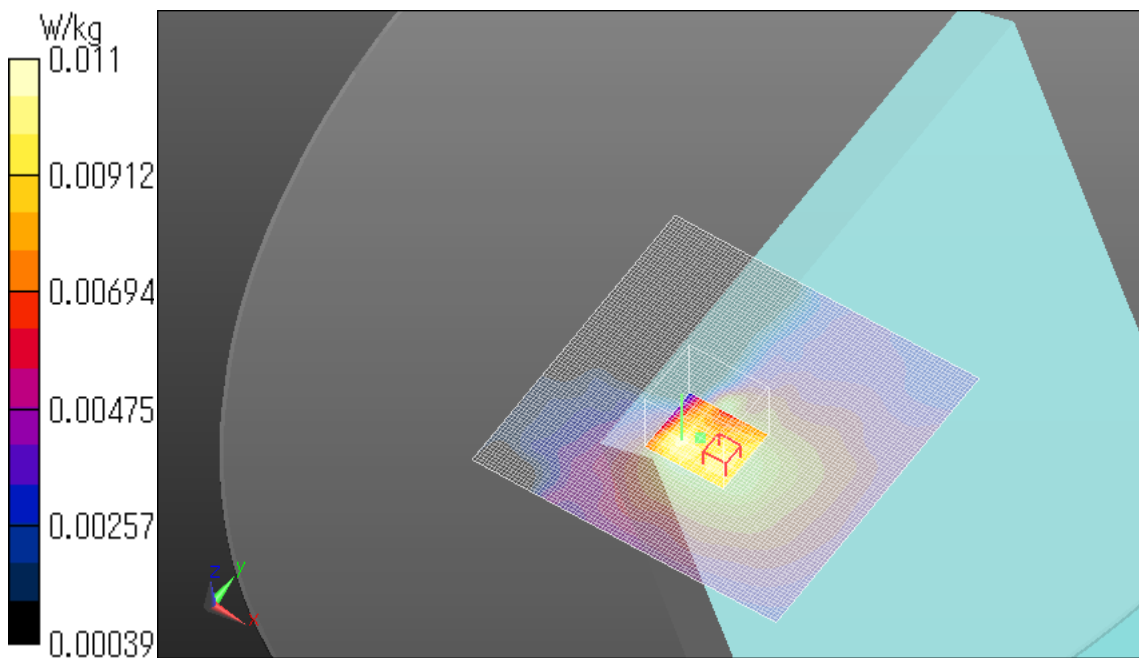

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 836.5MHz Edge3 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.868$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0443 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 7.764 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.0610 W/kg
SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.023 W/kg
Maximum value of SAR (measured) = 0.0493 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

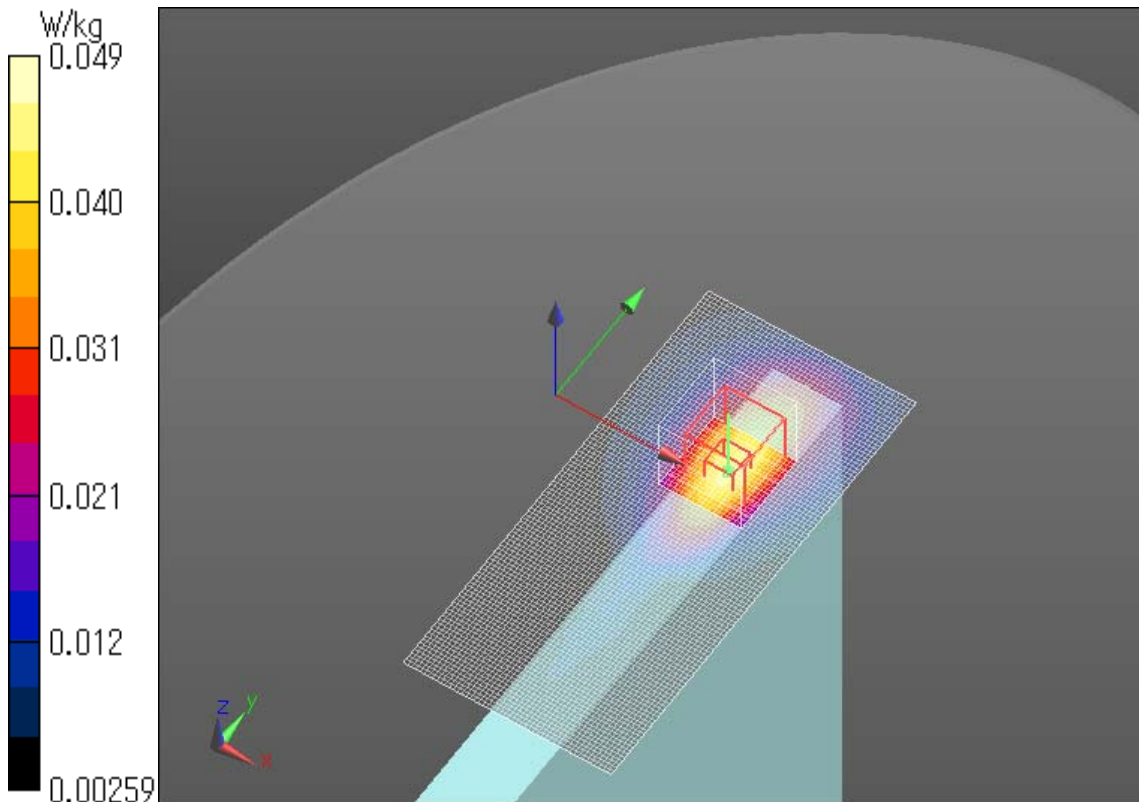

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start39 841.5MHz Edge3 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 55.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0512 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.219 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.0670 W/kg
SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.026 W/kg
Maximum value of SAR (measured) = 0.0547 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

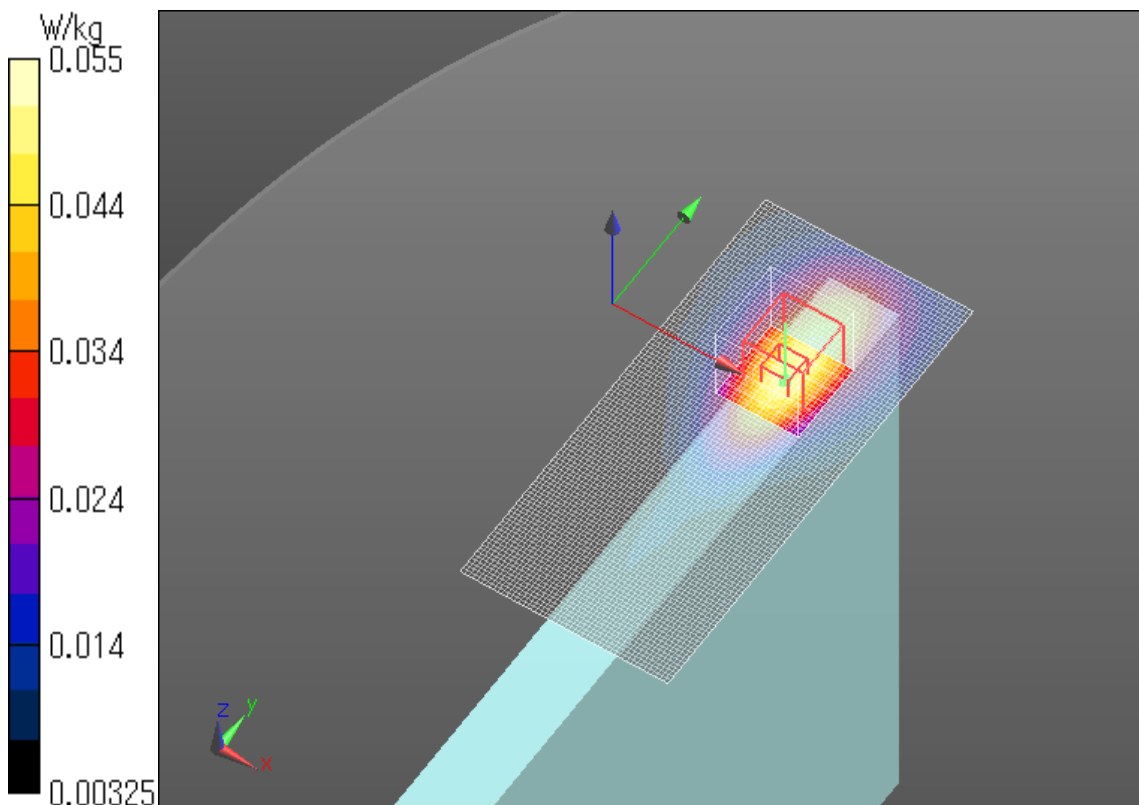

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 836.5MHz Edge4 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.868$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)),
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.270 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 18.27 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.337 W/kg
SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.130 W/kg
Maximum value of SAR (measured) = 0.271 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

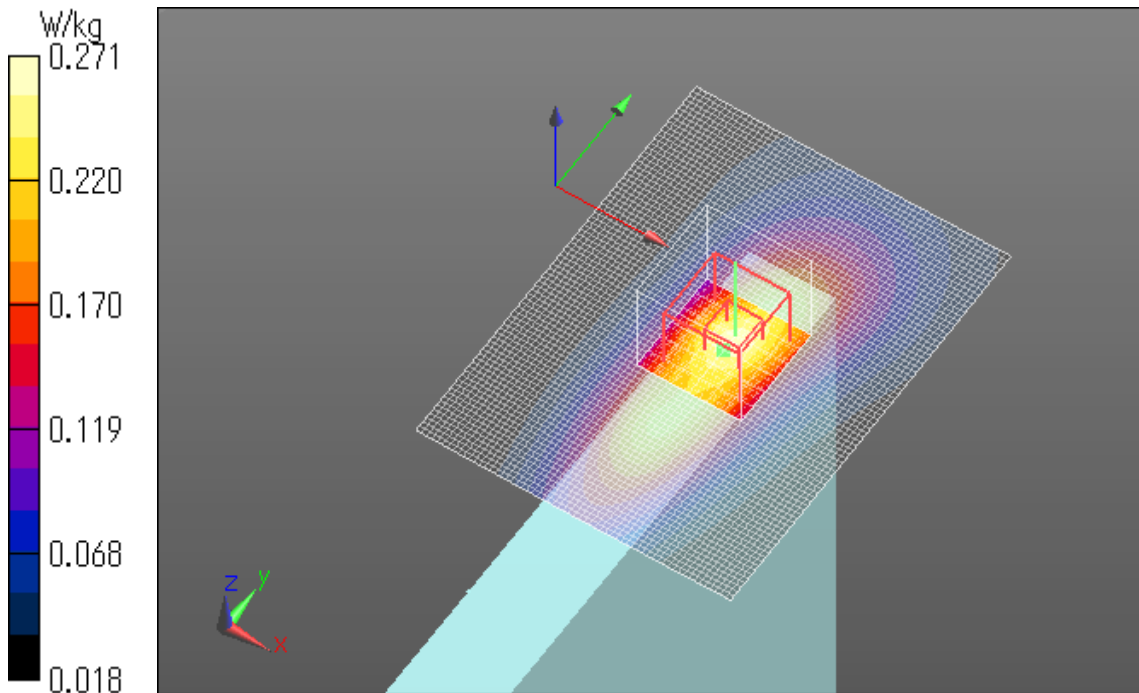

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start39 841.5MHz Edge4 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 55.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.203 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 15.83 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.252 W/kg
SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.098 W/kg
Maximum value of SAR (measured) = 0.203 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

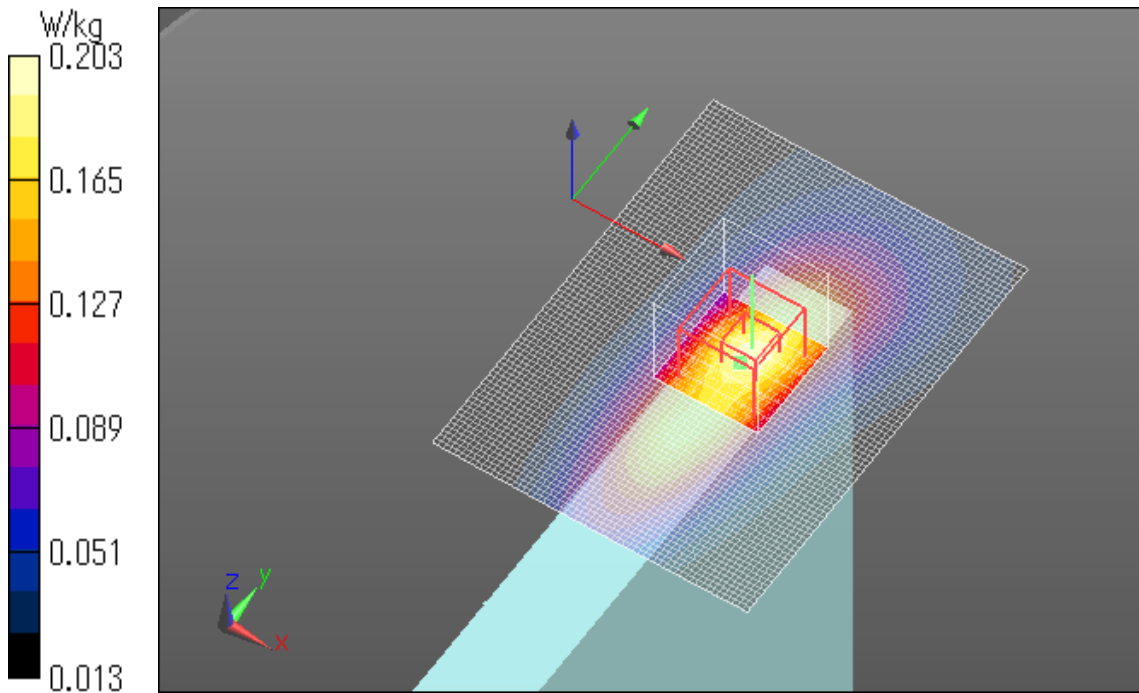

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 836.5MHz Edge4 tilt 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.974$ S/m; $\epsilon_r = 54.66$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.6, 9.6, 9.6); Calibrated: 2016/05/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2016/05/13
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.272 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.52 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.336 W/kg
SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.135 W/kg
Maximum value of SAR (measured) = 0.274 W/kg

Date: 2017/02/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

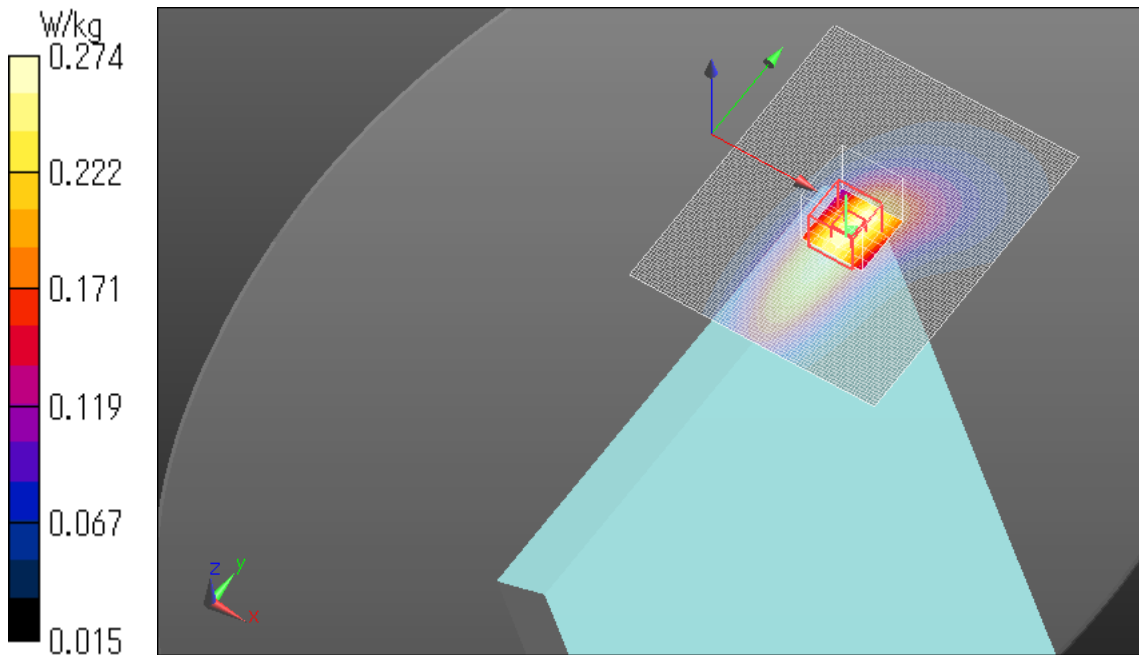

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start39 841.5MHz Edge4 tilt 0mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.978$ S/m; $\epsilon_r = 54.602$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.6, 9.6, 9.6); Calibrated: 2016/05/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2016/05/13
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.216 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.51 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.267 W/kg
SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.108 W/kg
Maximum value of SAR (measured) = 0.219 W/kg

Date: 2017/02/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

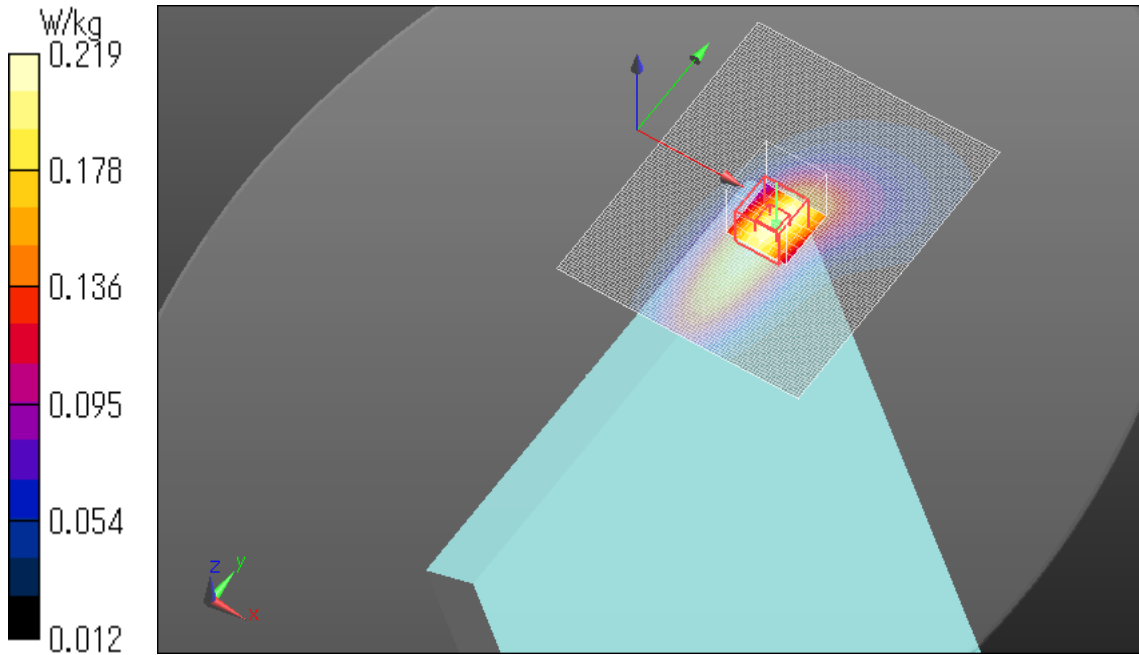

LTE Band26 (Range 824 - 849MHz) QPSK Allocation1 Start74 836.5MHz Rear 20mm


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.868$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)),
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.226 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 16.56 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.256 W/kg
SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.134 W/kg
Maximum value of SAR (measured) = 0.226 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

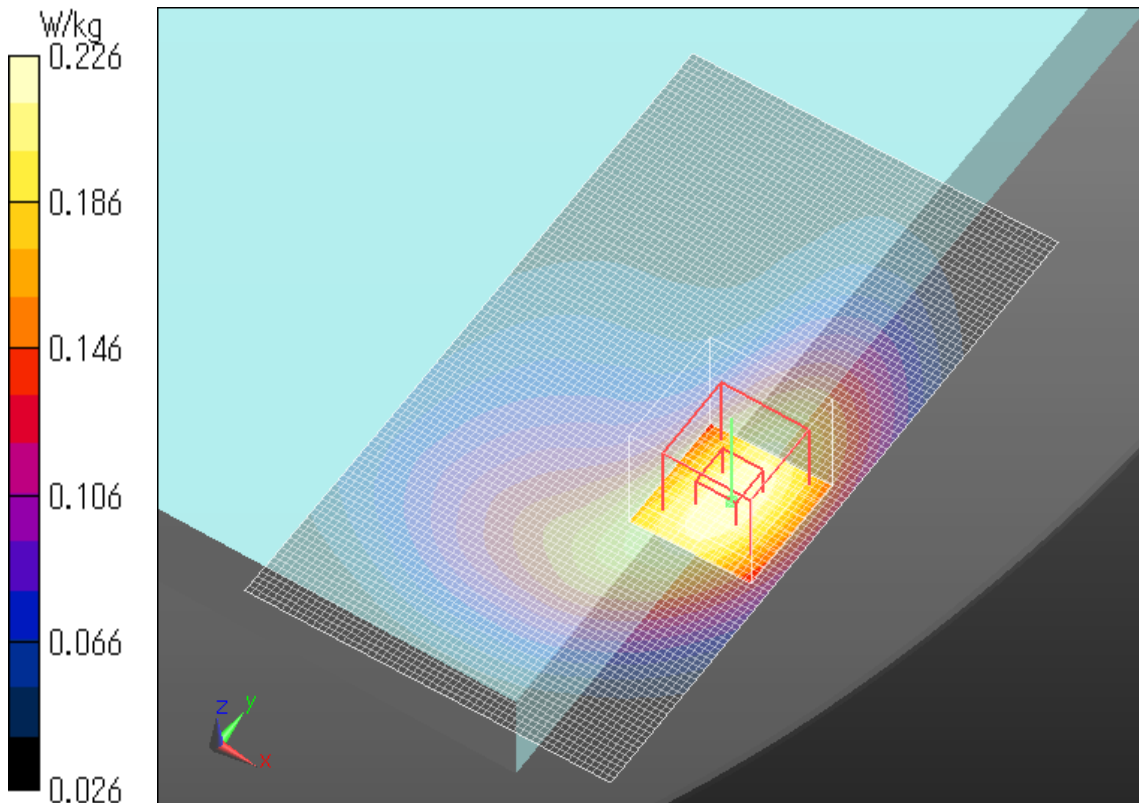

LTE Band26 (Range 824 - 849MHz) QPSK Allocation36 Start39 841.5MHz Rear 20mm

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 26,
E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 55.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.9, 9.9, 9.9); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)),
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2016/07/07
Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.183 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.85 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.210 W/kg
SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.109 W/kg
Maximum value of SAR (measured) = 0.185 W/kg

Date: 2017/01/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

