



REPORT No. : SZ22060333W05

# TEST REPORT

**APPLICANT** : Nortek Security & Control LLC

**PRODUCT NAME** : Edge Panel

**MODEL NAME** : 2GIG-EDG-NA-V

**BRAND NAME** : 2GIG

**FCC ID** : EF400228

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2021-05-10

**TEST DATE** : 2021-05-12 to 2021-05-28

**ISSUE DATE** : 2022-08-15

Edited by: Peng Mi  
Peng Mi (Rapporteur)

Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

Shenzhen Morlab Communications Technology Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555  
Http://www.morlab.cn

Fax: 86-755-36698525  
E-mail: service@morlab.cn





# DIRECTORY

<b>1. Technical Information</b>	<b>3</b>
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Modulation Type and Data Rate of EUT	4
1.4. The Channel Number and Frequency	5
1.5. Test Standards and Results	6
1.6. Environmental Conditions	7
<b>2. 47 CFR Part 15C Requirements</b>	<b>8</b>
2.1. Antenna Requirement	8
2.2. Duty Cycle of Test Signal	9
2.3. Maximum Peak and Average Conducted Output Power	12
2.4. Bandwidth	15
2.5. Conducted Spurious Emissions and Band Edge	22
2.6. Power Spectral Density (PSD)	32
2.7. Conducted Emission	39
2.8. Restricted Frequency Bands	43
2.9. Radiated Emission	53
<b>Annex A Test Uncertainty</b>	<b>66</b>
<b>Annex B Testing Laboratory Information</b>	<b>67</b>

Change History		
Version	Date	Reason for change
1.0	2022-08-15	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Nortek Security & Control LLC
<b>Applicant Address:</b>	5919 Sea Otter Place, Carlsbad, CA 92010, United States
<b>Manufacturer:</b>	Flextronics Electronics Technology (Shenzhen) Co., Ltd
<b>Manufacturer Address:</b>	89 Yong Fu Road, Tong Fu Yu Industrial Park, Fu Yong Town, Bao An District, Shenzhen, Guangdong, 518103, China

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Edge Panel	
<b>Sample No.:</b>	2#	
<b>Hardware Version:</b>	A	
<b>Software Version:</b>	0	
<b>Equipment Type:</b>	WLAN2.4G	
<b>Modulation Type:</b>	DSSS, OFDM	
<b>Operating Frequency Range:</b>	802.11b/g/ n(HT20): 2.412GHz - 2.462GHz	
<b>Antenna Type:</b>	FPC Antenna	
<b>Antenna Gain:</b>	3.13dBi	
<b>Accessory Information:</b>	Battery	
	<b>Brand Name:</b>	Highpower
	<b>Model No.:</b>	115150
	<b>Serial No.:</b>	N/A
	<b>Capacity:</b>	4020mAh
	<b>Rated Voltage:</b>	3.8V
	<b>Charge Limit:</b>	4.4V
	<b>Manufacturer:</b>	Huizhou Highpower Technology Co.,LTD.

<b>Accessory Information:</b>	Adaptor	
	Brand Name:	ZBPOWER
	Model No.:	ZB-H140017
	Serial No.:	N/A
	Rated Output:	14.00V $\pm$ 1.70A
	Rated Input:	100-240V $\sim$ 50/60Hz, Max 0.6A
	Manufacturer:	Huizhou Zhong bang electronics co., ltd.

**Note 1:** This test report is variant from the original report (Report No.: SZ22060032W05), based on the similarity between before, only the LTE module is replaced and the others are the same as before. No other changes. The changes do not affect the results in this report.

**Note 2:** We use the dedicated software to control the EUT continuous transmission.

**Note 3:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) <sup>Note1</sup>
DSSS (802.11b)	DBPSK	<b>1</b>
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	<b>6 / 9</b>
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n-20MHz)	BPSK	<b>6.5</b>
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65

**Note1:** The worst-case mode(bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.



## 1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/ n(HT20)	<b>1</b>	<b>2412</b>	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	<b>11</b>	<b>2462</b>
	5	2432		
	<b>6</b>	<b>2437</b>		
	7	2442		

**Note1:** The Lowest Channel (1), Middle Channel (6) and Highest Channel (11) was selected test for 802.11b/g/n(HT20) mode.



## 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	May 12&13, 2021	Liu Bo	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	May 27, 2021	Liu Bo	PASS	No deviation
4	15.247(a)	Bandwidth	May 13, 2021	Liu Bo	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	May 13, 2021	Liu Bo	PASS	No deviation
6	15.247(e)	Power spectral density (PSD)	May 13, 2021	Liu Bo	PASS	No deviation
7	15.207	Conducted Emission	May 19, 2021	Wu Runfeng	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	May 20&27&28, 2021	Lin Jiayong	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	May 27&28, 2021	Lin Jiayong	PASS	No deviation

**Note 1:** The test results of these test items in this report refer to the test report (Report No.: SZ22060032W05).

**Note 2:** The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

**Note 3:** The path loss during the RF test is calibrated to correct the results by the offset setting in



the test equipments. The ref offset 11.5dB contains two parts that cable loss 1.5dB and Attenuator 10dB.

**Note 4:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 5:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

## 1.6.Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



## **2. 47 CFR Part 15C Requirements**

### **2.1. Antenna Requirement**

#### **2.1.1. Applicable Standard**

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **2.1.2. Result: Compliant**

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



## 2.2. Duty Cycle of Test Signal


### 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration ( $T$ ) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed  $T$  at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle ( $D$ ). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be nonconstant.

### 2.2.2. Test Description

#### Test Setup:

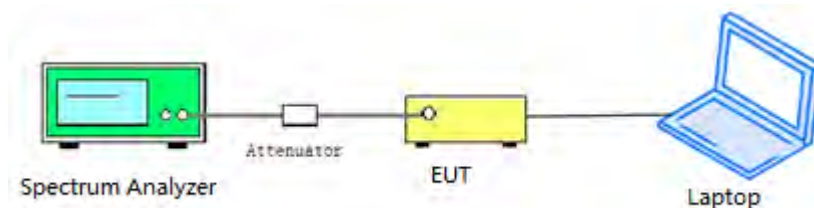

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.




### 2.2.3. Test Result


#### A. Test Verdict:

Test Mode	Duty Cycle(%) (D)	Duty Factor ( $10 \cdot \lg[1/D]$ )
802.11b	98.59	0.06
802.11g	92.56	0.34
802.11n(HT20)	92.08	0.36


#### B. Test Plot:

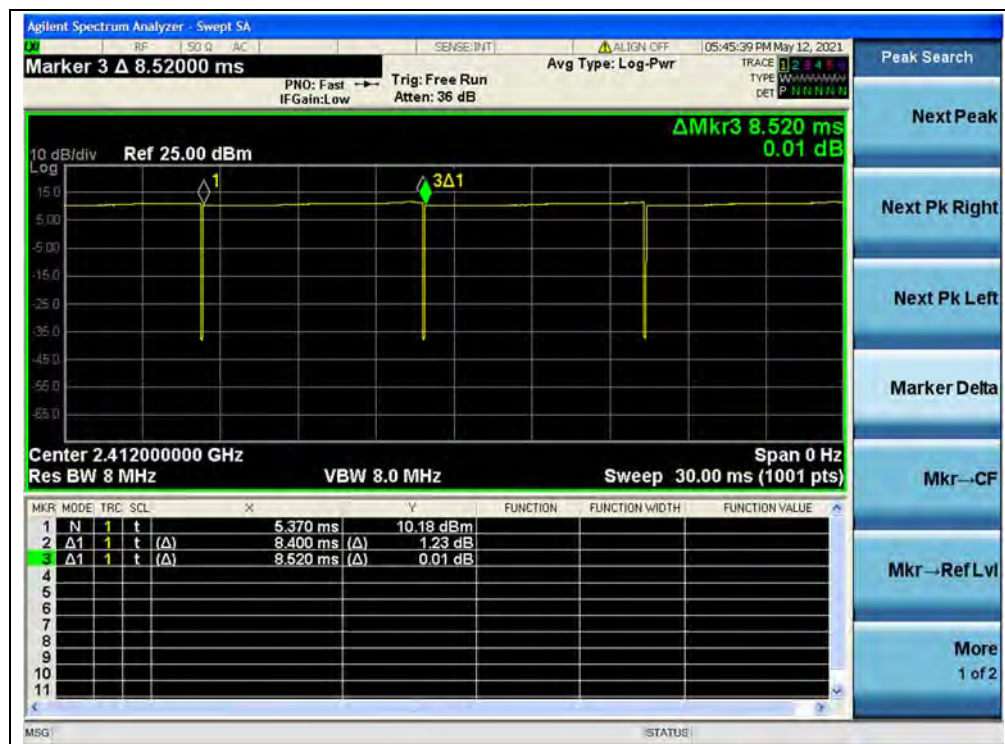

(Channel 1, 2412MHz, 802.11b)

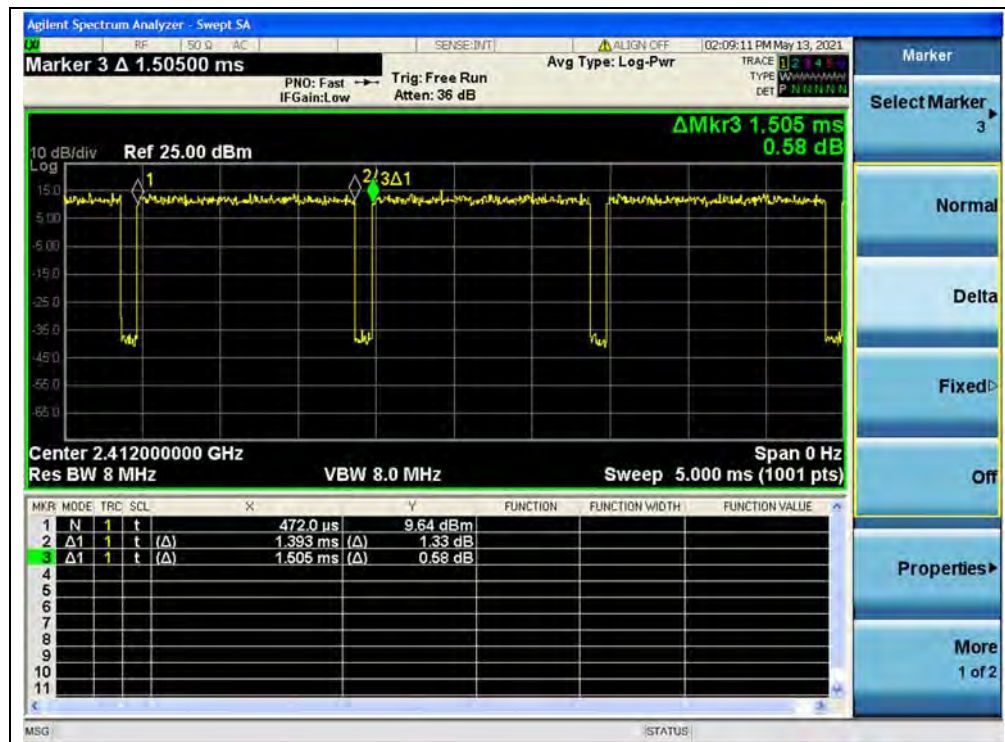

(Channel 1, 2412MHz,802.11g)

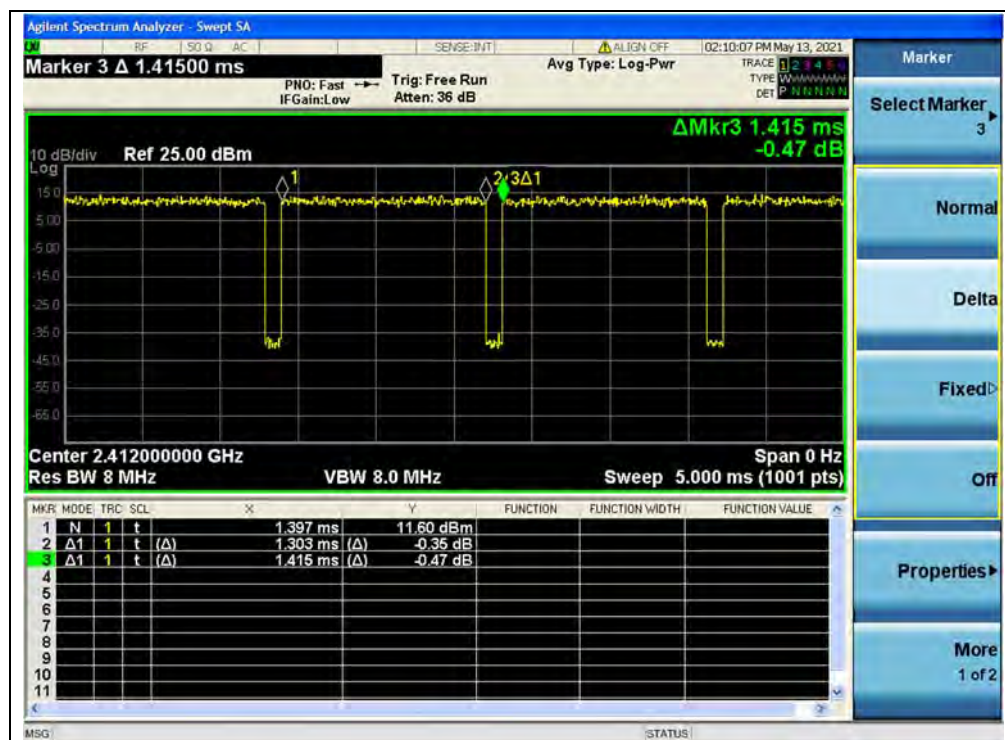

(Channel 1, 2412MHz, 802.11n(HT20))

## 2.3. Maximum Peak and Average Conducted Output Power


### 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### Test Setup:

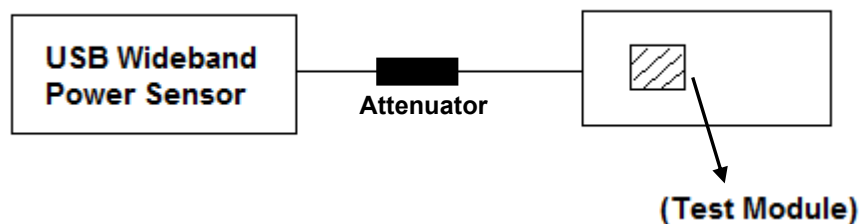

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



### 2.3.3. Test Result

#### Maximum Peak Conducted Output Power

##### 802.11b Test Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	17.12	0.052	30	1	PASS
6	2437	21.02	0.126			PASS
11	2462	17.03	0.050			PASS

##### 802.11g Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	20.02	0.100	30	1	PASS
6	2437	23.87	0.244			PASS
11	2462	20.11	0.103			PASS

##### 802.11n(HT20) Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	20.03	0.101	30	1	PASS
6	2437	24.21	0.264			PASS
11	2462	<b>24.25</b>	<b>0.266</b>			PASS

**Maximum Average Conducted Output Power****802.11b Test Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	14.20	0.06	14.26	0.027	30	1	PASS
6	2437	18.56		18.62	0.073			PASS
11	2462	14.21		14.27	0.027			PASS

**802.11g Test mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	15.44	0.34	15.78	0.038	30	1	PASS
6	2437	19.02		19.36	0.086			PASS
11	2462	15.36		15.70	0.037			PASS

**802.11n(HT20) Test mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	15.50	0.36	15.86	0.039	30	1	PASS
6	2437	19.46		<b>19.82</b>	<b>0.096</b>			PASS
11	2462	15.52		15.88	0.039			PASS




## 2.4. Bandwidth

### 2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.4.2. Test Description

#### Test Setup:

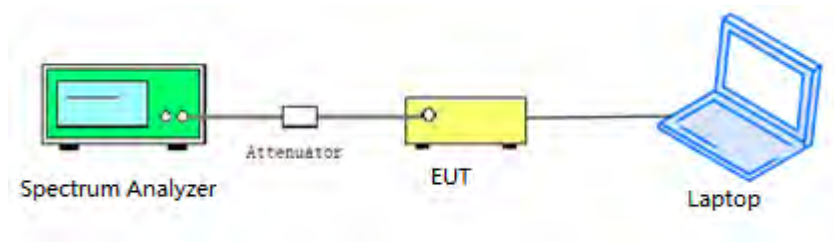

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ω; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.

#### 2.4.4. Test Result

##### 802.11b Test mode

##### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.05	≥500	PASS
6	2437	8.09	≥500	PASS
11	2462	9.05	≥500	PASS

##### B. Test Plot:



(Channel 1, 802.11b)





(Channel 6, 802.11b)



(Channel 11, 802.11b)



## 802.11g Test mode

### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.10	≥500	PASS
6	2437	15.71	≥500	PASS
11	2462	15.31	≥500	PASS

### B. Test Plot:



(Channel 1, 802.11g)




(Channel 6, 802.11g)



(Channel 11, 802.11g)


**802.11n(HT20) Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.31	≥500	PASS
6	2437	15.10	≥500	PASS
11	2462	15.12	≥500	PASS

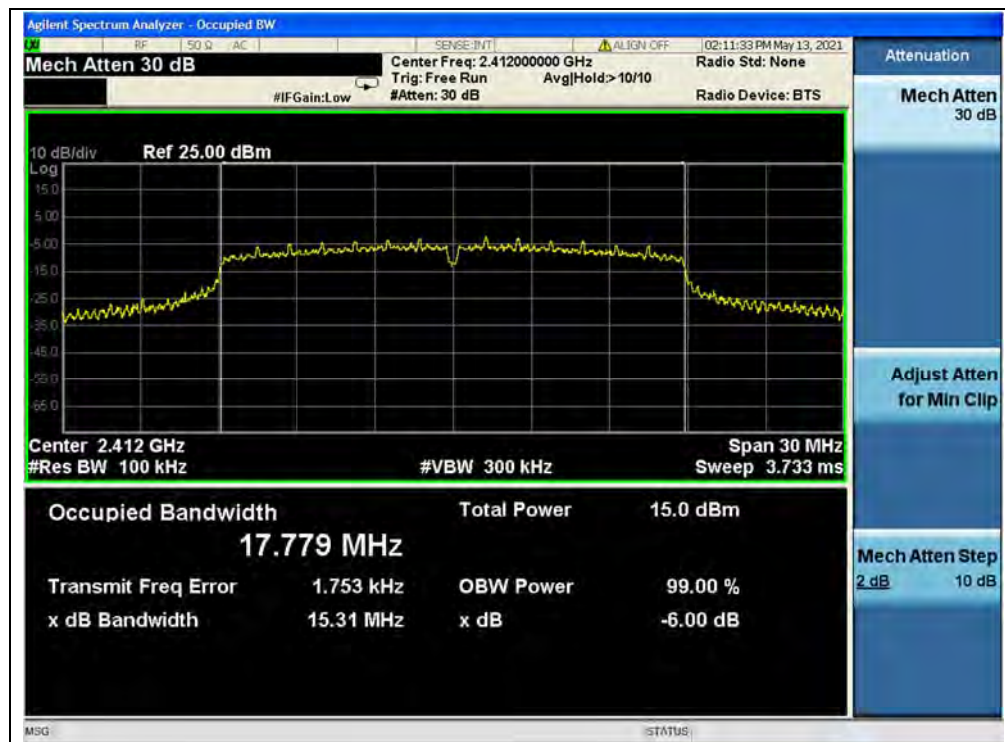**B. Test Plot:**

(Channel 1, 802.11n(HT20))



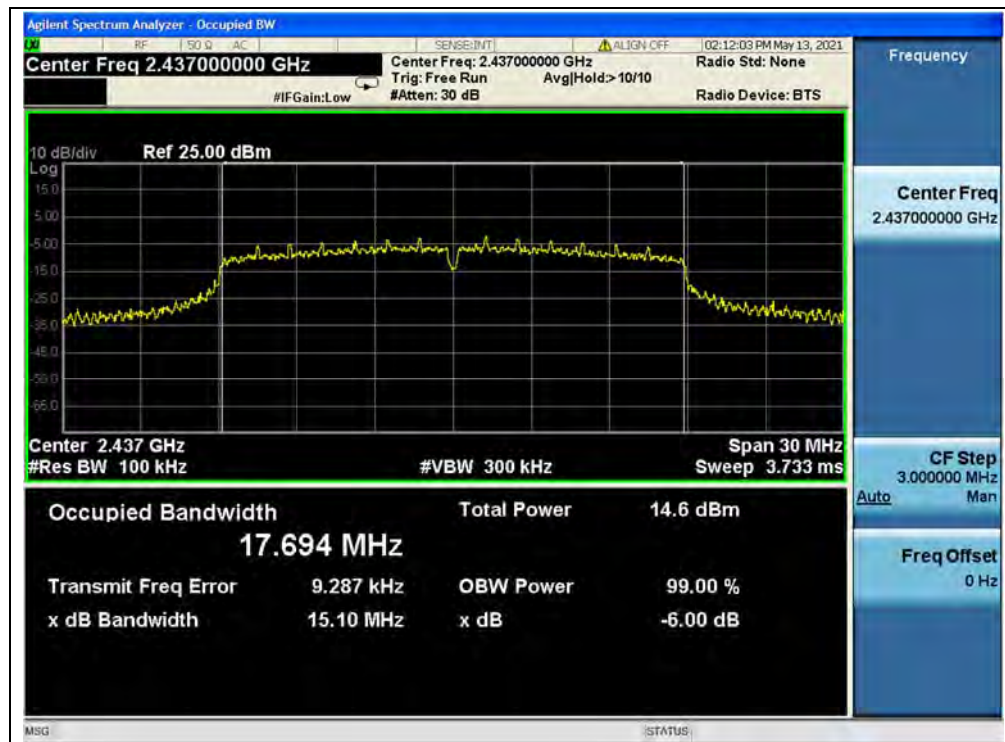

(Channel 6, 802.11n(HT20))



(Channel 11, 802.11n(HT20))


## 2.5. Conducted Spurious Emissions and Band Edge

### 2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2. Test Description

#### Test Setup:

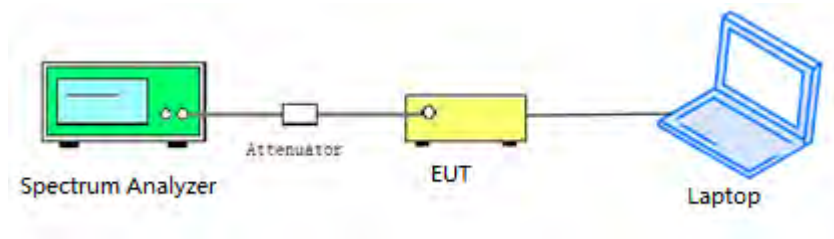

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.




## 2.5.4. Test Result

### 802.11b Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.57	8.84	-11.16	PASS
6	2437	-45.35	7.47	-12.53	PASS
11	2462	-44.79	7.35	-12.65	PASS

#### B. Test Plot:

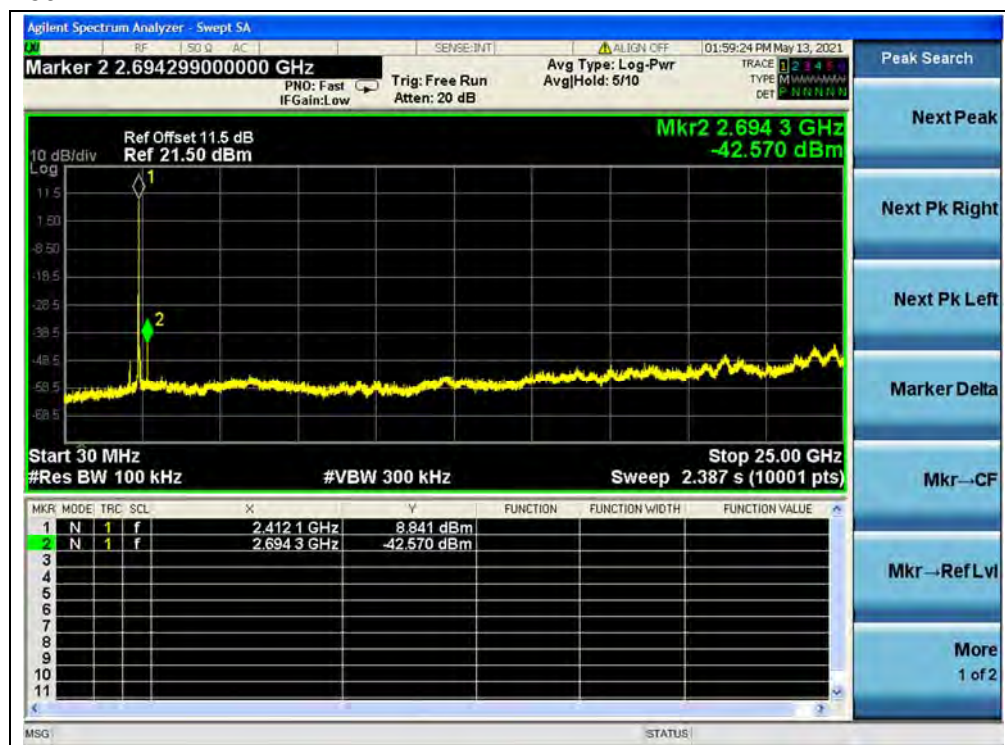

(Channel = 1, 30MHz to 25GHz)

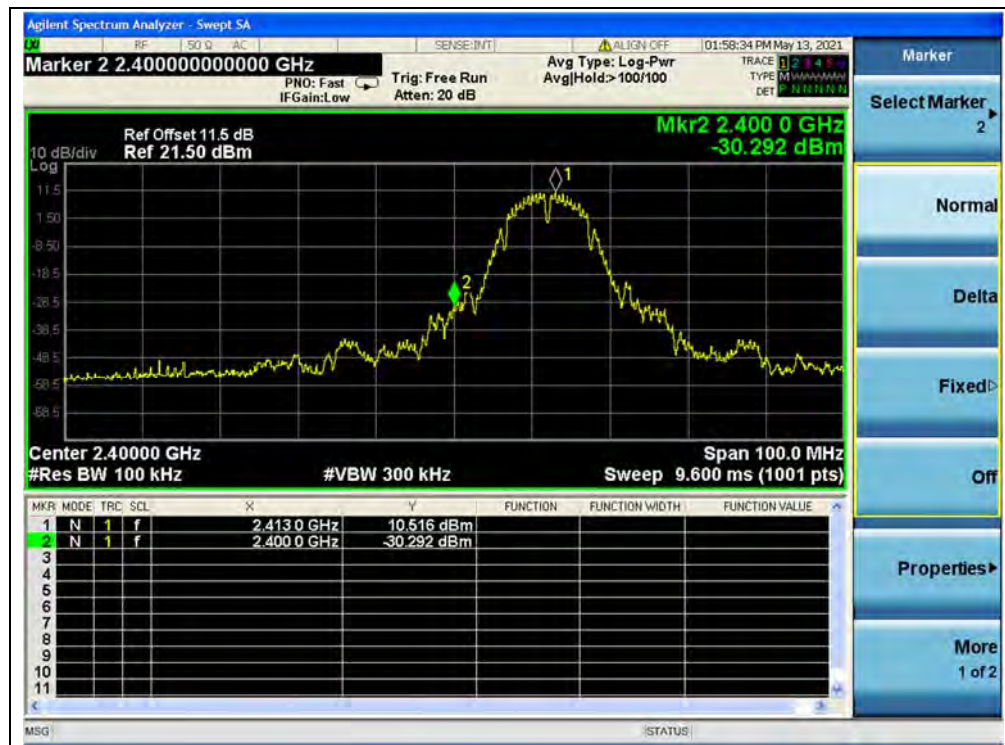


(Band Edge, Channel = 1)



(Channel = 6, 30MHz to 25GHz)



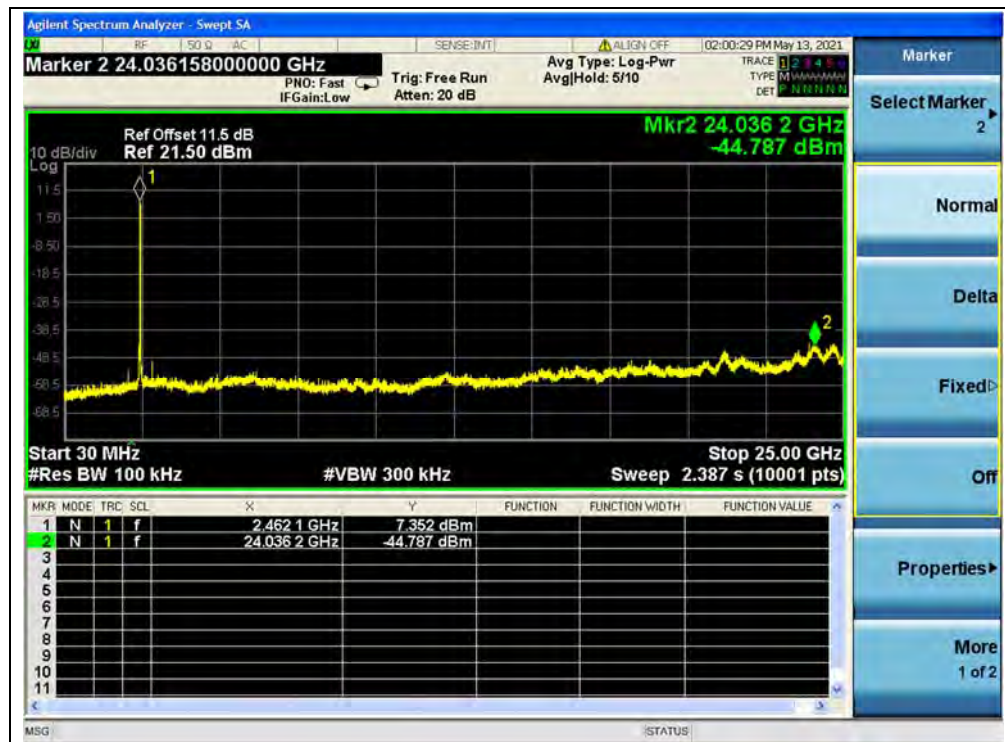

(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)




## 802.11g Test mode

### A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-43.11	6.00	-14.00	PASS
6	2437	-42.95	7.03	-12.97	PASS
11	2462	-44.66	5.63	-14.37	PASS


### B. Test Plot:

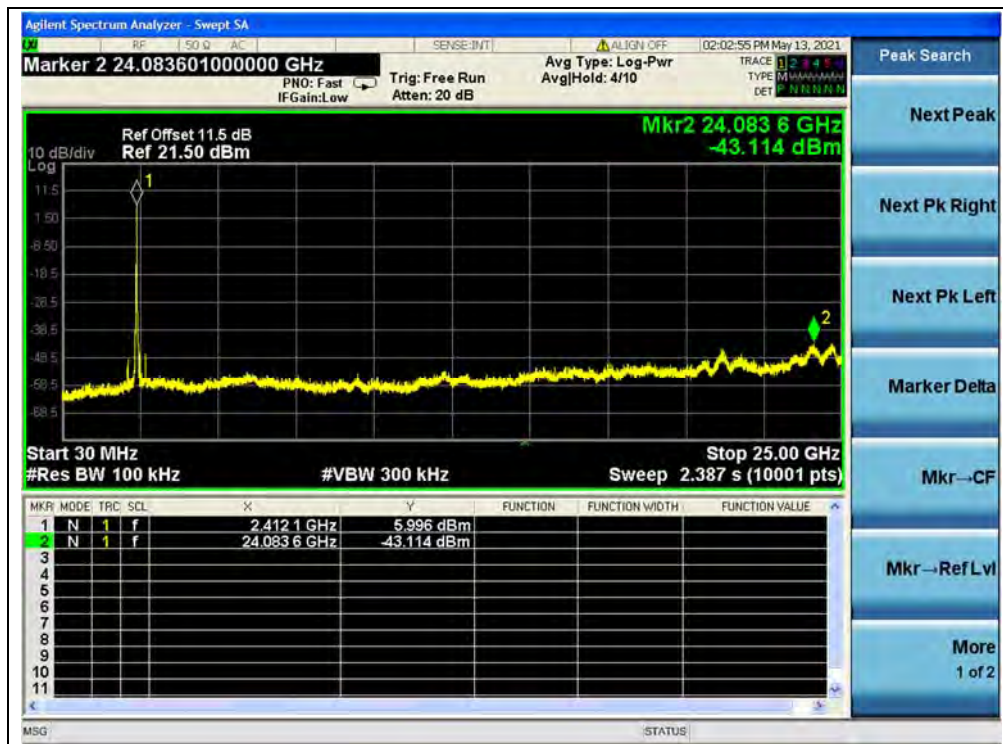

(Channel = 1, 30MHz to 25GHz)




(Band Edge, Channel = 1)

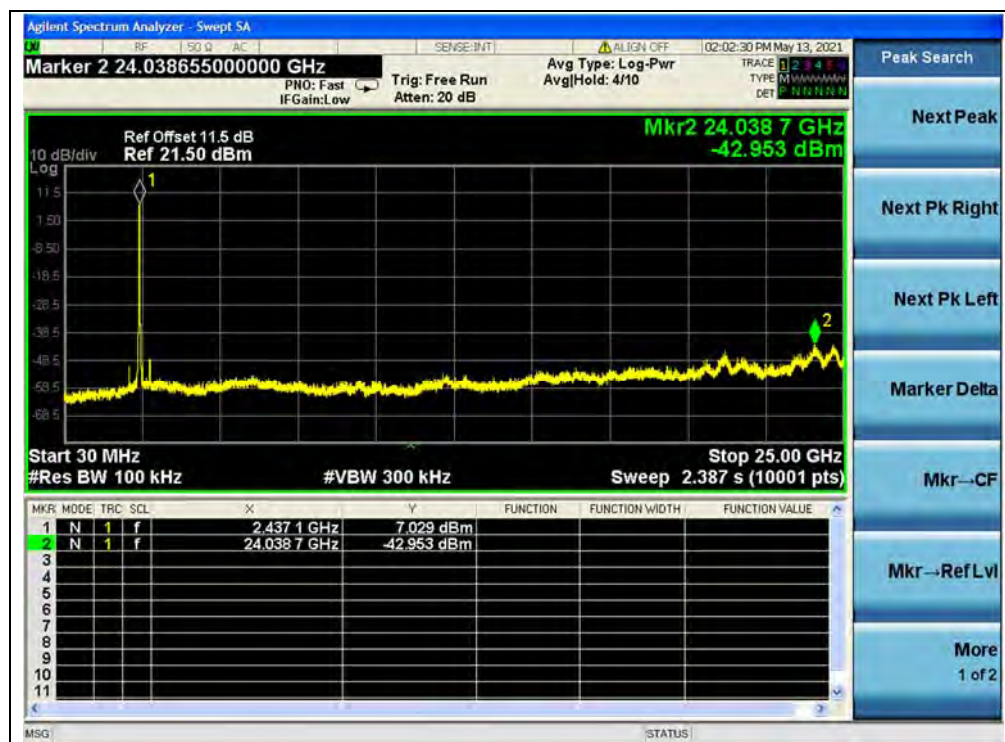

(Channel = 6, 30MHz to 25GHz)



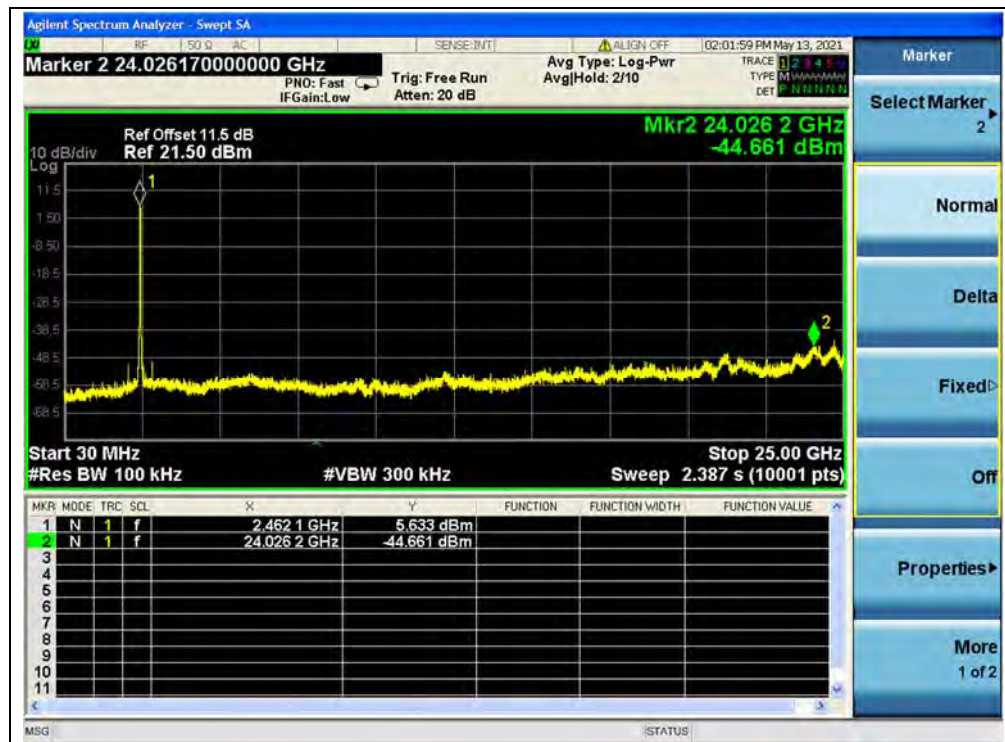

(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)




## 802.11n(HT20) Test mode

### A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.62	4.56	-15.44	PASS
6	2437	-43.42	6.26	-13.74	PASS
11	2462	-42.43	6.42	-13.58	PASS

### B. Test Plot:

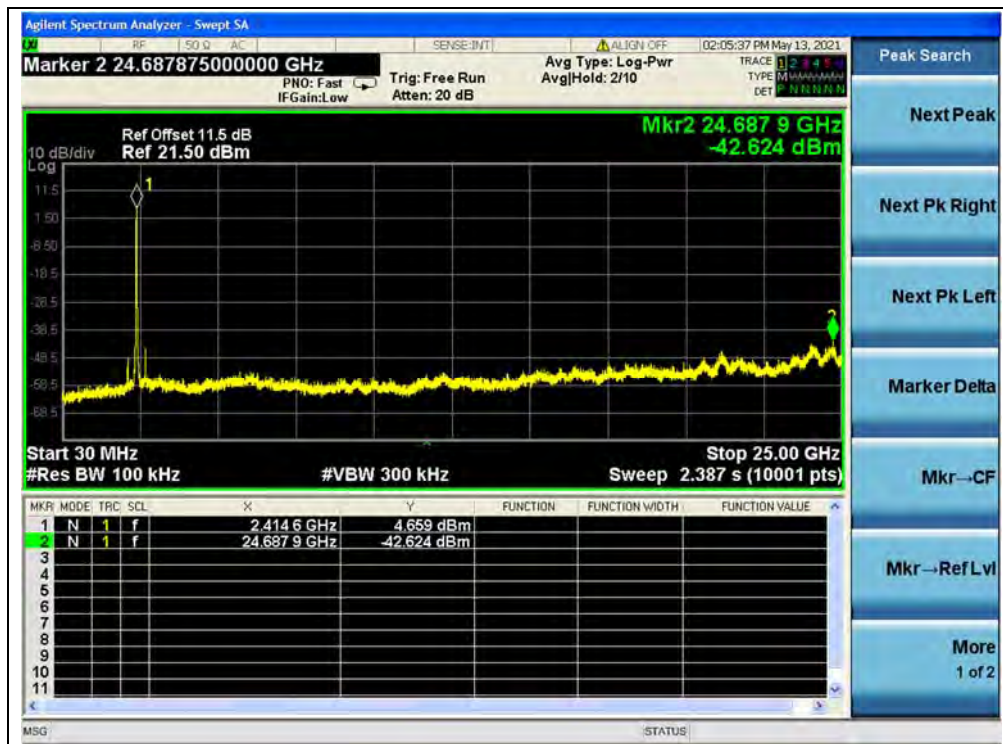

(Channel = 1, 30MHz to 25GHz)




(Band Edge, Channel = 1)



(Channel = 6, 30MHz to 25GHz)



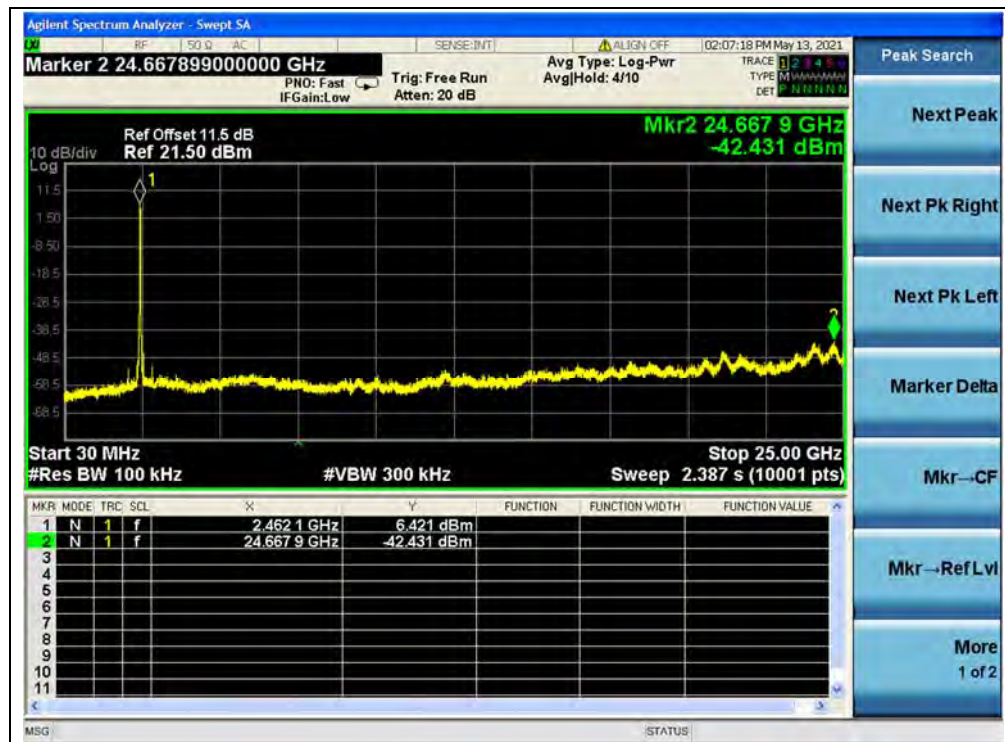

(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)


## 2.6. Power Spectral Density (PSD)

### 2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.6.2. Test Description

#### Test Setup:

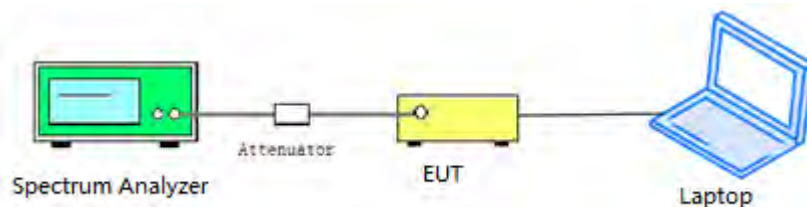

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.





## 2.6.4. Test Result

### 802.11b Test mode

#### A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-4.65	8	PASS
6	2437	-4.39	8	PASS
11	2462	-3.24	8	PASS

#### B. Test Plot:



(Channel = 1, 802.11b)



(Channel = 6, 802.11b)



(Channel = 11, 802.11b)


**802.11g Test mode****A. Test Verdict:**

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-6.23	8	PASS
6	2437	-5.52	8	PASS
11	2462	-5.70	8	PASS


**B. Test Plot:**

(Channel = 1, 802.11g)



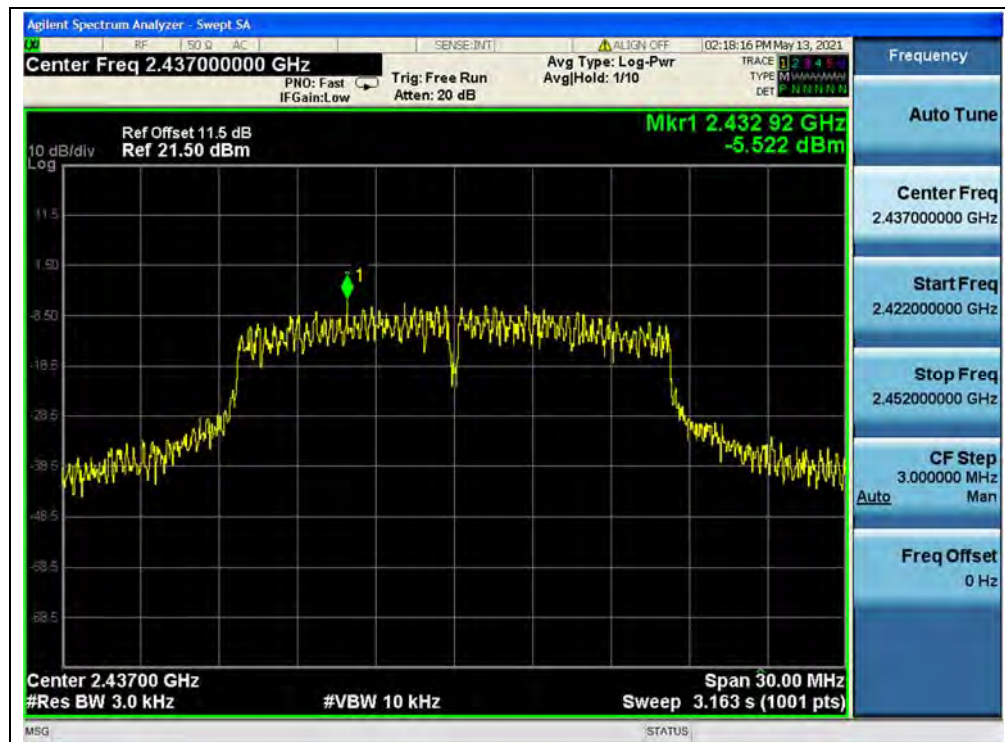


(Channel = 6, 802.11g)

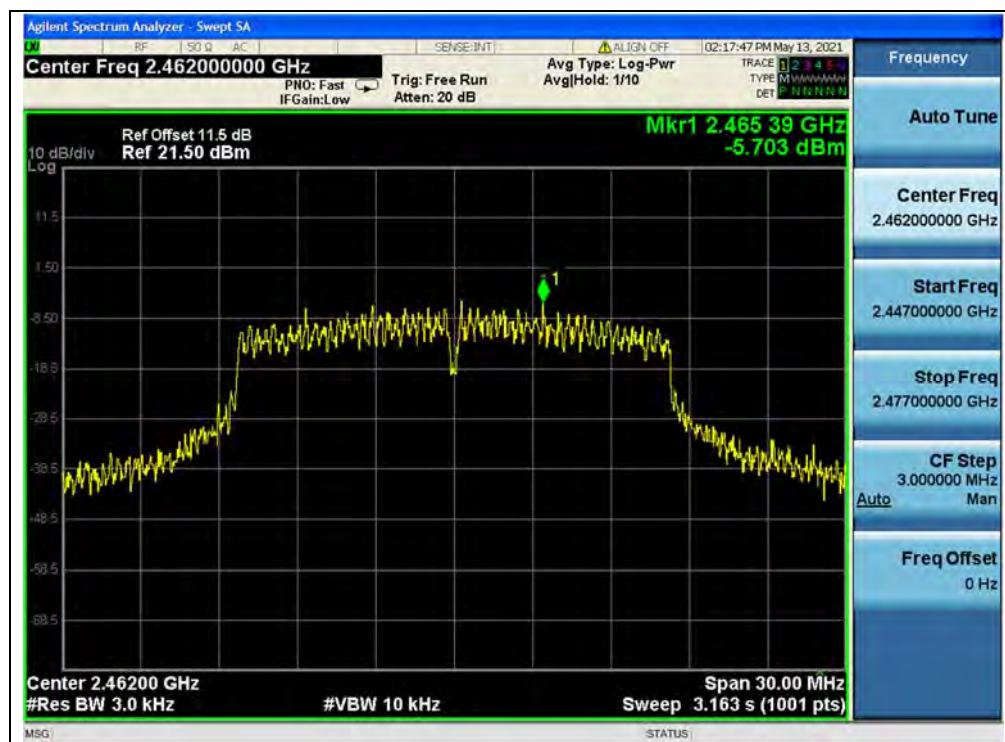

(Channel = 11, 802.11g)

**802.11n(HT20) Test mode****A. Test Verdict:**

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-4.88	8	PASS
6	2437	-5.65	8	PASS
11	2462	-4.64	8	PASS

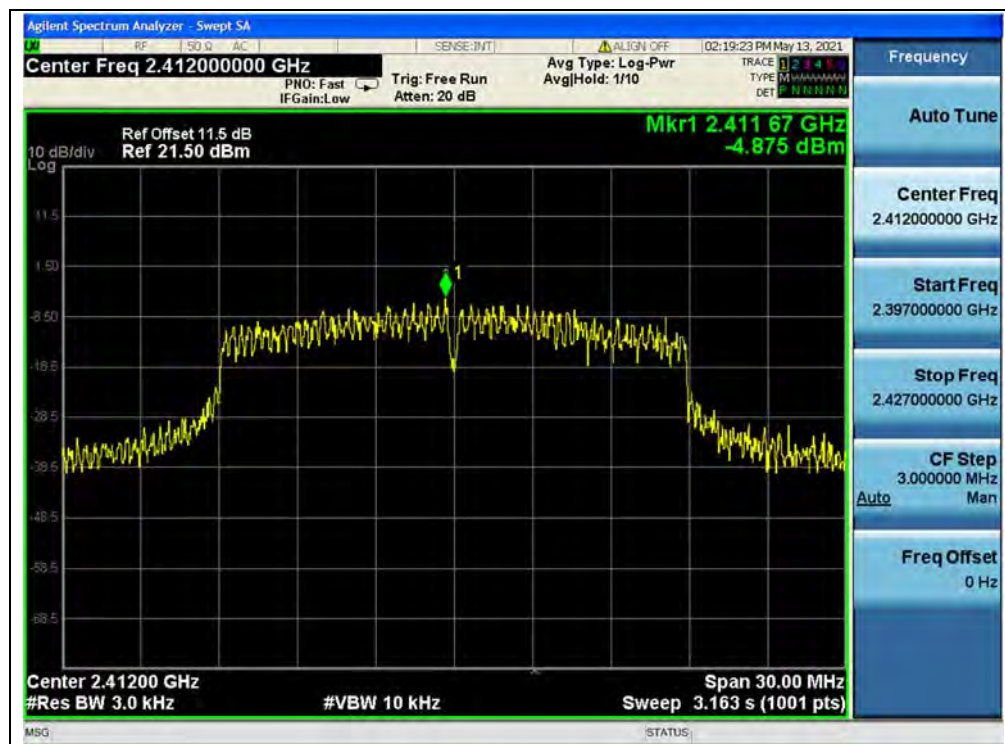**B. Test Plot:**

(Channel = 1, 802.11n(HT20))



(Channel = 6, 802.11n(HT20))



(Channel = 11, 802.11n(HT20))

## 2.7. Conducted Emission

### 2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

#### NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2. Test Description

#### Test Setup:

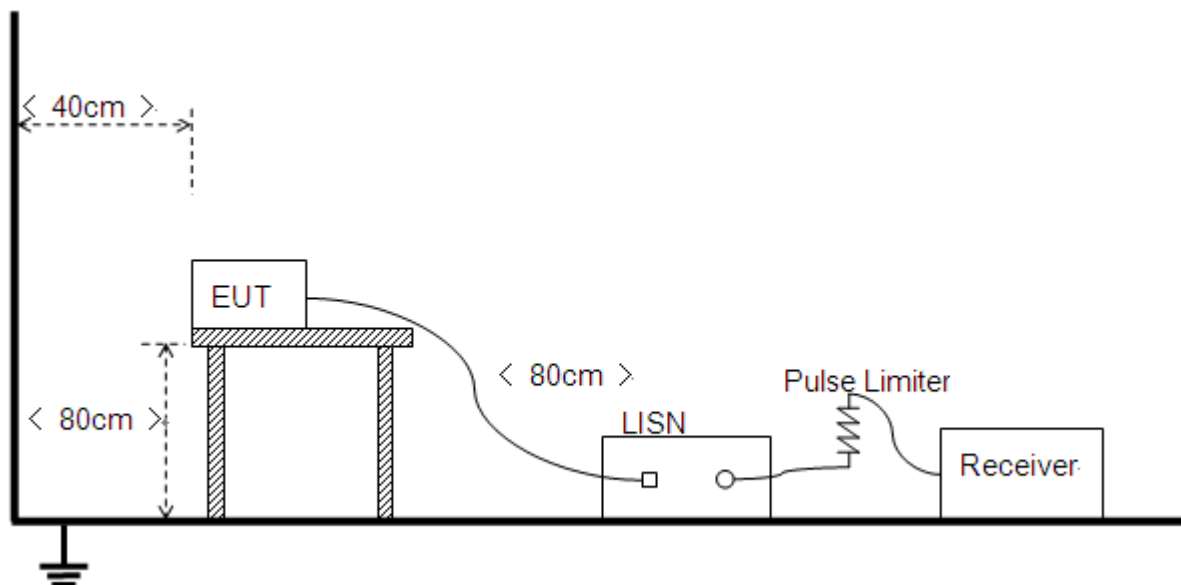

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



### 2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode1: EUT+ADAPTER+ WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss [dB]} + A_{\text{Factor}}$$

$U_R$ : Receiver Reading


$A_{\text{Factor}}$ : Voltage division factor of LISN



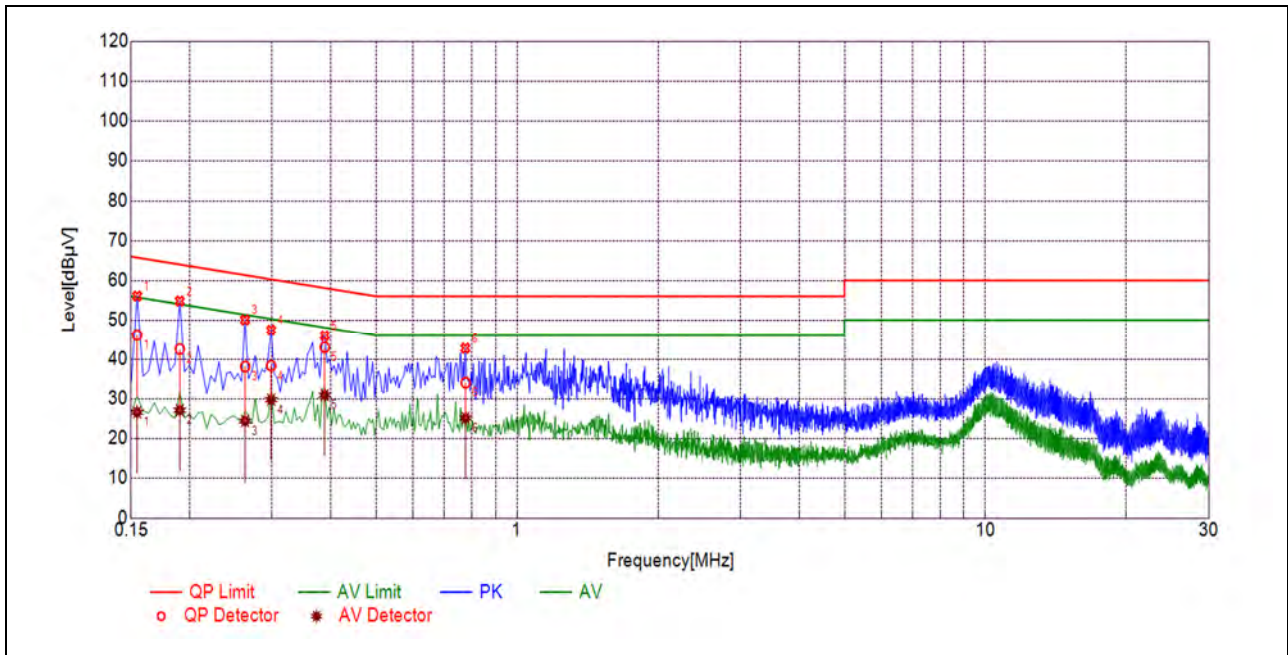

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1544	46.14	26.55	65.76	55.76	Line	PASS
2	0.1905	42.53	27.07	64.01	54.01		PASS
3	0.2626	38.10	24.35	61.35	51.35		PASS
4	0.2985	38.30	29.75	60.29	50.29		PASS
5	0.3884	43.00	30.89	58.10	48.10		PASS
6	0.7763	34.02	25.14	56.00	46.00		PASS

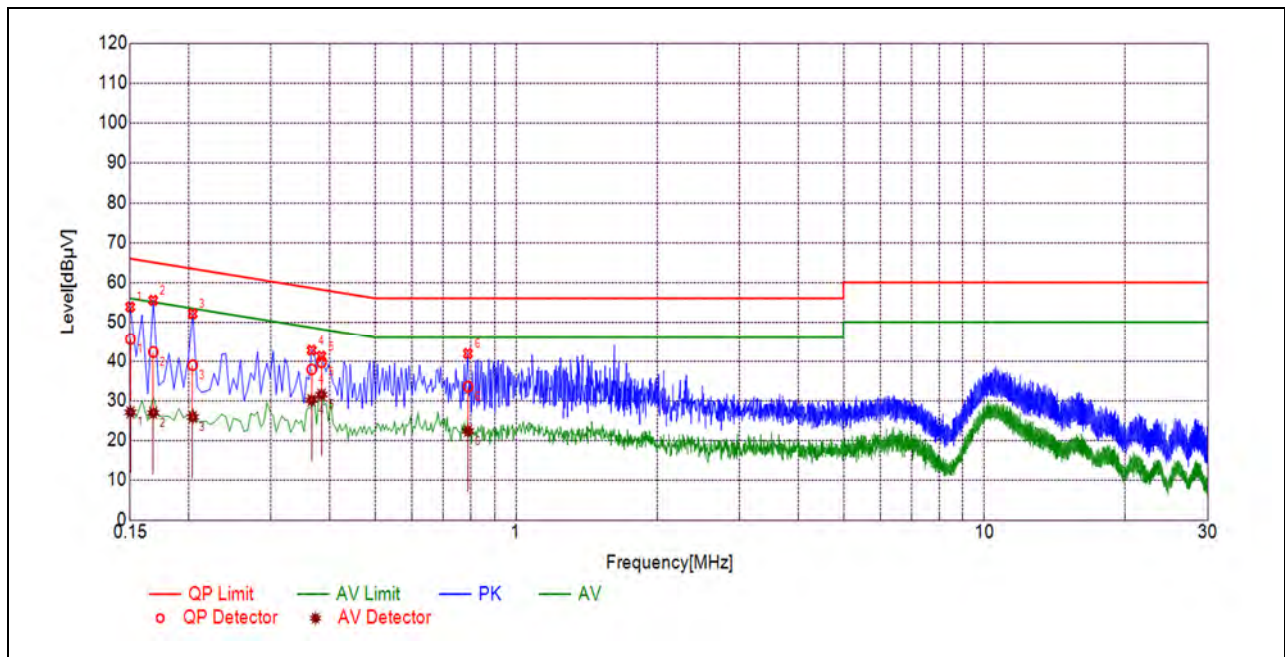

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1502	45.59	27.04	65.99	55.99	Neutral	PASS
2	0.1680	42.29	26.89	65.06	55.06		PASS
3	0.2040	38.95	25.86	63.45	53.45		PASS
4	0.3660	37.85	30.10	58.59	48.59		PASS
5	0.3843	39.67	31.52	58.19	48.19		PASS
6	0.7896	33.54	22.35	56.00	46.00		PASS


## 2.8. Restricted Frequency Bands

### 2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.8.2. Test Description

#### Test Setup

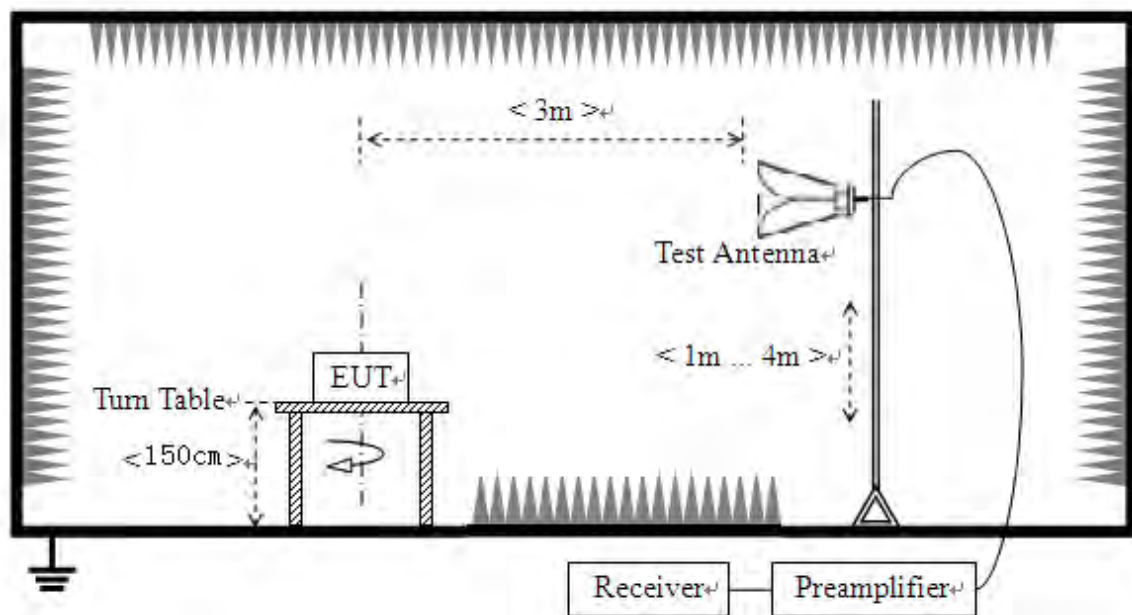

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



### 2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

### 2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

### 802.11b Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
1	2386.31	PK	27.58	6.74	27.20	61.52	74	PASS
1	2386.31	AV	15.77	6.74	27.20	49.71	54	PASS
11	2486.43	PK	26.75	6.74	27.20	60.69	74	PASS
11	2486.43	AV	14.53	6.74	27.20	48.47	54	PASS





**B. Test Plot:**

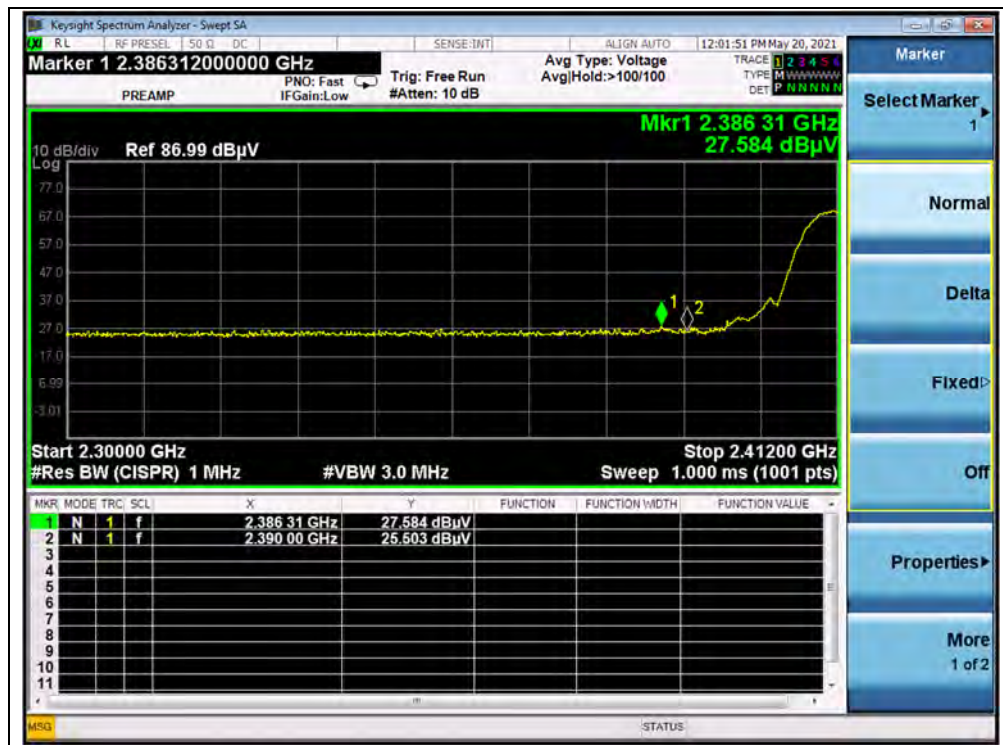

(PEAK, Channel = 1, 802.11b)



(AVG, Channel = 1, 802.11b)



(PEAK, Channel = 11, 802.11b)



(AVG, Channel = 11, 802.11b)



### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBuV)			E (dBμV/m)		
1	2390.00	PK	28.28	6.74	27.20	62.22	74	PASS
1	2390.00	AV	15.40	6.74	27.20	49.34	54	PASS
11	2483.50	PK	29.26	6.74	27.20	63.20	74	PASS
11	2483.50	AV	16.19	6.74	27.20	50.13	54	PASS

Keysight Spectrum Analyzer - Swept SA

RL RF PRESEL 50 Ω DC SENSE:INT ALIGN AUTO 07:06:44 AM May 28, 2021

Ref Level 86.99 dBμV PNO: Fast IFGain:Low Trig: Free Run #Atten: 10 dB Avg Type: Voltage Avg/Hold: >100/100

PREAMP

Amplitude

Y Axis Unit dBμV

Ref Lvl Offset 0.00 dB

Internal Preamp Low Band

10 dB/div Log

Ref 86.99 dBμV

Mkr1 2.389 45 GHz 27.506 dBμV

Start 2.30000 GHz Stop 2.41200 GHz

#Res BW (CISPR) 1 MHz #VBW 3.0 MHz Sweep 1.000 ms (1001 pts)


MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.389 45 GHz	27.506 dBμV			
2	N	1	f	2.390 00 GHz	28.275 dBμV			
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

More 2 of 2

(PEAK, Channel = 1, 802.11g)









(AVG, Channel = 11,802.11g)




## 802.11n(HT20) Test mode


### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2390.00	PK	33.04	6.74	27.20	66.98	74	PASS
1	2390.00	AV	16.61	6.74	27.20	50.55	54	PASS
11	2484.08	PK	36.83	6.74	27.20	70.77	74	PASS
11	2483.50	AV	17.52	6.74	27.20	51.46	54	PASS

### B. Test Plot:

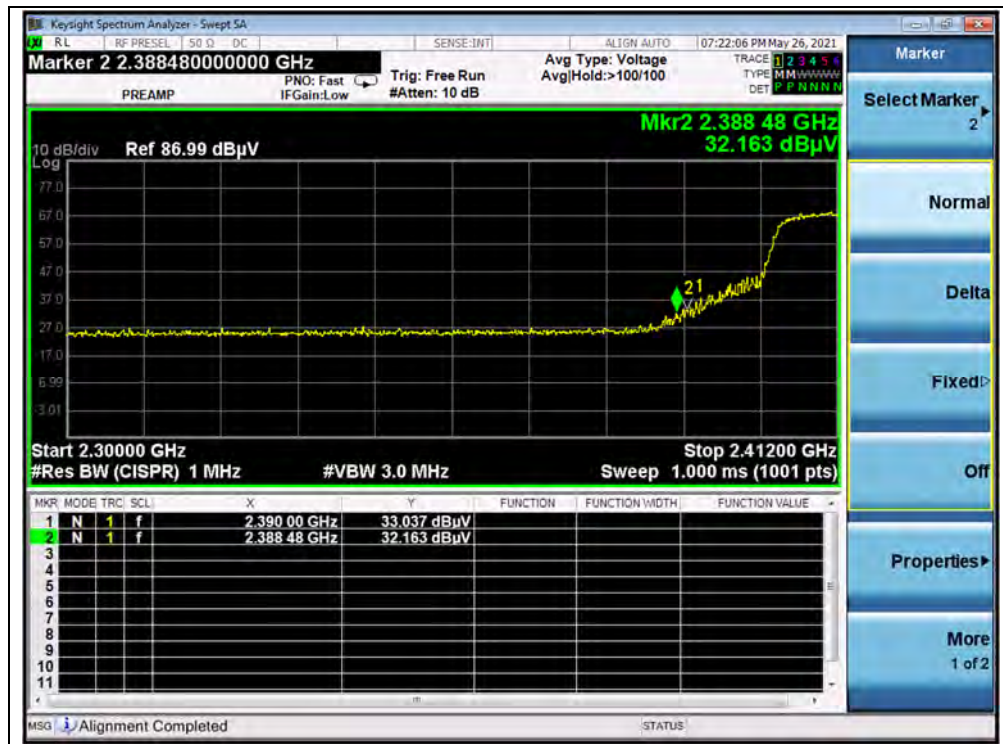


(PEAK, Channel = 1, 802.11n(HT20))

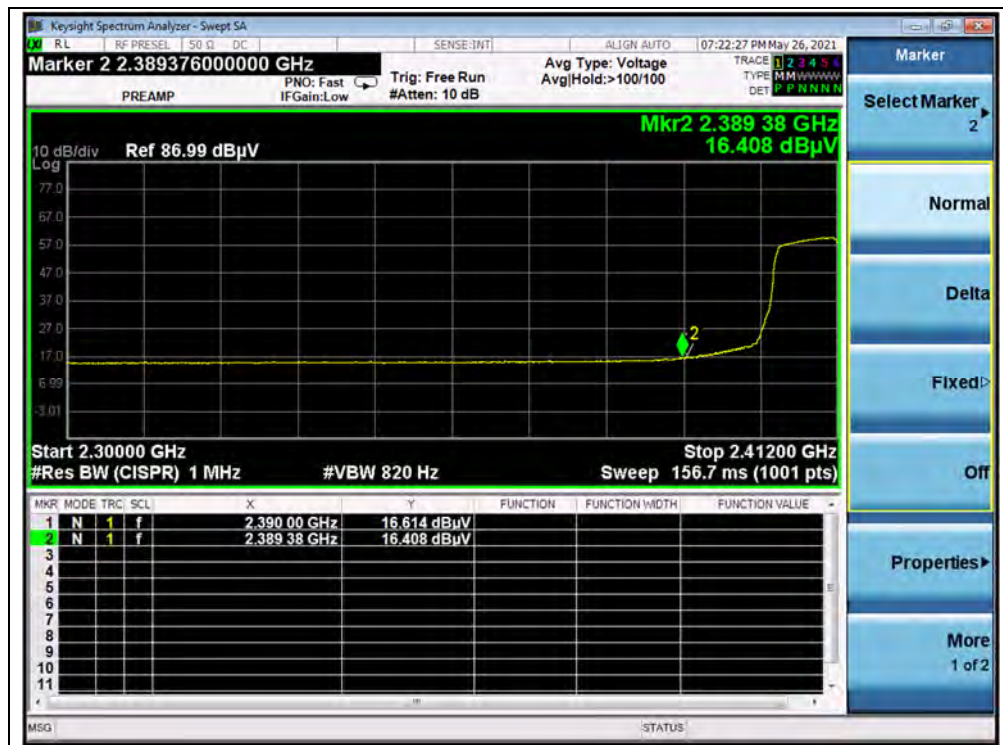

(AVG, Channel = 1, 802.11n(HT20))



(PEAK, Channel = 11, 802.11n(HT20))

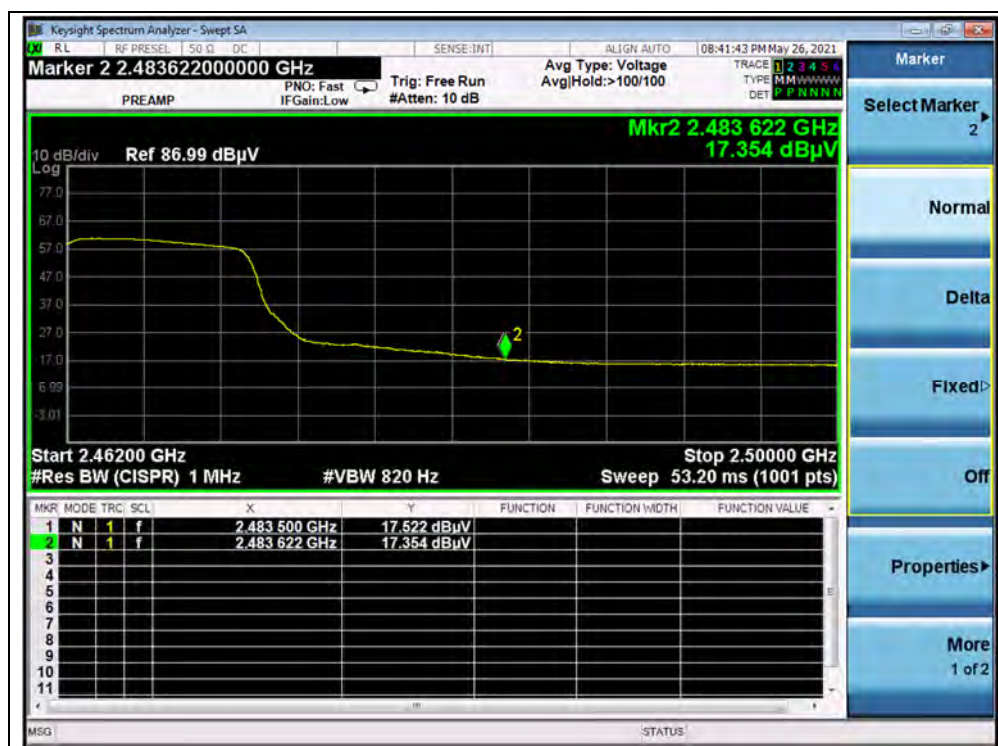

(AVG, Channel = 11, 802.11n(HT20))



## 2.9. Radiated Emission

### 2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


**Note2:** For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).




## 2.9.2. Test Description

### Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

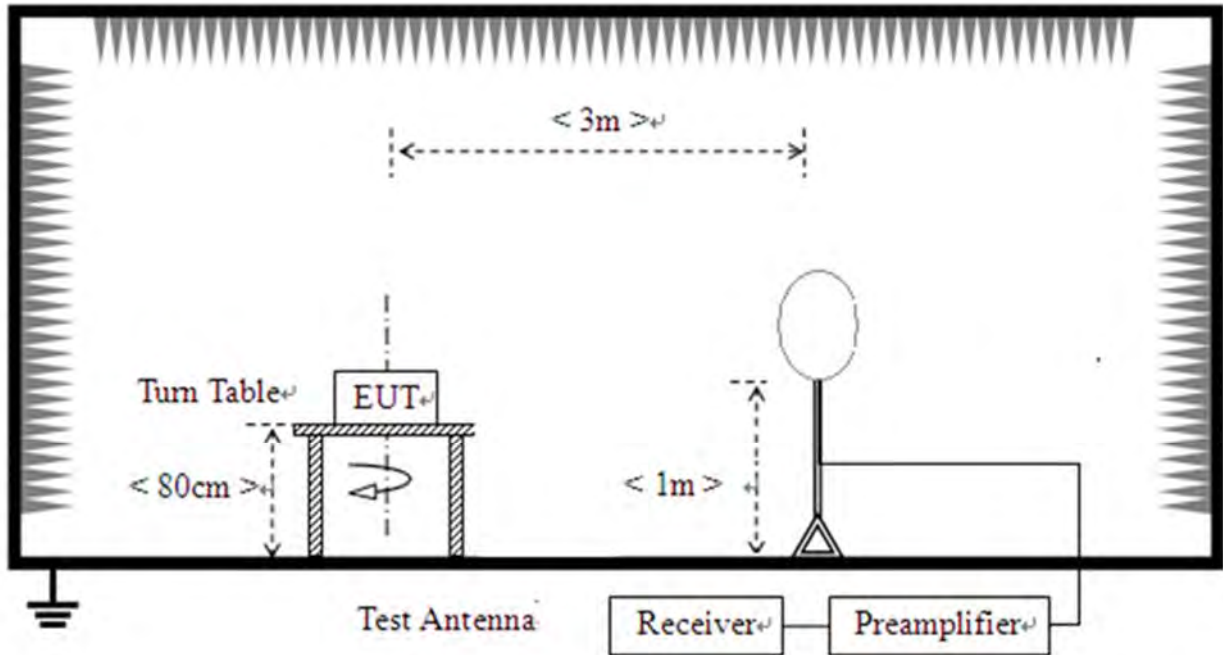

- 2) For radiated emissions from 30MHz to 1GHz

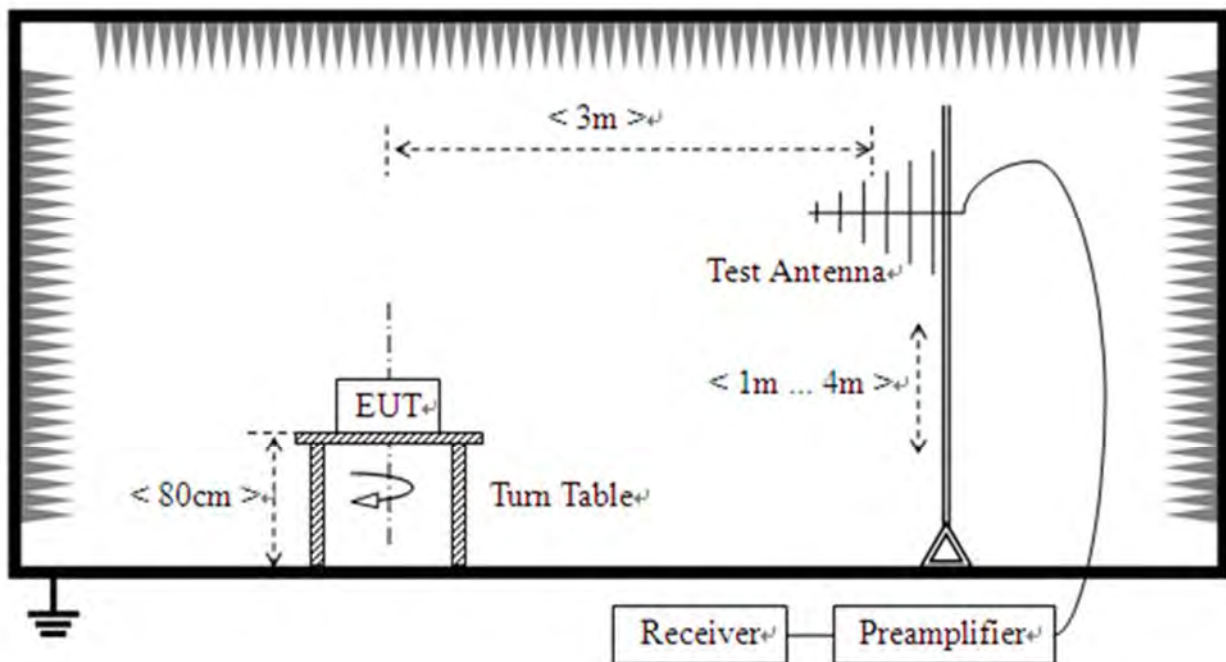

### 3) For radiated emissions above 1GHz

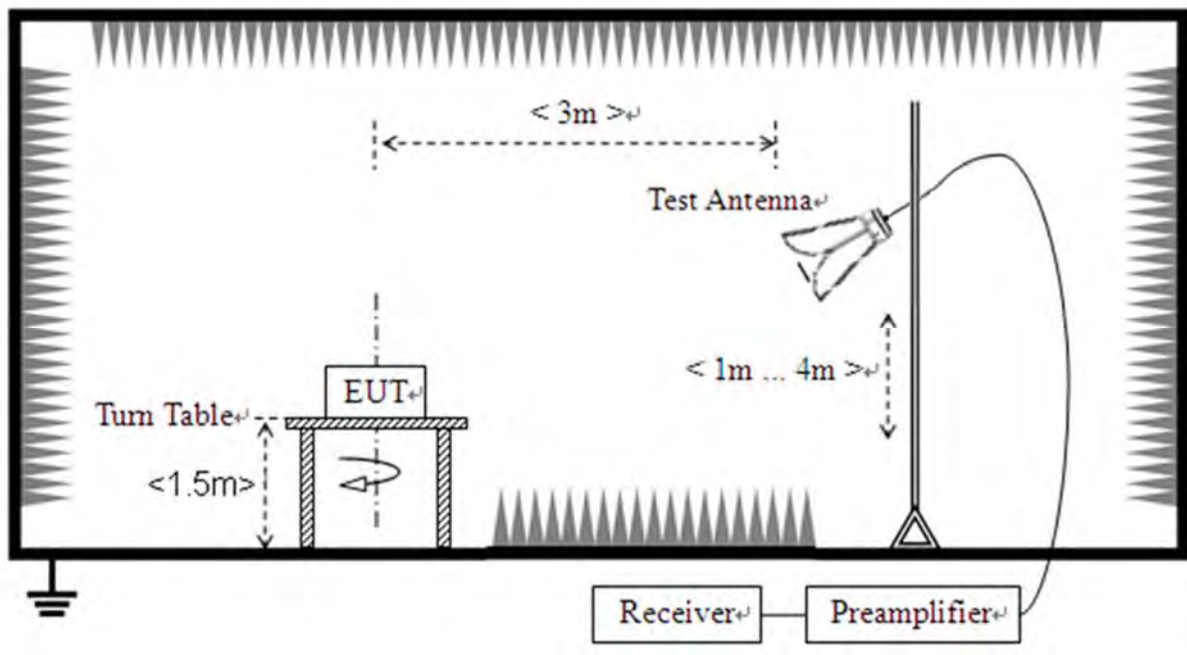

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.



### 2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**802.11b Test mode**

## Plot for Channel 1

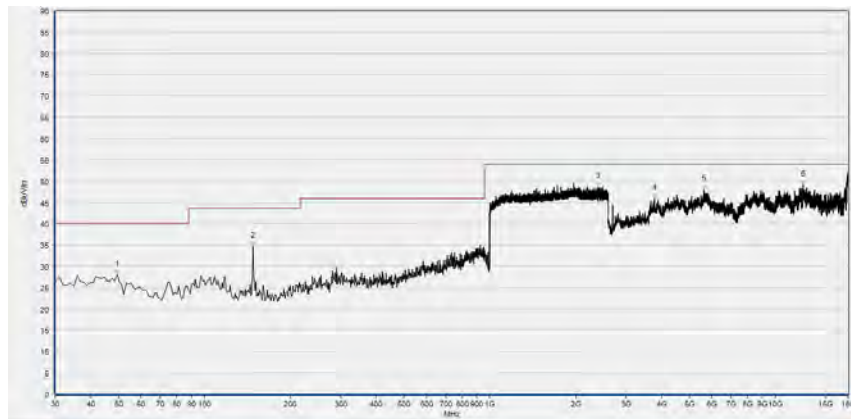

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.400	27.99	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
148.340	34.67	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2389.867	48.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3782.720	46.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5624.560	48.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12499.120	49.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

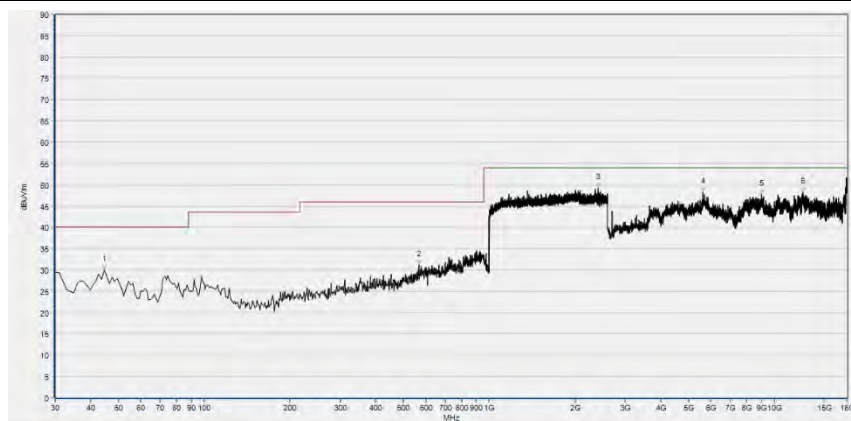

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.550	29.97	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
565.440	31.21	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2408.533	49.35	N/A	N/A	74.00	N/A	54.00	Vertical	PA S
5612.240	48.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8997.160	47.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12600.760	48.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

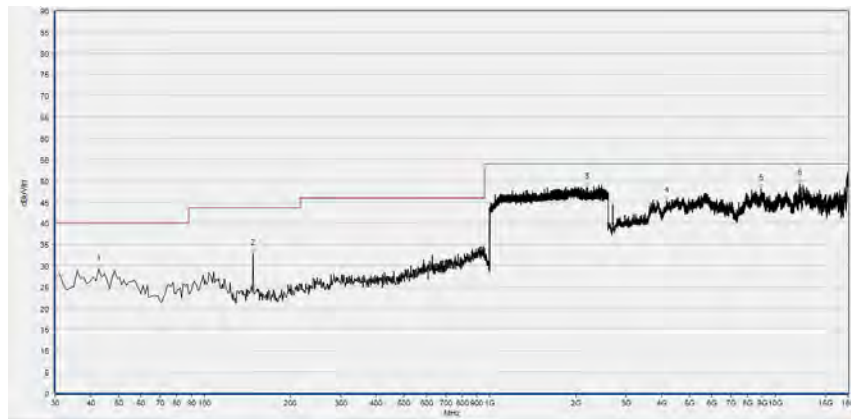

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.610	29.20	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
148.340	32.78	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2184.533	48.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4170.800	45.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8923.240	48.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12135.680	49.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to18GHz)

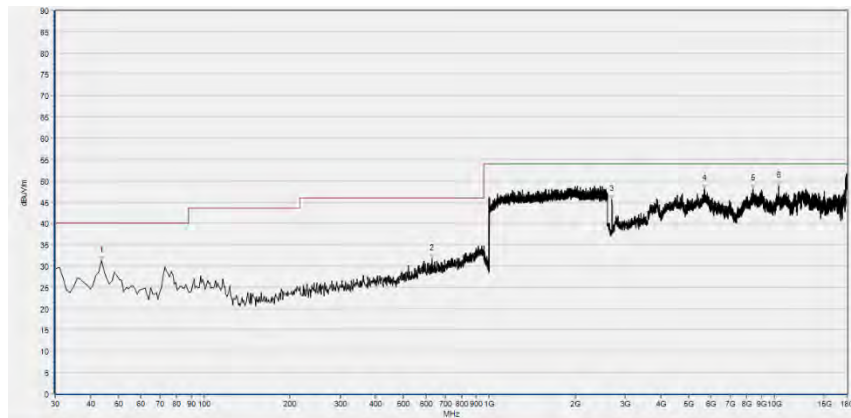


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.580	31.13	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
630.430	31.61	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2692.400	45.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5680.000	48.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8418.120	48.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10355.440	48.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)






Plot for Channel 11

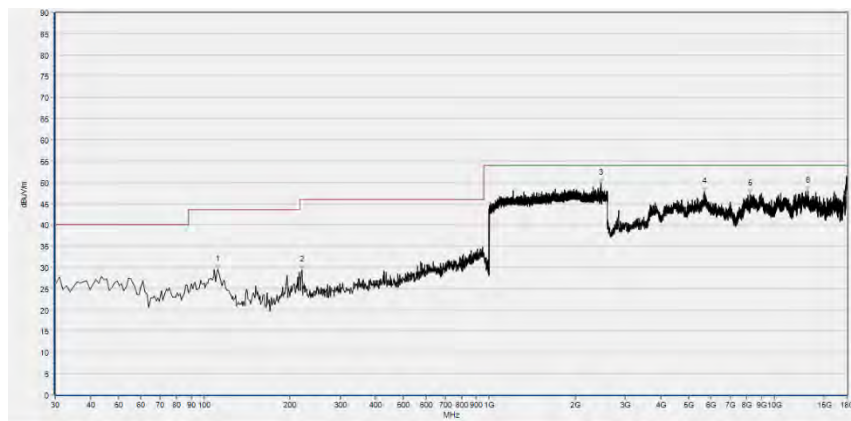


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	29.48	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
220.120	29.33	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2464.533	49.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5695.400	47.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8230.240	47.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13093.560	48.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

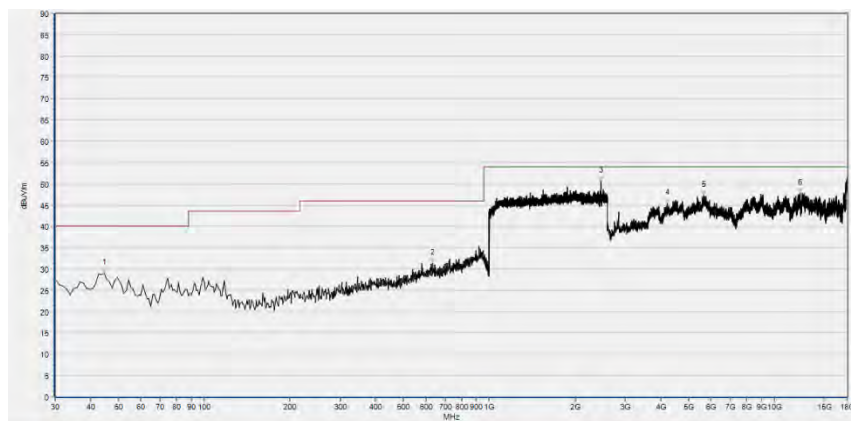


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.550	29.02	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
634.310	31.33	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2463.467	50.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4204.680	45.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5649.200	47.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12298.920	47.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

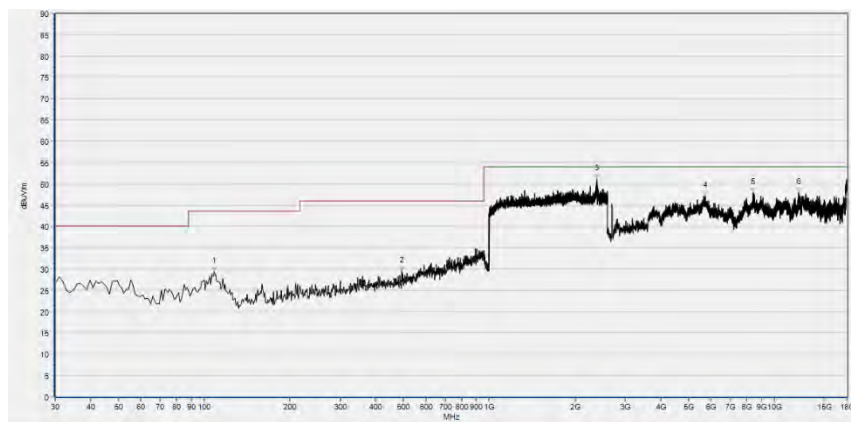**802.11g Test mode****Plot for Channel 1**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	29.28	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
492.690	29.45	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2387.733	51.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5732.360	47.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8427.360	47.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12157.240	47.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

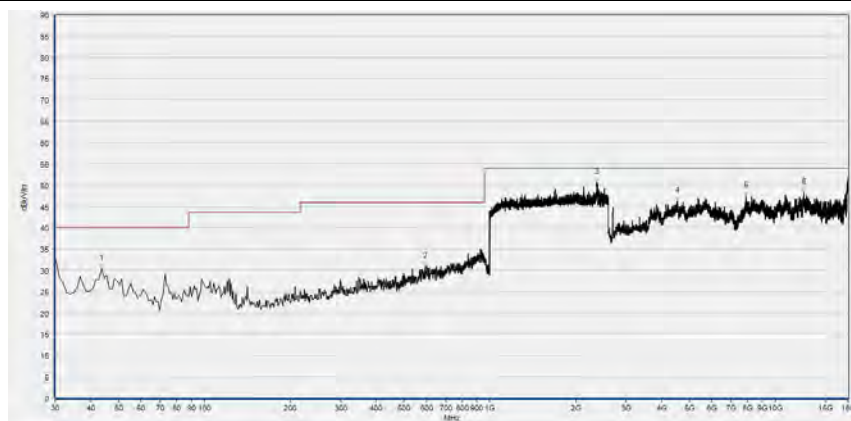


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	A tenna	Verdict
43.580	30.39	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
592.600	30.90	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2373.333	50.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4549.640	46.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7891.440	47.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12582.280	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

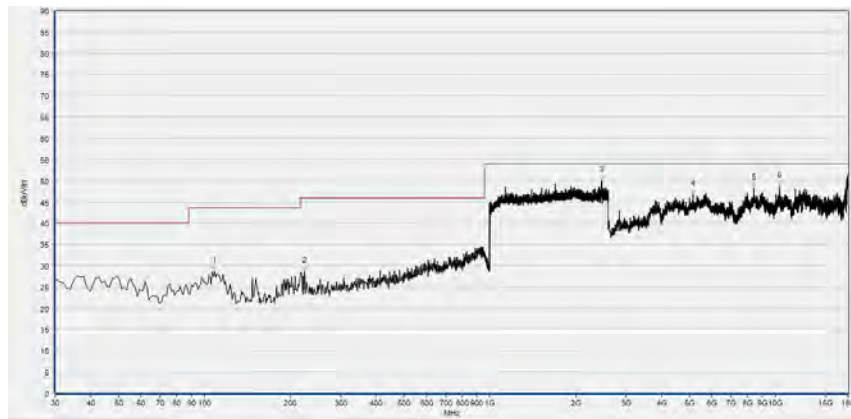

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	28.59	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
224.000	28.73	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2464.533	50.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5153.320	46.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8415.040	48.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10346.200	48.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

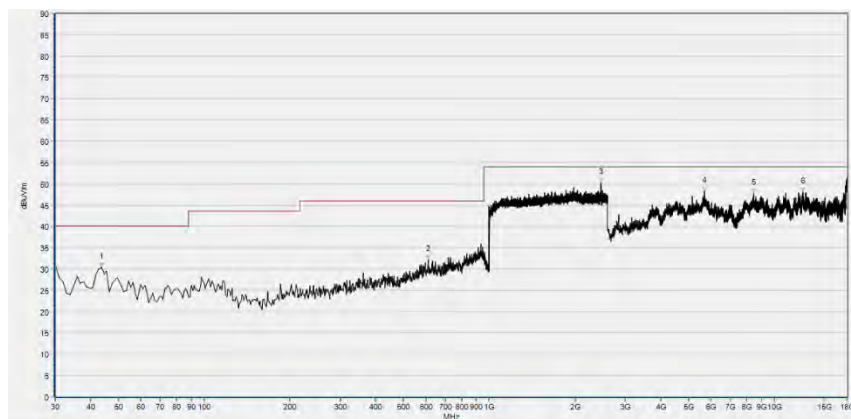


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.580	30.32	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
611.030	32.13	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2459.200	50.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5680.000	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8436.600	47.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12569.960	48.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

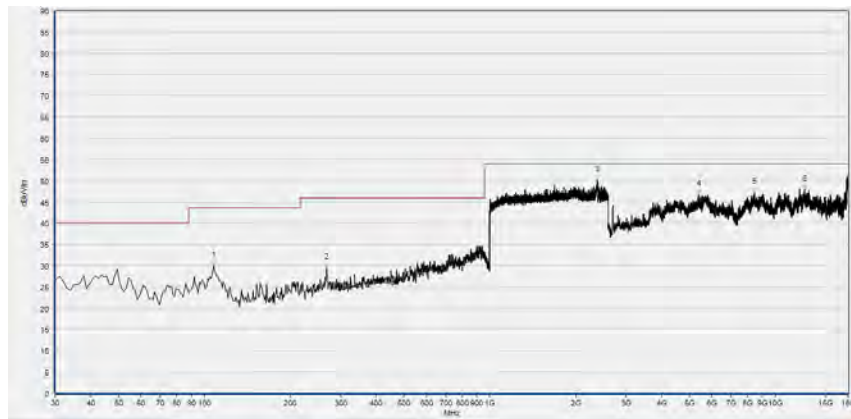


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	29.94	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
267.650	29.46	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2374.400	50.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5396.640	46.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8448.920	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12693.160	47.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

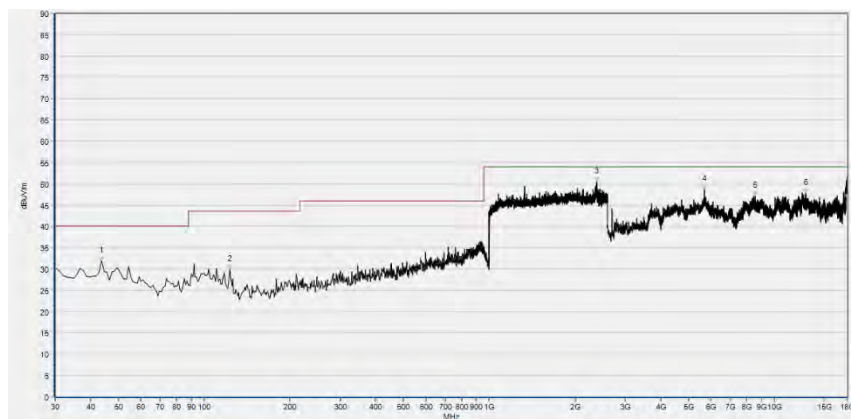


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.580	31.82	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
123.120	29.75	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2378.133	50.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5683.080	48.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8581.360	47.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12896.440	47.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

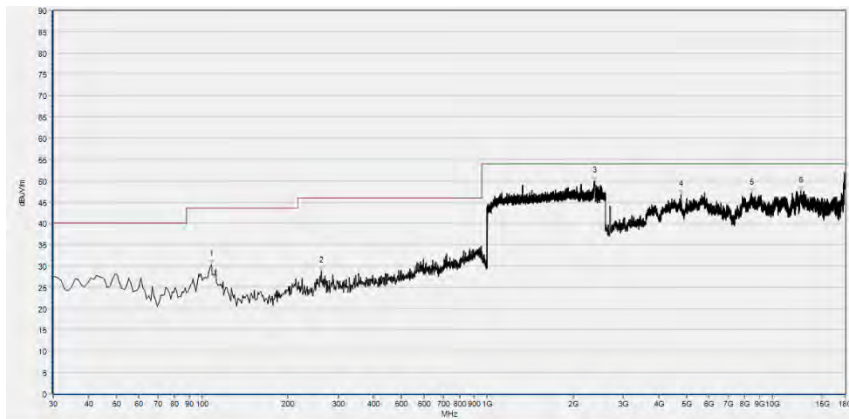**802.11n(HT20) Test mode****Plot for Channel 1**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	30.39	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
261.830	28.90	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2376.533	49.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4777.560	46.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8464.320	47.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12557.640	47.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

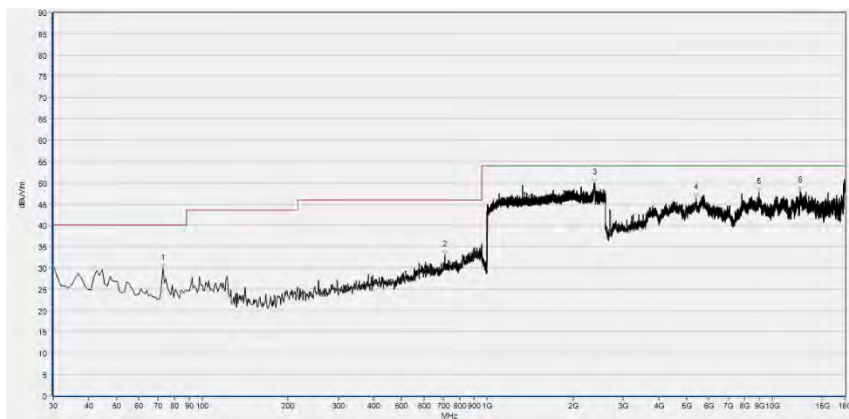


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
72.680	29.78	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
709.970	32.96	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2376.000	49.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5405.880	46.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8941.720	47.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12486.800	48.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

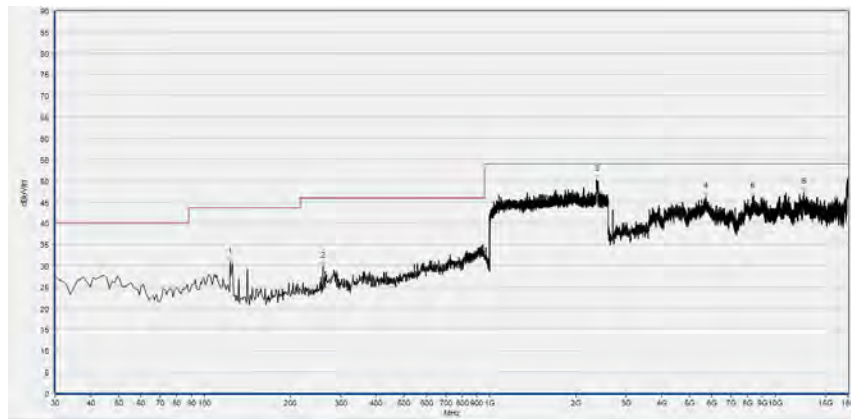

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
123.120	30.85	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
259.890	29.89	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2370.133	50.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5732.360	46.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8338.040	46.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12576.120	47.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

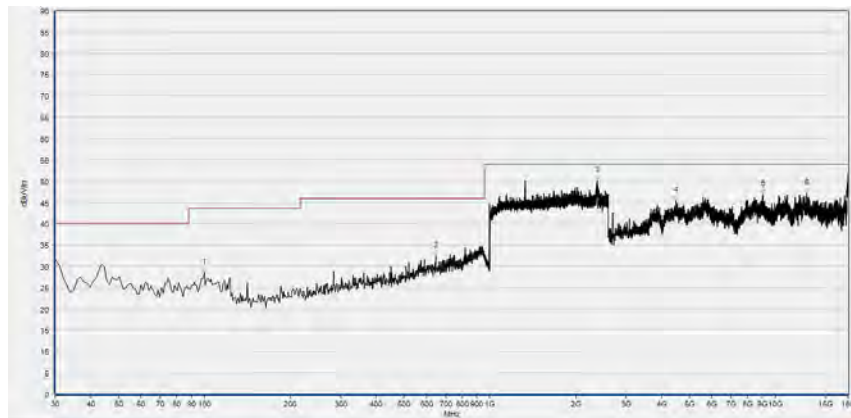


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	28.53	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
645.950	32.40	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2386.133	50.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4491.120	45.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9043.360	46.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12905.680	47.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

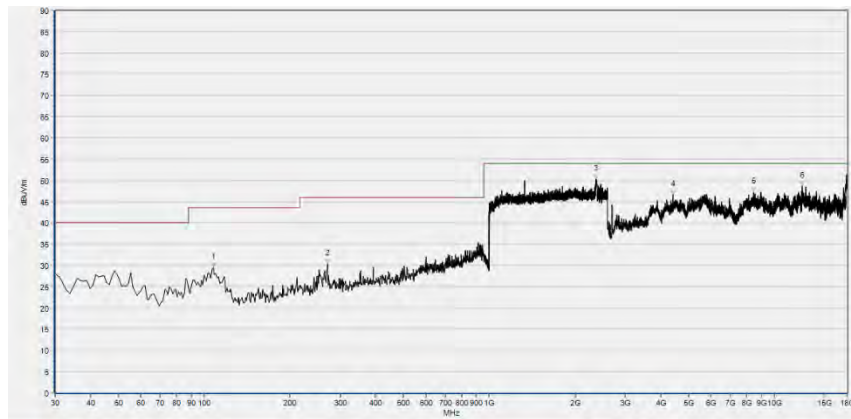

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	29.58	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
270.560	30.29	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2362.667	50.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4401.800	46.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8476.640	47.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12489.880	48.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

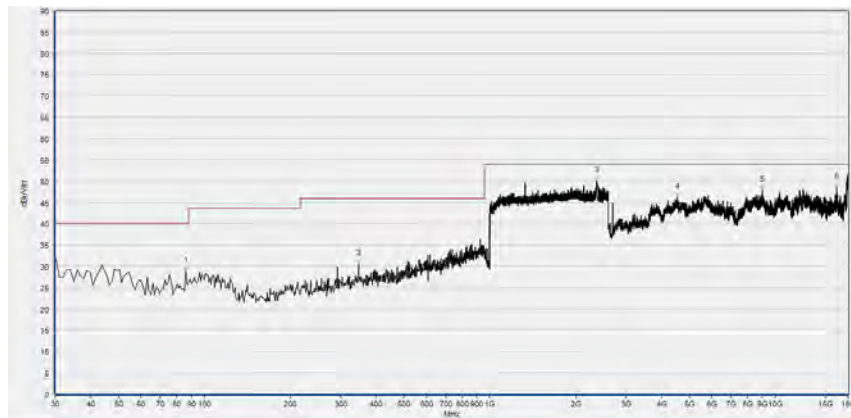

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
86.260	28.75	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
347.190	30.43	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2366.933	50.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4543.480	46.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9024.880	47.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16447.680	48.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	(N/A.)	10dB	Resent	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2021.03.25	2022.03.24
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2021.03.25	2022.03.24
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

##### 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2021.03.09	2022.03.08
LISN	8127449	NSLK 8127	Schwarzbeck	2021.03.09	2022.03.08
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
Adapter	NA	HA-190501 00UU	HONGGUAN GDE	N/A	N/A

##### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Townsend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0



**4.4 Radiated Test Equipments**

<b>Equipment Name</b>	<b>Serial No.</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Cal. Date</b>	<b>Due Date</b>
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.05.24	2022.05.23
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

\_\_\_\_\_ END OF REPORT \_\_\_\_\_