


Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV Data :#740 Date: 16/06/03/

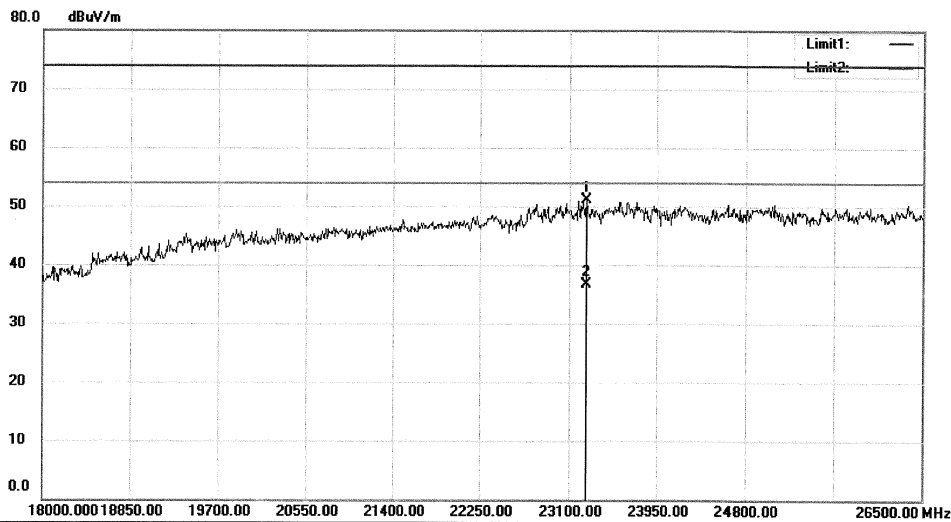

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11G 2462  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 23261.50 | 89.01         | -37.91         | 51.10        | 74.00  | -22.90 | peak           |              |        |
| 2   | *   | 23261.50 | 74.71         | -37.91         | 36.80        | 54.00  | -17.20 | AVG            |              |        |

\*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#740

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV Data :#747 Date: 16/06/03/

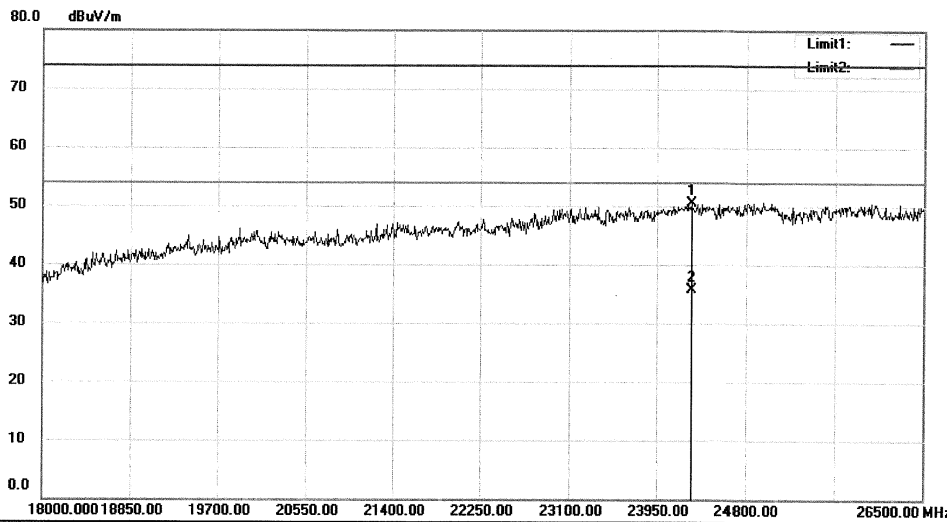

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11N 2412  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 24290.00 | 87.60         | -37.10         | 50.50        | 74.00  | -23.50 | peak           |              |        |
| 2   | *   | 24290.00 | 72.90         | -37.10         | 35.80        | 54.00  | -18.20 | AVG            |              |        |

\*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#747

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV Data :#748 Date: 16/06/03/

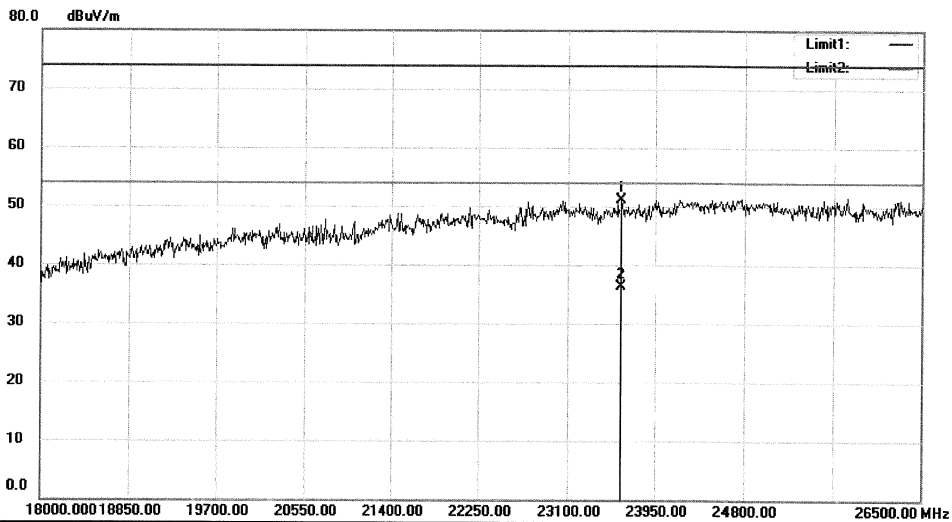

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11N 2412  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 23618.50 | 88.71         | -37.53         | 51.18        | 74.00  | -22.82 | peak           |              |        |
| 2   | *   | 23618.50 | 73.93         | -37.53         | 36.40        | 54.00  | -17.60 | AVG            |              |        |

\*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#748

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV Data :#743 Date: 16/06/03/

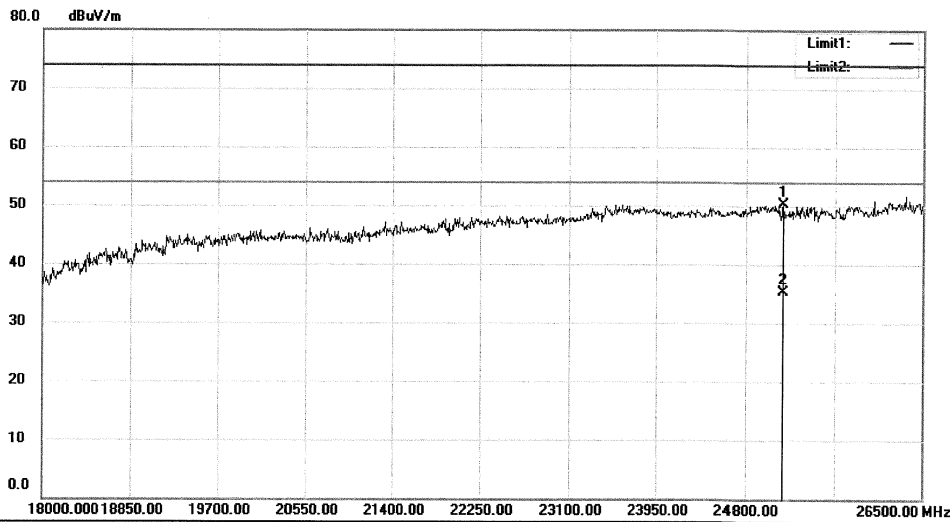

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11N 2437  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |                |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|----------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree Comment |
| 1   |     | 25157.00 | 87.04         | -36.82         | 50.22        | 74.00  | -23.78 | peak           |              |                |
| 2   | *   | 25157.00 | 72.12         | -36.82         | 35.30        | 54.00  | -18.70 | AVG            |              |                |

\*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#743

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV Data :#744 Date: 16/06/03/

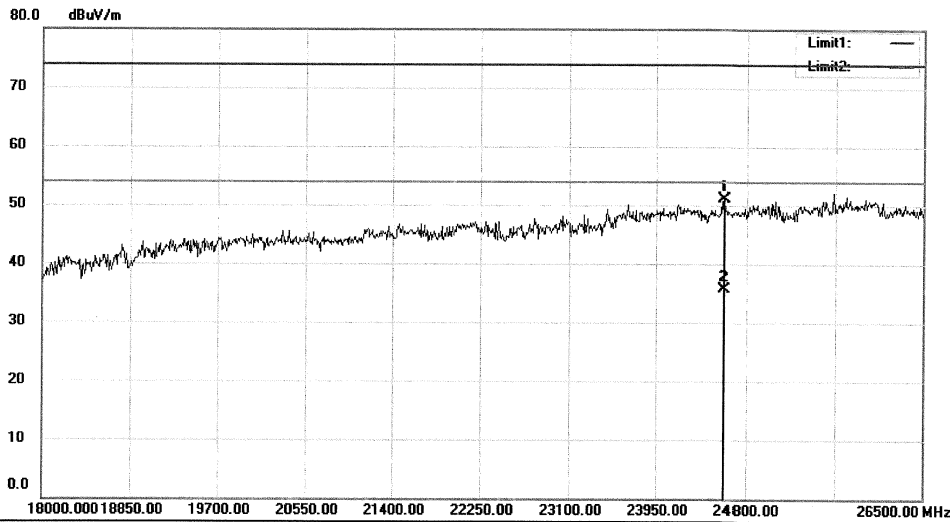

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11N 2437  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |                |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|----------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree Comment |
| 1   |     | 24613.00 | 88.10         | -37.06         | 51.04        | 74.00  | -22.96 | peak           |              |                |
| 2   | *   | 24613.00 | 72.86         | -37.06         | 35.80        | 54.00  | -18.20 | AVG            |              |                |

\*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#744

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV Data :#745 Date: 16/06/03/

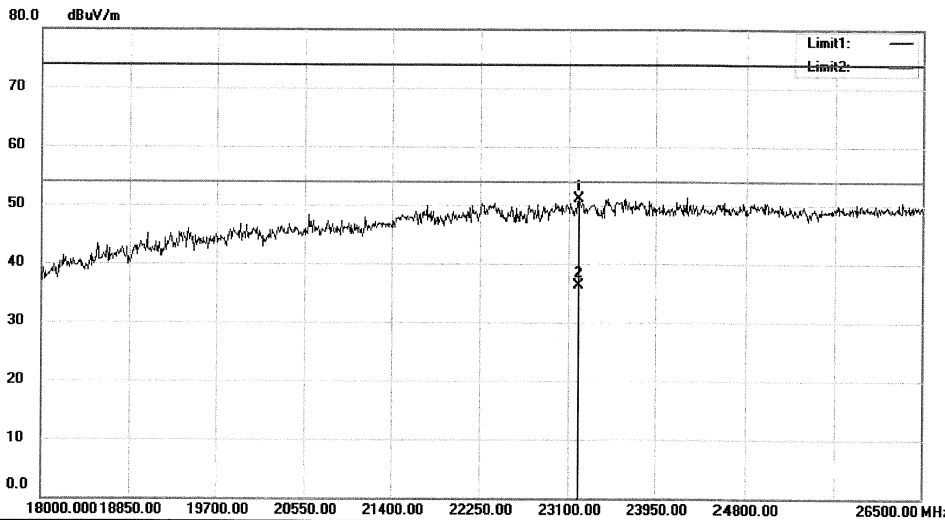

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode: 11N 2462  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |                |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|----------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree Comment |
| 1   |     | 23193.50 | 89.15         | -37.98         | 51.17        | 74.00  | -22.83 | peak           |              |                |
| 2   | *   | 23193.50 | 74.38         | -37.98         | 36.40        | 54.00  | -17.60 | AVG            |              |                |

\*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#745

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV Data :#746 Date: 16/06/03/

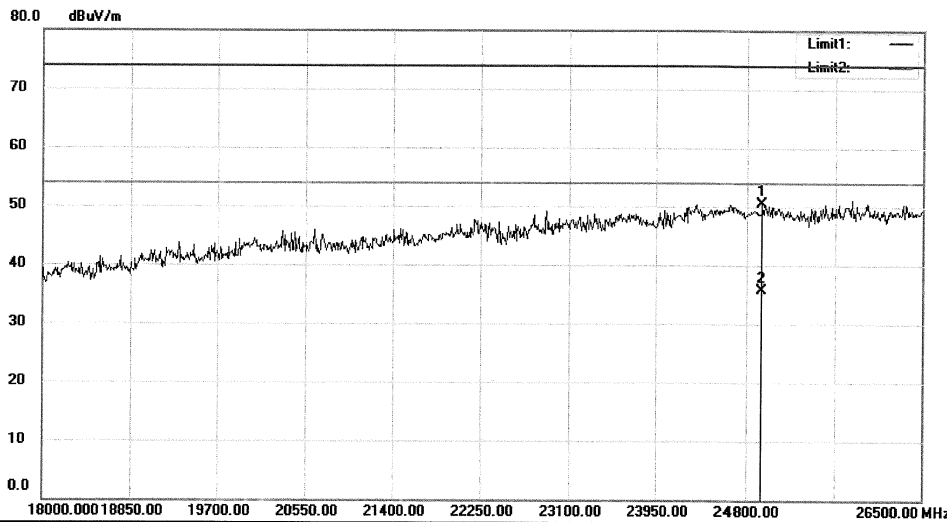

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11N 2462  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 24944.50 | 87.60         | -37.02         | 50.58        | 74.00  | -23.42 | peak           |              |        |
| 2   | *   | 24944.50 | 72.82         | -37.02         | 35.80        | 54.00  | -18.20 | AVG            |              |        |

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#746


Page: 1

## Test Plot of Band Edge

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



### Radiated Emission Measurement

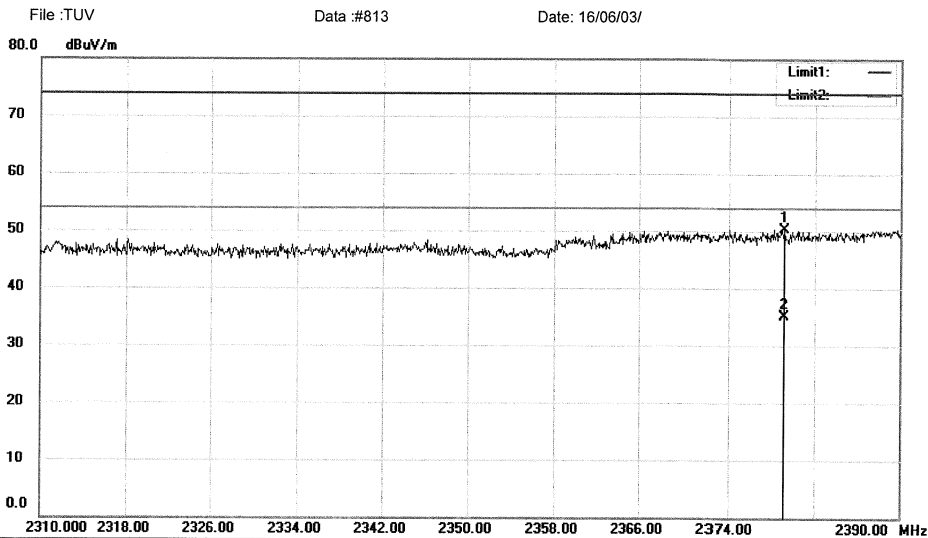

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode: 11B 2412  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 2379.200 | 35.33         | 14.95          | 50.28       | 74.00  | -23.72 | peak           |              |        |
| 2   | *   | 2379.200 | 20.15         | 14.95          | 35.10       | 54.00  | -18.90 | AVG            |              |        |

\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #813

Page: 1


Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV

Data :#812

Date: 16/06/03/

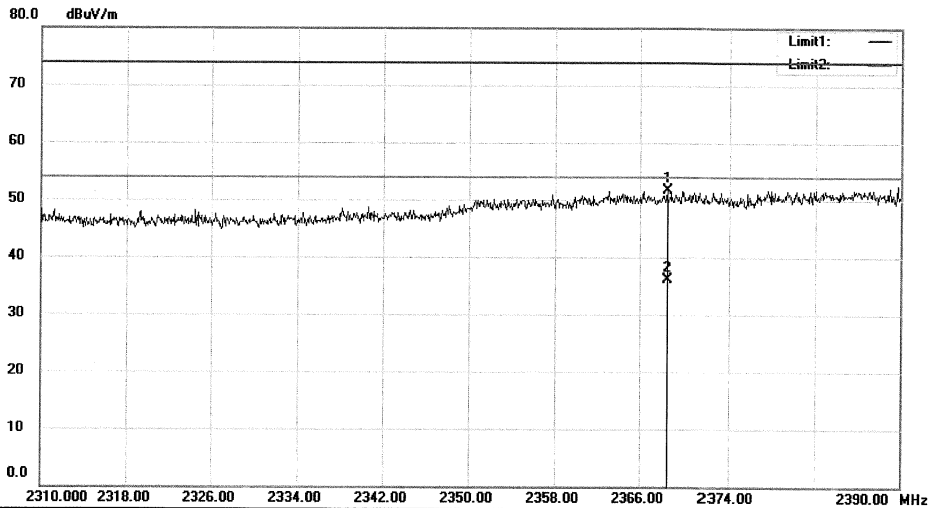

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2412

Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 2368.560 | 36.84         | 14.86          | 51.70        | 74.00  | -22.30 | peak           |              |        |
| 2   | *   | 2368.560 | 21.24         | 14.86          | 36.10        | 54.00  | -17.90 | AVG            |              |        |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#812

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

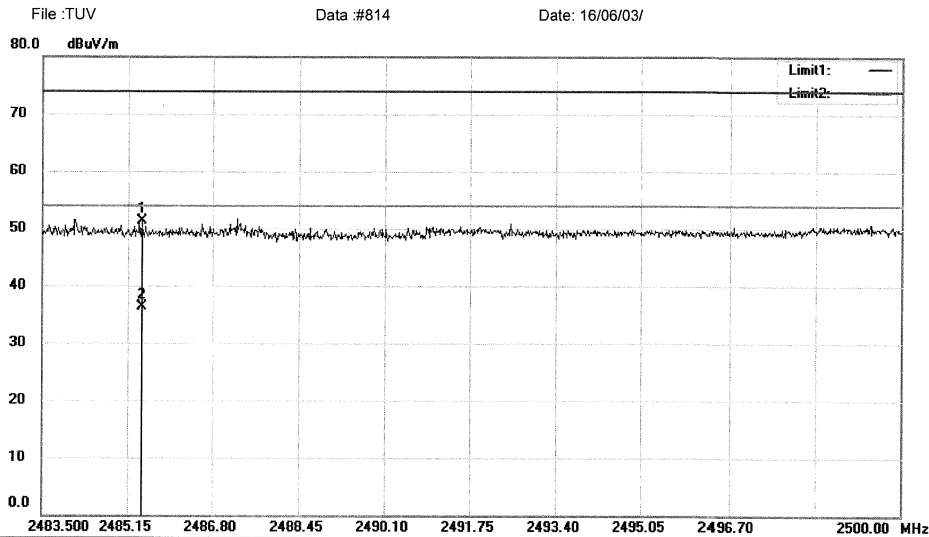
**Radiated Emission Measurement**


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode: 11B 2462  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 2485.414 | 35.52         | 15.82          | 51.34        | 74.00  | -22.66 | peak           |              |        |
| 2   | *   | 2485.414 | 20.58         | 15.82          | 36.40        | 54.00  | -17.60 | AVG            |              |        |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #814

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

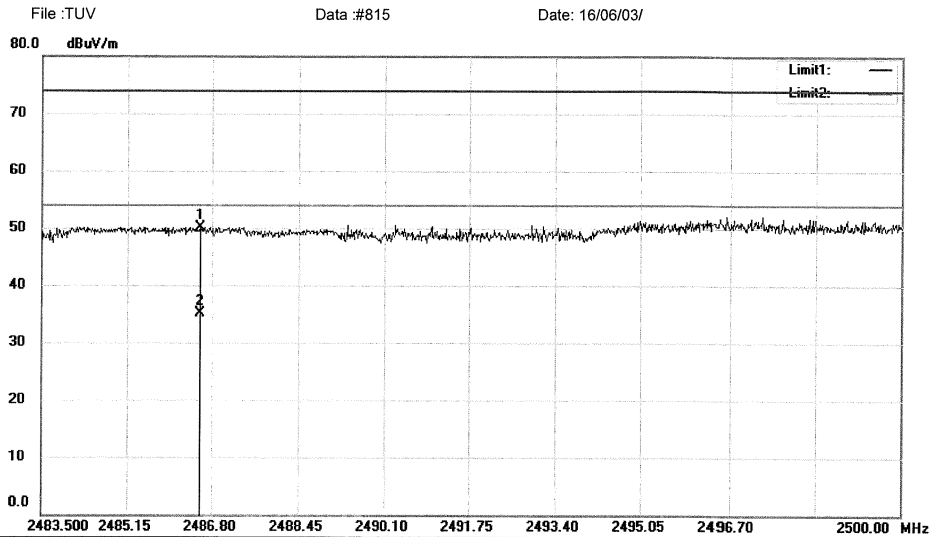
**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode: 11B 2462  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 2486.569 | 34.34         | 15.83          | 50.17        | 74.00  | -23.83 | peak           |              |        |
| 2   | *   | 2486.569 | 19.37         | 15.83          | 35.20        | 54.00  | -18.80 | AVG            |              |        |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#815

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

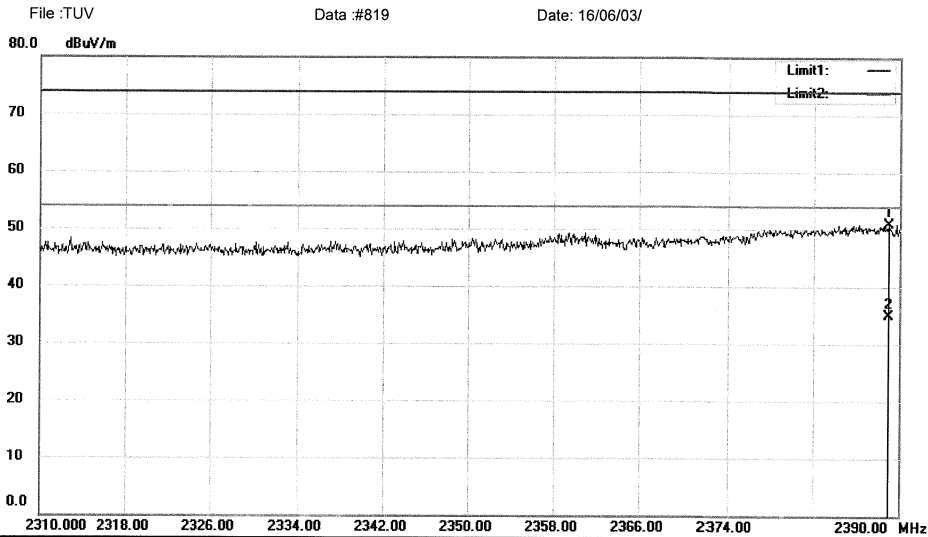
**Radiated Emission Measurement**


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode: 11G 2412  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 2388.960 | 35.88         | 15.03          | 50.91       | 74.00  | -23.09 | peak           |              |         |
| 2   | *   | 2388.960 | 19.87         | 15.03          | 34.90       | 54.00  | -19.10 | AVG            |              |         |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #819

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

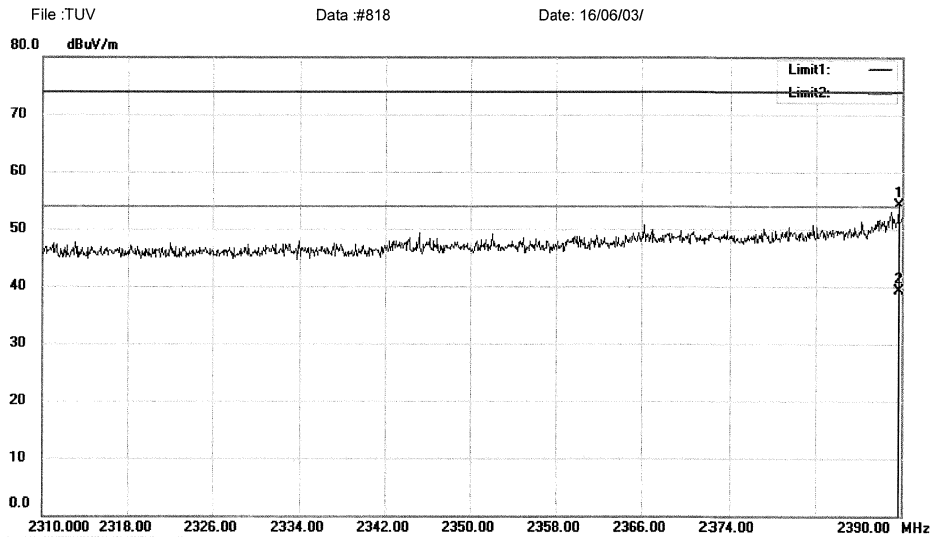
**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11G 2412  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |                |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|----------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree Comment |
| 1   |     | 2389.680 | 39.35         | 15.03          | 54.38        | 74.00  | -19.62 | peak           |              |                |
| 2   | *   | 2389.680 | 24.37         | 15.03          | 39.40        | 54.00  | -14.60 | AVG            |              |                |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#818

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

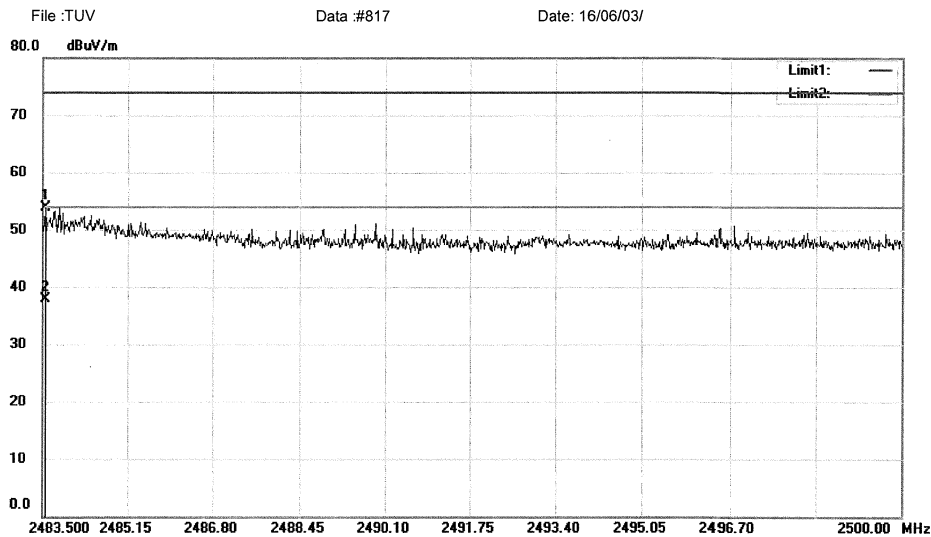
**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11G 2462  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 2483.550 | 38.05         | 15.80          | 53.85        | 74.00  | -20.15 | peak           |              |        |
| 2   | *   | 2483.550 | 22.20         | 15.80          | 38.00        | 54.00  | -16.00 | AVG            |              |        |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#817

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

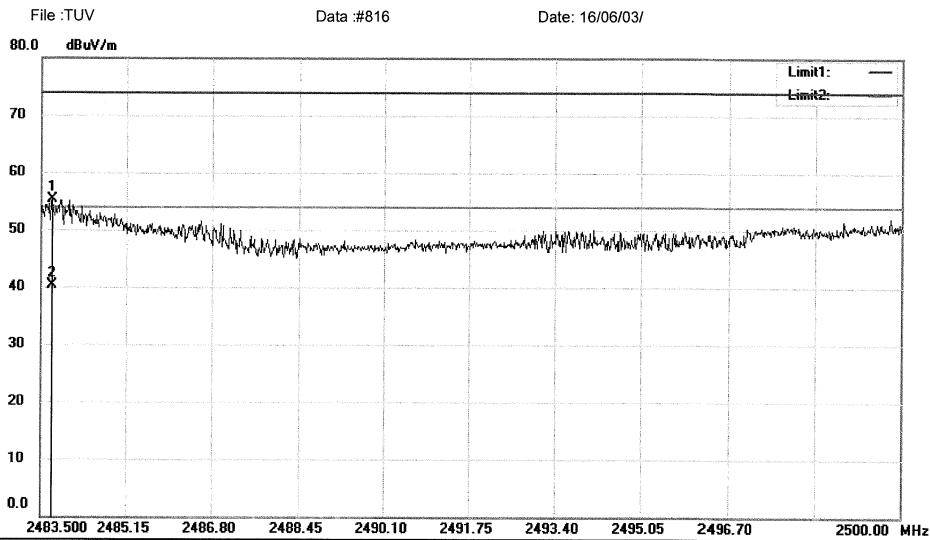
**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode:11G 2462  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 2483.715 | 39.51         | 15.80          | 55.31        | 74.00  | -18.69 | peak           |              |         |
| 2   | *   | 2483.715 | 24.50         | 15.80          | 40.30        | 54.00  | -13.70 | AVG            |              |         |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#816

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

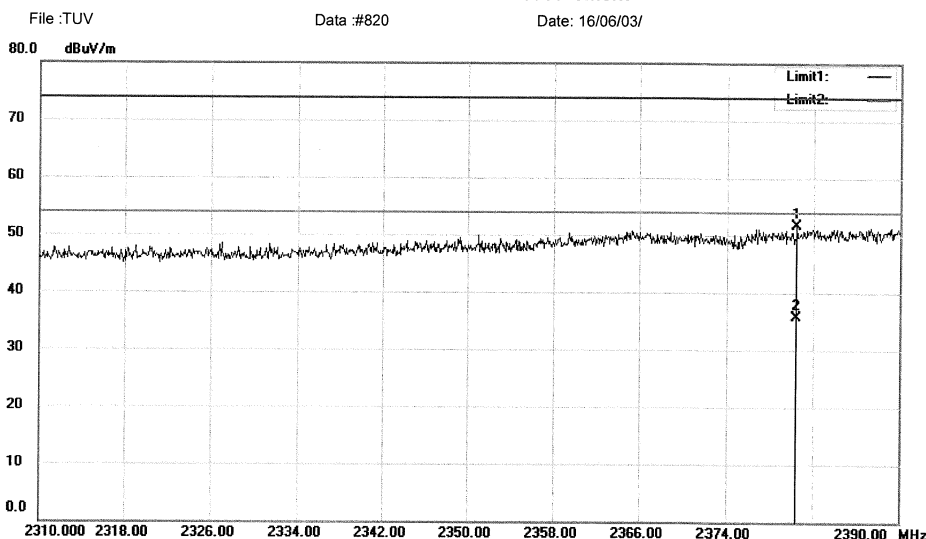
**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode: 11N 2412  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 2380.480 | 36.76         | 14.96          | 51.72        | 74.00  | -22.28 | peak           |              |         |
| 2   | *   | 2380.480 | 20.84         | 14.96          | 35.80        | 54.00  | -18.20 | AVG            |              |         |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#820

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

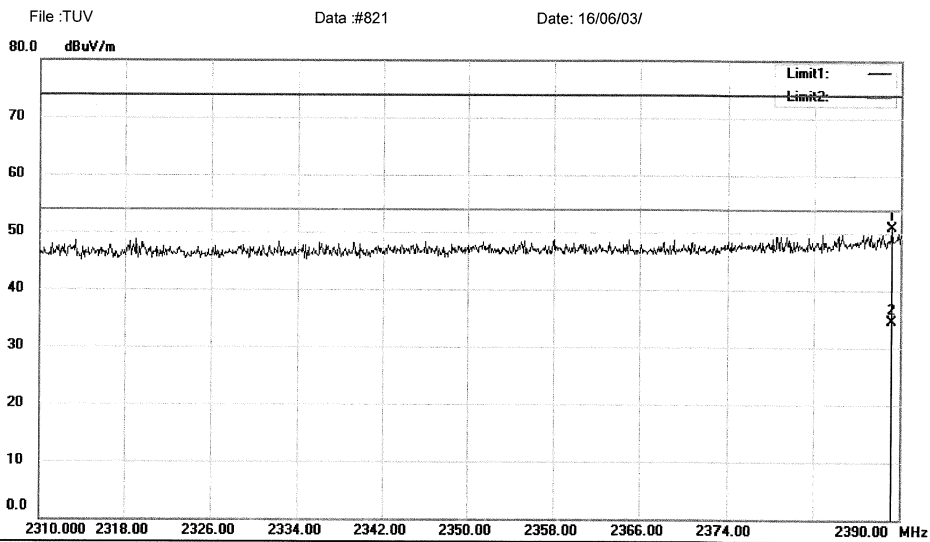
**Radiated Emission Measurement**


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode: 11N 2412  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |                |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|----------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree Comment |
| 1   |     | 2389.200 | 35.82         | 15.03          | 50.85        | 74.00  | -23.15 | peak           |              |                |
| 2   | *   | 2389.200 | 19.57         | 15.03          | 34.60        | 54.00  | -19.40 | AVG            |              |                |


\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData :#821

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

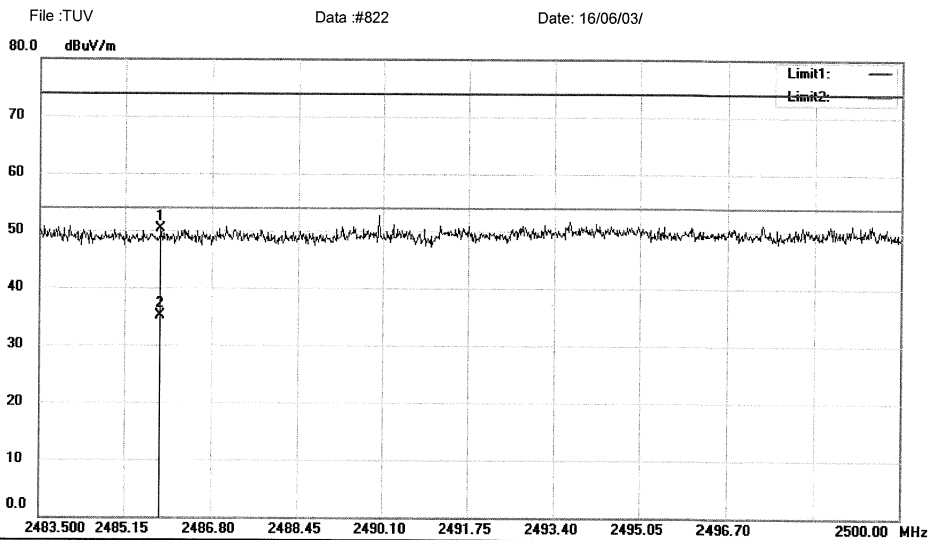
**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: MID  
 M/N: NS-P16AT08  
 Mode: 11N 2462  
 Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |                |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|----------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree Comment |
| 1   |     | 2485.827 | 34.48         | 15.82          | 50.30        | 74.00  | -23.70 | peak           |              |                |
| 2   | *   | 2485.827 | 19.38         | 15.82          | 35.20        | 54.00  | -18.80 | AVG            |              |                |

\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData :#822

Page: 1


Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV

Data :#823

Date: 16/06/03/

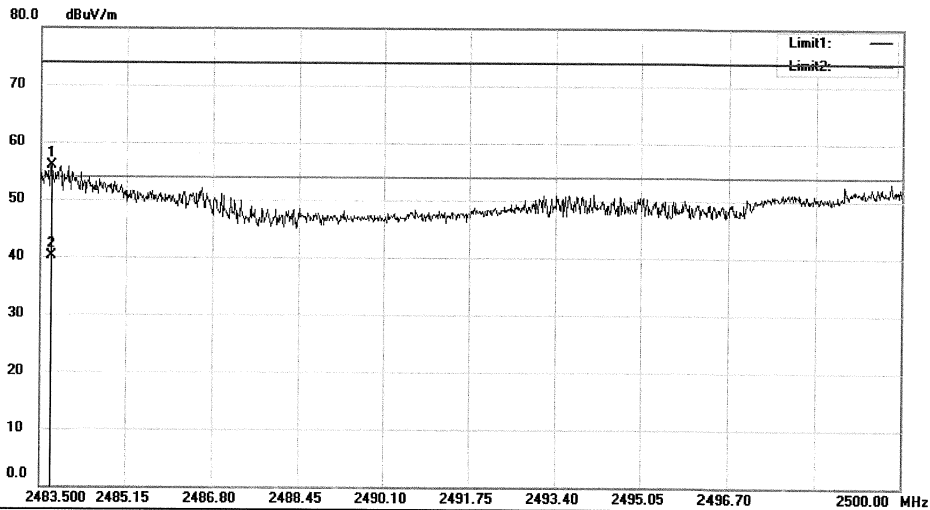

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2462

Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 2483.715 | 40.01         | 15.80          | 55.81        | 74.00  | -18.19 | peak           |              |        |
| 2   | *   | 2483.715 | 24.40         | 15.80          | 40.20        | 54.00  | -13.80 | AVG            |              |        |

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUVData :#823

Page: 1

**5.1.7 Conducted emissions****RESULT:****Pass**

|                   |   |                                       |
|-------------------|---|---------------------------------------|
| Date of testing   | : | 2016-06-03                            |
| Test standard     | : | FCC Part 15.207<br>RSS-Gen Clause 8.8 |
| Basic standard    | : | ANSI C63.10: 2013                     |
| Frequency range   | : | 0.15 – 30MHz                          |
| Limits            | : | FCC Part 15.207<br>Table 3 of RSS-Gen |
| Kind of test site | : | Shield room                           |

**Test setup**

|                      |   |               |
|----------------------|---|---------------|
| Input Voltage        | : | AC 120V, 60Hz |
| Operation Mode       | : | A             |
| Earthing             | : | Not Connected |
| Ambient temperature  | : | 22°C          |
| Relative humidity    | : | 55%           |
| Atmospheric pressure | : | 101kPa        |

For details refer to following test plot.


Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Conducted Emission Measurement**

 File: TUV  
 80.0 dBuV

Data: #2237

Date: 16/06/03/

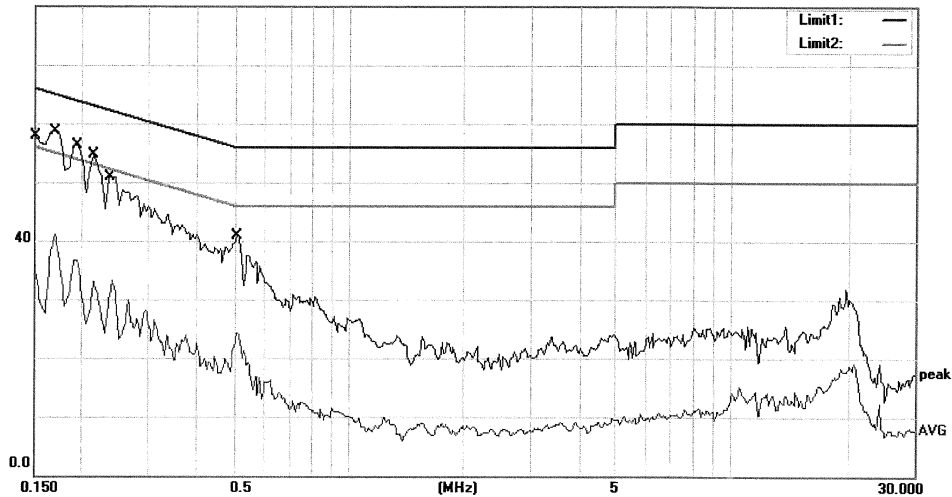

Site Conduction #1

Phase: L1

Temperature: 22

Limit: (CE)FCC PART 15 class B\_QP

Power: AC120V/60Hz

Humidity: 55 %

EUT: MID

M/N: NS-P16AT08

Mode: WIFI

Note:

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measure-ment | Limit | Over   | Detector | Comment |
|-----|-----|--------|---------------|----------------|--------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV         | dBuV  | dB     |          |         |
| 1   |     | 0.1500 | 57.87         | 0.00           | 57.87        | 66.00 | -8.13  | QP       |         |
| 2   |     | 0.1500 | 35.98         | 0.00           | 35.98        | 56.00 | -20.02 | AVG      |         |
| 3   | *   | 0.1700 | 58.77         | 0.00           | 58.77        | 64.96 | -6.19  | QP       |         |
| 4   |     | 0.1700 | 41.07         | 0.00           | 41.07        | 54.96 | -13.89 | AVG      |         |
| 5   |     | 0.1950 | 56.39         | 0.00           | 56.39        | 63.82 | -7.43  | QP       |         |
| 6   |     | 0.1950 | 36.74         | 0.00           | 36.74        | 53.82 | -17.08 | AVG      |         |
| 7   |     | 0.2150 | 54.70         | 0.00           | 54.70        | 63.01 | -8.31  | QP       |         |
| 8   |     | 0.2150 | 33.06         | 0.00           | 33.06        | 53.01 | -19.95 | AVG      |         |
| 9   |     | 0.2366 | 50.99         | 0.00           | 50.99        | 62.21 | -11.22 | QP       |         |
| 10  |     | 0.2366 | 33.36         | 0.00           | 33.36        | 52.21 | -18.85 | AVG      |         |
| 11  |     | 0.5100 | 40.99         | 0.00           | 40.99        | 56.00 | -15.01 | QP       |         |
| 12  |     | 0.5100 | 24.40         | 0.00           | 24.40        | 46.00 | -21.60 | AVG      |         |

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

File: TUVData: #2237

Page: 1


Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Conducted Emission Measurement**

File :TUV  
 80.0 dBuV

Data :#2238

Date: 16/06/03/

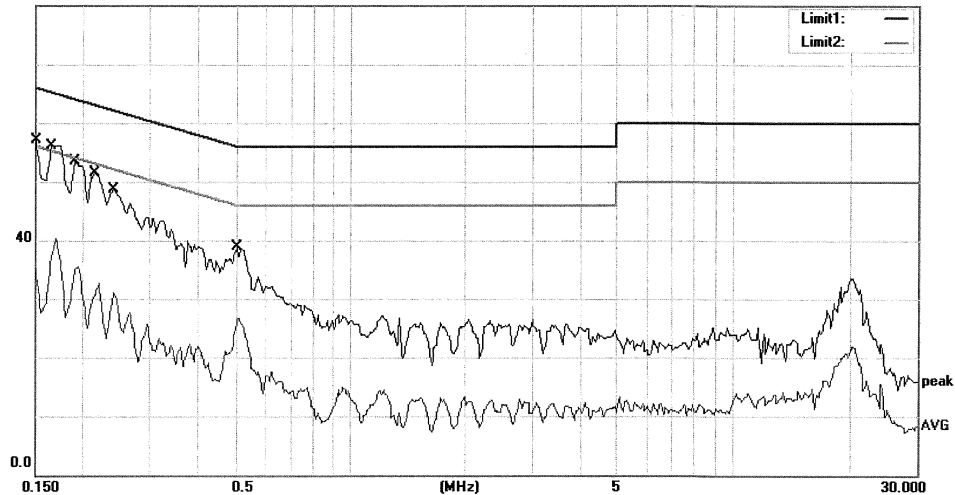

Site Conduction #1

Phase: N

Temperature: 22

Limit: (CE)FCC PART 15 class B\_QP

Power: AC120V/60Hz

Humidity: 55 %

EUT: MID

M/N: NS-P16AT08

Mode: WIFI

Note:

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measure-ment | Limit | Over   | Detector | Comment |
|-----|-----|--------|---------------|----------------|--------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV         | dBuV  | dB     |          |         |
| 1   | *   | 0.1500 | 57.05         | 0.00           | 57.05        | 66.00 | -8.95  | QP       |         |
| 2   |     | 0.1500 | 35.30         | 0.00           | 35.30        | 56.00 | -20.70 | AVG      |         |
| 3   |     | 0.1650 | 56.11         | 0.00           | 56.11        | 65.21 | -9.10  | QP       |         |
| 4   |     | 0.1650 | 40.25         | 0.00           | 40.25        | 55.21 | -14.96 | AVG      |         |
| 5   |     | 0.1900 | 53.60         | 0.00           | 53.60        | 64.04 | -10.44 | QP       |         |
| 6   |     | 0.1900 | 35.57         | 0.00           | 35.57        | 54.04 | -18.47 | AVG      |         |
| 7   |     | 0.2150 | 51.60         | 0.00           | 51.60        | 63.01 | -11.41 | QP       |         |
| 8   |     | 0.2150 | 32.75         | 0.00           | 32.75        | 53.01 | -20.26 | AVG      |         |
| 9   |     | 0.2400 | 48.77         | 0.00           | 48.77        | 62.10 | -13.33 | QP       |         |
| 10  |     | 0.2400 | 31.17         | 0.00           | 31.17        | 52.10 | -20.93 | AVG      |         |
| 11  |     | 0.5050 | 39.00         | 0.00           | 39.00        | 56.00 | -17.00 | QP       |         |
| 12  |     | 0.5050 | 26.78         | 0.00           | 26.78        | 46.00 | -19.22 | AVG      |         |

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

File :TUV\Data :#2238

Page: 1

## 7. List of Tables

|                                                                                  |    |
|----------------------------------------------------------------------------------|----|
| Table 1: List of Test and Measurement Equipment.....                             | 5  |
| Table 2: Measurement Uncertainty .....                                           | 6  |
| Table 3: Technical Specification of EUT .....                                    | 8  |
| Table 4: Technical Specification of Wi-Fi .....                                  | 8  |
| Table 5: Carrier Frequency .....                                                 | 9  |
| Table 6: Test result of Peak Output Power of 802.11b .....                       | 14 |
| Table 7: Test result of Peak Output Power of 802.11g .....                       | 14 |
| Table 8: Test result of Peak Output Power of 802.11n (HT20) .....                | 14 |
| Table 9: Test result of Peak Output Power of 802.11n (HT40) .....                | 14 |
| Table 10: Test result of 6dB Bandwidth and 99% Bandwidth of 802.11b .....        | 15 |
| Table 11: Test result of 6dB Bandwidth and 99% Bandwidth of 802.11g .....        | 15 |
| Table 12: Test result of 6dB Bandwidth and 99% Bandwidth of 802.11n (HT20) ..... | 15 |
| Table 13: Test result of 6dB Bandwidth and 99% Bandwidth of 802.11n (HT40) ..... | 15 |
| Table 14: Test result of power spectral density: .....                           | 33 |

## 8. List of Photographs

|                                                                    |     |
|--------------------------------------------------------------------|-----|
| Photograph 1: Set-up for Conducted Emissions .....                 | 113 |
| Photograph 2: Set-up for Spurious Emissions for below 30MHz .....  | 113 |
| Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz ..... | 114 |
| Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz .....    | 114 |
| Photograph 5: Set-up for Spurious Emissions for 18 - 26.5GHz.....  | 115 |