



FCC RF Test Report

APPLICANT : Huawei Technologies Co.,Ltd.
EQUIPMENT : LTE CPE
BRAND NAME : HUAWEI
MODEL NAME : B311-520
FCC ID : QISB311-520
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Dec. 05, 2018 and completely tested on Jan. 07, 2019. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sporton International (Shenzhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City,
Guangdong Province 518055, China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Accessories List	7
1.6 Modification of EUT	7
1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	8
1.8 Testing Location	10
1.9 Applicable Standards	10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1 Test Mode	11
2.2 Connection Diagram of Test System	13
2.3 Support Unit used in test configuration and system	13
2.4 Measurement Results Explanation Example	13
2.5 Frequency List of Low/Middle/High Channels	14
3 CONDUCTED TEST ITEMS	17
3.1 Measuring Instruments	17
3.2 Test Setup	17
3.3 Test Result of Conducted Test	17
3.4 Conducted Output Power and ERP/EIRP	18
3.5 Peak-to-Average Ratio	19
3.6 Occupied Bandwidth	20
3.7 Conducted Band Edge	21
3.8 Conducted Spurious Emission	23
3.9 Frequency Stability	24
4 RADIATED TEST ITEMS	25
4.1 Measuring Instruments	25
4.2 Test Setup	25
4.3 Test Result of Radiated Test	25
4.4 Radiated Spurious Emission	26
5 LIST OF MEASURING EQUIPMENT	27
6 UNCERTAINTY OF EVALUATION	28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG8D0505B	Rev. 01	Initial issue of report	Jan. 18, 2019

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4) (Band 66)	EIRP < 1Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 66)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)		-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 66)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 66)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 27.01 dB at 10104.36 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		



1 General Description

1.1 Applicant

Huawei Technologies Co.,Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.2 Manufacturer

Huawei Technologies Co.,Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE CPE
Brand Name	HUAWEI
Model Name	B311-520
FCC ID	QISB311-520
EUT supports Radios application	WCDMA/LTE WLAN 2.4GHz 802.11b/g/n (HT20/HT40)
IMEI Code	Conducted: 867809040001196 RSE: 867809040001204
HW Version	WL3B311SW06
SW Version	8.0.1.1(H183SP3C00)
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 66 : 2110.7 MHz~ 2179.3 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 66 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 2 : 21.94 dBm LTE Band 4 : 22.43 dBm LTE Band 5 : 22.55 dBm LTE Band 7 : 22.70 dBm LTE Band 66 : 21.99 dBm
Antenna Type	Internal Antenna 1dBi External Antenna 3dBi External Antenna
Antenna Gain	Internal Main Antenna: Band 2: 1.08 dBi Band 4: 0.26 dBi Band 5: 0.98 dBi Band 7: 1.91 dBi Band 66: 0.26 dBi 1dBi External Antenna (#1): Band 2: 1.0 dBi Band 4: 1.0 dBi Band 5: 1.0 dBi Band 7: 1.0 dBi Band 66: 1.0 dBi 3dBi External Antenna (#2): Band 2: 3.0 dBi Band 4: 3.0 dBi Band 5: 3.0 dBi Band 7: 3.0 dBi Band 66: 3.0 dBi
Type of Modulation	QPSK / 16QAM

Note:

1. There are Internal PCB Antenna and External PCB Antenna that support TX function, but the Internal Antenna will not work when External Antenna is connected.
2. The maximum ERP/EIRP is calculated with the maximum antenna gain from the Internal and External Antennas.

1.5 Accessories List

Specification of Accessory				
AC Adapter 1	Brand Name	HONOR	Model Name	HW-120100U01/HW-120100E01/ HW-120100B01/HW-120100A01
	Power Rating	I/P: 100 - 240 Vac, 0.5A; O/P: 12Vdc, 1.0A		
AC Adapter 2	Brand Name	Fuhua	Model Name	HW-120100U01/HW-120100E01/ HW-120100B01/HW-120100A01
	Power Rating	I/P: 100 - 240 Vac, 0.5A; O/P: 12Vdc, 1.0A		

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M10G7D	-	0.2958	1M10W7D	-	0.2460
3	1851.5 ~ 1908.5	2M73G7D	-	0.2985	2M72W7D	-	0.2472
5	1852.5 ~ 1907.5	4M52G7D	-	0.3090	4M49W7D	-	0.2570
10	1855.0 ~ 1905.0	9M09G7D	0.0007	0.3112	9M09W7D	-	0.2618
15	1857.5 ~ 1902.5	13M5G7D	-	0.3062	13M5W7D	-	0.2582
20	1860.0 ~ 1900.0	18M5G7D	-	0.3119	18M5W7D	-	0.2761
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M09G7D	-	0.2924	1M09W7D	-	0.2559
3	1711.5 ~ 1753.5	2M76G7D	-	0.2864	2M74W7D	-	0.2553
5	1712.5 ~ 1752.5	4M51G7D	-	0.3491	4M49W7D	-	0.3097
10	1715.0 ~ 1750.0	9M11G7D	0.0006	0.3412	9M07W7D	-	0.2999
15	1717.5 ~ 1747.5	13M5G7D	-	0.3133	13M5W7D	-	0.2716
20	1720.0 ~ 1745.0	18M5G7D	-	0.3119	18M5W7D	-	0.2716
LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M09G7D	-	0.1778	1M10W7D	-	0.1510
3	825.5 ~ 847.5	2M73G7D	-	0.1770	2M73W7D	-	0.1493
5	826.5 ~ 846.5	4M51G7D	-	0.1750	4M49W7D	-	0.1549
10	829.0 ~ 844.0	9M07G7D	0.0033	0.2188	9M09W7D	-	0.1841
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M50G7D	-	0.3656	4M49W7D	-	0.3083
10	2505.0 ~ 2565.0	9M07G7D	0.0004	0.3631	9M09W7D	-	0.3090
15	2507.5 ~ 2562.5	13M6G7D	-	0.3715	13M5W7D	-	0.3126
20	2510.0 ~ 2560.0	18M5G7D	-	0.3690	18M6W7D	-	0.3258



LTE Band 66		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1779.3	1M10G7D	-	0.2704	1M10W7D	-	0.2344
3	1711.5 ~ 1778.5	2M73G7D	-	0.2679	2M73W7D	-	0.2301
5	1712.5 ~ 1777.5	4M51G7D	-	0.3119	4M48W7D	-	0.2754
10	1715.0 ~ 1775.0	9M05G7D	0.0005	0.3034	9M11W7D	-	0.2636
15	1717.5 ~ 1772.5	13M6G7D	-	0.3020	13M5W7D	-	0.2612
20	1720.0 ~ 1770.0	18M5G7D	-	0.3155	18M4W7D	-	0.2692

1.8 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City, Guangdong Province 518055, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN5018	337463

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District, Shenzhen City, Guangdong Province 518055, China TEL: +86-755- 3320-2398		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN5019	577730

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v		v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v		v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v		v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v		v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v		v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v		v		v	v	v	v
	4						v	v	v		v		v	v	v	v
	5				v	-	-	v	v		v		v	v	v	v
	7	-	-				v	v	v		v		v	v	v	v
	66						v	v	v		v		v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v				v	v	v	v
	4	v	v	v	v	v	v	v	v				v	v	v	v
	5	v	v	v	v	-	-	v	v				v	v	v	v
	7	-	-	v	v	v	v	v	v				v	v	v	v
	66	v	v	v	v	v	v	v	v				v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v		v		v	v		v
	4	v	v	v	v	v	v	v	v		v		v	v		v
	5	v	v	v	v	-	-	v	v		v		v	v		v
	7	-	-	v	v	v	v	v	v		v		v	v		v
	66	v	v	v	v	v	v	v	v		v		v	v		v



Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v	v		v			v	v	v
	5	v	v	v	v	-	-	v	v		v			v	v	v
	7	-	-	v	v	v	v	v	v		v			v	v	v
	66	v	v	v	v	v	v	v	v		v			v	v	v
Frequency Stability	2				v			v					v		v	
	4				v			v					v		v	
	5				v	-	-	v					v		v	
	7	-	-		v			v					v		v	
	66				v			v					v		v	
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v	v		v			v	v	v
	5	v	v	v	v	-	-	v	v		v			v	v	v
	7	-	-	v	v	v	v	v	v		v			v	v	v
	66	v	v	v	v	v	v	v	v		v			v	v	v
Radiated Spurious Emission	2	v	v	v	v	v	v	v			v				v	
	4	v	v	v	v	v	v	v			v				v	
	5	v	v	v	v	-	-	v			v				v	
	7	-	-	v	v	v	v	v			v				v	
	66	v	v	v	v	v	v	v			v				v	
Note	3. The mark "v" means that this configuration is chosen for testing 4. The mark "-" means that this bandwidth is not supported. 5. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 6. For RSE test items: External Antenna #2 is assessed to perform full tests, External Antenna #1 and Internal Antenna are assessed to verify the worst cases.															

2.2 Connection Diagram of Test System

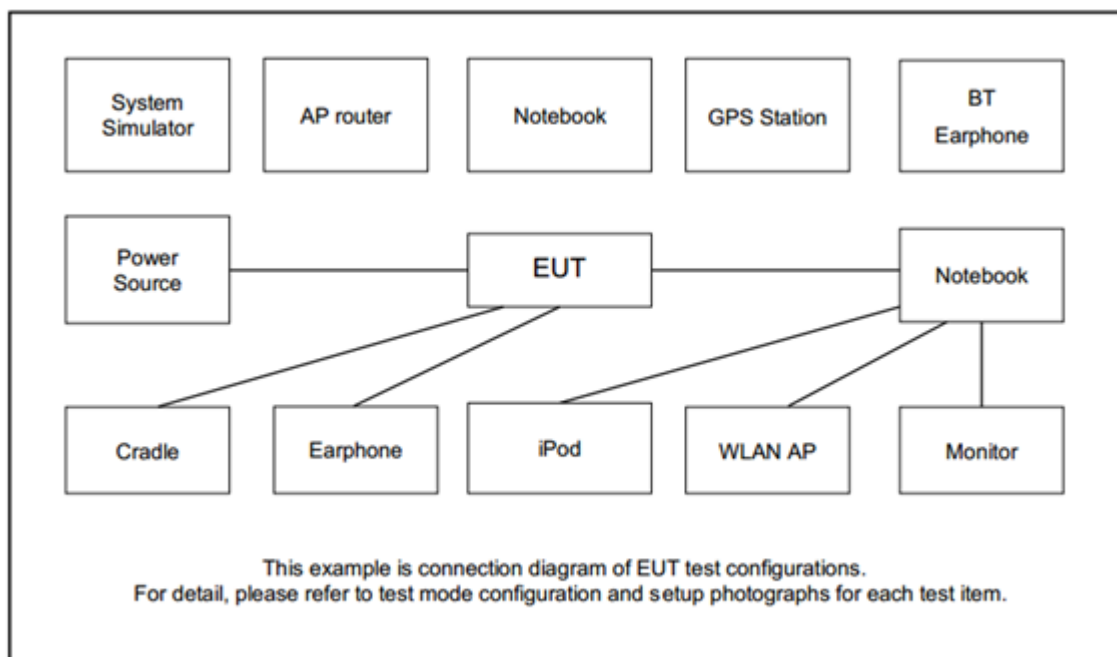

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 5.0 + 10 = 15.0 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

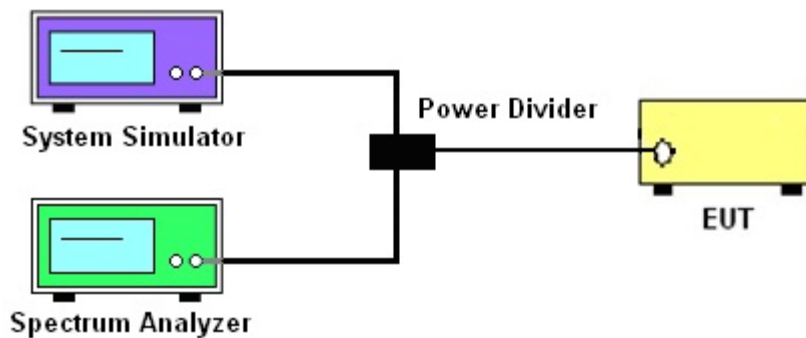

3.2.3 Frequency Stability

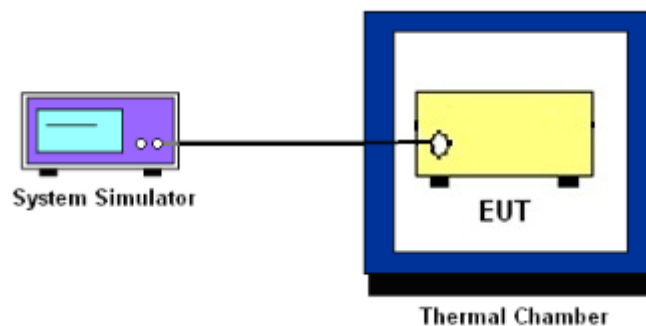

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2 and Band 7.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4 and Band 66.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$
11. For Band 7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$
 $= -25\text{dBm}.$

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

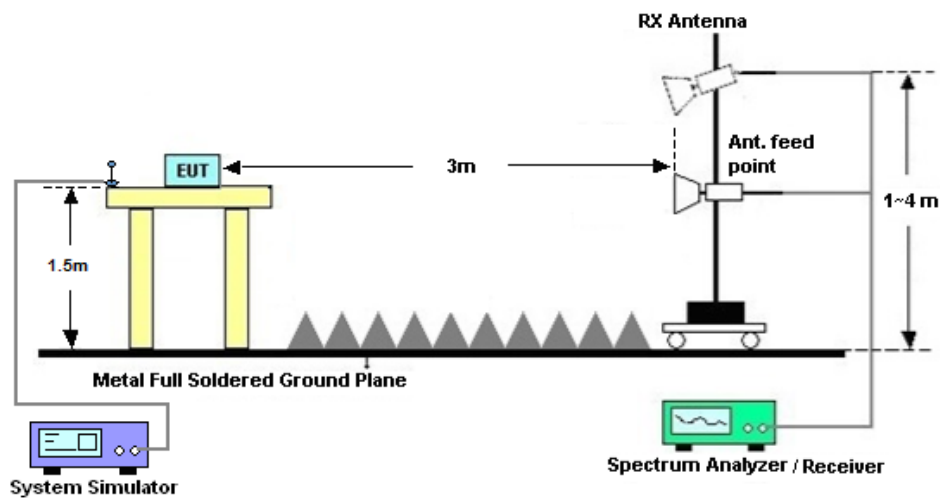

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 19, 2018	Jan. 05, 2019~ Jan. 07, 2019	Apr. 18, 2019	Conducted (TH01-SZ)
DC Power Supply	GWINSTEK	AnritsuGPS-3030D	EM882636	Max 30V	Apr. 19, 2018	Jan. 05, 2019~ Jan. 07, 2019	Apr. 18, 2019	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Dec. 22, 2018	Jan. 05, 2019~ Jan. 07, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 19, 2018	Dec. 31, 2018	Apr. 18, 2019	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	May 10, 2018	Dec. 31, 2018	May 09, 2019	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Dec. 12, 2018	Dec. 31, 2018	Dec. 11, 2019	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar. 30, 2018	Dec. 31, 2018	Mar. 29, 2019	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 20, 2018	Dec. 31, 2018	Oct. 19, 2019	Radiation (03CH02-SZ)
HF Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 20, 2018	Dec. 31, 2018	Oct. 19, 2019	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 30, 2018	Dec. 31, 2018	Jul. 29, 2019	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Dec. 31, 2018	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Dec. 31, 2018	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Dec. 31, 2018	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.94	21.80	21.89
20	1	49		21.48	21.52	21.33
20	1	99		21.60	21.90	21.50
20	50	0		20.74	20.74	20.34
20	50	24		20.64	20.39	20.28
20	50	50		20.52	20.67	20.70
20	100	0		20.56	20.55	20.54
20	1	0	16-QAM	21.41	21.13	21.25
20	1	49		20.78	20.83	20.46
20	1	99		21.02	20.99	20.91
20	50	0		20.74	20.49	20.29
20	50	24		20.64	20.24	20.24
20	50	50		20.51	20.62	20.64
20	100	0		20.54	20.52	20.49
15	1	0	QPSK	21.71	21.58	21.37
15	1	37		21.86	21.70	21.46
15	1	74		21.21	21.54	21.32
15	36	0		20.64	20.37	20.09
15	36	20		20.65	20.50	20.30
15	36	39		20.40	20.49	20.57
15	75	0		20.47	20.38	20.45
15	1	0	16-QAM	20.97	20.86	20.68
15	1	37		21.12	20.94	20.80
15	1	74		20.52	20.85	20.70
15	36	0		20.55	20.32	20.03
15	36	20		20.57	20.43	20.24
15	36	39		20.34	20.42	20.50
15	75	0		20.37	20.31	20.38



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	21.50	21.45	20.95
10	1	25		21.93	21.70	21.76
10	1	49		21.19	21.46	21.09
10	25	0		20.39	20.27	19.98
10	25	12		20.50	20.37	20.45
10	25	25		20.33	20.23	20.42
10	50	0		20.34	20.11	20.36
10	1	0	16-QAM	20.72	20.76	20.25
10	1	25		21.18	20.94	21.05
10	1	49		20.47	20.81	20.46
10	25	0		20.31	20.22	19.94
10	25	12		20.43	20.31	20.37
10	25	25		20.26	20.17	20.37
10	50	0		20.27	20.06	20.29
5	1	0	QPSK	21.03	21.05	21.03
5	1	12		21.90	21.73	21.85
5	1	24		21.08	20.99	20.85
5	12	0		20.50	20.42	20.53
5	12	7		20.77	20.59	20.72
5	12	13		20.55	20.40	20.53
5	25	0		20.51	20.34	20.58
5	1	0	16-QAM	20.24	20.29	20.27
5	1	12		21.10	21.01	21.06
5	1	24		20.36	20.23	20.15
5	12	0		20.44	20.39	20.48
5	12	7		20.73	20.55	20.69
5	12	13		20.51	20.37	20.51
5	25	0		20.43	20.30	20.51



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	21.18	21.18	21.27
3	1	8		21.75	21.60	21.66
3	1	14		21.57	21.40	21.27
3	8	0		20.48	20.36	20.56
3	8	4		20.70	20.56	20.69
3	8	7		20.71	20.56	20.64
3	15	0		20.58	20.45	20.59
3	1	0	16-QAM	20.35	20.43	20.46
3	1	8		20.93	20.80	20.90
3	1	14		20.81	20.66	20.55
3	8	0		20.41	20.34	20.51
3	8	4		20.63	20.54	20.64
3	8	7		20.64	20.52	20.58
3	15	0		20.52	20.40	20.54
1.4	1	0	QPSK	21.47	21.43	21.49
1.4	1	3		21.71	21.62	21.58
1.4	1	5		21.61	21.51	21.45
1.4	3	0		21.52	21.49	21.56
1.4	3	1		21.61	21.56	21.56
1.4	3	3		21.63	21.55	21.43
1.4	6	0		20.60	20.56	20.59
1.4	1	0	16-QAM	20.62	20.67	20.66
1.4	1	3		20.91	20.88	20.81
1.4	1	5		20.89	20.78	20.71
1.4	3	0		20.51	20.55	20.61
1.4	3	1		20.64	20.59	20.62
1.4	3	3		20.62	20.62	20.52
1.4	6	0		20.56	20.57	20.59



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.94	21.84	21.94
20	1	49		21.82	21.82	21.62
20	1	99		21.49	21.77	21.88
20	50	0		20.69	20.78	20.80
20	50	24		20.65	20.72	20.69
20	50	50		20.64	20.90	20.80
20	100	0		20.64	20.73	20.85
20	1	0	16-QAM	21.09	21.19	21.28
20	1	49		21.19	21.12	21.18
20	1	99		20.89	21.04	21.34
20	50	0		20.76	20.68	20.82
20	50	24		20.73	20.64	20.73
20	50	50		20.72	20.82	20.84
20	100	0		20.74	20.65	20.89
15	1	0	QPSK	21.95	21.93	21.87
15	1	37		21.96	21.81	21.82
15	1	74		21.33	21.32	21.67
15	36	0		20.79	20.65	20.77
15	36	20		20.65	20.91	20.96
15	36	39		20.48	20.78	20.79
15	75	0		20.62	20.69	20.72
15	1	0	16-QAM	21.25	21.34	21.31
15	1	37		21.19	21.20	21.19
15	1	74		20.63	20.73	21.03
15	36	0		20.69	20.62	20.72
15	36	20		20.55	20.84	20.90
15	36	39		20.38	20.71	20.74
15	75	0		20.53	20.60	20.65



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.23	22.08	22.30
10	1	25		22.29	22.17	22.33
10	1	49		21.71	21.67	21.95
10	25	0		20.95	20.89	20.93
10	25	12		21.07	21.09	21.17
10	25	25		20.89	20.86	20.98
10	50	0		20.96	20.87	20.90
10	1	0	16-QAM	21.52	21.48	21.59
10	1	25		21.77	21.59	21.66
10	1	49		21.04	21.01	21.34
10	25	0		20.95	20.83	20.87
10	25	12		21.07	21.02	21.12
10	25	25		20.90	20.79	20.94
10	50	0		20.96	20.79	20.84
5	1	0	QPSK	21.76	21.72	22.01
5	1	12		22.18	22.22	22.43
5	1	24		21.61	21.47	21.88
5	12	0		20.96	21.01	21.28
5	12	7		21.45	21.30	21.55
5	12	13		21.31	21.13	21.32
5	25	0		21.21	21.06	21.24
5	1	0	16-QAM	21.19	21.08	21.41
5	1	12		21.70	21.65	21.91
5	1	24		21.13	20.90	21.25
5	12	0		21.05	20.94	21.24
5	12	7		21.33	21.25	21.52
5	12	13		21.20	21.07	21.28
5	25	0		21.10	20.98	21.18



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	20.92	20.89	21.12
3	1	8		21.42	21.38	21.57
3	1	14		21.20	21.14	21.49
3	8	0		20.26	20.18	20.70
3	8	4		20.43	20.42	20.79
3	8	7		20.43	20.36	20.80
3	15	0		20.32	20.31	20.69
3	1	0	16-QAM	20.15	20.16	20.68
3	1	8		20.64	20.65	21.07
3	1	14		20.54	20.54	20.88
3	8	0		20.19	20.28	20.67
3	8	4		20.36	20.51	20.77
3	8	7		20.36	20.45	20.77
3	15	0		20.25	20.37	20.63
1.4	1	0	QPSK	21.18	21.24	21.41
1.4	1	3		21.36	21.38	21.66
1.4	1	5		21.27	21.25	21.61
1.4	3	0		21.20	21.26	21.55
1.4	3	1		21.26	21.40	21.62
1.4	3	3		21.26	21.39	21.63
1.4	6	0		20.34	20.50	20.83
1.4	1	0	16-QAM	20.37	20.61	20.94
1.4	1	3		20.60	20.78	21.08
1.4	1	5		20.51	20.65	21.08
1.4	3	0		20.30	20.53	20.79
1.4	3	1		20.35	20.54	20.87
1.4	3	3		20.38	20.57	20.87
1.4	6	0		20.31	20.49	20.81



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	21.85	21.81	22.20
10	1	25		22.28	22.55	22.14
10	1	49		21.73	21.84	21.61
10	25	0		20.94	20.80	20.86
10	25	12		21.06	21.14	21.05
10	25	25		20.72	20.99	20.71
10	50	0		20.81	20.88	20.96
10	1	0	16-QAM	21.34	21.15	21.46
10	1	25		21.61	21.80	21.49
10	1	49		21.07	21.24	20.97
10	25	0		20.86	20.78	20.84
10	25	12		21.01	21.09	21.02
10	25	25		20.69	20.97	20.68
10	50	0		20.76	20.84	20.94
5	1	0	QPSK	20.72	20.57	20.77
5	1	12		21.52	21.58	21.58
5	1	24		20.59	21.09	20.66
5	12	0		20.16	20.27	20.12
5	12	7		20.30	20.61	20.42
5	12	13		20.01	20.46	20.20
5	25	0		20.00	20.35	20.08
5	1	0	16-QAM	19.87	20.04	20.08
5	1	12		20.75	21.05	20.82
5	1	24		19.83	20.36	20.01
5	12	0		20.11	20.26	20.12
5	12	7		20.42	20.61	20.41
5	12	13		20.24	20.44	20.19
5	25	0		20.20	20.32	20.04



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	20.76	21.13	21.04
3	1	8		21.37	21.63	21.47
3	1	14		21.25	21.46	21.03
3	8	0		20.26	20.34	20.24
3	8	4		20.46	20.54	20.37
3	8	7		20.42	20.56	20.30
3	15	0		20.37	20.44	20.25
3	1	0	16-QAM	20.18	20.39	20.28
3	1	8		20.78	20.89	20.72
3	1	14		20.53	20.73	20.33
3	8	0		20.25	20.35	20.25
3	8	4		20.46	20.56	20.38
3	8	7		20.42	20.58	20.29
3	15	0		20.34	20.41	20.23
1.4	1	0	QPSK	21.00	21.43	21.32
1.4	1	3		21.27	21.65	21.35
1.4	1	5		21.23	21.54	21.12
1.4	3	0		21.34	21.48	21.29
1.4	3	1		21.35	21.56	21.30
1.4	3	3		21.39	21.58	21.20
1.4	6	0		20.41	20.52	20.27
1.4	1	0	16-QAM	20.45	20.69	20.51
1.4	1	3		20.71	20.94	20.63
1.4	1	5		20.56	20.86	20.39
1.4	3	0		20.40	20.54	20.35
1.4	3	1		20.40	20.62	20.38
1.4	3	3		20.42	20.65	20.27
1.4	6	0		20.40	20.52	20.26



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.33	22.57	22.49
20	1	49		22.39	22.35	22.53
20	1	99		22.65	22.33	22.67
20	50	0		21.05	21.43	21.65
20	50	24		21.19	21.18	21.56
20	50	50		21.46	21.07	21.28
20	100	0		21.23	21.24	21.53
20	1	0	16-QAM	21.46	22.11	21.75
20	1	49		21.59	21.61	21.79
20	1	99		22.13	21.70	21.07
20	50	0		21.14	21.32	21.54
20	50	24		21.28	21.08	21.46
20	50	50		21.54	20.97	21.18
20	100	0		21.34	21.15	21.44
15	1	0	QPSK	22.06	22.63	22.52
15	1	37		22.59	22.47	22.70
15	1	74		22.38	21.95	21.53
15	36	0		21.31	21.40	21.61
15	36	20		21.45	21.34	21.55
15	36	39		21.36	21.07	21.17
15	75	0		21.32	21.23	21.48
15	1	0	16-QAM	21.49	21.88	21.78
15	1	37		21.82	21.74	21.95
15	1	74		21.63	21.25	20.87
15	36	0		21.21	21.32	21.53
15	36	20		21.35	21.27	21.47
15	36	39		21.26	21.00	21.09
15	75	0		21.22	21.14	21.39



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.16	22.37	22.52
10	1	25		22.57	22.60	22.54
10	1	49		22.25	21.88	21.41
10	25	0		21.11	21.19	21.32
10	25	12		21.41	21.33	21.37
10	25	25		21.19	21.04	20.98
10	50	0		21.19	21.10	21.19
10	1	0	16-QAM	21.34	21.62	21.81
10	1	25		21.81	21.90	21.85
10	1	49		21.51	21.18	20.80
10	25	0		21.01	21.11	21.23
10	25	12		21.31	21.25	21.27
10	25	25		21.09	20.96	20.89
10	50	0		21.09	21.02	21.11
5	1	0	QPSK	21.79	21.94	21.80
5	1	12		22.61	22.63	22.36
5	1	24		21.92	21.77	21.29
5	12	0		21.24	21.34	21.22
5	12	7		21.53	21.53	21.33
5	12	13		21.35	21.28	20.92
5	25	0		21.28	21.30	21.12
5	1	0	16-QAM	20.95	21.18	21.05
5	1	12		21.81	21.89	21.66
5	1	24		21.19	21.08	20.60
5	12	0		21.15	21.27	21.15
5	12	7		21.43	21.47	21.26
5	12	13		21.28	21.22	20.85
5	25	0		21.18	21.22	21.02



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.51	21.79	21.99
20	1	49		20.95	21.04	20.97
20	1	99		20.86	21.21	21.25
20	50	0		20.08	20.09	19.83
20	50	24		19.95	19.97	19.83
20	50	50		19.92	20.09	19.92
20	100	0		20.05	20.14	20.39
20	1	0	16-QAM	20.92	21.11	21.30
20	1	49		20.32	20.34	20.27
20	1	99		20.32	20.61	20.68
20	50	0		20.06	20.00	19.78
20	50	24		19.92	19.89	19.77
20	50	50		19.82	20.02	19.86
20	100	0		19.95	20.07	20.34
15	1	0	QPSK	21.42	21.64	21.80
15	1	37		21.26	21.26	21.24
15	1	74		20.76	21.17	21.21
15	36	0		20.03	20.19	20.09
15	36	20		20.12	20.18	19.96
15	36	39		19.85	20.07	20.42
15	75	0		20.19	20.24	20.59
15	1	0	16-QAM	20.75	20.94	21.17
15	1	37		20.62	20.59	20.56
15	1	74		20.19	20.40	20.65
15	36	0		20.04	20.12	20.04
15	36	20		20.12	20.12	19.92
15	36	39		19.87	20.03	20.38
15	75	0		20.09	20.16	20.54



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	21.66	21.69	21.62
10	1	25		21.68	21.59	21.82
10	1	49		21.09	21.12	21.49
10	25	0		20.24	20.23	20.24
10	25	12		20.46	20.41	20.70
10	25	25		20.30	20.35	20.94
10	50	0		20.25	20.32	20.90
10	1	0	16-QAM	20.78	21.07	21.02
10	1	25		20.96	21.06	21.21
10	1	49		20.42	20.54	20.80
10	25	0		20.14	20.26	20.18
10	25	12		20.37	20.45	20.63
10	25	25		20.21	20.28	20.87
10	50	0		20.16	20.24	20.83
5	1	0	QPSK	21.26	21.33	21.74
5	1	12		21.58	21.59	21.94
5	1	24		20.89	20.88	21.33
5	12	0		20.26	20.53	20.76
5	12	7		20.53	20.69	21.06
5	12	13		20.49	20.54	20.99
5	25	0		20.32	20.45	20.95
5	1	0	16-QAM	20.42	20.78	21.01
5	1	12		20.81	21.03	21.40
5	1	24		20.18	20.22	20.70
5	12	0		20.19	20.48	20.71
5	12	7		20.45	20.65	21.02
5	12	13		20.42	20.49	20.94
5	25	0		20.24	20.39	20.89



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	20.23	20.45	20.81
3	1	8		20.75	20.85	21.28
3	1	14		20.52	20.59	21.06
3	8	0		19.54	19.84	20.19
3	8	4		19.73	19.96	20.41
3	8	7		19.72	19.92	20.39
3	15	0		19.62	19.87	20.23
3	1	0	16-QAM	19.48	19.83	20.09
3	1	8		20.01	20.29	20.62
3	1	14		19.81	20.01	20.40
3	8	0		19.47	19.81	20.14
3	8	4		19.65	19.92	20.35
3	8	7		19.68	19.88	20.36
3	15	0		19.56	19.82	20.18
1.4	1	0	QPSK	20.50	20.68	21.17
1.4	1	3		20.65	20.81	21.32
1.4	1	5		20.58	20.74	21.23
1.4	3	0		20.52	20.80	21.23
1.4	3	1		20.59	20.86	21.25
1.4	3	3		20.61	20.87	21.23
1.4	6	0		19.65	19.95	20.36
1.4	1	0	16-QAM	19.76	20.12	20.48
1.4	1	3		19.94	20.27	20.70
1.4	1	5		19.90	20.15	20.62
1.4	3	0		19.61	19.90	20.36
1.4	3	1		19.64	20.00	20.44
1.4	3	3		19.83	19.99	20.42
1.4	6	0		19.75	19.94	20.34

ERP/EIRP

LTE Band 2 (GT - LC = 3.0 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
(MHz)									
Conducted Power (dBm)	21.71	21.62	21.58	21.75	21.60	21.66	21.90	21.73	21.85
Conducted Power (Watts)	0.1483	0.1452	0.1439	0.1496	0.1445	0.1466	0.1549	0.1489	0.1531
EIRP(dBm)	24.71	24.62	24.58	24.75	24.60	24.66	24.90	24.73	24.85
EIRP(Watts)	0.2958	0.2897	0.2871	0.2985	0.2884	0.2924	0.3090	0.2972	0.3055

LTE Band 2 (GT - LC = 3.0 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
(MHz)									
Conducted Power (dBm)	21.93	21.70	21.76	21.86	21.70	21.46	21.94	21.80	21.89
Conducted Power (Watts)	0.1560	0.1479	0.1500	0.1535	0.1479	0.1400	0.1563	0.1514	0.1545
EIRP(dBm)	24.93	24.70	24.76	24.86	24.70	24.46	24.94	24.80	24.89
EIRP(Watts)	0.3112	0.2951	0.2992	0.3062	0.2951	0.2793	0.3119	0.3020	0.3083



LTE Band 2 (GT - LC = 3.0 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
(MHz)									
Conducted Power (dBm)	20.91	20.88	20.81	20.93	20.80	20.90	21.10	21.01	21.06
Conducted Power (Watts)	0.1233	0.1225	0.1205	0.1239	0.1202	0.1230	0.1288	0.1262	0.1276
EIRP(dBm)	23.91	23.88	23.81	23.93	23.80	23.90	24.10	24.01	24.06
EIRP(Watts)	0.2460	0.2443	0.2404	0.2472	0.2399	0.2455	0.2570	0.2518	0.2547

LTE Band 2 (GT - LC = 3.0 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
(MHz)									
Conducted Power (dBm)	21.18	20.94	21.05	21.12	20.94	20.80	21.41	21.13	21.25
Conducted Power (Watts)	0.1312	0.1242	0.1274	0.1294	0.1242	0.1202	0.1384	0.1297	0.1334
EIRP(dBm)	24.18	23.94	24.05	24.12	23.94	23.80	24.41	24.13	24.25
EIRP(Watts)	0.2618	0.2477	0.2541	0.2582	0.2477	0.2399	0.2761	0.2588	0.2661



LTE Band 4 (GT - LC = 3.0 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
(MHz)									
Conducted Power (dBm)	21.36	21.38	21.66	21.42	21.38	21.57	22.18	22.22	22.43
Conducted Power (Watts)	0.1368	0.1374	0.1466	0.1387	0.1374	0.1435	0.1652	0.1667	0.1750
EIRP(dBm)	24.36	24.38	24.66	24.42	24.38	24.57	25.18	25.22	25.43
EIRP(Watts)	0.2729	0.2742	0.2924	0.2767	0.2742	0.2864	0.3296	0.3327	0.3491

LTE Band 4 (GT - LC = 3.0 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
(MHz)									
Conducted Power (dBm)	22.33	22.08	22.30	21.96	21.81	21.82	21.94	21.84	21.94
Conducted Power (Watts)	0.1710	0.1614	0.1698	0.1570	0.1517	0.1521	0.1563	0.1528	0.1563
EIRP(dBm)	25.33	25.08	25.30	24.96	24.81	24.82	24.94	24.84	24.94
EIRP(Watts)	0.3412	0.3221	0.3388	0.3133	0.3027	0.3034	0.3119	0.3048	0.3119



LTE Band 4 (GT - LC = 3.0 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
(MHz)									
Conducted Power (dBm)	20.60	20.78	21.08	20.64	20.65	21.07	21.70	21.65	21.91
Conducted Power (Watts)	0.1148	0.1197	0.1282	0.1159	0.1161	0.1279	0.1479	0.1462	0.1552
EIRP(dBm)	23.60	23.78	24.08	23.64	23.65	24.07	24.70	24.65	24.91
EIRP(Watts)	0.2291	0.2388	0.2559	0.2312	0.2317	0.2553	0.2951	0.2917	0.3097

LTE Band 4 (GT - LC = 3.0 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
(MHz)									
Conducted Power (dBm)	21.77	21.59	21.66	21.25	21.34	21.31	20.89	21.04	21.34
Conducted Power (Watts)	0.1503	0.1442	0.1466	0.1334	0.1361	0.1352	0.1227	0.1271	0.1361
EIRP(dBm)	24.77	24.59	24.66	24.25	24.34	24.31	23.89	24.04	24.34
EIRP(Watts)	0.2999	0.2877	0.2924	0.2661	0.2716	0.2698	0.2449	0.2535	0.2716



LTE Band 5 (GT - LC = 3.0 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	21.27	21.65	21.35	21.37	21.63	21.47	21.52	21.58	21.58
Conducted Power (Watts)	0.1340	0.1462	0.1365	0.1371	0.1455	0.1403	0.1419	0.1439	0.1439
ERP(dBm)	22.12	22.50	22.20	22.22	22.48	22.32	22.37	22.43	22.43
ERP(Watts)	0.1629	0.1778	0.1660	0.1667	0.1770	0.1706	0.1726	0.1750	0.1750

LTE Band 5 (GT - LC = 3.0 dB) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	22.28	22.55	22.14
Conducted Power (Watts)	0.1690	0.1799	0.1637
ERP(dBm)	23.13	23.40	22.99
ERP(Watts)	0.2056	0.2188	0.1991



LTE Band 5 (GT - LC = 3.0 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	20.71	20.94	20.63	20.78	20.89	20.72	20.75	21.05	20.82
Conducted Power (Watts)	0.1178	0.1242	0.1156	0.1197	0.1227	0.1180	0.1189	0.1274	0.1208
ERP(dBm)	21.56	21.79	21.48	21.63	21.74	21.57	21.60	21.90	21.67
ERP(Watts)	0.1432	0.1510	0.1406	0.1455	0.1493	0.1435	0.1445	0.1549	0.1469

LTE Band 5 (GT - LC = 3.0 dB) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	21.61	21.80	21.49
Conducted Power (Watts)	0.1449	0.1514	0.1409
ERP(dBm)	22.46	22.65	22.34
ERP(Watts)	0.1762	0.1841	0.1714



LTE Band 7 (GT - LC = 3.0 dB) QPSK			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	22.61	22.63	22.36
Conducted Power (Watts)	0.1824	0.1832	0.1722
EIRP(dBm)	25.61	25.63	25.36
EIRP(Watts)	0.3639	0.3656	0.3436

LTE Band 7 (GT - LC = 3.0 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	22.57	22.60	22.54	22.59	22.47	22.70	22.65	22.33	22.67
Conducted Power (Watts)	0.1807	0.1820	0.1795	0.1816	0.1766	0.1862	0.1841	0.1710	0.1849
EIRP(dBm)	25.57	25.60	25.54	25.59	25.47	25.70	25.65	25.33	25.67
EIRP(Watts)	0.3606	0.3631	0.3581	0.3622	0.3524	0.3715	0.3673	0.3412	0.3690



LTE Band 7 (GT - LC = 3.0 dB) 16QAM			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	21.81	21.89	21.66
Conducted Power (Watts)	0.1517	0.1545	0.1466
EIRP(dBm)	24.81	24.89	24.66
EIRP(Watts)	0.3027	0.3083	0.2924

LTE Band 7 (GT - LC = 3.0 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	21.81	21.90	21.85	21.82	21.74	21.95	22.13	21.70	21.07
Conducted Power (Watts)	0.1517	0.1549	0.1531	0.1521	0.1493	0.1567	0.1633	0.1479	0.1279
EIRP(dBm)	24.81	24.90	24.85	24.82	24.74	24.95	25.13	24.70	24.07
EIRP(Watts)	0.3027	0.3090	0.3055	0.3034	0.2979	0.3126	0.3258	0.2951	0.2553



LTE Band 66 (GT - LC = 3.0 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	131979	132322	132665	131987	132322	132657	131997	132322	132647
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1745	1779.3	1711.5	1745	1778.5	1712.5	1745	1777.5
(MHz)									
Conducted Power (dBm)	20.65	20.81	21.32	20.75	20.85	21.28	21.58	21.59	21.94
Conducted Power (Watts)	0.1161	0.1205	0.1355	0.1189	0.1216	0.1343	0.1439	0.1442	0.1563
EIRP(dBm)	23.65	23.81	24.32	23.75	23.85	24.28	24.58	24.59	24.94
EIRP(Watts)	0.2317	0.2404	0.2704	0.2371	0.2427	0.2679	0.2871	0.2877	0.3119

LTE Band 66 (GT - LC = 3.0 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	132022	132322	132622	132047	132322	132597	132072	132322	132572
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency	1715	1745	1775	1717.5	1745	1772.5	1720	1745	1770
(MHz)									
Conducted Power (dBm)	21.68	21.59	21.82	21.42	21.64	21.80	21.51	21.79	21.99
Conducted Power (Watts)	0.1472	0.1442	0.1521	0.1387	0.1459	0.1514	0.1416	0.1510	0.1581
EIRP(dBm)	24.68	24.59	24.82	24.42	24.64	24.80	24.51	24.79	24.99
EIRP(Watts)	0.2938	0.2877	0.3034	0.2767	0.2911	0.3020	0.2825	0.3013	0.3155



LTE Band 66 (GT - LC = 3.0 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	131979	132322	132665	131987	132322	132657	131997	132322	132647
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1745	1779.3	1711.5	1745	1778.5	1712.5	1745	1777.5
(MHz)									
Conducted Power (dBm)	19.94	20.27	20.70	20.01	20.29	20.62	20.81	21.03	21.40
Conducted Power (Watts)	0.0986	0.1064	0.1175	0.1002	0.1069	0.1153	0.1205	0.1268	0.1380
EIRP(dBm)	22.94	23.27	23.70	23.01	23.29	23.62	23.81	24.03	24.40
EIRP(Watts)	0.1968	0.2123	0.2344	0.2000	0.2133	0.2301	0.2404	0.2529	0.2754

LTE Band 66 (GT - LC = 3.0 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	132022	132322	132622	132047	132322	132597	132072	132322	132572
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency	1715	1745	1775	1717.5	1745	1772.5	1720	1745	1770
(MHz)									
Conducted Power (dBm)	20.96	21.06	21.21	20.75	20.94	21.17	20.92	21.11	21.30
Conducted Power (Watts)	0.1247	0.1276	0.1321	0.1189	0.1242	0.1309	0.1236	0.1291	0.1349
EIRP(dBm)	23.96	24.06	24.21	23.75	23.94	24.17	23.92	24.11	24.30
EIRP(Watts)	0.2489	0.2547	0.2636	0.2371	0.2477	0.2612	0.2466	0.2576	0.2692

**Peak-to-Average Ratio**







Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.55	5.39	5.94	6.03	PASS
Middle CH	4.75	5.22	5.62	5.94	
Highest CH	4.49	5.22	5.13	5.86	

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.58	5.22	5.59	5.77	PASS
Middle CH	4.81	5.25	5.62	5.91	
Highest CH	4.72	5.28	5.30	5.86	

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.90	5.36	5.74	6.06	PASS
Middle CH	4.96	5.30	6.29	5.94	
Highest CH	4.81	5.42	5.86	5.94	


Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.58	5.22	4.99	5.88	PASS
Middle CH	4.78	5.13	5.57	5.86	
Highest CH	4.70	5.19	5.57	5.86	

Mode	LTE Band 66 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.64	5.36	5.83	6.09	PASS
Middle CH	4.99	5.54	5.62	6.26	
Highest CH	4.78	5.25	5.13	6.09	

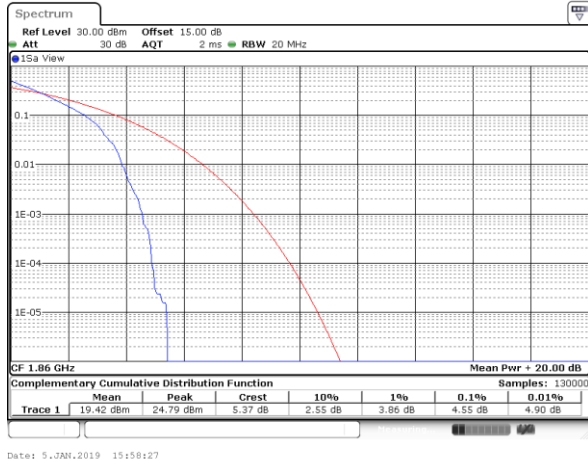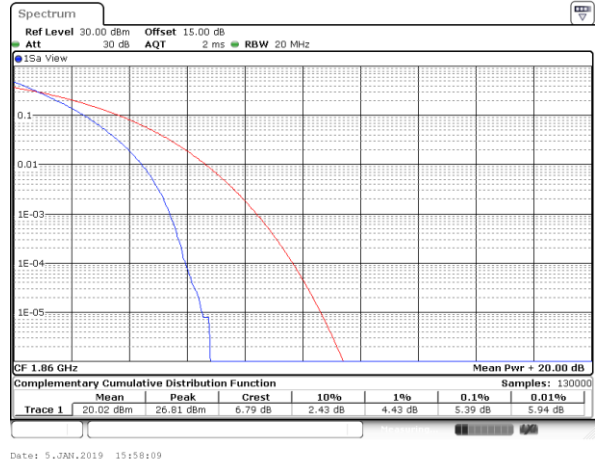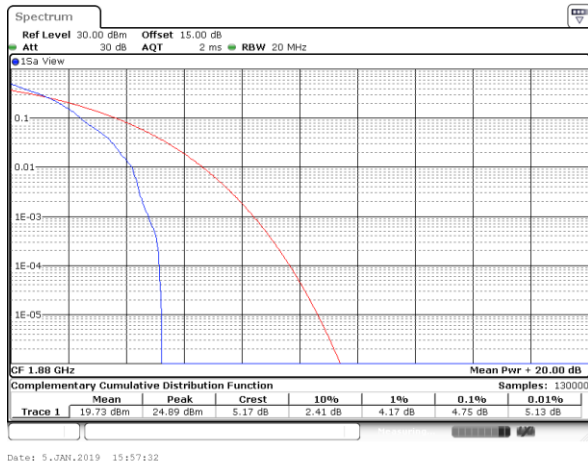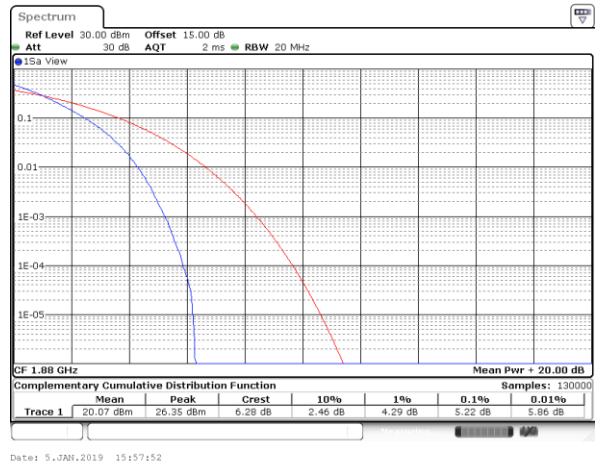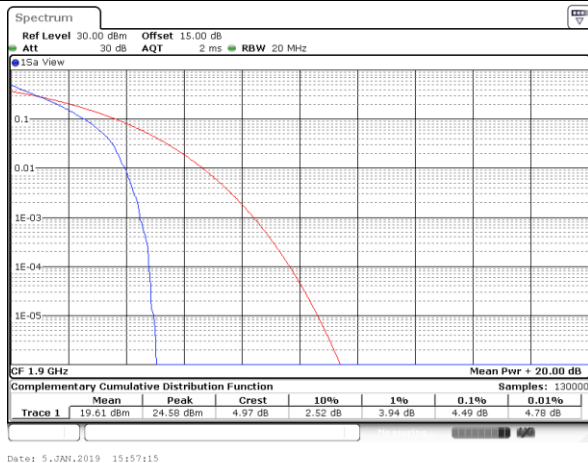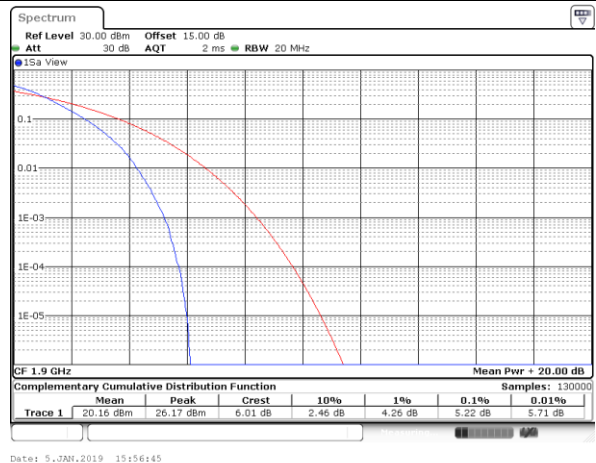
LTE Band 2 / 20MHz / QPSK
Lowest Channel / 1RB

Lowest Channel / Full RB

Middle Channel / 1RB

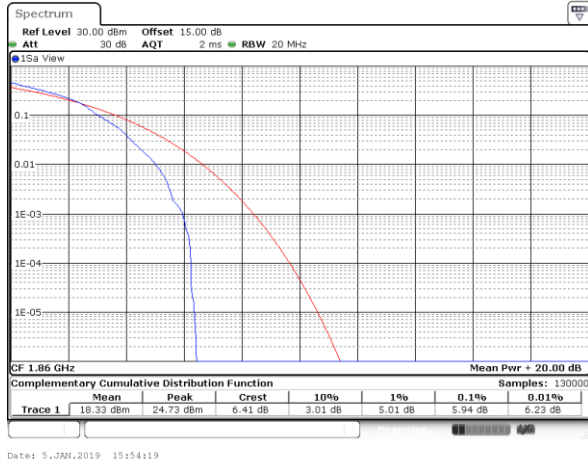Middle Channel / Full RB

Highest Channel / 1RB

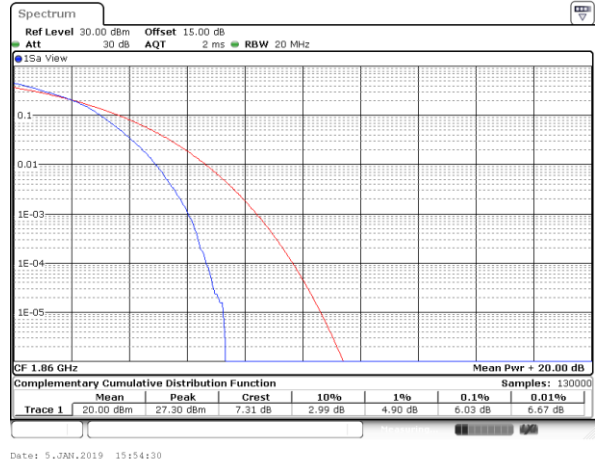Highest Channel / Full RB


LTE Band 2 / 20MHz / 16QAM


Lowest Channel / 1RB




Lowest Channel / Full RB




Middle Channel / 1RB

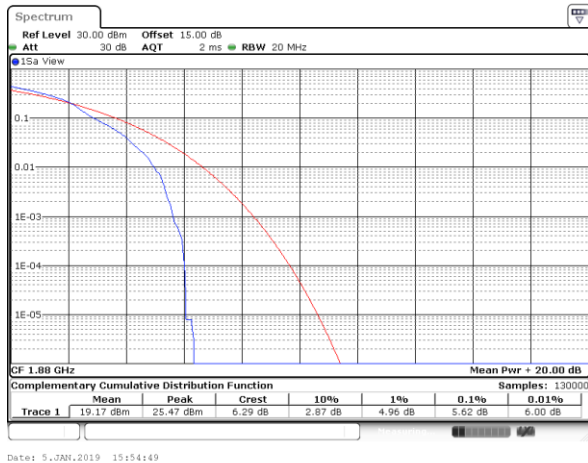


Middle Channel / Full RB






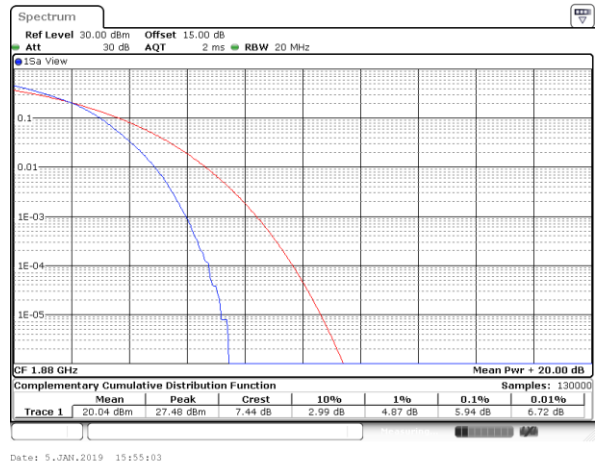


Highest Channel / 1RB

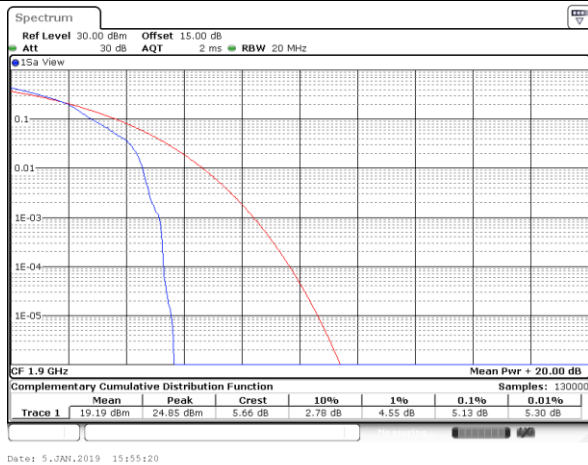

Highest Channel / Full RB

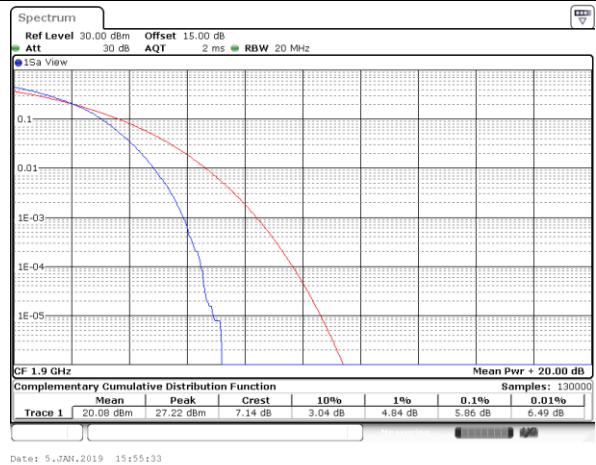


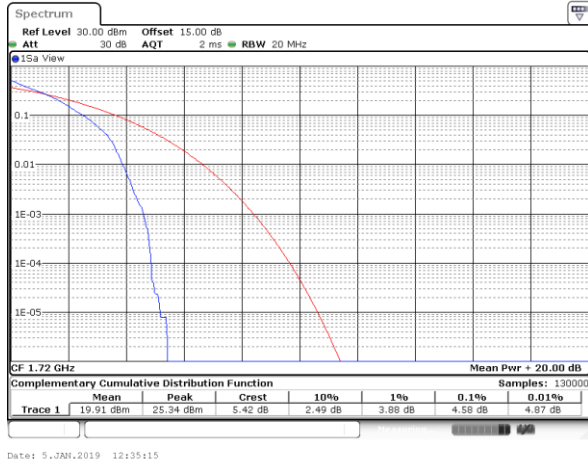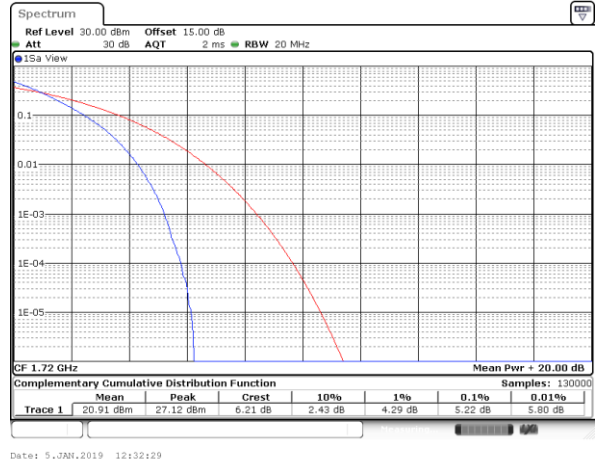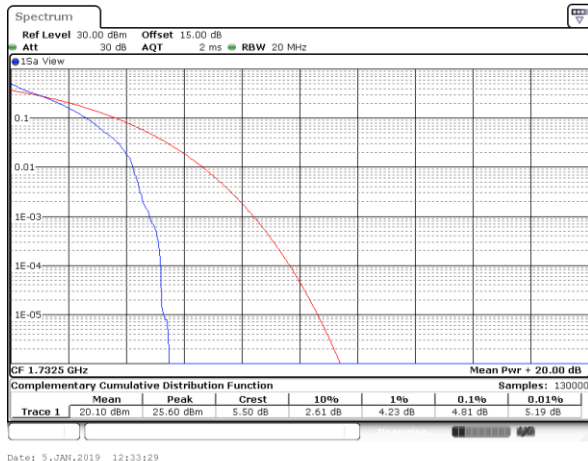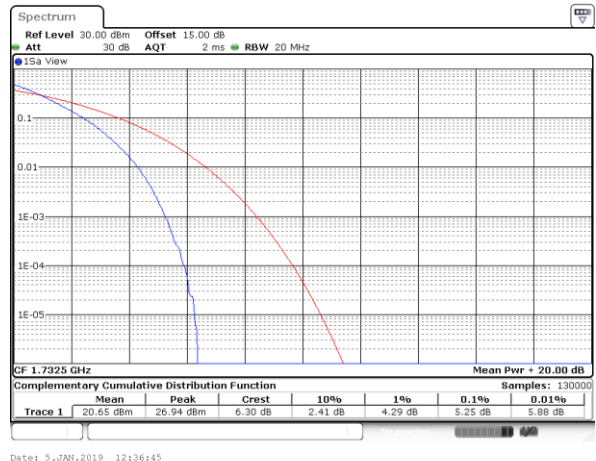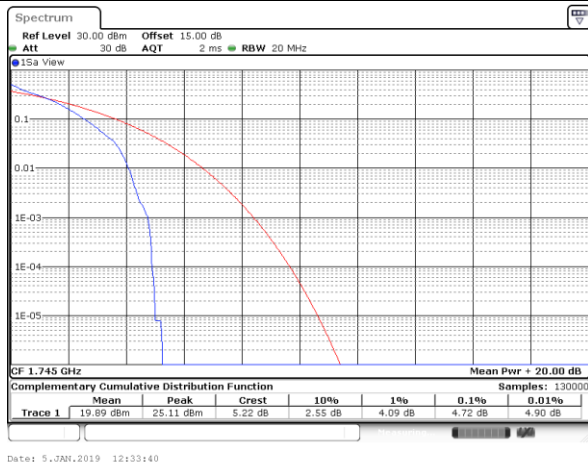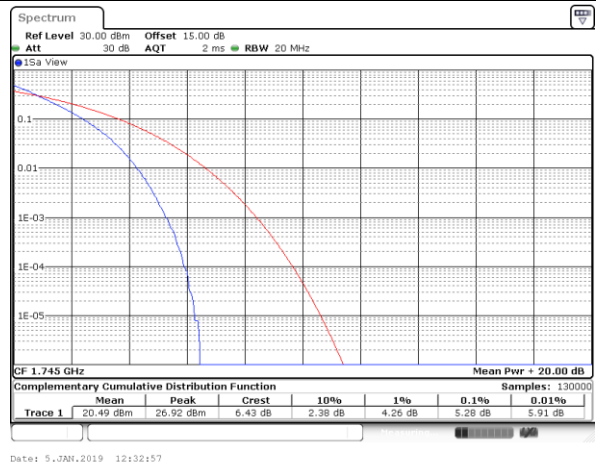LTE Band 4 / 20MHz / QPSK
Lowest Channel / 1RB

Lowest Channel / Full RB

Middle Channel / 1RB

Middle Channel / Full RB

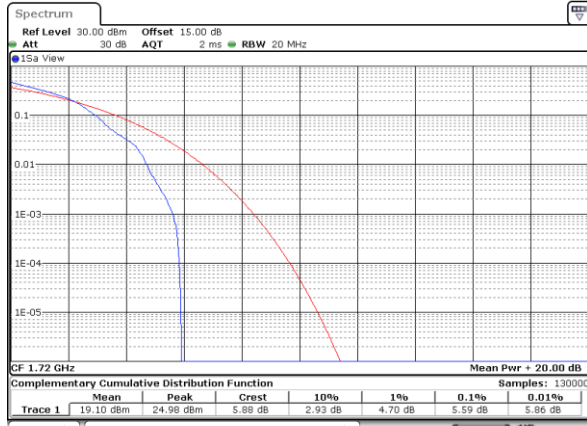Highest Channel / 1RB

Highest Channel / Full RB


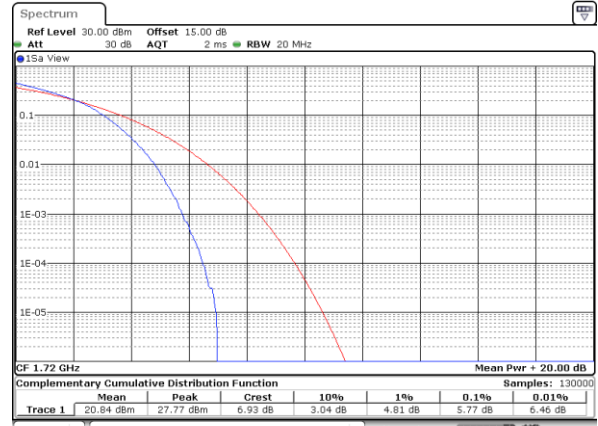


LTE Band 4 / 20MHz / 16QAM


Lowest Channel / 1RB




Lowest Channel / Full RB




Middle Channel / 1RB

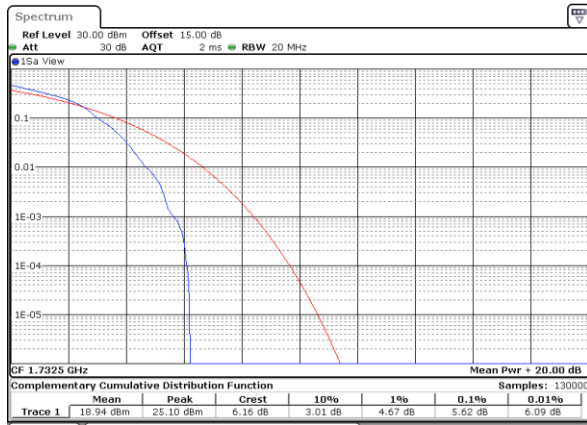


Middle Channel / Full RB






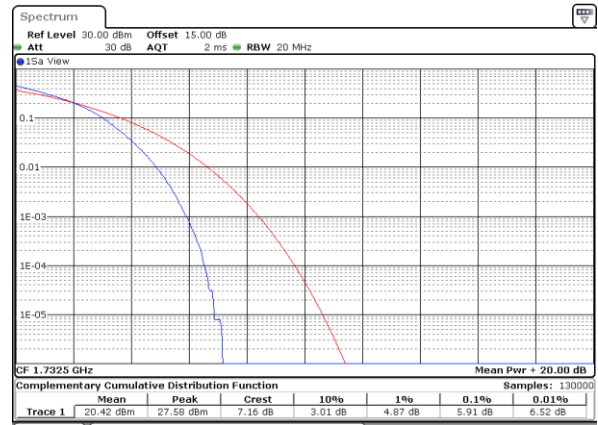








Highest Channel / 1RB

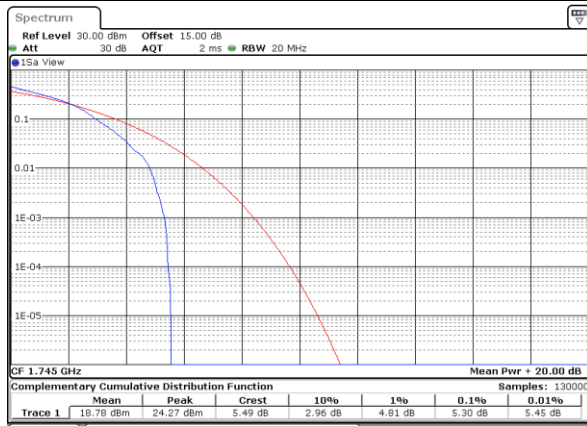

Highest Channel / Full RB

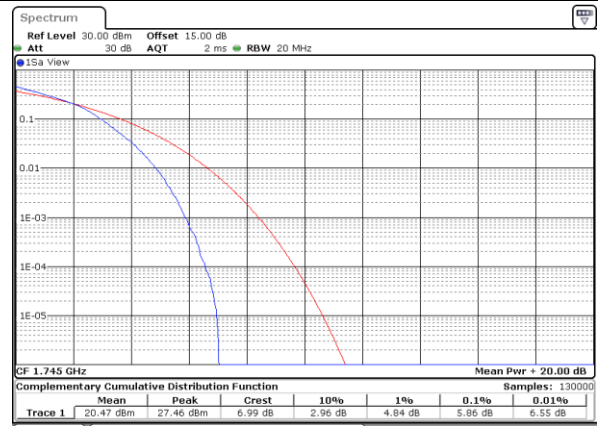

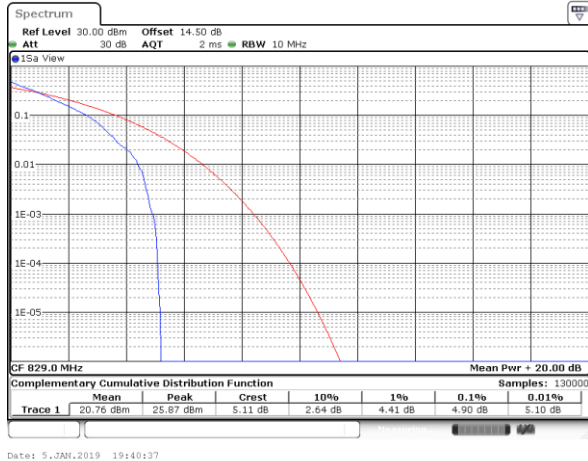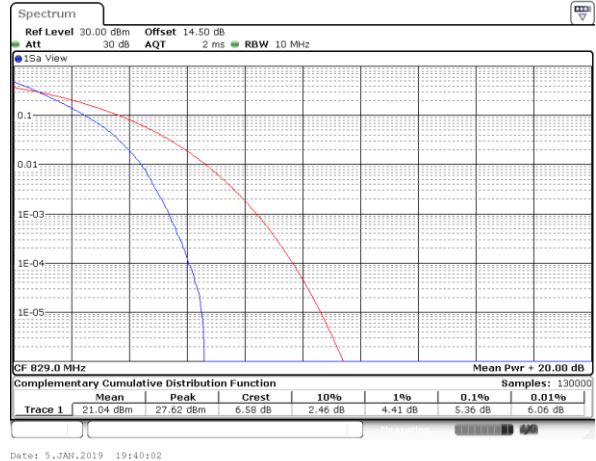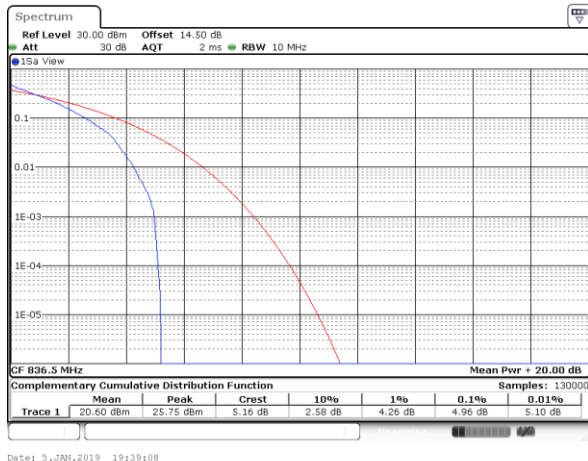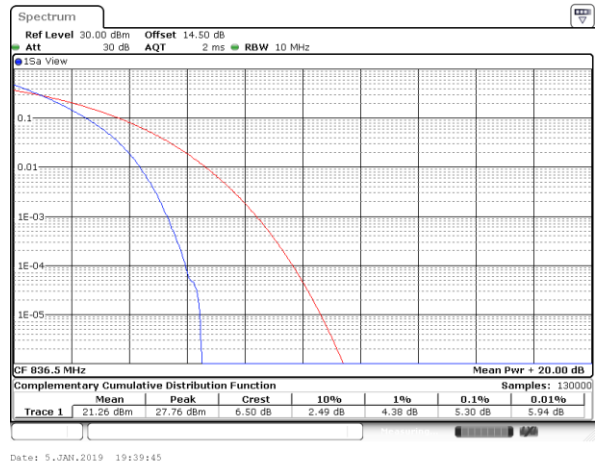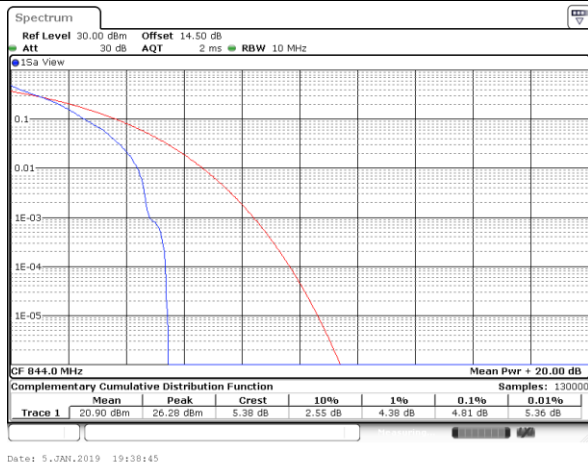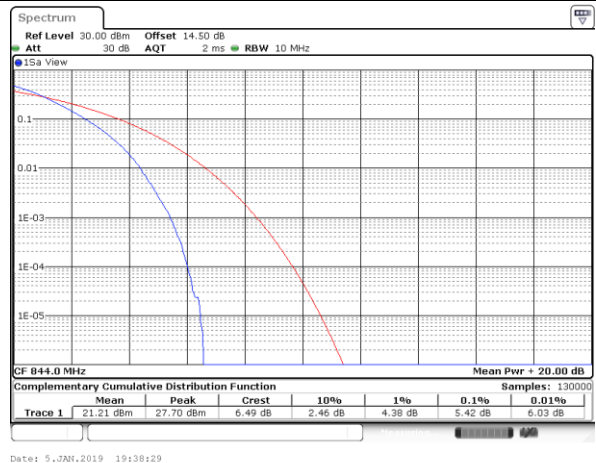
LTE Band 5 / 10MHz / QPSK
Lowest Channel / 1RB

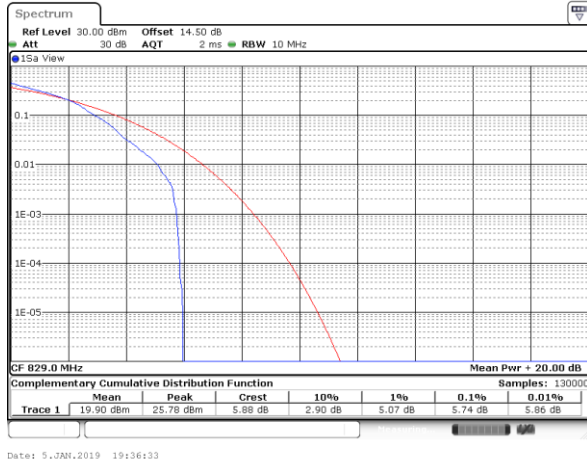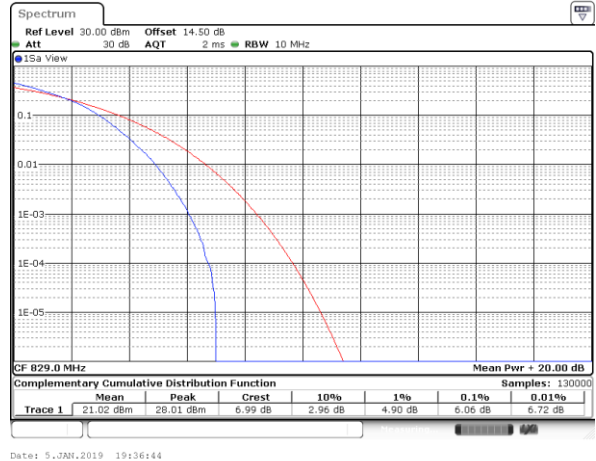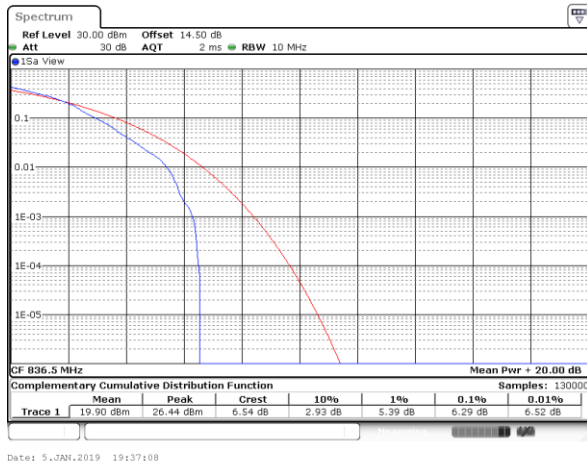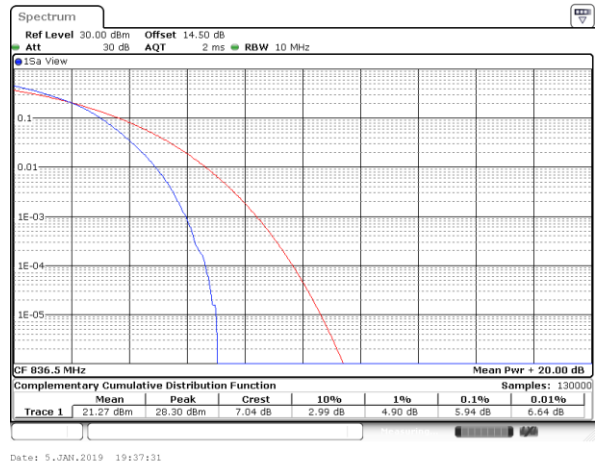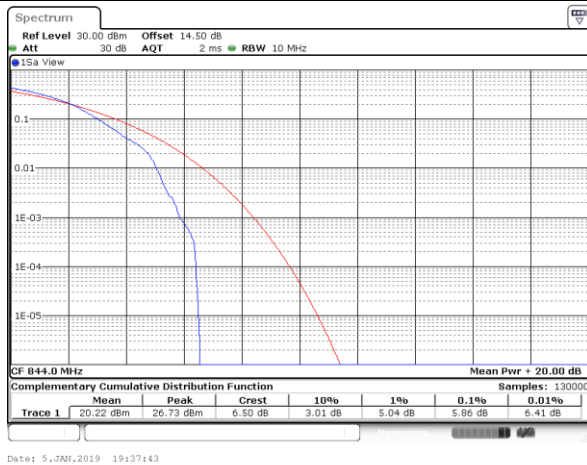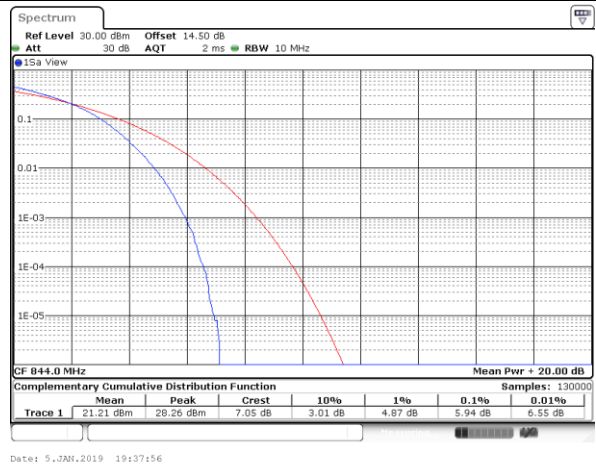Lowest Channel / Full RB

Middle Channel / 1RB

Middle Channel / Full RB

Highest Channel / 1RB

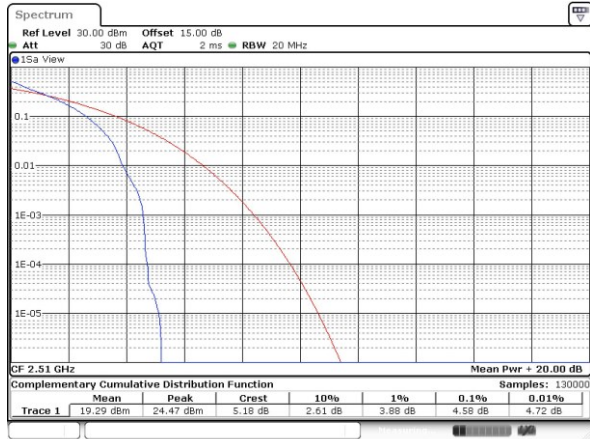Highest Channel / Full RB


LTE Band 5 / 10MHz / 16QAM
Lowest Channel / 1RB

Lowest Channel / Full RB

Middle Channel / 1RB

Middle Channel / Full RB

Highest Channel / 1RB

Highest Channel / Full RB


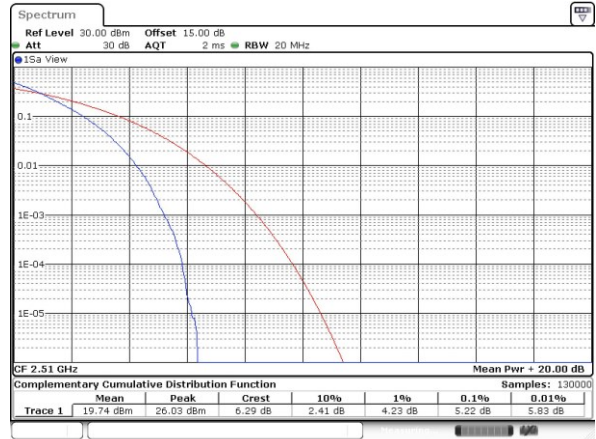


LTE Band 7 / 20MHz / QPSK


Lowest Channel / 1RB




Lowest Channel / Full RB




Middle Channel / 1RB

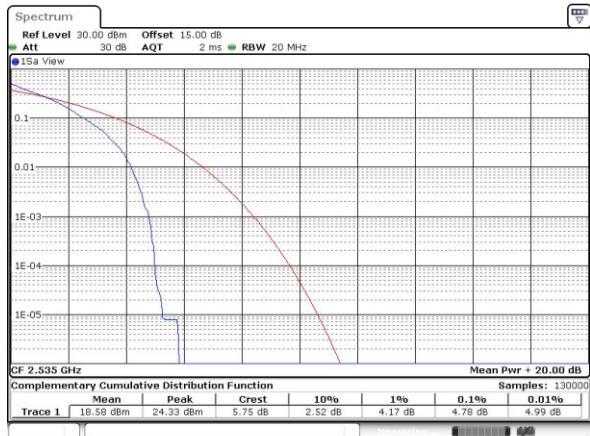


Middle Channel / Full RB

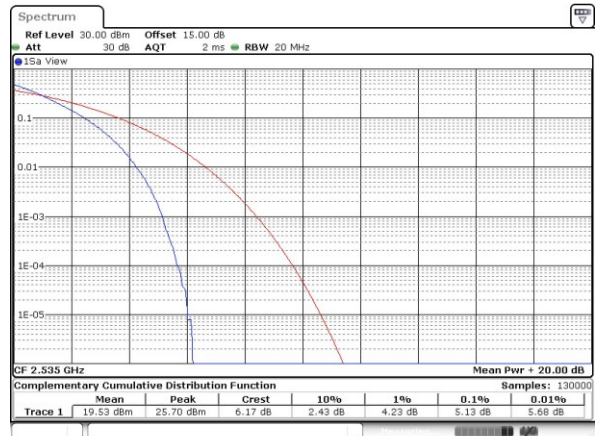

Highest Channel / 1RB

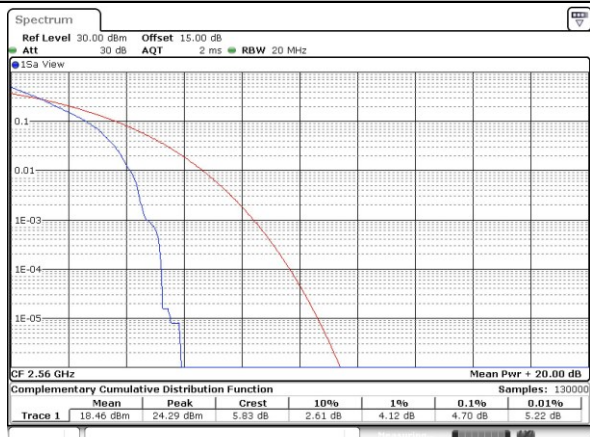

Highest Channel / Full RB

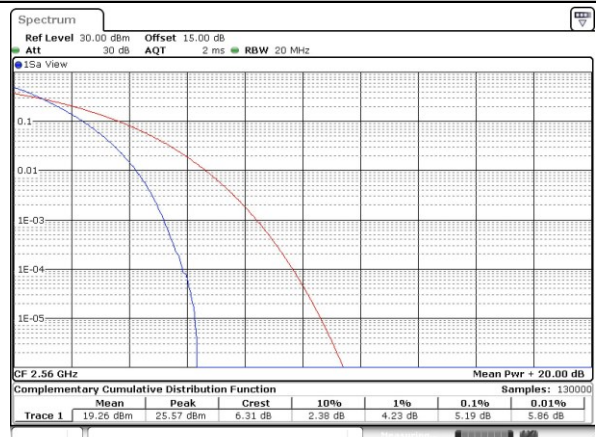


LTE Band 7 / 20MHz / 16QAM


Lowest Channel / 1RB




Lowest Channel / Full RB

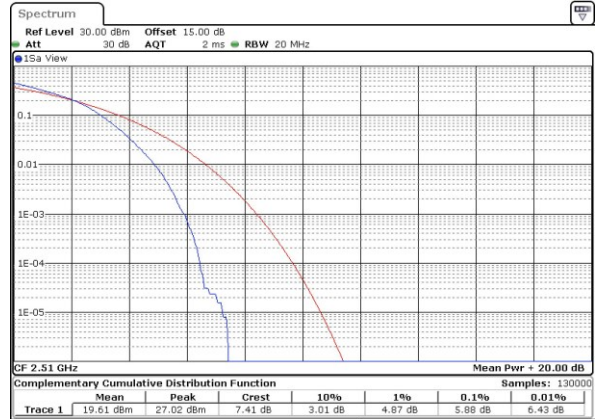

Middle Channel / 1RB

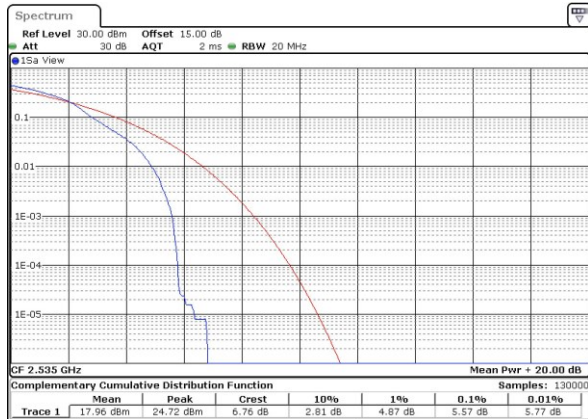

Middle Channel / Full RB

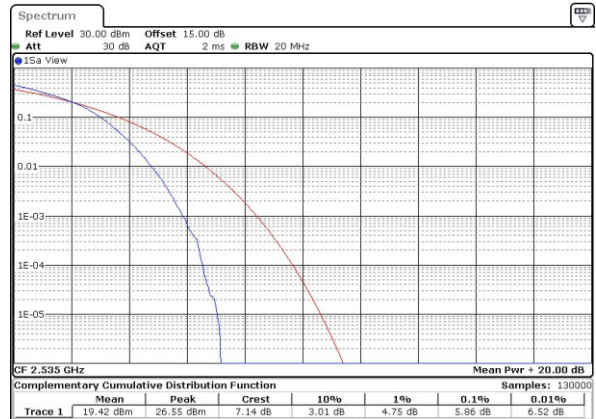

Highest Channel / 1RB




Highest Channel / Full RB




LTE Band 66 / 20MHz / QPSK


Lowest Channel / 1RB

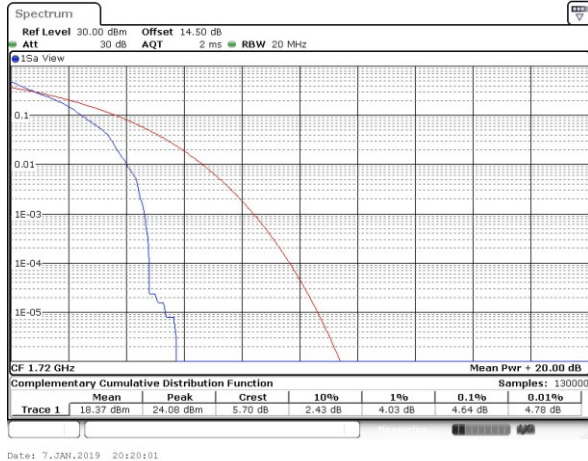


Lowest Channel / Full RB

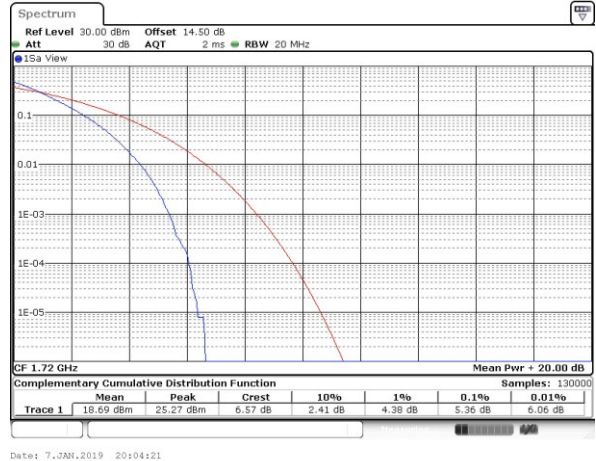


Middle Channel / 1RB

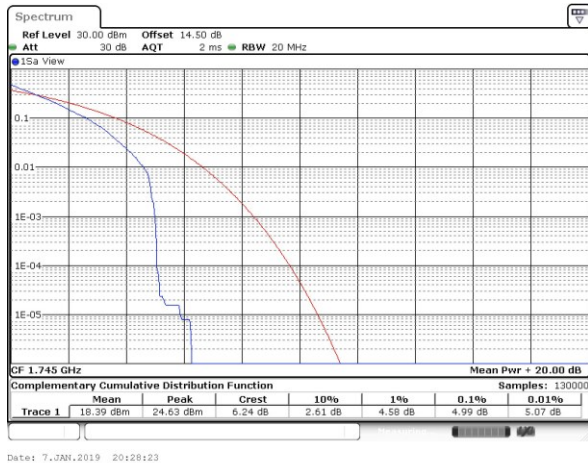


Middle Channel / Full RB

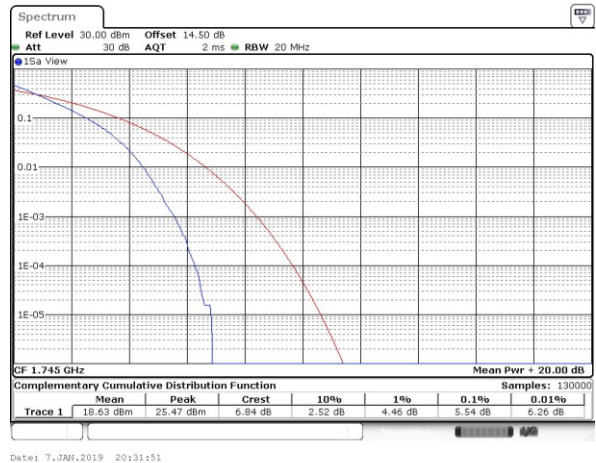

Highest Channel / 1RB

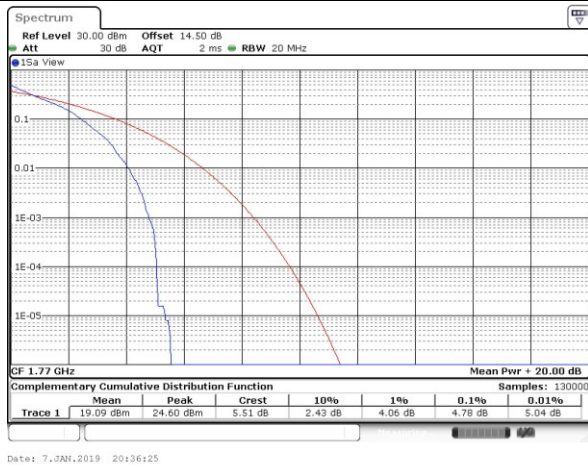


Highest Channel / Full RB

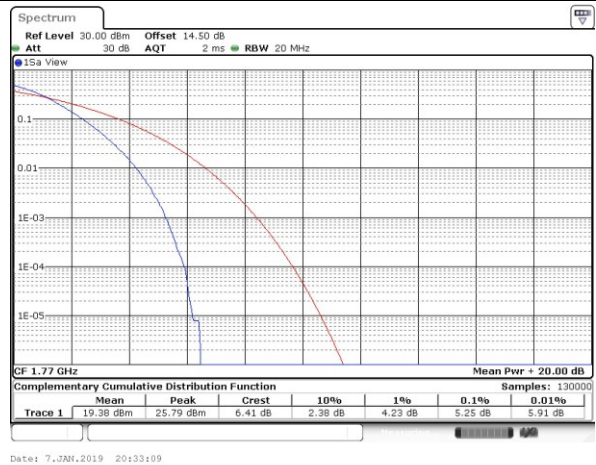




LTE Band 66 / 20MHz / 16QAM


Lowest Channel / 1RB

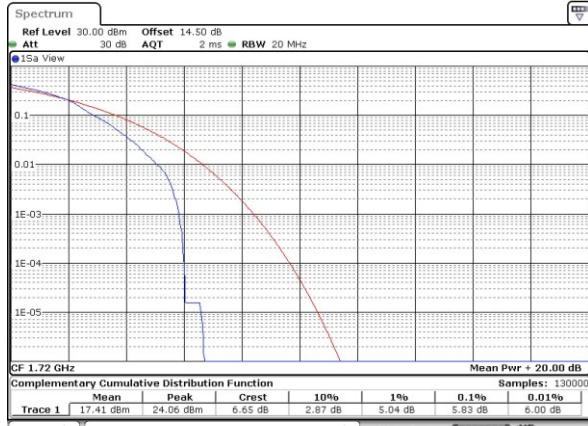


Lowest Channel / Full RB

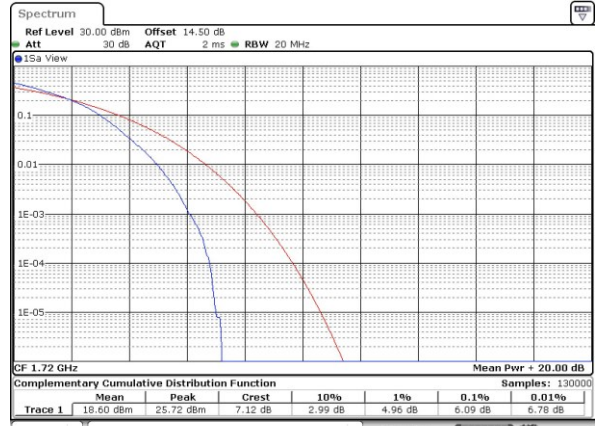


Middle Channel / 1RB

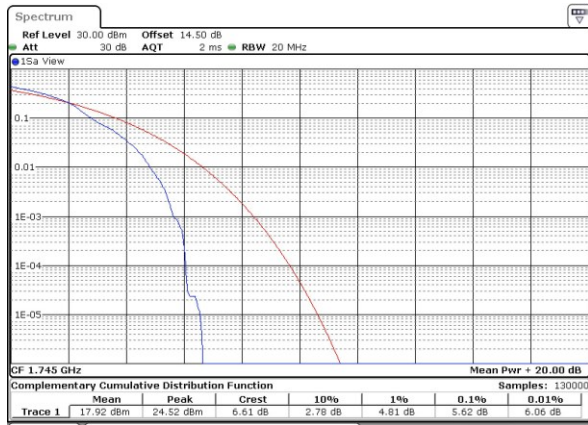

Middle Channel / Full RB

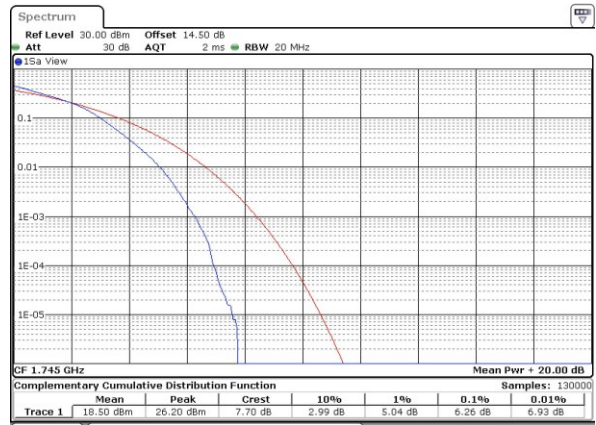

Highest Channel / 1RB

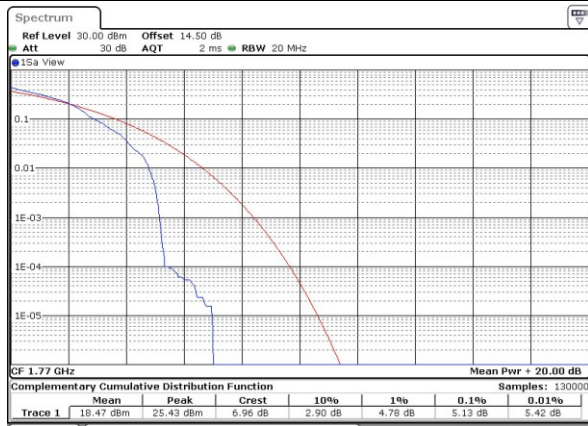

Highest Channel / Full RB

